

FCC TEST REPORT

CATEGORY : Mobile End Product

PRODUCT NAME : 80211g Wireless LAN USB Print Server
80211g Wireless LAN Converter

FCC ID. : NDD9512050408

FILING TYPE : Certification

MODEL (BRAND) NAME : PS-1205UWG / EW-7206CG (EDIMAX)
GP-105UG / GAP-E06CG (GLP)

APPLICANT : **EDIMAX TECHNOLOGY CO., LTD.**
No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan

MANUFACTURER : Same as Applicant

ISSUED BY : **SPORTON International Inc.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.



Dr. Alan Lane
Vice General Manager
Sporton International Inc.



Lab Code: 200079-0



Table of Contents

History of this test report.....	ii
1. General Description of Equipment under Test.....	1
1.1. Applicant.....	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test	1
1.4. Features of Equipment under Test.....	1
1.5. Table for Carrier Frequencies	2
2. Test Configuration of the Equipment under Test.....	3
2.1. Description of the Test	3
2.2. Frequency Range Investigated	3
2.3. Description of Test Supporting Units.....	4
2.4. Connection Diagram of Test System	5
2.5. Test Software	7
3. Test Location and Standards	8
3.1. Test Location.....	8
3.2. Test Conditions	8
3.3. Standards for Methods of Measurement.....	8
3.4. DoC Statement.....	8
4. List of Measurements.....	9
4.1. Summary of the Test Results	9
5. Test Result	10
5.1. Test of 6dB Spectrum Bandwidth (DSSS System)	10
5.2. Test of Maximum Peak Output Power	15
5.3. Test of Peak Power Spectral Density.....	17
5.4. Test of Band Edges Emission	22
5.5. Test of AC Power Line Conducted Emission	26
5.6. Test of Spurious Radiated Emission	45
5.7. Antenna Requirements	67
5.8. RF Exposure	68
6. List of Measuring Equipments Used	71
Appendix A. Photographs of EUT.....	A1 ~ A20



History of this test report

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. General Description of Equipment under Test

1.1. Applicant

EDIMAX TECHNOLOGY CO., LTD.

No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei Hsien, Taiwan

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

This product is a wireless print server. The radio technical data has been listed on section " Features of Equipment under Test ". USB interface can be used to operate with networking printer. There are 2 dipole antennas filed in this project.

1.4. Features of Equipment under Test

ITEM	DESCRIPTION
Type of Modulation	DSSS (CCK / DQPSK / DBPSK), OFDM
Number of Channels	11
Frequency Band	2400MHz ~ 2483.5MHz
Carrier Frequency of Each Channel	Please reference table below.
Channel Bandwidth	11MHz
RF Conducted Output Power	CCK : 15.60dBm (peak) OFDM : 13.60 dBm (peak)
Antenna Type / Gain	Dipole Antenna / 2dBi
Function Type	Transceiver
Duty Cycle	60%
Power Rating (AC/ DC, Voltage)	110VAC / 12VDC
Temperature Range (Operating)	0 ~ 55



1.5. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	5	2432 MHz	9	2452 MHz
2	2417 MHz	6	2437 MHz	10	2457 MHz
3	2422 MHz	7	2442 MHz	11	2462 MHz
4	2427 MHz	8	2447 MHz		



2. Test Configuration of the Equipment under Test

2.1. Description of the Test

- a. During testing, the equipment was placed on a non-conducting support.
- b. The following test modes were performed for spurious emission above 1GHz:
 - CH 01 2412MHz
 - CH 06 2437MHz
 - CH 11 2462MHz
- c. There are 2 configuration for the EUT. EUT 1 has USB port and power adapter port. EUT 2 has power adapter port only. EUT 1 could also be powered via USB port.
- d. Test modes:
 - Mode 1: EUT 1 powered via USB
 - Mode 2: EUT 1 powered via adapter
 - Mode 3: EUT 2
- e. There are 2 dipole antennas filed in this product.
- f. Spurious emission below 1GHz is independent of channel selection, so only Channel 11 with OFDM modulation was tested. Testing was performed on Mode 1 and Mode 3 for both antennas.
- g. For spurious emission above 1GHz, lowest, middle and highest channel was tested. And, only mode 1 was tested for both antennas.
- h. The EUT has been programmed to continuously transmit or receive during testing. The used peripherals as well as the configuration fulfill the requirements of ANSI C63.4:2001.
- i. The configuration is operated in a manner which tends to maximize its emission characteristics in a typical application.
- j. 3 meters measurement distance in semi-anechoic chamber was used in this test.

2.2. Frequency Range Investigated

- a. Conducted power line test: from 150 kHz to 30 MHz.
- b. Radiated emission test: from 30 MHz to 25000 MHz.



2.3. Description of Test Supporting Units

Support Unit 1. – Notebook (DELL)

FCC ID	: N/A
Model No.	: PP10L
Serial No.	: SP0031
Remark	: This support device was tested to comply with FCC standards and authorized under Declaration of Conformity.

Support Unit 2. -- Printer (EPSON)


FCC ID	: N/A
Model No.	: STYLUS COLOR 680
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0046
Data Cable	: Shielded, 360 degree via metal backshells, 1.35m

Support Unit 3. -- Modem (ACEEX)


FCC ID	: IFAXDM141
Model No.	: DM141
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0049
Data Cable	: Shielded, 1.15m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.4. Connection Diagram of Test System


<Mode 1 / Antenna 1 >

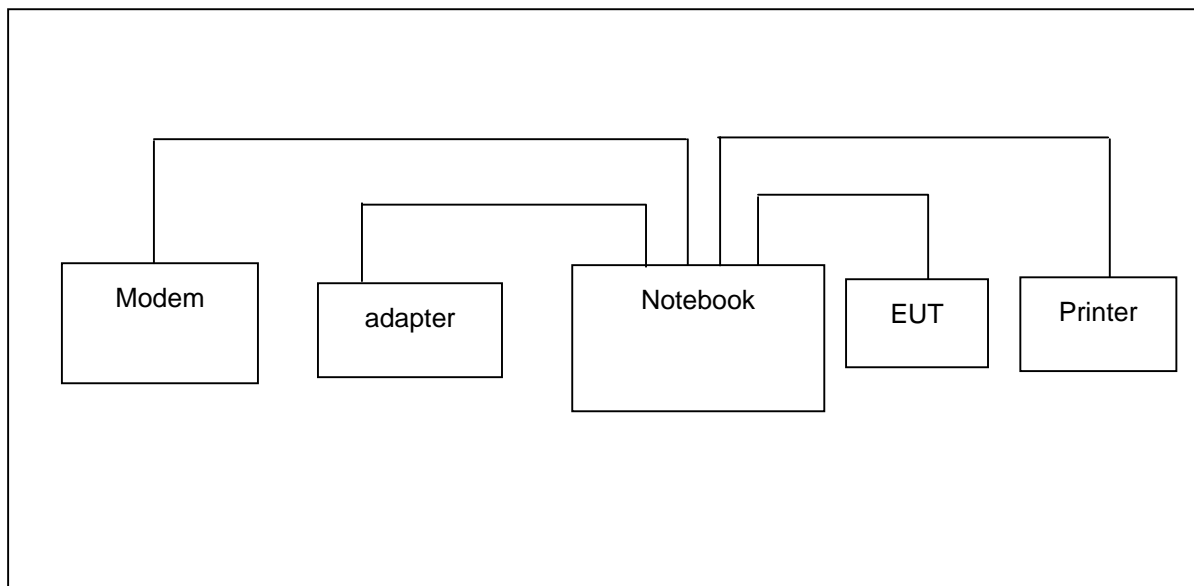


<Mode 3 / Antenna 1 >

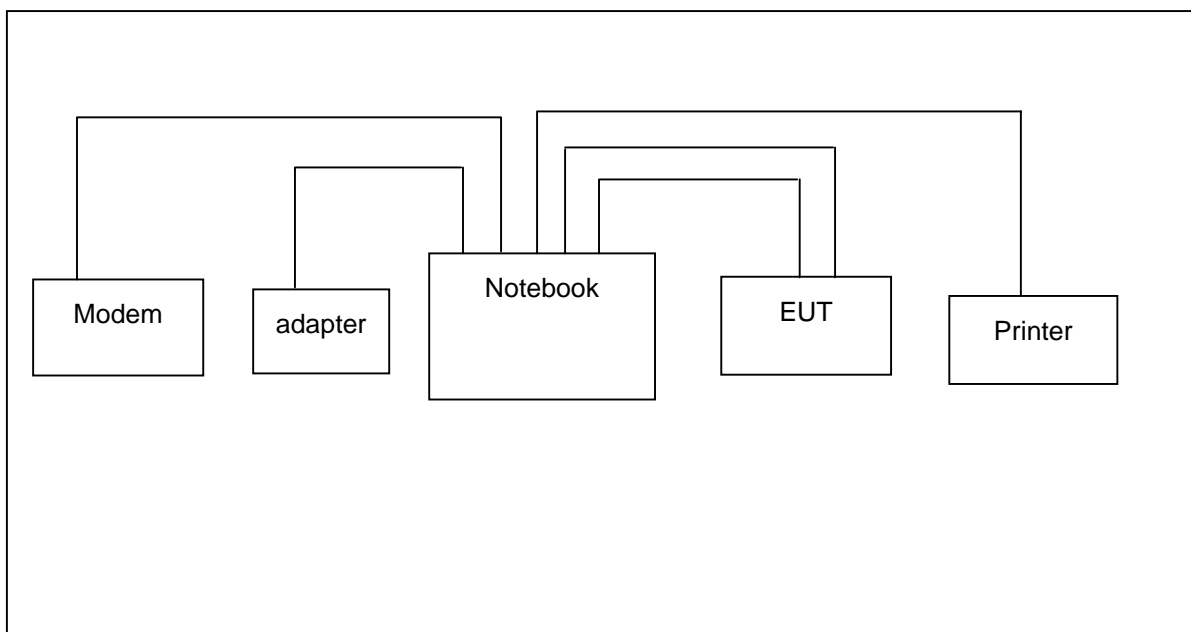

<Mode 1 / Antenna 2 >

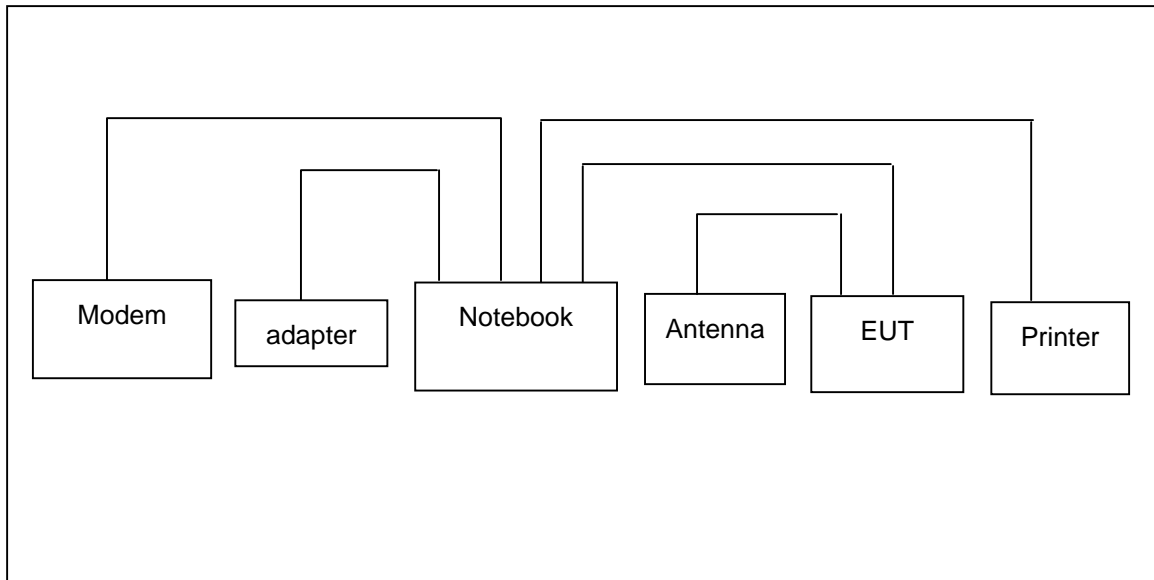

<Mode 3 / Antenna 2 >

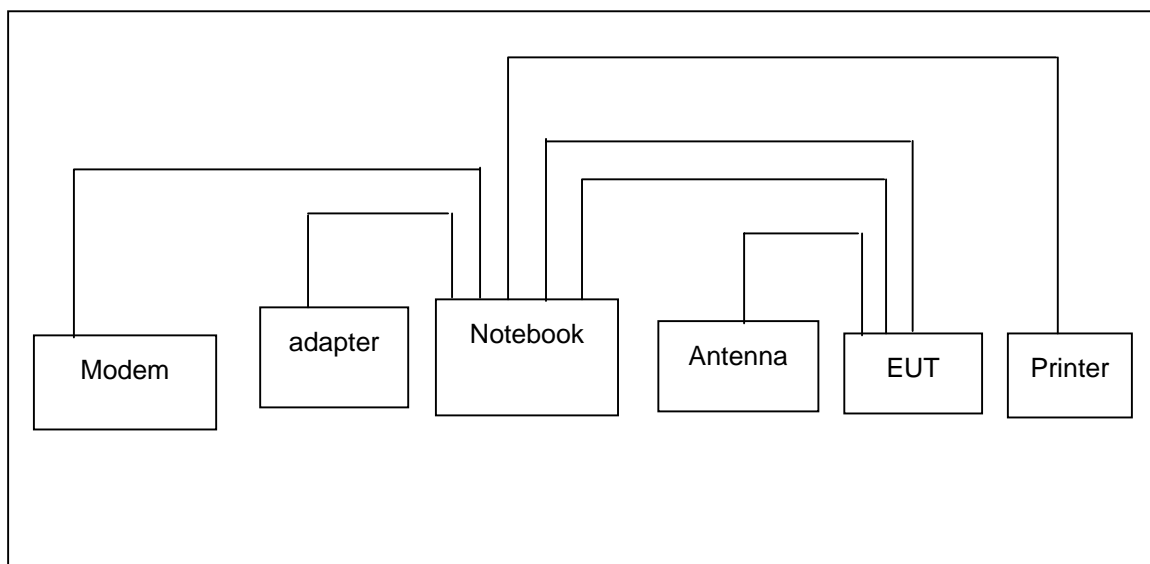



2.5. Test Software

There are 2 software may be used in the testing.

- a. Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.
- b. "H" Pattern Generator: Except Access Point, the supporting equipment such as monitor or printer is always available. Under testing, these supporting equipment has to also under working condition. "H" Pattern Generator is able to continuously transmitting "H" character to those supporting equipments.
- c. At the same time, "PING.EXE" to link with the remote workstation to receive and transmit data by wireless, and the PC reads and writes message in EUT.



3. Test Location and Standards

3.1. Test Location

Test Location : Sporton Hwa Ya Testing Building

Address : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Tel: +886 3 327 3456 Fax: +886 3 318 0055

Test Site No. : CO04-HY, 03CH03-HY

3.2. Test Conditions

Normal Voltage : 110VAC/60Hz & 3.5VDC (USB Port)

Extreme Voltage : 138VAC and 102VAC

Normal Temperature : 20

Extreme Temperature : 0 and 55

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2001

47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.



4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2			
Paragraph	FCC Rule	Description of Test	Result
5.1	15.247(a)(2)	6dB Spectrum Bandwidth	Pass
5.2	15.247(b)	Maximum Peak Output Power	Pass
5.3	15.247(d)	Peak Power Spectral Density	Pass
5.4	15.247(c)	Band Edges Emission	Pass
5.5	15.107/15.207	AC Power Line Conducted Emission	Pass
5.6	15.209/15.247(c)	Spurious Radiated Emission	Pass
5.7	15.203	Antenna Requirement	Pass
5.8	2.1091/2.1093	Maximum Permissible Exposure for the EUT	Pass

5. Test Result

5.1. Test of 6dB Spectrum Bandwidth (DSSS System)


5.1.1 Measuring Instruments

Item 16 of the table on section 6.

5.1.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6dB bandwidth is defined as the spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.


5.1.3 Test Setup Layout

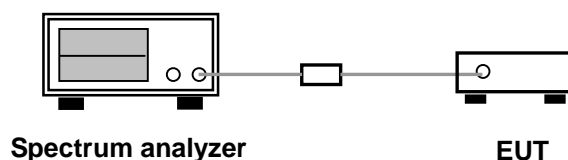

5.1.4 Test Result : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 25°C
- Relative Humidity: 65%
- Duty Cycle of the Equipment During the Test: 60%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (MHz)
01	2412	10.72	0.5
06	2437	10.84	0.5
11	2462	10.20	0.5




Date: 8.SEP.2004 19:10:35

Date: 8.SEP.2004 21:07:48



Modulation Type: CCK (Channel 11) :

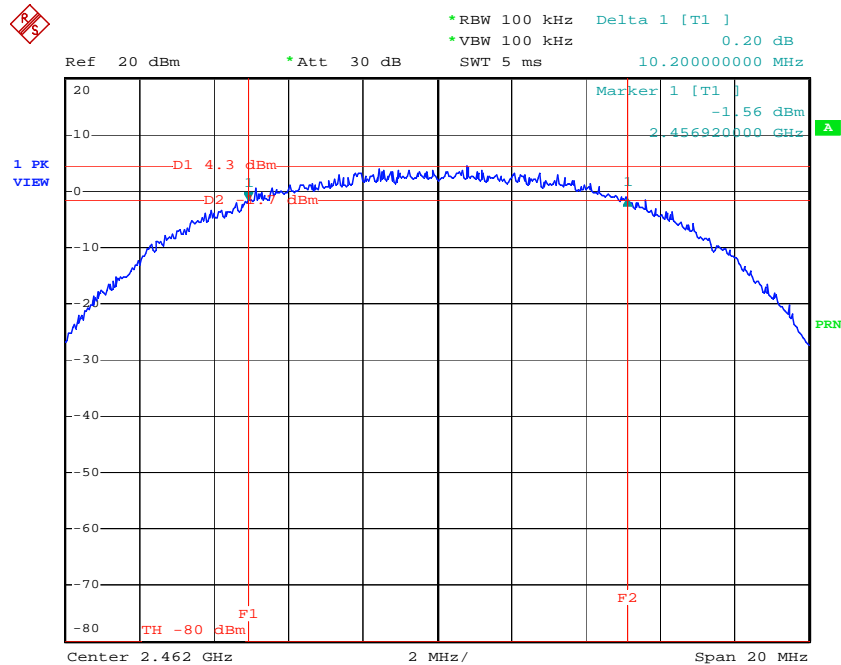


Date: 8.SEP.2004 19:15:01

- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Duty Cycle of the Equipment During the Test: 60%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (MHz)
01	2412	16.52	0.5
06	2437	16.52	0.5
11	2462	16.56	0.5




Modulation Type: OFDM (Channel 01) :

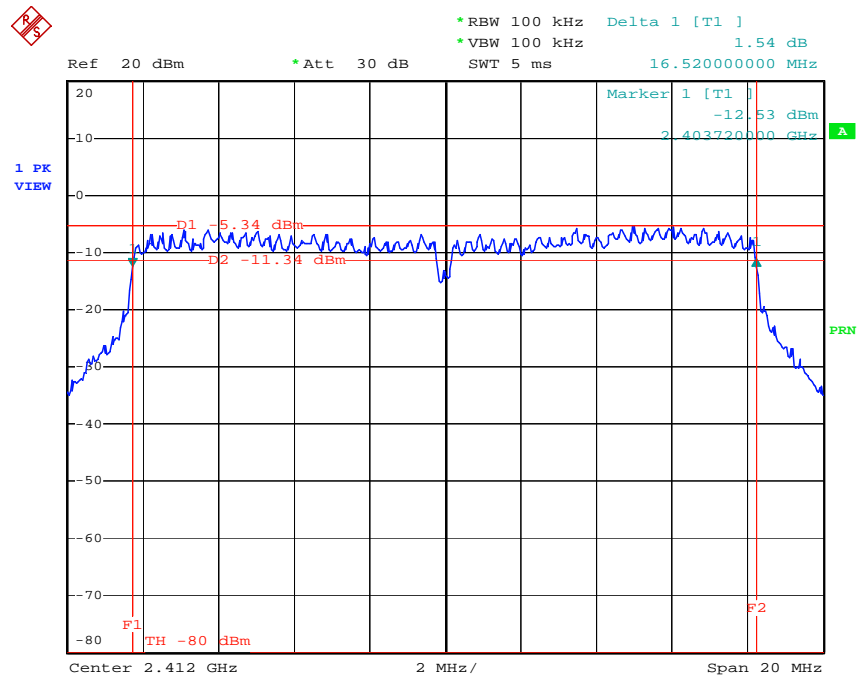

Date: 8.SEP.2004 21:46:20


Modulation Type: OFDM (Channel 06) :

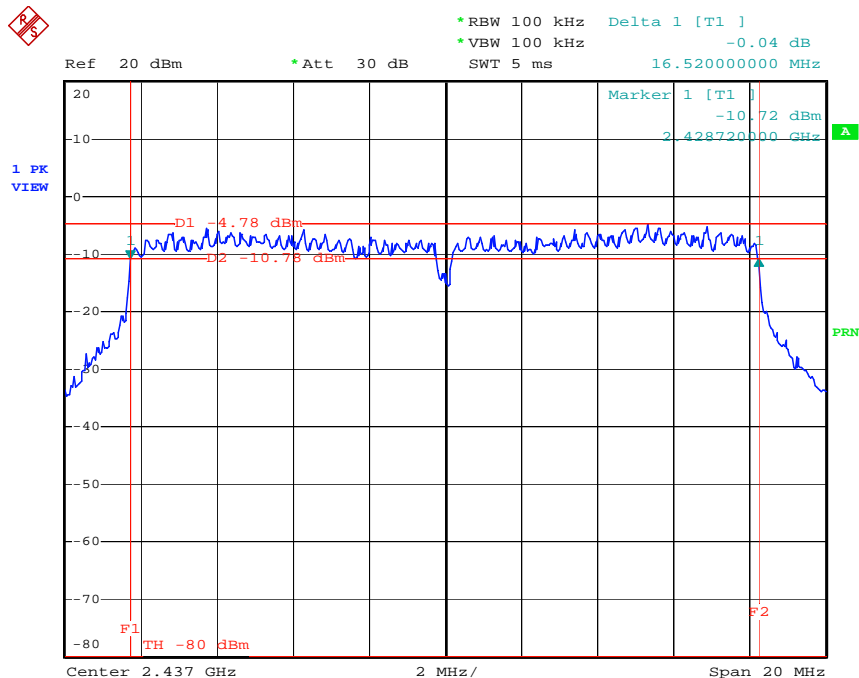

Date: 8.SEP.2004 21:14:54



Modulation Type: OFDM (Channel 11) :

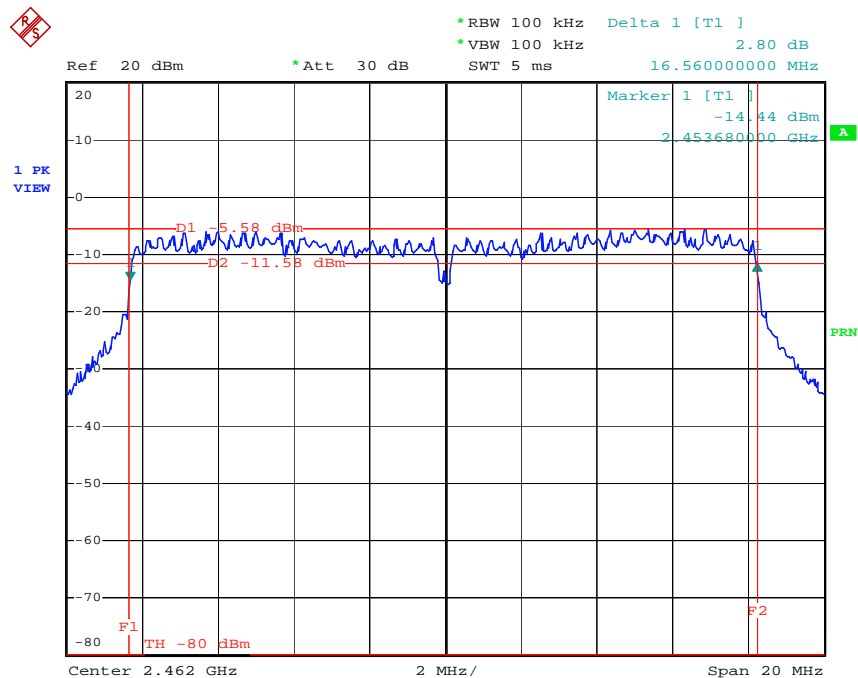

Date: 8.SEP.2004 21:16:55

5.2. Test of Maximum Peak Output Power


5.2.1 Measuring Instruments

Item 17, 19 of the table on section 6.

5.2.2 Test Procedures

1. The transmitter output was connected to the vertical channel of the oscilloscope through a detector.
2. Record peak value from the meter.
3. Repeated the 1~2 for the middle and highest channel of the EUT.

5.2.3 Test Setup Layout

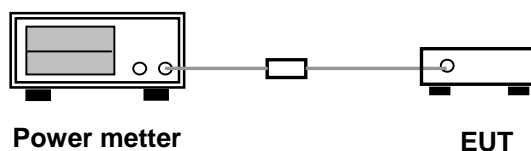

5.2.4 Test Result : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 25°C
- Relative Humidity: 65 %
- Duty Cycle of the Equipment During the Test: 60%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mWatt)	Limits (dBm)
01	2412	15.60	36.31	30 dBm
06	2437	15.60	35.48	30 dBm
11	2462	15.30	33.88	30 dBm



- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65 %
- Duty Cycle of the Equipment During the Test: 60%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mWatt)	Limits (dBm)
01	2412	13.60	22.91	30 dBm
06	2437	13.50	22.39	30 dBm
11	2462	13.50	22.39	30 dBm

5.3. Test of Peak Power Spectral Density


5.3.1 Measuring Instruments

Item 16 of the table on section 6.

5.3.2 Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

5.3.3 Test Setup Layout

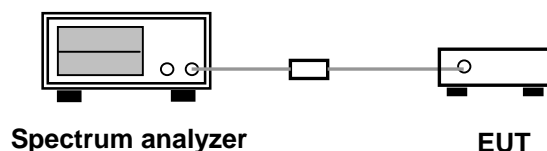

5.3.4 Test Result : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 25°C
- Relative Humidity: 65 %
- Duty Cycle of the Equipment During the Test: 60%
- Test Engineer: Sam Lee


Channel	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
01	2412	-10.20	8
06	2437	-9.27	8
11	2462	-9.86	8



FCC ID: NDD9512050408
Issued on Oct. 29, 2004


Report No.: FR490612

Modulation Type: CCK (Channel 01) :

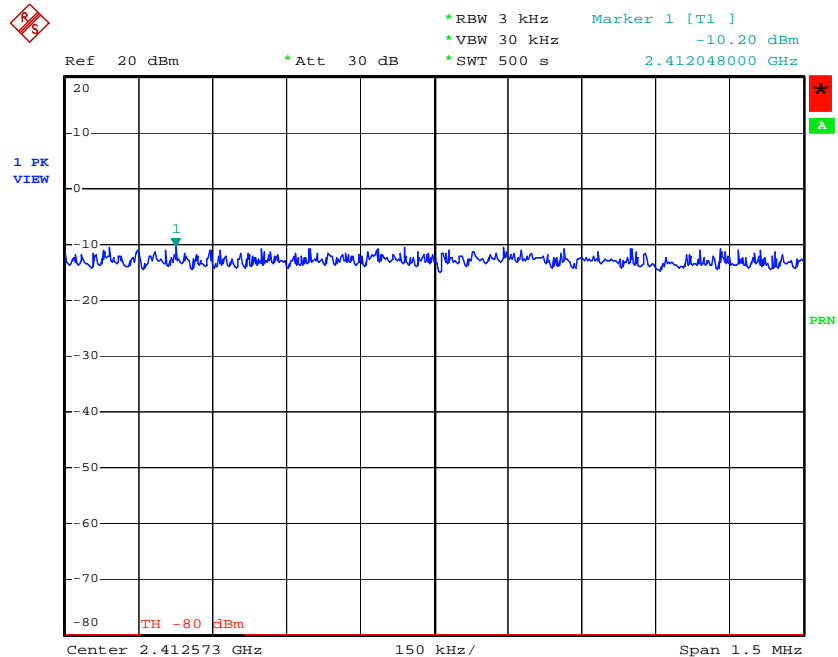

Date: 8.SEP.2004 20:33:09


Modulation Type: CCK (Channel 06) :

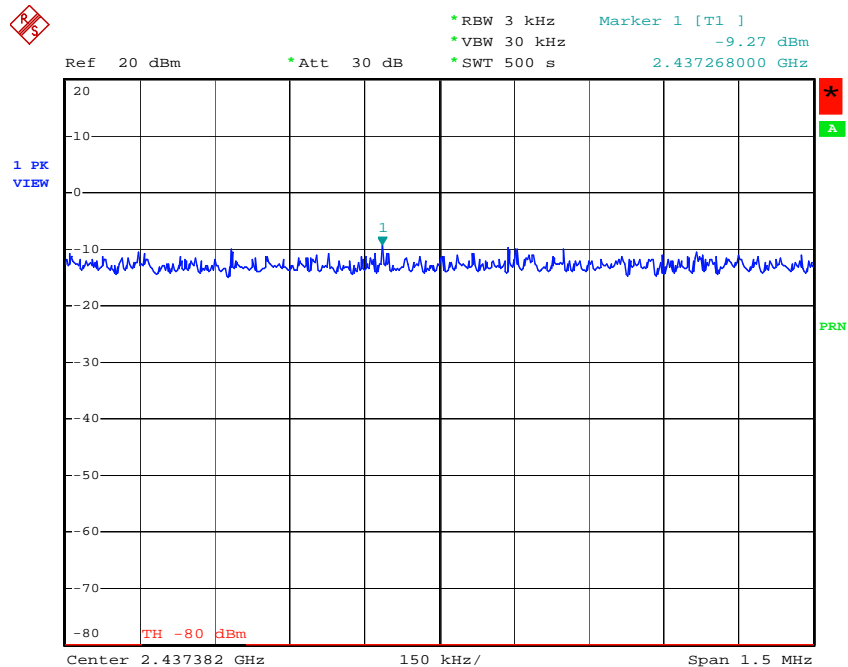

Date: 8.SEP.2004 20:36:02



Modulation Type: CCK (Channel 11) :

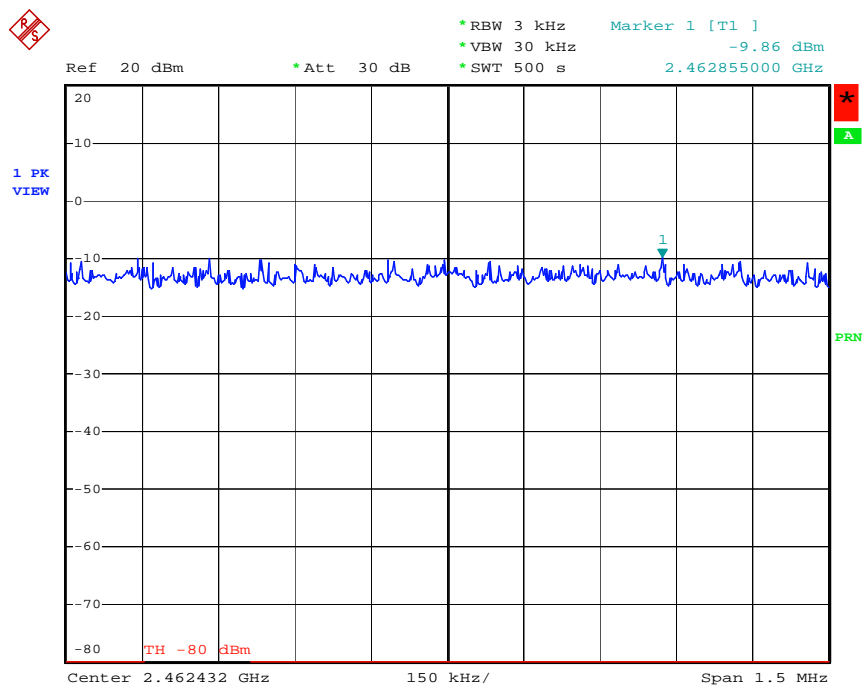


Date: 8.SEP.2004 20:38:04

- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65 %
- Duty Cycle of the Equipment During the Test: 60%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
01	2412	-16.72	8
06	2437	-17.70	8
11	2462	-17.53	8




Modulation Type: OFDM (Channel 01) :

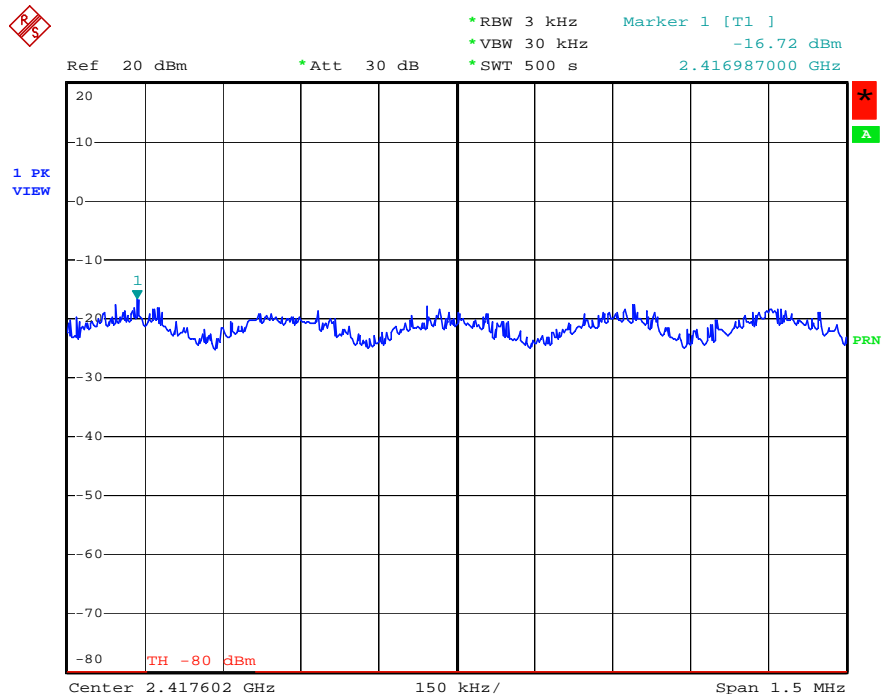

Date: 8.SEP.2004 21:40:04


Modulation Type: OFDM (Channel 06) :

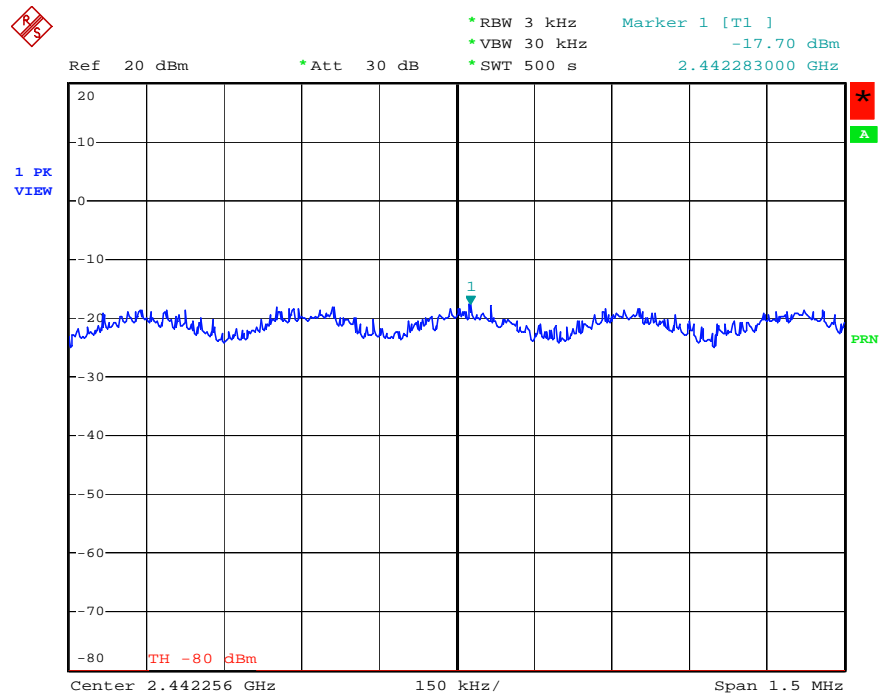

Date: 8.SEP.2004 21:52:19



Modulation Type: OFDM(Channel 11) :

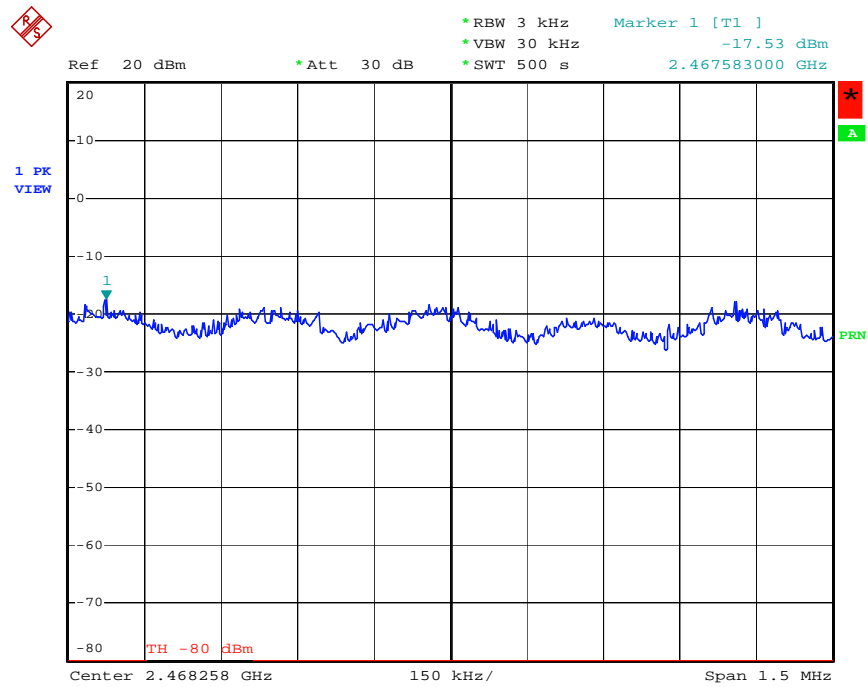

Date: 8.SEP.2004 21:35:47

5.4. Test of Band Edges Emission

5.4.1 Measuring Instruments

Item 16 of the table on section 6.

5.4.2 Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

5.4.3 Test Result :

- Modulation Type: CCK
- Test Engineer: Sam Lee

(A) Left Edge

The band edge emission plot shows 51.67dB delta between carrier maximum power and local maximum emission in the restricted band.

CH01 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
103.92	51.67	52.25	54.00	-1.75

(B) Right Edge


The band edge emission plot shows 52.27 dB delta between carrier maximum power and local maximum emission in the restricted band.

CH11 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
103.86	52.27	51.59	54.00	-2.41

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band




Modulation Type: CCK (Channel 01) :

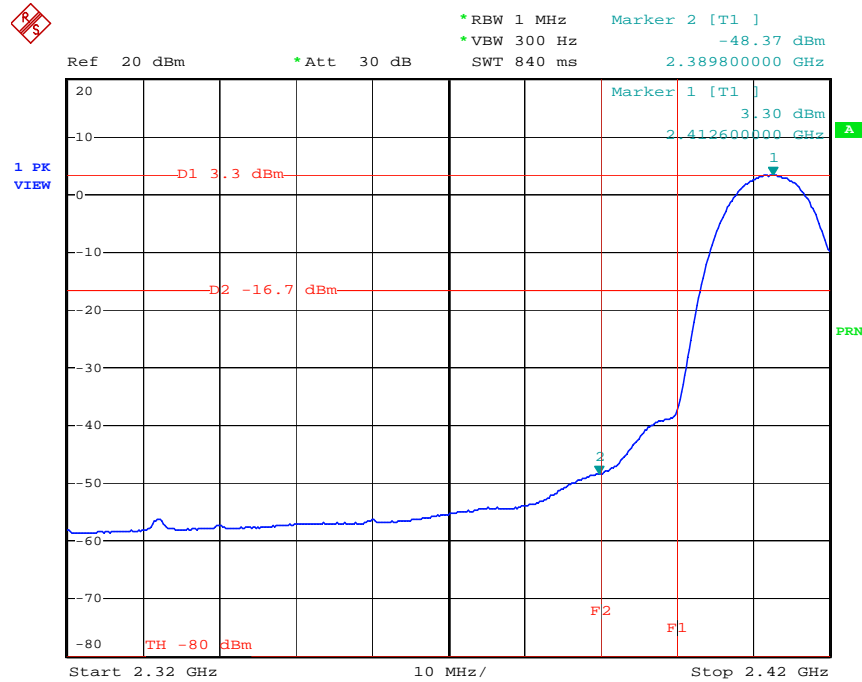

Date: 8.SEP.2004 20:15:47

Modulation Type: CCK (Channel 11) :

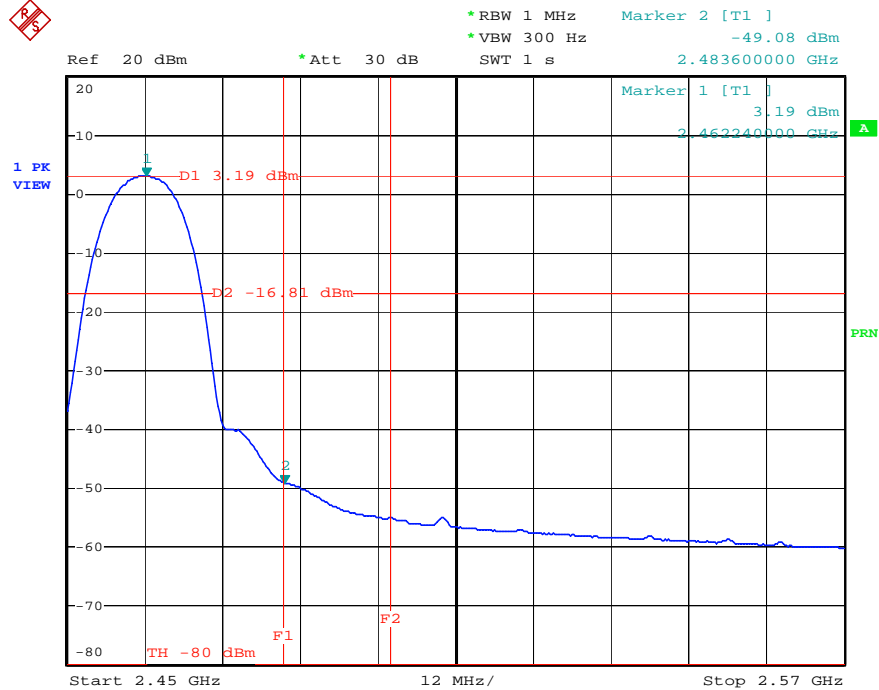

Date: 8.SEP.2004 20:57:01

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.



5.4.4 Test Result :

- Modulation Type: OFDM
- Test Engineer: Sam Lee

(A) Left Edge

The band edge emission plot shows 47.33dB delta between carrier maximum power and local maximum emission in the restricted band.

CH01 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
95.91	47.33	48.58	54.00	-5.42

(B) Right Edge


The band edge emission plot shows 47.96 dB delta between carrier maximum power and local maximum emission in the restricted band.

CH11 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
94.94	47.96	46.98	54.00	-7.02

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band




Modulation Type: OFDM(Channel 01) :

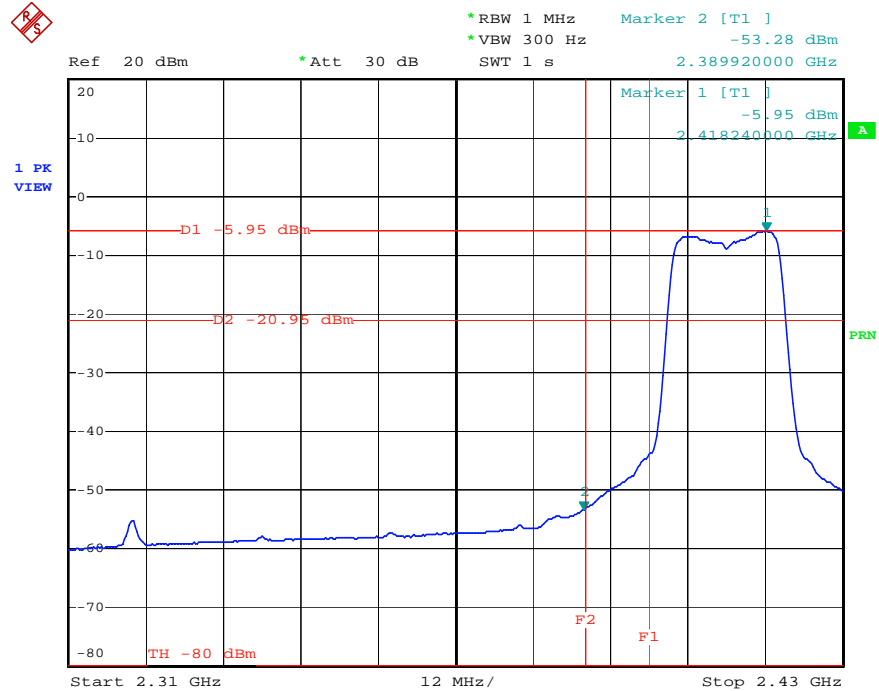

Date: 8.SEP.2004 21:25:40

Modulation Type: OFDM(Channel 11) :

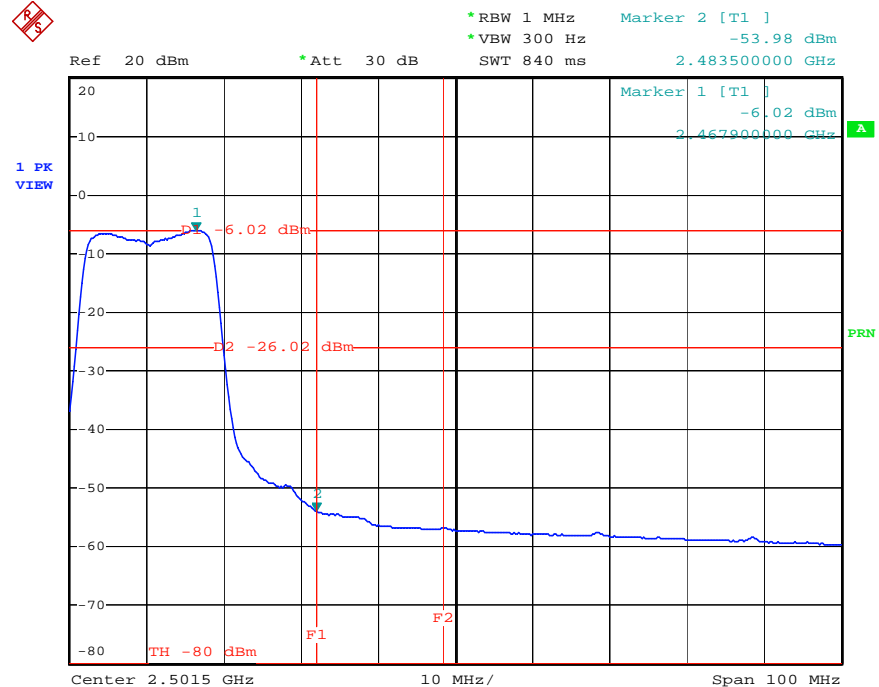

Date: 8.SEP.2004 21:32:29

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.



5.5. Test of AC Power Line Conducted Emission

5.5.1 Measuring Instruments

Please reference item 1~4 in chapter 6 for the instruments used for testing.

5.5.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.



5.5.3 Test Result of Conducted Emission

Test Mode	Mode 1 / Ant 1	Tested By	Brian Lin
Temperature / Humidity	25deg. C / 50%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	5.840	26.46	-33.54	60.00	26.17	0.20	0.09	QP
2	5.840	20.03	-29.97	50.00	19.74	0.20	0.09	Average
3	10.245	31.61	-28.39	60.00	31.30	0.20	0.11	QP
4	10.245	29.43	-20.57	50.00	29.12	0.20	0.11	Average
5	11.648	26.58	-33.42	60.00	26.25	0.20	0.13	QP
6	11.648	24.26	-25.74	50.00	23.93	0.20	0.13	Average
7	12.871	22.45	-37.55	60.00	22.11	0.20	0.14	QP
8	12.871	19.31	-30.69	50.00	18.97	0.20	0.14	Average
9	14.153	27.07	-32.93	60.00	26.72	0.20	0.15	QP
10	14.153	24.92	-25.08	50.00	24.57	0.20	0.15	Average
11	24.400	20.67	-39.33	60.00	20.16	0.30	0.21	QP
12	24.400	14.43	-35.57	50.00	13.92	0.30	0.21	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	5.710	26.55	-33.45	60.00	26.32	0.14	0.09	QP
2	5.710	19.68	-30.32	50.00	19.45	0.14	0.09	Average
3	10.240	32.07	-27.93	60.00	31.76	0.20	0.11	QP
4 @	10.240	29.96	-20.04	50.00	29.65	0.20	0.11	Average
5	11.640	23.41	-36.59	60.00	23.08	0.20	0.13	QP
6	11.640	20.45	-29.55	50.00	20.12	0.20	0.13	Average
7	12.870	22.53	-37.47	60.00	22.19	0.20	0.14	QP
8	12.870	19.37	-30.63	50.00	19.03	0.20	0.14	Average
9	14.150	27.31	-32.69	60.00	26.96	0.20	0.15	QP
10	14.150	25.18	-24.82	50.00	24.83	0.20	0.15	Average
11	24.400	20.65	-39.35	60.00	20.05	0.39	0.21	QP
12	24.400	14.51	-35.49	50.00	13.91	0.39	0.21	Average



Test Mode	Mode 2 / Ant 1	Tested By	Brian Lin
Temperature / Humidity	25deg. C / 50%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1926500	39.40	-24.52	63.92	39.29	0.10	0.01	QP
2	0.1926500	27.37	-36.55	63.92	27.26	0.10	0.01	Average
3	0.2555900	31.00	-30.57	61.57	30.89	0.10	0.01	QP
4	0.2555980	17.90	-43.67	61.57	17.79	0.10	0.01	Average
5	0.4450600	19.21	-37.76	56.97	19.09	0.10	0.02	QP
6	0.4450600	11.48	-45.49	56.97	11.36	0.10	0.02	Average
7	0.6426030	18.56	-37.44	56.00	18.43	0.10	0.03	QP
8	0.6426030	12.76	-43.24	56.00	12.63	0.10	0.03	Average
9	1.280	20.25	-35.75	56.00	20.12	0.10	0.03	QP
10	1.280	13.63	-42.37	56.00	13.50	0.10	0.03	Average
11	9.764	24.46	-35.54	60.00	24.15	0.20	0.11	QP
12	9.764	18.79	-41.21	60.00	18.48	0.20	0.11	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1911150	41.44	-22.55	63.99	41.33	0.10	0.01	QP
2	0.1911150	31.09	-32.90	63.99	30.98	0.10	0.01	Average
3	0.2532820	34.35	-27.30	61.65	34.24	0.10	0.01	QP
4	0.2532820	26.07	-35.58	61.65	25.96	0.10	0.01	Average
5	0.3151310	21.73	-38.10	59.83	21.61	0.10	0.02	Average
6	0.3151310	29.50	-30.25	59.83	29.46	0.10	0.02	QP
7	1.280	24.24	-31.76	56.00	24.11	0.10	0.03	QP
8	1.280	16.69	-39.31	56.00	16.56	0.10	0.03	Average
9	9.450	26.87	-33.13	60.00	26.57	0.19	0.11	QP
10	9.450	20.96	-39.04	60.00	20.66	0.19	0.11	Average
11	17.380	22.60	-37.40	60.00	22.17	0.25	0.18	QP
12	17.380	17.23	-42.77	60.00	16.80	0.25	0.18	Average



Test Mode	Mode 3 / Ant 1	Tested By	Brian Lin
Temperature / Humidity	25deg. C / 50%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1811760	38.07	-26.36	64.43	37.96	0.10	0.01	QP
2	0.1811760	26.48	-37.95	64.43	26.37	0.10	0.01	Average
3	0.2353310	32.91	-29.35	62.26	32.80	0.10	0.01	QP
4	0.2353310	20.49	-41.77	62.26	20.38	0.10	0.01	Average
5	0.3018750	27.61	-32.58	60.19	27.49	0.10	0.02	QP
6	0.3018750	20.74	-39.45	60.19	20.62	0.10	0.02	Average
7	7.730	16.89	-43.11	60.00	16.59	0.20	0.10	QP
8	7.730	11.79	-48.21	60.00	11.49	0.20	0.10	Average
9	19.740	23.54	-36.46	60.00	23.04	0.30	0.20	QP
10	19.740	17.81	-42.19	60.00	17.31	0.30	0.20	Average
11	28.750	25.05	-34.95	60.00	24.35	0.46	0.24	QP
12	28.750	21.35	-38.65	60.00	20.65	0.46	0.24	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1800220	40.46	-24.02	64.48	40.35	0.10	0.01	QP
2	0.1800220	29.99	-34.49	64.48	29.88	0.10	0.01	Average
3	0.2365810	36.53	-25.69	62.22	36.42	0.10	0.01	QP
4	0.2365810	26.89	-35.33	62.22	26.78	0.10	0.01	Average
5	7.770	24.47	-35.53	60.00	24.20	0.17	0.10	QP
6	7.770	18.40	-41.60	60.00	18.13	0.17	0.10	Average
7	17.750	22.28	-37.72	60.00	21.84	0.26	0.18	QP
8	17.750	16.89	-43.11	60.00	16.45	0.26	0.18	Average
9	19.740	25.24	-34.76	60.00	24.74	0.30	0.20	QP
10	19.740	18.82	-41.18	60.00	18.32	0.30	0.20	Average
11	28.750	25.81	-34.19	60.00	25.01	0.56	0.24	QP
12	28.750	22.27	-37.73	60.00	21.47	0.56	0.24	Average



Test Mode	Mode 1 / Ant 2	Tested By	Brian Lin
Temperature / Humidity	25deg. C / 50%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	5.840	26.46	-33.54	60.00	26.17	0.20	0.09	QP
2	5.840	20.03	-29.97	50.00	19.74	0.20	0.09	Average
3	10.245	31.61	-28.39	60.00	31.30	0.20	0.11	QP
4	10.245	29.43	-20.57	50.00	29.12	0.20	0.11	Average
5	11.648	26.58	-33.42	60.00	26.25	0.20	0.13	QP
6	11.648	24.26	-25.74	50.00	23.93	0.20	0.13	Average
7	12.871	22.45	-37.55	60.00	22.11	0.20	0.14	QP
8	12.871	19.31	-30.69	50.00	18.97	0.20	0.14	Average
9	14.153	27.07	-32.93	60.00	26.72	0.20	0.15	QP
10	14.153	24.92	-25.08	50.00	24.57	0.20	0.15	Average
11	24.400	20.67	-39.33	60.00	20.16	0.30	0.21	QP
12	24.400	14.43	-35.57	50.00	13.92	0.30	0.21	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	5.710	26.55	-33.45	60.00	26.32	0.14	0.09	QP
2	5.710	19.68	-30.32	50.00	19.45	0.14	0.09	Average
3	10.240	32.07	-27.93	60.00	31.76	0.20	0.11	QP
4 @	10.240	29.96	-20.04	50.00	29.65	0.20	0.11	Average
5	11.640	23.41	-36.59	60.00	23.08	0.20	0.13	QP
6	11.640	20.45	-29.55	50.00	20.12	0.20	0.13	Average
7	12.870	22.53	-37.47	60.00	22.19	0.20	0.14	QP
8	12.870	19.37	-30.63	50.00	19.03	0.20	0.14	Average
9	14.150	27.31	-32.69	60.00	26.96	0.20	0.15	QP
10	14.150	25.10	-24.90	50.00	24.83	0.20	0.15	Average
11	24.400	20.65	-39.35	60.00	20.05	0.39	0.21	QP
12	24.400	14.51	-35.49	50.00	13.91	0.39	0.21	Average



Test Mode	Mode 2 / Ant 2	Tested By	Brian Lin
Temperature / Humidity	25deg. C / 50%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1926500	39.40	-24.52	63.92	39.29	0.10	0.01	QP
2	0.1926500	27.37	-36.55	63.92	27.26	0.10	0.01	Average
3	0.2555900	31.00	-30.57	61.57	30.89	0.10	0.01	QP
4	0.2555900	17.90	-43.67	61.57	17.79	0.10	0.01	Average
5	0.4450600	19.21	-37.76	56.97	19.09	0.10	0.02	QP
6	0.4450600	11.40	-45.49	56.97	11.36	0.10	0.02	Average
7	0.6426030	18.56	-37.44	56.00	18.43	0.10	0.03	QP
8	0.6426030	12.76	-43.24	56.00	12.63	0.10	0.03	Average
9	1.280	20.25	-35.75	56.00	20.12	0.10	0.03	QP
10	1.280	13.63	-42.37	56.00	13.50	0.10	0.03	Average
11	9.764	24.46	-35.54	60.00	24.15	0.20	0.11	QP
12	9.764	18.79	-41.21	60.00	18.48	0.20	0.11	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1911150	41.44	-22.55	63.99	41.33	0.10	0.01	QP
2	0.1911150	31.09	-32.90	63.99	30.98	0.10	0.01	Average
3	0.2532820	34.35	-27.30	61.65	34.24	0.10	0.01	QP
4	0.2532820	26.07	-35.58	61.65	25.96	0.10	0.01	Average
5	0.3151310	21.73	-38.10	59.83	21.61	0.10	0.02	Average
6	0.3151310	29.58	-30.25	59.83	29.46	0.10	0.02	QP
7	1.280	24.24	-31.76	56.00	24.11	0.10	0.03	QP
8	1.280	16.69	-39.31	56.00	16.56	0.10	0.03	Average
9	9.450	26.87	-33.13	60.00	26.57	0.19	0.11	QP
10	9.450	20.96	-39.04	60.00	20.66	0.19	0.11	Average
11	17.380	22.60	-37.40	60.00	22.17	0.25	0.18	QP
12	17.380	17.23	-42.77	60.00	16.80	0.25	0.18	Average



Test Mode	Mode 3 / Ant 2	Tested By	Brian Lin
Temperature / Humidity	25deg. C / 50%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1811760	38.07	-26.36	64.43	37.96	0.10	0.01	QP
2	0.1811760	26.40	-37.95	64.43	26.37	0.10	0.01	Average
3	0.2353310	32.91	-29.35	62.26	32.80	0.10	0.01	QP
4	0.2353310	20.49	-41.77	62.26	20.38	0.10	0.01	Average
5	0.3018750	27.61	-32.58	60.19	27.49	0.10	0.02	QP
6	0.3018750	20.74	-39.45	60.19	20.62	0.10	0.02	Average
7	7.730	16.89	-43.11	60.00	16.59	0.20	0.10	QP
8	7.730	11.79	-48.21	60.00	11.49	0.20	0.10	Average
9	19.740	23.54	-36.46	60.00	23.04	0.30	0.20	QP
10	19.740	17.81	-42.19	60.00	17.31	0.30	0.20	Average
11	28.750	25.05	-34.95	60.00	24.35	0.46	0.24	QP
12	28.750	21.35	-38.65	60.00	20.65	0.46	0.24	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1800220	40.46	-24.02	64.48	40.35	0.10	0.01	QP
2	0.1800220	29.99	-34.49	64.48	29.88	0.10	0.01	Average
3	0.2365810	36.53	-25.69	62.22	36.42	0.10	0.01	QP
4	0.2365810	26.89	-35.33	62.22	26.78	0.10	0.01	Average
5	7.770	24.47	-35.53	60.00	24.20	0.17	0.10	QP
6	7.770	18.40	-41.60	60.00	18.13	0.17	0.10	Average
7	17.750	22.28	-37.72	60.00	21.84	0.26	0.18	QP
8	17.750	16.89	-43.11	60.00	16.45	0.26	0.18	Average
9	19.740	25.24	-34.76	60.00	24.74	0.30	0.20	QP
10	19.740	18.82	-41.18	60.00	18.32	0.30	0.20	Average
11	28.750	25.81	-34.19	60.00	25.01	0.56	0.24	QP
12	28.750	22.27	-37.73	60.00	21.47	0.56	0.24	Average

5.5.4 Photographs of Conducted Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

Mode 1/ Ant 1


FRONT VIEW



REAR VIEW



SIDE VIEW

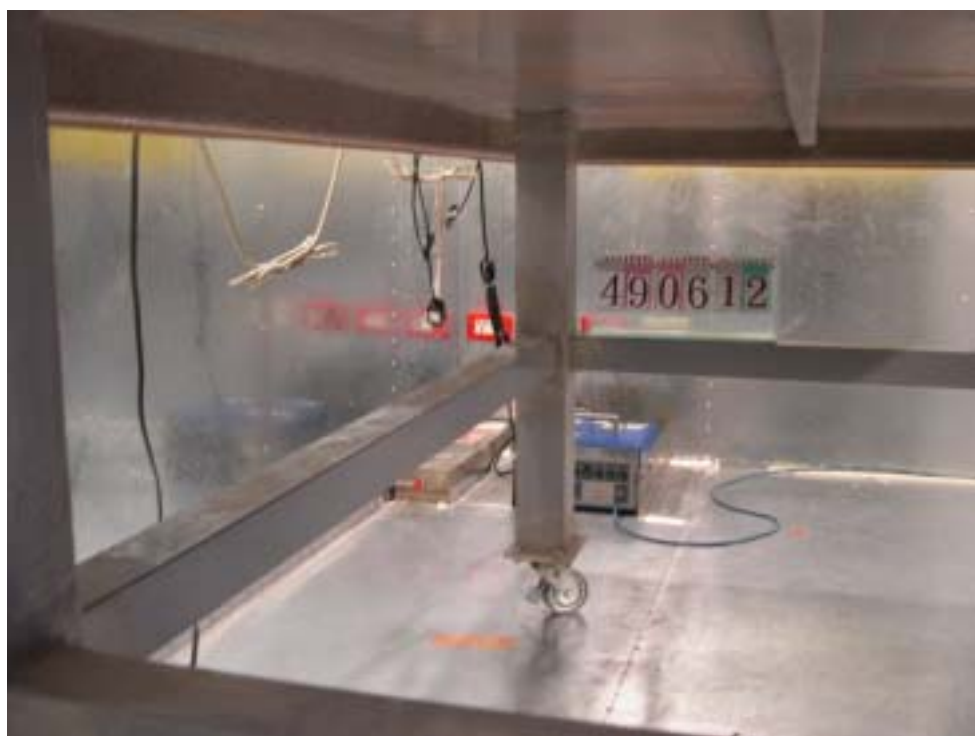


Mode 2 / Ant 1


FRONT VIEW



REAR VIEW

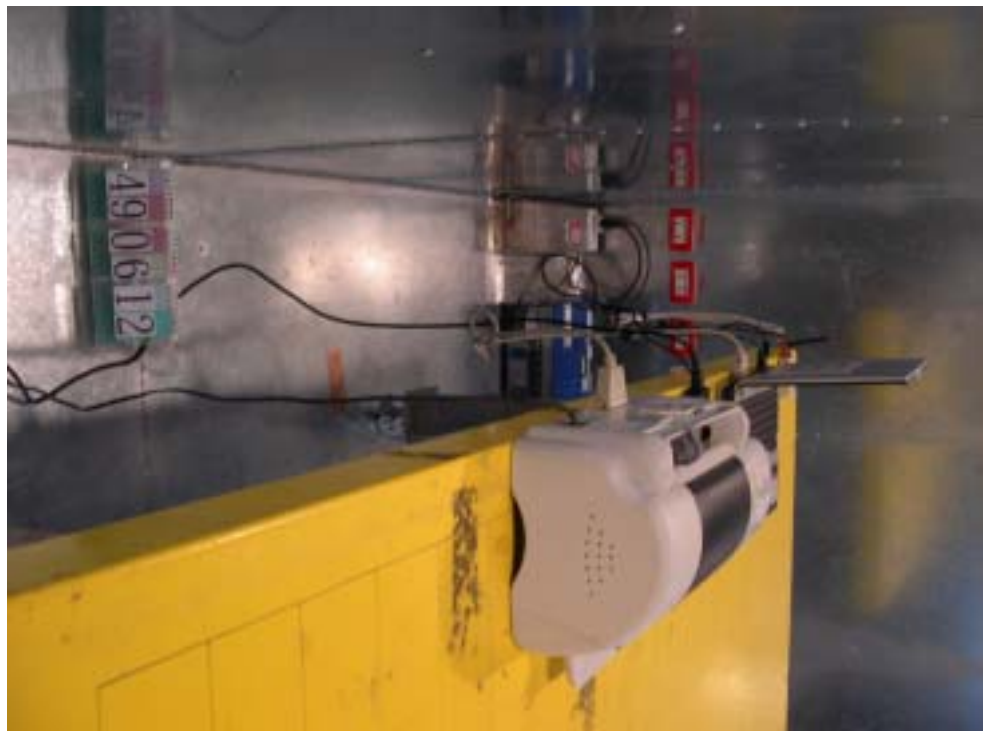

SIDE VIEW

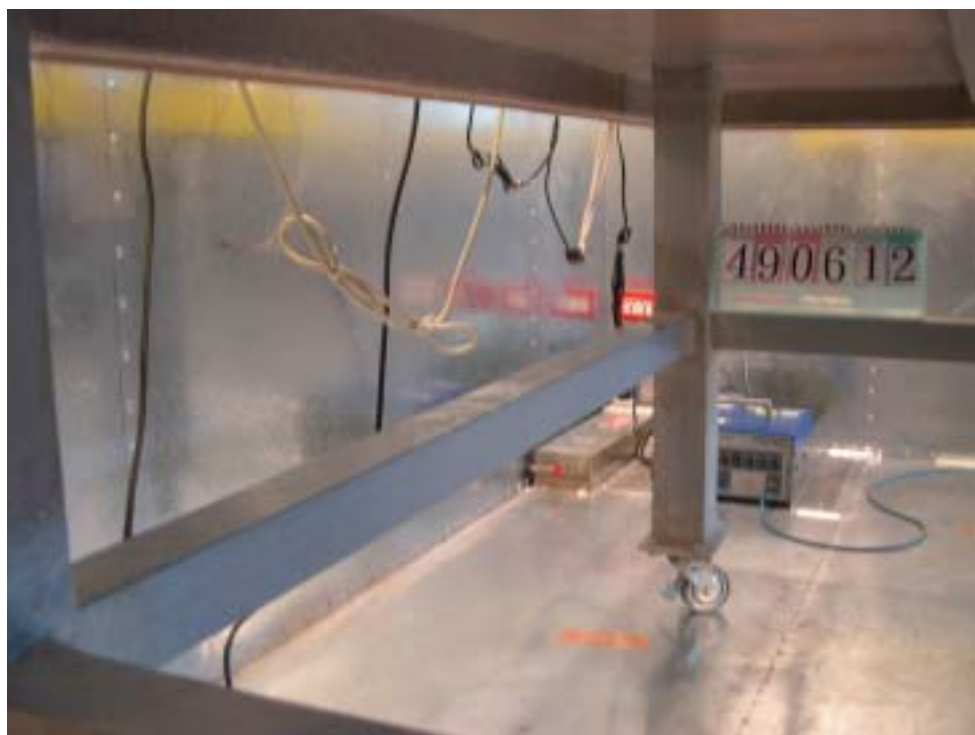

Mode 3 / Ant 1


FRONT VIEW



REAR VIEW



SIDE VIEW

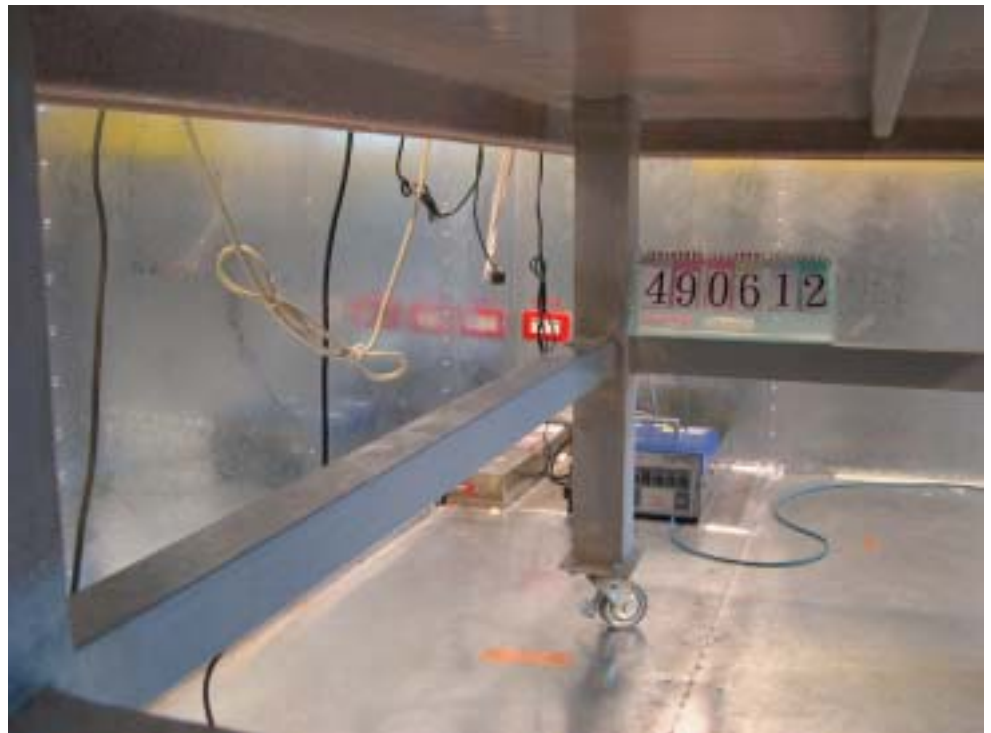

Mode 1 / Ant 2


FRONT VIEW



REAR VIEW



SIDE VIEW

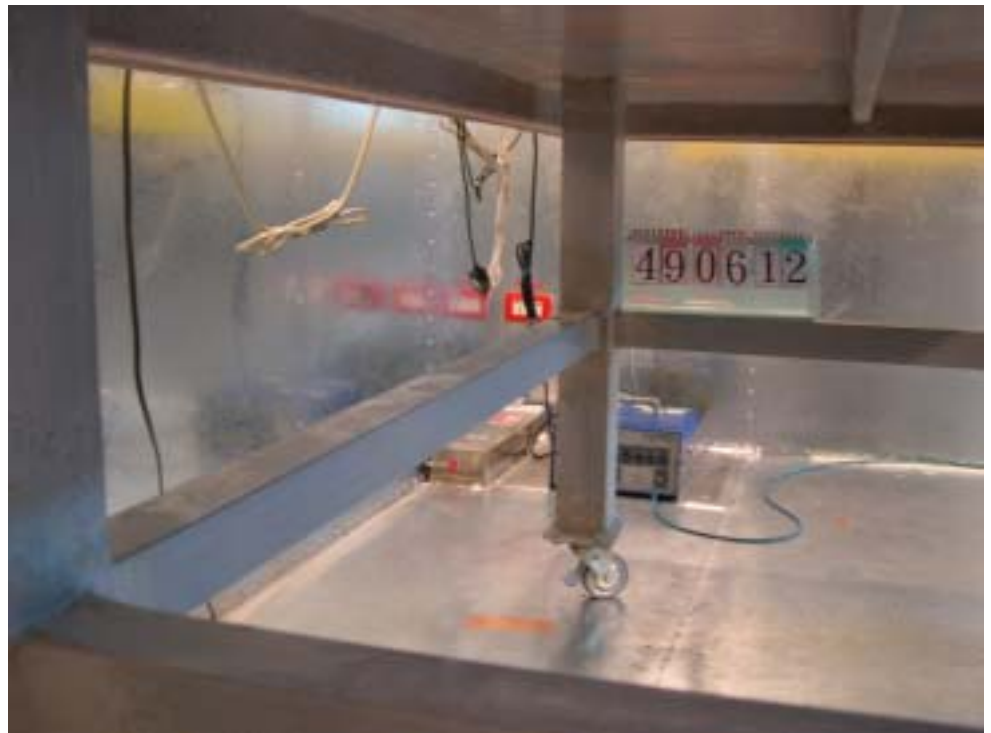

Mode 2 / Ant 2


FRONT VIEW



REAR VIEW



SIDE VIEW

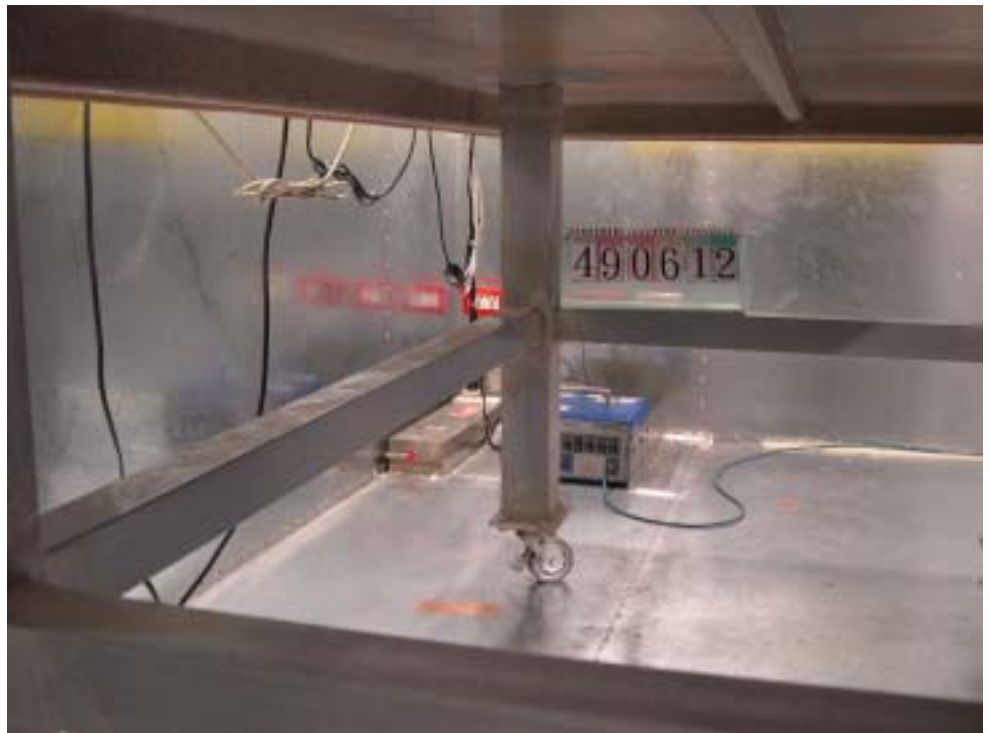


Mode 3 / Ant 2


FRONT VIEW



REAR VIEW

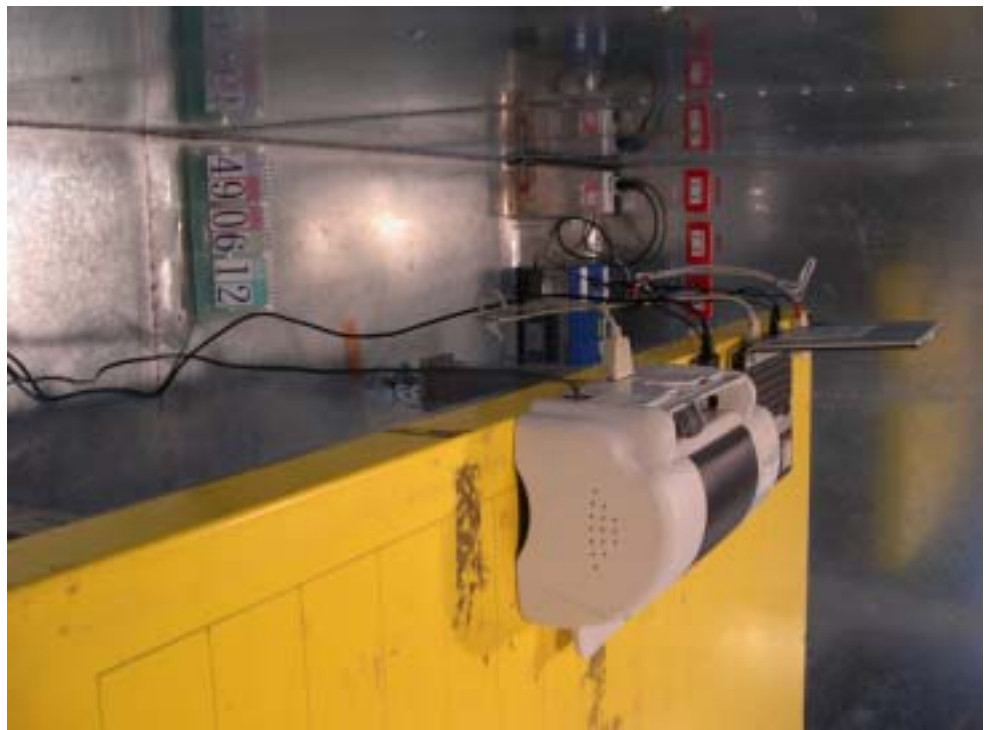

SIDE VIEW

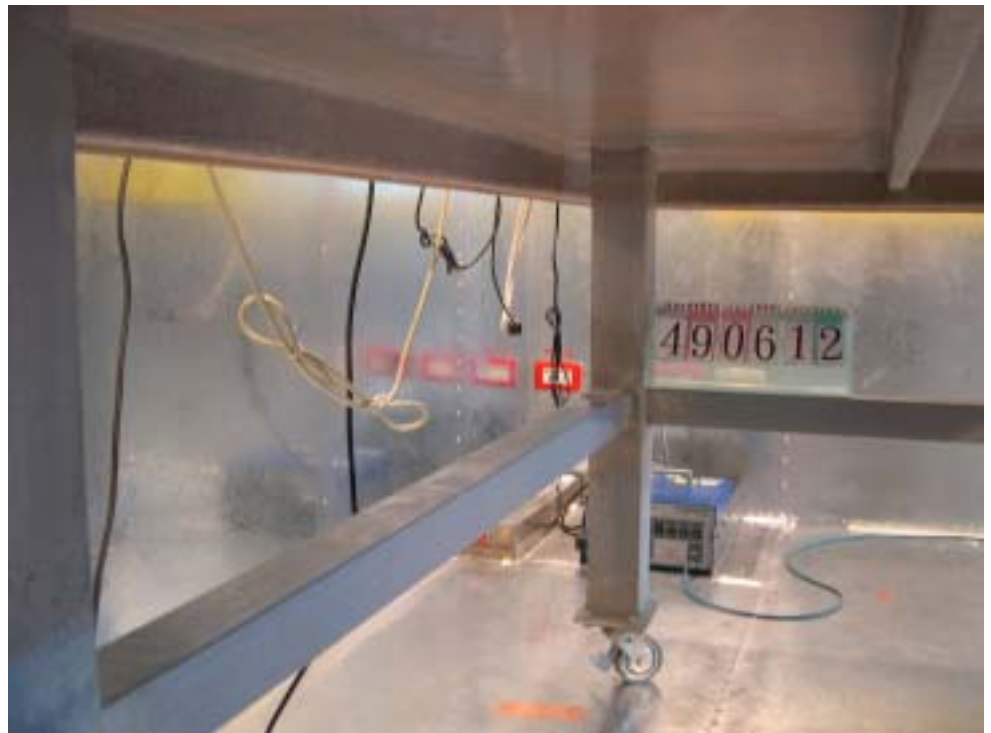



5.6. Test of Spurious Radiated Emission


5.6.1 Measuring Instruments

Please reference item 5~16 in chapter 6 for the instruments used for testing.

5.6.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3 Test Setup Layout

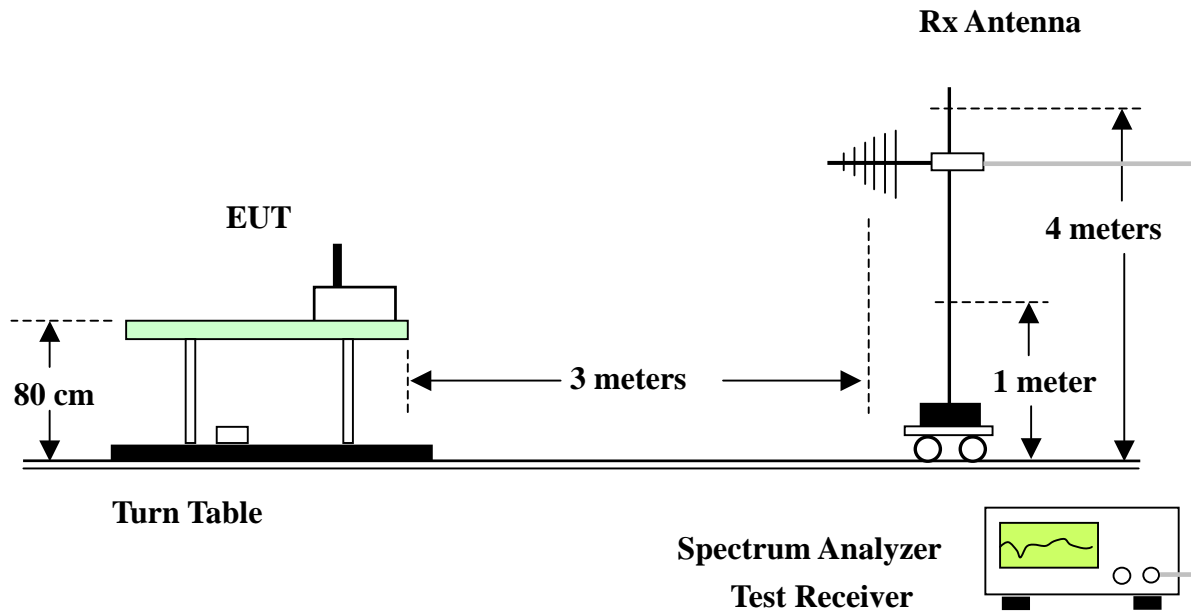



5.6.4 Test Results and Limit

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Test Mode	CH 11 OFDM (Mode 1/ Ant 1)	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	30MHz~1GHz	Humidity	67%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	125.030	34.31	-9.19	43.50	47.97	12.20	1.99	27.85	Peak	---	---
2	175.180	37.58	-5.92	43.50	48.75	14.20	2.38	27.75	Peak	---	---
3	198.980	34.46	-9.04	43.50	43.07	15.72	2.57	27.70	Peak	---	---
1	375.020	44.87	-1.13	46.00	53.11	16.06	3.38	27.68	QP	---	---
2	436.000	42.78	-3.22	46.00	50.76	16.51	3.63	28.12	Peak	---	---
3	524.800	42.60	-3.40	46.00	50.20	17.10	4.03	28.73	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	32.550	35.12	-4.88	40.00	49.73	12.45	0.98	28.04	Peak	---	---
2	41.390	31.88	-8.12	40.00	46.27	12.54	1.09	28.02	Peak	---	---
3	68.420	33.77	-6.23	40.00	50.42	9.91	1.40	27.96	Peak	---	---
1	375.200	45.47	-0.53	46.00	53.71	16.06	3.38	27.68	QP	---	---
2	612.000	44.33	-1.67	46.00	48.20	20.44	4.48	28.79	QP	---	---
3	625.100	45.70	-0.30	46.00	49.50	20.47	4.50	28.77	QP	156	129



FCC ID: NDD9512050408

Issued on Oct. 29, 2004

Report No.: FR490612

Test Mode	CH 11 OFDM (Mode 3/ Ant 1)	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	30MHz~1GHz	Humidity	67%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	125.030	32.09	-11.41	43.50	45.75	12.20	1.99	27.85	Peak	---	---
2	175.180	34.87	-8.63	43.50	46.04	14.20	2.38	27.75	Peak	---	---
3	200.000	33.42	-10.08	43.50	42.75	15.00	2.57	27.70	Peak	---	---
1 !	374.400	42.25	-3.75	46.00	50.50	16.04	3.38	27.67	Peak	---	---
2 !	436.000	43.66	-2.34	46.00	51.64	16.51	3.63	28.12	QP	---	---
3 !	612.000	43.76	-2.24	46.00	47.63	20.44	4.48	28.79	QP	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	34.420	38.19	-1.81	40.00	53.20	12.02	1.01	28.04	QP	---	---
2 !	77.940	35.78	-4.22	40.00	52.64	9.56	1.52	27.94	Peak	---	---
3	125.030	35.53	-7.97	43.50	49.19	12.20	1.99	27.85	Peak	---	---
1 !	374.400	43.74	-2.26	46.00	51.99	16.04	3.38	27.67	Peak	---	---
2 !	524.800	41.53	-4.47	46.00	49.13	17.10	4.03	28.73	Peak	---	---
3 !	625.000	45.70	-0.30	46.00	49.50	20.47	4.50	28.77	QP	137	228



Modulation Type	CCK (Mode 1/ Ant 1)				
Test Mode	CH 01 2412MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2380.000	51.64	-2.36	74.00	64.29	28.26	1.71	42.62	Peak	105	226
2	2516.000	48.23	-5.77	74.00	60.39	28.59	1.86	42.61	Peak	---	---
3	2614.000	45.01	-8.99	74.00	56.88	28.89	1.92	42.68	Peak	---	---
1	4822.000	47.90	-6.10	74.00	52.57	33.00	2.47	40.14	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2374.000	48.84	-5.16	74.00	58.49	28.24	1.71	39.60	Peak	---	---
2	2516.000	44.64	-9.36	74.00	53.77	28.59	1.86	39.58	Peak	---	---
3	2620.000	42.67	-11.33	74.00	51.37	28.91	1.93	39.54	Peak	---	---
1	4822.000	47.10	-6.90	74.00	51.77	33.00	2.47	40.14	Peak	---	---



Modulation Type	CCK (Mode 1/ Ant 1)				
Test Mode	CH 06 2437MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2366.000	43.64	-10.36	74.00	56.33	28.23	1.70	42.62	Peak	---	---
2	2502.000	41.05	-12.95	74.00	53.27	28.54	1.85	42.61	Peak	---	---
3	2620.000	41.37	-12.63	74.00	53.21	28.91	1.93	42.68	Peak	---	---
1	3990.000	42.71	-11.29	74.00	47.90	32.50	1.75	39.44	Peak	---	---
2	4876.000	52.71	-1.29	74.00	57.23	33.10	2.52	40.14	Peak	145	181

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2332.000	48.37	-5.63	74.00	61.14	28.15	1.71	42.63	Peak	---	---
2	2524.000	47.90	-6.10	74.00	60.04	28.61	1.87	42.62	Peak	---	---
3	2620.000	44.83	-9.17	74.00	56.67	28.91	1.93	42.68	Peak	---	---
1	4876.000	51.98	-2.02	74.00	56.50	33.10	2.52	40.14	Peak	---	---
2	4876.000	51.98	-2.02	74.00	56.50	33.10	2.52	40.14	Peak	---	---



Modulation Type	CCK (Mode 1/ Ant 1)				
Test Mode	CH 11 2462MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2372.000	45.08	-8.92	74.00	57.76	28.24	1.70	42.62	Peak	---	---
2	2518.000	43.09	-10.91	74.00	55.26	28.59	1.86	42.62	Peak	---	---
3	2620.000	40.99	-13.01	74.00	52.83	28.91	1.93	42.68	Peak	---	---
1	3422.000	44.72	-9.28	74.00	50.72	31.04	1.93	38.97	Peak	---	---
2	3990.000	44.32	-9.68	74.00	49.51	32.50	1.75	39.44	Peak	---	---
3	4924.000	52.25	-1.75	74.00	56.75	33.18	2.47	40.15	Peak	105	187

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2366.000	47.77	-6.23	74.00	60.46	28.23	1.70	42.62	Peak	---	---
2	2500.000	48.33	-5.67	74.00	60.54	28.54	1.85	42.60	Peak	---	---
3	2620.000	44.47	-9.53	74.00	56.31	28.91	1.93	42.68	Peak	---	---
1	3508.000	42.27	-11.73	74.00	47.94	31.24	2.02	38.93	Peak	---	---
2	4926.000	49.56	-4.44	74.00	54.05	33.19	2.47	40.15	Peak	---	---



Modulation Type	OFDM (Mode 1/ Ant 1)				
Test Mode	CH 01 2412MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	37.98	-16.02	74.00	51.28	27.69	1.68	42.67	Peak	---	---
2	2356.000	43.76	-10.24	74.00	56.50	28.20	1.69	42.63	Peak	---	---
3	2518.000	40.72	-13.28	74.00	52.89	28.59	1.86	42.62	Peak	---	---
1	4788.000	44.22	-9.78	74.00	49.01	32.94	2.41	40.14	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1662.000	40.30	-13.70	74.00	55.49	25.90	1.54	42.63	Peak	---	---
2	2380.000	48.84	-5.16	74.00	61.49	28.26	1.71	42.62	Peak	112	152
3	2516.000	46.76	-7.24	74.00	58.92	28.59	1.86	42.61	Peak	---	---



Modulation Type	OFDM (Mode 1/ Ant 1)				
Test Mode	CH 06 2437MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	38.07	-15.93	74.00	51.37	27.69	1.68	42.67	Peak	---	---
2	2348.000	43.55	-10.45	74.00	56.31	28.19	1.68	42.63	Peak	---	---
3	2518.000	40.69	-13.31	74.00	52.86	28.59	1.86	42.62	Peak	---	---
1	3996.000	42.86	-11.14	74.00	47.95	32.50	1.86	39.45	Peak	---	---
2	4924.000	43.89	-10.11	74.00	48.39	33.18	2.47	40.15	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1660.000	40.28	-13.72	74.00	55.48	25.89	1.54	42.63	Peak	---	---
2	2358.000	48.70	-5.30	74.00	61.43	28.21	1.69	42.63	Peak	105	181
3	2518.000	46.01	-7.99	74.00	58.18	28.59	1.86	42.62	Peak	---	---
1	3132.000	41.37	-12.63	74.00	48.01	30.40	2.21	39.25	Peak	---	---
2	4878.000	43.53	-10.47	74.00	48.06	33.10	2.51	40.14	Peak	---	---



Modulation Type	OFDM (Mode 1/ Ant 1)				
Test Mode	CH 11 2462MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	65%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	38.44	-15.56	74.00	51.74	27.69	1.68	42.67	Peak	---	---
2	2372.000	43.18	-10.82	74.00	55.86	28.24	1.70	42.62	Peak	---	---
3	2502.000	40.66	-13.34	74.00	52.88	28.54	1.85	42.61	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2366.000	48.77	-5.23	74.00	61.46	28.23	1.70	42.62	Peak	106	179
2	2516.000	47.41	-6.59	74.00	59.57	28.59	1.86	42.61	Peak	---	---
3	2590.000	43.66	-10.34	74.00	55.59	28.82	1.91	42.66	Peak	---	---
1	3980.000	42.42	-11.58	74.00	47.79	32.49	1.57	39.43	Peak	---	---



Test Mode	CH 11 OFDM (Mode 1/ Ant 2)	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	30MHz~1GHz	Humidity	67%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	77.260	34.02	-5.98	40.00	50.88	9.58	1.50	27.94	Peak	---	---
2	137.270	33.29	-10.21	43.50	46.57	12.53	2.01	27.82	Peak	---	---
3	150.020	33.89	-9.61	43.50	47.53	11.90	2.26	27.80	Peak	---	---
1 !	249.600	40.77	-5.23	46.00	53.14	12.30	2.83	27.50	Peak	---	---
2 !	375.200	45.17	-0.83	46.00	53.41	16.06	3.38	27.68	QP	139	177
3 !	499.200	40.36	-5.64	46.00	49.16	16.01	3.88	28.69	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	77.260	31.96	-8.04	40.00	48.82	9.58	1.50	27.94	Peak	---	---
2	137.270	31.52	-11.98	43.50	44.80	12.53	2.01	27.82	Peak	---	---
3	175.180	32.42	-11.08	43.50	43.59	14.20	2.38	27.75	Peak	---	---
1 !	374.400	43.73	-2.27	46.00	51.98	16.04	3.38	27.67	QP	---	---
2 !	612.000	43.63	-2.37	46.00	47.50	20.44	4.48	28.79	QP	---	---
3 !	624.800	43.41	-2.59	46.00	47.21	20.47	4.50	28.77	Peak	---	---



Test Mode	CH 11 OFDM (Mode 3/ Ant 2)	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	30MHz~1GHz	Humidity	67%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	74.540	31.42	-8.58	40.00	48.25	9.67	1.45	27.95	Peak	---	---
2	125.030	28.59	-14.91	43.50	42.25	12.20	1.99	27.05	Peak	---	---
3	175.180	28.43	-15.07	43.50	39.60	14.20	2.38	27.75	Peak	---	---
1	249.600	39.09	-6.11	46.00	52.26	12.30	2.03	27.50	Peak	---	---
2	374.400	43.03	-2.17	46.00	52.08	16.04	3.38	27.67	QP	---	---
3	624.800	40.73	-5.27	46.00	44.53	20.47	4.50	28.77	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	38.670	33.25	-6.75	40.00	47.82	12.41	1.05	28.03	Peak	---	---
2	96.470	33.31	-10.19	43.50	50.71	8.02	1.69	27.91	Peak	---	---
3	175.180	32.59	-10.91	43.50	43.76	14.20	2.38	27.75	Peak	---	---
1	374.400	44.73	-1.27	46.00	52.98	16.04	3.38	27.67	QP	120	174
2	612.000	43.16	-2.84	46.00	47.03	20.44	4.48	28.79	QP	---	---
3	624.800	44.41	-1.59	46.00	48.21	20.47	4.50	28.77	QP	---	---



Modulation Type	CCK (Mode 1/ Ant 2)				
Test Mode	CH 01 2412MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	41.98	-12.02	74.00	55.31	27.66	1.68	42.67	Peak	---	---
2	2374.000	39.55	-14.45	74.00	52.29	28.17	1.71	42.62	Peak	---	---
3	2620.000	39.90	-14.10	74.00	51.84	28.81	1.93	42.68	Peak	---	---
1	4788.000	40.86	-13.14	74.00	49.80	32.99	2.41	44.34	Peak	---	---
1	7230.000	44.26	-9.74	74.00	50.50	35.87	2.89	45.00	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1662.000	41.65	-12.35	74.00	56.71	26.03	1.54	42.63	Peak	---	---
2	2332.000	46.02	-7.98	74.00	58.86	28.08	1.71	42.63	Peak	---	---
3	2518.000	44.76	-9.24	74.00	57.03	28.49	1.86	42.62	Peak	---	---
1	4822.000	44.32	-9.68	74.00	53.16	33.06	2.47	44.37	Peak	---	---
1	7230.000	44.03	-9.97	74.00	50.27	35.87	2.89	45.00	Peak	---	---



Modulation Type	CCK (Mode 1/ Ant 2)				
Test Mode	CH 06 2437MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	41.58	-12.42	74.00	54.91	27.66	1.68	42.67	Peak	---	---
2	2334.000	38.56	-15.44	74.00	51.40	28.09	1.70	42.63	Peak	---	---
3	2620.000	40.18	-13.82	74.00	52.12	28.81	1.93	42.68	Peak	---	---
1	4876.000	50.44	-3.56	74.00	59.16	33.17	2.52	44.41	Peak	106	104
1	7316.000	45.43	-8.57	74.00	51.29	36.09	3.02	44.97	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1660.000	42.13	-11.87	74.00	57.20	26.02	1.54	42.63	Peak	---	---
2	2332.000	46.02	-7.98	74.00	58.86	28.08	1.71	42.63	Peak	---	---
3	2508.000	45.25	-8.75	74.00	57.54	28.46	1.86	42.61	Peak	---	---
1	4876.000	46.88	-7.12	74.00	55.60	33.17	2.52	44.41	Peak	---	---
1	7308.000	44.18	-9.82	74.00	49.92	36.07	3.16	44.97	Peak	---	---



Modulation Type	CCK (Mode 1 / Ant 2)				
Test Mode	CH 11 2462MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	41.50	-12.50	74.00	54.83	27.66	1.68	42.67	Peak	---	---
2	2332.000	39.61	-14.39	74.00	52.45	28.08	1.71	42.63	Peak	---	---
3	2620.000	40.42	-13.58	74.00	52.36	28.81	1.93	42.68	Peak	---	---
1	4924.000	53.22	-20.78	74.00	61.93	33.27	2.47	44.45	Peak	---	---
1	7388.000	44.57	-9.43	74.00	50.44	36.26	2.81	44.94	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1662.000	42.45	-11.55	74.00	57.51	26.03	1.54	42.63	Peak	---	---
2	2332.000	46.25	-7.75	74.00	59.09	28.08	1.71	42.63	Peak	106	151
3	2508.000	46.23	-7.77	74.00	58.52	28.46	1.86	42.61	Peak	---	---
1	4788.000	42.80	-11.20	74.00	51.74	32.99	2.41	44.34	Peak	---	---
2	4924.000	51.22	-22.78	74.00	59.93	33.27	2.47	44.45	Peak	---	---
3	4924.000	38.17	-15.83	74.00	46.88	33.27	2.47	44.45	Peak	---	---
4	4924.000	42.95	-11.05	74.00	51.66	33.27	2.47	44.45	Peak	---	---
1	7382.000	43.98	-10.02	74.00	49.88	36.25	2.79	44.94	Peak	---	---



Modulation Type	OFDM (Mode 1 / Ant 2)				
Test Mode	CH 01 2412MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	41.91	-12.09	74.00	55.24	27.66	1.60	42.67	Peak	---	---
2	2334.000	37.94	-16.06	74.00	50.78	28.09	1.70	42.63	Peak	---	---
3	2510.000	39.73	-14.27	74.00	52.01	28.47	1.86	42.61	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1662.000	42.70	-11.30	74.00	57.76	26.03	1.54	42.63	Peak	---	---
2	2358.000	46.34	-7.66	74.00	59.14	28.14	1.69	42.63	Peak	102	156
3	2518.000	45.78	-8.22	74.00	58.05	28.49	1.86	42.62	Peak	---	---



Modulation Type	OFDM (Mode 1 / Ant2)				
Test Mode	CH 06 2437MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	67%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	41.32	-12.68	74.00	54.65	27.66	1.68	42.67	Peak	---	---
2	2340.000	39.02	-14.98	74.00	51.86	28.10	1.69	42.63	Peak	---	---
3	2620.000	38.08	-15.92	74.00	50.02	28.81	1.93	42.68	Peak	---	---
1	4876.000	43.08	-10.92	74.00	51.80	33.17	2.52	44.41	Peak	---	---

Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1662.000	41.61	-12.39	74.00	56.67	26.03	1.54	42.63	Peak	---	---
2	2318.000	45.44	-8.56	74.00	58.28	28.06	1.73	42.63	Peak	107	137
3	2518.000	44.37	-9.63	74.00	56.64	28.49	1.86	42.62	Peak	---	---



Modulation Type	OFDM (Mode 1 / Ant 2)				
Test Mode	CH 11 2462MHz	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	65%		

Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2126.000	41.42	-12.58	74.00	54.75	27.66	1.68	42.67	Peak	---	---
2	2318.000	37.87	-16.13	74.00	50.71	28.06	1.73	42.63	Peak	---	---
3	2510.000	38.41	-15.59	74.00	50.69	28.47	1.86	42.61	Peak	---	---
1	4788.000	41.21	-12.79	74.00	50.15	32.99	2.41	44.34	Peak	---	---
2	4926.000	42.99	-11.01	74.00	51.69	33.28	2.47	44.45	Peak	---	---

Vertical


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1660.000	42.74	-11.26	74.00	57.81	26.02	1.54	42.63	Peak	---	---
2	2334.000	45.48	-8.52	74.00	58.32	28.09	1.70	42.63	Peak	102	126
3	2518.000	44.48	-9.52	74.00	56.75	28.49	1.86	42.62	Peak	---	---
1	4934.000	42.38	-11.62	74.00	51.08	33.29	2.46	44.45	Peak	---	---

5.6.5 Photographs of Radiated Emission Test Configuration


- The photographs show the configuration that generates the maximum emission.

Mode 1 (Ant1)

FRONT VIEW

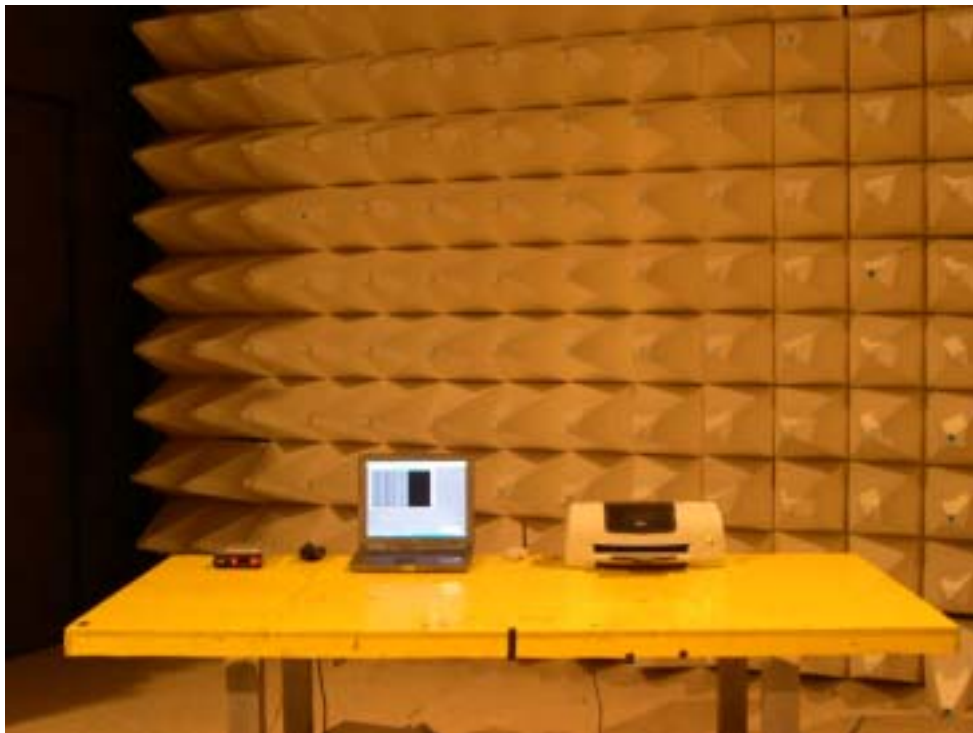


REAR VIEW

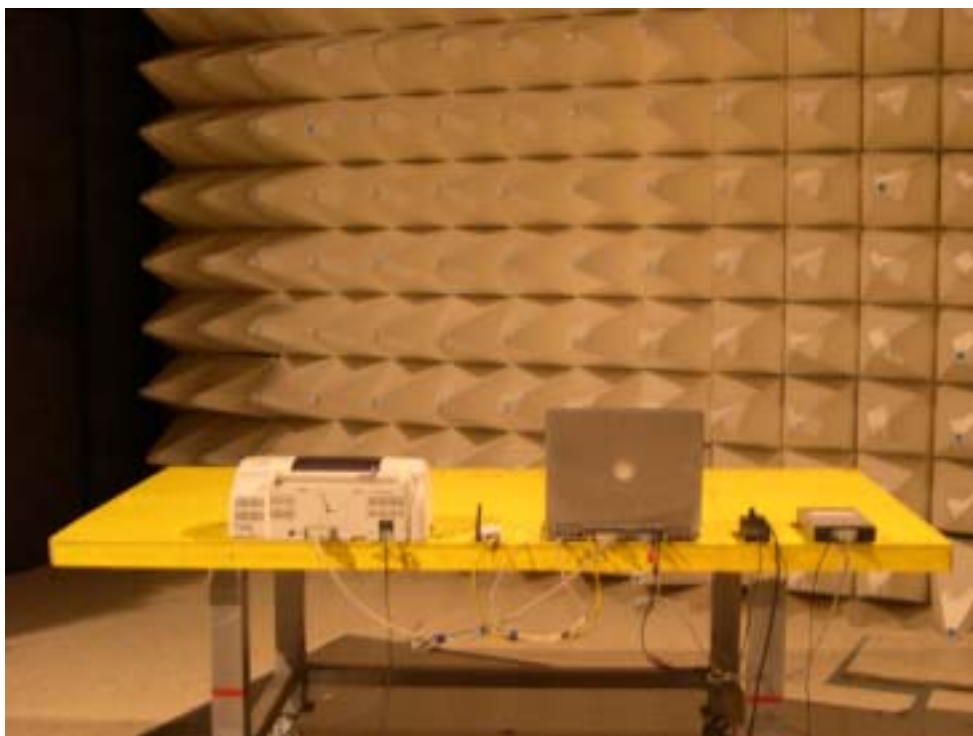


Mode3 (Ant1)

FRONT VIEW

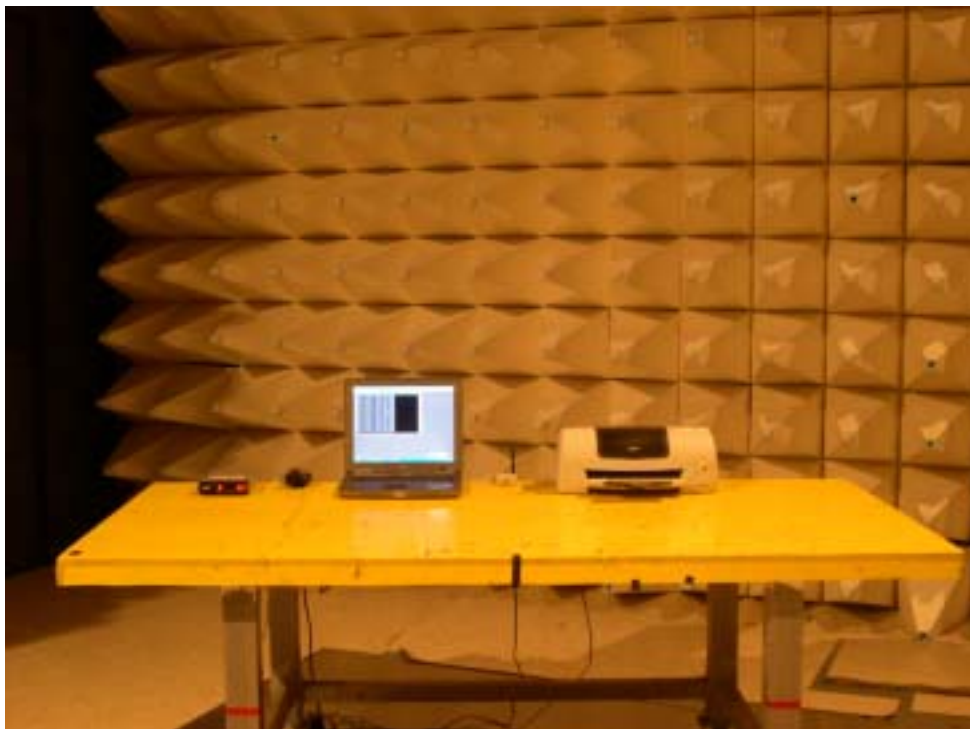

REAR VIEW

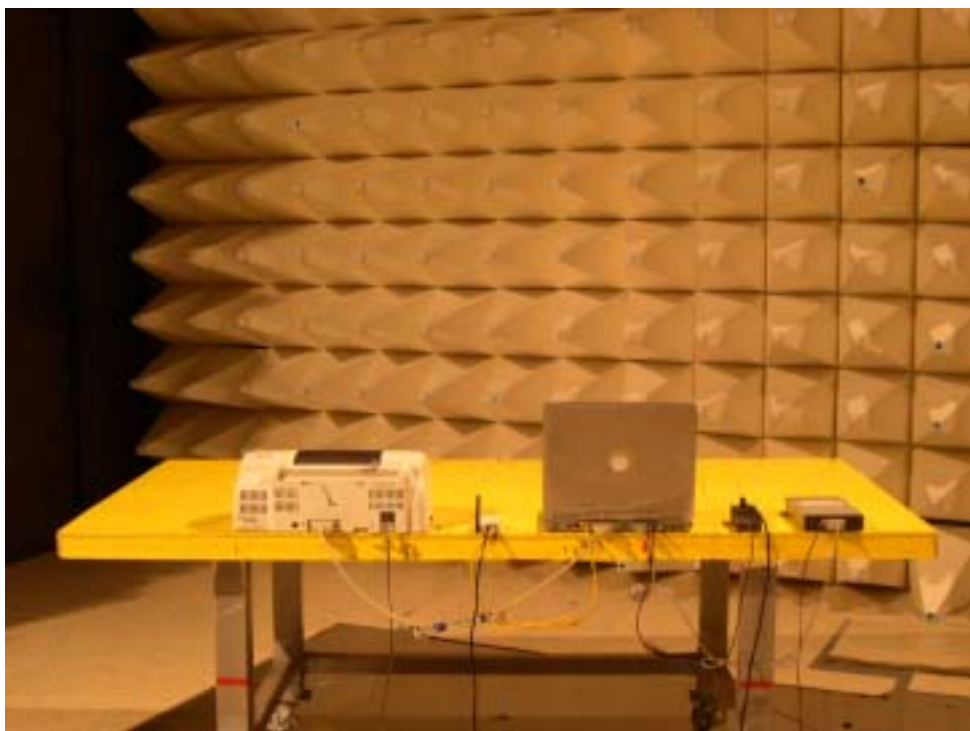



5.7. Antenna Requirements

5.7.1 Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2 Antenna Connected Construction


The antenna used in this product is dipole Antenna, and the antenna connector is revise SMA.

Mode 3 (Ant2)

FRONT VIEW

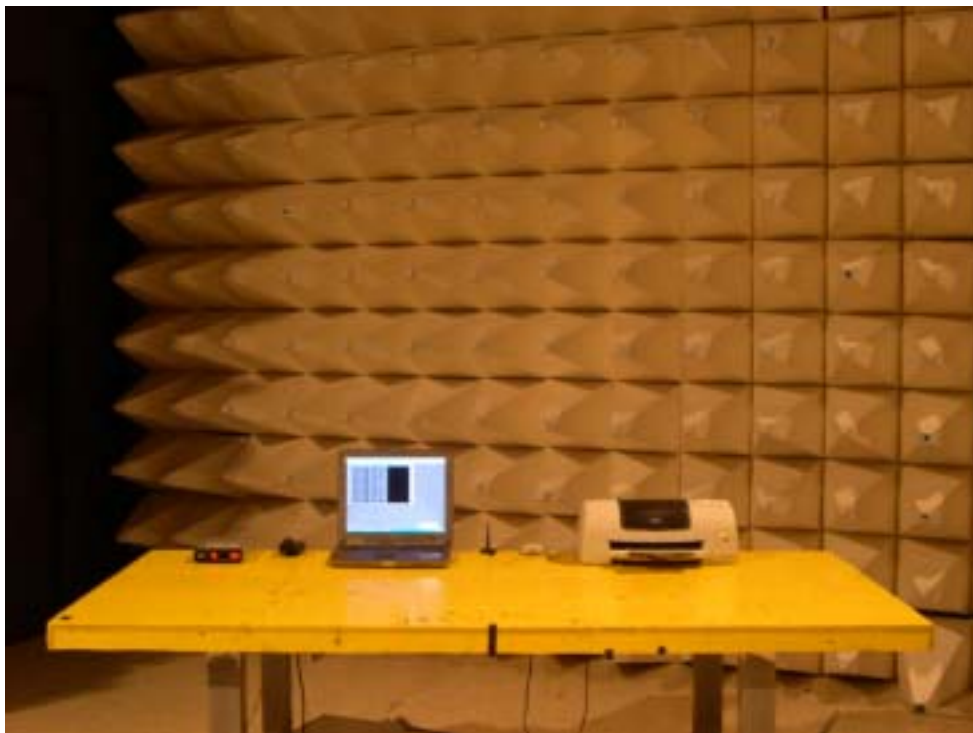

REAR VIEW

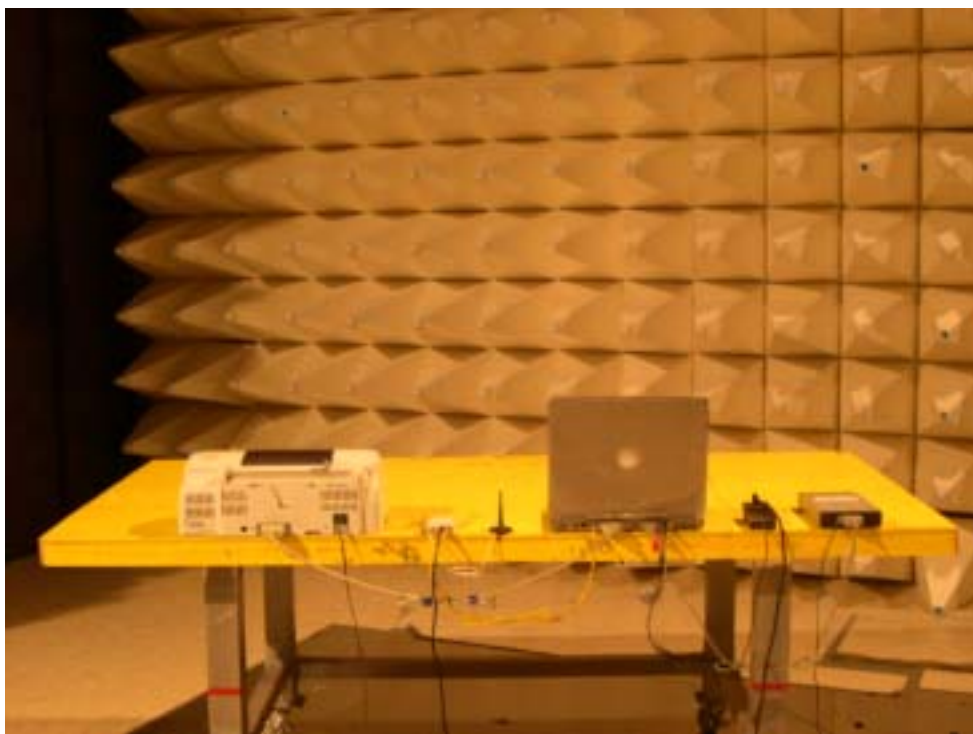



5.7. Antenna Requirements

5.7.1 Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2 Antenna Connected Construction

The antenna used in this product is dipole Antenna, and the antenna connector is revised SMA.



5.8. RF Exposure

5.8.1 Limit For Maximum Permissible Exposure (MPE)

This product can be classified as mobile device, so the 20cm separation distance warning is required.

In this section, the power density at 20cm location is calculated to examine if it is lower than the limit.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F = frequency in MHz

*Plane-wave equivalent power density

5.8.2 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (mW)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=20cm, as well as the gain of the used antenna, the RF power density can be obtained.

5.8.3 Calculated Result and Limit

Modulation Type: CCK

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
Channel 00	2	1.58	15.6	36.3078	0.0115	1
Channel 39	2	1.58	15.6	36.3078	0.0115	1
Channel 78	2	1.58	15.3	33.8844	0.0107	1

From the calculated result shown in above table, the power density is lower than limit at location 20cm far away.

**Modulation Type: OFDM**

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
Channel 00	2	1.58	13.6	22.9087	0.0072	1
Channel 39	2	1.58	13.5	22.3872	0.0071	1
Channel 78	2	1.58	13.5	22.3872	0.0071	1

From the calculated result shown in above table, the power density is lower than limit at location 20cm far away.

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	Spectrum analyzer	R&S	FSP7	838858/014	9KHZ~7GHZ	Sep. 02, 2004	Conducted (TH01-HY)
2	Power meter	R&S	NRVS	100444	DC~40GHz	Jun. 15, 2004	Conducted (TH01-HY)
3	Power sensor	R&S	NRV-Z55	100049	DC~40GHz	Jun. 15, 2004	Conducted (TH01-HY)
4	Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	Jun. 15, 2004	Conducted (TH01-HY)
5	AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	Jun. 16, 2004	Conducted (TH01-HY)
6	AC power source	G.W.	GPC-6030D	C671845	DC 1V~60V	Nov. 06, 2003	Conducted (TH01-HY)
7	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2003	Conducted (TH01-HY)
8	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz~7GHz	Jan. 01, 2004	Conducted (TH01-HY)
9	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz~1GHz	Jan. 01, 2004	Conducted (TH01-HY)
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
11	Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
12	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
13	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
14	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
15	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
16	Amplifier	MITEQ	AFS44	849984	100MHz~26.5GHz	Mar. 26, 2004	Radiation (03CH03-HY)
17	Horn Antenna	EMCO	3115	6741	1GHz – 18GHz	Apr. 07, 2004	Radiation (03CH03-HY)
18	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
19	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
20	Horn Antenna	Schwarzbeck	BBHA9170	154	18GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
21	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

Calibration Interval of instruments listed above is one year.

**FCC ID: NDD9512050408**

Issued on Oct. 29, 2004

Report No.: FR490612

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
16	EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Feb. 16, 2004	Conduction (CO04-HY)
17	LISN	MessTec	NNB-2/16Z	2001/004	9 KHz – 30 MHz	Jun. 09, 2004	Conduction (CO04-HY)
18	LISN (Support Unit)	MessTec	NNB-2/16Z	99041	9 KHz – 30 MHz	Apr. 27, 2004	Conduction (CO04-HY)
19	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
20	RF Cable-CON	UTIFLEX	3102-26886-4	CB044	9KHz~30MHz	Apr. 21, 2004	Conduction (CO04-HY)

Calibration Interval of instruments listed above is one year.