


RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.0 PK	74.0	-9.0	1.22 H	146	63.0	2.0
2	5150.00	52.3 AV	54.0	-1.7	1.22 H	146	50.3	2.0
3	*5190.00	109.1 PK			1.22 H	146	107.2	1.9
4	*5190.00	98.1 AV			1.22 H	146	96.2	1.9
5	#10380.00	54.4 PK	68.2	-13.8	1.31 H	140	42.6	11.8
6	15570.00	47.4 PK	74.0	-26.6	1.28 H	144	35.6	11.8
7	15570.00	37.2 AV	54.0	-16.8	1.28 H	144	25.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

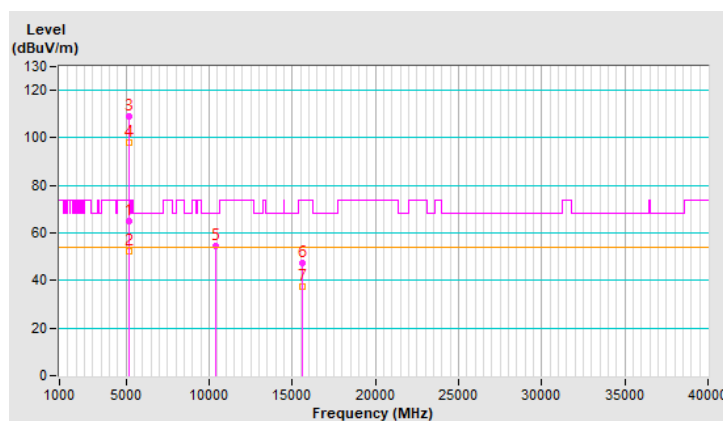


RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.7 PK	74.0	-18.3	2.48 V	38	53.7	2.0
2	5150.00	42.2 AV	54.0	-11.8	2.48 V	38	40.2	2.0
3	*5190.00	99.9 PK			2.48 V	38	98.0	1.9
4	*5190.00	90.5 AV			2.48 V	38	88.6	1.9
5	#10380.00	58.4 PK	68.2	-9.8	2.36 V	303	46.6	11.8
6	15570.00	49.4 PK	74.0	-24.6	3.92 V	303	37.6	11.8
7	15570.00	37.1 AV	54.0	-16.9	3.92 V	303	25.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

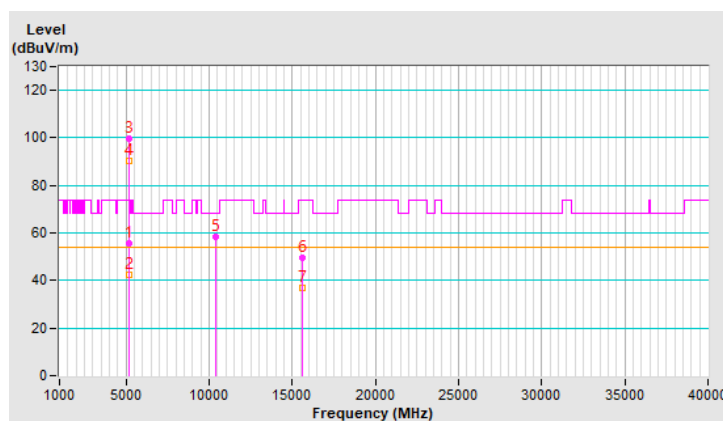


RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.20 H	145	61.6	2.0
2	5150.00	52.2 AV	54.0	-1.8	1.20 H	145	50.2	2.0
3	*5230.00	113.2 PK			1.20 H	145	111.5	1.7
4	*5230.00	103.5 AV			1.20 H	145	101.8	1.7
5	#10460.00	53.2 PK	68.2	-15.0	1.11 H	337	41.4	11.8
6	15690.00	48.4 PK	74.0	-25.6	3.39 H	47	36.7	11.7
7	15690.00	35.9 AV	54.0	-18.1	3.39 H	47	24.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

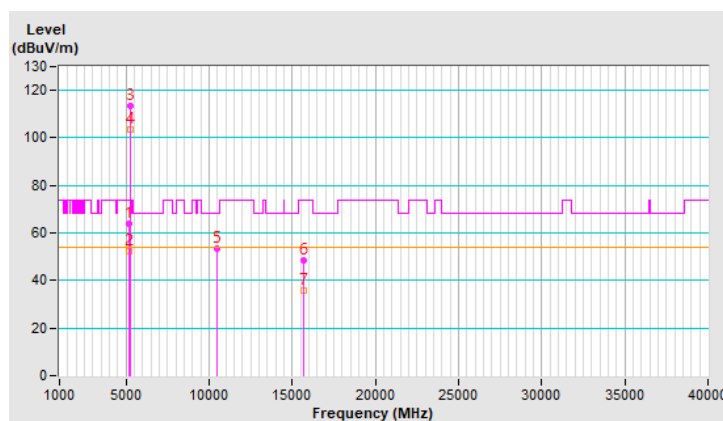


RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	1.54 V	187	48.7	2.0
2	5150.00	38.0 AV	54.0	-16.0	1.54 V	187	36.0	2.0
3	*5230.00	105.9 PK			1.54 V	187	104.2	1.7
4	*5230.00	95.2 AV			1.54 V	187	93.5	1.7
5	#10460.00	58.1 PK	68.2	-10.1	2.29 V	287	46.3	11.8
6	15690.00	49.2 PK	74.0	-24.8	3.92 V	296	37.5	11.7
7	15690.00	36.6 AV	54.0	-17.4	3.92 V	296	24.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

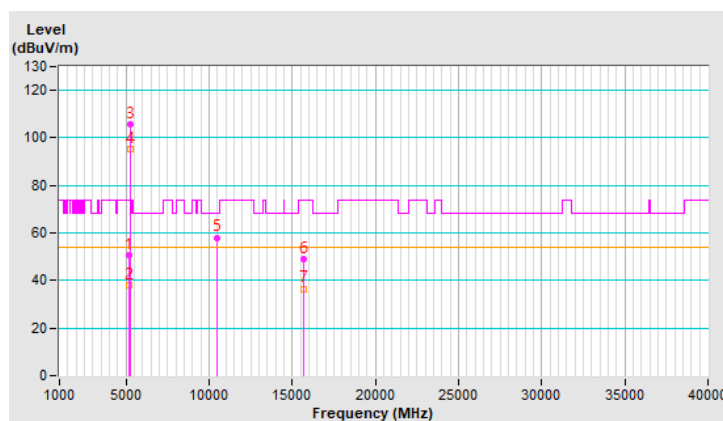


RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	1.21 H	145	57.8	2.0
2	5150.00	47.5 AV	54.0	-6.5	1.21 H	145	45.5	2.0
3	*5270.00	112.6 PK			1.21 H	145	111.1	1.5
4	*5270.00	101.4 AV			1.21 H	145	99.9	1.5
5	#10540.00	53.0 PK	68.2	-15.2	1.03 H	319	41.2	11.8
6	15810.00	48.6 PK	74.0	-25.4	3.47 H	61	37.4	11.2
7	15810.00	36.6 AV	54.0	-17.4	3.47 H	61	25.4	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

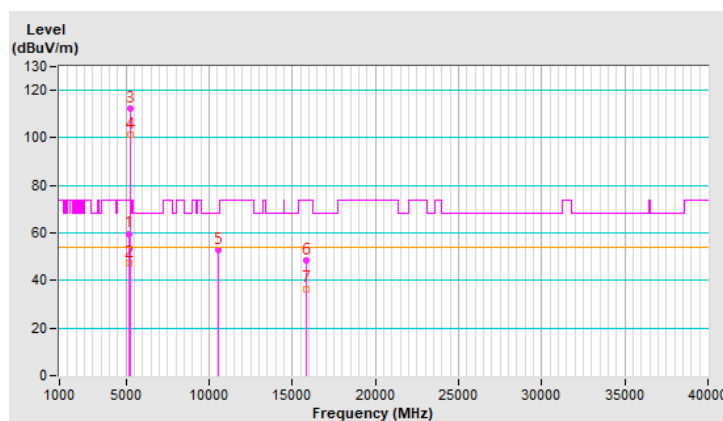


RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.4 PK	74.0	-23.6	1.50 V	175	48.4	2.0
2	5150.00	37.8 AV	54.0	-16.2	1.50 V	175	35.8	2.0
3	*5270.00	106.6 PK			1.50 V	175	105.1	1.5
4	*5270.00	95.7 AV			1.50 V	175	94.2	1.5
5	#10540.00	57.8 PK	68.2	-10.4	2.37 V	299	46.0	11.8
6	15810.00	49.8 PK	74.0	-24.2	3.86 V	303	38.6	11.2
7	15810.00	37.1 AV	54.0	-16.9	3.86 V	303	25.9	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

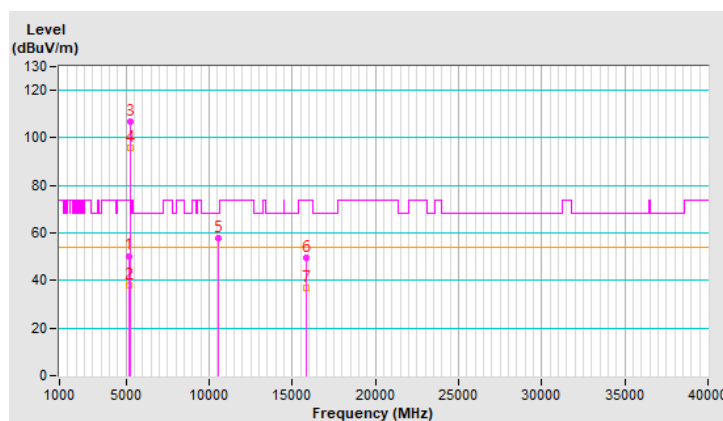


RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.9 PK			1.22 H	154	106.3	1.6
2	*5310.00	97.1 AV			1.22 H	154	95.5	1.6
3	5350.00	64.4 PK	74.0	-9.6	1.22 H	154	62.7	1.7
4	5350.00	52.5 AV	54.0	-1.5	1.22 H	154	50.8	1.7
5	10620.00	53.4 PK	74.0	-20.6	1.04 H	319	41.7	11.7
6	10620.00	40.4 AV	54.0	-13.6	1.04 H	319	28.7	11.7
7	15930.00	48.7 PK	74.0	-25.3	3.38 H	60	37.6	11.1
8	15930.00	36.3 AV	54.0	-17.7	3.38 H	60	25.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

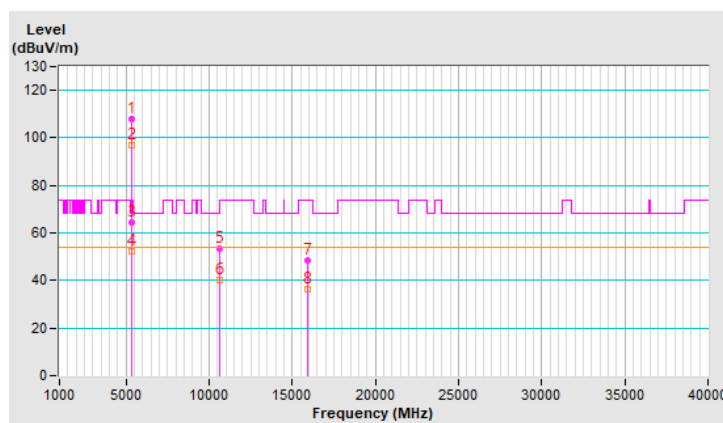


RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	99.9 PK			1.69 V	141	98.3	1.6
2	*5310.00	87.6 AV			1.69 V	141	86.0	1.6
3	5350.00	49.9 PK	74.0	-24.1	1.69 V	141	48.2	1.7
4	5350.00	37.5 AV	54.0	-16.5	1.69 V	141	35.8	1.7
5	10620.00	58.5 PK	74.0	-15.5	2.27 V	285	46.8	11.7
6	10620.00	46.0 AV	54.0	-8.0	2.27 V	285	34.3	11.7
7	15930.00	48.8 PK	74.0	-25.2	3.87 V	293	37.7	11.1
8	15930.00	36.7 AV	54.0	-17.3	3.87 V	293	25.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

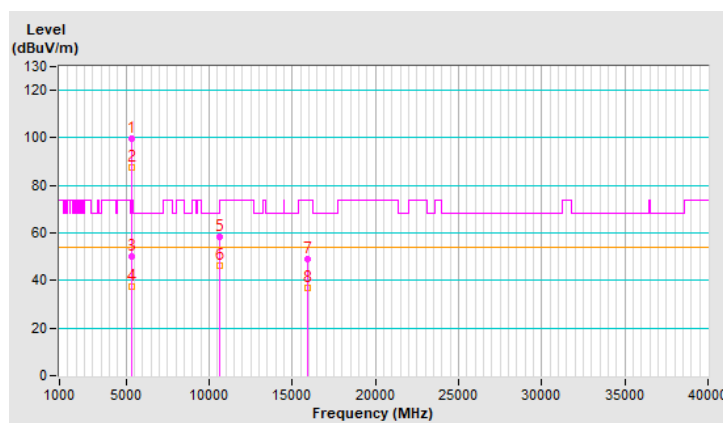


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.5 PK	74.0	-13.5	1.22 H	146	58.7	1.8
2	5460.00	46.5 AV	54.0	-7.5	1.22 H	146	44.7	1.8
3	#5470.00	66.1 PK	68.2	-2.1	1.22 H	146	64.3	1.8
4	*5510.00	108.3 PK			1.22 H	146	106.6	1.7
5	*5510.00	96.9 AV			1.22 H	146	95.2	1.7
6	11020.00	52.4 PK	74.0	-21.6	1.10 H	330	40.0	12.4
7	11020.00	39.9 AV	54.0	-14.1	1.10 H	330	27.5	12.4
8	#16530.00	48.4 PK	68.2	-19.8	3.42 H	44	34.5	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

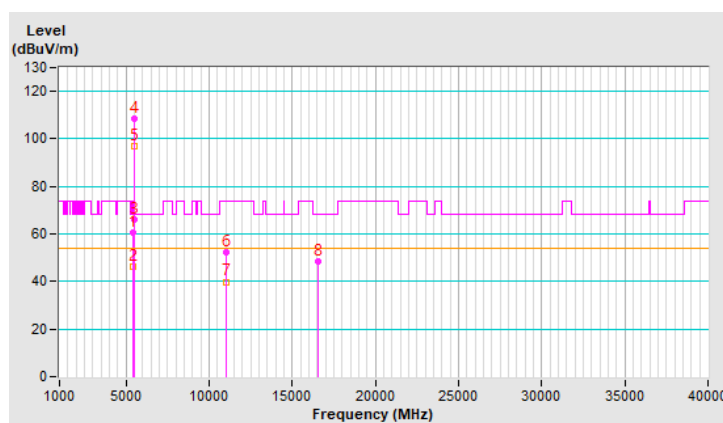


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.0 PK	74.0	-24.0	1.72 V	138	48.2	1.8
2	5460.00	37.9 AV	54.0	-16.1	1.72 V	138	36.1	1.8
3	#5470.00	53.6 PK	68.2	-14.6	1.72 V	138	51.8	1.8
4	*5510.00	99.9 PK			1.72 V	138	98.2	1.7
5	*5510.00	87.9 AV			1.72 V	138	86.2	1.7
6	11020.00	58.1 PK	74.0	-15.9	2.33 V	293	45.7	12.4
7	11020.00	45.9 AV	54.0	-8.1	2.33 V	293	33.5	12.4
8	#16530.00	49.2 PK	68.2	-19.0	3.89 V	299	35.3	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

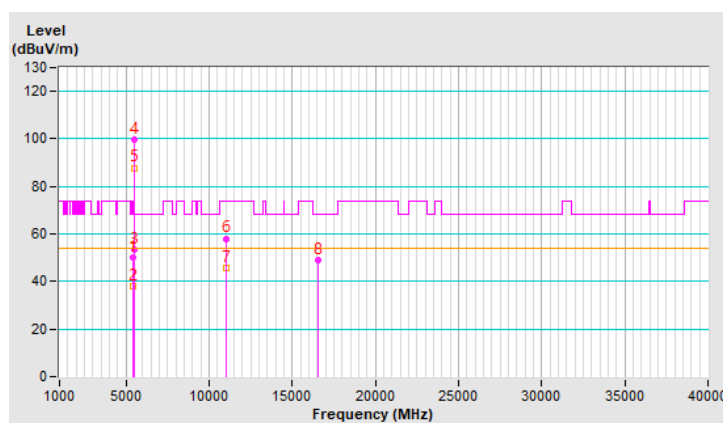


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.1 PK			1.22 H	141	109.3	1.8
2	*5550.00	100.0 AV			1.22 H	141	98.2	1.8
3	11100.00	53.2 PK	74.0	-20.8	1.06 H	311	41.0	12.2
4	11100.00	40.3 AV	54.0	-13.7	1.06 H	311	28.1	12.2
5	#16650.00	48.9 PK	68.2	-19.3	3.39 H	45	34.1	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

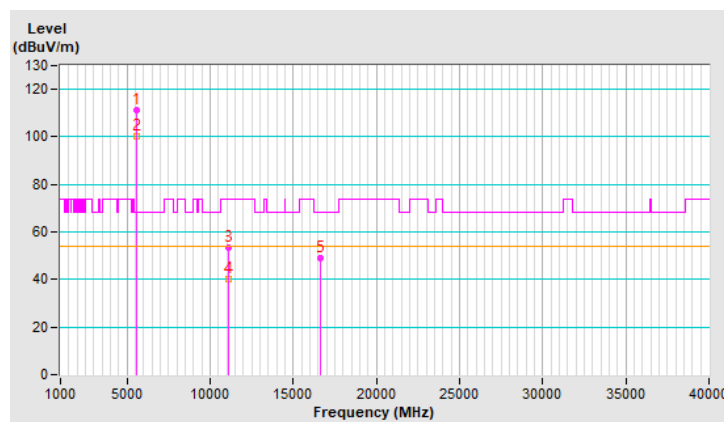


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	100.4 PK			1.53 V	195	98.6	1.8
2	*5550.00	89.8 AV			1.53 V	195	88.0	1.8
3	11100.00	58.3 PK	74.0	-15.7	2.26 V	273	46.1	12.2
4	11100.00	45.7 AV	54.0	-8.3	2.26 V	273	33.5	12.2
5	#16650.00	49.6 PK	68.2	-18.6	3.86 V	307	34.8	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

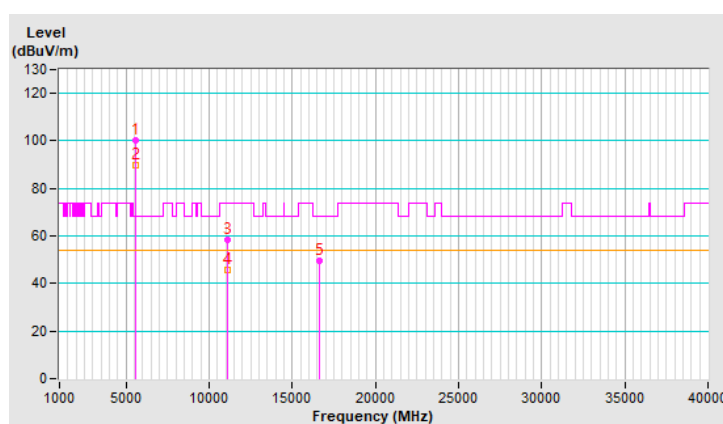


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	111.7 PK			1.22 H	146	109.8	1.9
2	*5670.00	100.4 AV			1.22 H	146	98.5	1.9
3	#5725.00	66.3 PK	68.2	-1.9	1.22 H	146	64.2	2.1
4	11340.00	53.3 PK	74.0	-20.7	1.09 H	314	40.8	12.5
5	11340.00	40.5 AV	54.0	-13.5	1.09 H	314	28.0	12.5
6	#17010.00	48.6 PK	68.2	-19.6	3.45 H	43	32.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

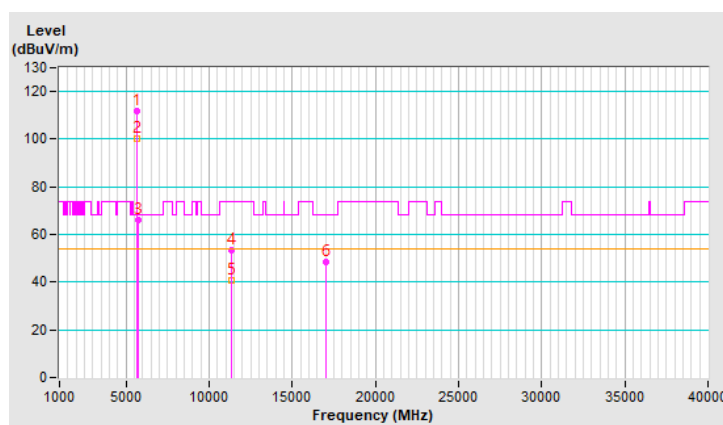


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	100.2 PK			1.53 V	200	98.3	1.9
2	*5670.00	89.7 AV			1.53 V	200	87.8	1.9
3	#5725.00	50.2 PK	68.2	-18.0	1.53 V	200	48.1	2.1
4	11340.00	58.4 PK	74.0	-15.6	2.27 V	290	45.9	12.5
5	11340.00	46.1 AV	54.0	-7.9	2.27 V	290	33.6	12.5
6	#17010.00	49.8 PK	68.2	-18.4	3.84 V	304	33.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

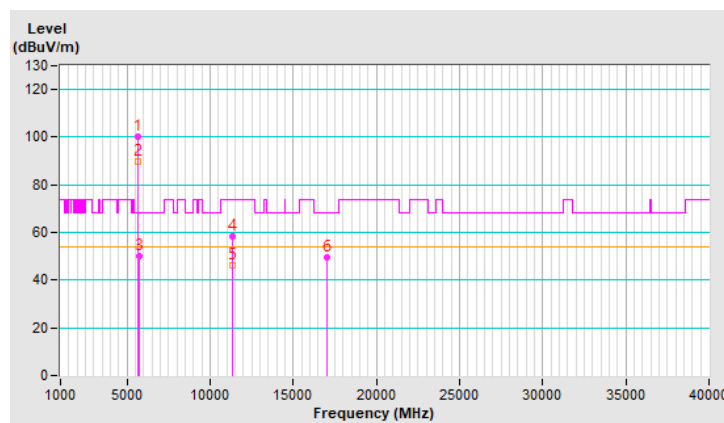


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.8 PK	74.0	-24.2	1.23 H	148	48.0	1.8
2	5460.00	38.6 AV	54.0	-15.4	1.23 H	148	36.8	1.8
3	#5470.00	51.0 PK	68.2	-17.2	1.23 H	148	49.2	1.8
4	*5710.00	111.6 PK			1.23 H	148	109.6	2.0
5	*5710.00	100.2 AV			1.23 H	148	98.2	2.0
6	#5850.00	51.0 PK	68.2	-17.2	1.23 H	148	48.7	2.3
7	11420.00	53.2 PK	74.0	-20.8	1.13 H	305	40.5	12.7
8	11420.00	40.2 AV	54.0	-13.8	1.13 H	305	27.5	12.7
9	#17130.00	48.9 PK	68.2	-19.3	3.47 H	38	32.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

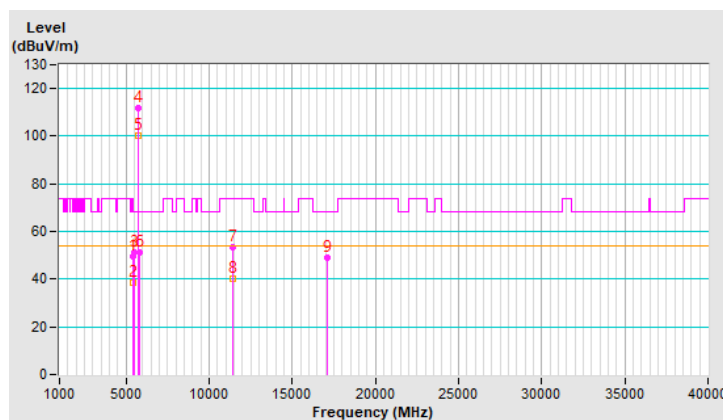


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.0 PK	74.0	-24.0	1.47 V	190	48.2	1.8
2	5460.00	37.9 AV	54.0	-16.1	1.47 V	190	36.1	1.8
3	#5470.00	49.8 PK	68.2	-18.4	1.47 V	190	48.0	1.8
4	*5710.00	100.2 PK			1.47 V	190	98.2	2.0
5	*5710.00	89.6 AV			1.47 V	190	87.6	2.0
6	#5850.00	49.9 PK	68.2	-18.3	1.47 V	190	47.6	2.3
7	11420.00	57.8 PK	74.0	-16.2	2.33 V	287	45.1	12.7
8	11420.00	45.7 AV	54.0	-8.3	2.33 V	287	33.0	12.7
9	#17130.00	50.0 PK	68.2	-18.2	3.84 V	294	33.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

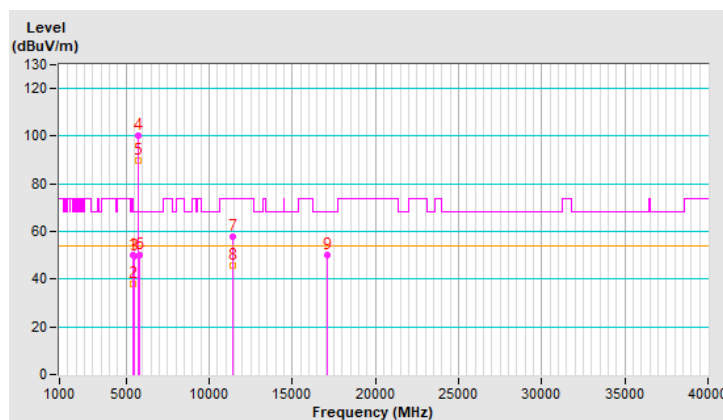


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.73	58.4 PK	68.2	-9.8	1.21 H	145	56.5	1.9
2	*5755.00	113.2 PK			1.21 H	145	111.1	2.1
3	*5755.00	103.6 AV			1.21 H	145	101.5	2.1
4	#5948.04	54.1 PK	68.2	-14.1	1.21 H	145	51.5	2.6
5	11510.00	52.7 PK	74.0	-21.3	1.04 H	340	39.9	12.8
6	11510.00	40.0 AV	54.0	-14.0	1.04 H	340	27.2	12.8
7	#17265.00	48.5 PK	68.2	-19.7	3.48 H	58	31.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

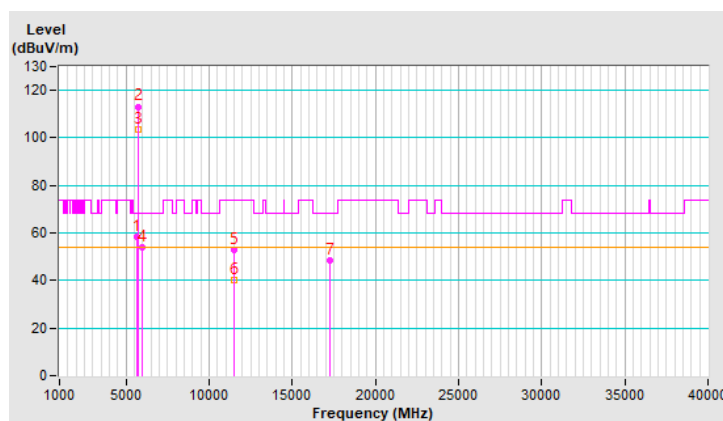


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.40	48.9 PK	68.2	-19.3	1.48 V	191	47.0	1.9
2	*5755.00	100.6 PK			1.48 V	191	98.5	2.1
3	*5755.00	89.9 AV			1.48 V	191	87.8	2.1
4	#5936.35	49.1 PK	68.2	-19.1	1.48 V	191	46.6	2.5
5	11510.00	57.6 PK	74.0	-16.4	2.37 V	286	44.8	12.8
6	11510.00	45.4 AV	54.0	-8.6	2.37 V	286	32.6	12.8
7	#17265.00	49.2 PK	68.2	-19.0	3.92 V	288	32.6	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

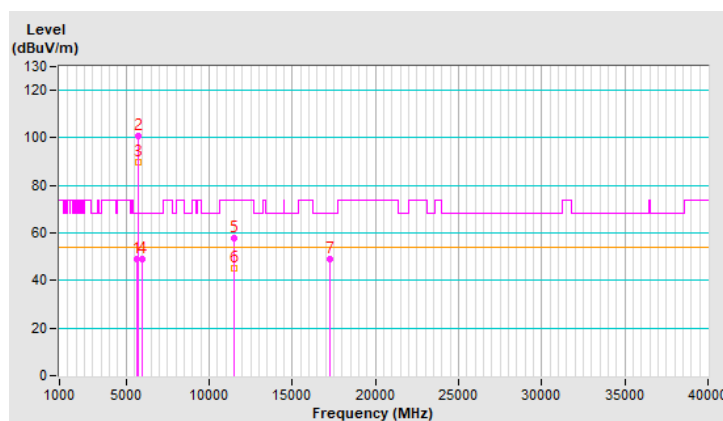


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.39	54.4 PK	68.2	-13.8	1.22 H	146	52.5	1.9
2	*5795.00	112.3 PK			1.22 H	146	110.0	2.3
3	*5795.00	100.5 AV			1.22 H	146	98.2	2.3
4	#5934.68	58.5 PK	68.2	-9.7	1.22 H	146	56.0	2.5
5	11590.00	53.0 PK	74.0	-21.0	1.01 H	337	40.3	12.7
6	11590.00	40.3 AV	54.0	-13.7	1.01 H	337	27.6	12.7
7	#17385.00	49.1 PK	68.2	-19.1	3.46 H	41	31.5	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

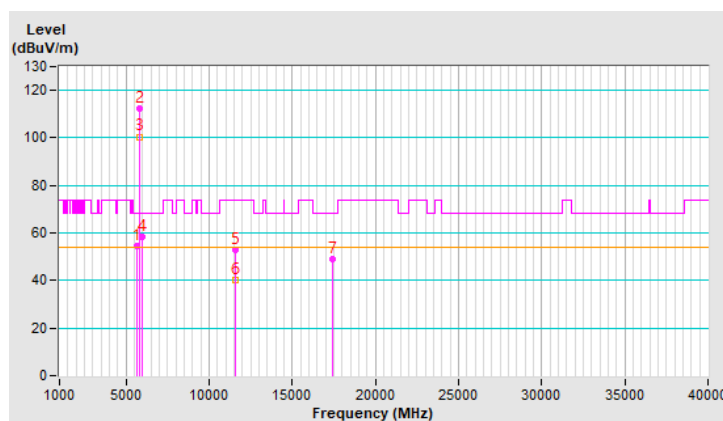


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.20	48.0 PK	68.2	-20.2	1.53 V	214	46.0	2.0
2	*5795.00	95.4 PK			1.53 V	214	93.1	2.3
3	*5795.00	85.7 AV			1.53 V	214	83.4	2.3
4	#5934.60	52.5 PK	68.2	-15.7	1.53 V	214	50.0	2.5
5	11590.00	57.7 PK	74.0	-16.3	2.31 V	283	45.0	12.7
6	11590.00	45.6 AV	54.0	-8.4	2.31 V	283	32.9	12.7
7	#17385.00	49.3 PK	68.2	-18.9	3.87 V	312	31.7	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

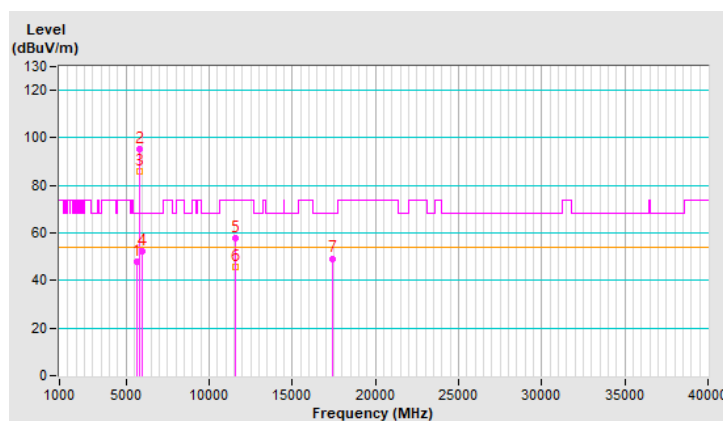


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.22 H	145	64.5	2.0
2	5150.00	52.4 AV	54.0	-1.6	1.22 H	145	50.4	2.0
3	*5210.00	110.3 PK			1.22 H	145	108.5	1.8
4	*5210.00	99.1 AV			1.22 H	145	97.3	1.8
5	5350.00	50.9 PK	74.0	-23.1	1.22 H	145	49.2	1.7
6	5350.00	38.6 AV	54.0	-15.4	1.22 H	145	36.9	1.7
7	#10420.00	53.1 PK	68.2	-15.1	1.11 H	324	41.2	11.9
8	15630.00	48.7 PK	74.0	-25.3	3.45 H	45	37.0	11.7
9	15630.00	36.4 AV	54.0	-17.6	3.45 H	45	24.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

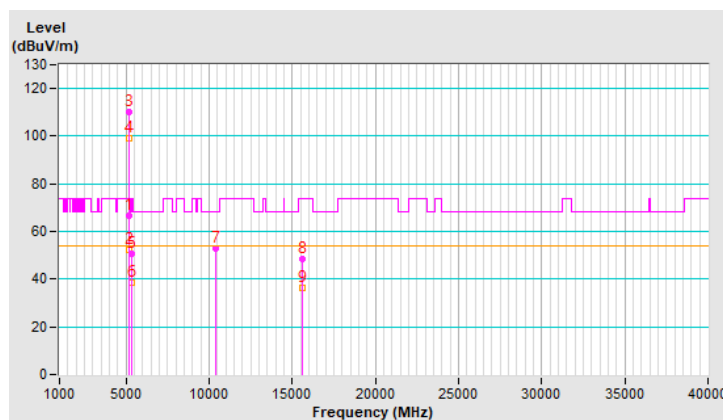


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	48.5 PK	74.0	-25.5	1.48 V	120	46.5	2.0
2	5150.00	38.2 AV	54.0	-15.8	1.48 V	120	36.2	2.0
3	*5210.00	92.7 PK			1.48 V	120	90.9	1.8
4	*5210.00	81.0 AV			1.48 V	120	79.2	1.8
5	5350.00	47.4 PK	74.0	-26.6	1.48 V	120	45.7	1.7
6	5350.00	36.6 AV	54.0	-17.4	1.48 V	120	34.9	1.7
7	#10420.00	58.1 PK	68.2	-10.1	2.32 V	299	46.2	11.9
8	15630.00	48.8 PK	74.0	-25.2	3.84 V	304	37.1	11.7
9	15630.00	36.4 AV	54.0	-17.6	3.84 V	304	24.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

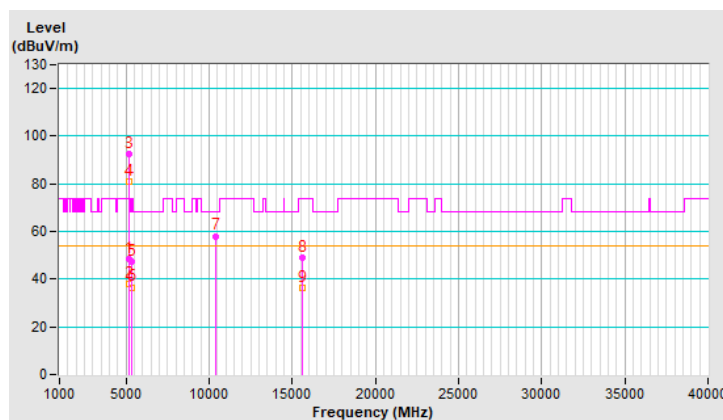


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	1.22 H	146	49.4	2.0
2	5150.00	39.5 AV	54.0	-14.5	1.22 H	146	37.5	2.0
3	*5290.00	103.5 PK			1.22 H	146	102.0	1.5
4	*5290.00	98.4 AV			1.22 H	146	96.9	1.5
5	5350.00	64.3 PK	74.0	-9.7	1.22 H	146	62.6	1.7
6	5350.00	52.4 AV	54.0	-1.6	1.22 H	146	50.7	1.7
7	#10580.00	53.1 PK	68.2	-15.1	1.00 H	311	41.4	11.7
8	15870.00	48.5 PK	74.0	-25.5	3.41 H	69	37.5	11.0
9	15870.00	36.4 AV	54.0	-17.6	3.41 H	69	25.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

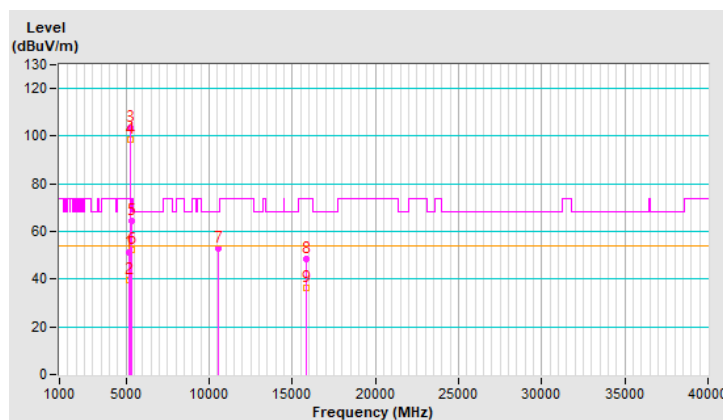


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	49.2 PK	74.0	-24.8	1.60 V	40	47.2	2.0
2	5150.00	37.6 AV	54.0	-16.4	1.60 V	40	35.6	2.0
3	*5290.00	91.2 PK			1.60 V	40	89.7	1.5
4	*5290.00	83.7 AV			1.60 V	40	82.2	1.5
5	5350.00	52.0 PK	74.0	-22.0	1.60 V	40	50.3	1.7
6	5350.00	41.0 AV	54.0	-13.0	1.60 V	40	39.3	1.7
7	#10580.00	58.3 PK	68.2	-9.9	2.38 V	295	46.6	11.7
8	15870.00	49.1 PK	74.0	-24.9	3.78 V	318	38.1	11.0
9	15870.00	36.9 AV	54.0	-17.1	3.78 V	318	25.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

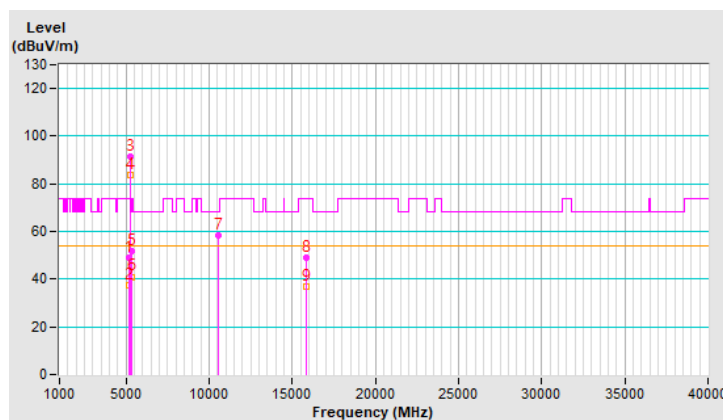


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	1.21 H	145	62.1	1.8
2	5460.00	52.3 AV	54.0	-1.7	1.21 H	145	50.5	1.8
3	#5470.00	66.2 PK	68.2	-2.0	1.21 H	145	64.4	1.8
4	*5530.00	103.5 PK			1.21 H	145	101.8	1.7
5	*5530.00	93.5 AV			1.21 H	145	91.8	1.7
6	#5725.00	51.8 PK	68.2	-16.4	1.21 H	145	49.7	2.1
7	11060.00	53.4 PK	74.0	-20.6	1.06 H	306	41.1	12.3
8	11060.00	40.6 AV	54.0	-13.4	1.06 H	306	28.3	12.3
9	#16590.00	48.1 PK	68.2	-20.1	3.45 H	81	33.6	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

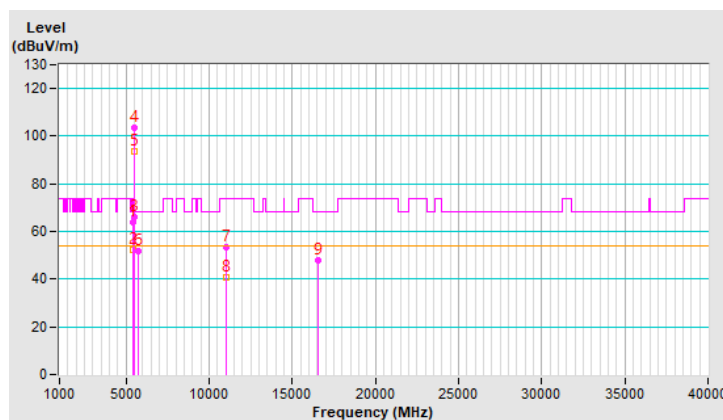


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.6 PK	74.0	-20.4	1.57 V	33	51.8	1.8
2	5460.00	40.0 AV	54.0	-14.0	1.57 V	33	38.2	1.8
3	#5470.00	55.2 PK	68.2	-13.0	1.57 V	33	53.4	1.8
4	*5530.00	93.1 PK			1.57 V	33	91.4	1.7
5	*5530.00	81.5 AV			1.57 V	33	79.8	1.7
6	#5725.00	55.0 PK	68.2	-13.2	1.57 V	33	52.9	2.1
7	11060.00	57.7 PK	74.0	-16.3	2.32 V	290	45.4	12.3
8	11060.00	45.2 AV	54.0	-8.8	2.32 V	290	32.9	12.3
9	#16590.00	48.7 PK	68.2	-19.5	3.93 V	291	34.2	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

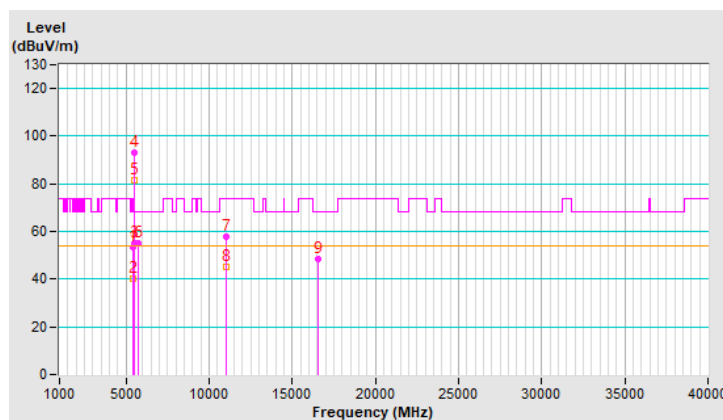


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	103.5 PK			1.21 H	145	101.6	1.9
2	*5610.00	93.5 AV			1.21 H	145	91.6	1.9
3	#5725.00	66.6 PK	68.2	-1.6	1.21 H	145	64.5	2.1
4	11220.00	52.7 PK	74.0	-21.3	1.00 H	311	40.6	12.1
5	11220.00	40.1 AV	54.0	-13.9	1.00 H	311	28.0	12.1
6	#16830.00	48.9 PK	68.2	-19.3	3.41 H	58	33.4	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

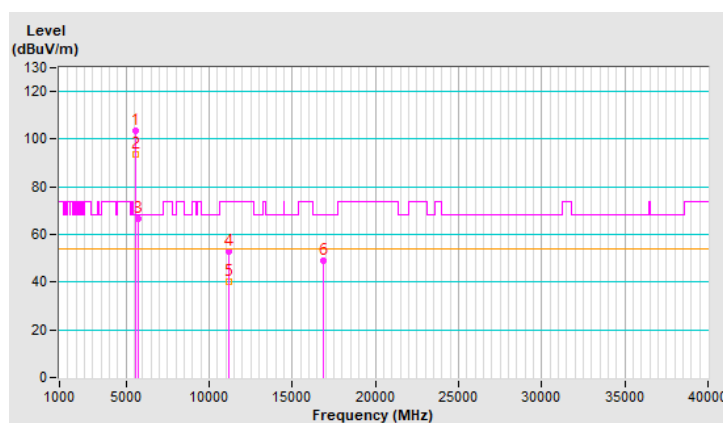


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	98.6 PK			1.44 V	129	96.7	1.9
2	*5610.00	88.4 AV			1.44 V	129	86.5	1.9
3	#5725.00	53.6 PK	68.2	-14.6	1.44 V	129	51.5	2.1
4	11220.00	57.9 PK	74.0	-16.1	2.27 V	301	45.8	12.1
5	11220.00	45.6 AV	54.0	-8.4	2.27 V	301	33.5	12.1
6	#16830.00	49.8 PK	68.2	-18.4	3.92 V	310	34.3	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

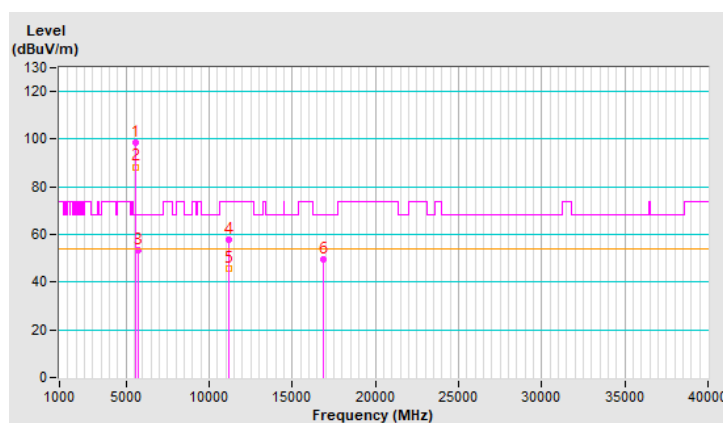


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.23 H	152	50.4	1.8
2	5460.00	38.9 AV	54.0	-15.1	1.23 H	152	37.1	1.8
3	#5470.00	54.1 PK	68.2	-14.1	1.23 H	152	52.3	1.8
4	*5690.00	107.4 PK			1.23 H	152	105.4	2.0
5	*5690.00	97.5 AV			1.23 H	152	95.5	2.0
6	#5850.00	66.8 PK	68.2	-1.4	1.23 H	152	64.5	2.3
7	11380.00	53.2 PK	74.0	-20.8	1.00 H	324	40.5	12.7
8	11380.00	40.2 AV	54.0	-13.8	1.00 H	324	27.5	12.7
9	#17070.00	48.2 PK	68.2	-20.0	3.40 H	58	31.9	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

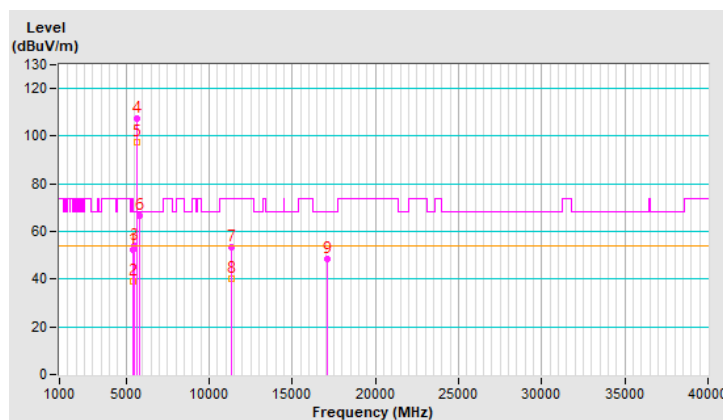


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.6 PK	74.0	-20.4	1.53 V	136	51.8	1.8
2	5460.00	40.1 AV	54.0	-13.9	1.53 V	136	38.3	1.8
3	#5470.00	54.0 PK	68.2	-14.2	1.53 V	136	52.2	1.8
4	*5690.00	100.0 PK			1.53 V	136	98.0	2.0
5	*5690.00	89.3 AV			1.53 V	136	87.3	2.0
6	#5850.00	53.4 PK	68.2	-14.8	1.53 V	136	51.1	2.3
7	11380.00	57.4 PK	74.0	-16.6	2.30 V	298	44.7	12.7
8	11380.00	45.2 AV	54.0	-8.8	2.30 V	298	32.5	12.7
9	#17070.00	48.8 PK	68.2	-19.4	3.91 V	307	32.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

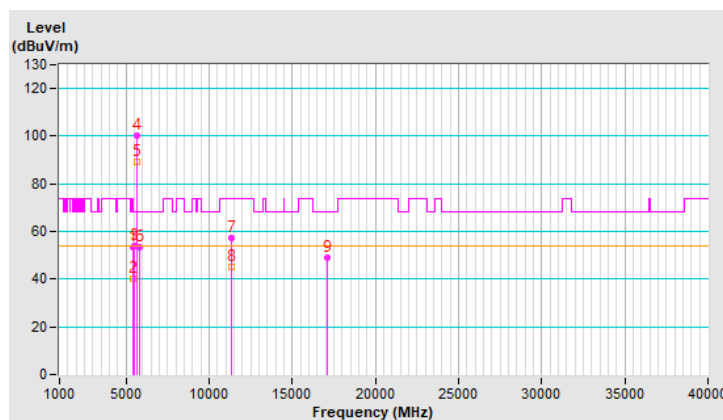


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.78	66.4 PK	68.2	-1.8	1.25 H	155	64.4	2.0
2	*5775.00	108.0 PK			1.25 H	155	105.8	2.2
3	*5775.00	98.4 AV			1.25 H	155	96.2	2.2
4	#5935.55	63.7 PK	68.2	-4.5	1.25 H	155	61.2	2.5
5	11550.00	53.3 PK	74.0	-20.7	1.00 H	308	40.6	12.7
6	11550.00	40.5 AV	54.0	-13.5	1.00 H	308	27.8	12.7
7	#17325.00	48.9 PK	68.2	-19.3	3.40 H	62	31.9	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

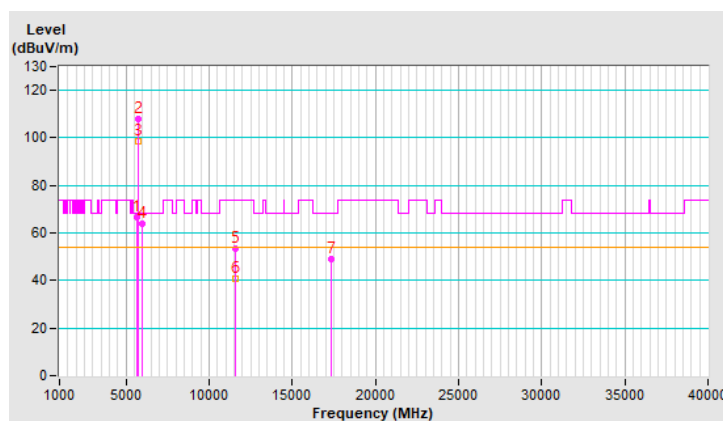


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.40	62.1 PK	68.2	-6.1	1.50 V	145	60.1	2.0
2	*5775.00	99.3 PK			1.50 V	145	97.1	2.2
3	*5775.00	88.9 AV			1.50 V	145	86.7	2.2
4	#5928.60	64.4 PK	68.2	-3.8	1.50 V	145	61.9	2.5
5	11550.00	57.2 PK	74.0	-16.8	2.30 V	290	44.5	12.7
6	11550.00	45.2 AV	54.0	-8.8	2.30 V	290	32.5	12.7
7	#17325.00	49.4 PK	68.2	-18.8	3.90 V	309	32.4	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

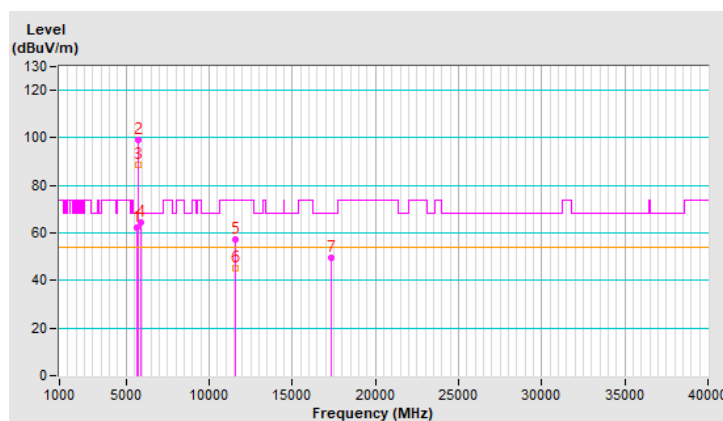


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.2 PK	74.0	-2.8	3.09 H	207	70.1	1.1
2	5150.00	48.7 AV	54.0	-5.3	3.09 H	207	47.6	1.1
3	*5180.00	121.5 PK			3.09 H	207	120.5	1.0
4	*5180.00	110.5 AV			3.09 H	207	109.5	1.0
5	#10360.00	56.9 PK	68.2	-11.3	2.41 H	129	45.7	11.2
6	#10360.00	45.0 AV	54.0	-9.0	2.41 H	129	33.8	11.2
7	15540.00	45.8 PK	74.0	-28.2	2.20 H	144	34.9	10.9
8	15540.00	32.7 AV	54.0	-21.3	2.20 H	144	21.8	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

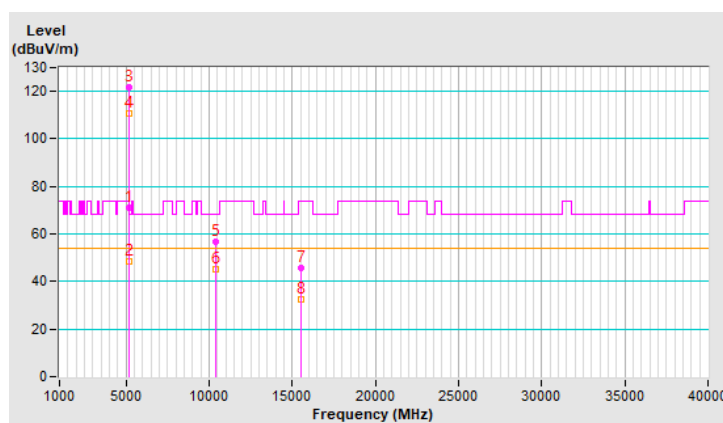


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	3.19 V	149	63.5	2.0
2	5150.00	40.4 AV	54.0	-13.6	3.19 V	149	38.4	2.0
3	*5180.00	108.6 PK			3.19 V	149	106.7	1.9
4	*5180.00	97.8 AV			3.19 V	149	95.9	1.9
5	#10360.00	51.7 PK	68.2	-16.5	3.07 V	77	40.1	11.6
6	#10360.00	40.9 AV	54.0	-13.1	3.07 V	77	29.3	11.6
7	15540.00	44.5 PK	74.0	-29.5	3.40 V	59	32.7	11.8
8	15540.00	34.4 AV	54.0	-19.6	3.40 V	59	22.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

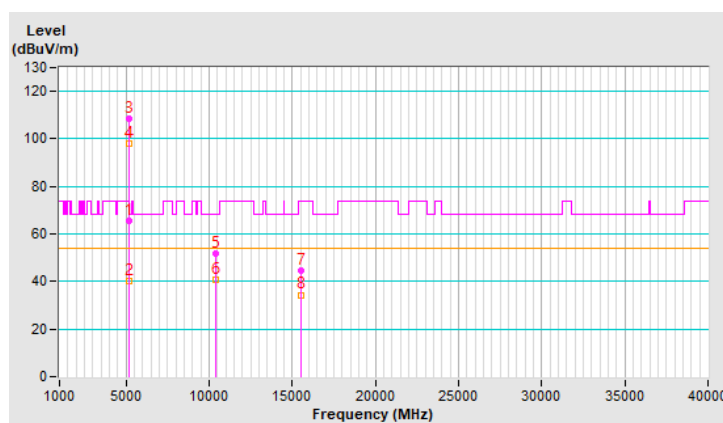


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	122.5 PK			3.09 H	148	120.7	1.8
2	*5200.00	112.7 AV			3.09 H	148	110.9	1.8
3	#10400.00	56.7 PK	68.2	-11.5	2.21 H	132	44.9	11.8
4	15600.00	43.7 PK	74.0	-30.3	2.27 H	165	32.0	11.7
5	15600.00	30.8 AV	54.0	-23.2	2.27 H	165	19.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

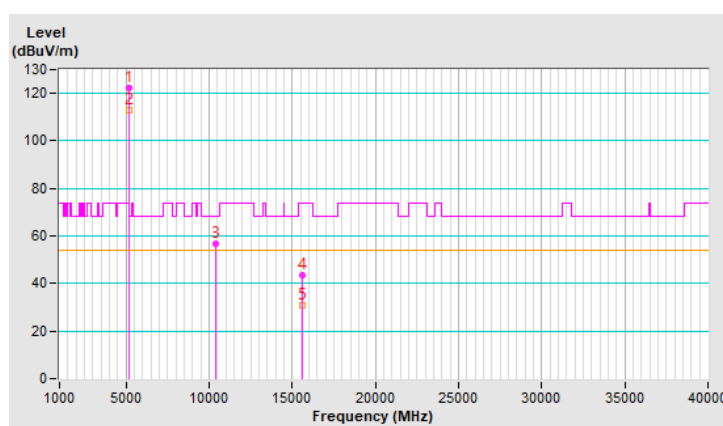


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.3 PK			3.37 V	179	109.5	1.8
2	*5200.00	100.8 AV			3.37 V	179	99.0	1.8
3	#10400.00	52.8 PK	68.2	-15.4	3.38 V	108	41.0	11.8
4	15600.00	46.0 PK	74.0	-28.0	3.19 V	60	34.3	11.7
5	15600.00	33.0 AV	54.0	-21.0	3.19 V	60	21.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

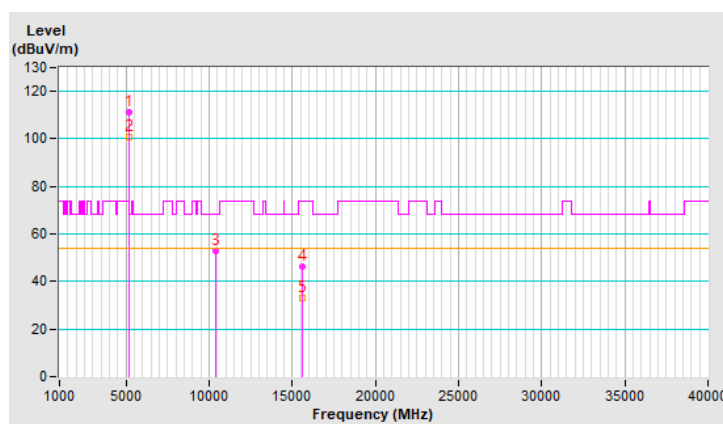


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	122.3 PK			3.29 H	142	120.6	1.7
2	*5240.00	112.5 AV			3.29 H	142	110.8	1.7
3	5350.00	51.7 PK	74.0	-22.3	3.29 H	142	50.0	1.7
4	5350.00	39.4 AV	54.0	-14.6	3.29 H	142	37.7	1.7
5	#10480.00	58.0 PK	68.2	-10.2	2.47 H	157	46.2	11.8
6	15720.00	45.8 PK	74.0	-28.2	2.05 H	151	34.2	11.6
7	15720.00	33.1 AV	54.0	-20.9	2.05 H	151	21.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

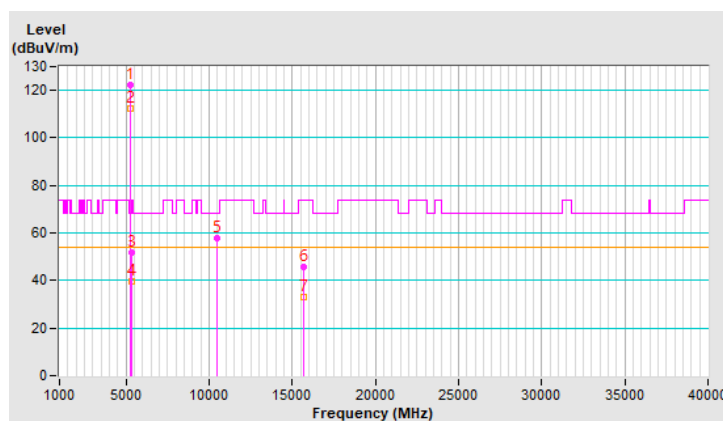


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.7 PK			3.48 V	166	109.0	1.7
2	*5240.00	100.8 AV			3.48 V	166	99.1	1.7
3	5350.00	51.8 PK	74.0	-22.2	3.48 V	166	50.1	1.7
4	5350.00	39.2 AV	54.0	-14.8	3.48 V	166	37.5	1.7
5	#10480.00	54.5 PK	68.2	-13.7	3.28 V	60	42.7	11.8
6	15720.00	43.1 PK	74.0	-30.9	3.31 V	60	31.5	11.6
7	15720.00	29.9 AV	54.0	-24.1	3.31 V	60	18.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

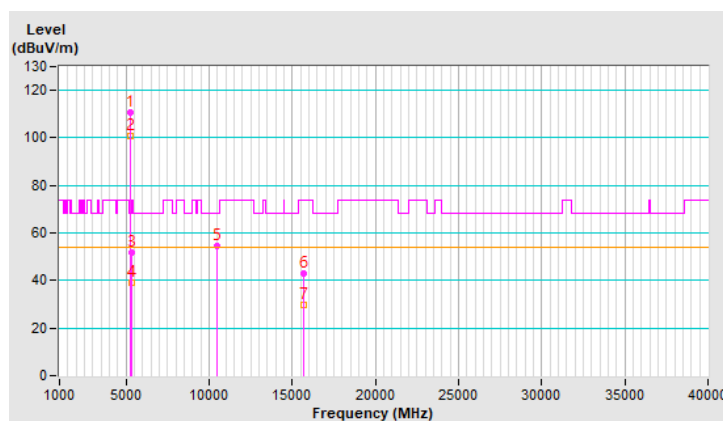


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.6 PK	74.0	-22.4	3.25 H	133	49.6	2.0
2	5150.00	39.1 AV	54.0	-14.9	3.25 H	133	37.1	2.0
3	*5260.00	122.1 PK			3.25 H	133	120.6	1.5
4	*5260.00	112.2 AV			3.25 H	133	110.7	1.5
5	#10520.00	57.5 PK	68.2	-10.7	2.38 H	139	45.8	11.7
6	15780.00	46.9 PK	74.0	-27.1	2.26 H	174	35.6	11.3
7	15780.00	33.6 AV	54.0	-20.4	2.26 H	174	22.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

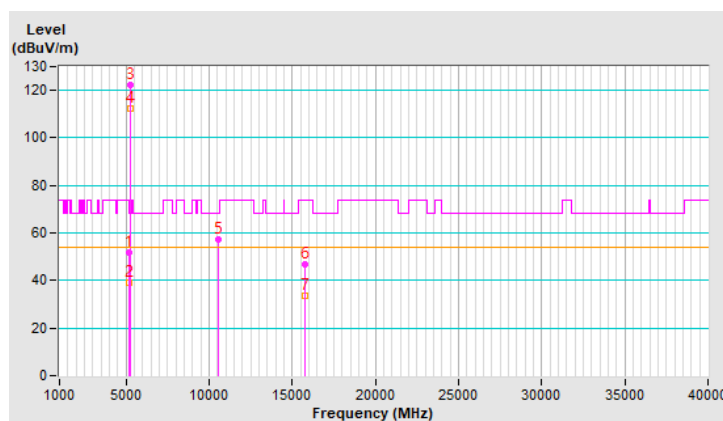


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	3.52 V	154	50.1	2.0
2	5150.00	39.5 AV	54.0	-14.5	3.52 V	154	37.5	2.0
3	*5260.00	109.1 PK			3.52 V	154	107.6	1.5
4	*5260.00	99.3 AV			3.52 V	154	97.8	1.5
5	#10520.00	54.5 PK	68.2	-13.7	3.39 V	80	42.8	11.7
6	15780.00	42.7 PK	74.0	-31.3	3.31 V	69	31.4	11.3
7	15780.00	30.7 AV	54.0	-23.3	3.31 V	69	19.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

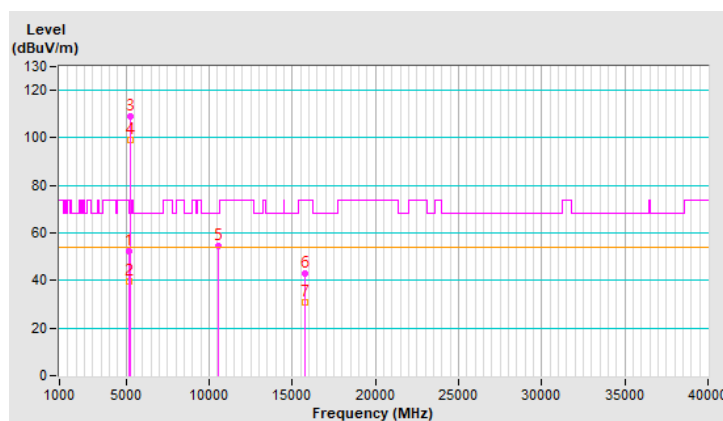


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.6 PK			3.01 H	177	121.1	1.5
2	*5300.00	112.5 AV			3.01 H	177	111.0	1.5
3	10600.00	58.5 PK	74.0	-15.5	2.22 H	113	46.8	11.7
4	10600.00	47.1 AV	54.0	-6.9	2.22 H	113	35.4	11.7
5	15900.00	47.1 PK	74.0	-26.9	2.31 H	143	36.1	11.0
6	15900.00	34.2 AV	54.0	-19.8	2.31 H	143	23.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

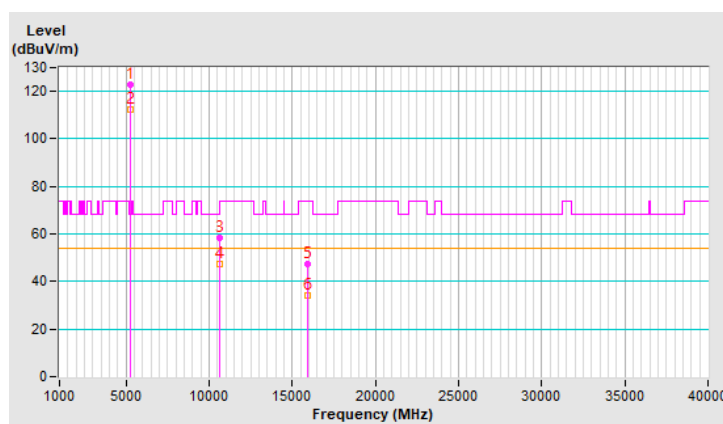


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.5 PK			3.34 V	135	107.0	1.5
2	*5300.00	98.6 AV			3.34 V	135	97.1	1.5
3	10600.00	54.0 PK	74.0	-20.0	3.14 V	50	42.3	11.7
4	10600.00	42.1 AV	54.0	-11.9	3.14 V	50	30.4	11.7
5	15900.00	42.7 PK	74.0	-31.3	3.26 V	63	31.7	11.0
6	15900.00	30.5 AV	54.0	-23.5	3.26 V	63	19.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

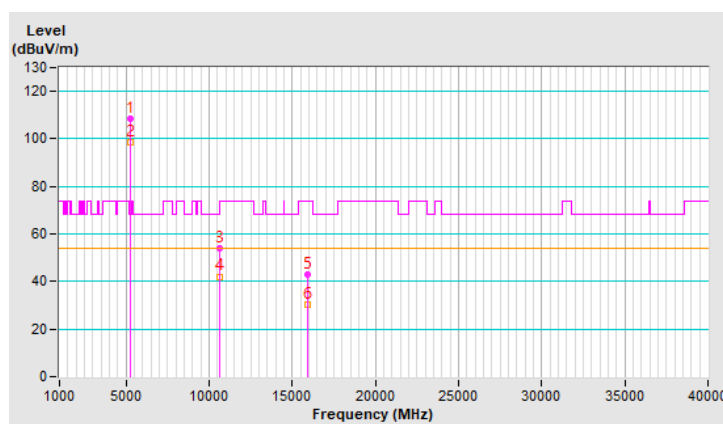


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.4 PK			3.33 H	131	117.8	1.6
2	*5320.00	111.7 AV			3.33 H	131	110.1	1.6
3	5350.00	67.0 PK	74.0	-7.0	3.33 H	131	65.3	1.7
4	5350.00	45.9 AV	54.0	-8.1	3.33 H	131	44.2	1.7
5	10640.00	53.5 PK	74.0	-20.5	2.25 H	191	41.8	11.7
6	10640.00	40.6 AV	54.0	-13.4	2.25 H	191	28.9	11.7
7	15960.00	44.8 PK	74.0	-29.2	2.06 H	127	33.5	11.3
8	15960.00	34.2 AV	54.0	-19.8	2.06 H	127	22.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

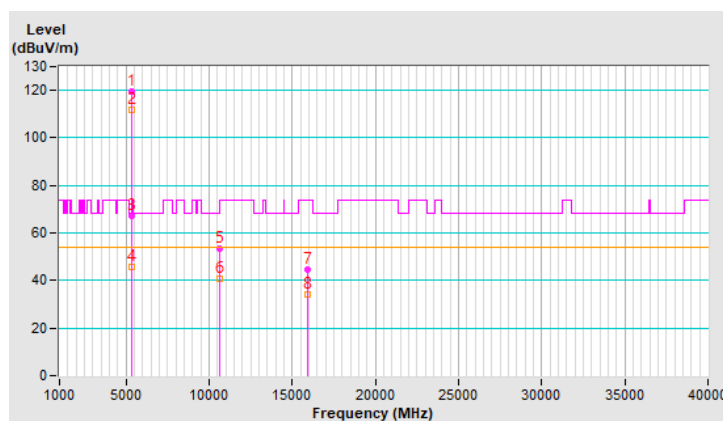


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	104.8 PK			3.43 V	165	103.2	1.6
2	*5320.00	96.1 AV			3.43 V	165	94.5	1.6
3	5350.00	59.6 PK	74.0	-14.4	3.43 V	165	57.9	1.7
4	5350.00	38.8 AV	54.0	-15.2	3.43 V	165	37.1	1.7
5	10640.00	48.7 PK	74.0	-25.3	3.33 V	114	37.0	11.7
6	10640.00	36.1 AV	54.0	-17.9	3.33 V	114	24.4	11.7
7	15960.00	43.6 PK	74.0	-30.4	3.23 V	87	32.3	11.3
8	15960.00	33.7 AV	54.0	-20.3	3.23 V	87	22.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

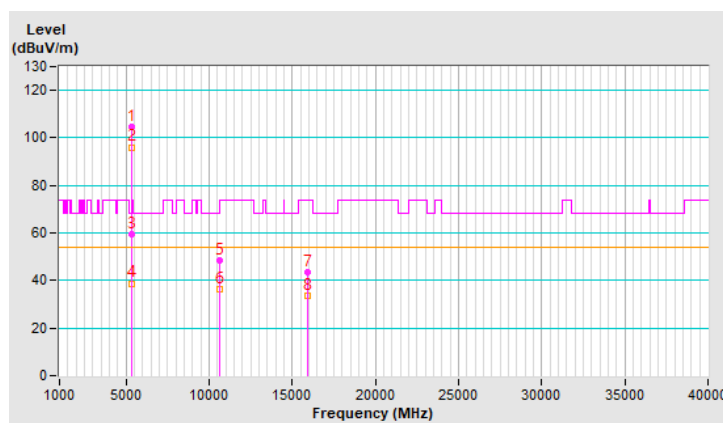


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.4 PK	74.0	-8.6	3.02 H	193	64.4	1.0
2	5460.00	42.8 AV	54.0	-11.2	3.02 H	193	41.8	1.0
3	#5470.00	66.0 PK	68.2	-2.2	3.02 H	193	65.0	1.0
4	*5500.00	116.8 PK			3.02 H	193	115.8	1.0
5	*5500.00	106.0 AV			3.02 H	193	105.0	1.0
6	11000.00	56.2 PK	74.0	-17.8	1.62 H	212	44.3	11.9
7	11000.00	41.9 AV	54.0	-12.1	1.62 H	212	30.0	11.9
8	#16500.00	52.7 PK	68.2	-15.5	1.54 H	242	39.8	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

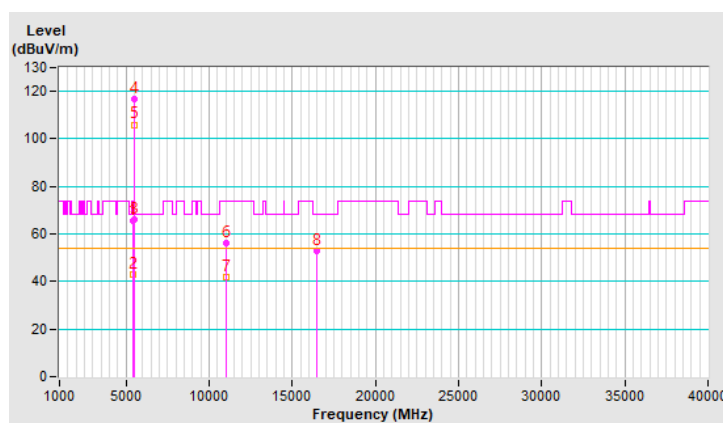


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	3.37 V	154	49.6	1.8
2	5460.00	39.3 AV	54.0	-14.7	3.37 V	154	37.5	1.8
3	#5470.00	64.5 PK	68.2	-3.7	3.37 V	154	62.7	1.8
4	*5500.00	112.3 PK			3.37 V	154	110.6	1.7
5	*5500.00	100.8 AV			3.37 V	154	99.1	1.7
6	11000.00	51.6 PK	74.0	-22.4	3.08 V	78	39.2	12.4
7	11000.00	37.6 AV	54.0	-16.4	3.08 V	78	25.2	12.4
8	#16500.00	52.2 PK	68.2	-16.0	3.27 V	90	38.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

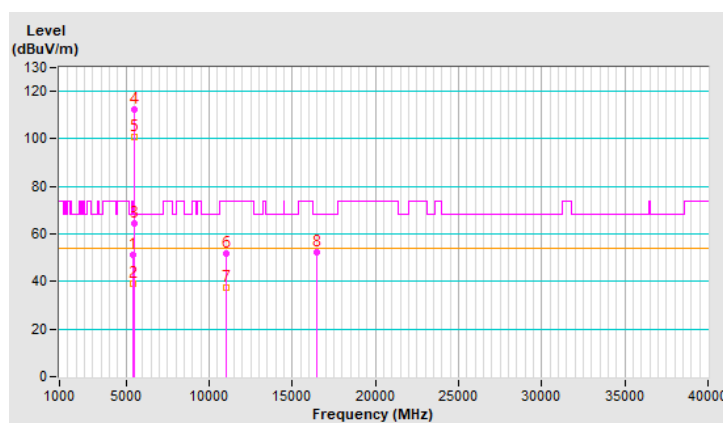


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.4 PK			3.06 H	150	117.6	1.8
2	*5580.00	110.4 AV			3.06 H	150	108.6	1.8
3	11160.00	52.0 PK	74.0	-22.0	2.08 H	142	40.0	12.0
4	11160.00	41.5 AV	54.0	-12.5	2.08 H	142	29.5	12.0
5	#16740.00	45.3 PK	68.2	-22.9	2.16 H	149	30.1	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

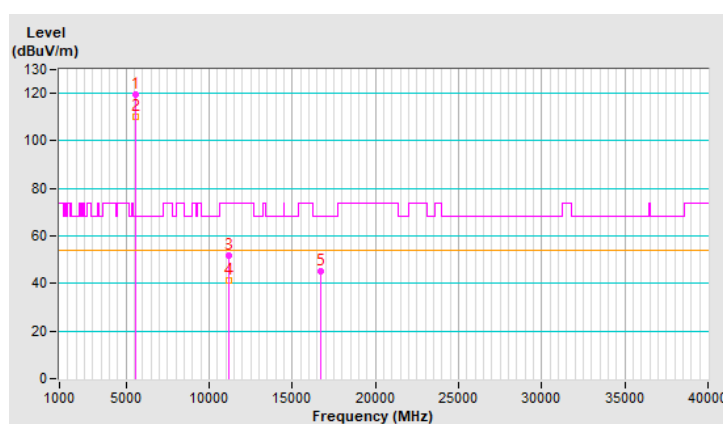


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	107.4 PK			3.52 V	114	105.6	1.8
2	*5580.00	98.2 AV			3.52 V	114	96.4	1.8
3	11160.00	48.9 PK	74.0	-25.1	3.48 V	70	36.9	12.0
4	11160.00	36.5 AV	54.0	-17.5	3.48 V	70	24.5	12.0
5	#16740.00	41.2 PK	68.2	-27.0	3.42 V	46	26.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

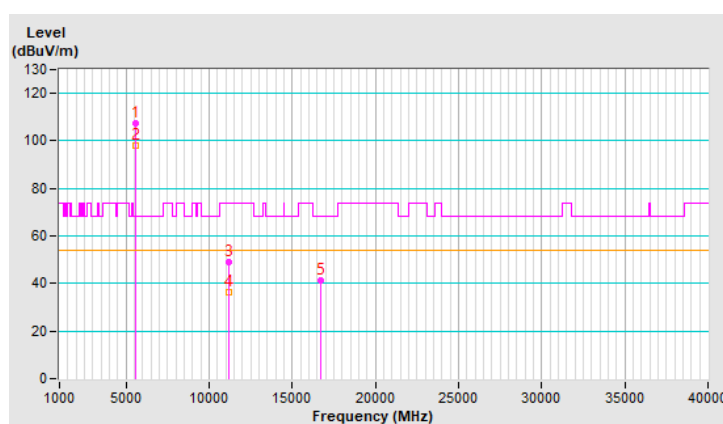


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.6 PK			3.13 H	143	118.2	1.4
2	*5700.00	109.6 AV			3.13 H	143	108.2	1.4
3	#5725.00	66.1 PK	68.2	-2.1	3.13 H	143	64.6	1.5
4	11400.00	55.2 PK	74.0	-18.8	2.22 H	169	43.3	11.9
5	11400.00	39.6 AV	54.0	-14.4	2.22 H	169	27.7	11.9
6	#17100.00	53.3 PK	68.2	-14.9	2.41 H	135	38.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

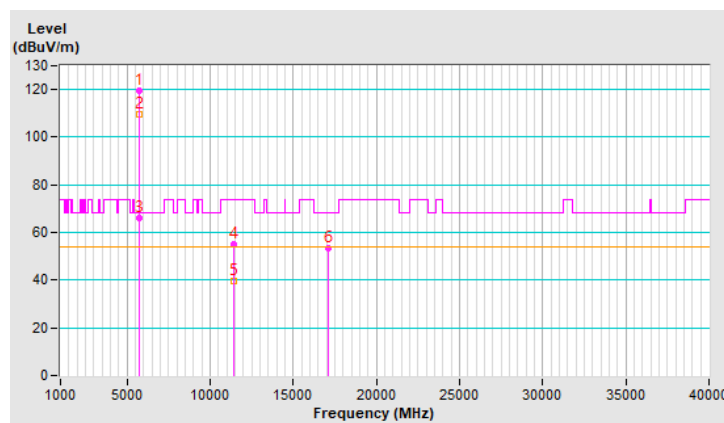


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.8 PK			3.40 V	159	105.8	2.0
2	*5700.00	97.2 AV			3.40 V	159	95.2	2.0
3	#5725.00	55.9 PK	68.2	-12.3	3.40 V	159	53.8	2.1
4	11400.00	50.8 PK	74.0	-23.2	2.17 V	165	38.1	12.7
5	11400.00	35.8 AV	54.0	-18.2	2.17 V	165	23.1	12.7
6	#17100.00	50.8 PK	68.2	-17.4	2.47 V	164	34.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

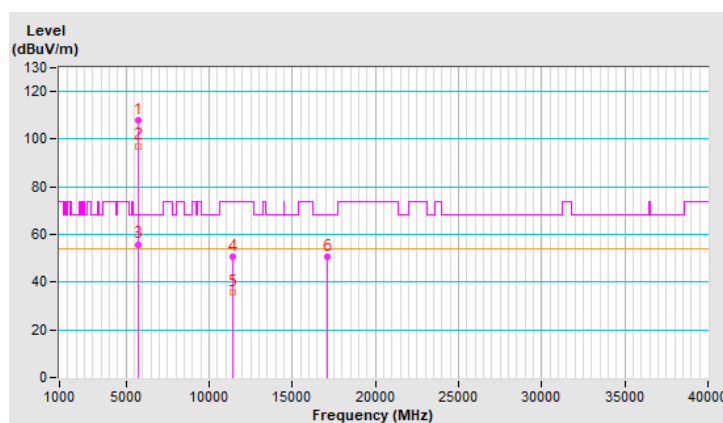


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.9 PK	74.0	-24.1	3.14 H	184	48.1	1.8
2	5460.00	40.2 AV	54.0	-13.8	3.14 H	184	38.4	1.8
3	#5470.00	49.9 PK	68.2	-18.3	3.14 H	184	48.1	1.8
4	*5720.00	119.8 PK			3.14 H	184	117.7	2.1
5	*5720.00	109.8 AV			3.14 H	184	107.7	2.1
6	#5850.00	50.1 PK	68.2	-18.1	3.14 H	184	47.8	2.3
7	11440.00	55.7 PK	74.0	-18.3	2.25 H	134	43.0	12.7
8	11440.00	41.6 AV	54.0	-12.4	2.25 H	134	28.9	12.7
9	#17160.00	53.4 PK	68.2	-14.8	2.35 H	169	37.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

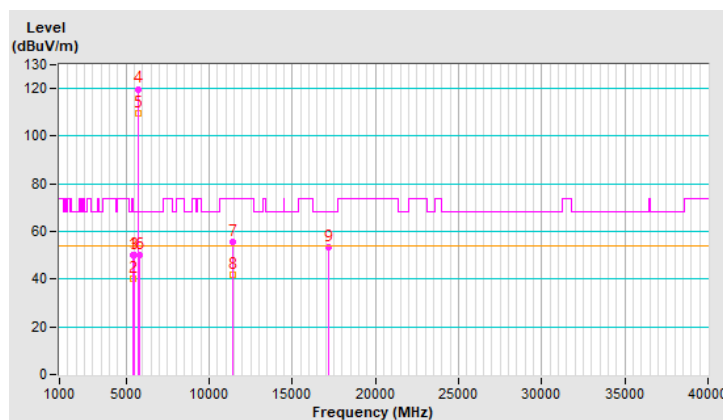


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.1 PK	74.0	-22.9	3.12 V	116	49.3	1.8
2	5460.00	38.8 AV	54.0	-15.2	3.12 V	116	37.0	1.8
3	#5470.00	50.2 PK	68.2	-18.0	3.12 V	116	48.4	1.8
4	*5720.00	107.6 PK			3.12 V	116	105.5	2.1
5	*5720.00	97.9 AV			3.12 V	116	95.8	2.1
6	#5850.00	49.6 PK	68.2	-18.6	3.12 V	116	47.3	2.3
7	11440.00	51.7 PK	74.0	-22.3	3.50 V	81	39.0	12.7
8	11440.00	38.0 AV	54.0	-16.0	3.50 V	81	25.3	12.7
9	#17160.00	49.8 PK	68.2	-18.4	3.15 V	95	33.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

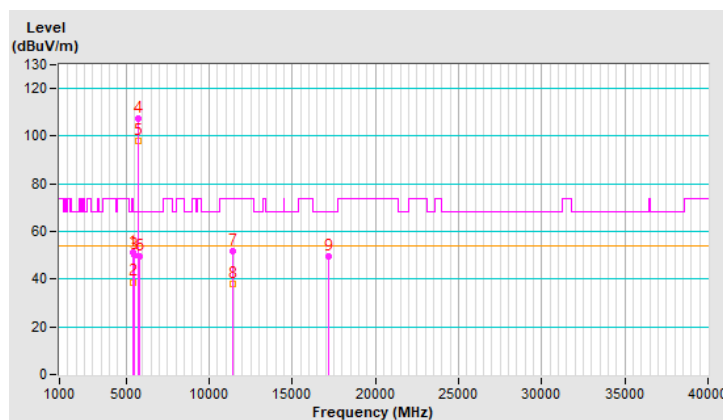


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5581.79	51.7 PK	68.2	-16.5	3.13 H	160	49.9	1.8
2	*5745.00	116.9 PK			3.13 H	160	114.8	2.1
3	*5745.00	107.5 AV			3.13 H	160	105.4	2.1
4	#5939.39	50.7 PK	68.2	-17.5	3.13 H	160	48.2	2.5
5	11490.00	46.1 PK	74.0	-27.9	1.56 H	271	33.3	12.8
6	11490.00	34.3 AV	54.0	-19.7	1.56 H	271	21.5	12.8
7	#17235.00	46.1 PK	68.2	-22.1	1.50 H	257	29.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

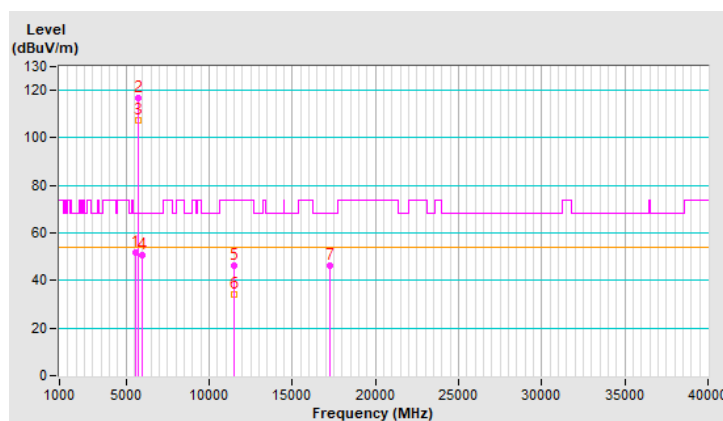


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.23	51.3 PK	68.2	-16.9	3.52 V	131	49.4	1.9
2	*5745.00	109.7 PK			3.52 V	131	107.6	2.1
3	*5745.00	99.8 AV			3.52 V	131	97.7	2.1
4	#5973.39	50.5 PK	68.2	-17.7	3.52 V	131	47.9	2.6
5	11490.00	43.2 PK	74.0	-30.8	3.42 V	99	30.4	12.8
6	11490.00	31.1 AV	54.0	-22.9	3.42 V	99	18.3	12.8
7	#17235.00	42.4 PK	68.2	-25.8	3.41 V	81	25.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

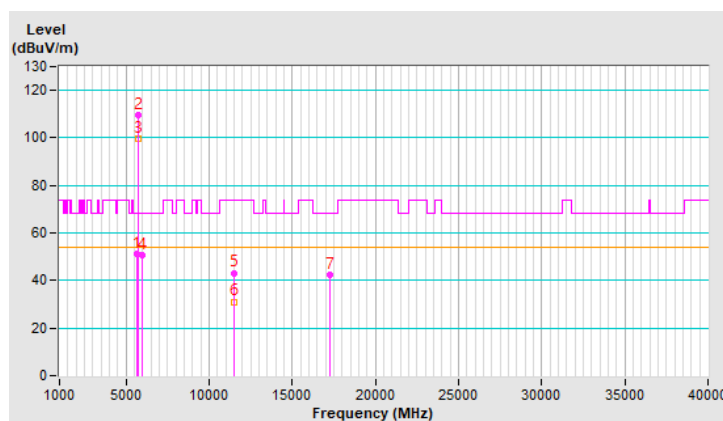


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5577.11	50.6 PK	68.2	-17.6	3.14 H	161	48.8	1.8
2	*5785.00	118.2 PK			3.14 H	161	116.0	2.2
3	*5785.00	110.6 AV			3.14 H	161	108.4	2.2
4	#5979.48	51.7 PK	68.2	-16.5	3.14 H	161	49.1	2.6
5	11570.00	60.9 PK	74.0	-13.1	2.49 H	166	48.2	12.7
6	11570.00	49.1 AV	54.0	-4.9	2.49 H	166	36.4	12.7
7	#17355.00	60.6 PK	68.2	-7.6	1.42 H	157	43.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

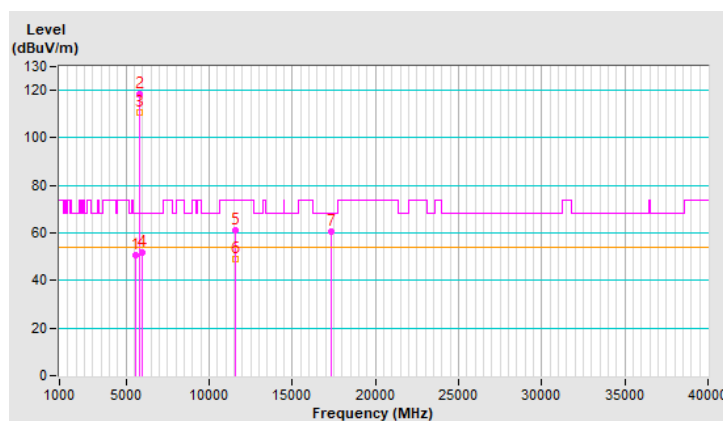


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.62	50.5 PK	68.2	-17.7	3.39 V	145	48.6	1.9
2	*5785.00	109.3 PK			3.39 V	145	107.1	2.2
3	*5785.00	99.2 AV			3.39 V	145	97.0	2.2
4	#5954.74	50.6 PK	68.2	-17.6	3.39 V	145	48.0	2.6
5	11570.00	55.9 PK	74.0	-18.1	3.30 V	73	43.2	12.7
6	11570.00	41.9 AV	54.0	-12.1	3.30 V	73	29.2	12.7
7	#17355.00	57.8 PK	68.2	-10.4	3.40 V	57	40.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

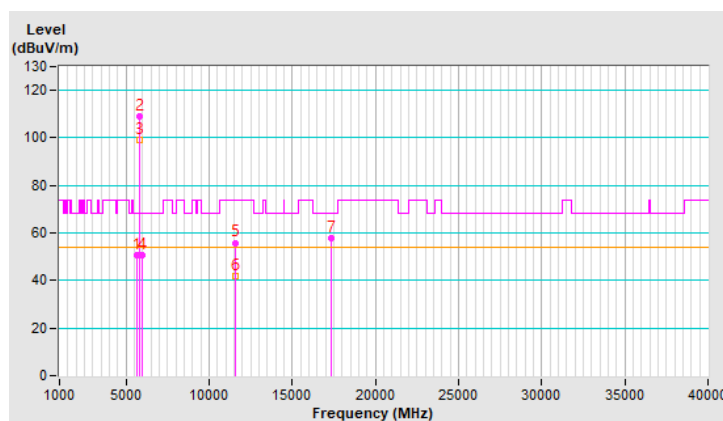


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5566.13	50.3 PK	68.2	-17.9	3.26 H	151	48.5	1.8
2	*5825.00	117.7 PK			3.26 H	151	115.4	2.3
3	*5825.00	108.2 AV			3.26 H	151	105.9	2.3
4	#5981.37	50.7 PK	68.2	-17.5	3.26 H	151	48.1	2.6
5	11650.00	62.3 PK	74.0	-11.7	3.85 H	167	49.8	12.5
6	11650.00	47.5 AV	54.0	-6.5	3.85 H	167	35.0	12.5
7	#17475.00	61.7 PK	68.2	-6.5	2.22 H	193	43.0	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

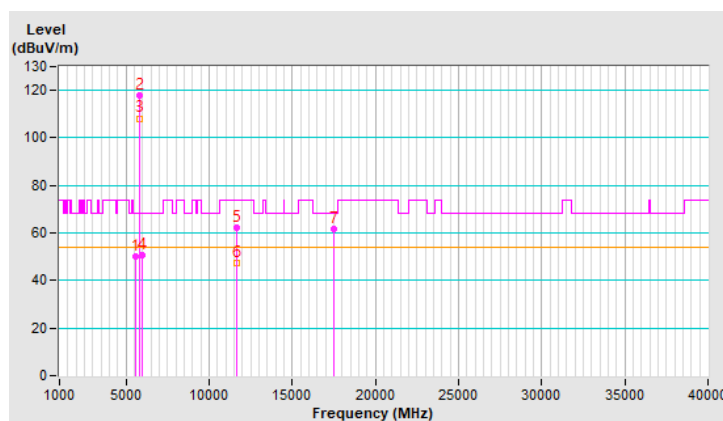


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5571.30	50.2 PK	68.2	-18.0	3.52 V	126	48.4	1.8
2	*5825.00	109.1 PK			3.52 V	126	106.8	2.3
3	*5825.00	99.6 AV			3.52 V	126	97.3	2.3
4	#5947.87	51.4 PK	68.2	-16.8	3.52 V	126	48.8	2.6
5	11650.00	57.1 PK	74.0	-16.9	3.55 V	73	44.6	12.5
6	11650.00	42.3 AV	54.0	-11.7	3.55 V	73	29.8	12.5
7	#17475.00	59.8 PK	68.2	-8.4	3.45 V	108	41.1	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

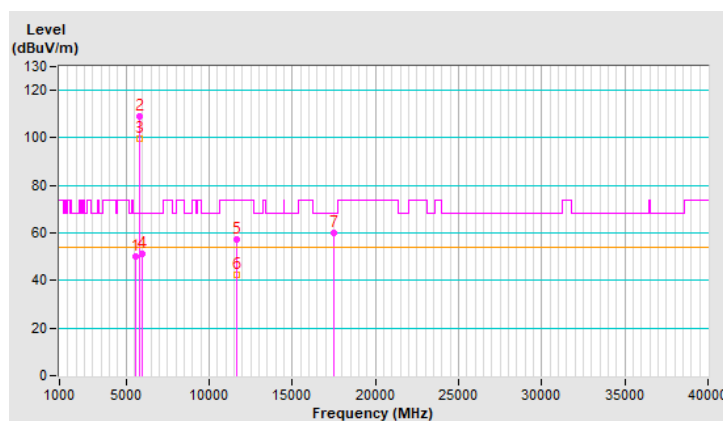


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	3.20 H	155	70.0	2.0
2	5150.00	45.7 AV	54.0	-8.3	3.20 H	155	43.7	2.0
3	*5180.00	118.6 PK			3.20 H	155	116.7	1.9
4	*5180.00	107.6 AV			3.20 H	155	105.7	1.9
5	#10360.00	58.2 PK	68.2	-10.0	1.49 H	161	46.6	11.6
6	15540.00	47.4 PK	74.0	-26.6	2.68 H	96	35.6	11.8
7	15540.00	36.0 AV	54.0	-18.0	2.68 H	96	24.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

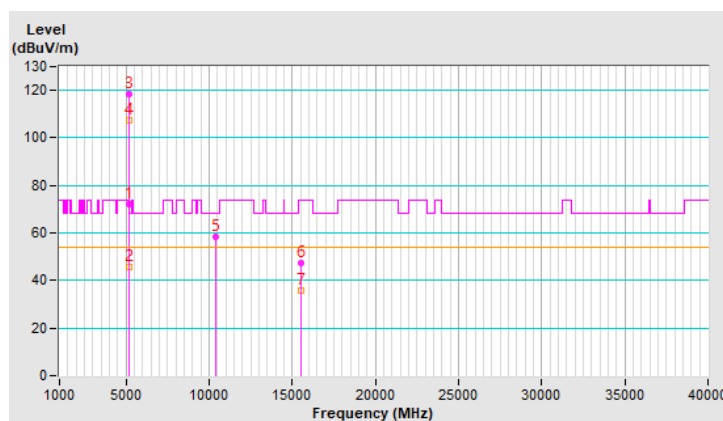


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	3.58 V	125	63.4	2.0
2	5150.00	41.0 AV	54.0	-13.0	3.58 V	125	39.0	2.0
3	*5180.00	108.0 PK			3.58 V	125	106.1	1.9
4	*5180.00	97.7 AV			3.58 V	125	95.8	1.9
5	#10360.00	54.3 PK	68.2	-13.9	3.32 V	79	42.7	11.6
6	15540.00	45.3 PK	74.0	-28.7	3.36 V	75	33.5	11.8
7	15540.00	33.8 AV	54.0	-20.2	3.36 V	75	22.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

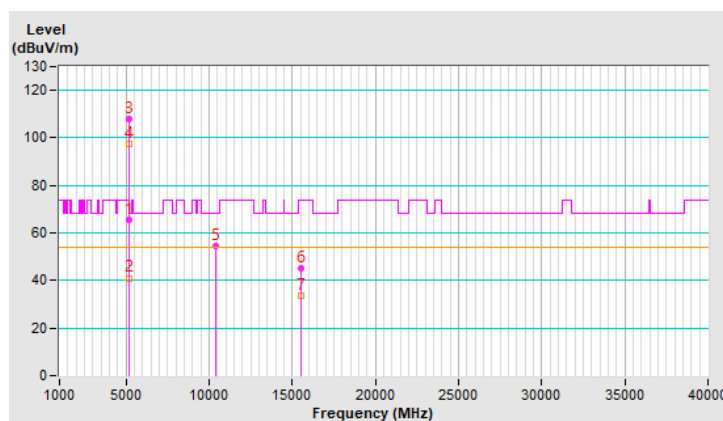


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	121.2 PK			3.34 H	183	119.4	1.8
2	*5200.00	111.8 AV			3.34 H	183	110.0	1.8
3	#10400.00	61.2 PK	68.2	-7.0	1.54 H	150	49.4	11.8
4	15600.00	53.5 PK	74.0	-20.5	2.66 H	61	41.8	11.7
5	15600.00	39.1 AV	54.0	-14.9	2.66 H	61	27.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

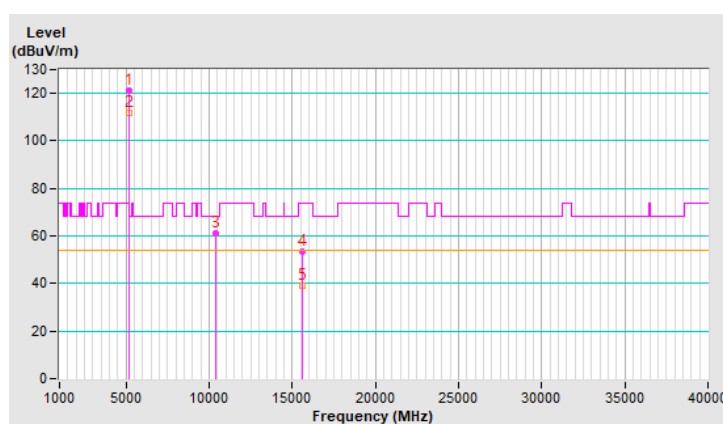


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	109.5 PK			3.45 V	159	107.7	1.8
2	*5200.00	99.3 AV			3.45 V	159	97.5	1.8
3	#10400.00	57.7 PK	68.2	-10.5	3.27 V	98	45.9	11.8
4	15600.00	48.5 PK	74.0	-25.5	3.34 V	116	36.8	11.7
5	15600.00	34.7 AV	54.0	-19.3	3.34 V	116	23.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

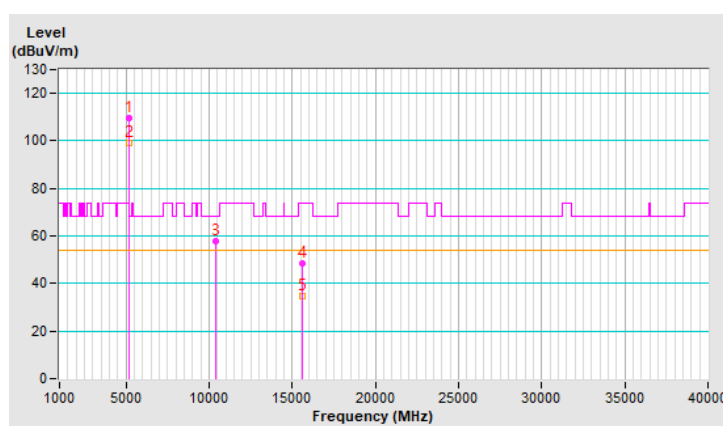


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.6 PK			3.49 H	134	117.9	1.7
2	*5240.00	110.1 AV			3.49 H	134	108.4	1.7
3	5350.00	49.9 PK	74.0	-24.1	3.49 H	134	48.2	1.7
4	5350.00	37.6 AV	54.0	-16.4	3.49 H	134	35.9	1.7
5	#10480.00	58.8 PK	68.2	-9.4	1.65 H	142	47.0	11.8
6	15720.00	52.3 PK	74.0	-21.7	2.40 H	14	40.7	11.6
7	15720.00	39.0 AV	54.0	-15.0	2.40 H	14	27.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

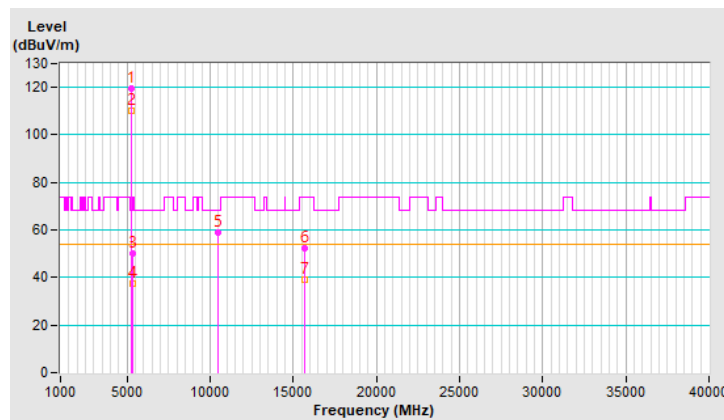


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	109.1 PK			3.49 V	173	107.4	1.7
2	*5240.00	99.6 AV			3.49 V	173	97.9	1.7
3	5350.00	50.9 PK	74.0	-23.1	3.49 V	173	49.2	1.7
4	5350.00	38.0 AV	54.0	-16.0	3.49 V	173	36.3	1.7
5	#10480.00	56.7 PK	68.2	-11.5	3.48 V	49	44.9	11.8
6	15720.00	48.1 PK	74.0	-25.9	3.48 V	81	36.5	11.6
7	15720.00	34.6 AV	54.0	-19.4	3.48 V	81	23.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

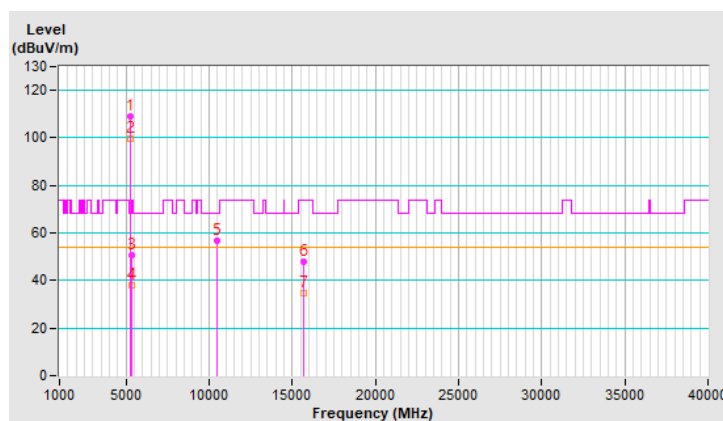

RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.0 PK	74.0	-24.0	3.20 H	138	48.0	2.0
2	5150.00	37.8 AV	54.0	-16.2	3.20 H	138	35.8	2.0
3	*5260.00	118.5 PK			3.20 H	138	117.0	1.5
4	*5260.00	108.4 AV			3.20 H	138	106.9	1.5
5	#10520.00	61.5 PK	68.2	-6.7	1.59 H	160	49.8	11.7
6	15780.00	50.9 PK	74.0	-23.1	2.48 H	58	39.6	11.3
7	15780.00	37.4 AV	54.0	-16.6	2.48 H	58	26.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

