

FCC TEST REPORT

Test report
On Behalf of
Shenzhen Zidoo Technology Co.,Ltd
For
SMART TV BOX
Model No.: X9, X9 II

FCC ID: 2AGN7-X9

Prepared for : Shenzhen Zidoo Technology Co.,Ltd

Central Avenue building A m, Unit 12D Xixiang Ave,BaoAn District,Shenzhen.

Prepared By : WST Certification & Testing (HK) Limited

12/F., San Toi Building,137-139 Connaught Road Central,HongKong

Date of Test: Mar. 13, 2016 ~ Mar. 22, 2016

Date of Report: Mar. 22, 2016

Report Number: WST160303017-E

TEST RESULT CERTIFICATION**Applicant's name** Shenzhen Zidoo Technology Co.,Ltd

Address Central Avenue building A m, Unit 12D Xixiang Ave,BaoAn District,Shenzhen.

Manufacture's Name Shenzhen Zidoo Technology Co.,Ltd

Address Central Avenue building A m, Unit 12D Xixiang Ave,BaoAn District,Shenzhen.

Product description

Trade Mark: ZIDOO

Product name..... SMART TV BOX

Model and/ X9, X9 II

or type reference

Standards FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the WST Certification & Testing (HK) Limited is acknowledged as copyright owner and source of the material. WST Certification & Testing (HK) Limited takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of TestDate (s) of performance of tests **Mar. 13, 2016 ~ Mar. 22, 2016**Date of Issue..... **Mar. 22, 2016**Test Result..... **Pass**

Testing Engineer :



(Eric Xie)

Technical Manager :



(Dora Qin)

Authorized Signatory :



(Kait Chen)

Table of Contents	Page
1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 General description of EUT	7
2.2 Carrier frequency of channels	8
2.3 Operation of EUT during testing	8
2.4 Description of test setup	9
2.5 Measurement instruments list	10
3 . 6DB BANDWIDTH MEASUREMENT	12
3.1 Block diagram of test setup	12
3.2 Limit	12
3.3 Block diagram of test setup	12
3.4 Test result	12
4 . MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER	20
4.1 Block diagram of test setup	20
4.2 Limits	20
4.3 Test procedure	20
4.4 Test result	20
5 . POWER SPECTRAL DENSITY TEST	26
5.1 Block diagram of test setup	26
5.2 Limits	26
5.3 Test procedure	26
5.4 Test result	26
6 . BAND EDGE COMPLIANCE TEST	32
6.1 Block diagram of test setup	32
6.2 Limits	32
6.3 Test procedure	32
6.4 Test result	32
7 . RADIATED SPURIOUS EMISSION TEST	39
7.1 Block diagram of test setup	39

Table of Contents	Page
7.2 Limits	40
7.3 Restricted bands of operation	40
7.4 Test procedure	40
7.5 Test result	41
8 . CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	46
8.1 Block diagram of test setup	46
8.2 Limits	46
8.3 Test procedure	46
8.4 Test Result	46
9 . AC POWER LINE CONDUCTED EMISSION	48
9.1 Block diagram of test setup	48
9.2 Limits	48
9.3 Test procedure	48
9.4 Test Result	48
10 . ANTENNA REQUIREMENT	50
11 . POTOGRAPH OF TEST	51
11.1 Radiated Emission	51
11.2 Conducted Emission	53

1. TEST SUMMARY

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209)	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

1.1 TEST FACILITY

Test Firm : Shenzhen WST Testing Technology Co., Ltd.
Certificated by FCC, Registration No.: 939433
Address : 1F, No.9 Building, TGK Science & Technology Park, Yangtian Rd.,
NO.72 Bao'an Dist., Shenzhen, Guangdong, China. 518101
Tel : (86)755-33916437
Fax : (86)755-27822175

1.2 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2. GENERAL INFORMATION

2.1 General description of EUT

Equipment	SMART TV BOX
Model Name	X9, X9 II
Serial No	N/A
FCC ID	2AGN7-X9
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: X9
Modulation Type	WIFI:DBPSK,DQPSK,CCK,BPSK,
Antenna Type	External antenna
WLAN Operation frequency	802.11b: 2412-2462MHz 802.11g: 2412-2462MHz 802.11n HT20: 2412-2462MHz 802.11n HT40: 2422-2452MHz
Number of Channels	802.11b/g/n (HT20):11 802.11n (HT40): 7
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Modulation Type	CCK, OFDM
Power Source	DC Voltage
Power Rating	DC 12V from adapter Input: AC 100-240V ,1.5A, 50/60Hz, Output: DC12V ,2A
Adapter Model	CS-1202000

2.2 Carrier frequency of channels

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

2.3 Operation of EUT during testing

Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11n (HT20) Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz


802.11n (HT40) Transmitting mode

Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

2.4 Description of test setup




2.5 Measurement instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 17, 2015	1 Year
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 19, 2015	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
10.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
15.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	May 26, 2015	1 Year
19.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	May 26, 2015	1 Year
20.	Harmonic and Flicker Test Software AC 2000A	LAPLACE	N/A	N/A	N/A	N/A
21.	ESD Simulators	KIKUSUI	KES4021	LJ003477	May 25, 2015	1 Year
22.	EFT Generator	EMPEK	EFT-4040B	0430928N	May 19, 2015	1 Year
23.	Shielding Room	ChangZhou ZhongYu	JB88	SEL0166	May 19, 2015	1 Year
24.	Signal Generator 9KHz~2.2GHz	R&S	SML02	SEL0143	May 19, 2015	1 Year
25.	Signal Generator 9KHz~1.1GHz	R&S	SML01	SEL0135	May 19, 2015	1 Year
26.	Power Meter	R&S	NRVS	SEL0144	May 19, 2015	1 Year
27.	RF Level Meter		URV35	SEL0137	May 19, 2015	1 Year
28.	Audio Analyzer	R&S	UPL	SEL0136	May 19, 2015	1 Year

29.	RF-Amplifier 150KHz~150MHz	BONN Elektronik	BSA1515-25	SEL0157	May 19, 2015	1 Year
30.	Stripline Test Cell	Erika Fiedler	VDE0872	SEL0167	N/A	N/A
31.	TV Test Transmitter	R&S	SFM	SEL0159	May 17, 2015	1 Year
32.	TV Generator PAL	R&S	SGPF	SEL0138	May 19, 2015	1 Year
33.	TV Generator Ntsc	R&S	SGMF	SEL0140	May 19, 2015	1 Year
34.	TV Generator Secam	R&S	SGSF	SEL0139	May 19, 2015	1 Year
35.	TV Test Transmitter 0.3MHz~3300MHz	R&S	SFQ	SEL0142	May 19, 2015	1 Year
36.	MPEG2 Measurement Generator	R&S	DVG	SEL0141	May 19, 2015	1 Year
37.	Spectrum Analyzer	R&S	FSP	SEL0177	May 19, 2015	1 Year
38.	Matching	R&S	RAM	SEL0146	N/A	N/A
39.	Matching	R&S	RAM	SEL0148	N/A	N/A
40.	Absorbing Clamp	R&S	MDS21	SEL0158	May 17, 2015	1 Year
41.	Coupling Set	Erika Fiedler	Rco, Rci, MC, AC, LC	SEL0149	N/A	N/A
42.	Filters	Erika Fiedler	Sr, LBS	SEL0150	N/A	N/A
43.	Matching Network	Erika Fiedler	MN, X9	SEL0151	N/A	N/A
44.	Fully Anechoic Room	ChangZhou ZhongYu	854	SEL0169	Jun. 10, 2015	1 Year
45.	Signal Generator	R&S	SML03	SEL0068	May 17, 2015	1 Year
46.	RF-Amplifier 30M~1GHz	Amplifier Reasearch	250W1000A	SEL0066	Oct. 24, 2015	1 Year
47.	RF-Amplifier 0.8~3.0GHz	Amplifier Reasearch	60S1G3	SEL0065	Oct. 24, 2015	1 Year
48.	Power Meter	R&S	NRVD	SEL0069	May 17, 2015	1 Year
49.	Power Sensor	R&S	URV5-Z2	SEL0071	May 17, 2015	1 Year
50.	Power Sensor	R&S	URV5-Z2	SEL0072	May 17, 2015	1 Year
51.	Software EMC32	R&S	EMC32-S	SEL0082	N/A	N/A
52.	Log-periodic Antenna	Amplifier Reasearch	AX9080	SEL0073	N/A	N/A
53.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	N/A	N/A
54.	High Gain Horn Antenna(0.8-5G Hz)	Amplifier Reasearch	AT4002A	SEL0075	N/A	N/A

3. 6DB BANDWIDTH MEASUREMENT

3.1 Block diagram of test setup



3.2 Limit

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

3.3 Block diagram of test setup

3.3.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

3.3.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz

3.3.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

3.4 Test result

Antenna port 1 is worst

802.11b			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	10.075	>0.5MHz
Middle	2437	10.019	>0.5MHz
High	2462	10.081	>0.5MHz


802.11g			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	16.533	>0.5MHz
Middle	2437	16.446	>0.5MHz
High	2462	16.472	>0.5MHz

802.11n (HT20)			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	17.670	>0.5MHz
Middle	2437	17.193	>0.5MHz
High	2462	17.415	>0.5MHz


802.11n (HT40)			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2422	36.667	>0.5MHz
Middle	2437	36.458	>0.5MHz
High	2452	36.523	>0.5MHz

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz

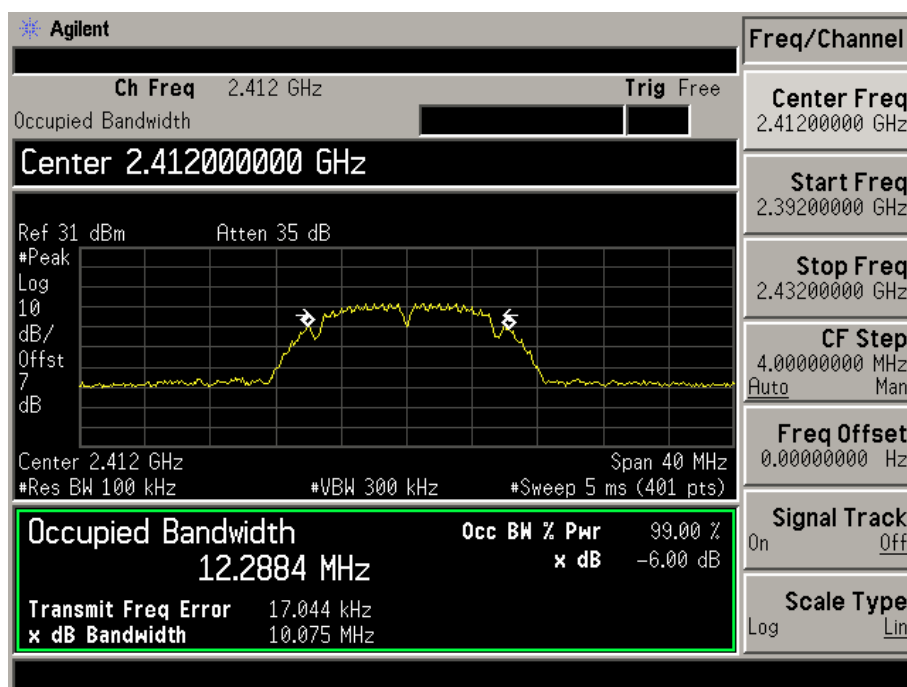


802.11b Channel Middle 2437MHz

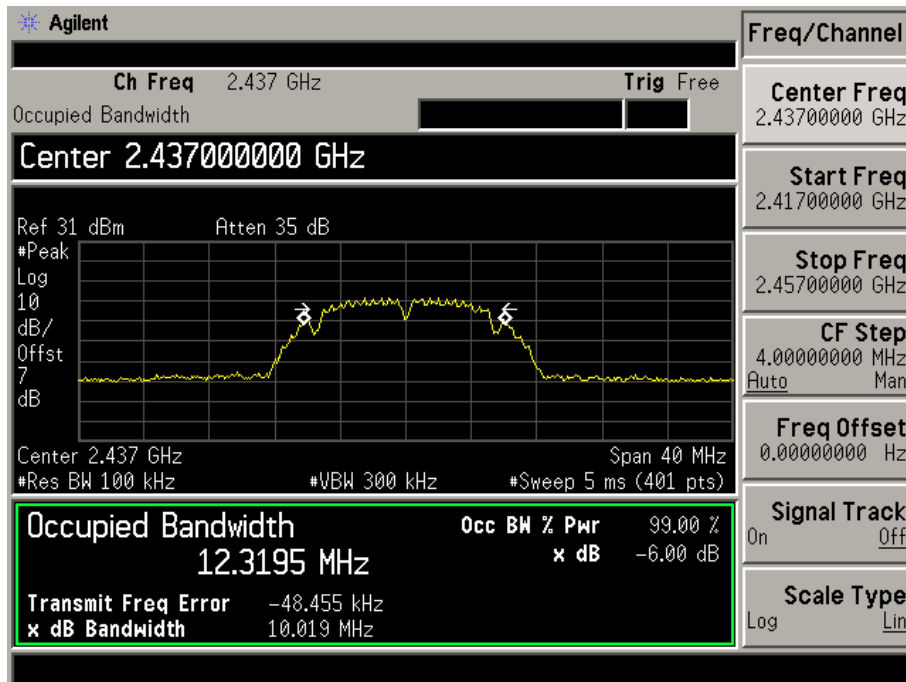


802.11b Channel High 2462MHz

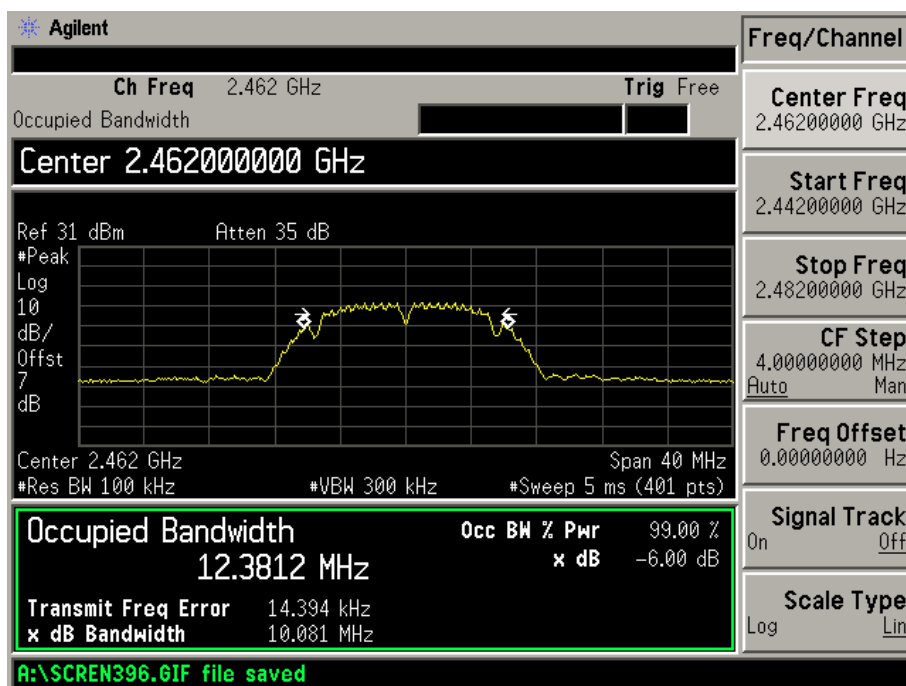


802.11g Channel Low 2412MHz

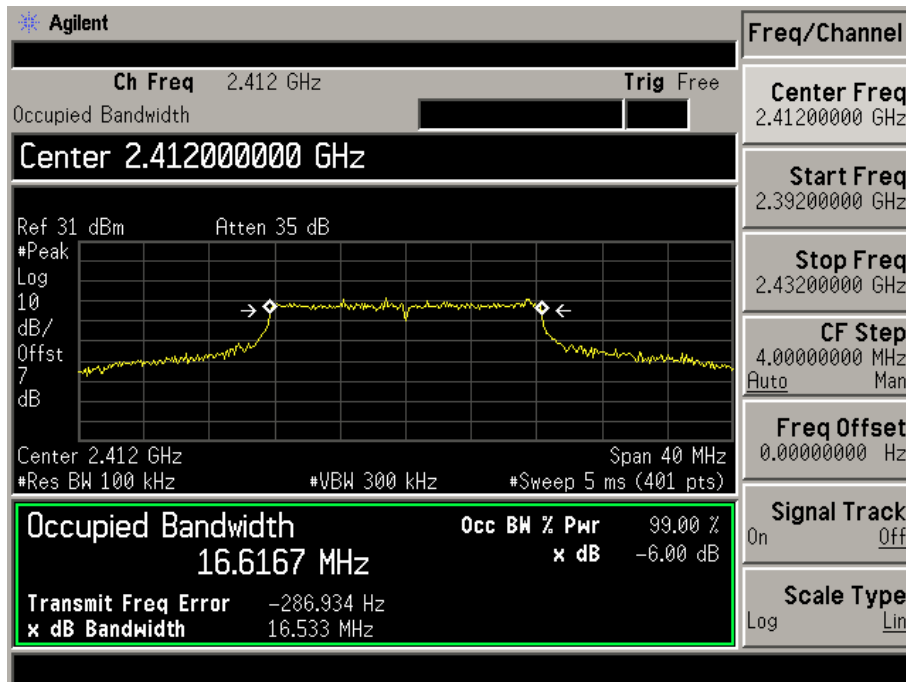


802.11g Channel Middle 2437MHz

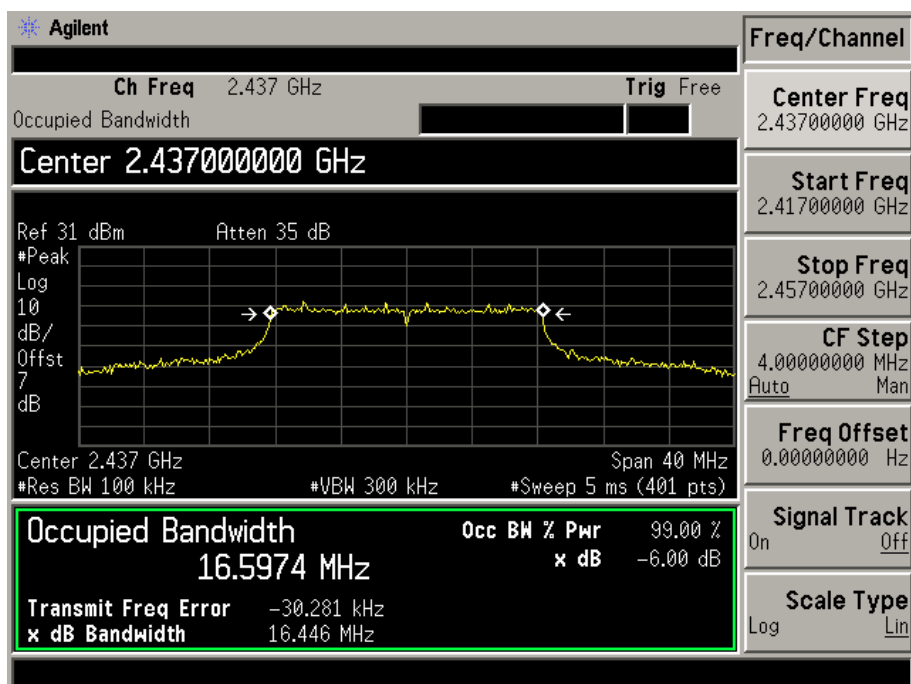


802.11g Channel High 2462MHz

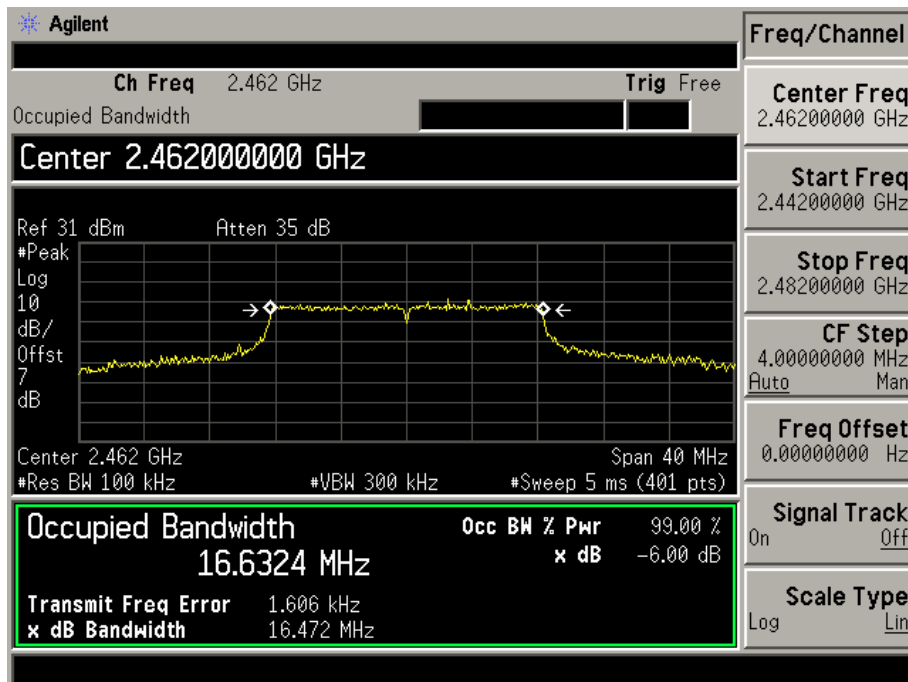


802.11n(HT20) Channel Low 2412MHz

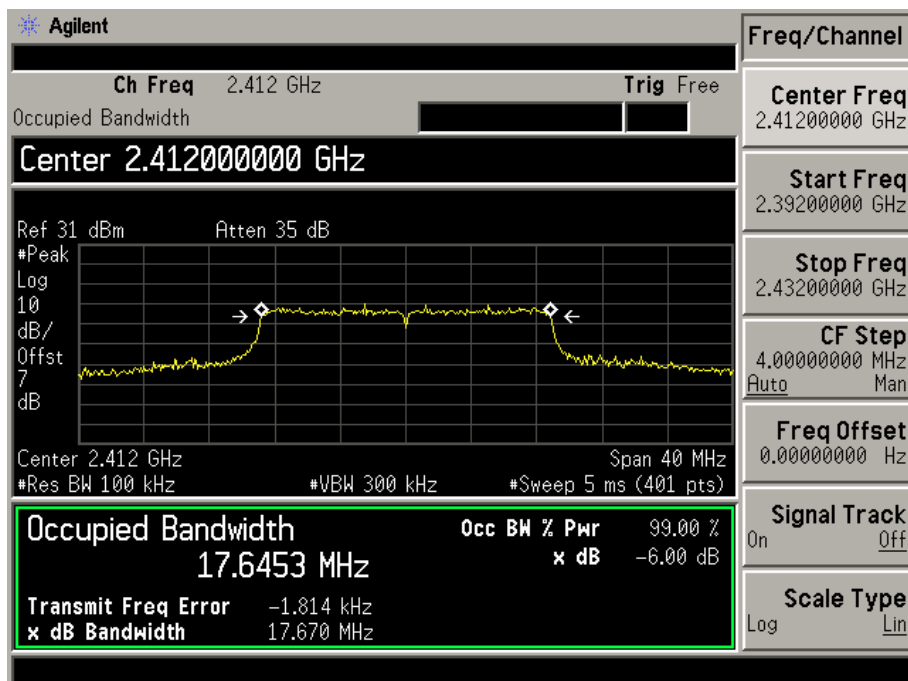


802.11n(HT20) Channel Middle 2437MHz

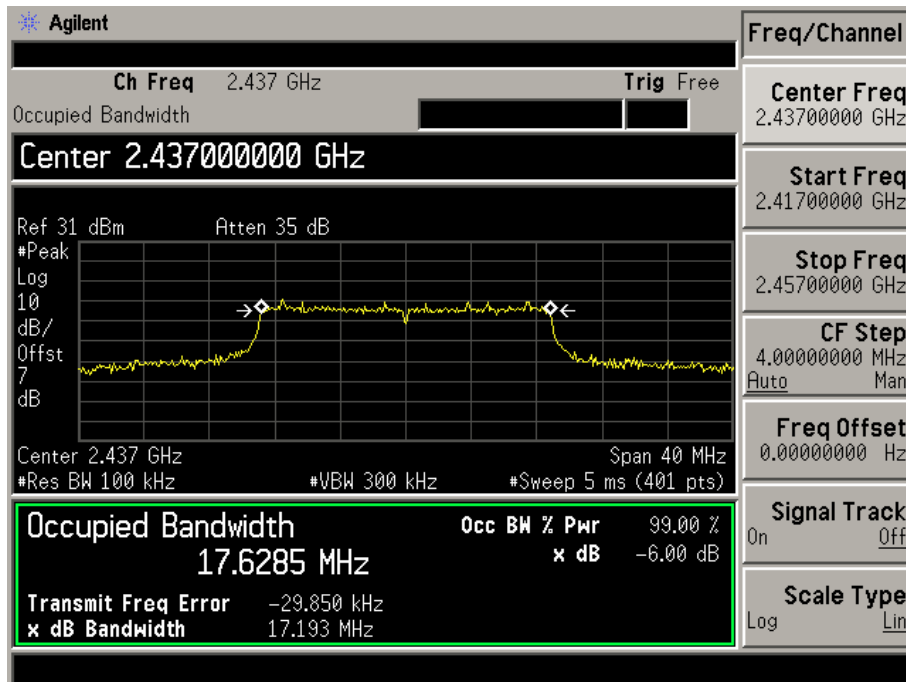


802.11n(HT20) Channel High 2462MHz

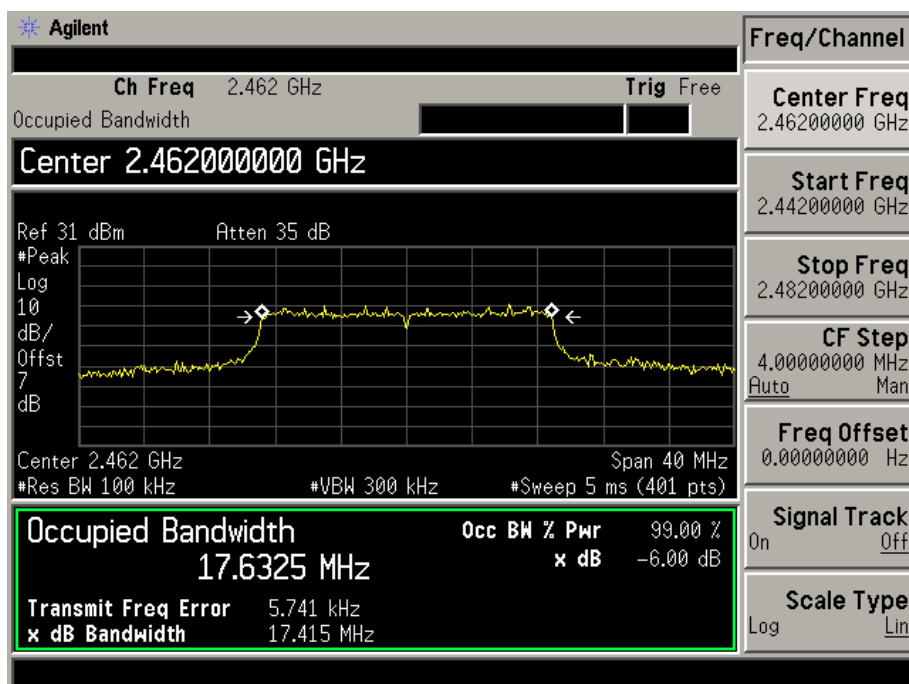


802.11n(HT40) Channel Low 2422MHz

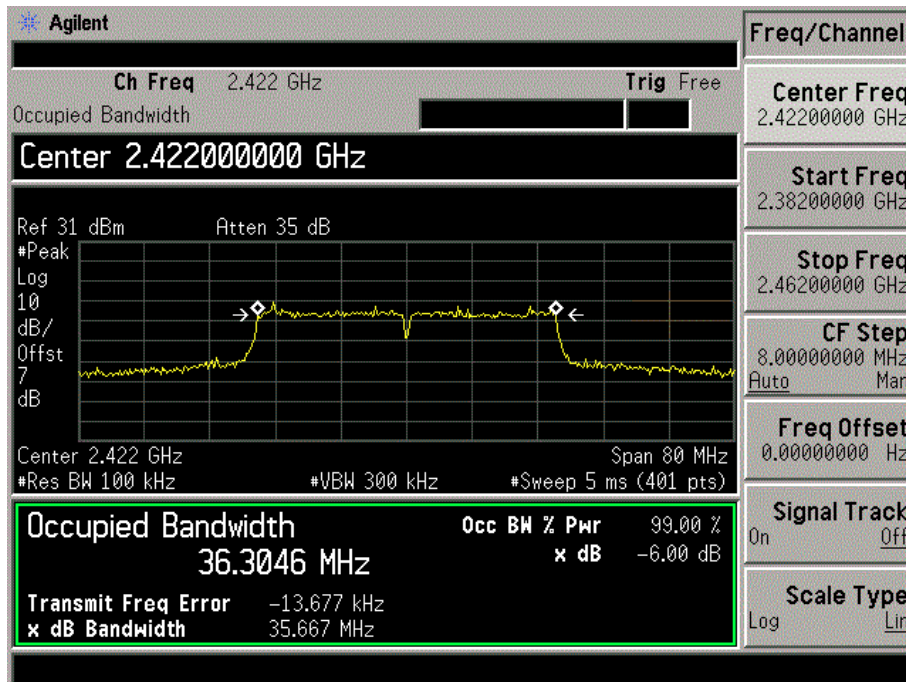

802.11n(HT40) Channel Middle 2437MHz

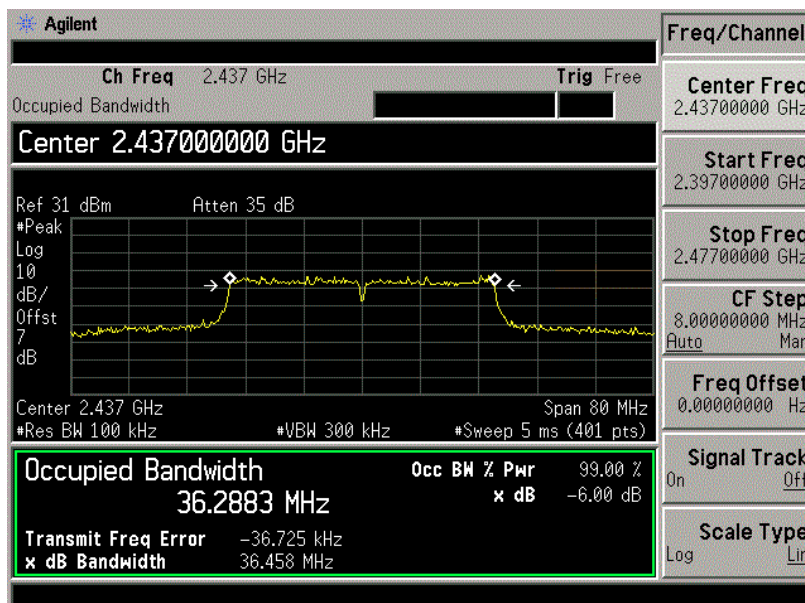


802.11n(HT40) Channel High 2452MHz

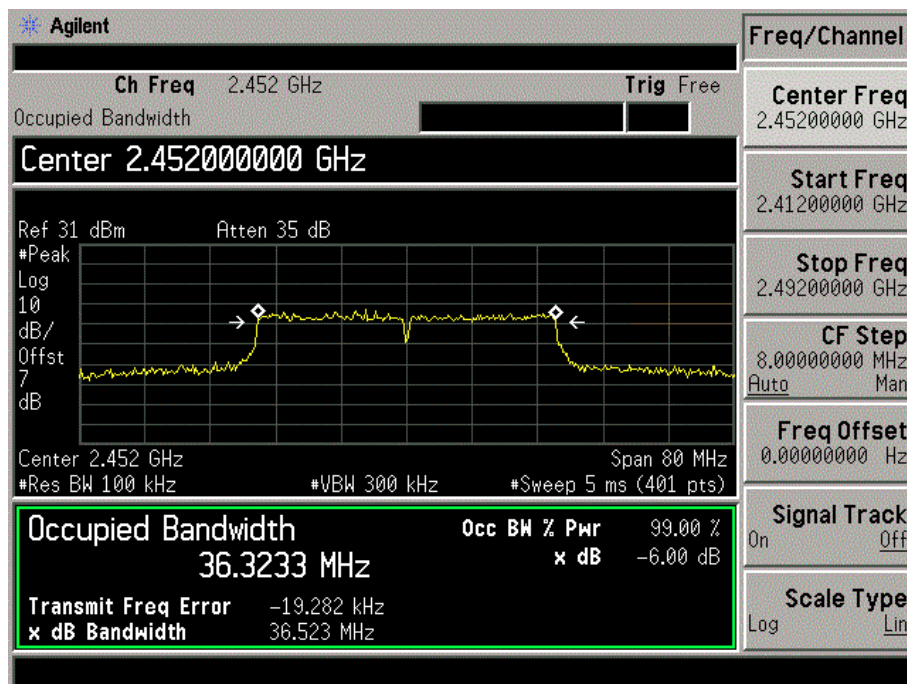

4. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER

4.1 Block diagram of test setup



4.2 Limits

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

4.3 Test procedure

1. According to section 15.247(b)-power output of the KDB NO. 558074 DTS D01 Meas. Guidance v03r04.(channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth
2. Set span to at least 1.5 times the OBW
3. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
4. Set VBW $\geq 3 \times$ RBW
5. Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto
7. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
8. If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run"
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
10. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.4 Test result

Pass







802.11b				
Channel	Frequency (MHz)	Antenna 1 output power(average) (dBm)	Antenna 2 output power(average) (dBm)	Limit (dBm)
Low	2412	15.76	13.31	30
Middle	2437	16.60	13.72	30
High	2462	15.51	14.24	30

802.11g				
Channel	Frequency (MHz)	Antenna 1 output power(average) (dBm)	Antenna 2 output power(average) (dBm)	Limit (dBm)
Low	2412	14.96	9.83	30
Middle	2437	15.24	10.02	30
High	2462	14.71	9.75	30

802.11n HT20					
Channel	Frequency (MHz)	Antenna 1 output power(average) (dBm)	Antenna 2 output power(average) (dBm)	Total output power(average) (dBm)	Limit (dBm)
Low	2412	13.37	9.25	14.78	30
Middle	2437	13.68	9.92	15.20	30
High	2462	13.10	10.27	14.92	30


802.11n HT40					
Channel	Frequency (MHz)	Antenna 1 output power(average) (dBm)	Antenna 2 output power(average) (dBm)	Total output power(average) (dBm)	Limit (dBm)
Low	2422	9.14	8.45	11.81	30
Middle	2437	9.61	8.82	12.24	30
High	2452	9.77	9.21	12.50	30

Pls. refer to the following test plots:

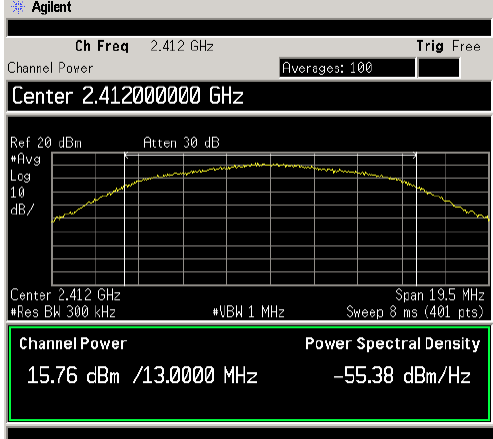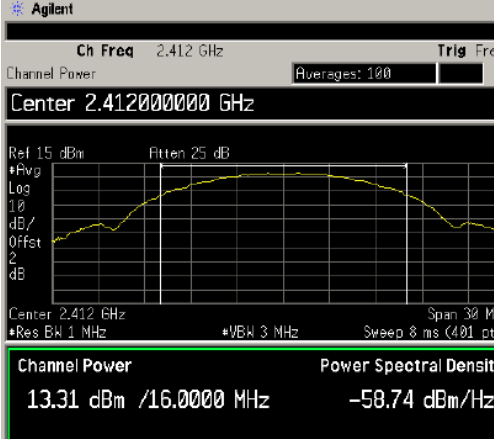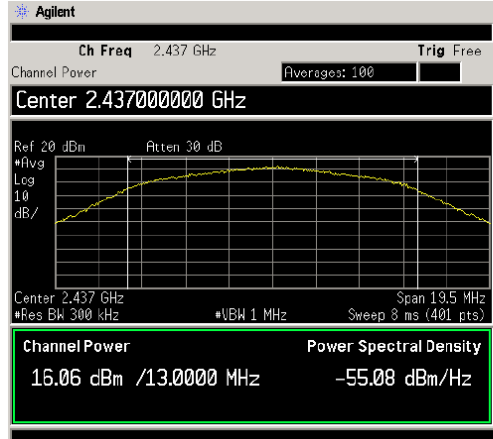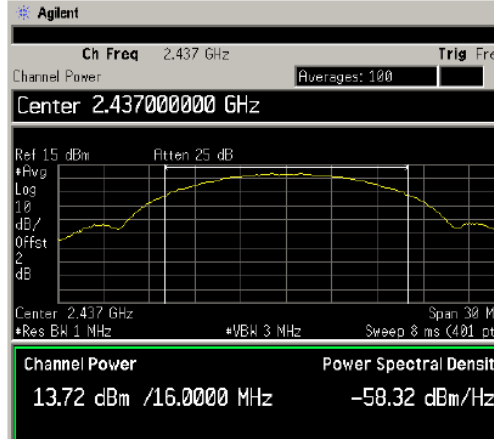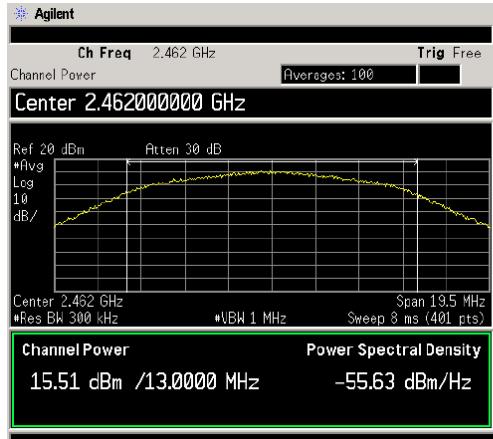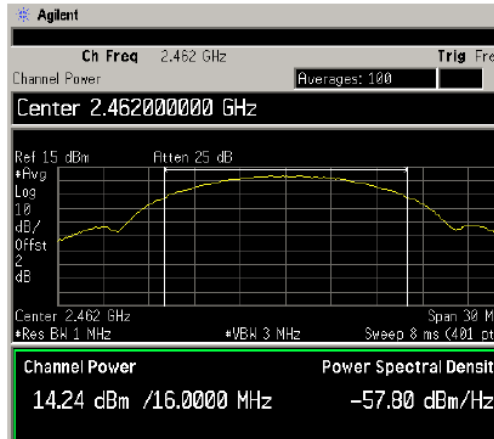Antenna 1	Antenna 2
802.11b Channel Low 2412MHz	802.11b Channel Low 2412MHz
 <p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power Averages: 100</p> <p>Center 2.412000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.412 GHz Span 19.5 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power 15.76 dBm /13.0000 MHz</p> <p>Power Spectral Density -55.38 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40225000 GHz</p> <p>Stop Freq 2.42175000 GHz</p> <p>CF Step 1.95000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	 <p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power Averages: 100</p> <p>Center 2.412000000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power 13.31 dBm /16.0000 MHz</p> <p>Power Spectral Density -58.74 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11b Channel Middle 2437MHz	802.11b Channel Middle 2437MHz
 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power Averages: 100</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.437 GHz Span 19.5 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power 16.06 dBm /13.0000 MHz</p> <p>Power Spectral Density -55.08 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42725000 GHz</p> <p>Stop Freq 2.44675000 GHz</p> <p>CF Step 1.95000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power Averages: 100</p> <p>Center 2.437000000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power 13.72 dBm /16.0000 MHz</p> <p>Power Spectral Density -58.32 dBm/Hz</p> <p>Trace/View</p> <p>1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
802.11b Channel High 2462MHz	802.11b Channel High 2462MHz
 <p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power Averages: 100</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.462 GHz Span 19.5 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power 15.51 dBm /13.0000 MHz</p> <p>Power Spectral Density -55.63 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45225000 GHz</p> <p>Stop Freq 2.47175000 GHz</p> <p>CF Step 1.95000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	 <p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power Averages: 100</p> <p>Center 2.462000000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power 14.24 dBm /16.0000 MHz</p> <p>Power Spectral Density -57.80 dBm/Hz</p> <p>Trace/View</p> <p>1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>


Antenna 1

802.11g Channel Low 2412MHz

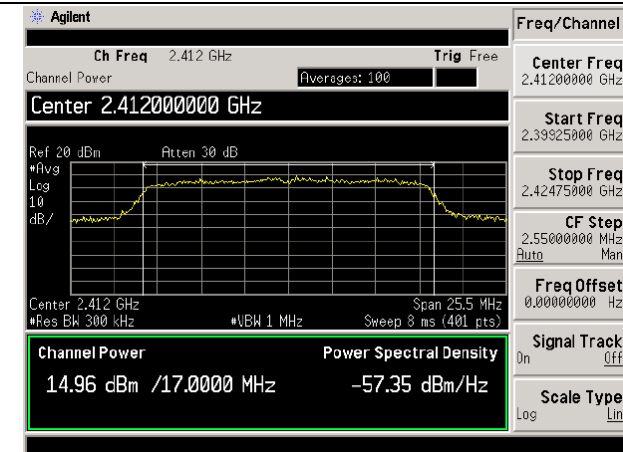


Antenna 2


802.11g Channel Low 2412MHz

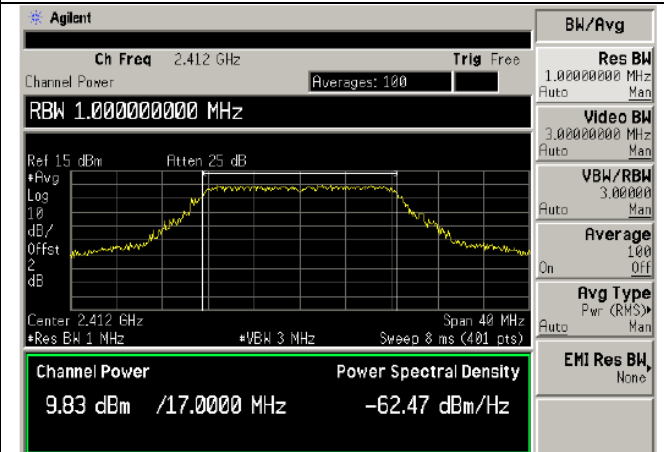


802.11g Channel Middle 2437MHz

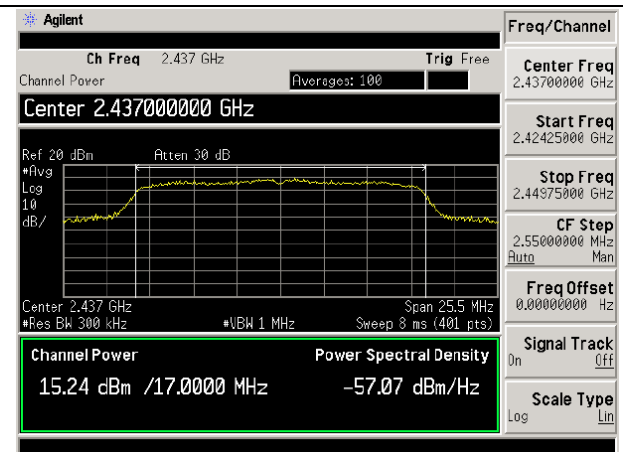


802.11g Channel Middle 2437MHz

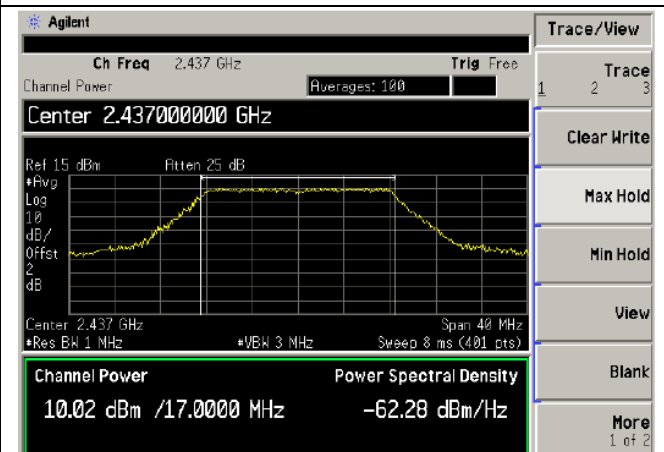

802.11g Channel High 2462MHz

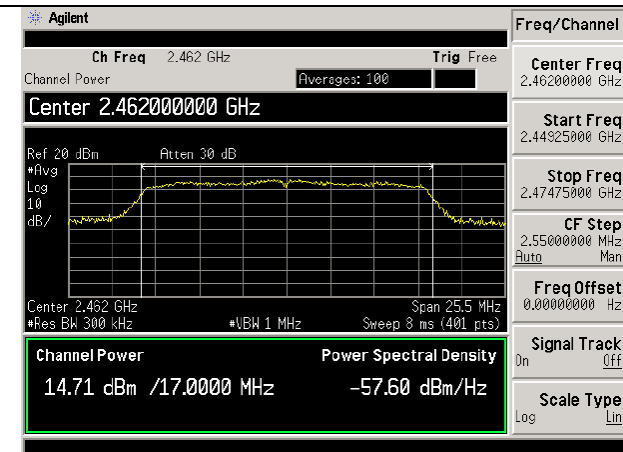


802.11g Channel High 2462MHz

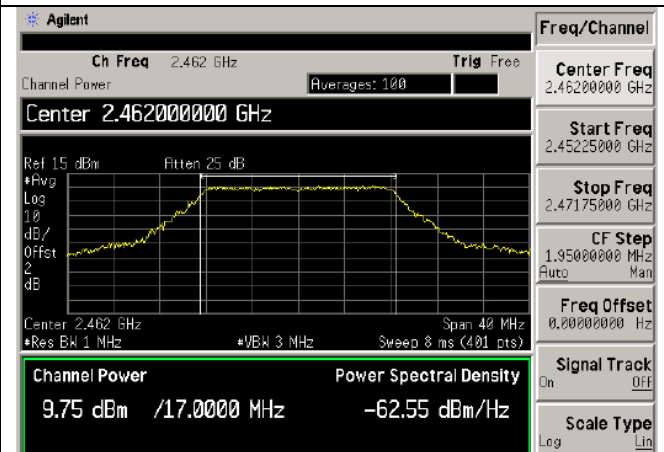


Antenna 1

802.11n HT20 Channel Low 2412MHz

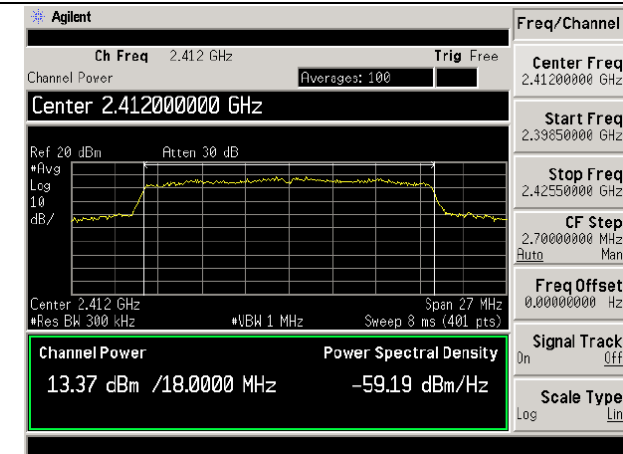


Antenna 2


802.11n HT20 Channel Low 2412MHz

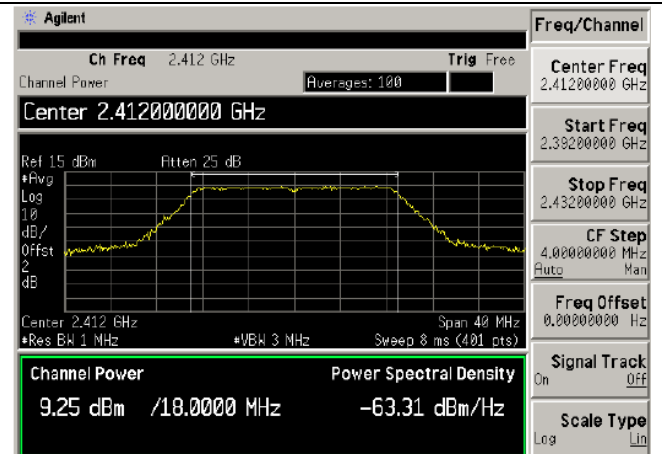


802.11n HT20 Channel Middle 2437MHz

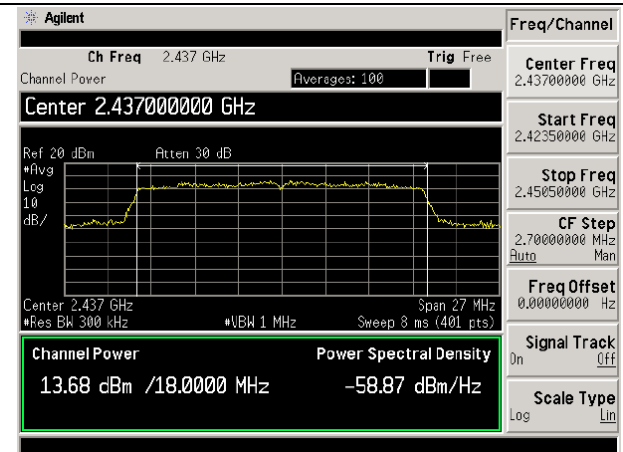


802.11n HT20 Channel Middle 2437MHz

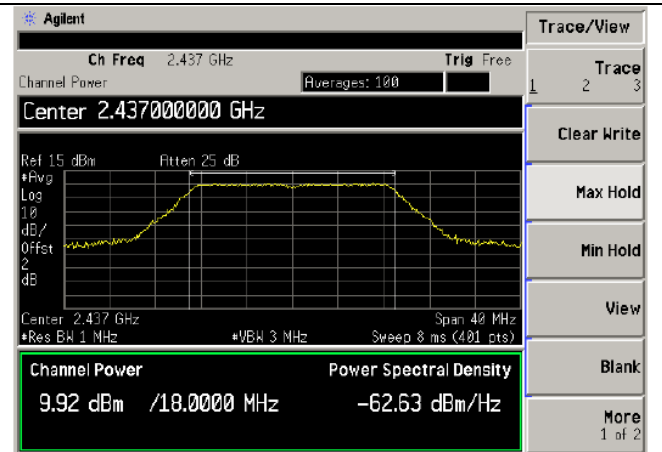

802.11n HT20 Channel High 2462MHz

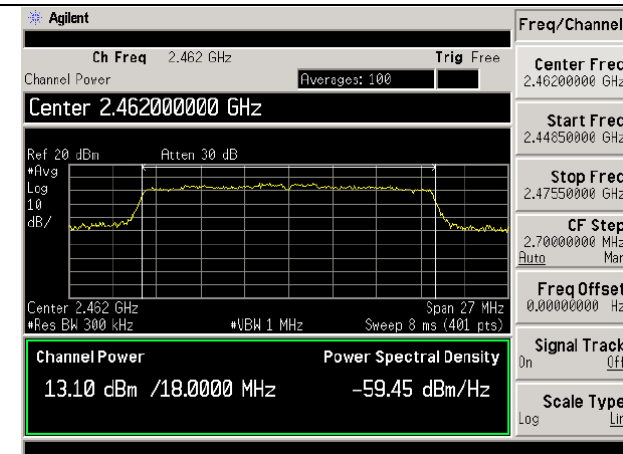


802.11n HT20 Channel High 2462MHz

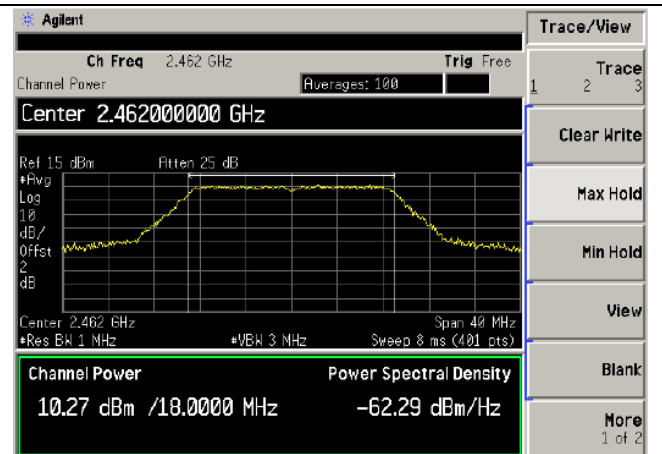


Antenna 1

802.11n HT40 Channel Low 2422MHz

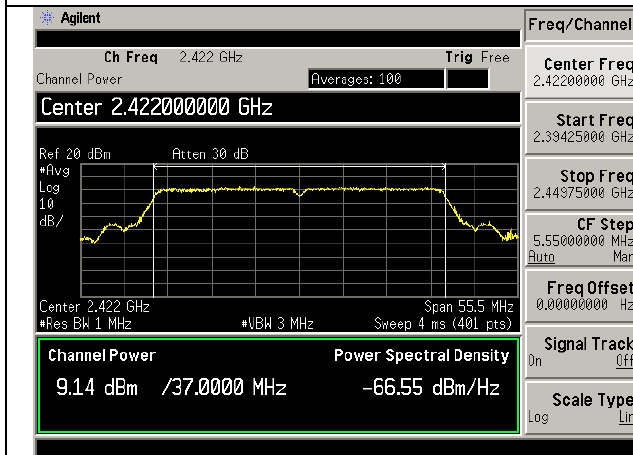


Antenna 2


802.11n HT40 Channel Low 2422MHz

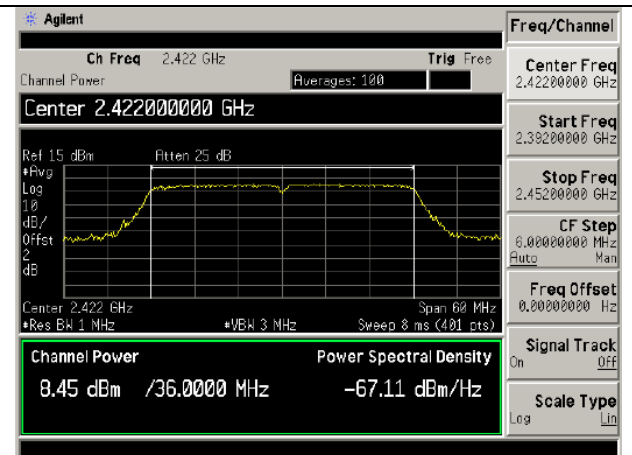


802.11n HT40 Channel Middle 2437MHz

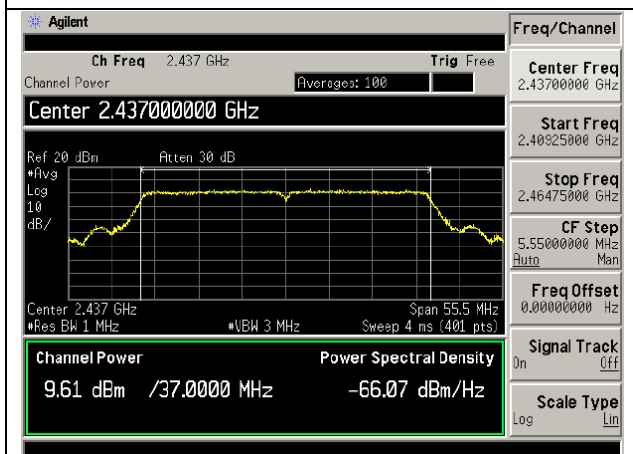


802.11n HT40 Channel Middle 2437MHz

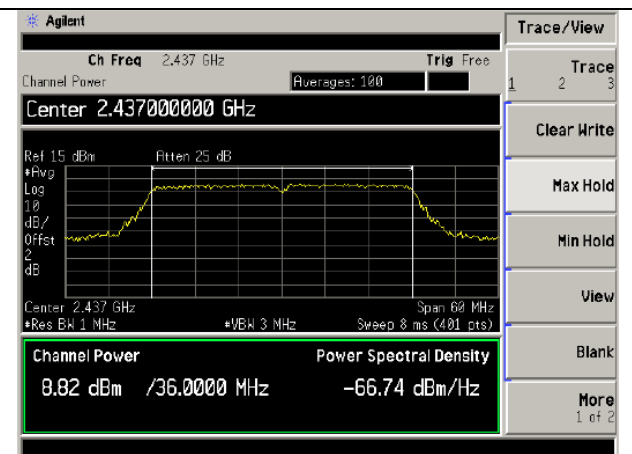

802.11n HT40 Channel High 2452MHz

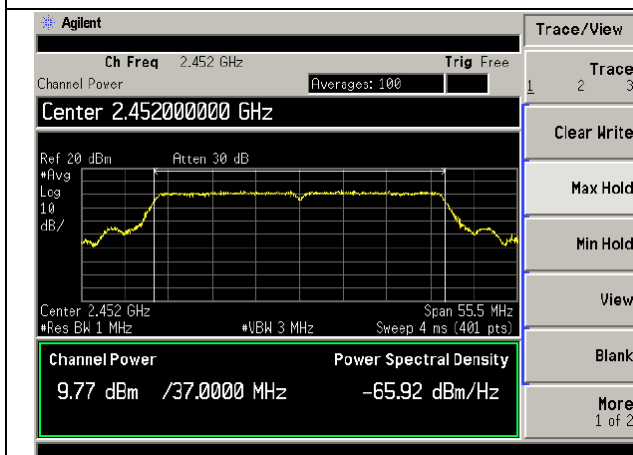


802.11n HT40 Channel High 2452MHz

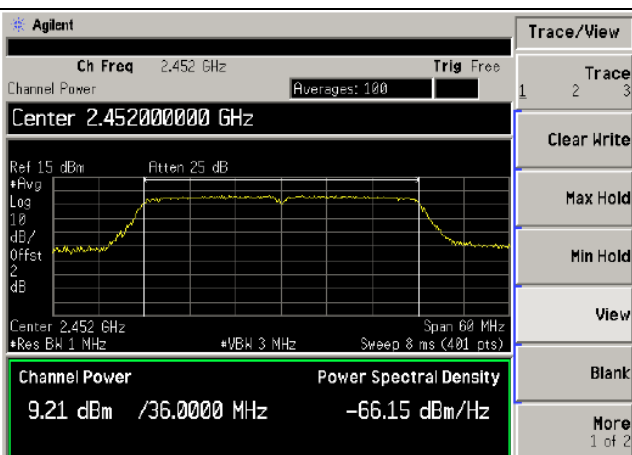

5. POWER SPECTRAL DENSITY TEST

5.1 Block diagram of test setup



5.2 Limits

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3 Test procedure

According to the KDB 558074 D01 DTS Meas Guidance v03r04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = Peak
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

5.4 Test result







Pass







802.11b				
Channel	Frequency (MHz)	Antenna 1 Power Spectral Density (dBm)	Antenna 2 Power Spectral Density (dBm)	Limit (dBm)
Low	2412	4.08	3.92	8
Middle	2437	4.28	3.97	8
High	2462	4.31	4.16	8

802.11g				
Channel	Frequency (MHz)	Antenna 1 Power Spectral Density (dBm)	Antenna 2 Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-1.50	-1.54	8
Middle	2437	-1.47	-1.53	8
High	2462	-1.45	-1.86	8

802.11n HT20					
Channel	Frequency (MHz)	Antenna 1 Power Spectral Density (dBm)	Antenna 2 Power Spectral Density (dBm)	Total Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-1.43	-1.47	1.55	8
Middle	2437	-1.54	-1.48	1.49	8
High	2462	-1.31	-1.73	1.49	8


802.11n HT40					
Channel	Frequency (MHz)	Antenna 1 Power Spectral Density (dBm)	Antenna 2 Power Spectral Density (dBm)	Total Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-7.13	-7.16	-4.20	8
Middle	2437	-6.89	-6.84	-3.87	8
High	2462	-6.64	-6.64	-3.57	8

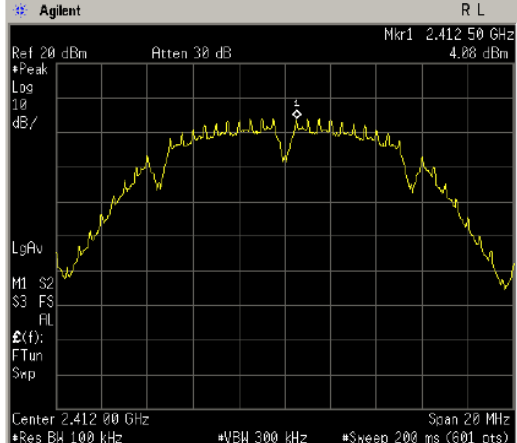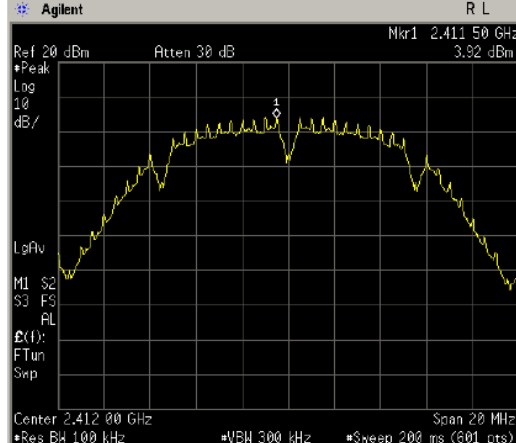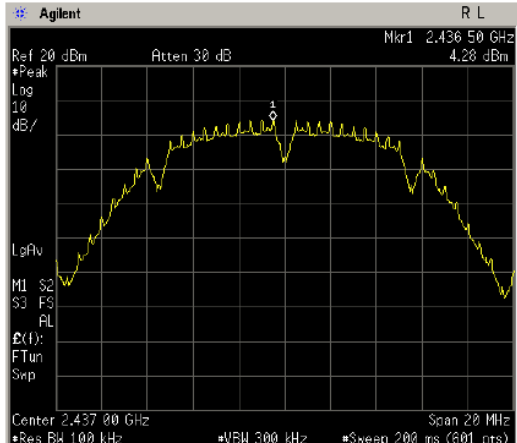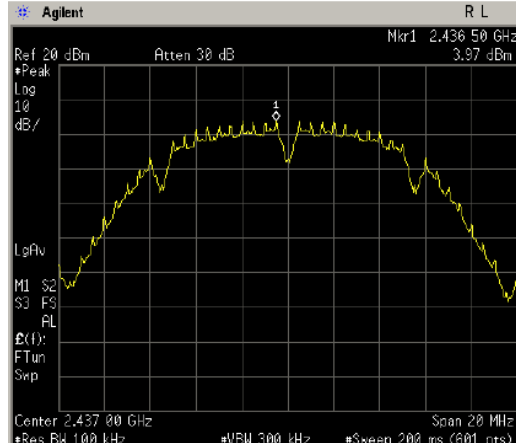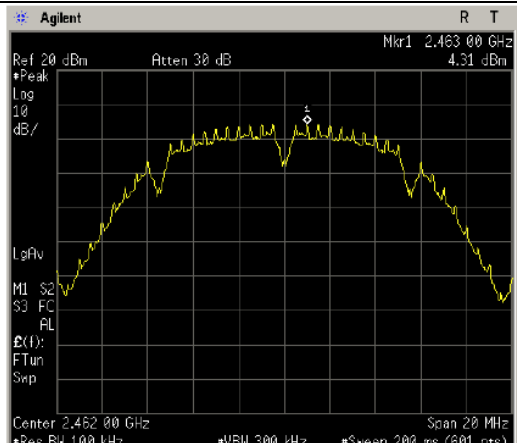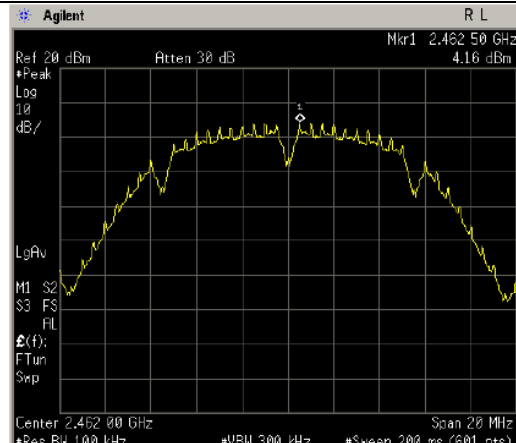Antenna 1	Antenna 2
802.11b Channel Low 2412MHz	802.11b Channel Low 2412MHz
	
802.11b Channel Middle 2437MHz	802.11b Channel Middle 2437MHz
	
802.11b Channel High 2462MHz	802.11b Channel High 2462MHz
	

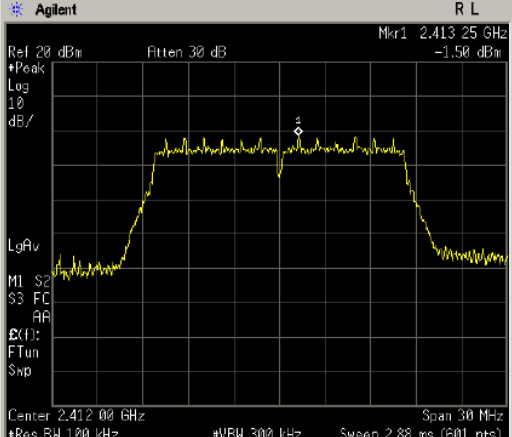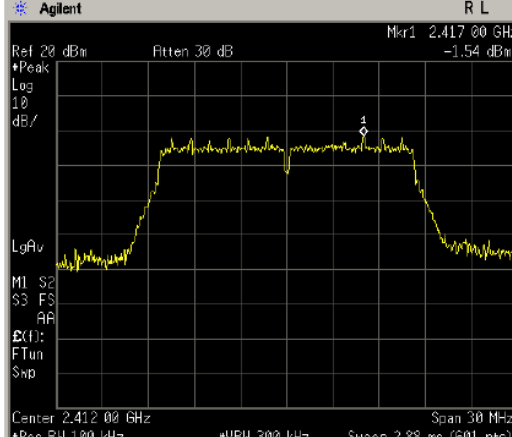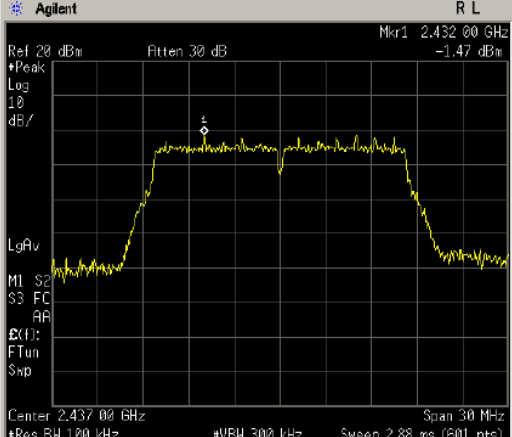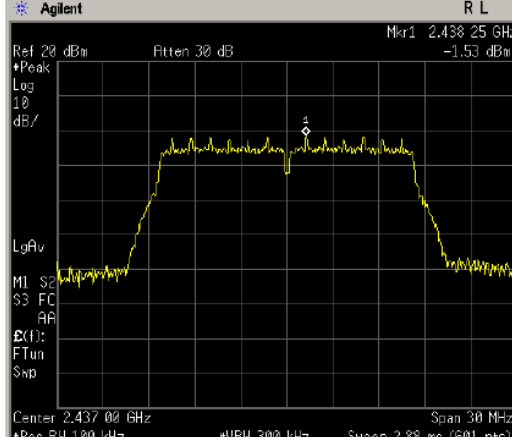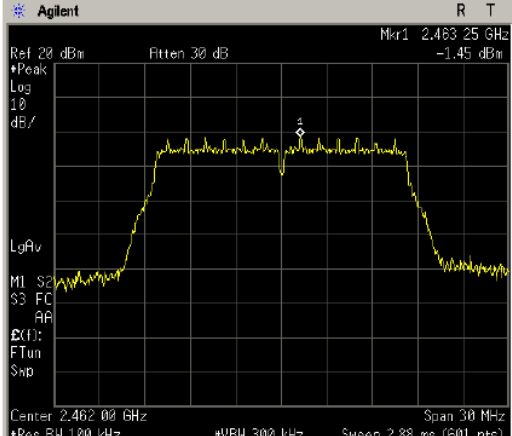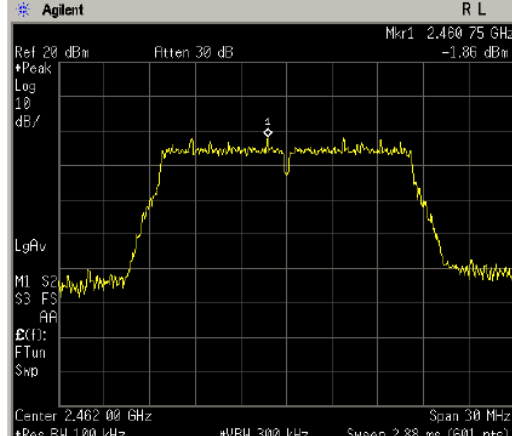Antenna 1	Antenna 2
802.11g Channel Low 2412MHz	802.11g Channel Low 2412MHz
	
802.11g Channel Middle 2437MHz	802.11g Channel Middle 2437MHz
	
802.11g Channel High 2462MHz	802.11g Channel High 2462MHz
	


Antenna 1

802.11n HT20 Channel Low 2412MHz

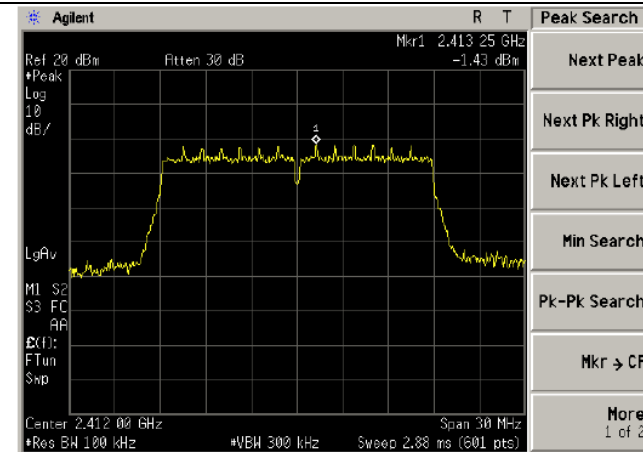


Antenna 2


802.11n HT20 Channel Low 2412MHz

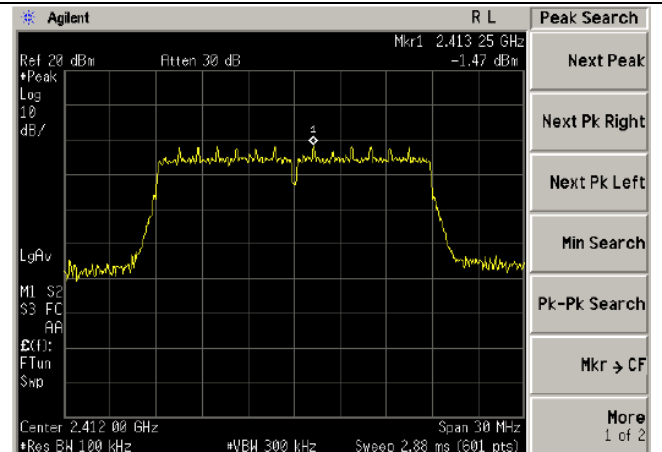


802.11n HT20 Channel Middle 2437MHz

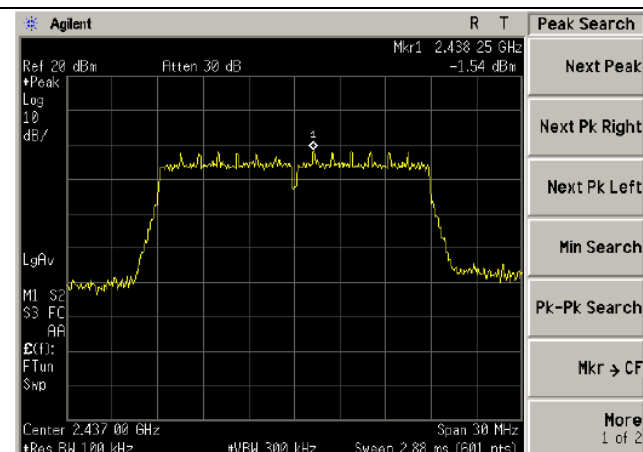


802.11n HT20 Channel Middle 2437MHz

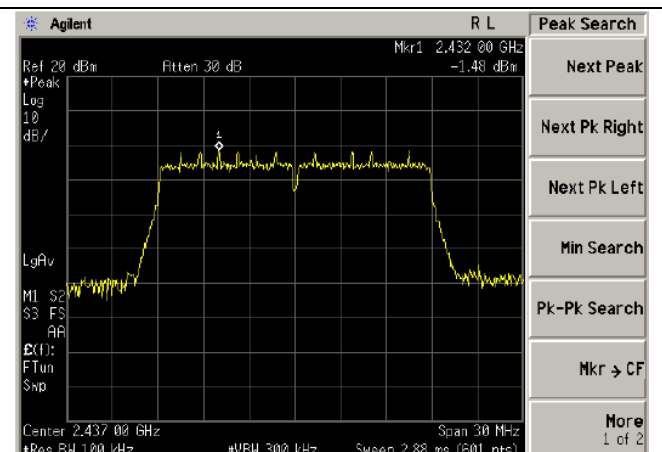

802.11n HT20 Channel High 2462MHz

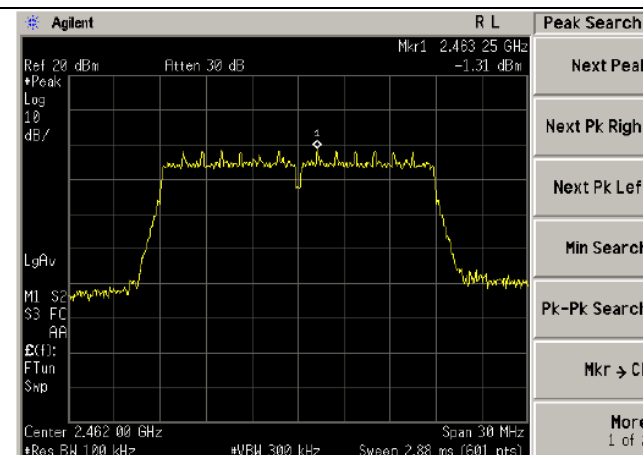


802.11n HT20 Channel High 2462MHz

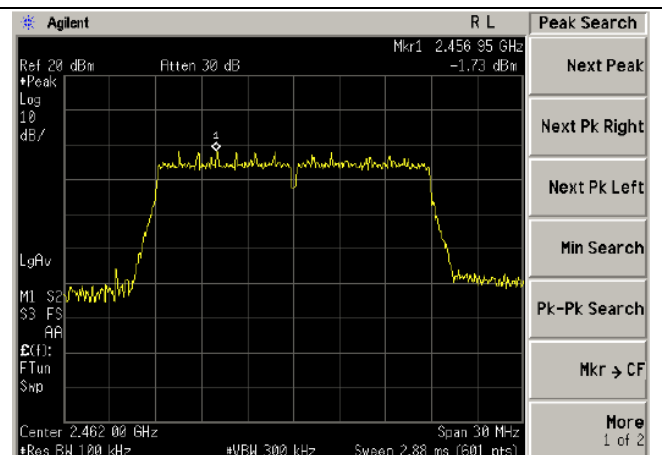

Antenna 1	Antenna 2
802.11n HT40 Channel Low 2422MHz	802.11n HT40 Channel Low 2422MHz
802.11n HT40 Channel Middle 2437MHz	802.11n HT40 Channel Middle 2437MHz
802.11n HT40 Channel High 2452MHz	802.11n HT40 Channel High 2452MHz

6. BAND EDGE COMPLIANCE TEST

6.1 Block diagram of test setup



6.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.3 Test procedure

Conducted Band Edge:

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

- The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
- The turntable was rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: RBW=1MHz, VBW=1MHz
- The band edges was measured and recorded.

6.4 Test result

Pass

Antenna port 1 data is worst as following:


802.11b			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2412	42.00	>30dBc
High	2462	53.26	> 30dBc

802.11g			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2412	37.33	>30dBc
High	2462	44.72	> 30dBc


802.11n (20MHz)			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2412	30.32	>30dBc
High	2462	44.17	> 30dBc

802.11n (40MHz)			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2422	36.33	>30dBc
High	2452	42.21	> 30dBc


802.11b Channel Low 2412MHz

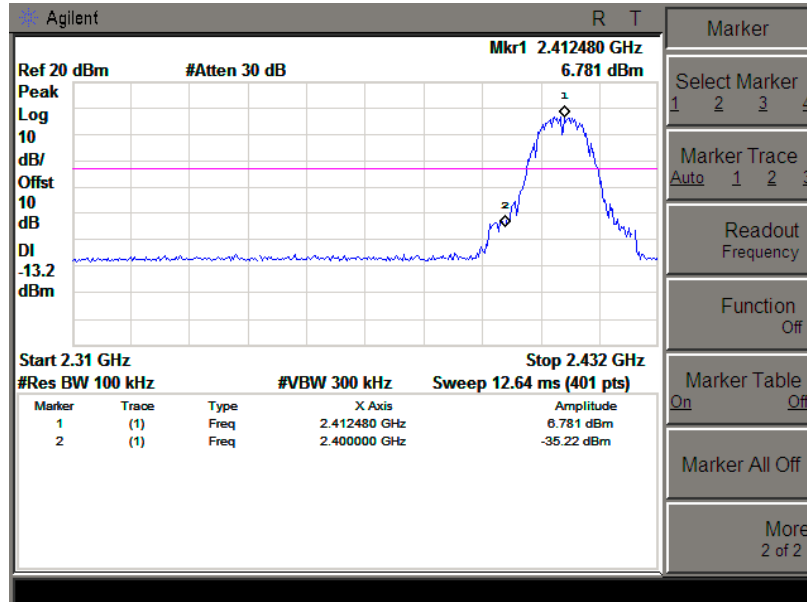


802.11b Channel High 2462MHz

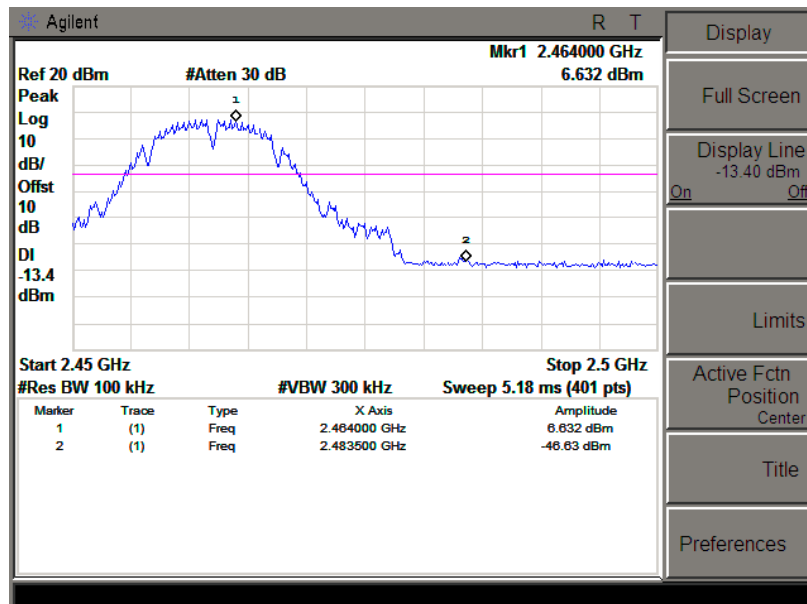


802.11g Channel Low 2412MHz

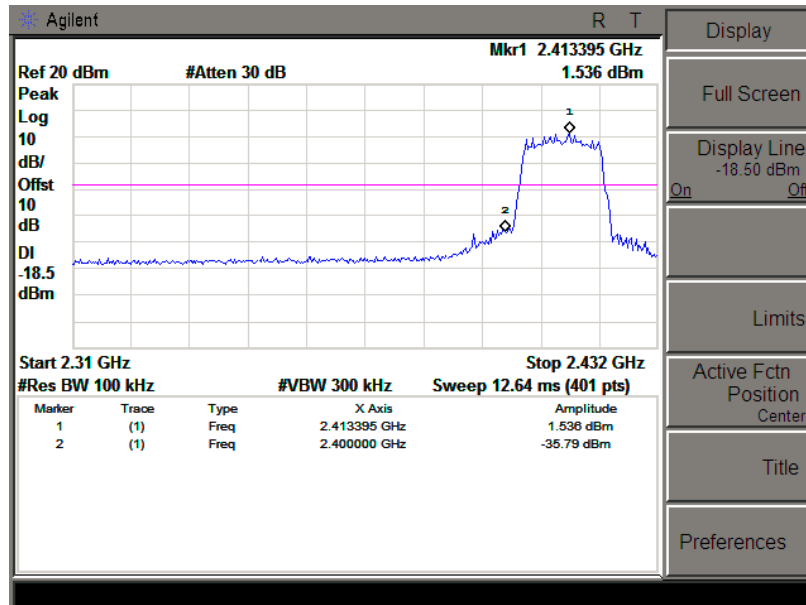


802.11g Channel High 2462MHz

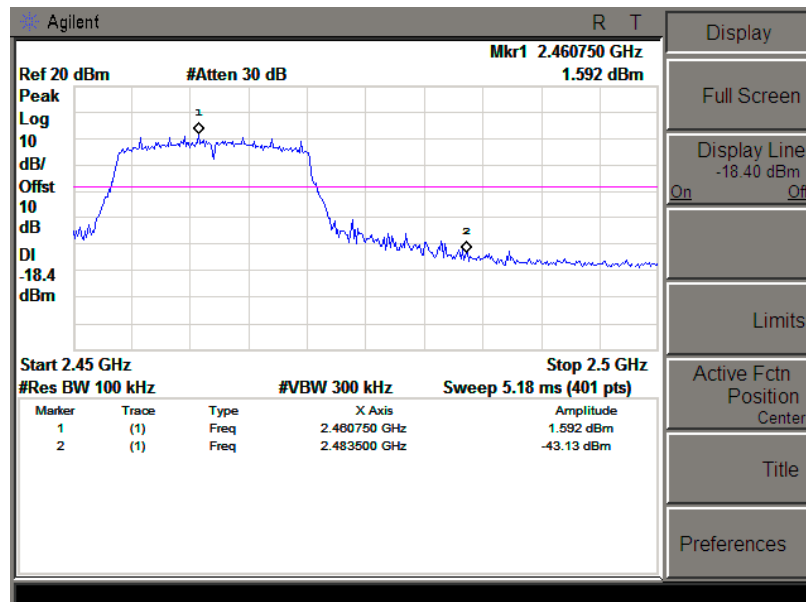


802.11n(HT20) Channel Low 2412MHz

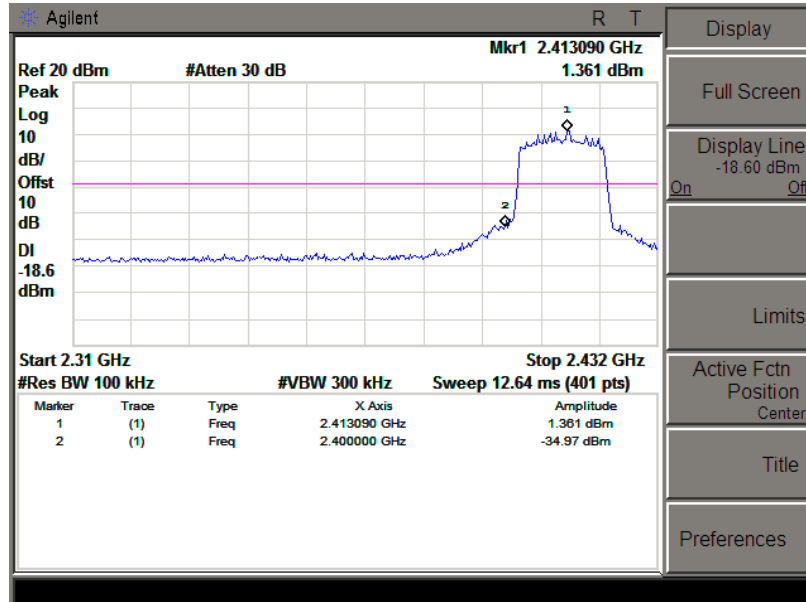


802.11n(HT20) Channel High 2462MHz

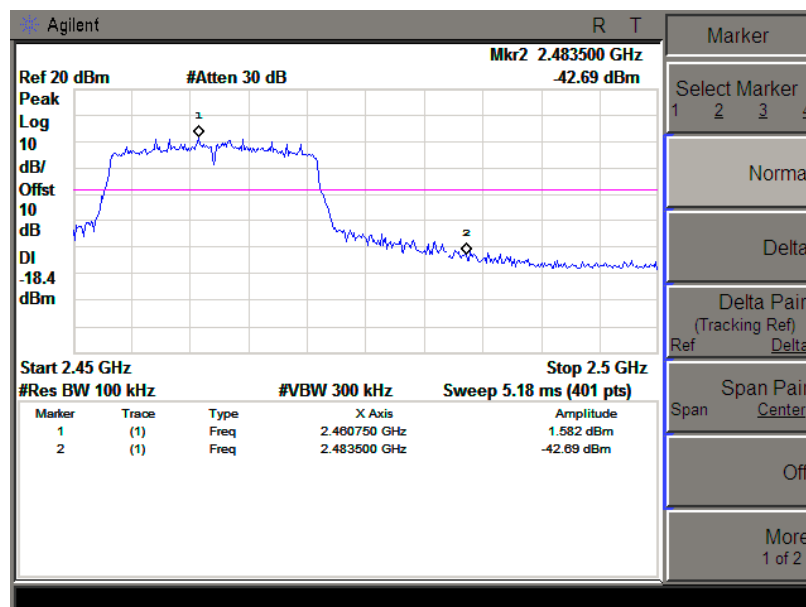

802.11n(HT40) Channel Low 2422MHz

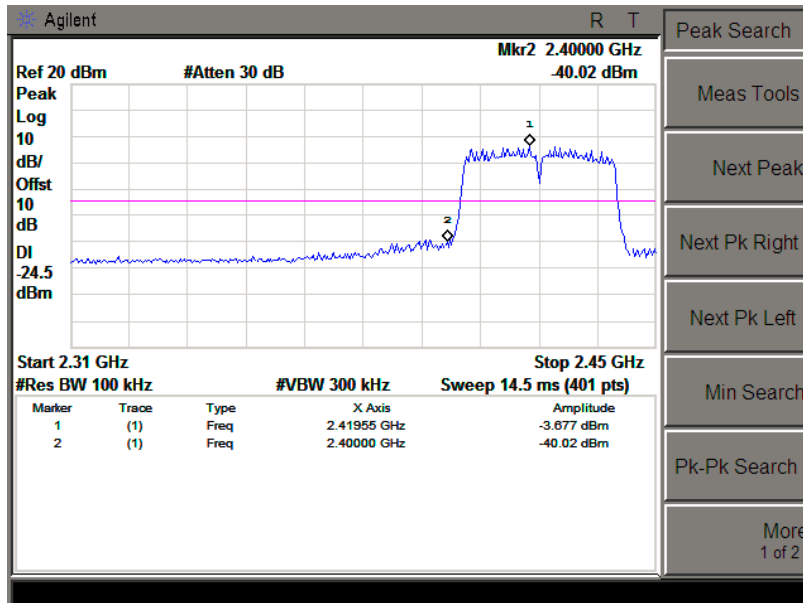

802.11n(HT40) Channel High 2452MHz

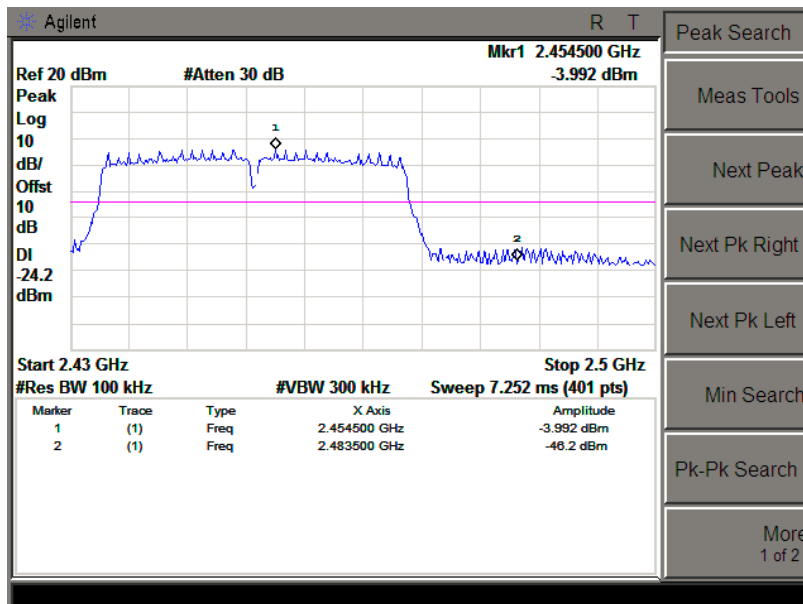


Radiated Band Edge Result

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
802.11 b							
2390	58.48	-13.06	45.42	74	-28.58	peak	Vertical
2390	58.22	-13.06	45.16	74	-28.84	peak	Horizontal
2483.5	59.41	-12.78	46.63	74	-27.37	peak	Vertical
2483.5	59.46	-12.78	46.68	74	-27.32	peak	Horizontal
802.11g							
2390	58.38	-13.06	45.32	74	-28.68	peak	Vertical
2390	57.56	-13.06	44.5	74	-29.50	peak	Horizontal
2483.5	59.27	-12.78	46.49	74	-27.51	peak	Vertical
2483.5	59.49	-12.78	46.71	74	-27.29	peak	Horizontal
802.11 HT20							
2390	60.6	-13.06	47.54	74	-26.46	peak	Vertical
2390	60.38	-13.06	47.32	74	-26.68	peak	Horizontal
2483.5	60.52	-12.78	47.74	74	-26.26	peak	Vertical
2483.5	60.64	-12.78	47.86	74	-26.14	peak	Horizontal
802.11 HT 40							
2390	61.39	-13.06	48.33	74	-25.67	peak	Vertical
2390	62.48	-13.06	49.42	74	-24.58	peak	Horizontal
2483.5	61.02	-12.78	48.24	74	-25.76	peak	Vertical
2483.5	60.87	-12.78	48.09	74	-25.91	peak	Horizontal


7. RADIATED SPURIOUS EMISSION TEST

7.1 Block diagram of test setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

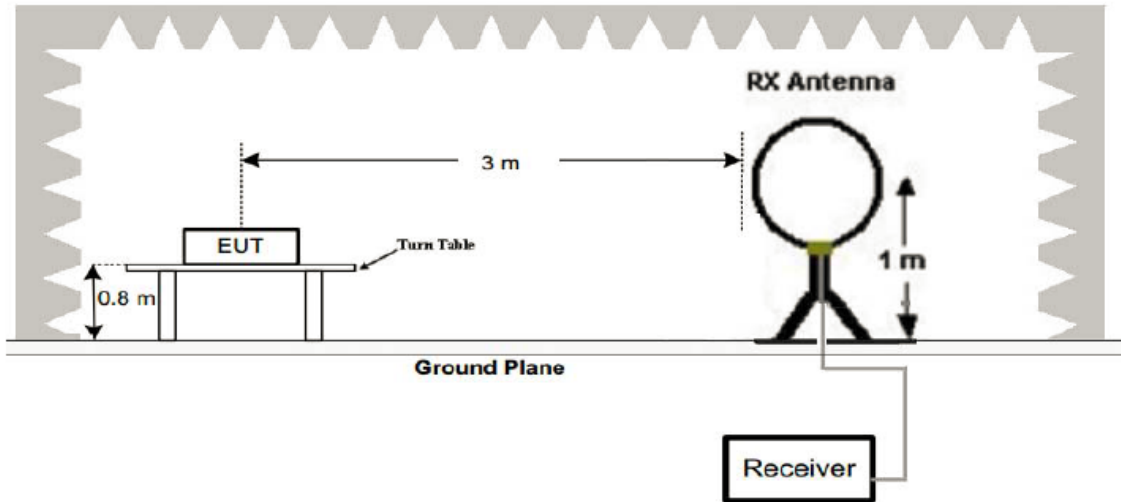

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

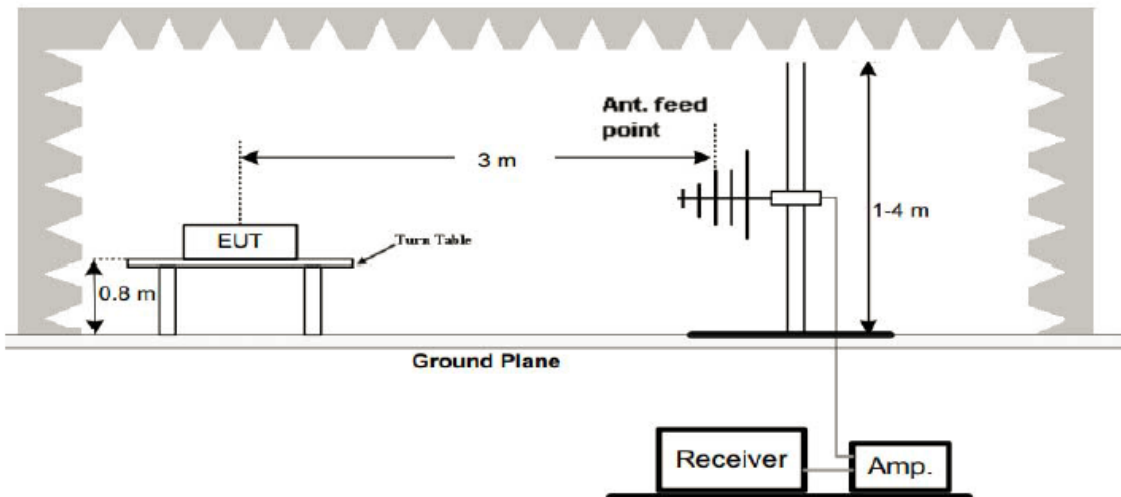

(3) Radiated Emission Test-Up Frequency Above 1GHz

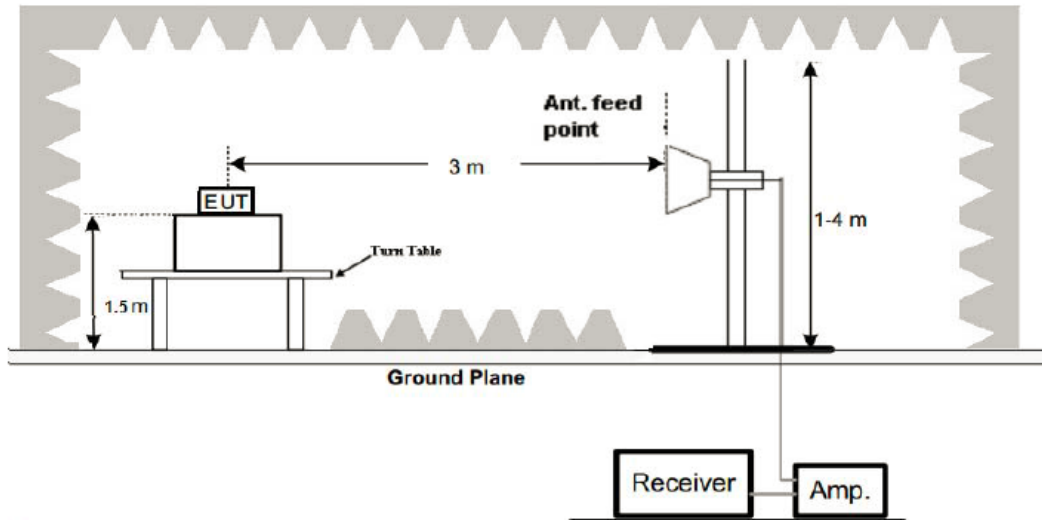

7.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

7.3 Restricted bands of operation

FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510
²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

7.4 Test procedure

- 1, Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
- 2, Support equipment, if needed, was placed as per ANSI C63.10

- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


7.5 Test result

Pass

Test mode: 802.11b
For Below 30MHz


Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

Test mode: 802.11b
For 30MHz-1000MHz

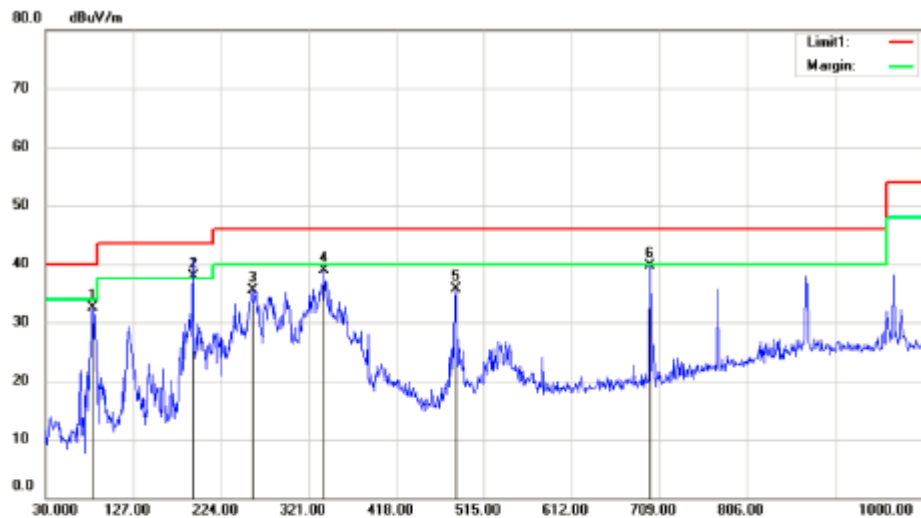

Site :Radiated 3M 3# Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
Mode:TX CH1
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		82.3800	51.56	-18.98	32.58	40.00	-7.42	QP			
2	*	192.9600	55.01	-17.01	38.00	43.50	-5.50	QP			
3		258.9200	48.45	-12.85	35.60	46.00	-10.40	QP			
4		338.4600	51.41	-12.55	38.86	46.00	-7.14	QP			
5		483.9600	44.89	-9.18	35.71	46.00	-10.29	QP			
6		699.3000	45.68	-5.99	39.69	46.00	-6.31	QP			

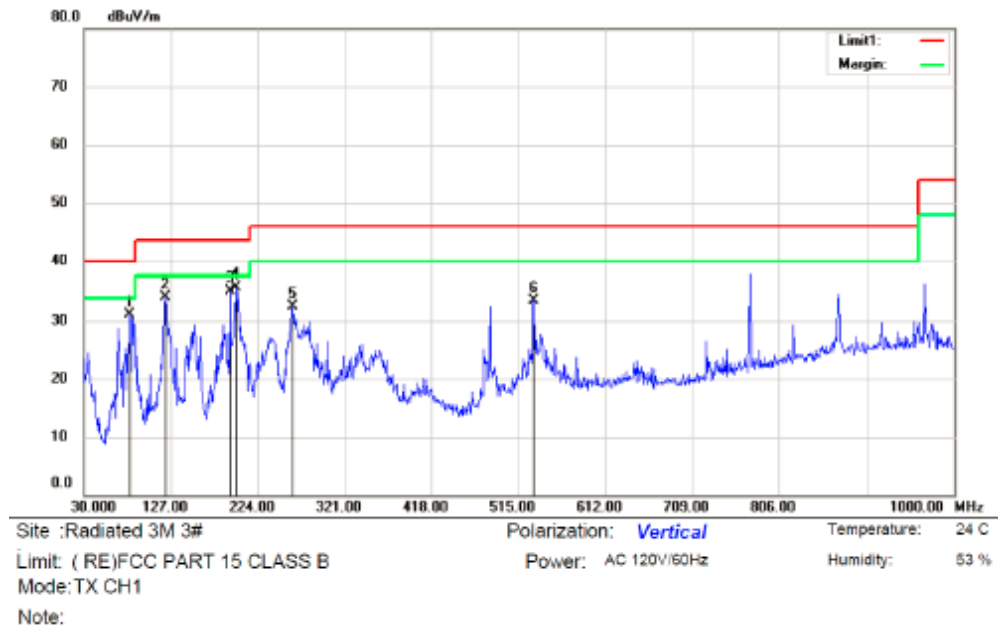

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		81.4100	50.19	-19.15	31.04	40.00	-8.96	QP			
2		121.1800	50.53	-16.45	34.08	43.50	-9.42	QP			
3		192.9600	52.03	-17.01	35.02	43.50	-8.48	QP			
4	*	199.7500	52.11	-16.42	35.69	43.50	-7.81	QP			
5		263.7700	45.26	-12.75	32.51	46.00	-13.49	QP			
6		532.4600	41.13	-7.53	33.60	46.00	-12.40	QP			

Test mode: 802.11b
For 1GHz-25GHz

CH low

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824.00	V	54.19	44.17	74.00	54.00	-19.81	-9.83
7236.00	V	56.09	44.77	74.00	54.00	-17.91	-9.23
9648.00	V	57.92	46.83	74.00	54.00	-16.08	-7.17
12060.00	V	61.23	49.68	74.00	54.00	-12.77	-4.32
14472.00	V	64.13	49.30	74.00	54.00	-9.87	-4.70
16884.00	V	64.34	49.65	74.00	54.00	-9.66	-4.35
4824.00	H	54.20	44.12	74.00	54.00	-19.80	-9.88
7236.00	H	56.59	45.63	74.00	54.00	-17.41	-8.37
9648.00	H	58.18	48.36	74.00	54.00	-15.82	-5.64
12060.00	H	59.81	47.68	74.00	54.00	-14.19	-6.32
14472.00	H	60.53	47.45	74.00	54.00	-13.47	-6.55
16884.00	H	63.55	50.08	74.00	54.00	-10.45	-3.92

CH Middle

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874.00	V	55.35	44.90	74.00	54.00	-18.65	-9.10
7311.00	V	57.25	45.50	74.00	54.00	-16.75	-8.50
9748.00	V	59.08	47.56	74.00	54.00	-14.92	-6.44
12185.00	V	62.39	50.41	74.00	54.00	-11.61	-3.59
14622.00	V	65.29	49.82	74.00	54.00	-8.71	-4.18
17059.00	V	65.50	50.38	74.00	54.00	-8.50	-3.62
4874.00	H	55.36	44.85	74.00	54.00	-18.64	-9.15
7311.00	H	57.75	46.36	74.00	54.00	-16.25	-7.64
9748.00	H	59.34	48.59	74.00	54.00	-14.66	-5.41
12185.00	H	60.97	47.91	74.00	54.00	-13.03	-6.09
14622.00	H	61.69	47.48	74.00	54.00	-12.31	-6.52
17059.00	H	64.71	50.81	74.00	54.00	-9.29	-3.19


CH High

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.00	V	55.17	44.86	74.00	54.00	-18.83	-9.14
7386.00	V	57.07	45.46	74.00	54.00	-16.93	-8.54
9848.00	V	58.90	47.52	74.00	54.00	-15.10	-6.48
12310.00	V	62.21	50.37	74.00	54.00	-11.79	-3.63
14772.00	V	65.11	49.99	74.00	54.00	-8.89	-4.01
17234.00	V	65.32	50.34	74.00	54.00	-8.68	-3.66
4924.00	H	55.18	44.81	74.00	54.00	-18.82	-9.19
7386.00	H	57.57	46.32	74.00	54.00	-16.43	-7.68
9848.00	H	59.16	49.05	74.00	54.00	-14.84	-4.95
12310.00	H	60.79	48.37	74.00	54.00	-13.21	-5.63
14772.00	H	61.51	48.14	74.00	54.00	-12.49	-5.86
17234.00	H	64.53	50.77	74.00	54.00	-9.47	-3.23

Note: "802.11b" mode is worst mode

8. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

8.1 Block diagram of test setup



8.2 Limits

Se Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3 Test procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.
- The Conducted Spurious Emission was measured and recorded.

8.4 Test Result



Pass

The spectrum analyzer plots are attached as below.



Antenna port 1 data is worst:

The worst test mode: 802.11b



TX 802.11b Channel Low 2412MHz

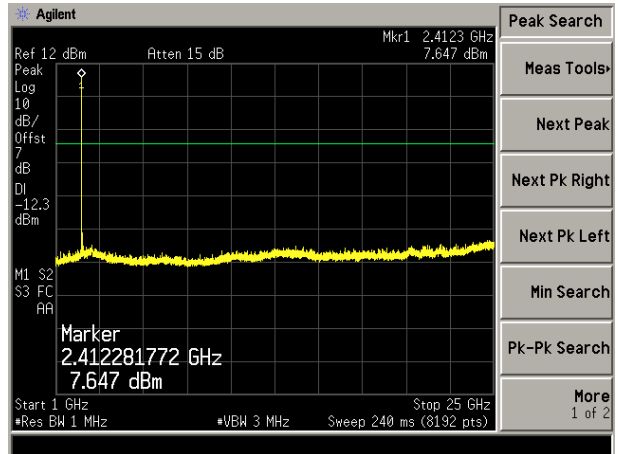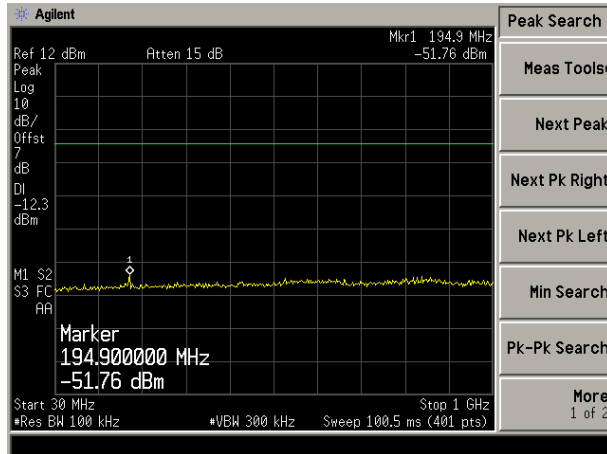

TX 802.11b Channel Middle 2437MHz

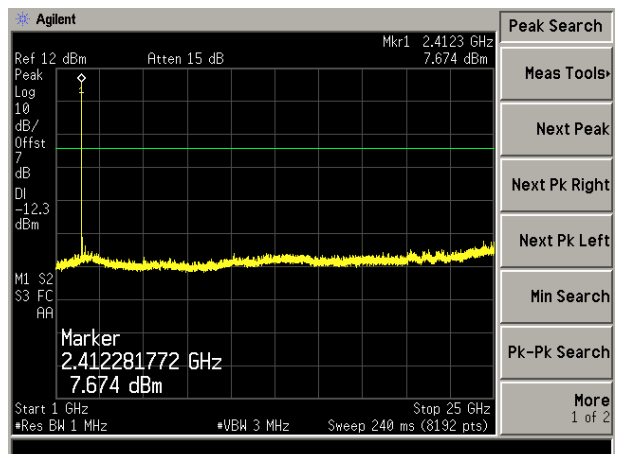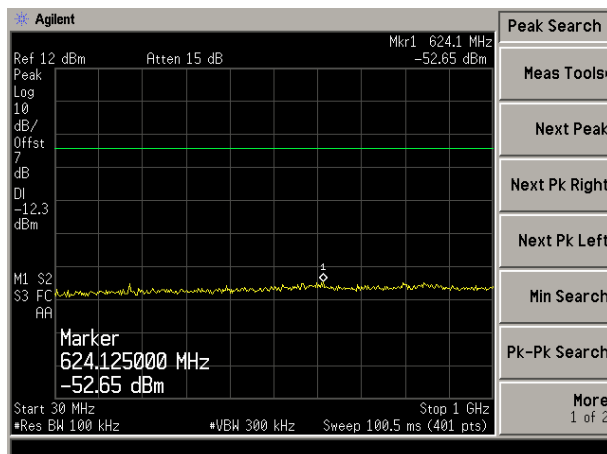


TX 802.11b Channel High 2462MHz

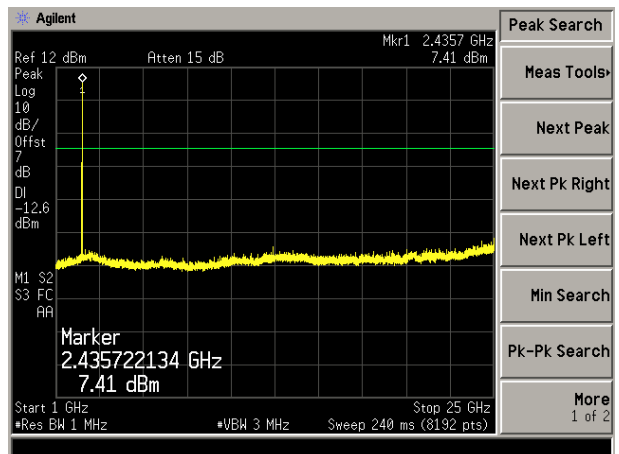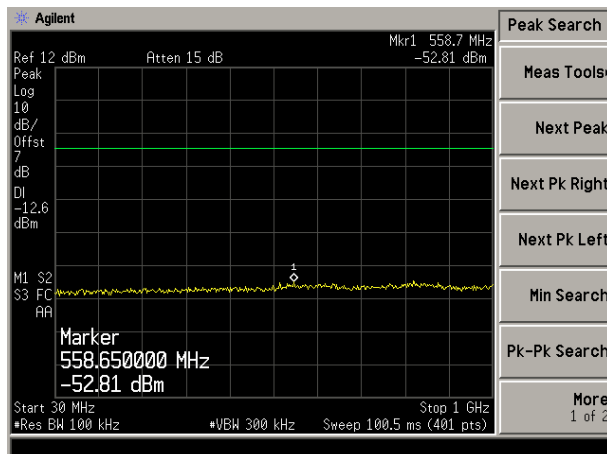

9. AC POWER LINE CONDUCTED EMISSION

9.1 Block diagram of test setup

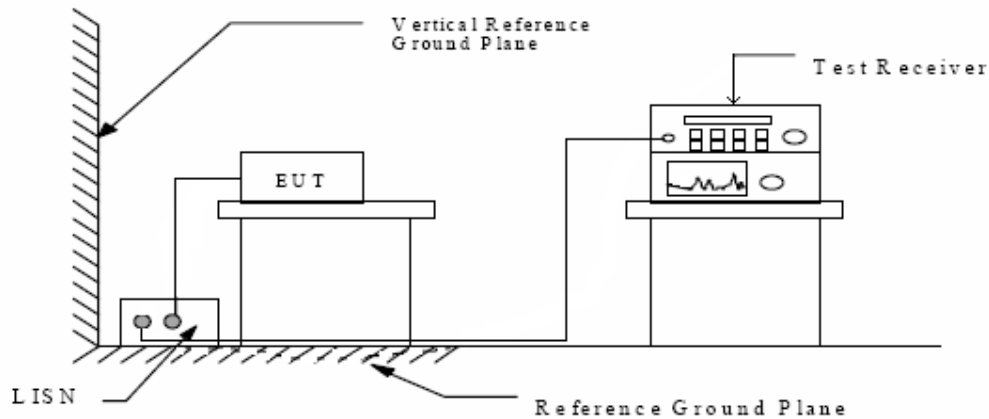

9.2 Limits

Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency MHz	Limits (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

* Decreases with the logarithm of the frequency.

9.3 Test procedure


The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESPI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

9.4 Test Result

PASS

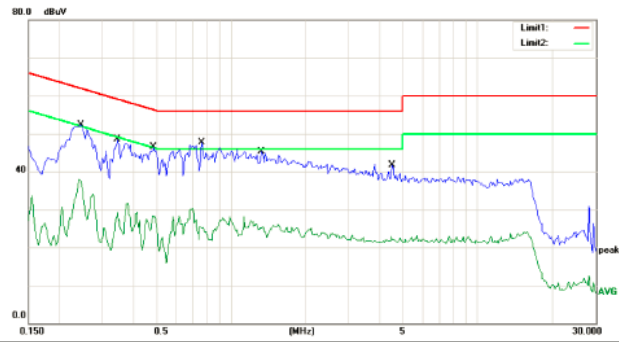

Site: Conduction #1

Phase: L1

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 60 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV	dBuV	dB		
1		0.2450	52.27	0.00	52.27	61.92	-9.65	QP	
2		0.2450	36.33	0.00	36.33	51.92	-15.59	AVG	
3		0.3450	48.52	0.00	48.52	59.08	-10.56	QP	
4		0.3450	28.65	0.00	28.65	49.08	-20.43	AVG	
5		0.4850	46.43	0.00	46.43	56.25	-9.82	QP	
6		0.4850	28.19	0.00	28.19	46.25	-18.06	AVG	
7	*	0.7600	47.79	0.00	47.79	56.00	-8.21	QP	
8		0.7600	25.06	0.00	25.06	46.00	-20.94	AVG	
9		1.3300	45.29	0.00	45.29	56.00	-10.71	QP	
10		1.3300	25.06	0.00	25.06	46.00	-20.94	AVG	
11		4.5200	41.71	0.00	41.71	56.00	-14.29	QP	
12		4.5200	22.19	0.00	22.19	46.00	-23.81	AVG	

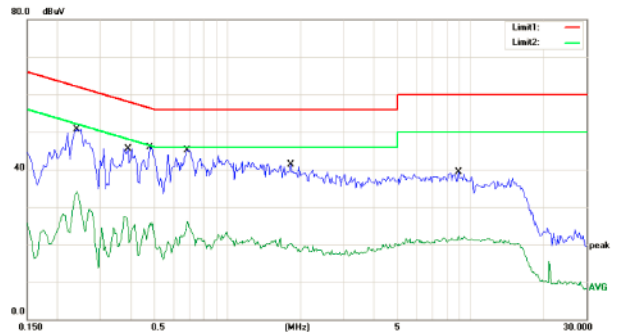

Site: Conduction #1

Phase: N

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV	dBuV	dB		
1		0.2400	50.61	0.00	50.61	62.10	-11.49	QP	
2		0.2400	33.95	0.00	33.95	52.10	-18.15	AVG	
3		0.3900	45.57	0.00	45.57	58.06	-12.49	QP	
4		0.3900	22.91	0.00	22.91	48.06	-25.15	AVG	
5	*	0.4800	45.82	0.00	45.82	56.34	-10.52	QP	
6		0.4800	24.71	0.00	24.71	46.34	-21.63	AVG	
7		0.6850	45.19	0.00	45.19	56.00	-10.81	QP	
8		0.6850	25.88	0.00	25.88	46.00	-20.12	AVG	
9		1.8200	41.21	0.00	41.21	56.00	-14.79	QP	
10		1.8200	20.19	0.00	20.19	46.00	-25.81	AVG	
11		8.9500	39.29	0.00	39.29	60.00	-20.71	QP	
12		8.9500	22.18	0.00	22.18	50.00	-27.82	AVG	


10. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna is fixed by enclosure, can not be changed except take apart the product.

Antenna port 1

Antenna port 2

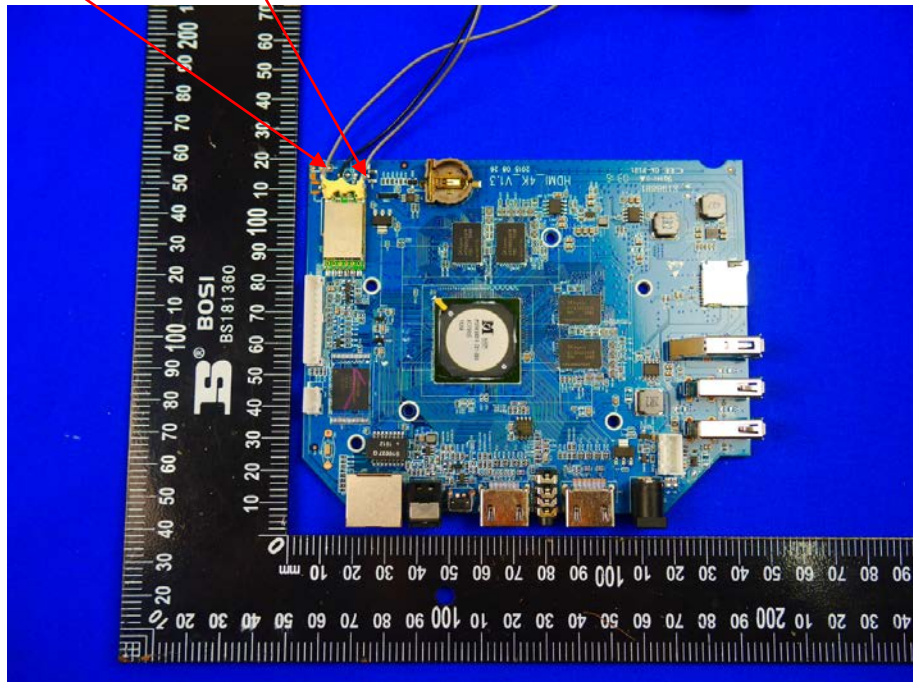


Note: Two antennas transmitting at the same time

11. POTOGRAPH OF TEST

11.1 Radiated Emission



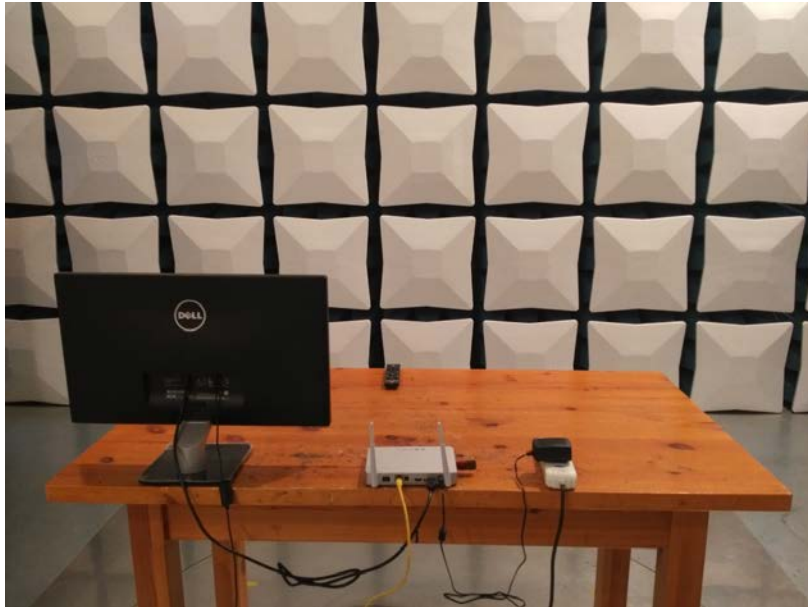

11.2 Conducted Emission

