



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GRCTR240802014-01

FCC ID.....: UCC-C260X

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: Sep. 27, 2024

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: Altai Technologies Limited

Address.....: Unit 209, 2/F, Lakeside 2, 10 Science Park West Avenue, HK Science Park, Shatin, Hong Kong

Test specification.....:

Standard.....: FCC Part 15.247

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Outdoor Dual-Band Wi-Fi 6 AP

Trade Mark.....: Altai Super Wi-Fi

Manufacturer.....: Altai Technologies Limited

Model/Type reference.....: C260-X

Listed Models: /

Firmware Version.....: V1.0

Hardware Version.....: V1.0

Modulation Type.....: DSSS/ OFDM

Operation Frequency.....: From 2412 - 2462MHz

Rating.....: DC12V/1.25A or POE:48~56 VDC

Result.....: PASS

TEST REPORT

Equipment under Test : Outdoor Dual-Band Wi-Fi 6 AP

Model /Type : C260-X

Listed Models : /

Applicant : **Altai Technologies Limited**

Address : Unit 209, 2/F, Lakeside 2,10 Science Park West Avenue,HK
Science Park, Shatin, Hong Kong

Manufacturer : **Altai Technologies Limited**

Address : Unit 209, 2/F, Lakeside 2,10 Science Park West Avenue,HK
Science Park, Shatin, Hong Kong

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Short description of the Equipment under Test (EUT)	5
2.4 EUT operation mode	5
2.5 EUT configuration	7
2.6 Block Diagram of Test Setup	7
2.7 Related Submittal(s) / Grant (s)	7
2.8 Modifications	7
3 TEST ENVIRONMENT	8
3.1 Address of the test laboratory	8
3.2 Test Facility	8
3.3 Environmental conditions	8
3.4 Test Description	9
3.5 Statement of the measurement uncertainty	9
3.6 Equipments Used during the Test	10
4 TEST CONDITIONS AND RESULTS	12
4.1 AC Power Line Conducted Emission	12
4.2 Radiated Emission	17
4.3 Maximum Conducted Output Power	25
4.4 Power Spectral Density	28
4.5 6dB Bandwidth	36
4.6 Spurious RF Conducted Emission	44
4.7 Antenna Requirement	69
5 TEST SETUP PHOTOS OF THE EUT	70
6 PHOTOS OF THE EUT	72

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Aug. 08, 2024
Testing commenced on	:	Aug. 08, 2024
Testing concluded on	:	Sep. 27, 2024

2.2 Product Description

Product Name:	Outdoor Dual-Band Wi-Fi 6 AP
Model/Type reference:	C260-X
Listed Models:	/
Power supply:	DC12V/1.25A or POE:48~56 VDC
Adapter information:	M/N:EPA5006GP Input:AC 100-240V 50-60Hz Output:DC 54V/0.6A PIN 4,5:54V PIN 7,8:RETURN
Testing sample ID:	GRCTR240802014-1# (Engineer sample), GRCTR240802014-2# (Normal sample)
WIFI:	
Supported type:	802.11b/802.11g/802.11n HT20/802.11n HT40/802.11ax HE20/802.11ax HE40
Modulation:	802.11b: DSSS 802.11g/802.11n HT20 /802.11n HT40/802.11ax HE20/802.11ax HE40: OFDM
Operation frequency:	802.11b/802.11g/802.11 HT20/802.11ax HE20: 2412MHz~2462MHz 802.11n HT40/802.11ax HE40: 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n HT20/802.11ax HE20: 11 802.11n HT40/802.11ax HE40: 7
Channel separation:	5MHz
Antenna type:	External antenna
Antenna gain*(Supplied by the customer):	Ant 1: 4.15 dBi Ant 2: 4.15 dBi
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.	

2.3 Short description of the Equipment under Test (EUT)

This is a Outdoor Dual-Band Wi-Fi 6 AP.
For more details, refer to the user's manual of the EUT.

2.4 EUT operation mode

The Applicant provides communication tools software(SecureCRT) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n HT20/ax HE20:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

IEEE 802.11 n HT40/ax HE40:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

Type	Antenna	Power setting	Channel
802.11b	Ant 1	26	01
			06
			11
802.11g	Ant 1	21	01
			06
			11
802.11n HT20	Ant 1	17.5	01
			06
			11
802.11n HT40	Ant 1	17.5	03
			06
			09
802.11n HE20	Ant 1	17.5	01
			06
			11
802.11n HE40	Ant 1	17.5	03
			06
			09
802.11b	Ant 2	26	01
			06
			11
802.11g	Ant 2	21	01
			06
			11
802.11n HT20	Ant 2	17.5	01
			06
			11

802.11n HT40	Ant 2	17.5	03
			06
			09
802.11n HE20	Ant 2	17.5	01
			06
			11
802.11n HE40	Ant 2	17.5	03
			06
			09


2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

Item	Manufacturer	Description	Model	Certificate	Note
1 ^{Note1}	Xiaomi	Notebook	Pro 14	/	/
2 ^{Note1}	Jiyin	Adapter	A535-120200W	/	Input:AC 100-240V 50/60Hz Output:DC 12V/2A

Note1: This Auxiliary used during the test is provided by the test laboratory.

2.6 Block Diagram of Test Setup

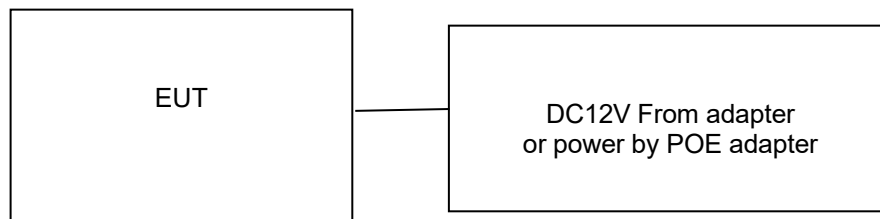

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Line Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n HT20/OFDM	6.5Mbps	1/6/11
	11n HT40/OFDM	13.5Mbps	3/6/9
	11ax HE20/OFDM	8.6 Mbps	1/6/11
	11ax HE40/OFDM	17.2 Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n HT20/OFDM	6.5Mbps	1/11
	11n HT40/OFDM	13.5Mbps	3/6/9
	11ax HE20/OFDM	8.6 Mbps	1/6/11
	11ax HE40/OFDM	17.2 Mbps	3/6/9

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Equipment No.	Last Calibration Date	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2023/09/27	2024/09/19	2025/09/18
LISN	R&S	ENV216	GRCTEE010	2023/09/27	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESPI	GRCTEE017	2023/09/28	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESCI	GRCTEE008	2023/09/27	2024/09/19	2025/09/18
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2023/09/27	2024/09/19	2025/09/18
Spectrum Analyzer	R&S	FSP	GRCTEE003	2023/09/28	2024/09/20	2025/09/19
Vector Signal generator	Agilent	N5181A	GRCTEE007	2023/09/27	2024/09/19	2025/09/18
Analog Signal Generator	R&S	SML03	GRCTEE006	2023/09/27	2024/09/19	2025/09/18
Climate Chamber	QIYA	LCD-9530	GRCTES016	2023/09/27	2024/09/19	2025/09/18
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	N/A	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	N/A	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	N/A	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH1004 00	GRCTEE049	2023/09/28	N/A	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2023/09/27	2024/09/19	2025/09/18
Amplifier	Taiwan chengyi	EMC0518 45B	GRCTEE022	2023/09/28	2024/09/19	2025/09/18
Temperature/ Humidity Meter	Huaguan	HG-308	GRCTES037	2023/09/27	2024/09/19	2025/09/18
Directional coupler	NARDA	4226-10	GRCTEE004	2023/09/27	2024/09/19	2025/09/18

High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2023/09/27	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2023/09/27	2024/09/19	2025/09/18
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2023/09/27	2024/09/19	2025/09/18
Power Sensor	Agilent	U2021XA	GRCTEE070	2023/09/27	2024/09/19	2025/09/18
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Line Conducted Emission

TEST CONFIGURATION

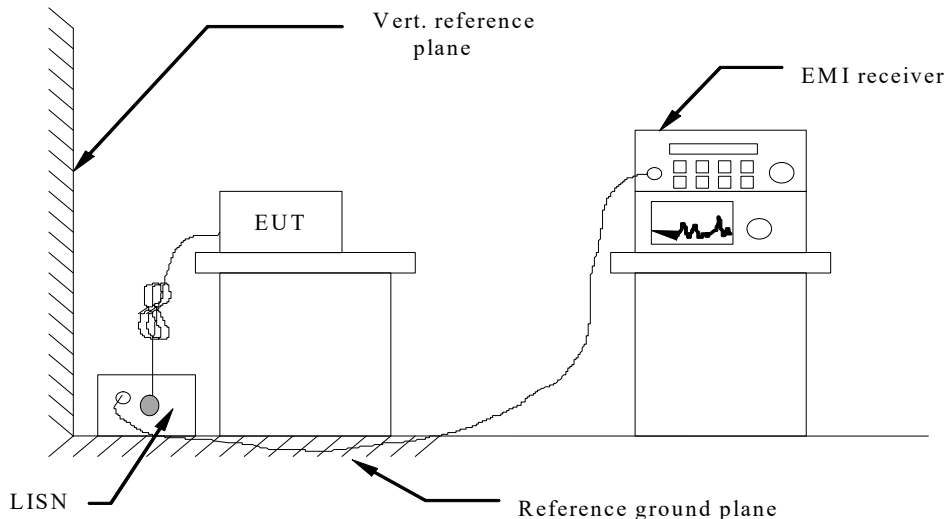

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Line Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. All modes of 802.11b/g/n/ax were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:

2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

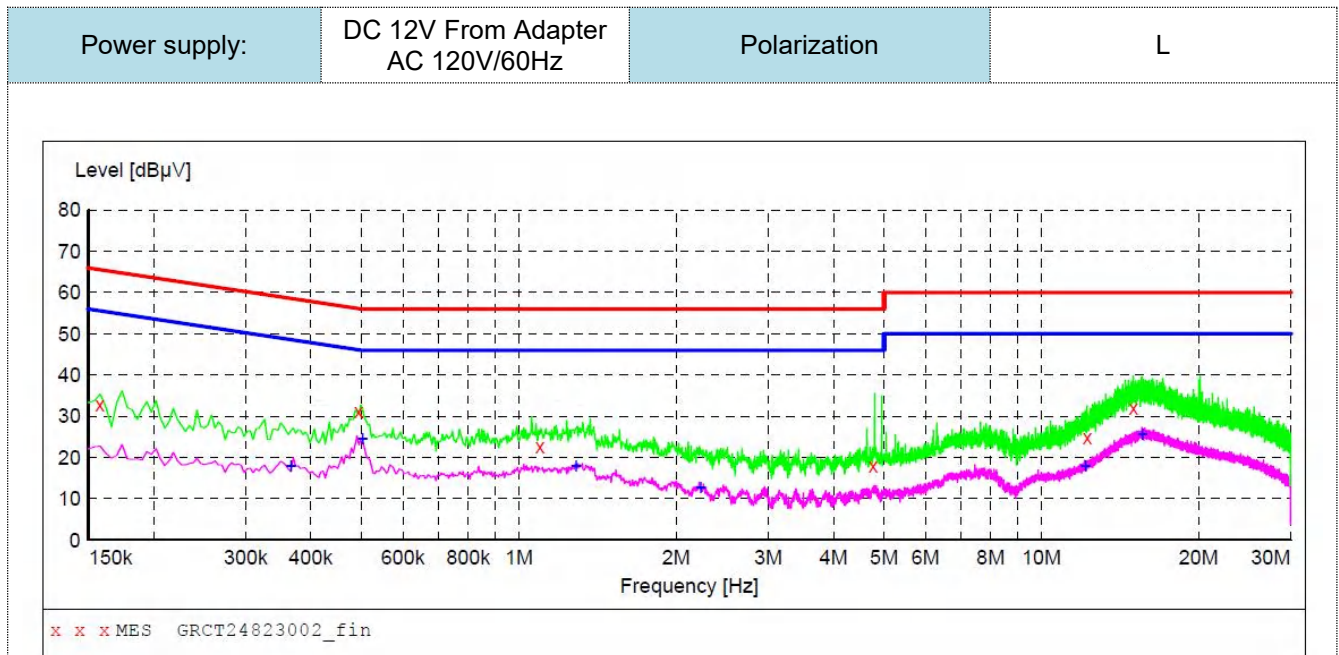**MEASUREMENT RESULT: "GRCT24823002_fin"**

8/22/2024 9:42PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	32.80	9.5	66	32.8	QP	L1	GND
0.494000	31.10	9.7	56	25.0	QP	L1	GND
1.098000	22.70	10.0	56	33.3	QP	L1	GND
4.770000	17.90	9.9	56	38.1	QP	L1	GND
12.254000	25.00	10.0	60	35.0	QP	L1	GND
15.006000	32.00	10.1	60	28.0	QP	L1	GND

MEASUREMENT RESULT: "GRCT24823002_fin2"

8/22/2024 9:42PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.366000	18.00	9.6	49	30.6	AV	L1	GND
0.502000	24.60	9.7	46	21.4	AV	L1	GND
1.286000	17.90	10.0	46	28.1	AV	L1	GND
2.230000	12.80	10.0	46	33.2	AV	L1	GND
12.126000	18.00	10.0	50	32.0	AV	L1	GND
15.590000	25.60	10.1	50	24.4	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 12V From Adapter
AC 120V/60Hz

Polarization

N

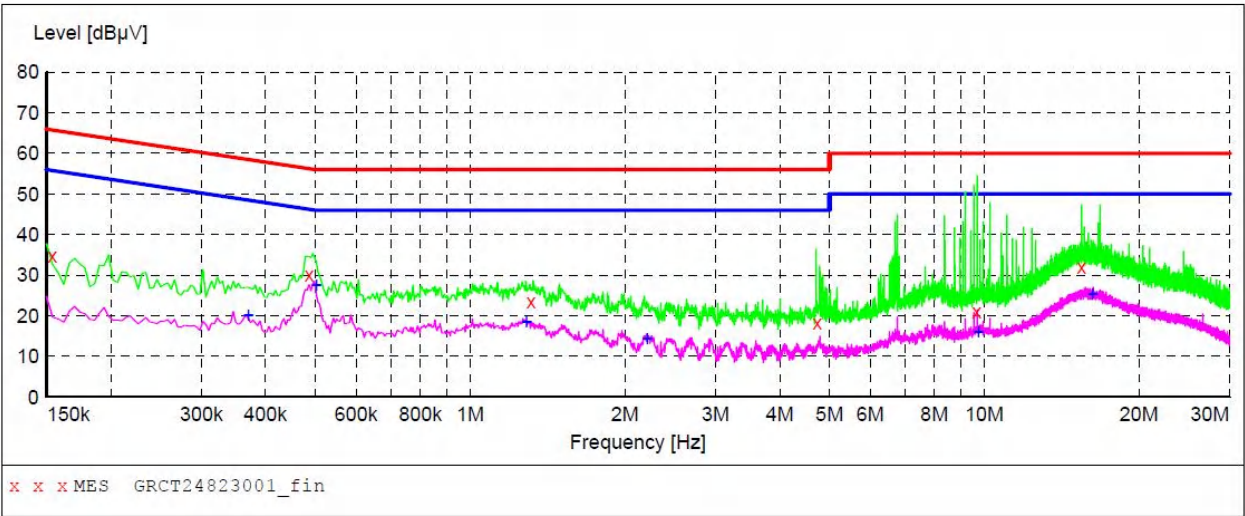

MEASUREMENT RESULT: "GRCT24823001_fin"

8/22/2024 9:39PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	34.90	9.6	66	30.9	QP	N	GND
0.486000	30.20	9.7	56	26.0	QP	N	GND
1.314000	23.50	10.0	56	32.5	QP	N	GND
4.734000	18.20	9.9	56	37.8	QP	N	GND
9.678000	21.10	10.0	60	38.9	QP	N	GND
15.482000	31.90	10.1	60	28.1	QP	N	GND

MEASUREMENT RESULT: "GRCT24823001_fin2"

8/22/2024 9:39PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.370000	20.20	9.6	49	28.3	AV	N	GND
0.502000	27.70	9.7	46	18.3	AV	N	GND
1.286000	18.50	10.0	46	27.5	AV	N	GND
2.210000	14.40	10.0	46	31.6	AV	N	GND
9.730000	16.00	10.0	50	34.0	AV	N	GND
16.238000	25.30	10.1	50	24.7	AV	N	GND


- Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 54V From POE
adapter AC 120V/60Hz

Polarization

L

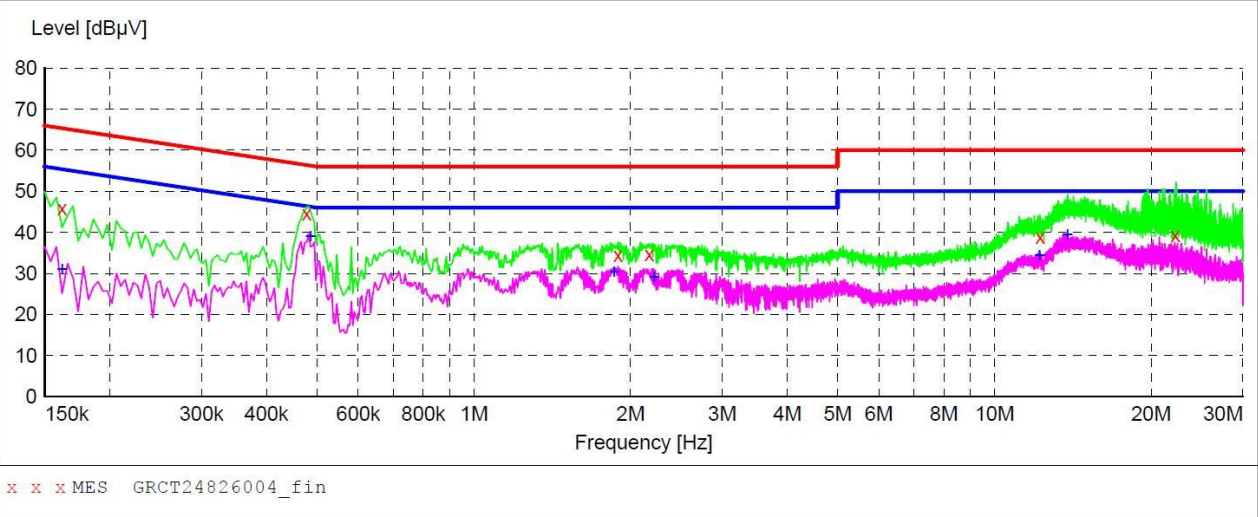

MEASUREMENT RESULT: "GRCT24826004_fin"

8/25/2024 10:20PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	45.80	9.5	65	19.6	QP	L1	GND
0.478000	44.60	9.7	56	11.8	QP	L1	GND
1.894000	34.50	10.0	56	21.5	QP	L1	GND
2.174000	34.60	10.0	56	21.4	QP	L1	GND
12.242000	38.80	10.0	60	21.2	QP	L1	GND
22.282000	39.40	10.2	60	20.6	QP	L1	GND

MEASUREMENT RESULT: "GRCT24826004_fin2"

8/25/2024 10:20PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	31.10	9.5	55	24.3	AV	L1	GND
0.486000	39.20	9.7	46	7.0	AV	L1	GND
1.858000	30.50	10.0	46	15.5	AV	L1	GND
2.218000	29.10	10.0	46	16.9	AV	L1	GND
12.194000	34.40	10.0	50	15.6	AV	L1	GND
13.798000	39.60	10.0	50	10.4	AV	L1	GND


- Note:1).Level (dBµV)= Reading (dBµV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBµV) - Level (dBµV)

Power supply:

DC 54V From POE
adapter AC 120V/60Hz

Polarization

N

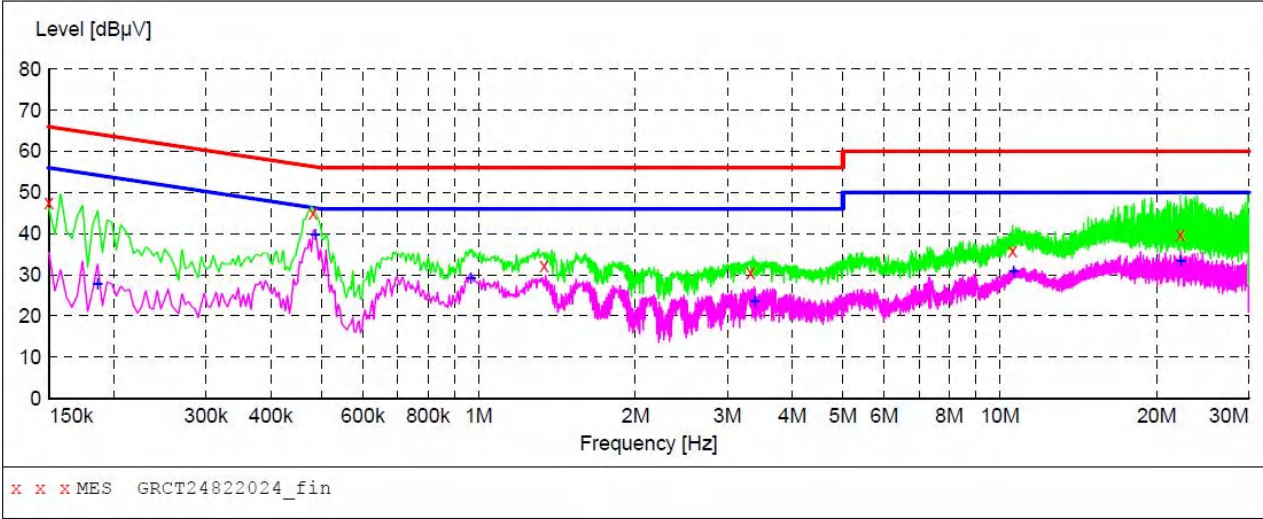

MEASUREMENT RESULT: "GRCT24822024_fin"

8/22/2024 3:48AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	47.70	9.6	66	18.3	QP	N	GND
0.482000	45.10	9.7	56	11.2	QP	N	GND
1.338000	32.30	10.0	56	23.7	QP	N	GND
3.330000	30.50	9.9	56	25.5	QP	N	GND
10.582000	35.80	10.0	60	24.2	QP	N	GND
22.206000	39.70	10.2	60	20.3	QP	N	GND

MEASUREMENT RESULT: "GRCT24822024_fin2"

8/22/2024 3:48AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	27.90	9.5	54	26.3	AV	N	GND
0.486000	39.80	9.7	46	6.4	AV	N	GND
0.966000	29.20	9.9	46	16.8	AV	N	GND
3.382000	23.60	9.9	46	22.4	AV	N	GND
10.626000	31.00	10.0	50	19.0	AV	N	GND
22.214000	33.50	10.2	50	16.5	AV	N	GND

- Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBμV) - Level (dBμV)


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

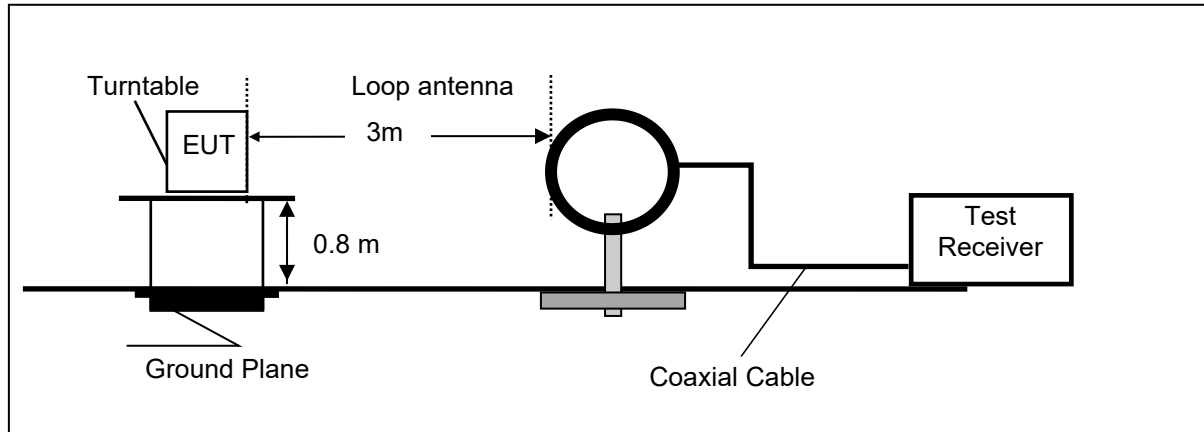

Frequency range 30MHz – 1000MHz

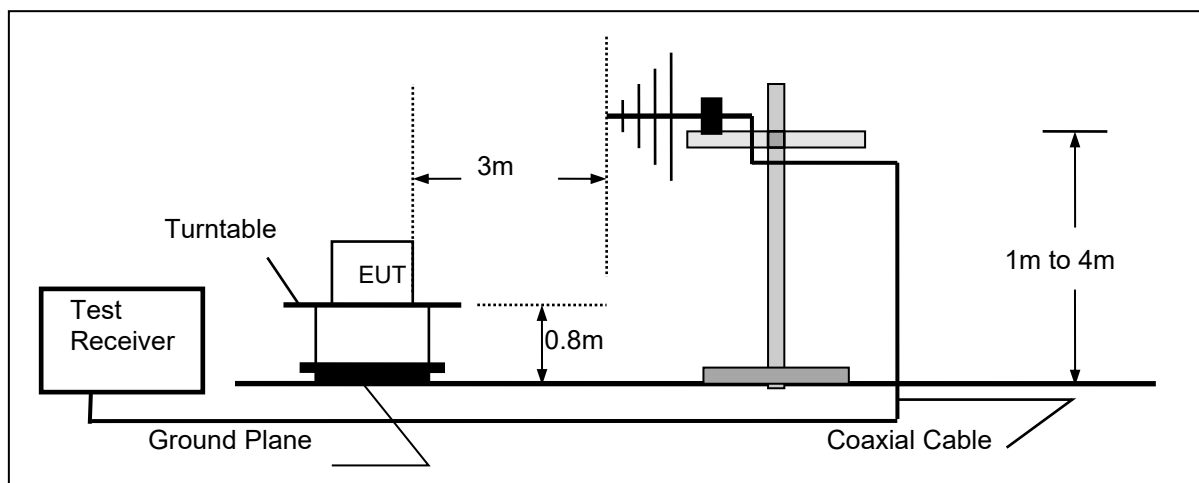

Frequency range above 1GHz-25GHz

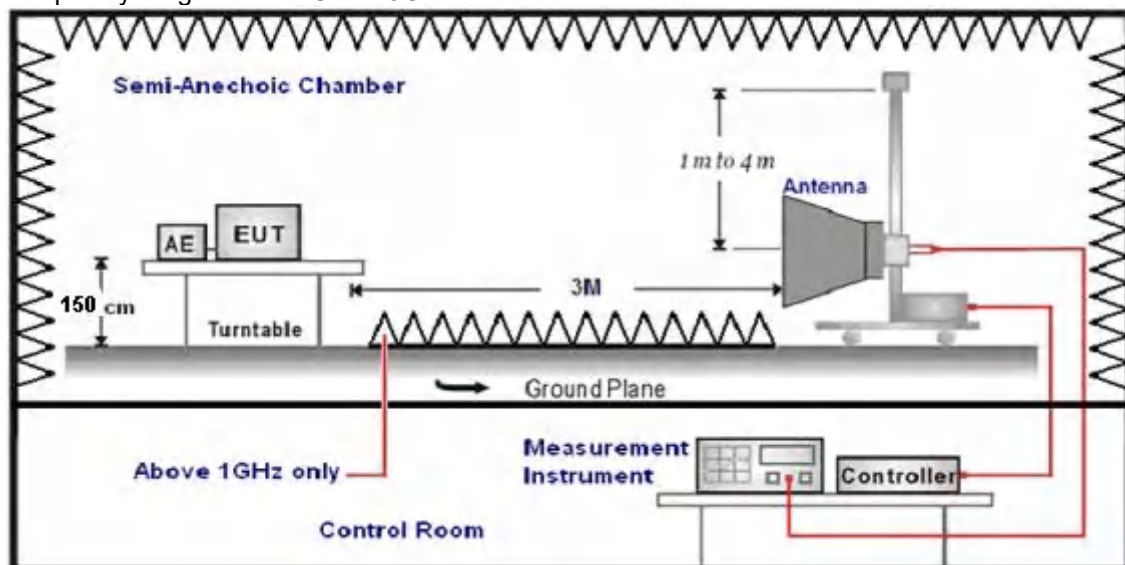

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz, the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

DC 12V From adapter AC 120V/60Hz

Horizontal

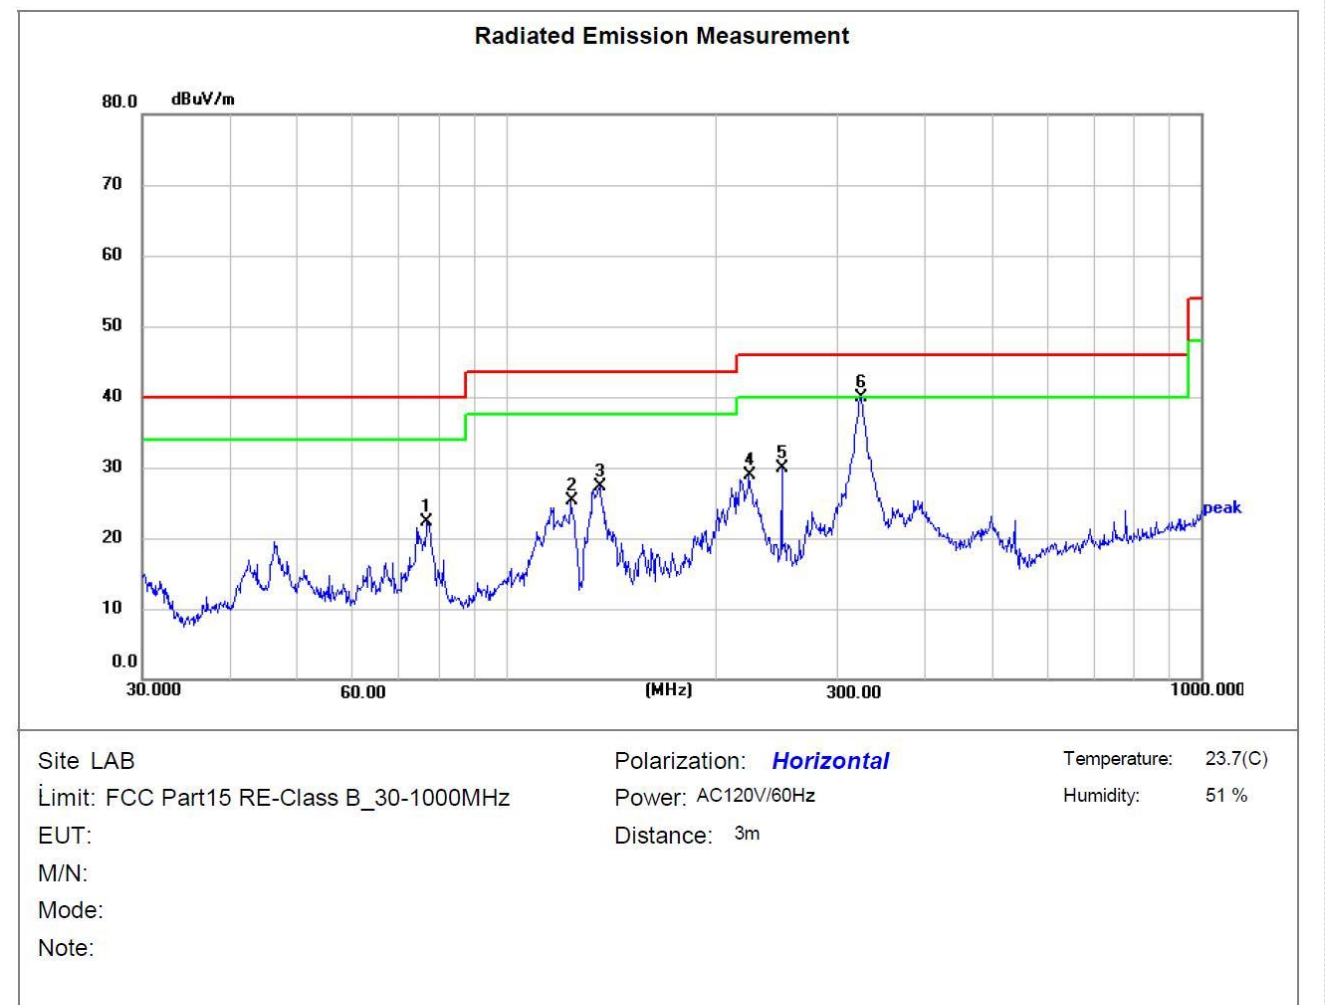

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	77.0505	44.47	-22.21	22.26	40.00	-17.74	peak	199	9	P	
2	124.1330	46.98	-21.68	25.30	43.50	-18.20	peak	100	341	P	
3	136.4598	49.52	-22.21	27.31	43.50	-16.19	peak	199	322	P	
4	223.7334	47.51	-18.68	28.83	46.00	-17.17	peak	100	78	P	
5	249.4250	48.26	-18.31	29.95	46.00	-16.05	peak	100	289	P	
6 *	323.3204	56.76	-16.77	39.99	46.00	-6.01	peak	100	105	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

DC 12V From adapter AC 120V/60Hz

Vertical

Radiated Emission Measurement



Site LAB

Polarization: **Vertical**

Temperature: 23.7(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 51 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	32.6340	54.42	-19.74	34.68	40.00	-5.32	peak	100	76	P	
2	52.2079	47.11	-17.60	29.51	40.00	-10.49	peak	100	295	P	
3	67.2022	48.89	-20.17	28.72	40.00	-11.28	peak	100	16	P	
4	141.3298	47.84	-21.86	25.98	43.50	-17.52	peak	100	58	P	
5	204.9551	44.45	-18.94	25.51	43.50	-17.99	peak	100	234	P	
6	323.3204	44.84	-16.77	28.07	46.00	-17.93	peak	100	67	P	


Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

DC 54V From POE adapter AC 120V/60Hz

Horizontal

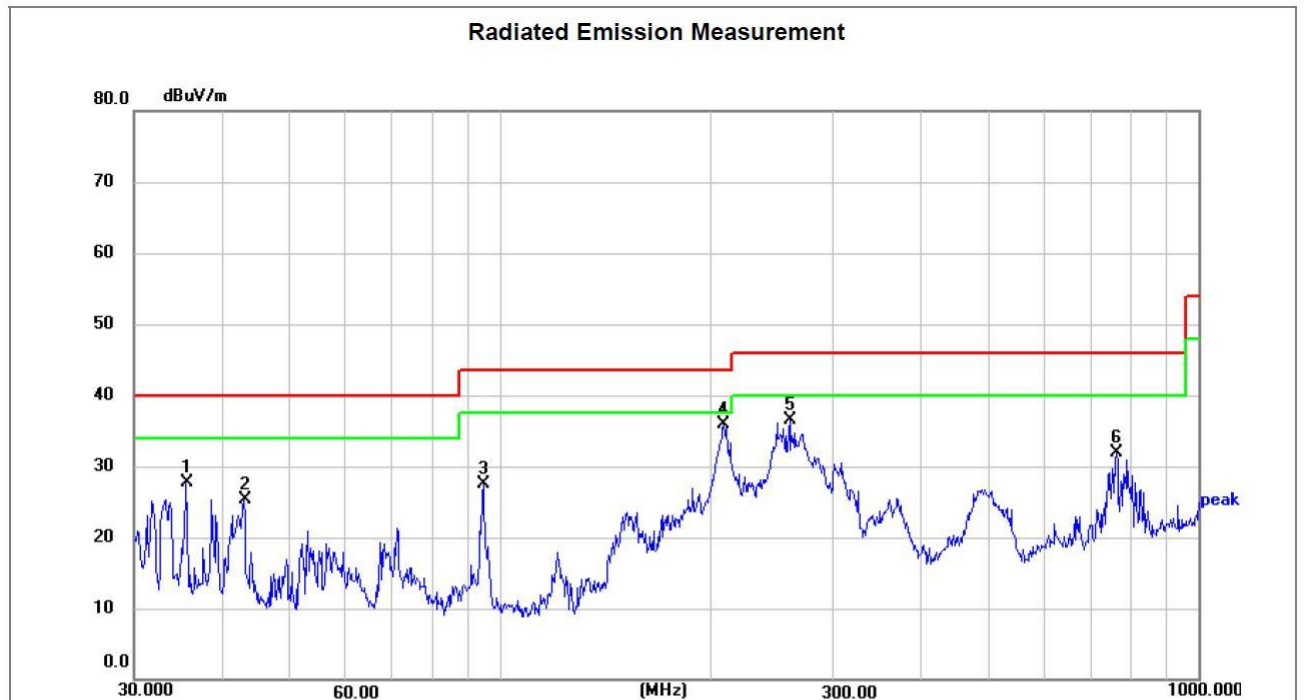

Site LAB

Polarization: **Horizontal**

Temperature: 24(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 52 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	35.6240	47.07	-19.37	27.70	40.00	-12.30	peak	200	5	P	
2	43.0505	43.00	-17.68	25.32	40.00	-14.68	peak	100	260	P	
3	94.7601	47.55	-19.96	27.59	43.50	-15.91	peak	100	314	P	
4 *	209.3129	54.70	-18.88	35.82	43.50	-7.68	peak	100	122	P	
5	260.1444	54.47	-18.03	36.44	46.00	-9.56	peak	100	305	P	
6	763.3757	41.92	-9.97	31.95	46.00	-14.05	peak	100	131	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

DC 54V From POE adapter AC 120V/60Hz

Vertical

Radiated Emission Measurement



Site LAB

Polarization: **Vertical**

Temperature: 24(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 52 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 !	30.8534	55.67	-19.85	35.82	40.00	-4.18	peak	100	54	P	
2 !	43.5057	53.46	-17.65	35.81	40.00	-4.19	peak	100	354	P	
3 *	52.5752	53.70	-17.63	36.07	40.00	-3.93	peak	100	11	P	
4 !	58.6126	53.99	-18.60	35.39	40.00	-4.61	peak	100	97	P	
5	69.6005	51.11	-20.44	30.67	40.00	-9.33	peak	100	303	P	
6	249.4250	48.35	-18.31	30.04	46.00	-15.96	peak	100	41	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n HT20/802.11n HT40/802.11ax HE20/802.11ax HE40 Mode all have been tested, only worse case 802.11b mode is reported.

(above 1GHz)

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	53.62	PK	74	20.38	76.23	28.37	5.10	54.70	-21.23
4824.00	42.80	AV	54	11.20	64.03	28.37	5.10	54.70	-21.23
7236.00	51.81	PK	74	22.19	66.30	34.10	6.42	55.01	-14.49
7236.00	40.70	AV	54	13.30	55.19	34.10	6.42	55.01	-14.49

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	53.44	PK	74	20.56	74.67	28.37	5.10	54.70	-21.23
4824.00	42.24	AV	54	11.76	63.47	28.37	5.10	54.70	-21.23
7236.00	52.09	PK	74	21.91	66.58	34.10	6.42	55.01	-14.49
7236.00	40.76	AV	54	13.24	55.25	34.10	6.42	55.01	-14.49

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	54.71	PK	74	19.29	74.98	28.76	5.35	54.38	-20.27
4874.00	42.95	AV	54	11.05	63.22	28.76	5.35	54.38	-20.27
7311.00	52.72	PK	74	21.28	66.35	34.40	6.83	54.86	-13.63
7311.00	41.07	AV	54	12.93	54.70	34.40	6.83	54.86	-13.63

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	55.52	PK	74	18.48	75.79	28.76	5.35	54.38	-20.27
4874.00	43.11	AV	54	10.89	63.38	28.76	5.35	54.38	-20.27
7311.00	53.03	PK	74	20.97	66.66	34.40	6.83	54.86	-13.63
7311.00	41.56	AV	54	12.44	55.19	34.40	6.83	54.86	-13.63

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	54.93	PK	74	19.07	74.38	29.54	5.66	54.65	-19.45
4924.00	42.62	AV	54	11.38	62.07	29.54	5.66	54.65	-19.45
7386.00	54.29	PK	74	19.71	67.43	34.51	7.25	54.9	-13.14
7386.00	40.93	PK	54	13.07	54.07	34.51	7.25	54.9	-13.14

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	55.35	PK	74	18.65	74.80	29.54	5.66	54.65	-19.45
4924.00	42.24	AV	54	11.76	61.69	29.54	5.66	54.65	-19.45
7386.00	52.66	PK	74	21.34	65.80	34.51	7.25	54.9	-13.14
7386.00	42.29	PK	54	11.71	55.43	34.51	7.25	54.9	-13.14

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n HT20/802.11n HT40/802.11ax HE20/802.11ax HE40 Mode all have been tested, only worse case 802.11b mode is reported.

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	55.20	PK	74	18.80	79.92	25.72	4.32	54.76	-24.72
2390.00	38.75	AV	54	15.25	63.47	25.72	4.32	54.76	-24.72
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	55.25	PK	74	18.75	79.97	25.72	4.32	54.76	-24.72
2390.00	37.73	AV	54	16.27	62.45	25.72	4.32	54.76	-24.72
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	54.67	PK	74	19.33	79.24	25.78	4.48	54.83	-24.57
2483.50	38.57	AV	54	15.43	63.14	25.78	4.48	54.83	-24.57
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	55.45	PK	74	18.55	80.02	25.78	4.48	54.83	-24.57
2483.50	38.50	AV	54	15.50	63.07	25.78	4.48	54.83	-24.57

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

4.3 Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Ant 1

Type	Channel	Output power PK (dBm)	Limit (dBm)	Result
802.11b	01	26.13	30.00	Pass
	06	27.52		
	11	27.89		
802.11g	01	27.15	30.00	Pass
	06	27.22		
	11	27.37		
802.11n HT20	01	23.32	30.00	Pass
	06	23.87		
	11	23.63		
802.11n HT40	03	23.59	30.00	Pass
	06	23.83		
	09	24.20		
802.11ax HE20	01	23.24	30.00	Pass
	06	23.79		
	11	23.44		
802.11ax HE40	03	23.45	30.00	Pass
	06	23.82		
	09	24.22		

Ant 2

Type	Channel	Output power PK (dBm)	Limit (dBm)	Result
802.11b	01	27.28	30.00	Pass
	06	27.51		
	11	27.97		
802.11g	01	27.84	30.00	Pass
	06	28.88		
	11	27.29		
802.11n HT20	01	23.15	30.00	Pass
	06	24.44		
	11	24.65		
802.11n HT40	03	23.48	30.00	Pass
	06	23.98		
	09	24.44		
802.11ax HE20	01	23.28	30.00	Pass
	06	24.57		
	11	24.95		
802.11ax HE40	03	23.65	30.00	Pass
	06	24.47		
	09	24.83		

MIMO

Type	Channel	Output power PK(dBm) ANT1	Output power PK(dBm) ANT2	Output power PK(dBm) MIMO	Limit (dBm)	Result
802.11n HT20	01	23.32	23.15	26.25	28.84	Pass
	06	23.87	24.44	27.17		
	11	23.63	24.65	27.18		
802.11n HT40	03	23.59	23.48	26.55	28.84	Pass
	06	23.83	23.98	26.92		
	09	24.20	24.44	27.33		
802.11ax HE20	01	23.24	23.28	26.27	28.84	Pass
	06	23.79	24.57	27.21		
	11	23.44	24.95	27.27		
802.11ax HE40	03	23.45	23.65	26.56	28.84	Pass
	06	23.82	24.47	27.17		
	09	24.22	24.83	27.55		

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 8.6Mbps at IEEE 802.11ax HE20; 17.2Mbps at IEEE 802.11ax HE40.

4.4 Power Spectral Density

Limit

The resulting peak PSD level shall not be greater than 8 dBm/3KHz.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level shall not be greater than 8 dBm/3KHz.

Test Configuration



Test Results

Ant 1

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	2.37	8	Pass
	06	3.39		
	11	4.02		
802.11g	01	-2.48	8	Pass
	06	-0.92		
	11	-0.89		
802.11n HT20	01	-6.65	8	Pass
	06	-5.94		
	11	-6.43		
802.11n HT40	03	-9.35	8	Pass
	06	-9.39		
	09	-8.65		
802.11ax HE20	01	-8.15	8	Pass
	06	-4.52		
	11	-6.77		
802.11ax HE40	03	-9.49	8	Pass
	06	-9.42		
	09	-9.67		

Ant 2

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	2.97	8	Pass
	06	2.61		
	11	3.71		
802.11g	01	-1.49	8	Pass
	06	-1.36		
	11	-0.69		
802.11n HT20	01	-7.23	8	Pass
	06	-4.40		
	11	-5.33		
802.11n HT40	03	-11.05	8	Pass
	06	-9.88		
	09	-9.39		
802.11ax HE20	01	-7.80	8	Pass
	06	-4.91		
	11	-5.70		
802.11ax HE40	03	-10.23	8	Pass
	06	-9.01		
	09	-9.15		

MIMO

Type	Channel	Power Spectral Density (dBm/3KHz) ANT1	Power Spectral Density (dBm/3KHz) ANT2	Power Spectral Density (dBm/3KHz) MIMO	Limit(dBm/3K Hz)	Result
802.11n HT20	01	-6.65	-7.23	-3.92	6.84	Pass
	06	-5.94	-4.40	-2.09		
	11	-6.43	-5.33	-2.83		
802.11n HT40	03	-9.35	-11.05	-7.11	6.84	Pass
	06	-9.39	-9.88	-6.62		
	09	-8.65	-9.39	-5.99		
802.11ax HE20	01	-8.15	-7.80	-4.96	6.84	Pass
	06	-4.52	-4.91	-1.70		
	11	-6.77	-5.70	-3.19		
802.11ax HE40	03	-9.49	-10.23	-6.83	6.84	Pass
	06	-9.42	-9.01	-6.20		
	09	-9.67	-9.15	-6.39		

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 8.6Mbps at IEEE 802.11ax HE20; 17.2Mbps at IEEE 802.11ax HE40.


Please refer to following plots;

Ant 1


802.11b




802.11g

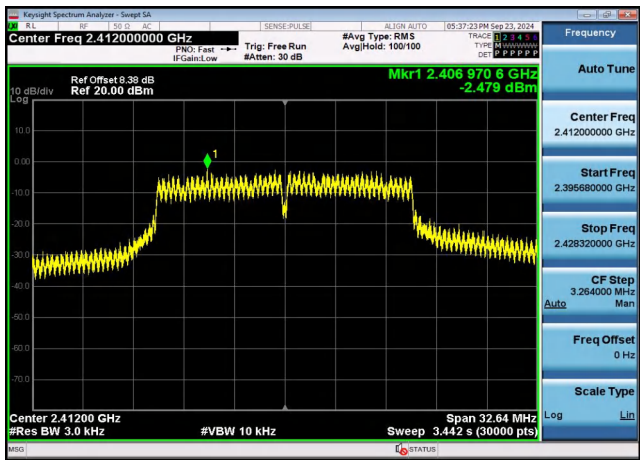

CH01

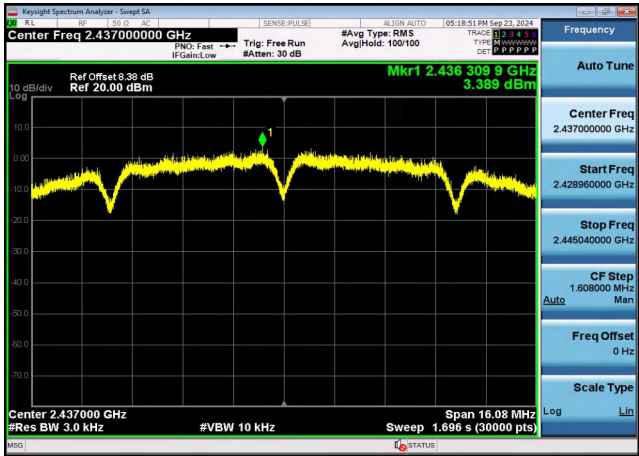


CH01

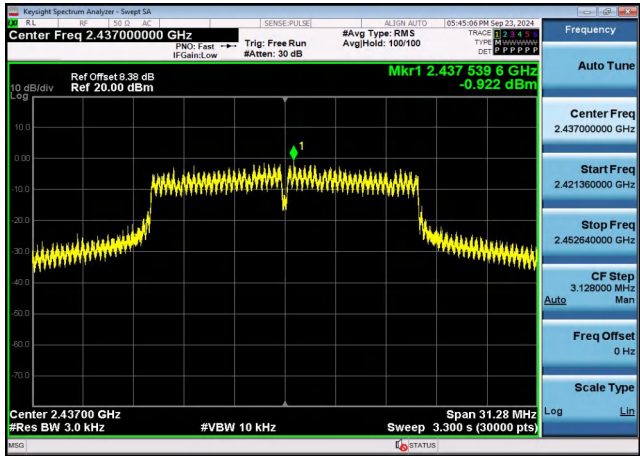

CH06



CH06

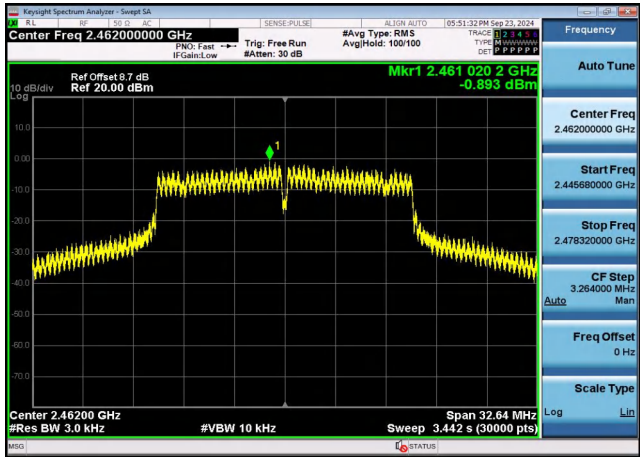

CH11

CH11