

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3**

TEST REPORT

For

AX5400 Wall Plate Wi-Fi 6 Extender

MODEL NUMBER: EAP673-Extender

REPORT NUMBER: 4791358424-1-RF-1

ISSUE DATE: August 20, 2024

**FCC ID:2BCGWEAP673EXTR
IC:31152-EAP673EXTR**

Prepared for

**TP-LINK CORPORATION PTE. LTD.
7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	August 20, 2024	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>12</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>13</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>14</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	15
7. ANTENNA PORT TEST RESULTS	18
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>18</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>19</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>21</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>23</i>
7.5. <i>DUTY CYCLE</i>	<i>25</i>
8. RADIATED TEST RESULTS.....	26
8.1. <i>RESTRICTED BANDEDGE</i>	<i>34</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>79</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>85</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>131</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>134</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....</i>	<i>136</i>
9. ANTENNA REQUIREMENT	138
10. AC POWER LINE CONDUCTED EMISSION	139

11.	TEST DATA.....	143
11.1.	APPENDIX A: DTS BANDWIDTH.....	143
11.1.1.	Test Result.....	143
11.1.2.	Test Graphs	145
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	165
11.2.1.	Test Result.....	165
11.2.2.	Test Graphs	167
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	187
11.3.1.	Test Result.....	187
11.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	189
11.4.1.	Test Result.....	189
11.4.2.	Test Graphs	191
11.5.	APPENDIX E: BAND EDGE MEASUREMENTS.....	211
11.5.1.	Test Result.....	211
11.5.2.	Test Graphs	212
11.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION	228
11.6.1.	Test Result.....	228
11.6.2.	Test Graphs	232
11.7.	APPENDIX G: DUTY CYCLE.....	292
11.7.1.	Test Result.....	292
11.7.2.	Test Graphs	293

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: TP-LINK CORPORATION PTE. LTD.
Address: 7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

Manufacturer Information


Company Name: TP-LINK CORPORATION PTE. LTD.
Address: 7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

EUT Information

EUT Name: AX5400 Wall Plate Wi-Fi 6 Extender
Model: EAP673-Extender
Brand: tp-link
Sample Received Date: June 7, 2024
Sample Status: Normal
Sample ID: 7328379
Date of Tested: July 8, 2024 to August 20, 2024


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass

Prepared By:



Fanny Huang
Engineer Project Associate

Checked By:



Kebo Zhang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISSED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISSED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name/PMN	AX5400 Wall Plate Wi-Fi 6 Extender
Model/HVIN	EAP673-Extender
FVIN:	V1.0

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax: OFDM(1024-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/11n HT40/ax HE20/ax HE40
Normal Test Voltage:	AC 120 V, 60 Hz
Power Supply:	100-240V~ 50/60Hz 0.5A

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	25.54
g	2412 ~ 2462	1-11[11]	25.35
n HT20	2412 ~ 2462	1-11[11]	25.17
n HT40	2422 ~ 2452	3-9[7]	24.10
ax HE20	2412 ~ 2462	1-11[11]	24.97
ax HE40	2422 ~ 2452	3-9[7]	22.33

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
g	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
n HT20	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
n HT40	CH 3, CH4, CH 6, CH8, CH 9	2422, 2427, 2437, 2447, 2452
ax HE20	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
ax HE40	CH 3, CH4, CH 6, CH8, CH 9	2422, 2427, 2437, 2447, 2452

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band		
Test Software	QSPR	
Mode	Freq (MHz)	Tx power level from QSPR(dBm)
802. 11b-CDD	2412	21. 5
	2417	21. 5
	2437	21. 5
	2457	21. 5
	2462	21. 5
802. 11g-CDD	2412	19. 5
	2417	20. 5
	2437	21. 5
	2457	20. 5
	2462	19. 5
802. 11n 20M	2412	18. 5
	2417	20. 5
	2437	21. 5
	2457	20. 5
	2462	18
802. 11n 40M	2422	18
	2427	20
	2437	19. 5
	2447	15. 5
	2452	15
802. 11ax 20M	2412	18. 5

	2417	19.5
	2437	21.5
	2457	19.5
	2462	15
802. 11ax 40M	2422	18
	2427	18
	2437	17.5
	2447	15
	2452	15

5.6. WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b CDD mode: 1 Mbps

802.11g CDD mode: 6 Mbps

802.11n HT20 CDD mode: MCS0

802.11n HT40 CDD mode: MCS0

802.11ax HE20 CDD mode & TX beamforming mode: MCS0

802.11ax HE40 CDD mode & TX beamforming mode: MCS0

All modes support CDD mode.

802.11ax mode support TX beamforming mode.

For 802.11ax mode, the EUT support Cyclic Shift Diversity (CDD) and TX Beamforming. The power level of TX Beamforming mode is reduced 3 by CDD mode, meanwhile, the power of TX Beamforming mode will be reduced 3dB by CDD mode. Therefore, conducted power of CDD mode is higher than TX Beamforming mode, and the EIRP of CDD is the same as TX Beamforming mode, so we only chose the worst-case mode CDD for final testing.

The EUT has 4 antennas, ANT3, ANT4 support WIFI 2.4G band, ANT1 support BLE, and all antennas support WIFI 5G band.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
3	2412-2462	Dipole Antenna	2
4	2412-2462	Dipole Antenna	2

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5.01 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

For TX Beamforming:

Directional gain= $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 5 \text{ dBi}$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 2TX, 2RX	ANT 3 and ANT 4 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 2TX, 2RX	ANT 3 and ANT 4 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 2TX, 2RX	ANT 3 and ANT 4 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒ 2TX, 2RX	ANT 3 and ANT 4 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	☒ 2TX, 2RX	ANT 3 and ANT 4 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	☒ 2TX, 2RX	ANT 3 and ANT 4 can be used as transmitting/receiving antenna.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	ThinkPad	X230i	/	ThinkPad
2	Socket	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	LAN1	RJ45	Unshielded	1.0 m	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a laptop.

SETUP DIAGRAM FOR TESTS

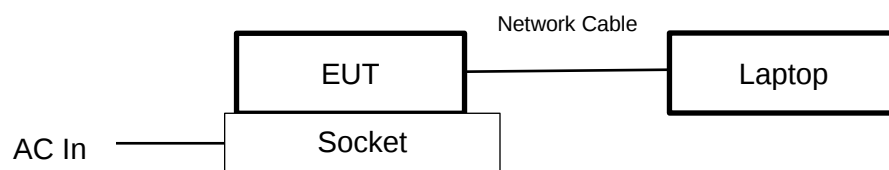

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer		Name		Version
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	/	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	June 28, 2024	Aug.27, 2027
Preamplifier	HP	8447D	2944A09099	/	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	/	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130939	/	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	/	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	June 30, 2024	June 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	/	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	/	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	/	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	/	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	/	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	/	Oct.12, 2023	Oct.11, 2024

Software			
Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V 60 Hz

TEST DATE / ENGINEER

Test Date	June 14, 2024	Test By	Johnson Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP**TEST ENVIRONMENT**

Temperature	25.3℃	Relative Humidity	60.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V 60 Hz

TEST DATE / ENGINEER

Test Date	June 14, 2024	Test By	Johnson Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V 60 Hz

TEST DATE / ENGINEER

Test Date	June 14, 2024	Test By	Johnson Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP**TEST ENVIRONMENT**

Temperature	25.3℃	Relative Humidity	60.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V 60 Hz

TEST DATE / ENGINEER

Test Date	June 14, 2024	Test By	Johnson Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

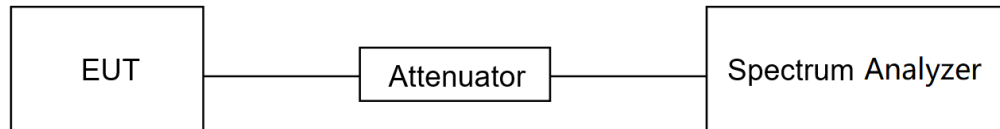

TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V 60 Hz

TEST DATE / ENGINEER

Test Date	June 14, 2024	Test By	Johnson Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.6
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

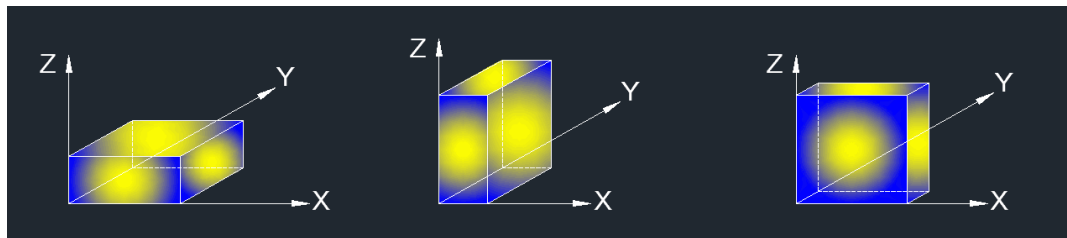

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

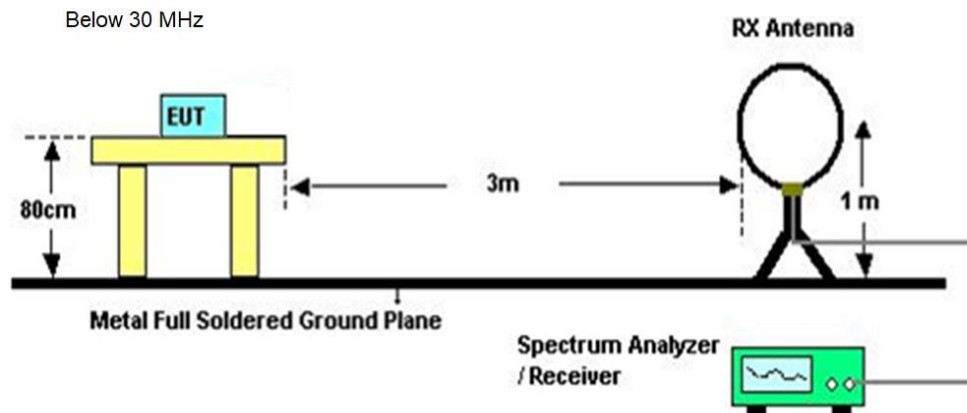

Below 1 GHz and above 30 MHz

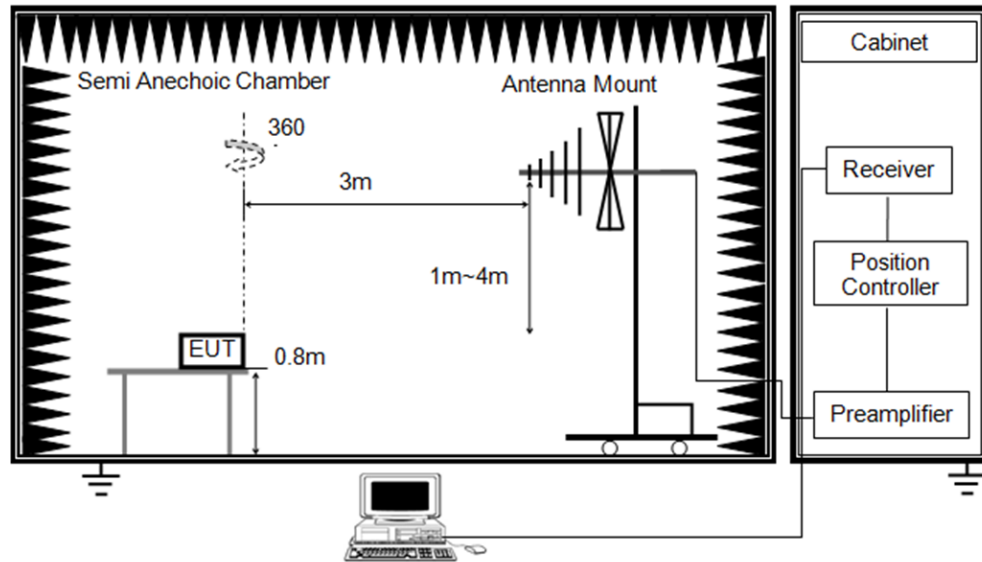

Above 1 GHz

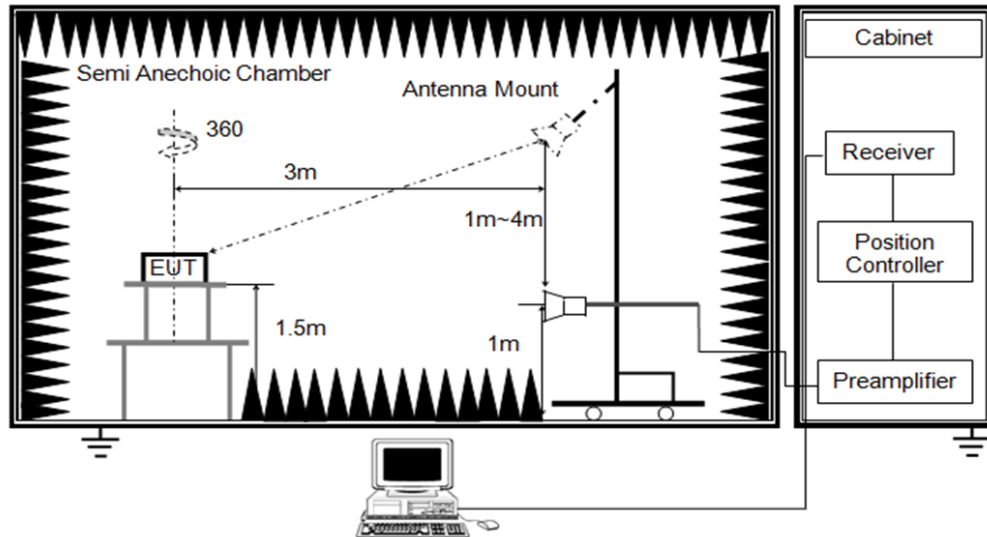

TEST ENVIRONMENT

Temperature	20.7°C	Relative Humidity	58.1%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	July 8, 2024	Test By	Mason Wang
-----------	--------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

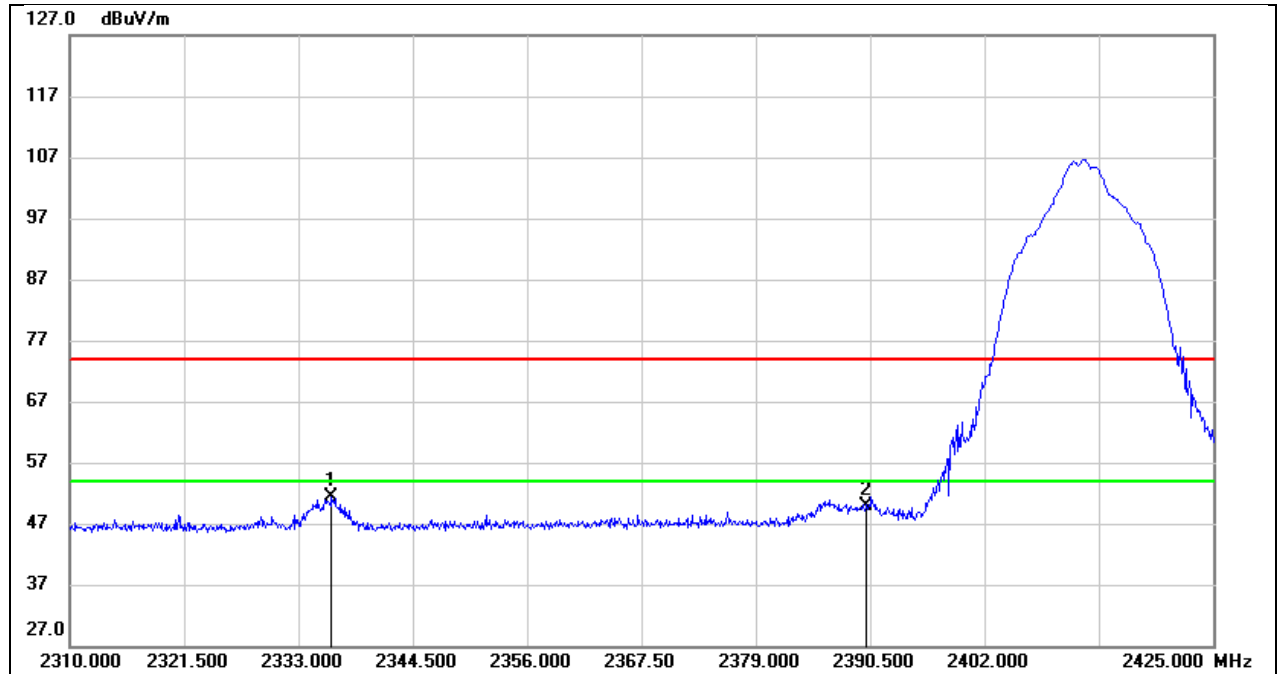


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.335	18.64	32.63	51.27	74.00	-22.73	peak
2	2390.000	16.93	32.92	49.85	74.00	-24.15	peak

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

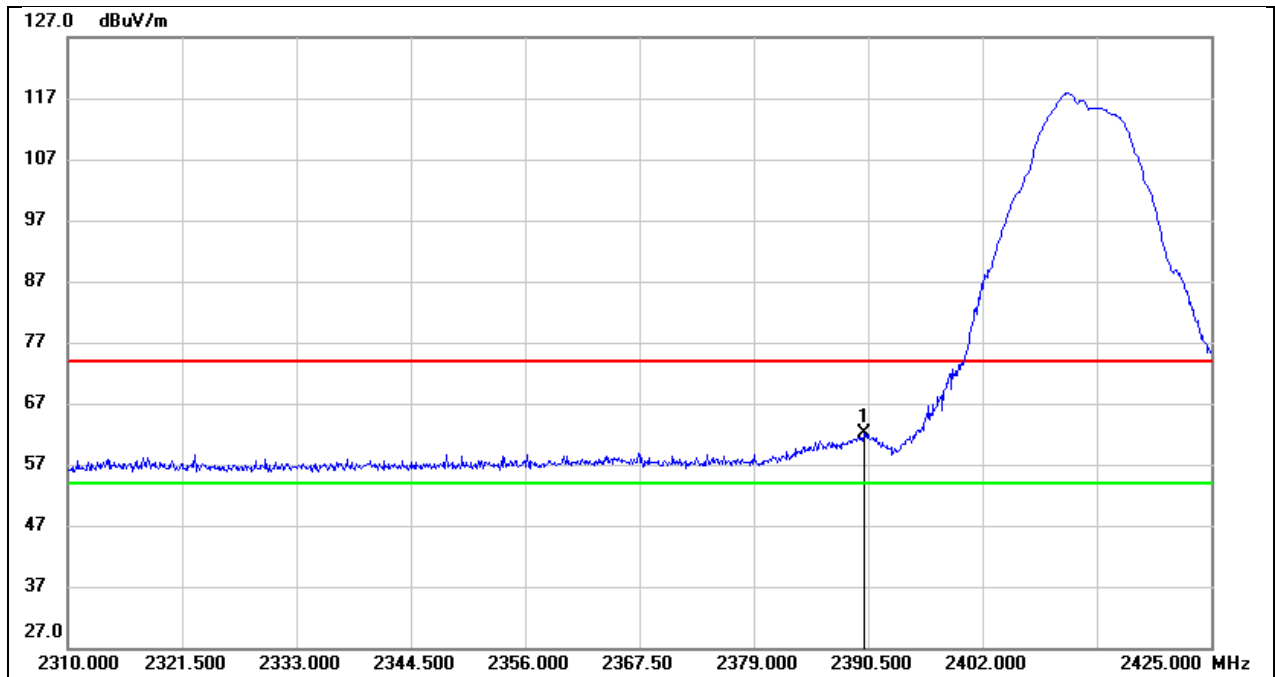


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.11	32.92	62.03	74.00	-11.97	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

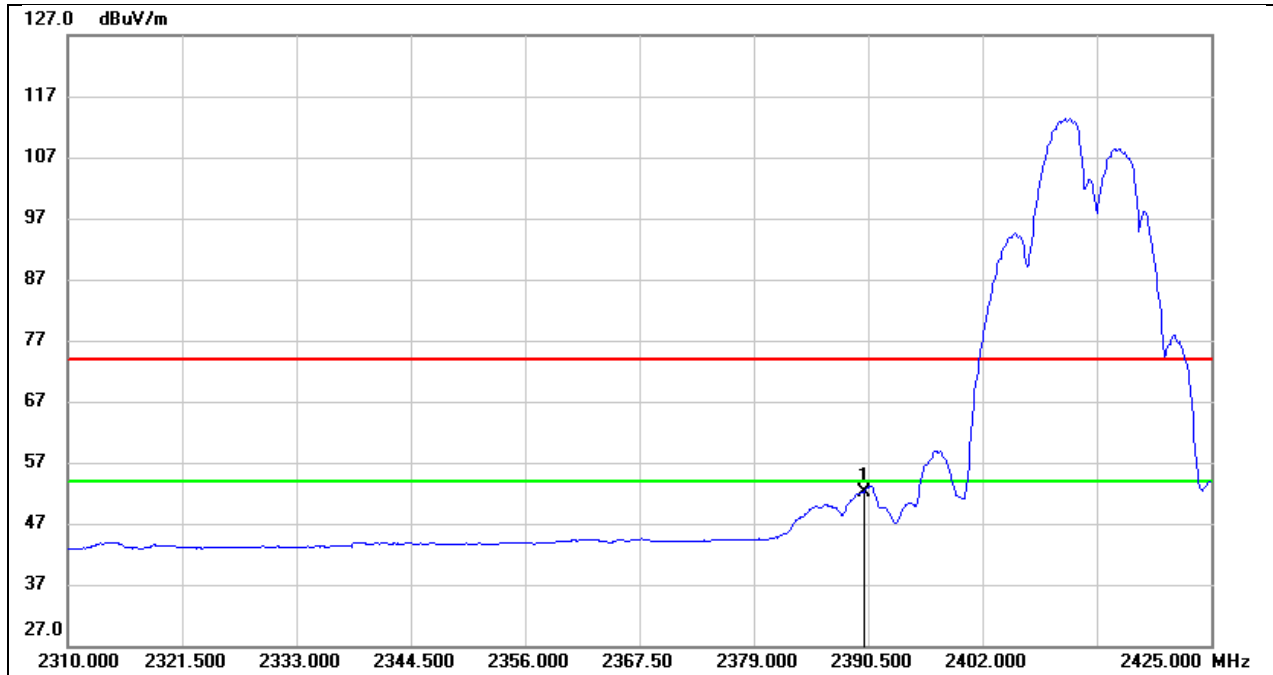


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.30	32.92	52.22	54.00	-1.78	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

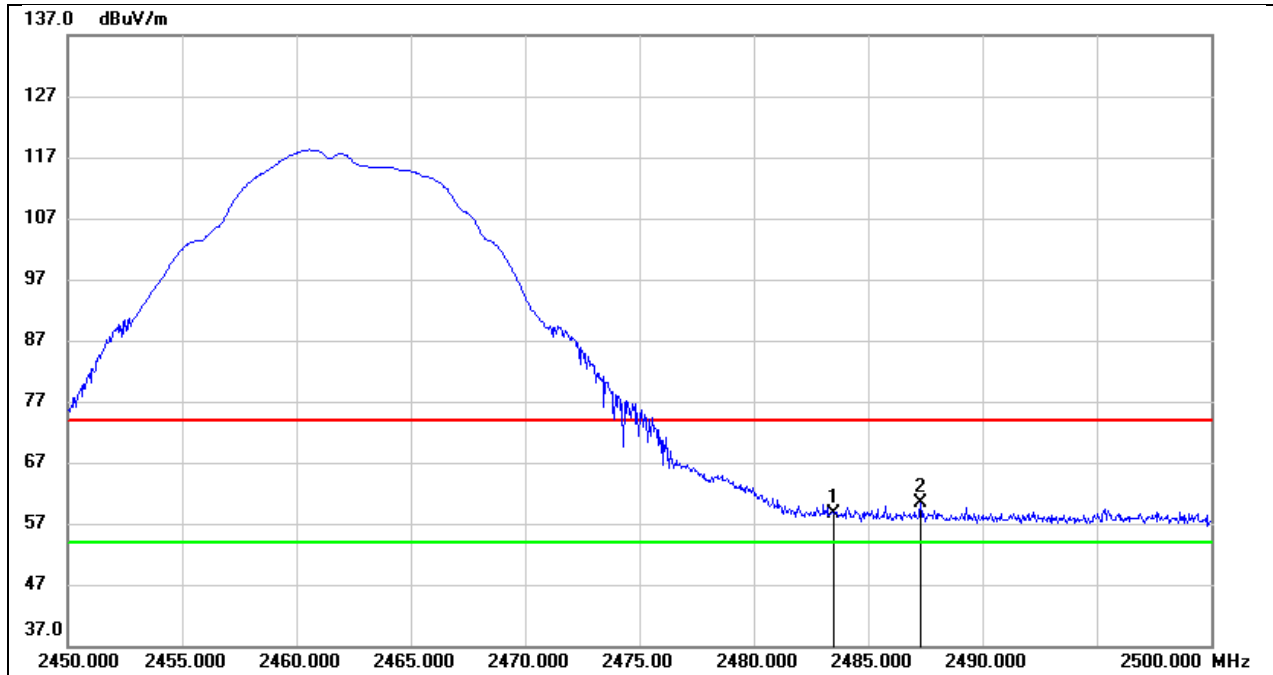


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.79	32.94	58.73	74.00	-15.27	peak
2	2487.300	27.47	32.94	60.41	74.00	-13.59	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

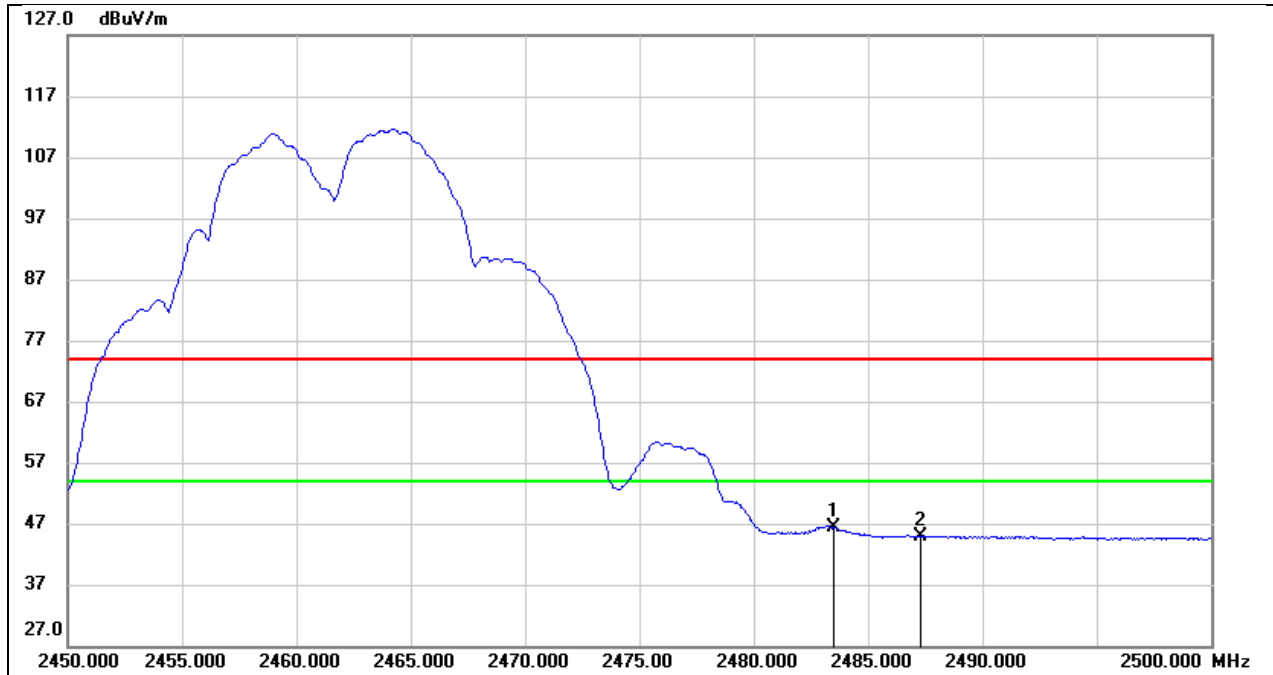


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	13.33	32.94	46.27	54.00	-7.73	AVG
2	2487.300	11.85	32.94	44.79	54.00	-9.21	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

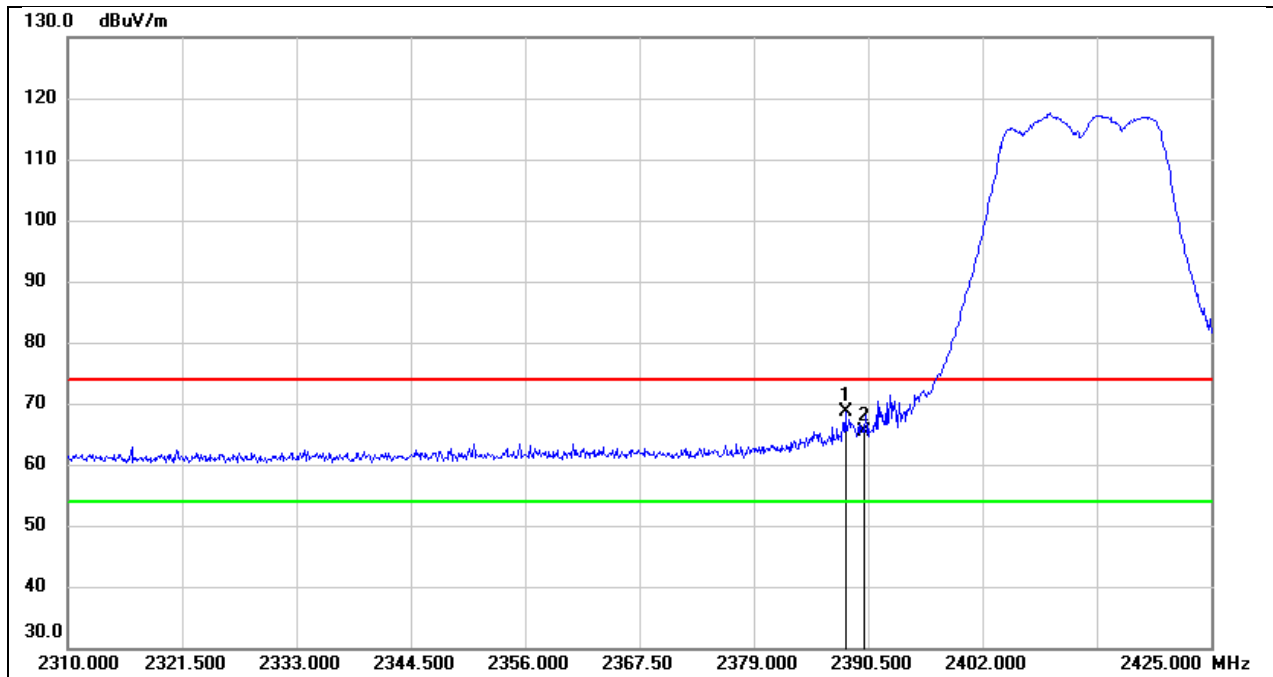


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.200	35.75	32.92	68.67	74.00	-5.33	peak
2	2390.000	32.56	32.92	65.48	74.00	-8.52	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

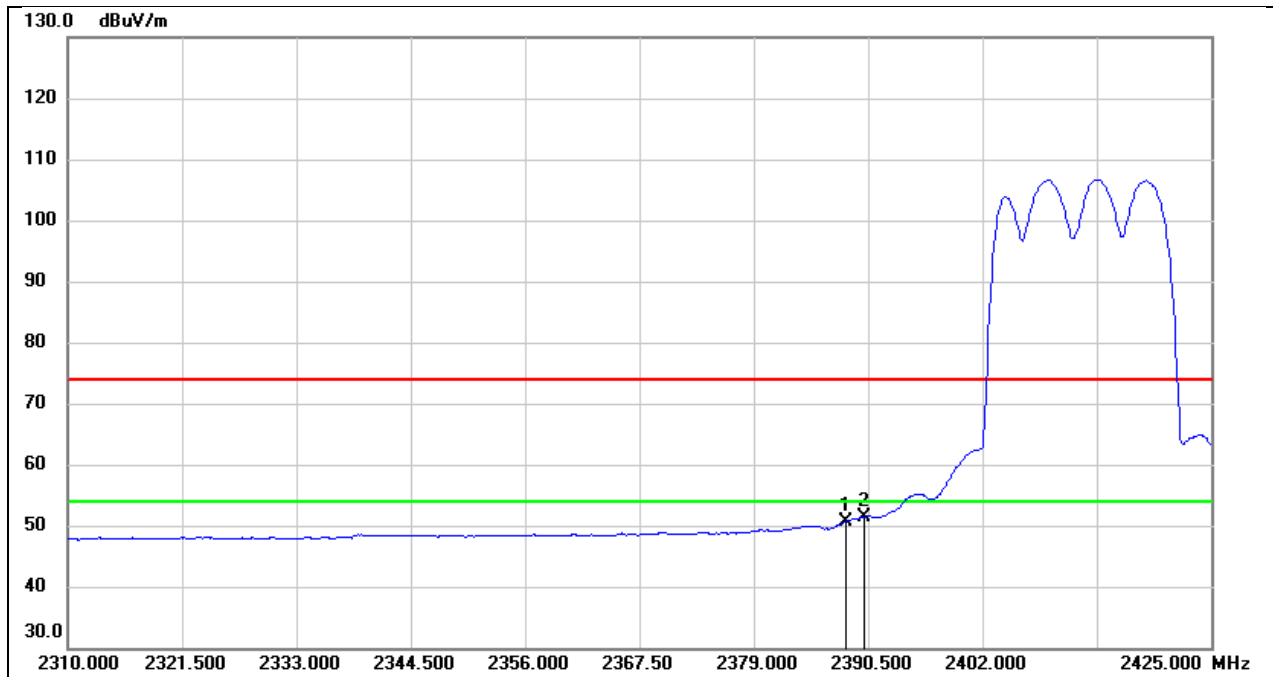


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.200	17.70	32.92	50.62	54.00	-3.38	AVG
2	2390.000	18.38	32.92	51.30	54.00	-2.70	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

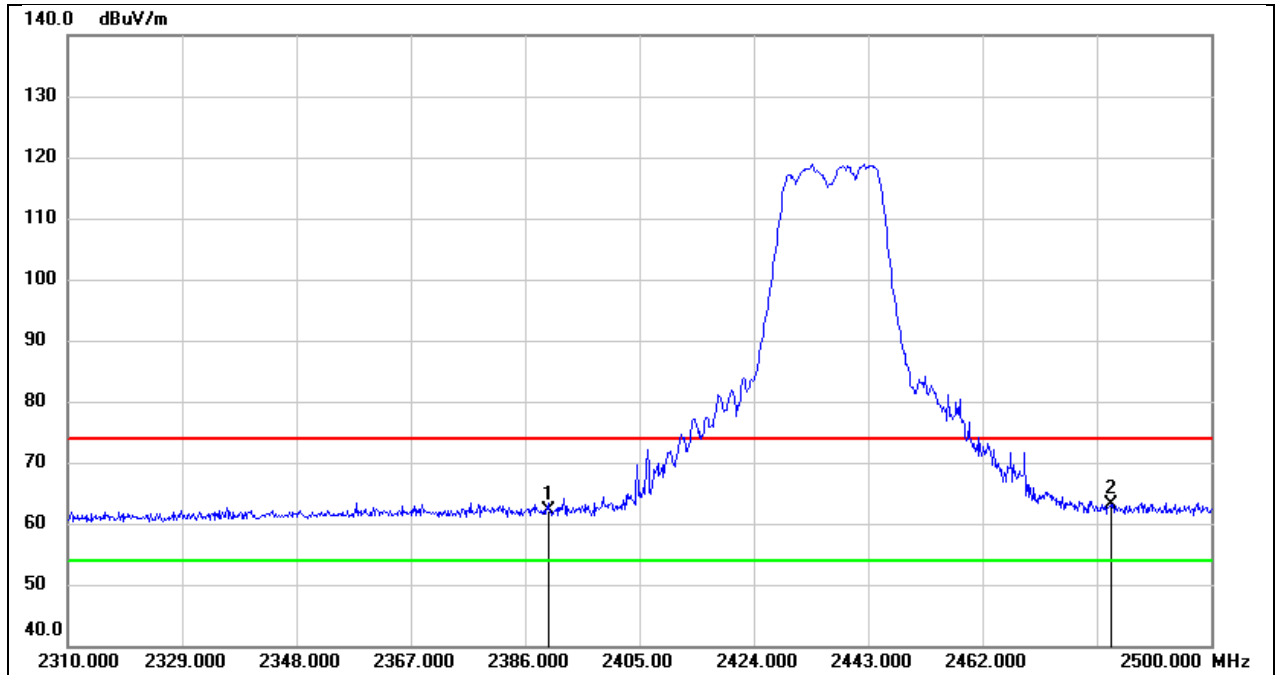


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.25	32.92	62.17	74.00	-11.83	peak
2	2483.500	30.07	32.94	63.01	74.00	-10.99	peak

Test Mode:	802.11g AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

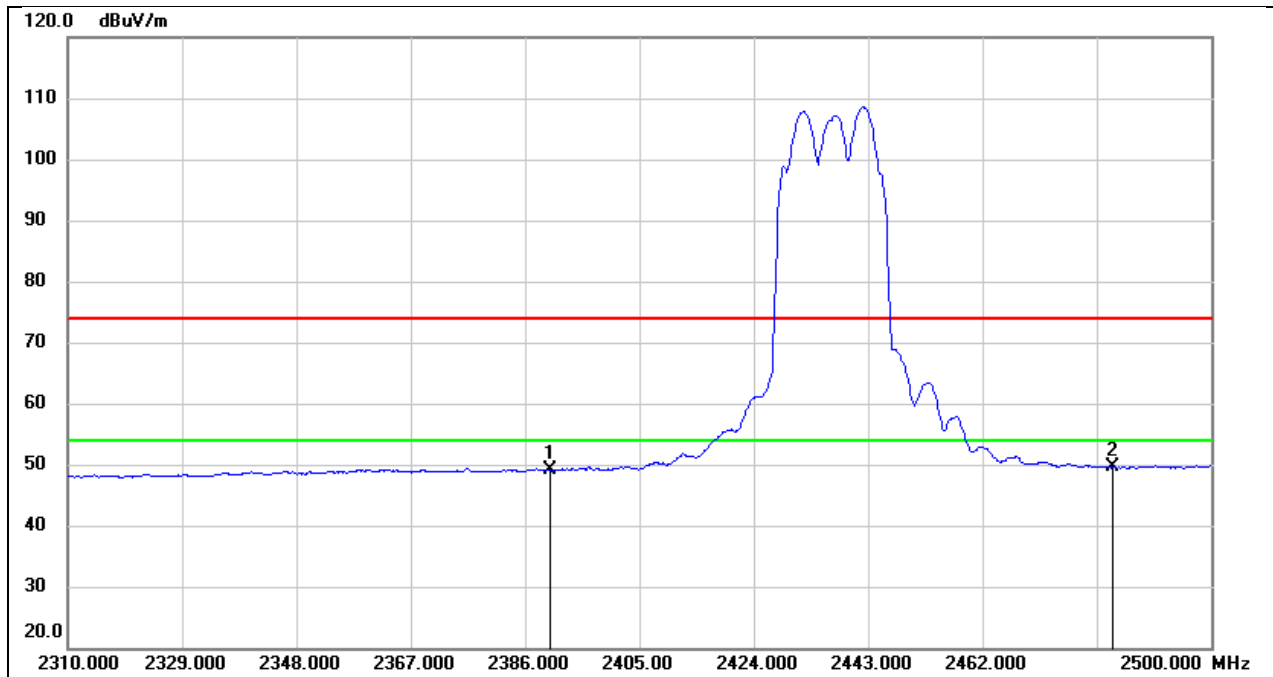


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.14	32.92	49.06	54.00	-4.94	AVG
2	2483.500	16.60	32.94	49.54	54.00	-4.46	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

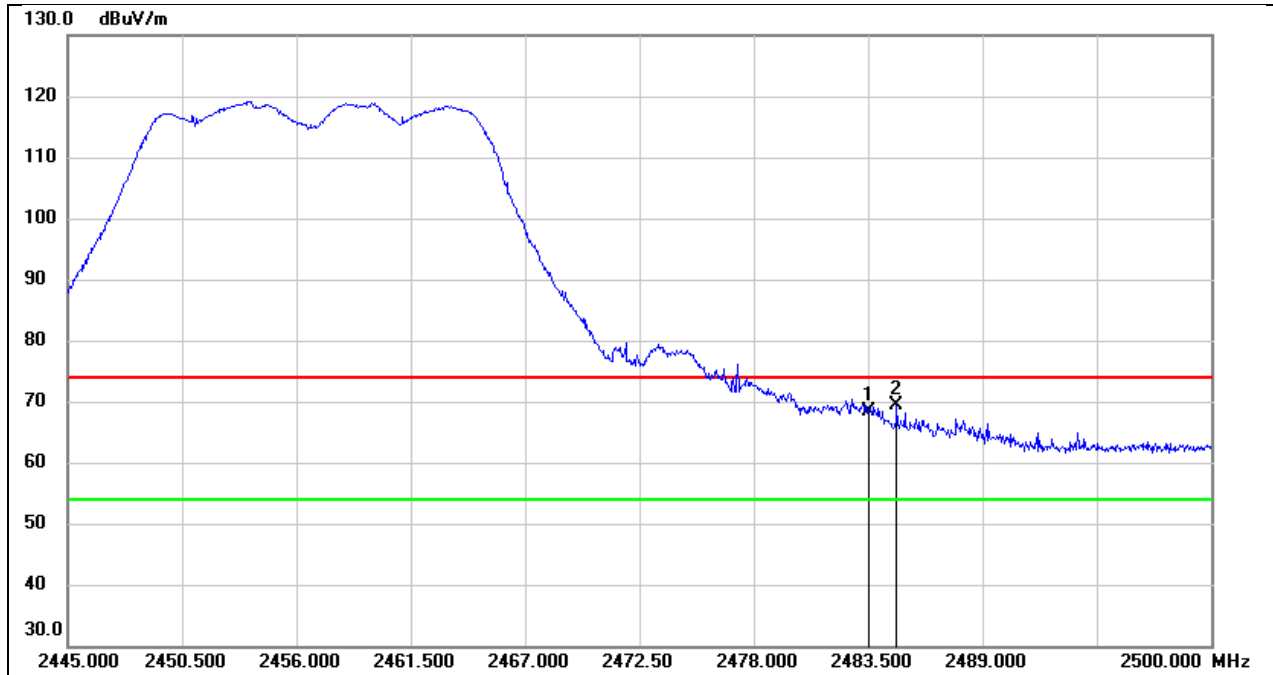


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.36	32.94	68.30	74.00	-5.70	peak
2	2484.875	36.36	32.94	69.30	74.00	-4.70	peak

Test Mode:	802.11g AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

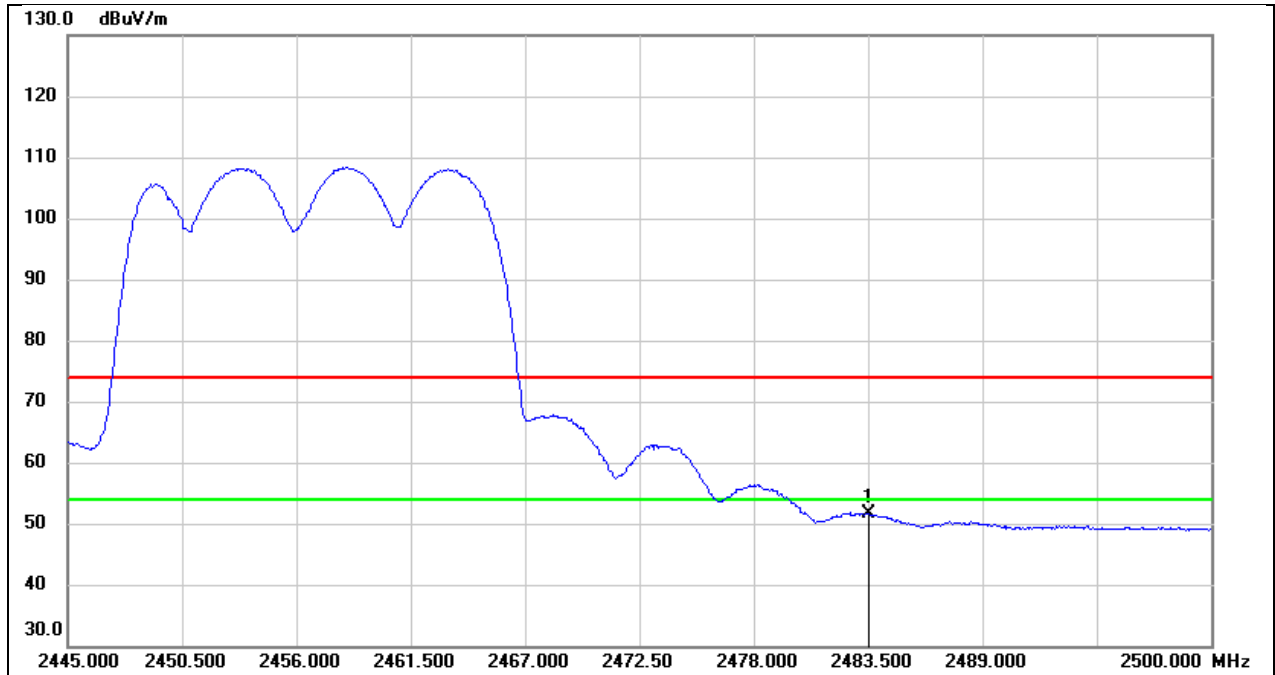


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.57	32.94	51.51	54.00	-2.49	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

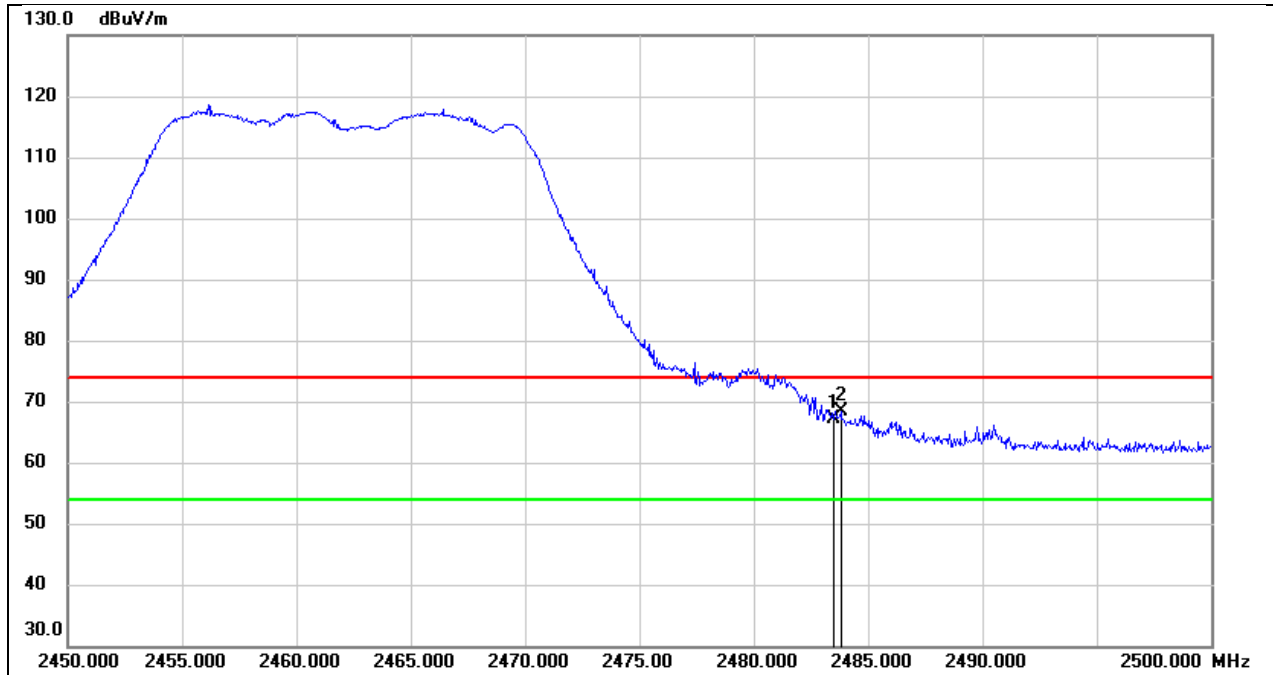


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.28	32.94	67.22	74.00	-6.78	peak
2	2483.800	35.39	32.94	68.33	74.00	-5.67	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

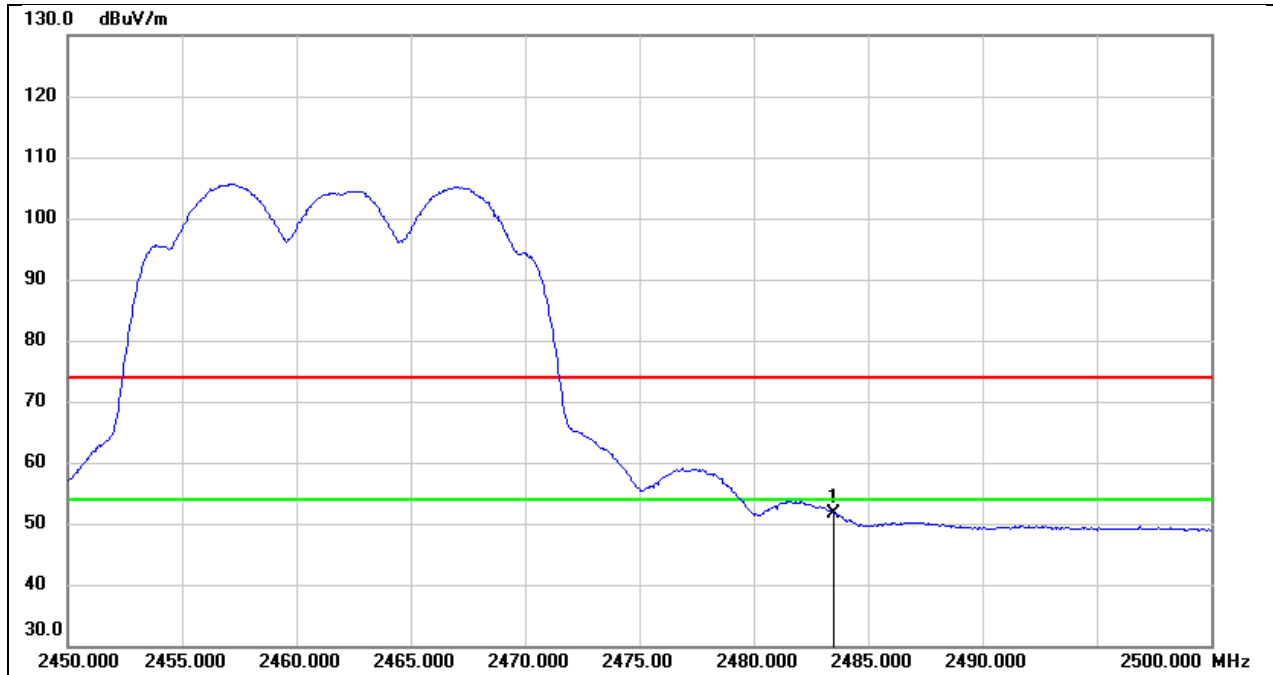


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.73	32.94	51.67	54.00	-2.33	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

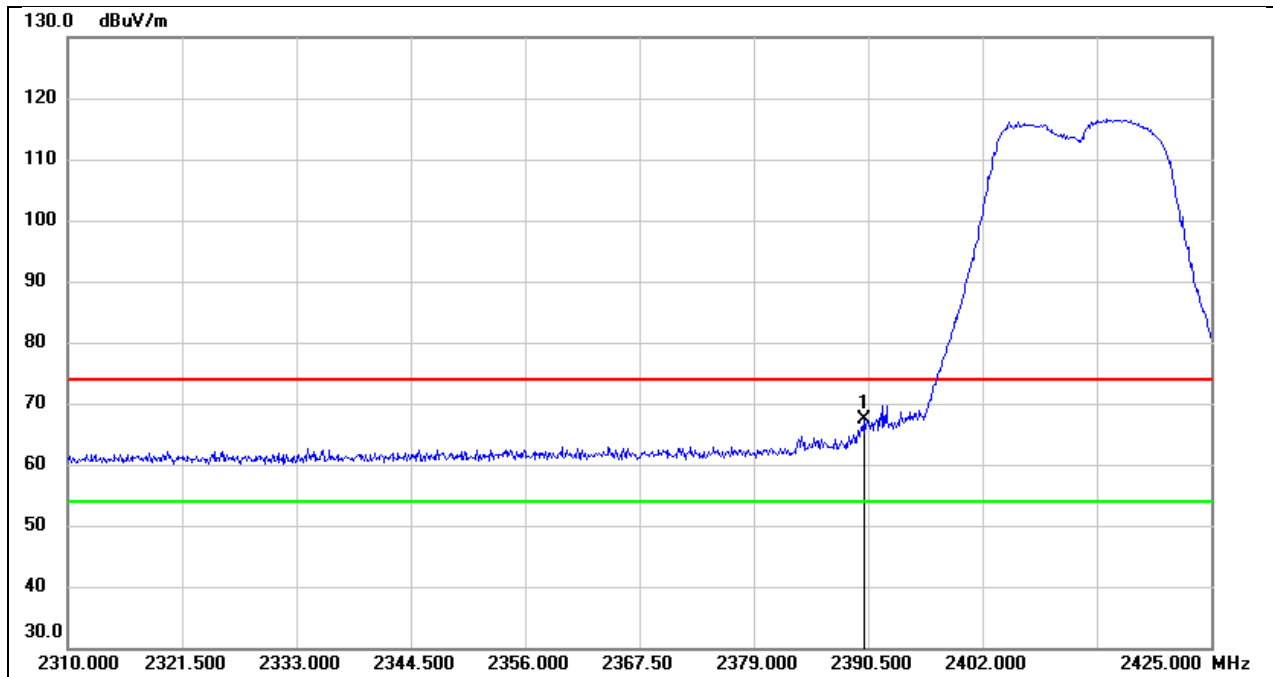


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	34.36	32.92	67.28	74.00	-6.72	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

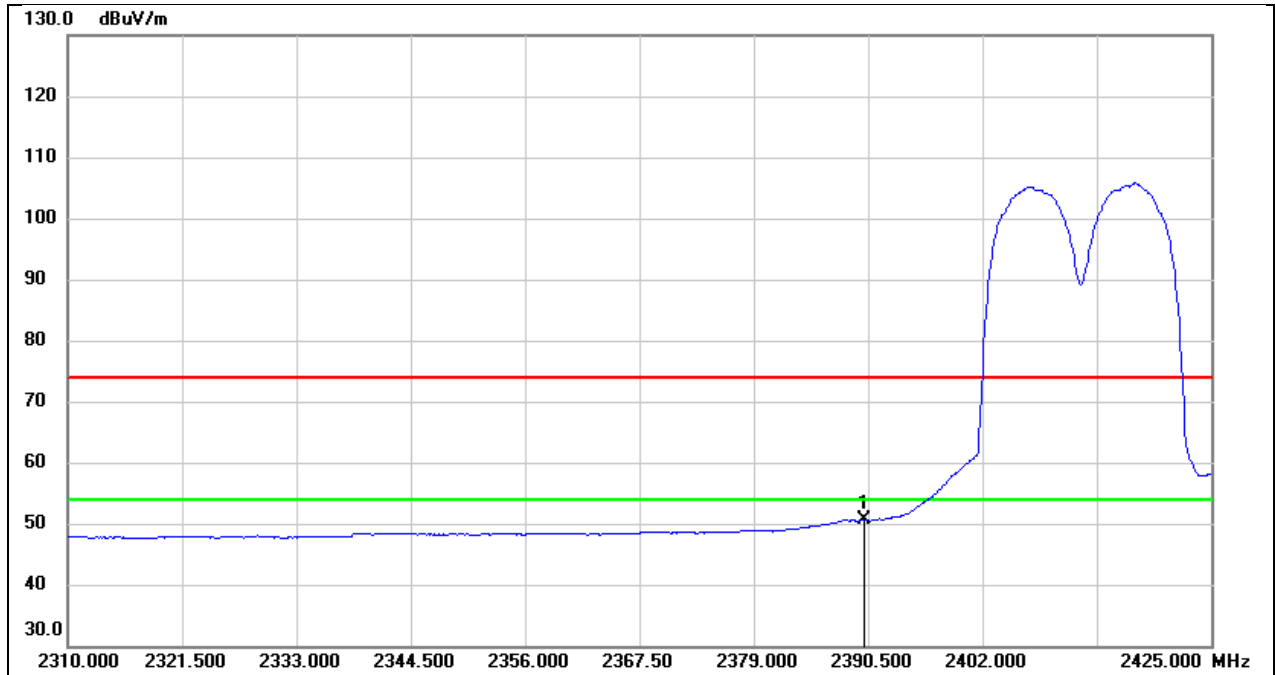


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	17.67	32.92	50.59	54.00	-3.41	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

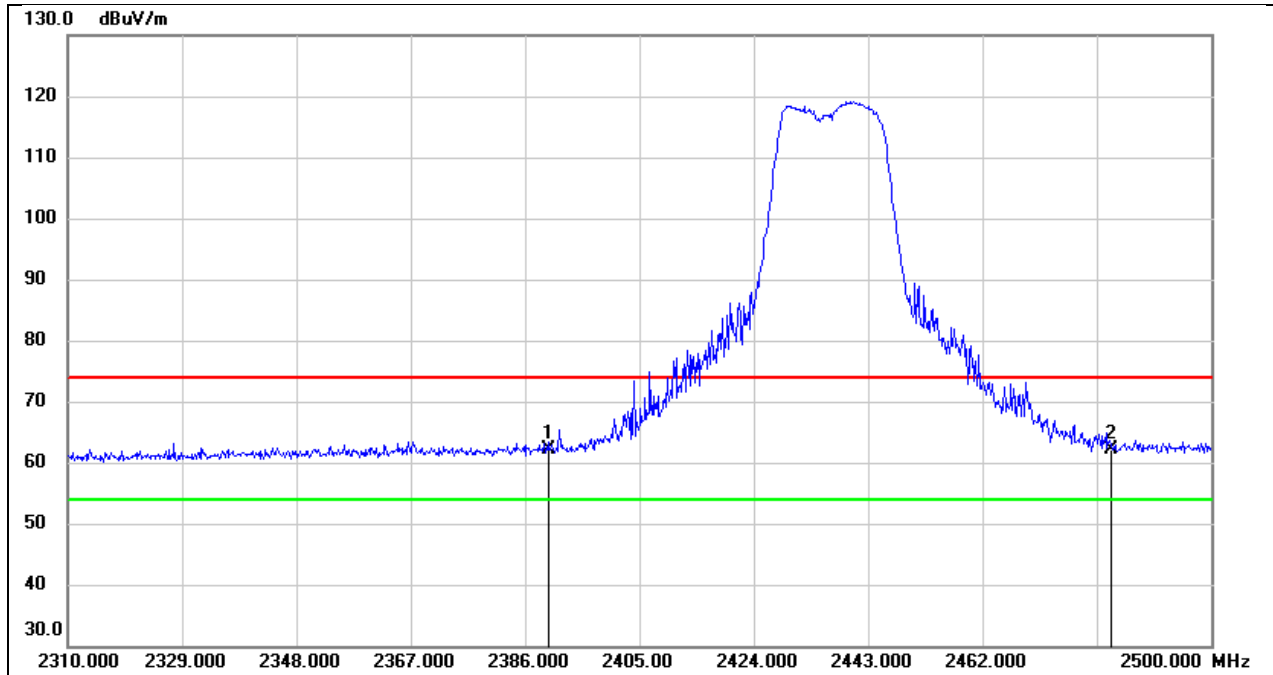


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.18	32.92	62.10	74.00	-11.90	peak
2	2483.500	29.22	32.94	62.16	74.00	-11.84	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

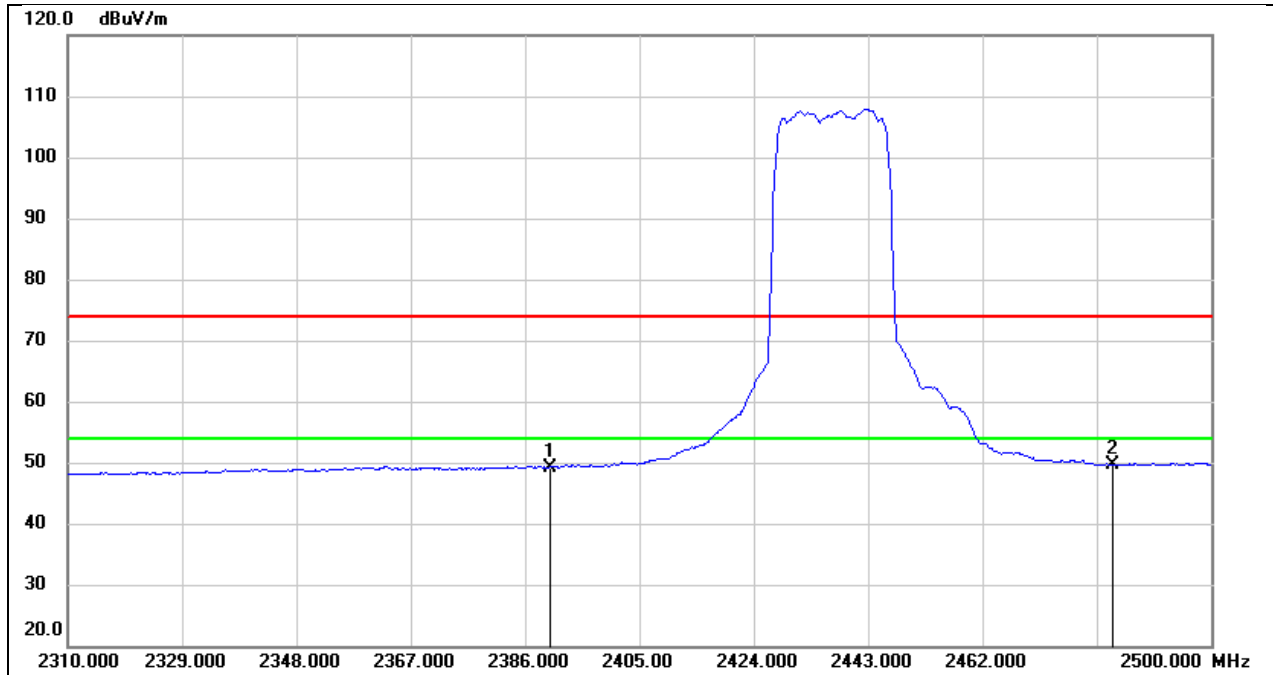


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.33	32.92	49.25	54.00	-4.75	AVG
2	2483.500	16.76	32.94	49.70	54.00	-4.30	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

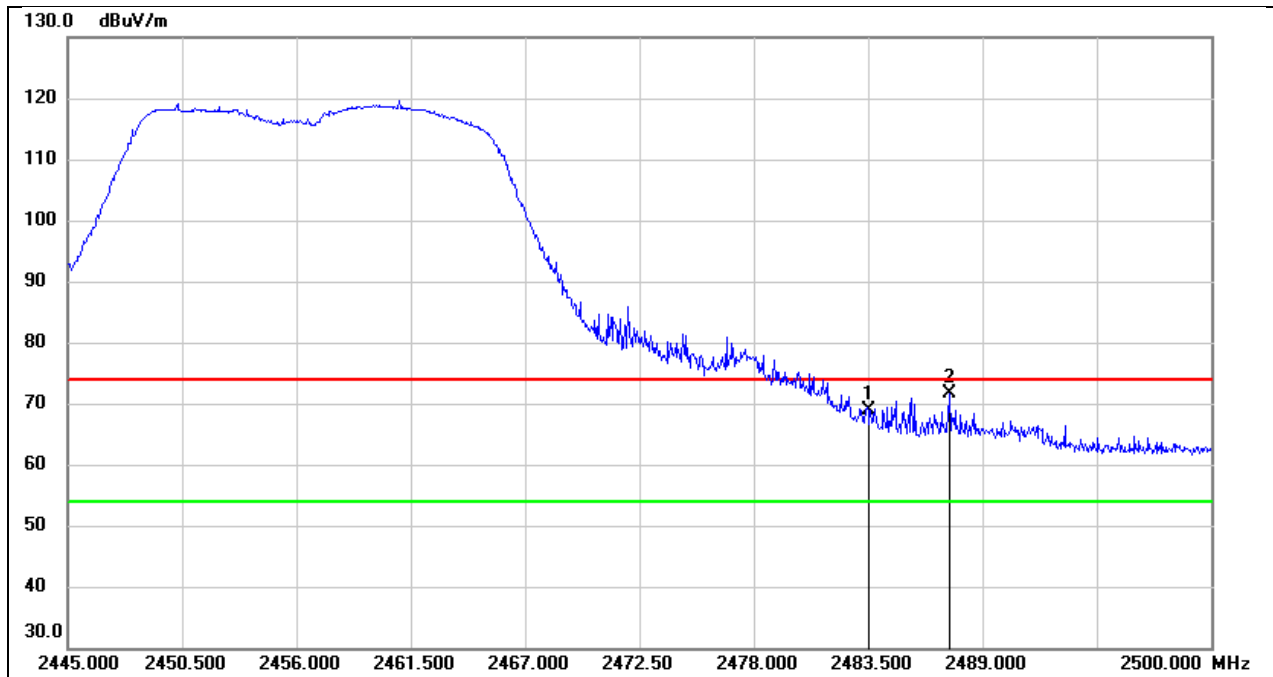


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.02	32.94	68.96	74.00	-5.04	peak
2	2487.405	38.59	32.94	71.53	74.00	-2.47	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

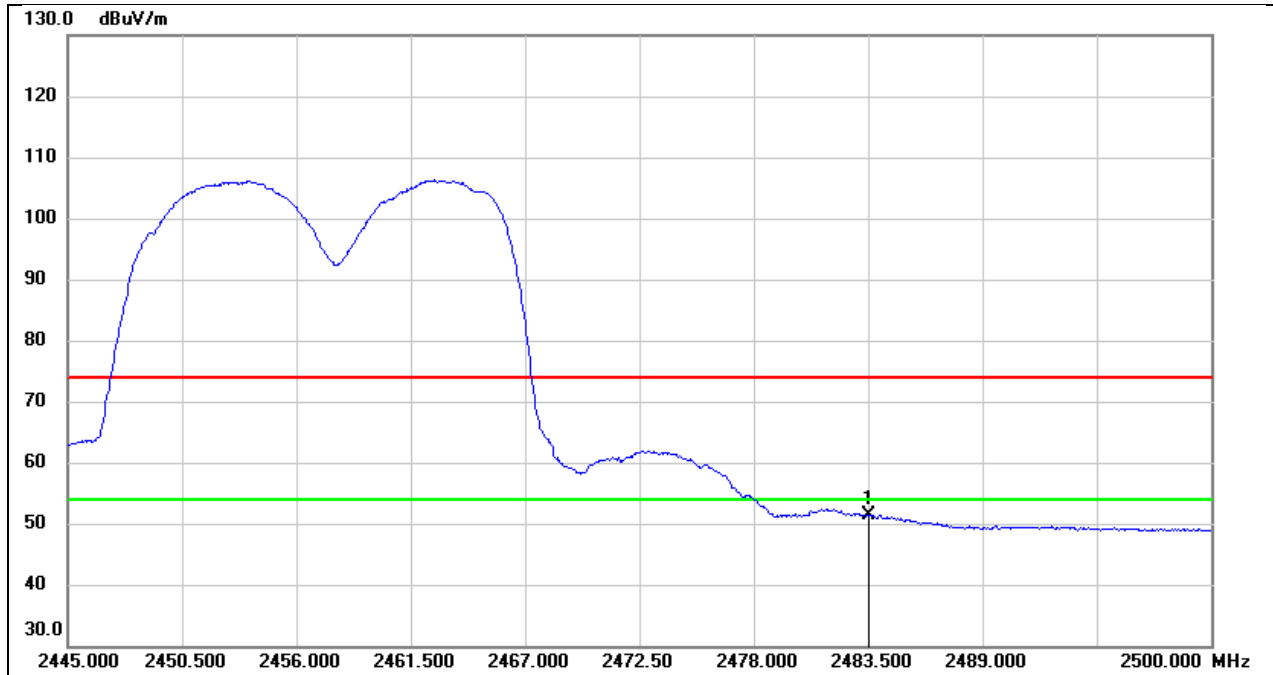


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.54	32.94	51.48	54.00	-2.52	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

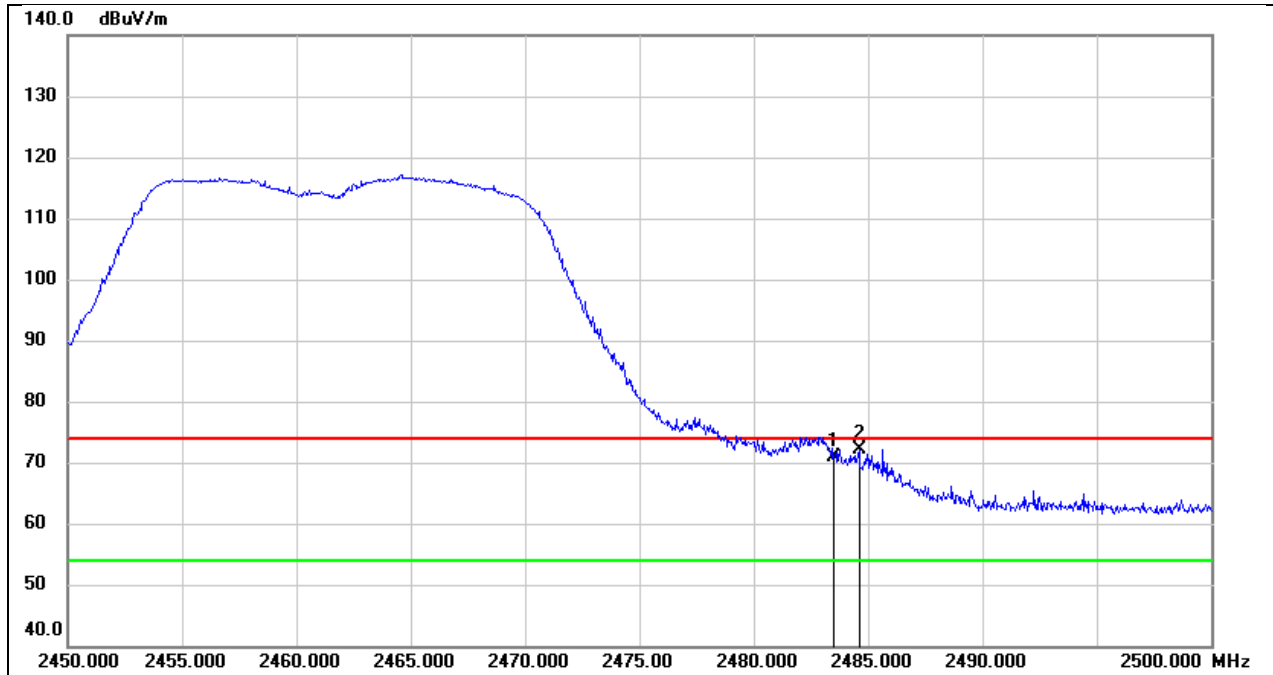


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.92	32.94	70.86	74.00	-3.14	peak
2	2484.600	39.31	32.94	72.25	74.00	-1.75	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

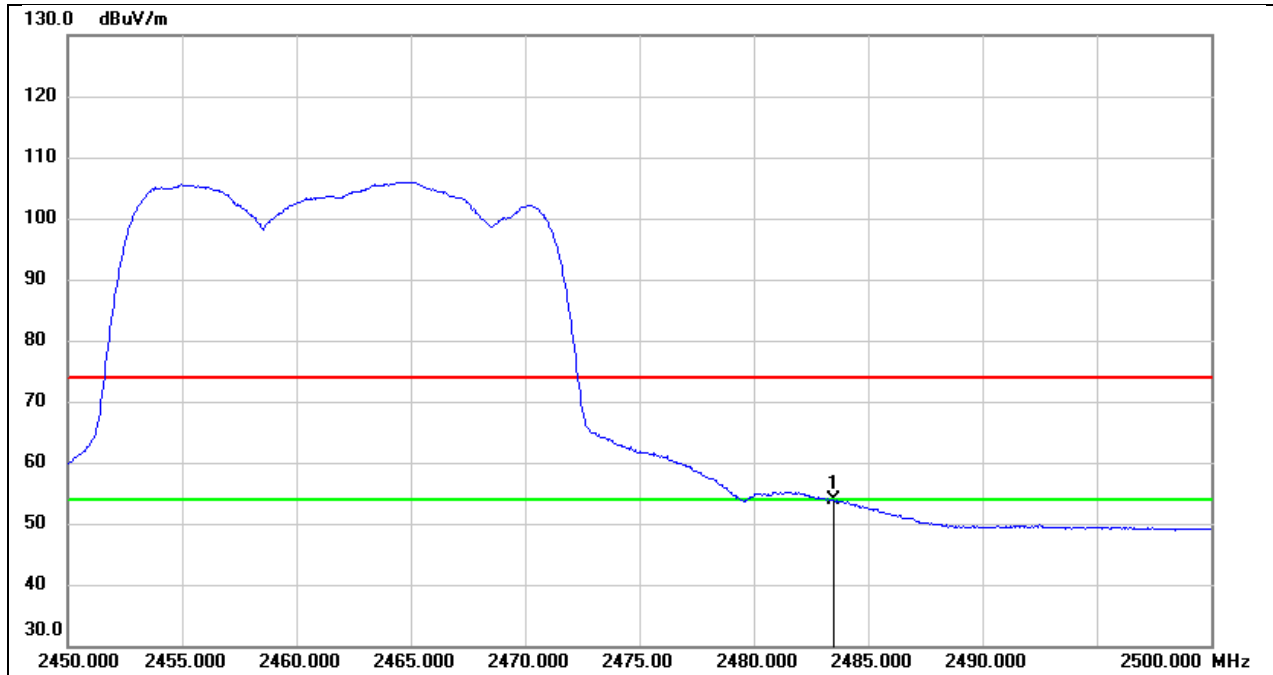


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.89	32.94	53.83	54.00	-0.17	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

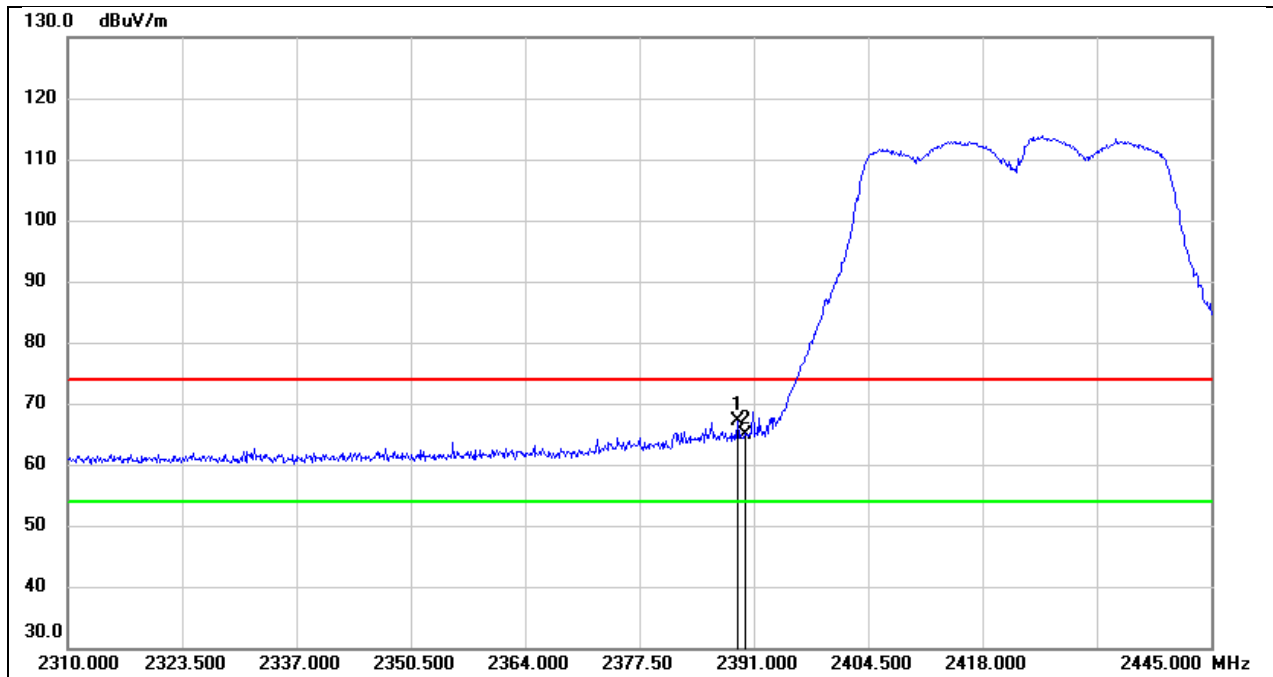


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.110	34.20	32.92	67.12	74.00	-6.88	peak
2	2390.000	31.88	32.92	64.80	74.00	-9.20	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

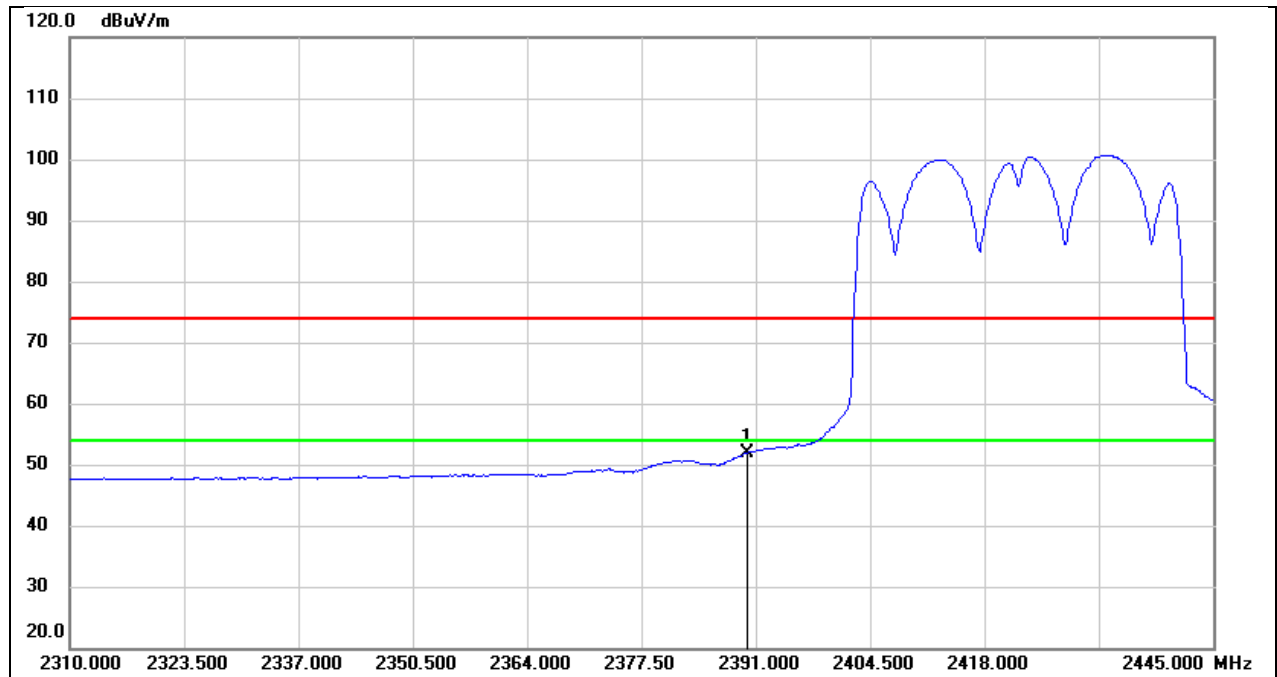


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.06	32.92	51.98	54.00	-2.02	AVG

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

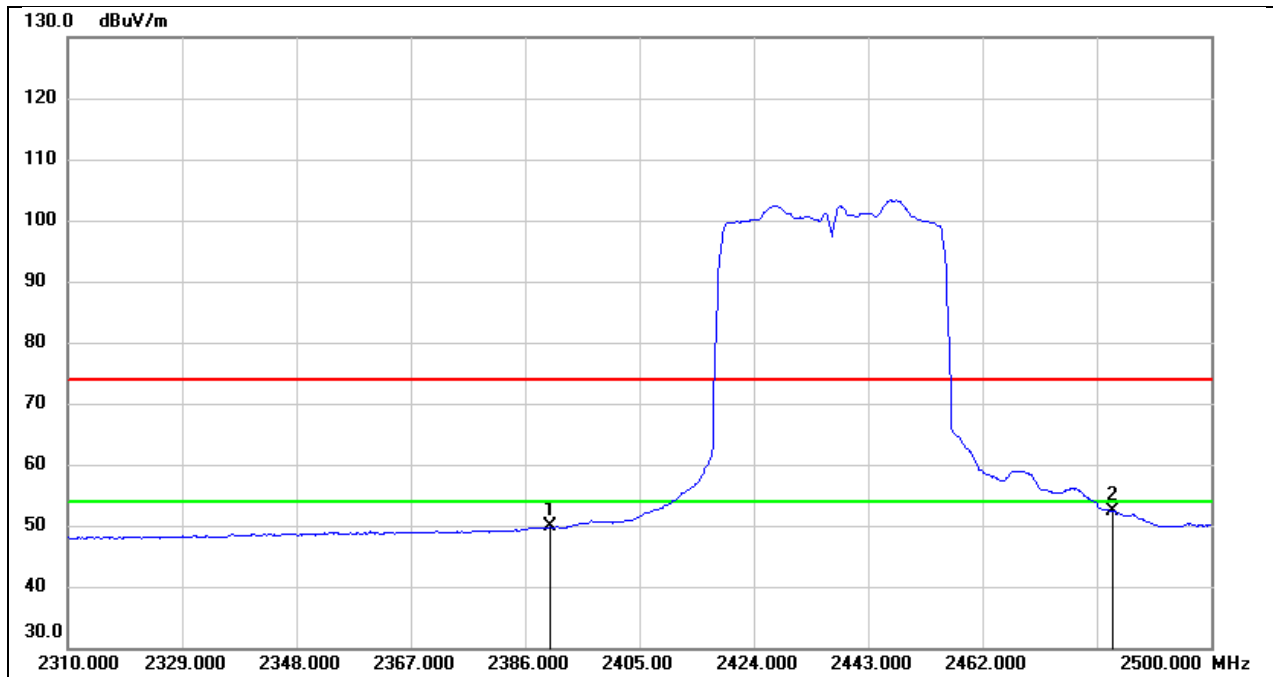


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.87	32.92	49.79	54.00	-4.21	AVG
2	2483.500	19.52	32.94	52.46	54.00	-1.54	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

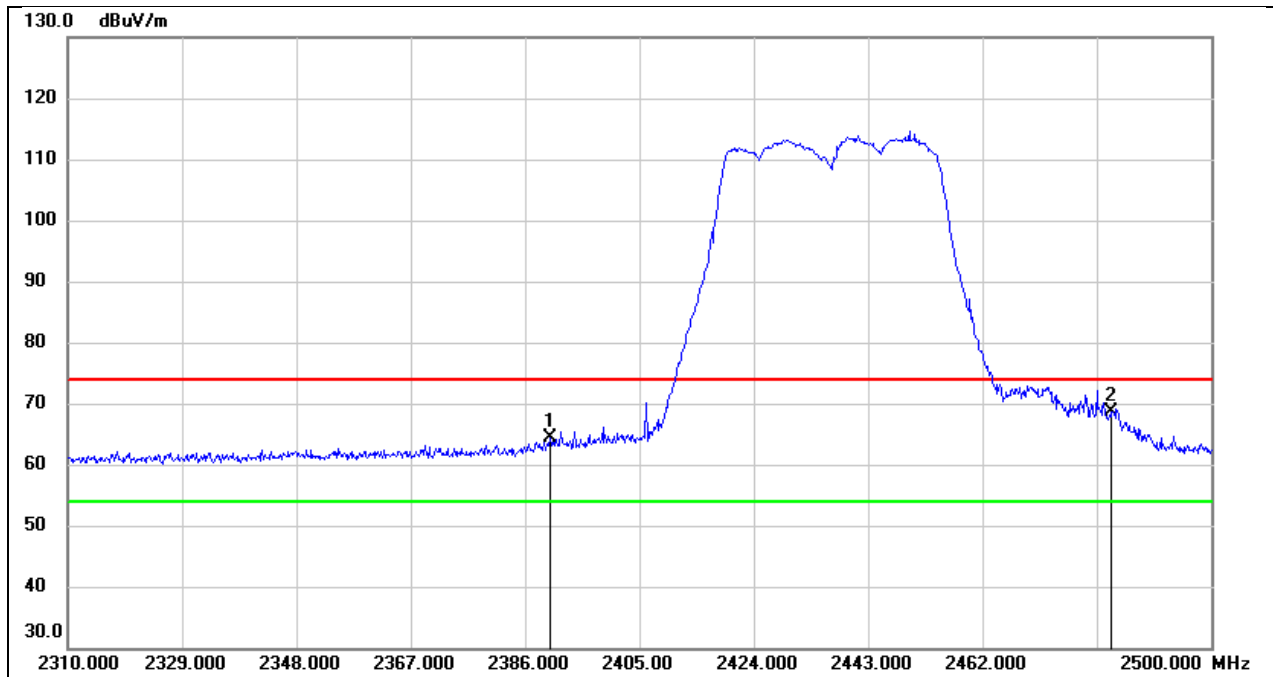


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	31.44	32.92	64.36	74.00	-9.64	peak
2	2483.500	35.67	32.94	68.61	74.00	-5.39	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

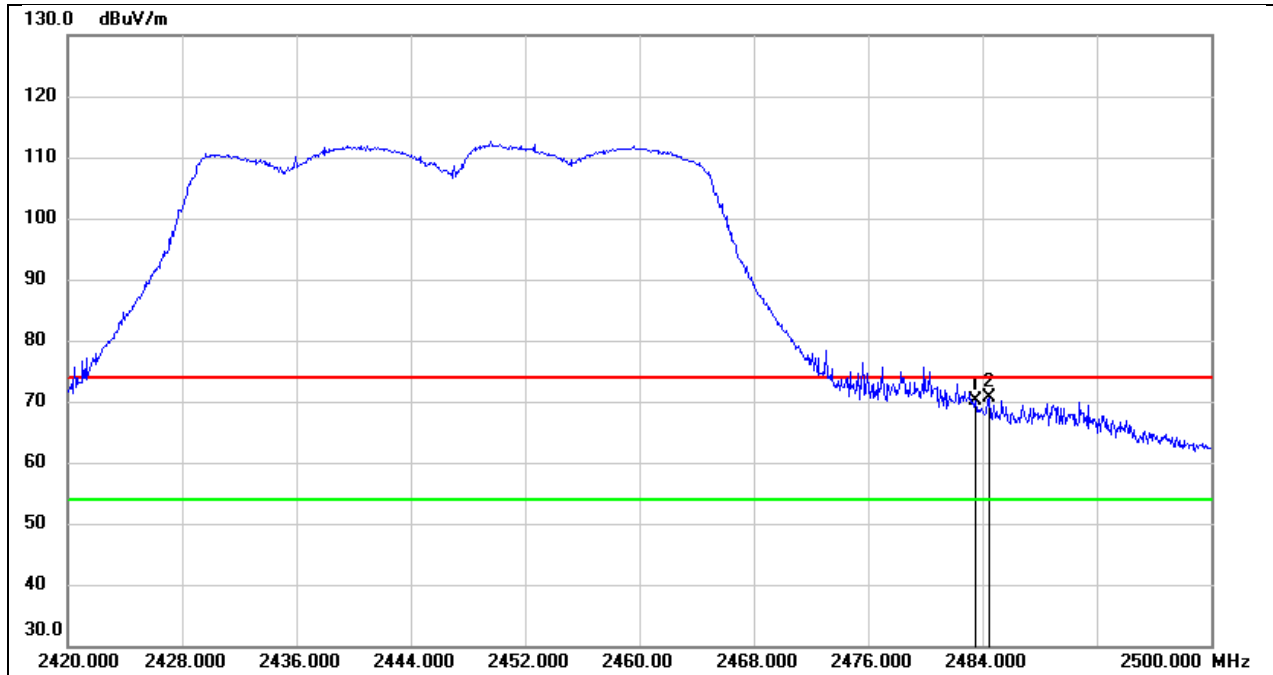


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.12	32.94	70.06	74.00	-3.94	peak
2	2484.480	37.77	32.94	70.71	74.00	-3.29	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

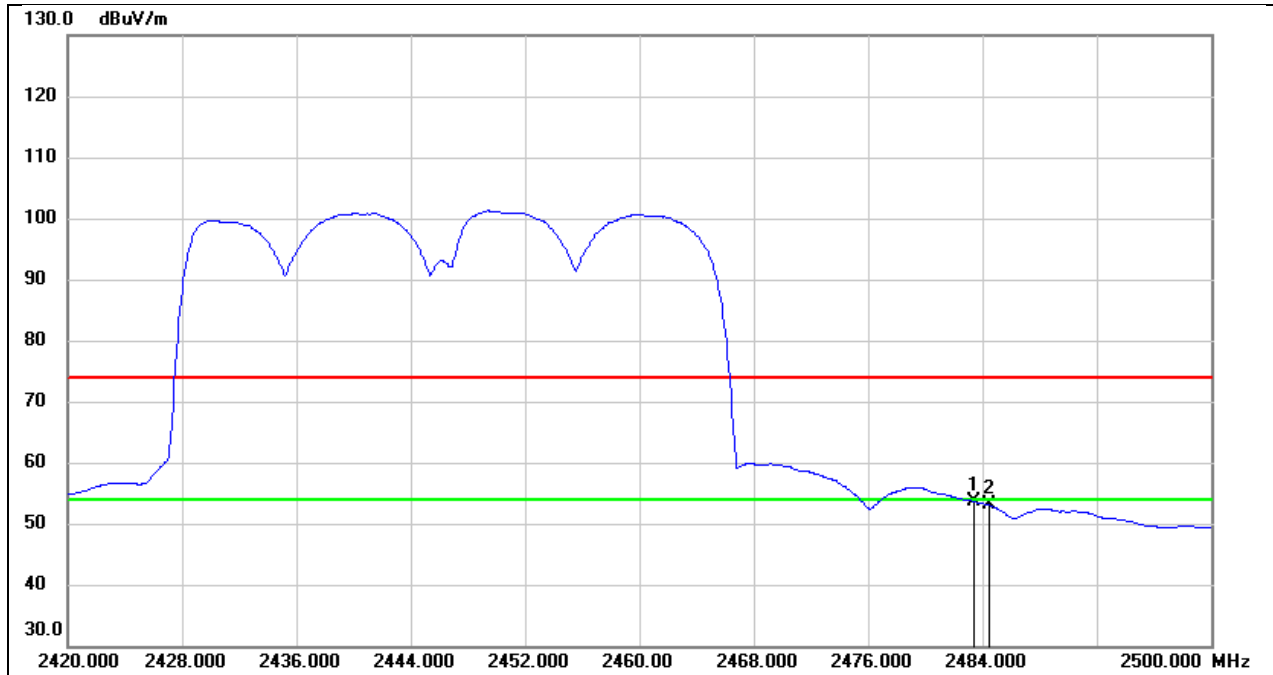


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.60	32.94	53.54	54.00	-0.46	AVG
2	2484.480	20.09	32.94	53.03	54.00	-0.97	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

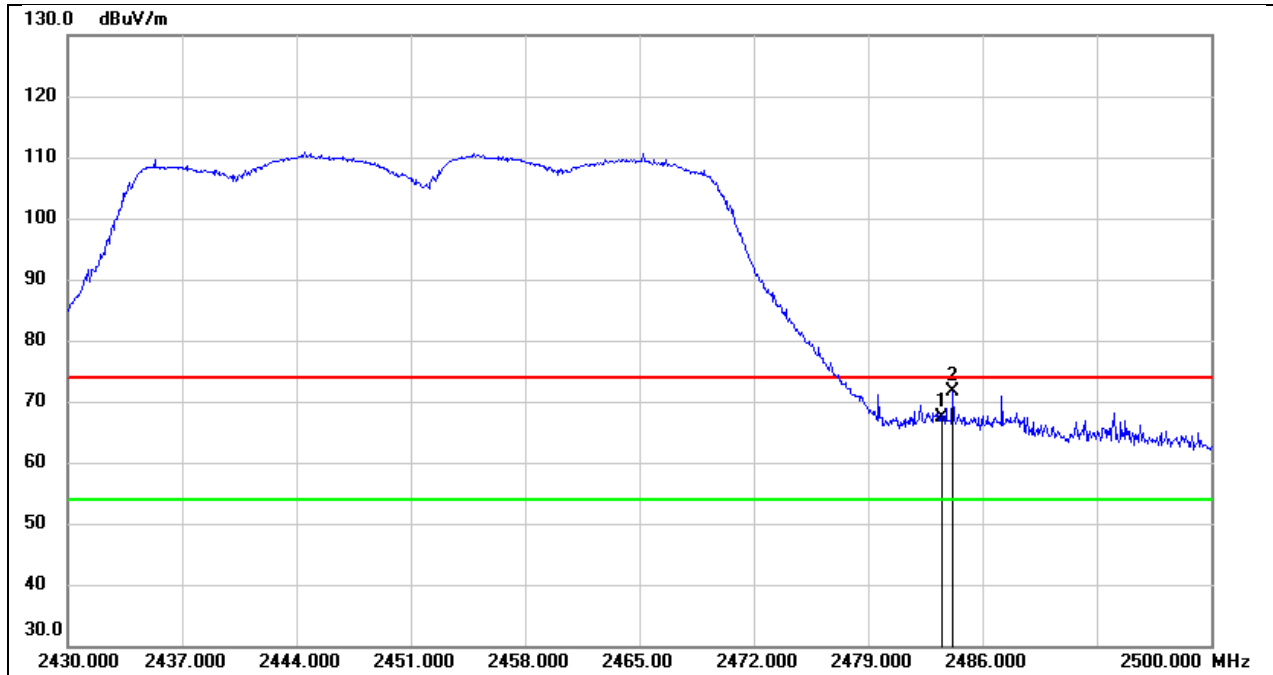


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.45	32.94	67.39	74.00	-6.61	peak
2	2484.180	38.78	32.94	71.72	74.00	-2.28	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

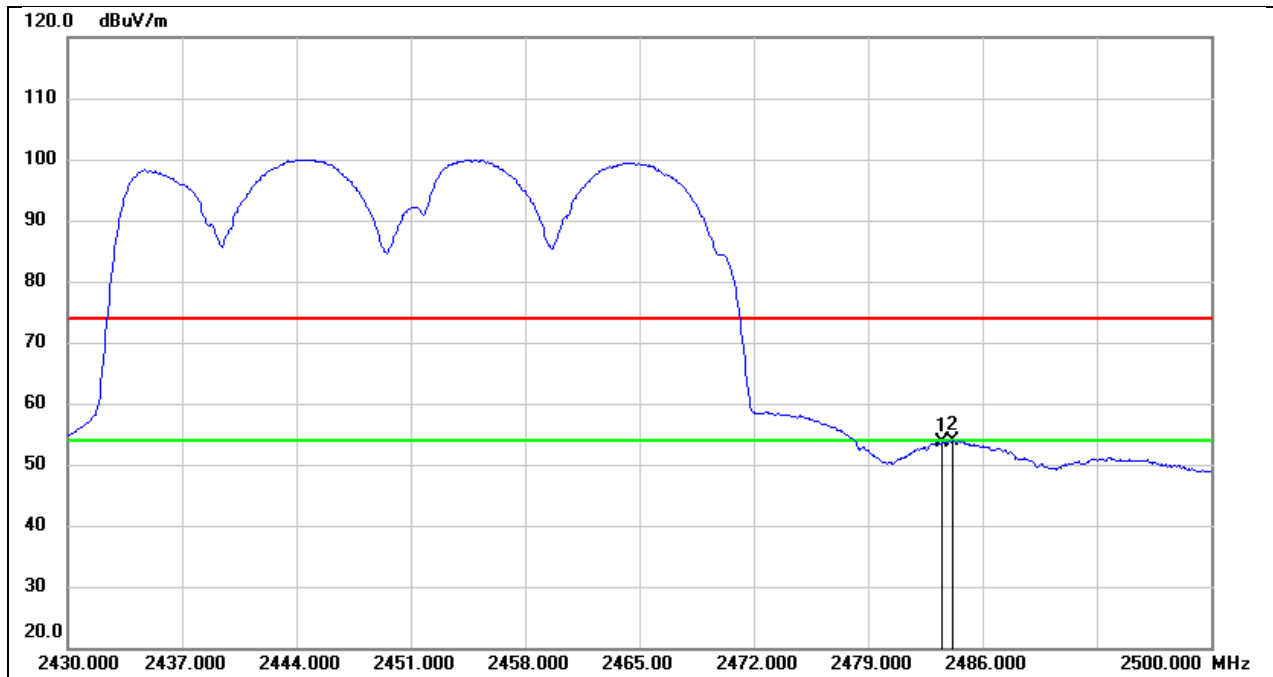


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.67	32.94	53.61	54.00	-0.39	AVG
2	2484.180	20.84	32.94	53.78	54.00	-0.22	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

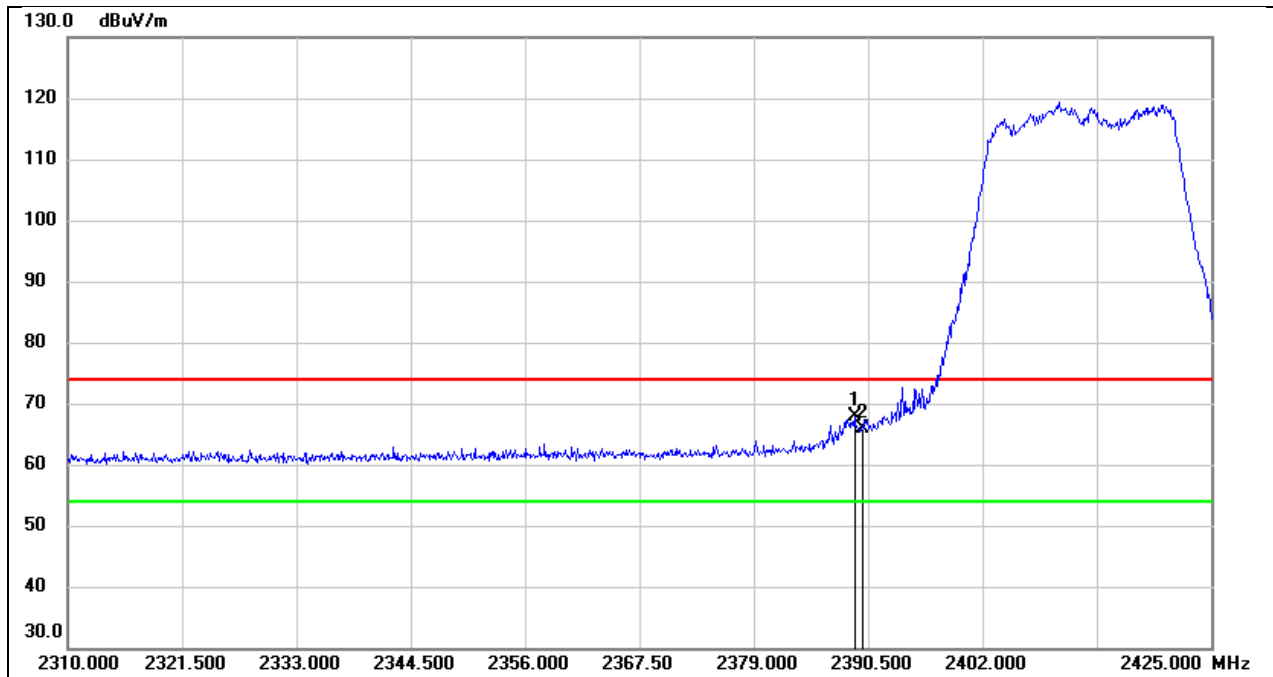


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.120	34.91	32.92	67.83	74.00	-6.17	peak
2	2390.000	33.07	32.92	65.99	74.00	-8.01	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

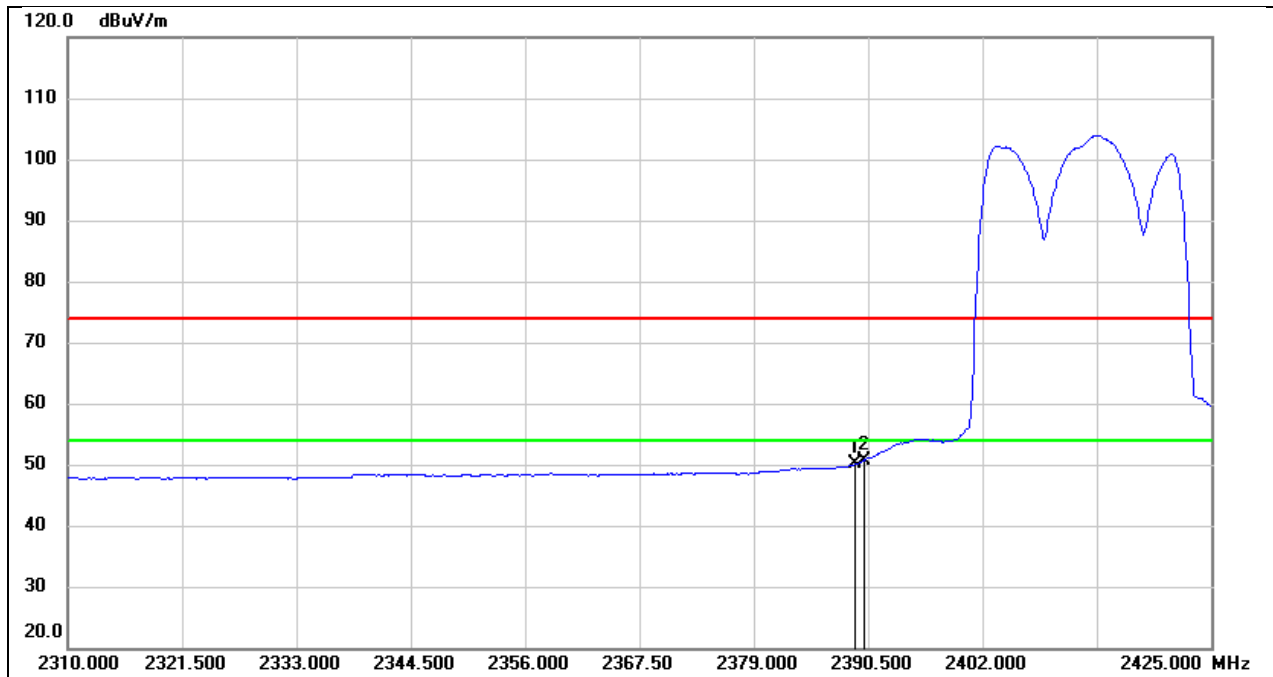


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.120	17.10	32.92	50.02	54.00	-3.98	AVG
2	2390.000	17.71	32.92	50.63	54.00	-3.37	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

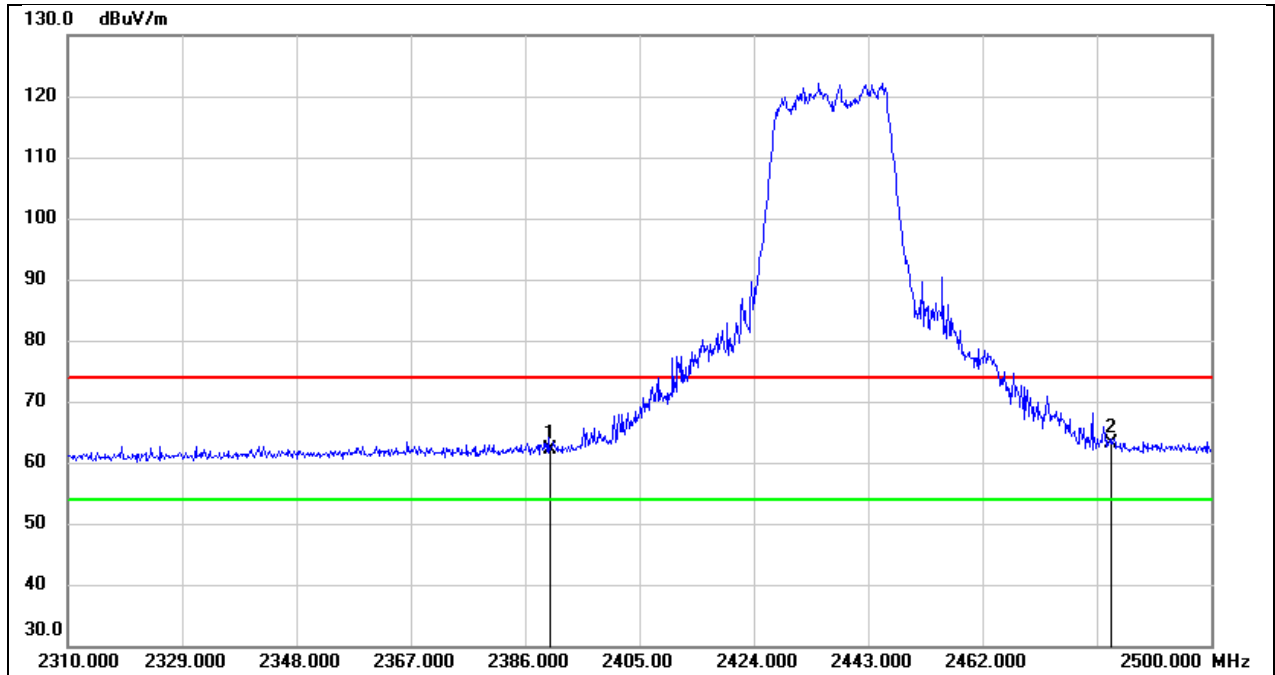


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.11	32.92	62.03	74.00	-11.97	peak
2	2483.500	30.22	32.94	63.16	74.00	-10.84	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

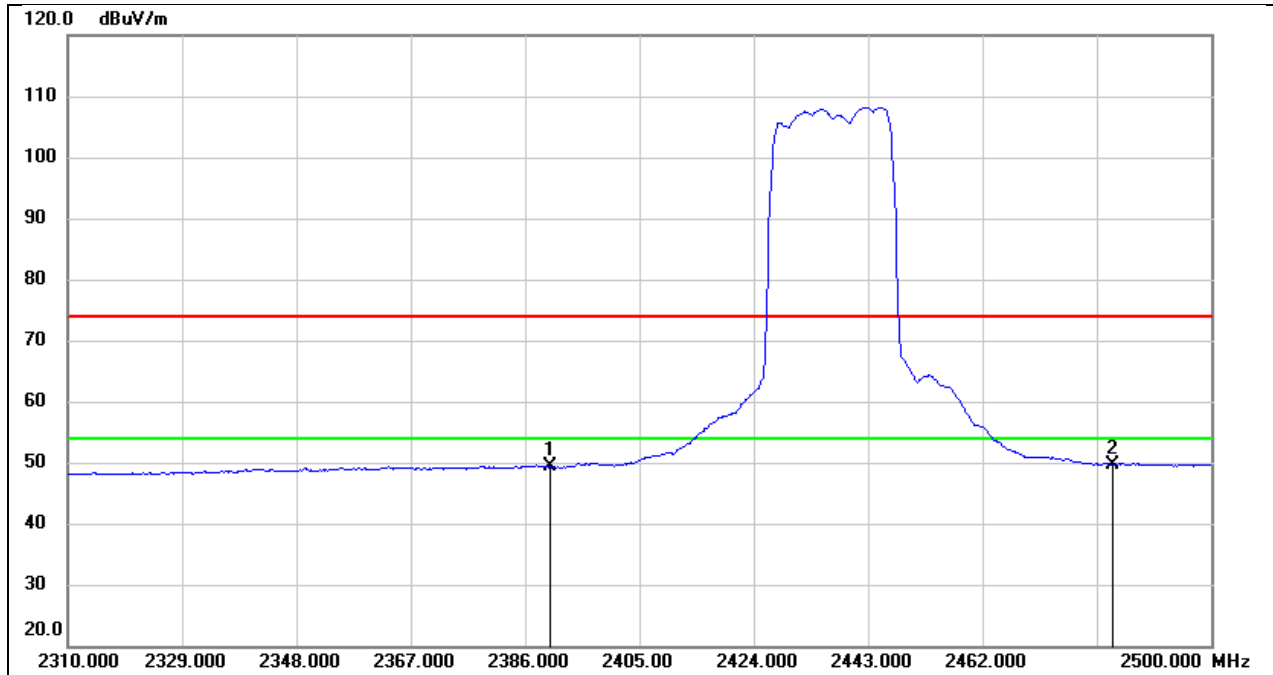


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.36	32.92	49.28	54.00	-4.72	AVG
2	2483.500	16.74	32.94	49.68	54.00	-4.32	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

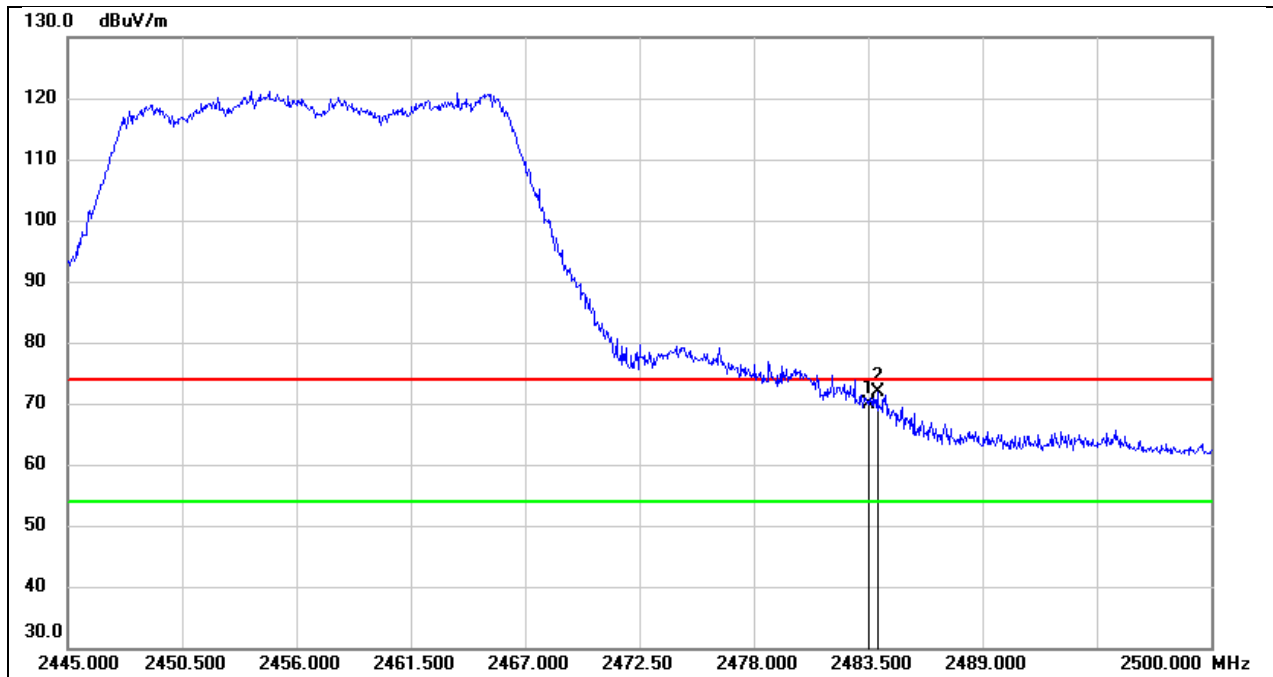


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.86	32.94	69.80	74.00	-4.20	peak
2	2483.940	38.98	32.94	71.92	74.00	-2.08	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

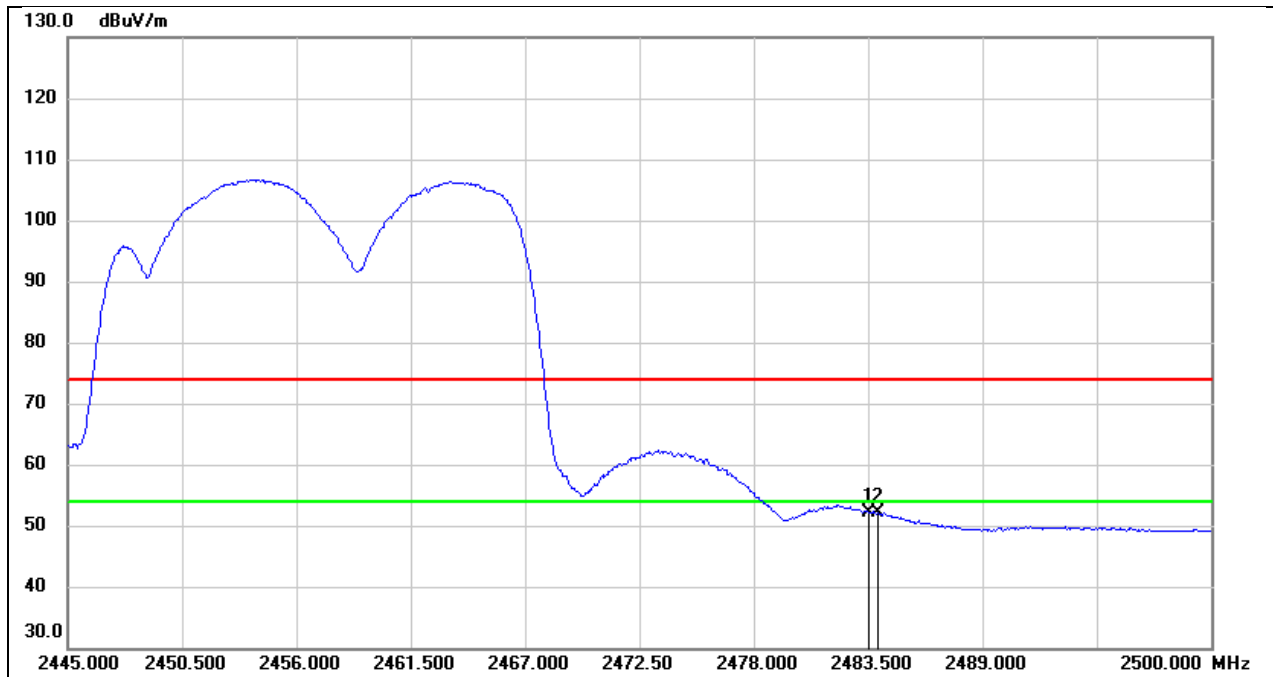


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.25	32.94	52.19	54.00	-1.81	AVG
2	2483.940	19.11	32.94	52.05	54.00	-1.95	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

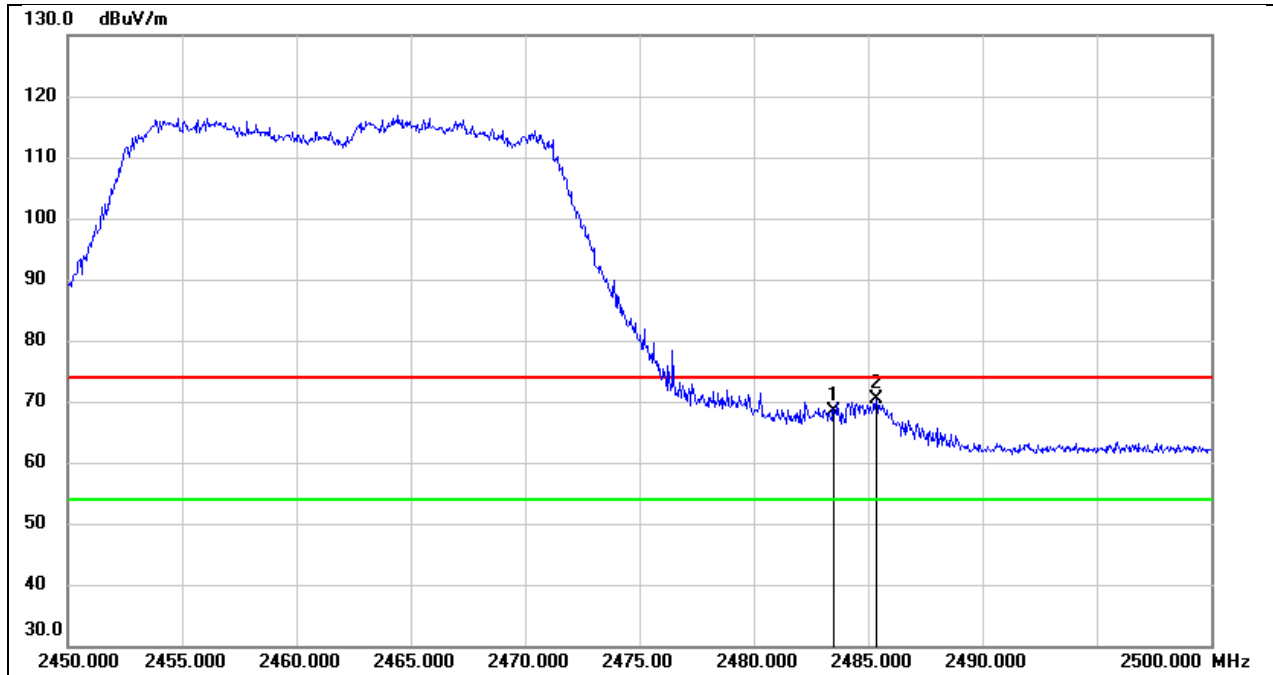


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.42	32.94	68.36	74.00	-5.64	peak
2	2485.350	37.42	32.94	70.36	74.00	-3.64	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

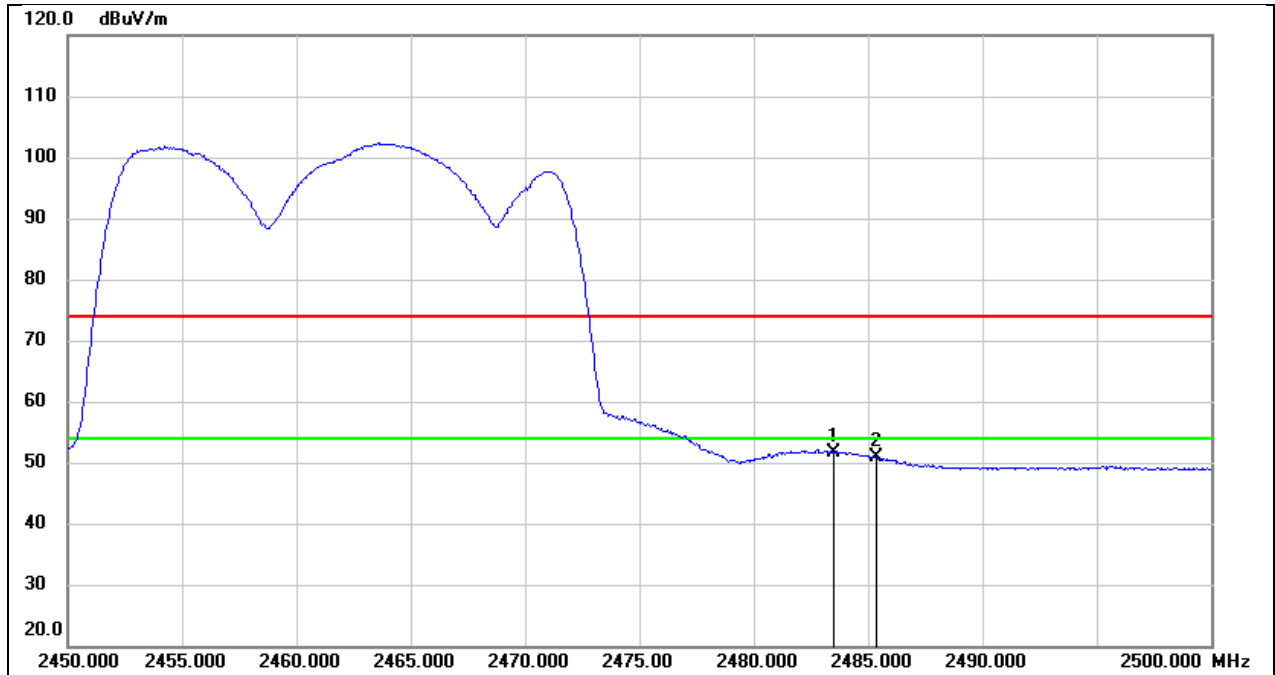


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.81	32.94	51.75	54.00	-2.25	AVG
2	2485.350	17.89	32.94	50.83	54.00	-3.17	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

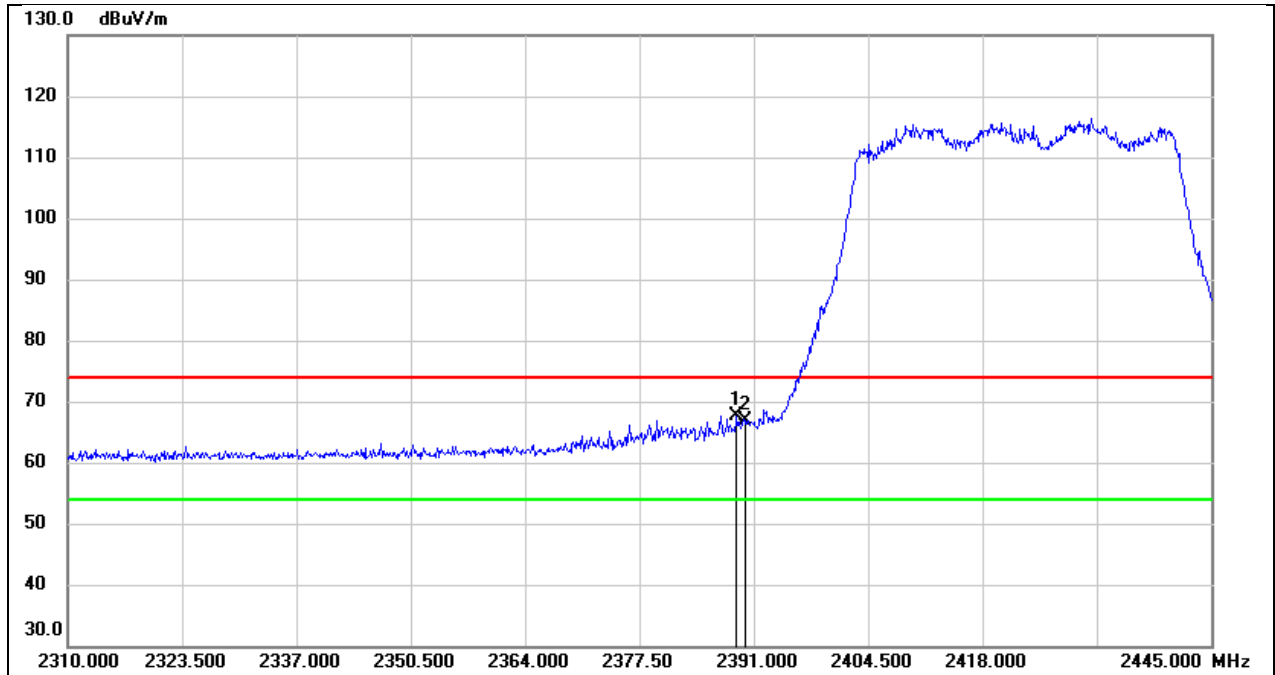


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.975	34.79	32.92	67.71	74.00	-6.29	peak
2	2390.000	33.96	32.92	66.88	74.00	-7.12	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

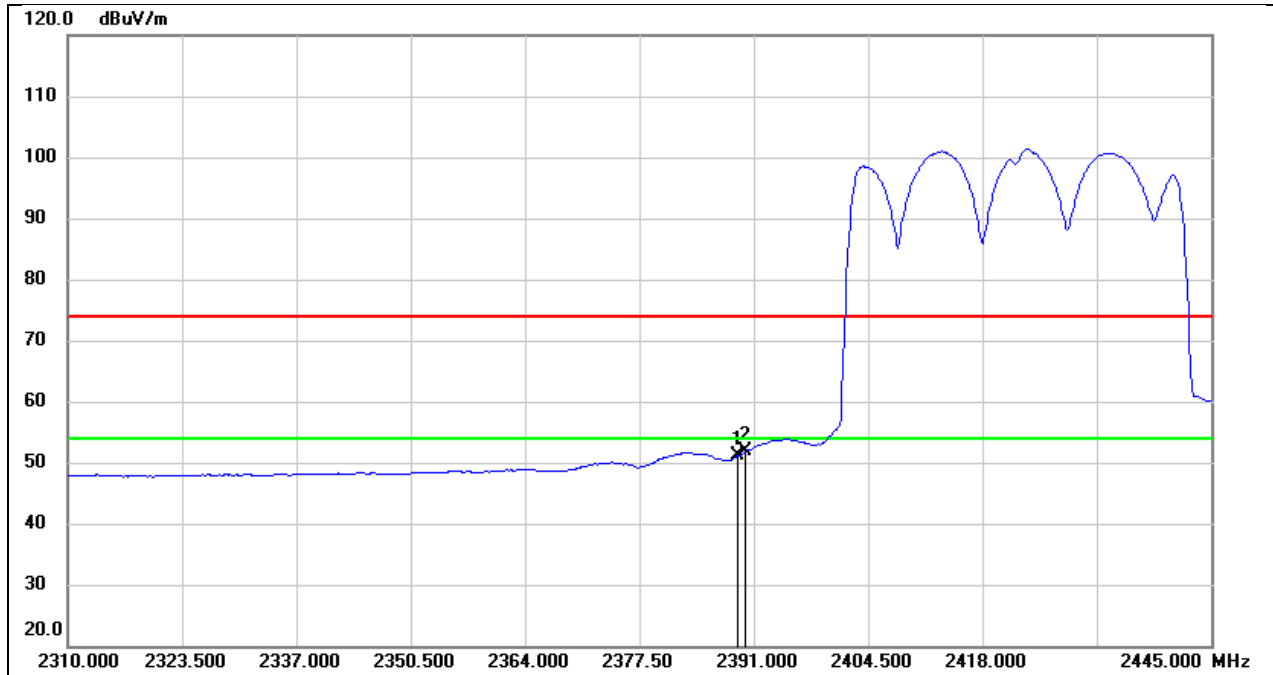


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.975	18.22	32.92	51.14	54.00	-2.86	AVG
2	2390.000	19.05	32.92	51.97	54.00	-2.03	AVG

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

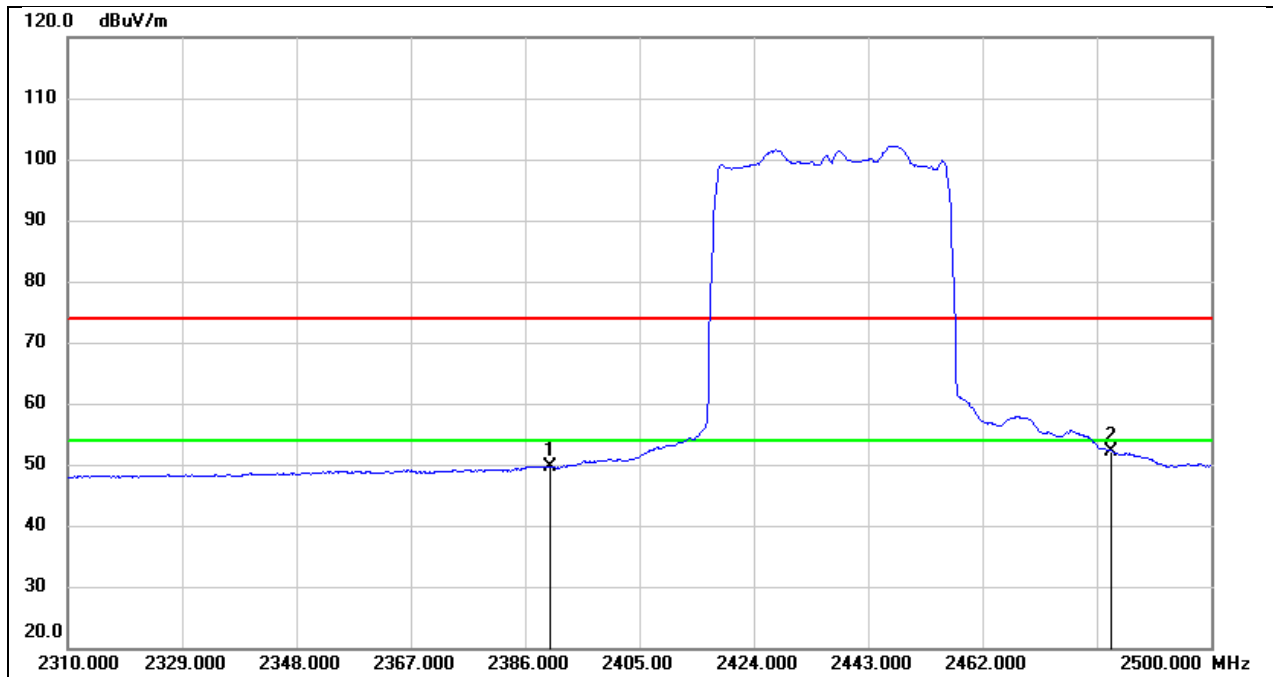


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.67	32.92	49.59	54.00	-4.41	AVG
2	2483.500	19.15	32.94	52.09	54.00	-1.91	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

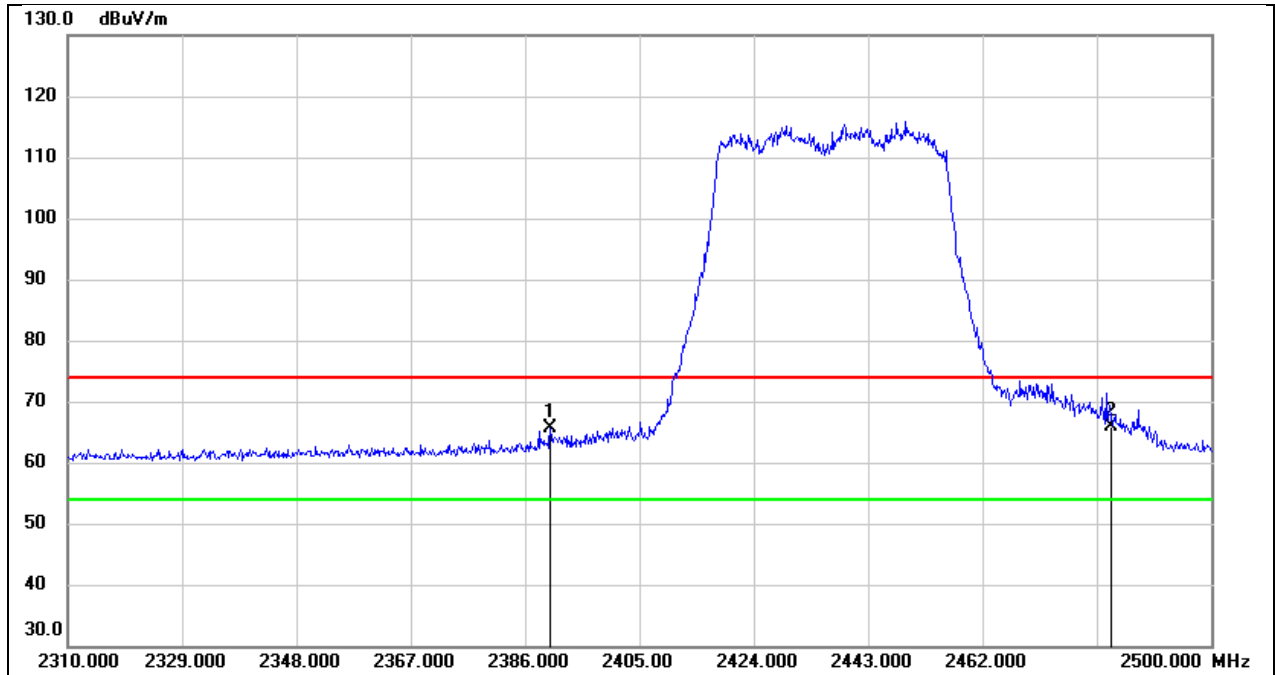


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	32.65	32.92	65.57	74.00	-8.43	peak
2	2483.500	33.06	32.94	66.00	74.00	-8.00	peak

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

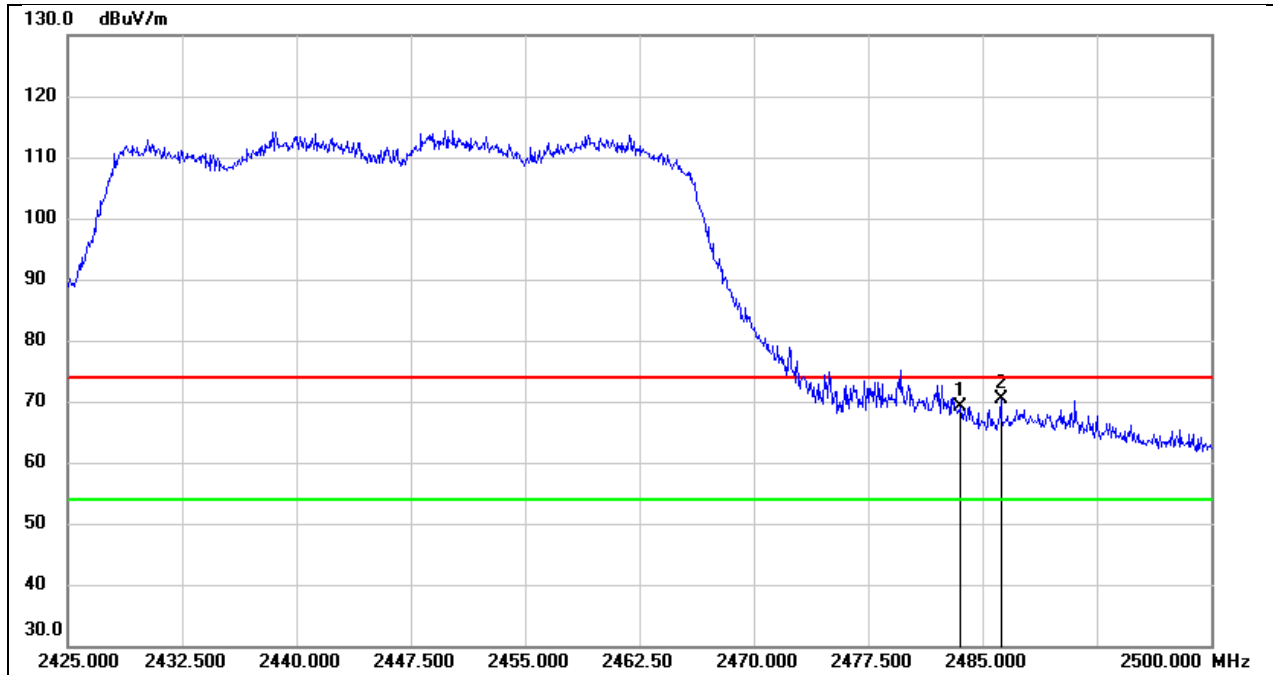


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.10	32.94	69.04	74.00	-4.96	peak
2	2486.200	37.48	32.93	70.41	74.00	-3.59	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

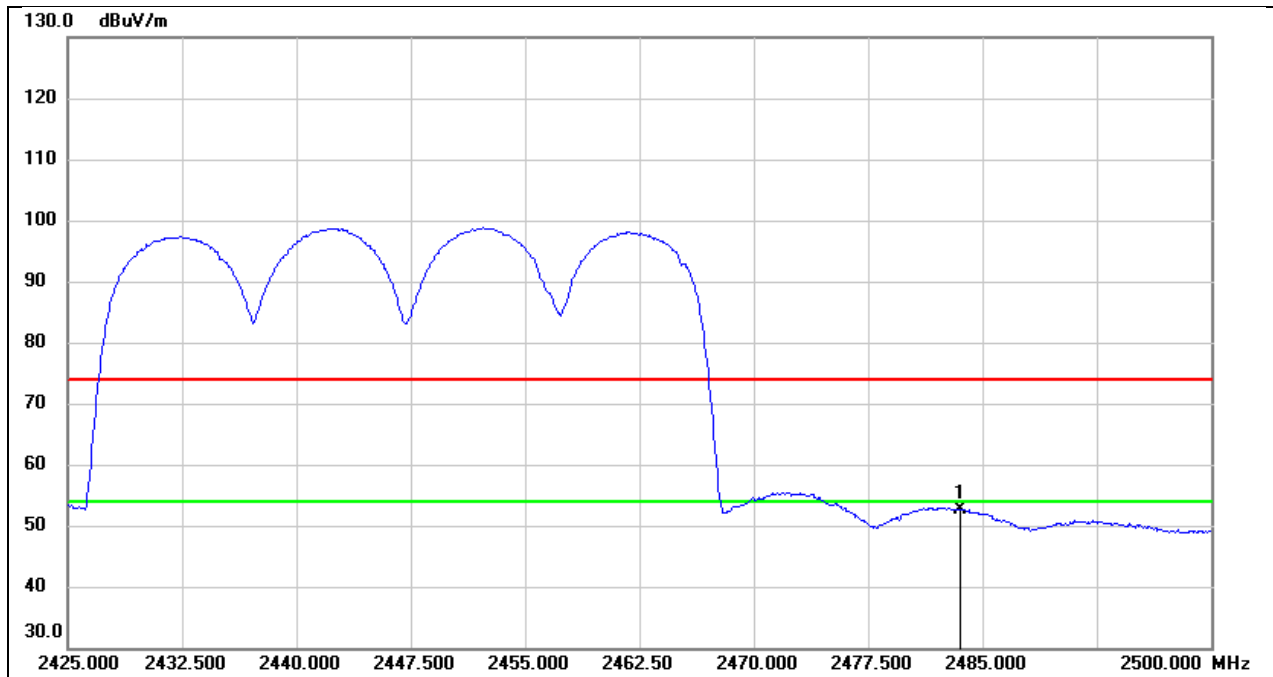


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.80	32.94	52.74	54.00	-1.26	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

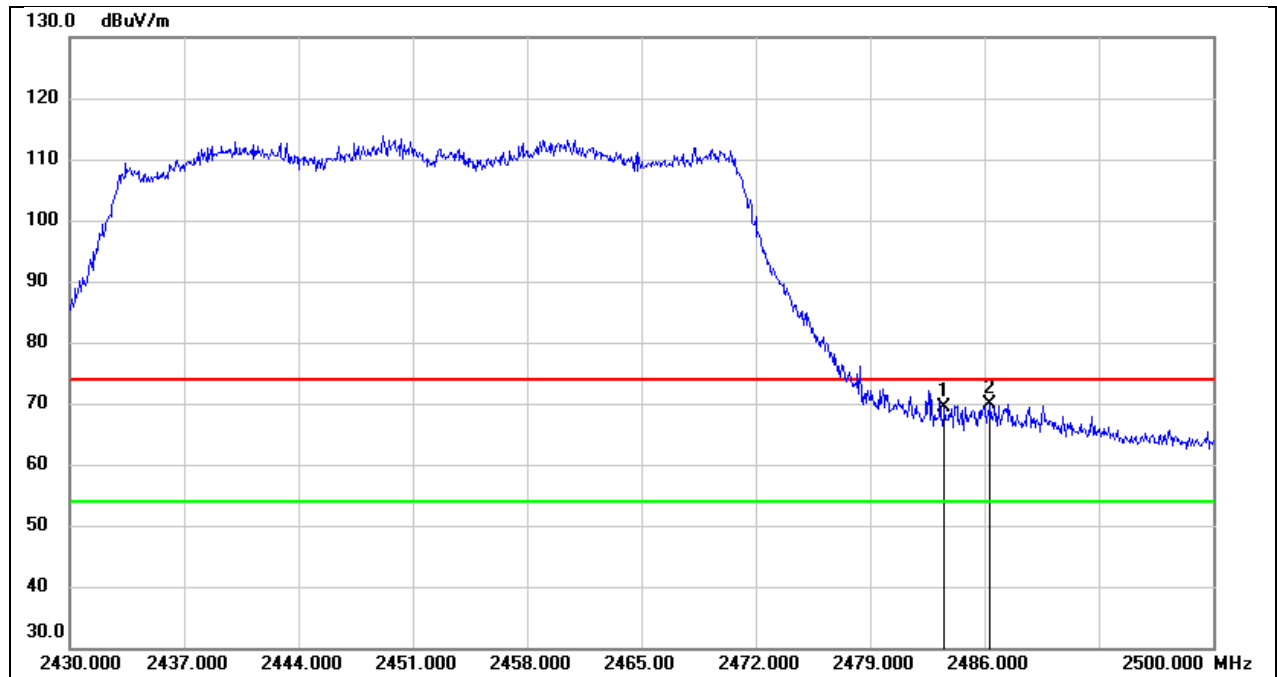

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.50	32.94	69.44	74.00	-4.56	peak
2	2486.350	36.92	32.93	69.85	74.00	-4.15	peak


Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

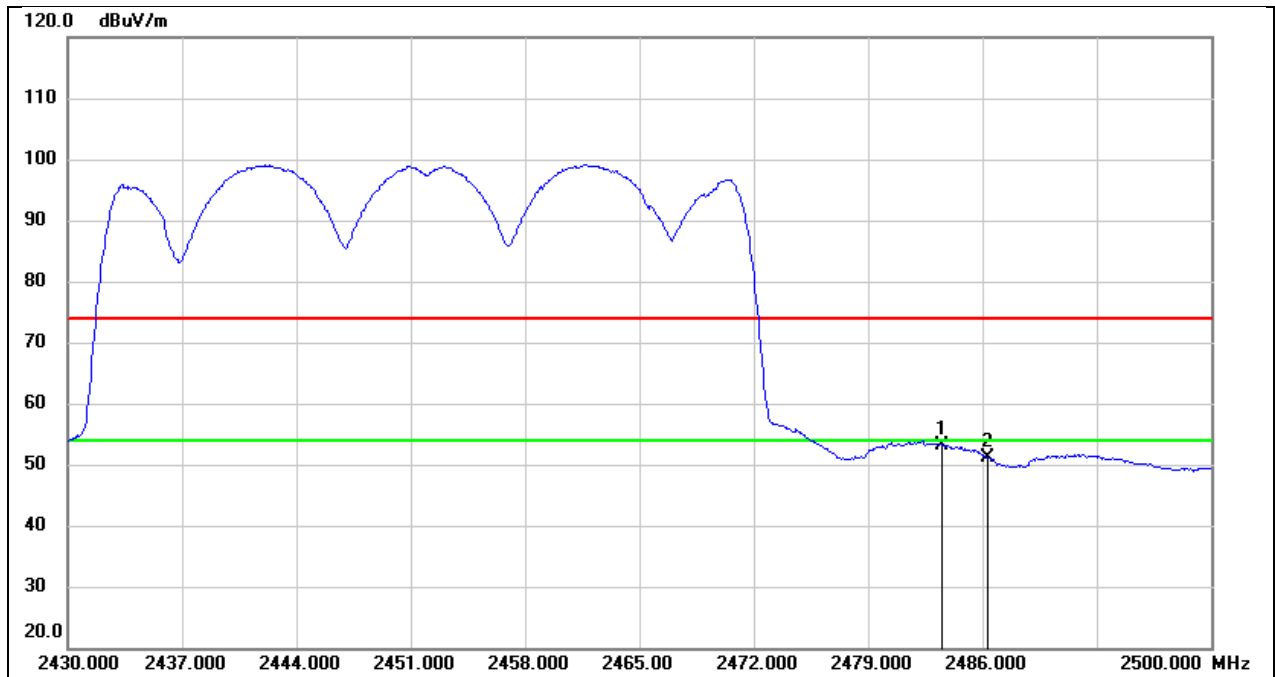

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.23	32.94	53.17	54.00	-0.83	AVG
2	2486.350	18.24	32.93	51.17	54.00	-2.83	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

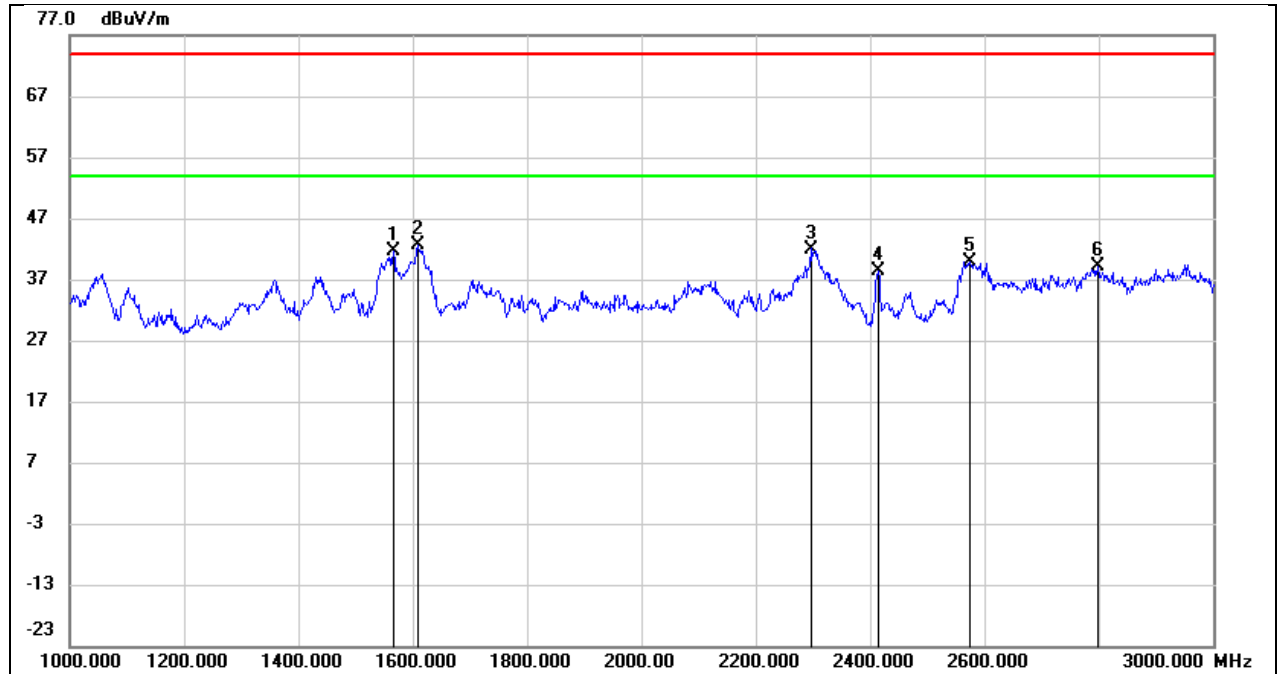


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1566.000	54.08	-12.49	41.59	74.00	-32.41	peak
2	1610.000	55.02	-12.35	42.67	74.00	-31.33	peak
3	2296.000	51.54	-9.54	42.00	74.00	-32.00	peak
4	2414.000	47.37	-8.93	38.44	/	/	fundamental
5	2574.000	48.10	-8.12	39.98	74.00	-34.02	peak
6	2798.000	46.18	-6.99	39.19	74.00	-34.81	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

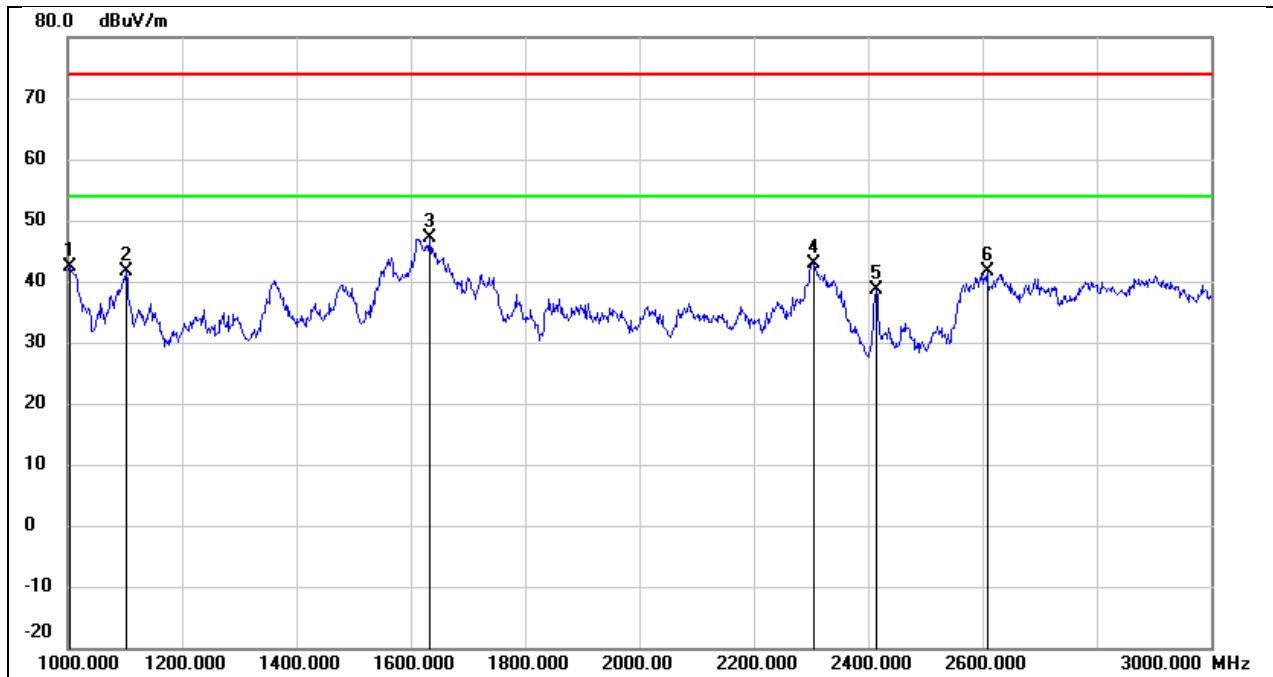


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1004.000	57.46	-15.02	42.44	74.00	-31.56	peak
2	1102.000	56.06	-14.55	41.51	74.00	-32.49	peak
3	1634.000	59.38	-12.27	47.11	74.00	-26.89	peak
4	2306.000	52.38	-9.49	42.89	74.00	-31.11	peak
5	2414.000	47.64	-8.93	38.71	/	/	fundamental
6	2608.000	49.55	-7.95	41.60	74.00	-32.40	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

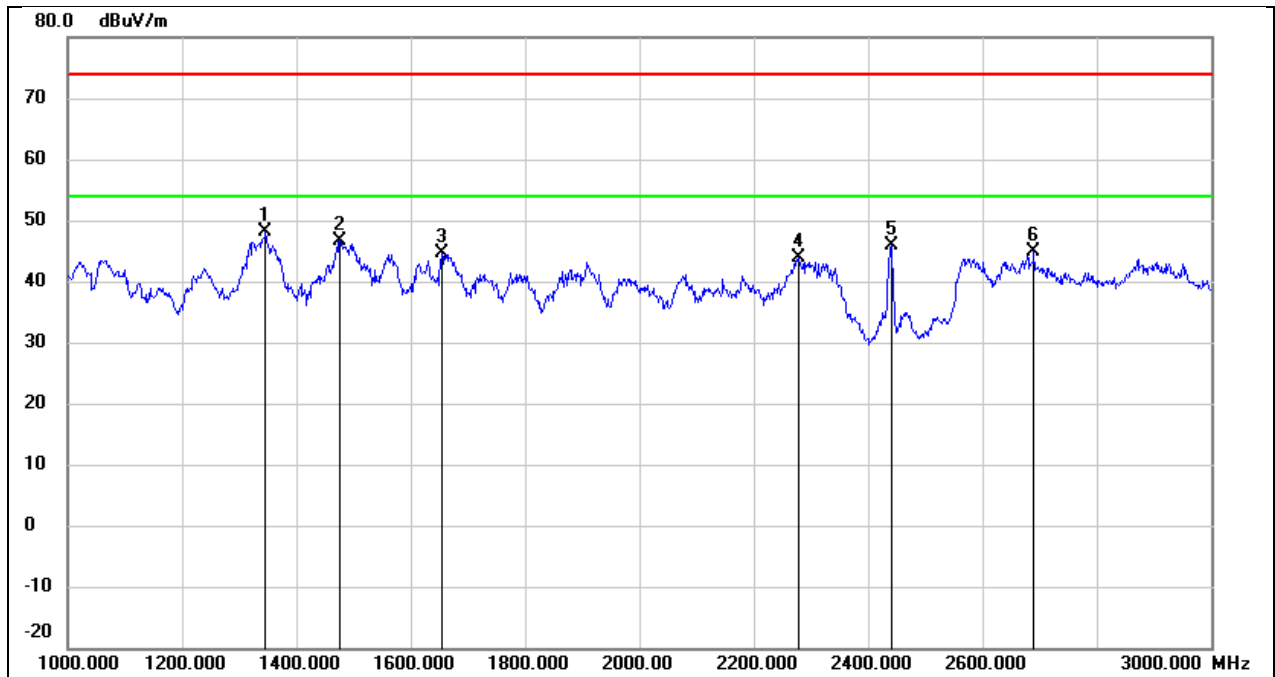


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1346.000	61.46	-13.42	48.04	74.00	-25.96	peak
2	1476.000	59.57	-12.82	46.75	74.00	-27.25	peak
3	1654.000	56.78	-12.20	44.58	74.00	-29.42	peak
4	2278.000	53.47	-9.64	43.83	74.00	-30.17	peak
5	2440.000	54.63	-8.80	45.83	/	/	fundamental
6	2690.000	52.33	-7.54	44.79	74.00	-29.21	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

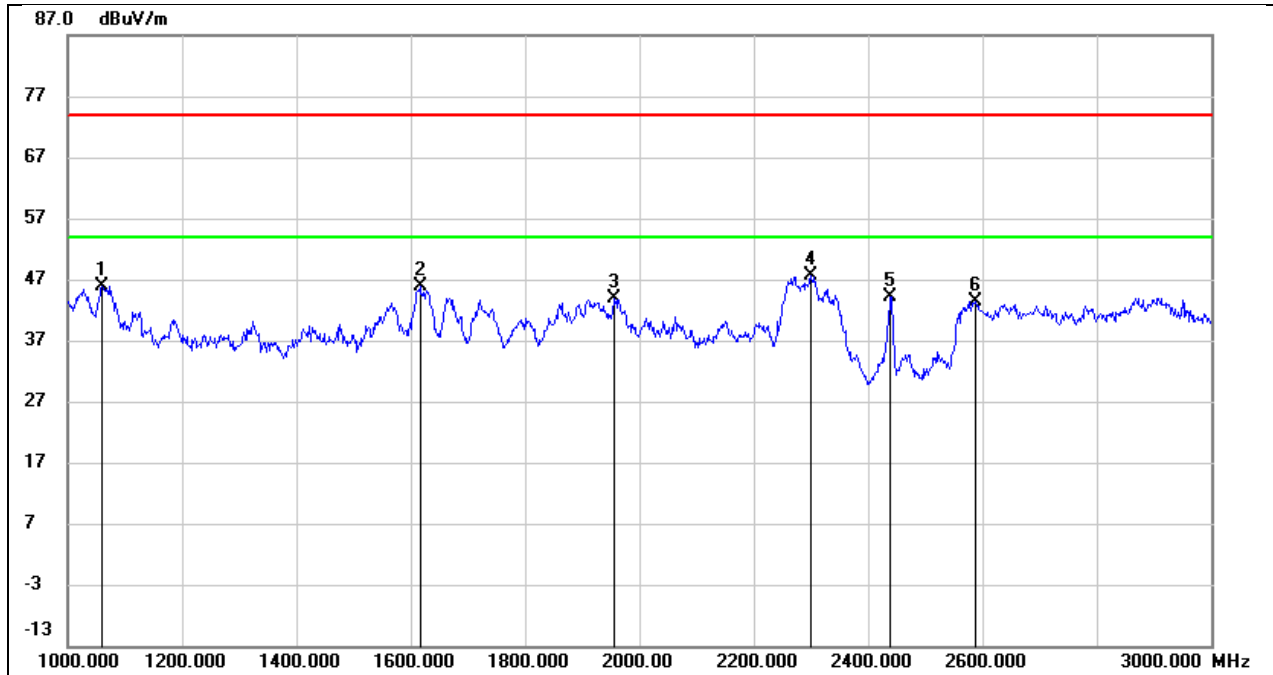


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1060.000	60.60	-14.76	45.84	74.00	-28.16	peak
2	1616.000	58.25	-12.33	45.92	74.00	-28.08	peak
3	1956.000	55.01	-11.21	43.80	74.00	-30.20	peak
4	2300.000	57.19	-9.52	47.67	74.00	-26.33	peak
5	2438.000	53.03	-8.80	44.23	/	/	fundamental
6	2588.000	51.48	-8.05	43.43	74.00	-30.57	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

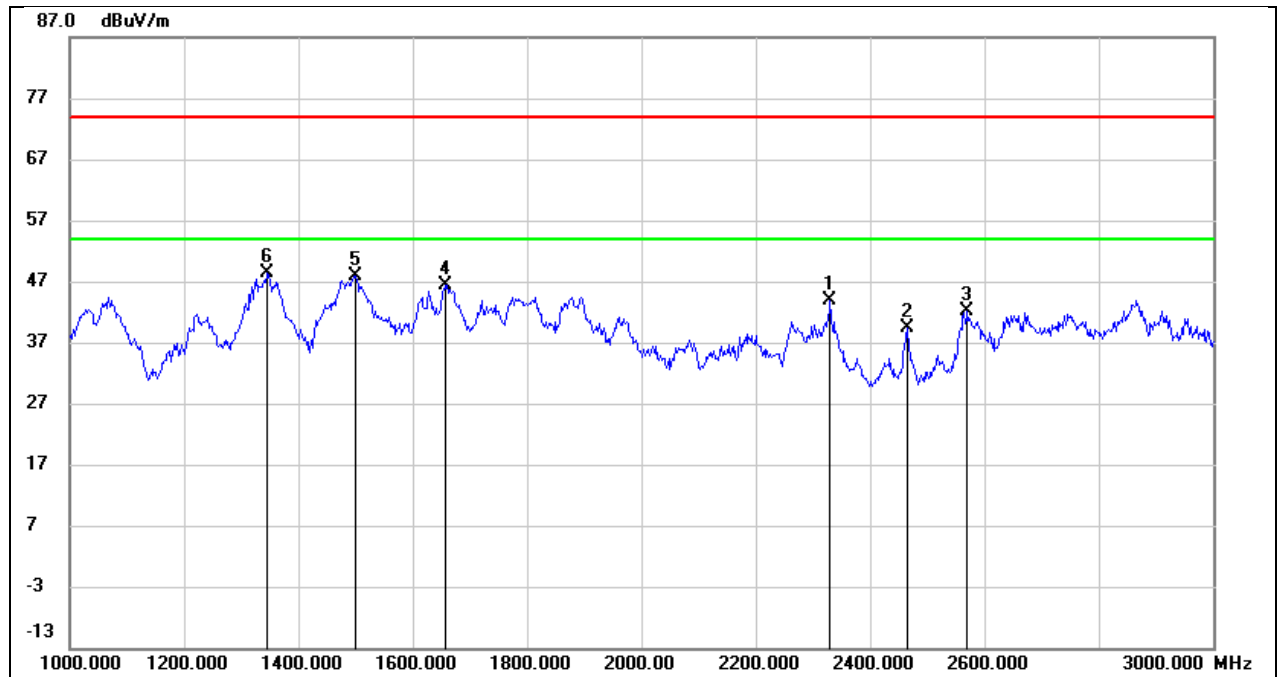

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2330.000	53.29	-9.36	43.93	74.00	-30.07	peak
2	2464.000	48.11	-8.68	39.43	/	/	fundamental
3	2570.000	50.16	-8.13	42.03	74.00	-31.97	peak
4	1656.000	58.56	-12.20	46.36	74.00	-27.64	peak
5	1500.000	60.60	-12.71	47.89	74.00	-26.11	peak
6	1346.000	61.78	-13.42	48.36	74.00	-25.64	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

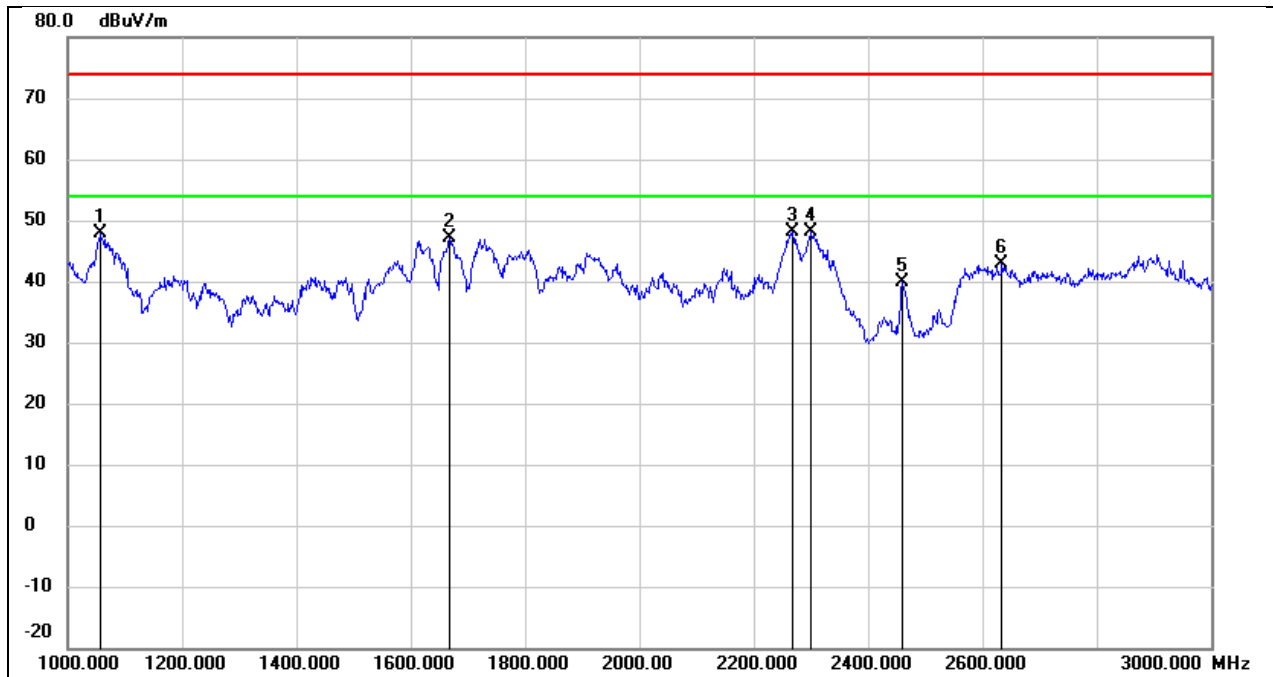

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1058.000	62.60	-14.76	47.84	74.00	-26.16	peak
2	1668.000	59.24	-12.16	47.08	74.00	-26.92	peak
3	2268.000	57.83	-9.68	48.15	74.00	-25.85	peak
4	2300.000	57.54	-9.52	48.02	74.00	-25.98	peak
5	2460.000	48.54	-8.69	39.85	/	/	fundamental
6	2634.000	50.73	-7.82	42.91	74.00	-31.09	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

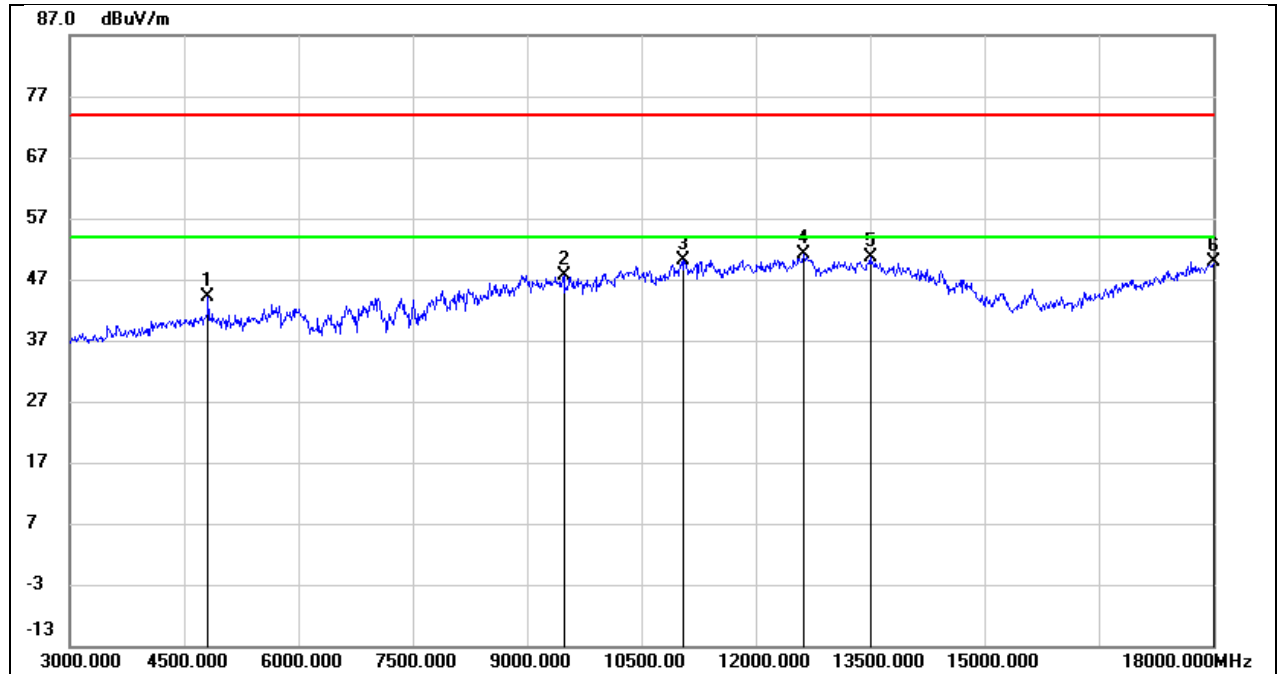


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.63	0.49	44.12	74.00	-29.88	peak
2	9480.000	36.93	10.72	47.65	74.00	-26.35	peak
3	11055.000	35.19	15.04	50.23	74.00	-23.77	peak
4	12630.000	32.74	18.39	51.13	74.00	-22.87	peak
5	13500.000	28.83	21.69	50.52	74.00	-23.48	peak
6	18000.000	22.97	26.83	49.80	74.00	-24.20	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

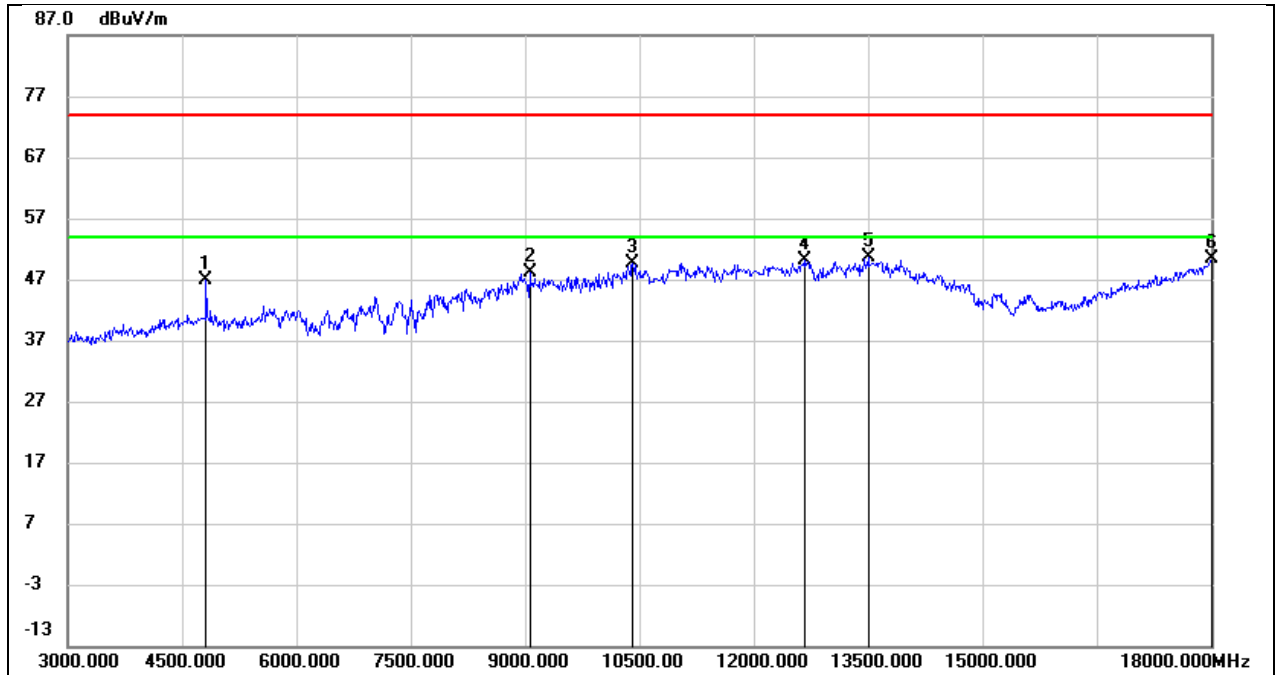


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	46.48	0.49	46.97	74.00	-27.03	peak
2	9060.000	37.35	10.82	48.17	74.00	-25.83	peak
3	10410.000	36.13	13.48	49.61	74.00	-24.39	peak
4	12660.000	31.54	18.49	50.03	74.00	-23.97	peak
5	13500.000	28.86	21.69	50.55	74.00	-23.45	peak
6	18000.000	23.53	26.83	50.36	74.00	-23.64	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

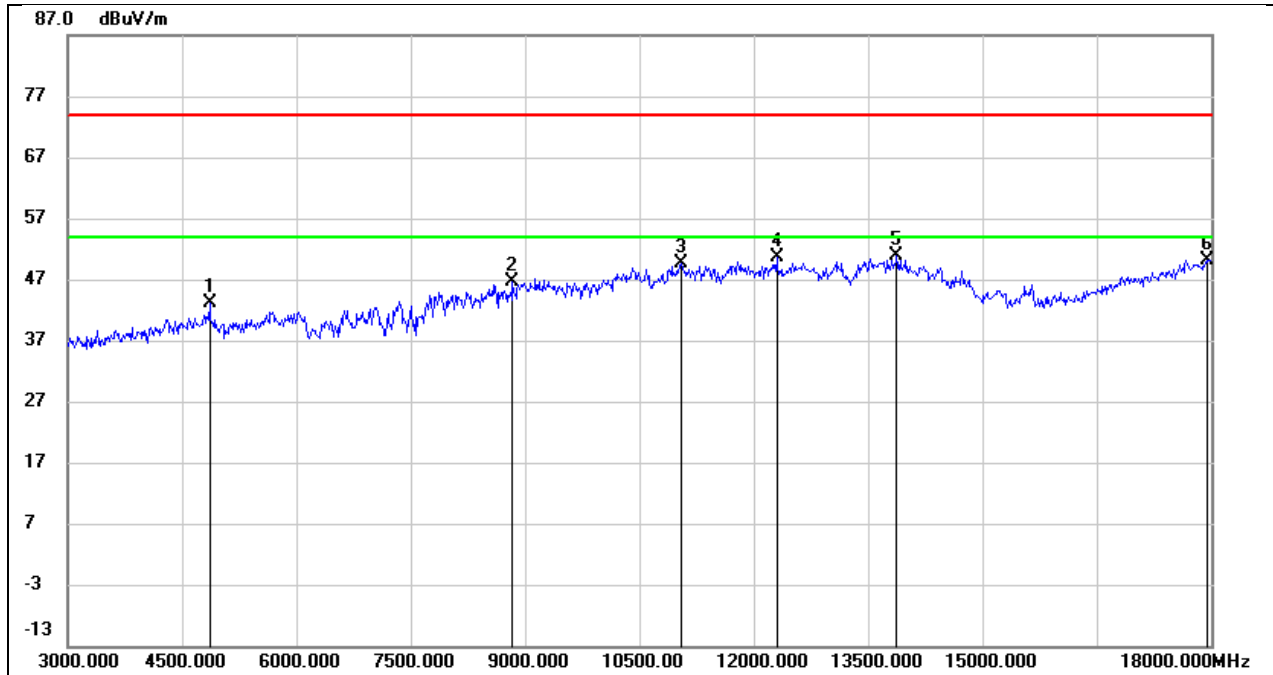


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	42.48	0.57	43.05	74.00	-30.95	peak
2	8835.000	37.82	8.90	46.72	74.00	-27.28	peak
3	11040.000	34.58	15.01	49.59	74.00	-24.41	peak
4	12300.000	31.91	18.65	50.56	74.00	-23.44	peak
5	13875.000	28.10	22.68	50.78	74.00	-23.22	peak
6	17955.000	23.59	26.66	50.25	74.00	-23.75	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

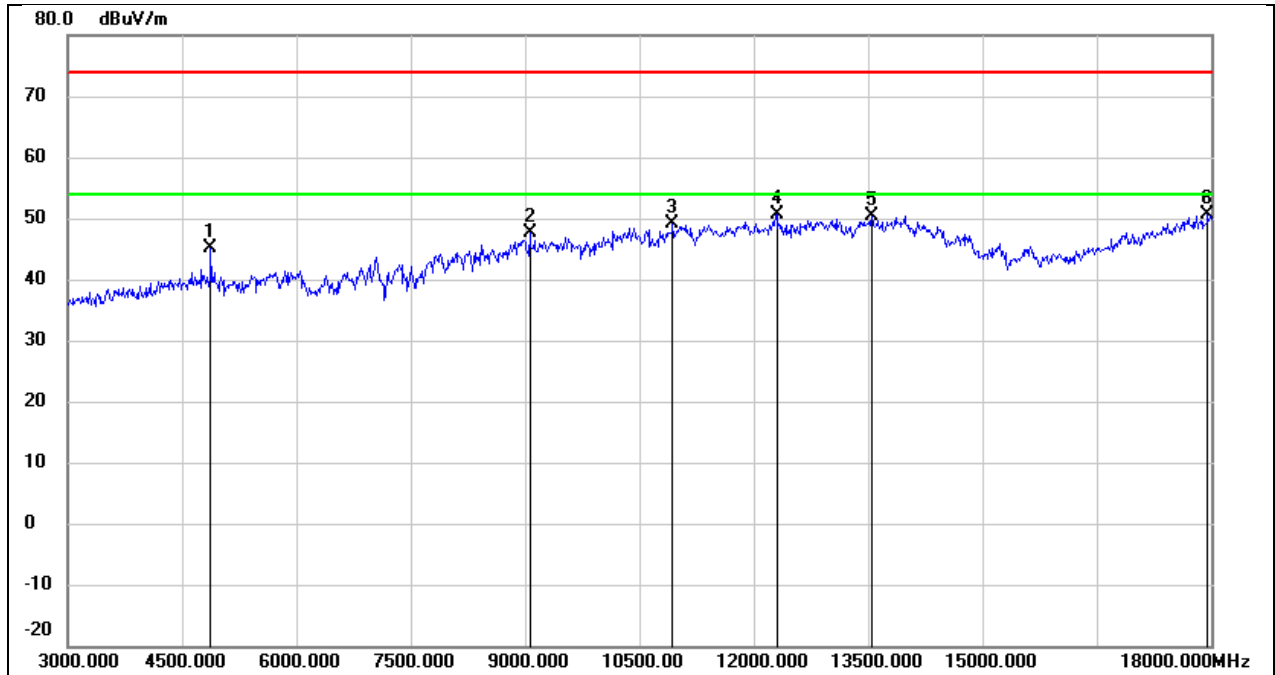


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.51	0.61	45.12	74.00	-28.88	peak
2	9060.000	36.72	10.82	47.54	74.00	-26.46	peak
3	10935.000	34.58	14.60	49.18	74.00	-24.82	peak
4	12300.000	31.93	18.65	50.58	74.00	-23.42	peak
5	13545.000	28.72	21.68	50.40	74.00	-23.60	peak
6	17955.000	24.01	26.66	50.67	74.00	-23.33	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

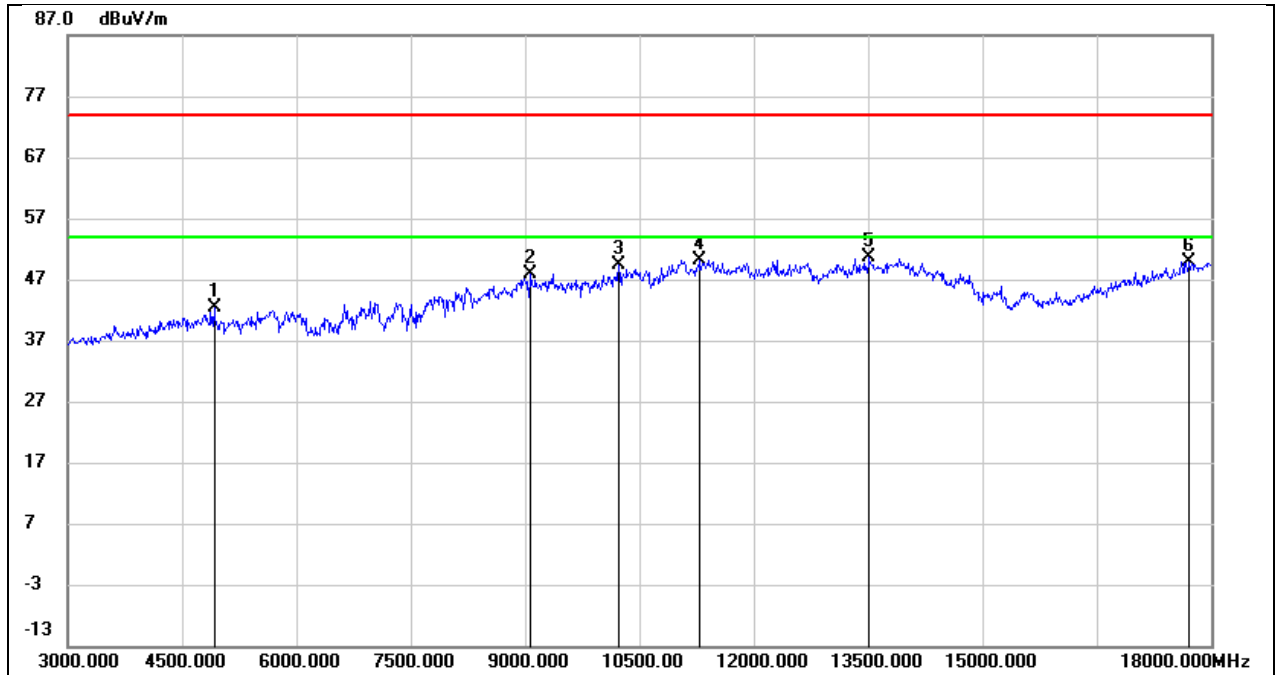


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	41.59	0.69	42.28	74.00	-31.72	peak
2	9075.000	37.13	10.74	47.87	74.00	-26.13	peak
3	10230.000	36.80	12.62	49.42	74.00	-24.58	peak
4	11295.000	34.30	15.93	50.23	74.00	-23.77	peak
5	13515.000	28.97	21.69	50.66	74.00	-23.34	peak
6	17715.000	24.55	25.31	49.86	74.00	-24.14	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

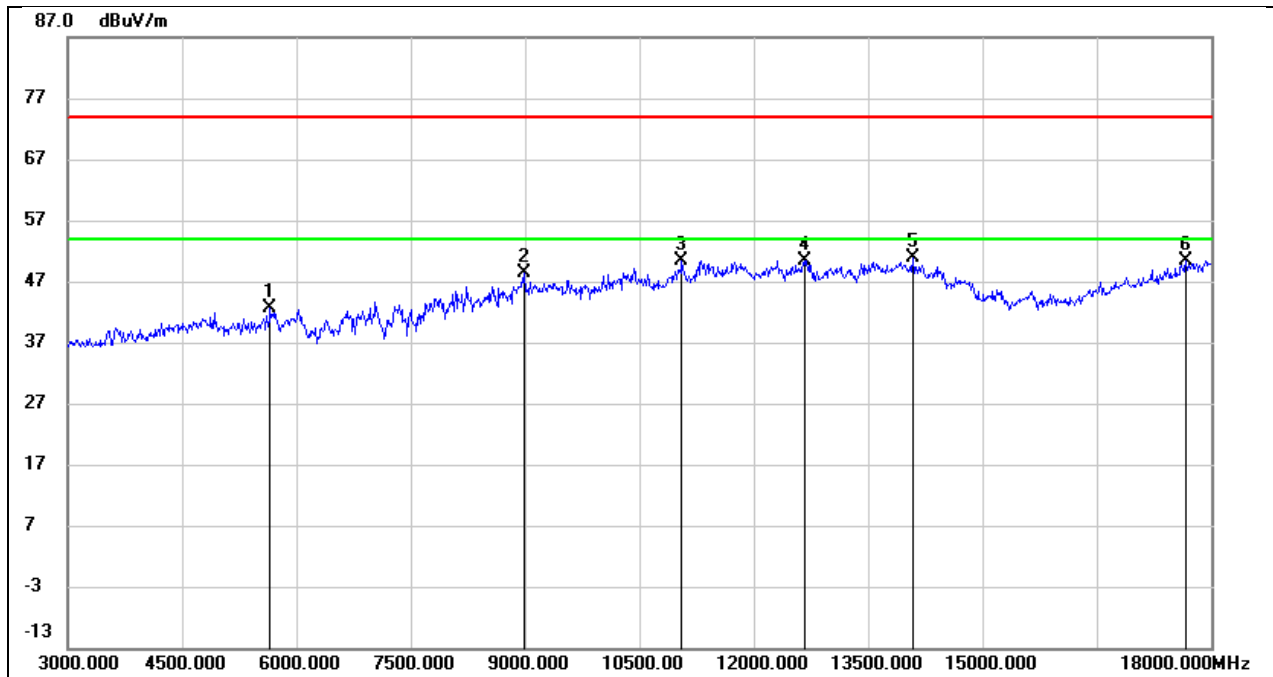


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.96	2.67	42.63	74.00	-31.37	peak
2	8985.000	37.29	10.97	48.26	74.00	-25.74	peak
3	11055.000	35.43	15.04	50.47	74.00	-23.53	peak
4	12675.000	31.85	18.54	50.39	74.00	-23.61	peak
5	14085.000	28.43	22.51	50.94	74.00	-23.06	peak
6	17670.000	25.49	24.89	50.38	74.00	-23.62	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

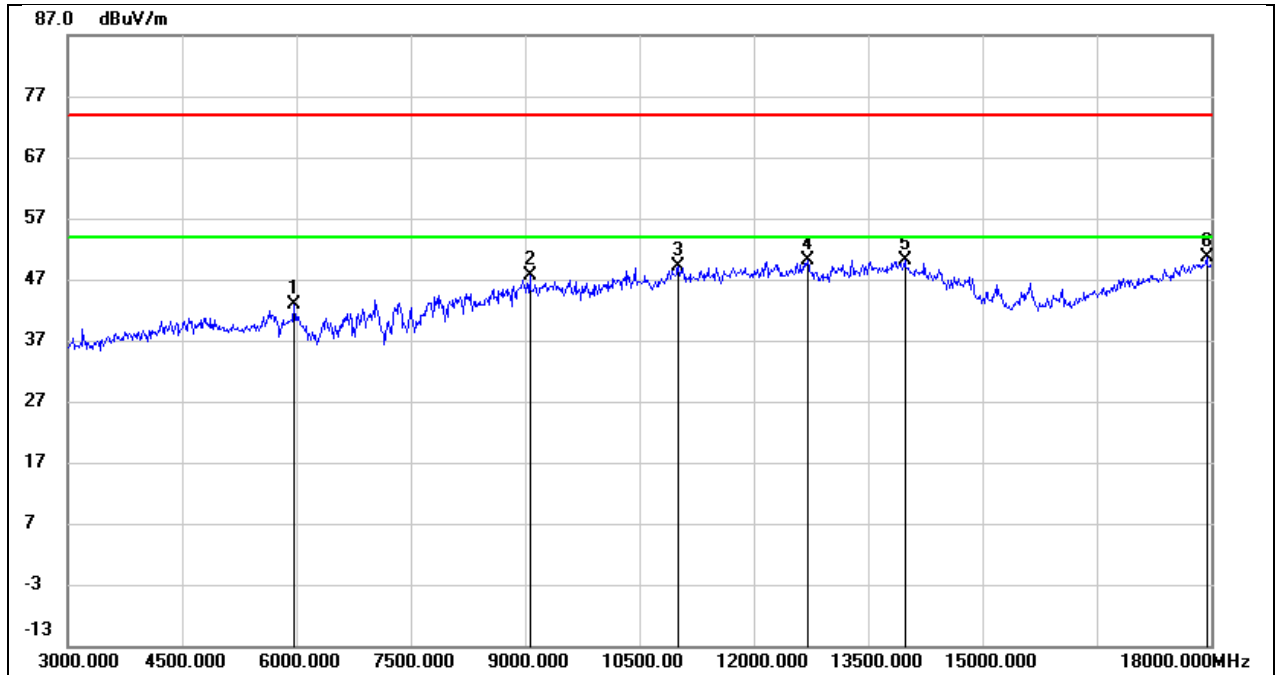


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	39.77	2.99	42.76	74.00	-31.24	peak
2	9060.000	36.89	10.82	47.71	74.00	-26.29	peak
3	11010.000	34.14	14.94	49.08	74.00	-24.92	peak
4	12705.000	31.35	18.66	50.01	74.00	-23.99	peak
5	13980.000	27.44	22.75	50.19	74.00	-23.81	peak
6	17940.000	23.92	26.61	50.53	74.00	-23.47	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

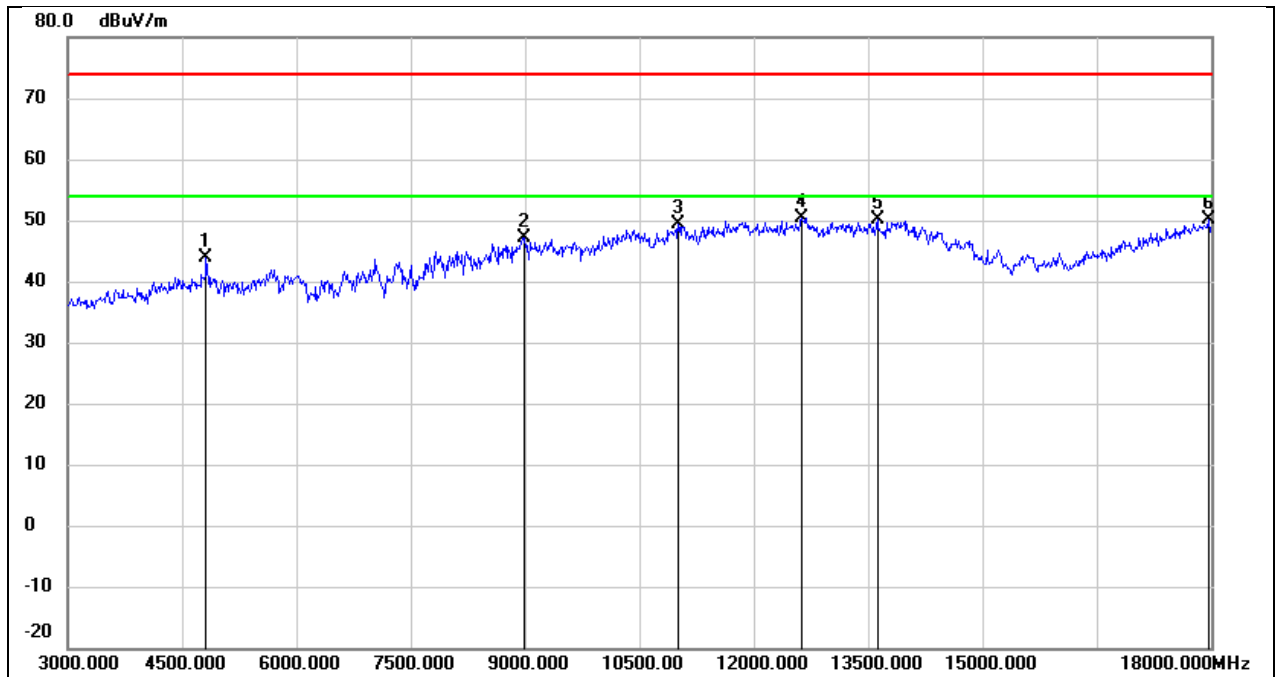


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.29	0.49	43.78	74.00	-30.22	peak
2	8985.000	36.09	10.97	47.06	74.00	-26.94	peak
3	11010.000	34.32	14.94	49.26	74.00	-24.74	peak
4	12630.000	32.10	18.39	50.49	74.00	-23.51	peak
5	13620.000	28.48	21.76	50.24	74.00	-23.76	peak
6	17970.000	23.41	26.72	50.13	74.00	-23.87	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

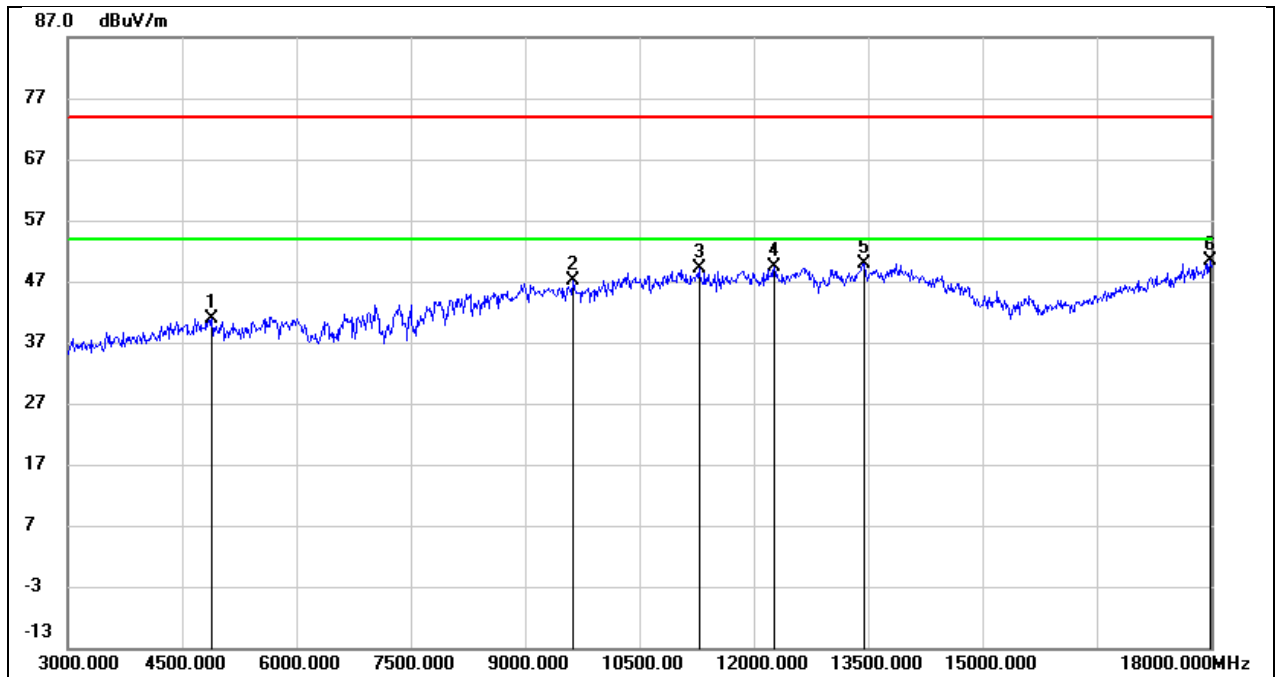


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	40.25	0.64	40.89	74.00	-33.11	peak
2	9630.000	36.02	11.13	47.15	74.00	-26.85	peak
3	11280.000	33.26	15.84	49.10	74.00	-24.90	peak
4	12270.000	30.84	18.55	49.39	74.00	-24.61	peak
5	13440.000	28.28	21.56	49.84	74.00	-24.16	peak
6	17985.000	23.54	26.77	50.31	74.00	-23.69	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

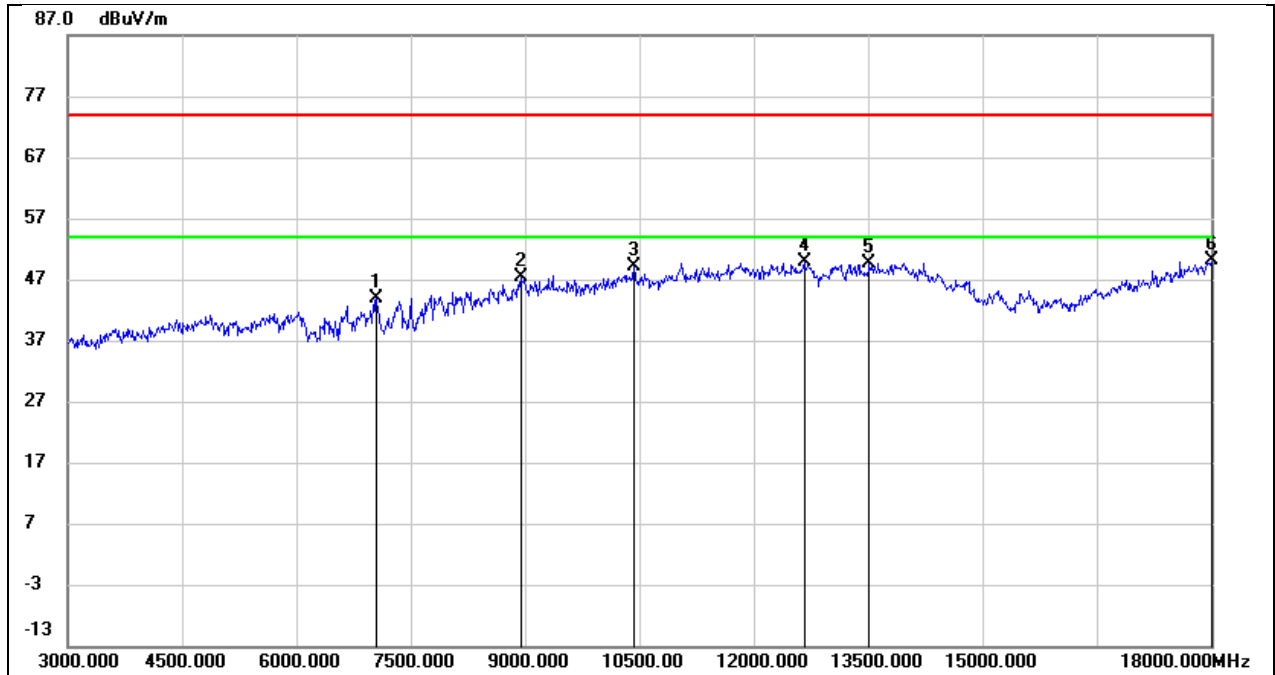


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7050.000	36.76	7.19	43.95	74.00	-30.05	peak
2	8940.000	36.91	10.35	47.26	74.00	-26.74	peak
3	10425.000	35.70	13.51	49.21	74.00	-24.79	peak
4	12660.000	31.45	18.49	49.94	74.00	-24.06	peak
5	13515.000	28.01	21.69	49.70	74.00	-24.30	peak
6	18000.000	23.19	26.83	50.02	74.00	-23.98	peak

Test Mode:	802.11g	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

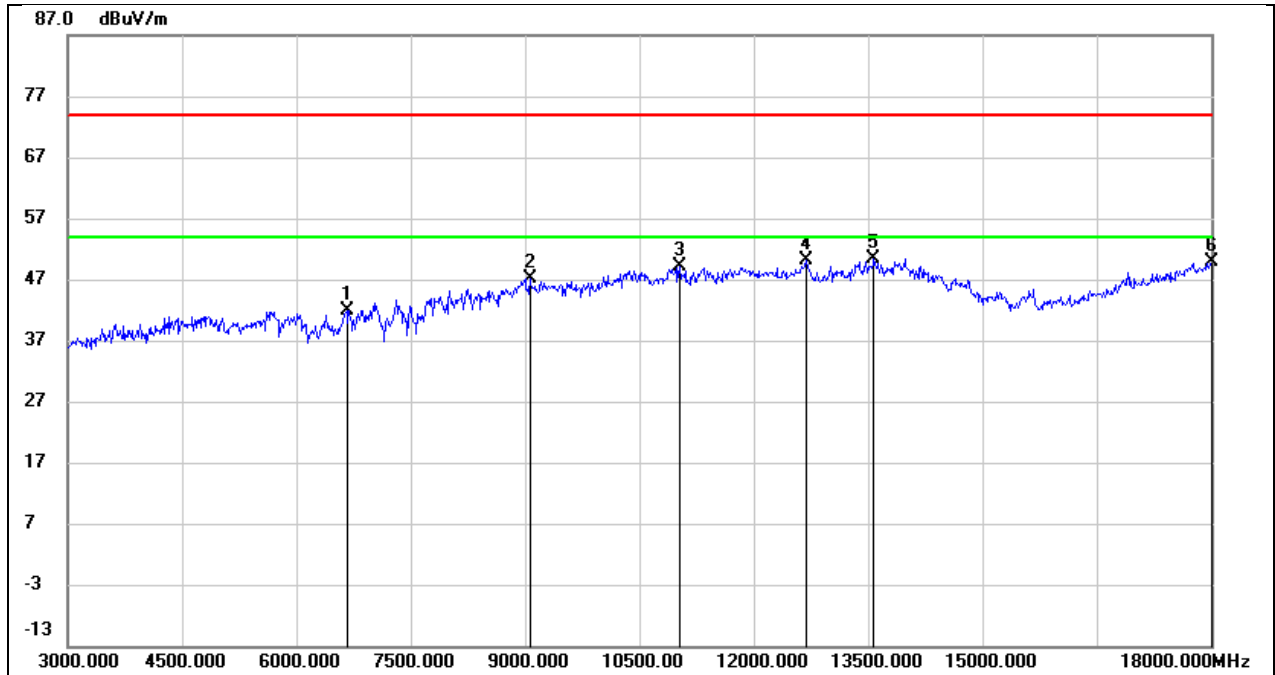


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6660.000	37.00	4.95	41.95	74.00	-32.05	peak
2	9060.000	36.24	10.82	47.06	74.00	-26.94	peak
3	11025.000	34.27	14.97	49.24	74.00	-24.76	peak
4	12690.000	31.58	18.60	50.18	74.00	-23.82	peak
5	13575.000	28.68	21.67	50.35	74.00	-23.65	peak
6	18000.000	23.11	26.83	49.94	74.00	-24.06	peak

Test Mode:	802.11g	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

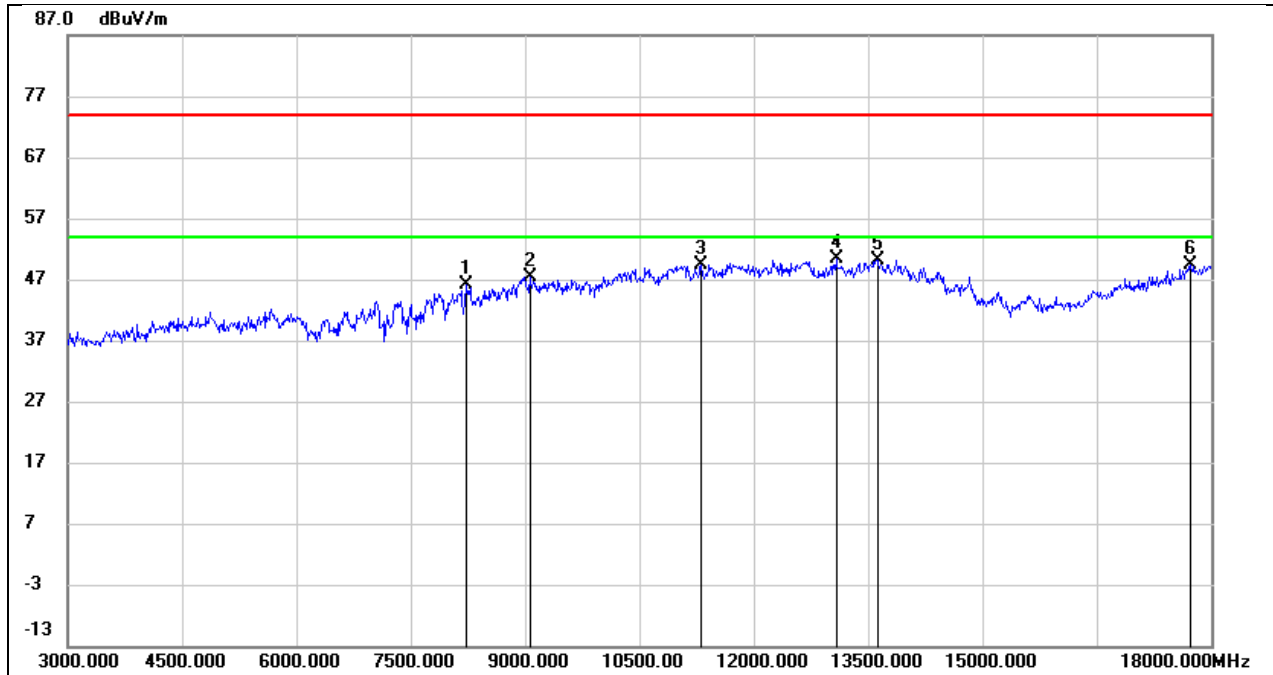


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8235.000	37.34	8.70	46.04	74.00	-27.96	peak
2	9060.000	36.68	10.82	47.50	74.00	-26.50	peak
3	11310.000	33.45	16.02	49.47	74.00	-24.53	peak
4	13080.000	30.79	19.50	50.29	74.00	-23.71	peak
5	13620.000	28.39	21.76	50.15	74.00	-23.85	peak
6	17730.000	23.99	25.44	49.43	74.00	-24.57	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

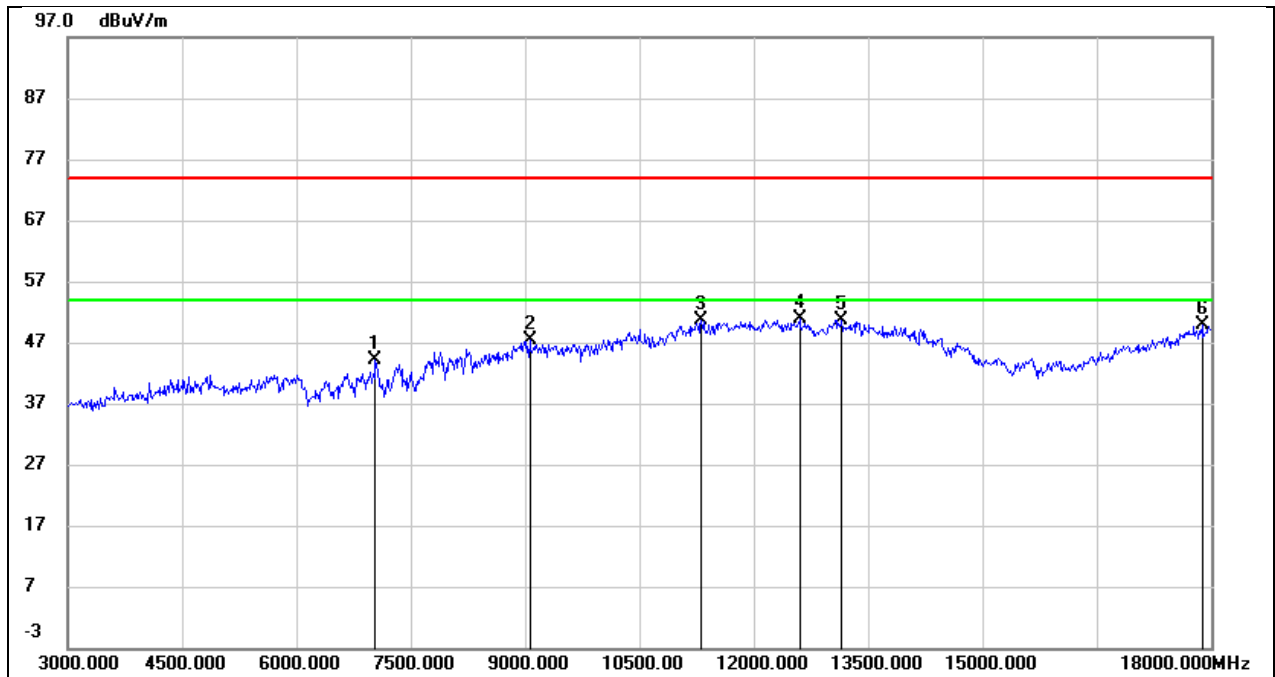


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.91	7.28	44.19	74.00	-29.81	peak
2	9060.000	36.59	10.82	47.41	74.00	-26.59	peak
3	11310.000	34.71	16.02	50.73	74.00	-23.27	peak
4	12600.000	32.50	18.27	50.77	74.00	-23.23	peak
5	13155.000	30.86	19.87	50.73	74.00	-23.27	peak
6	17880.000	23.50	26.39	49.89	74.00	-24.11	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

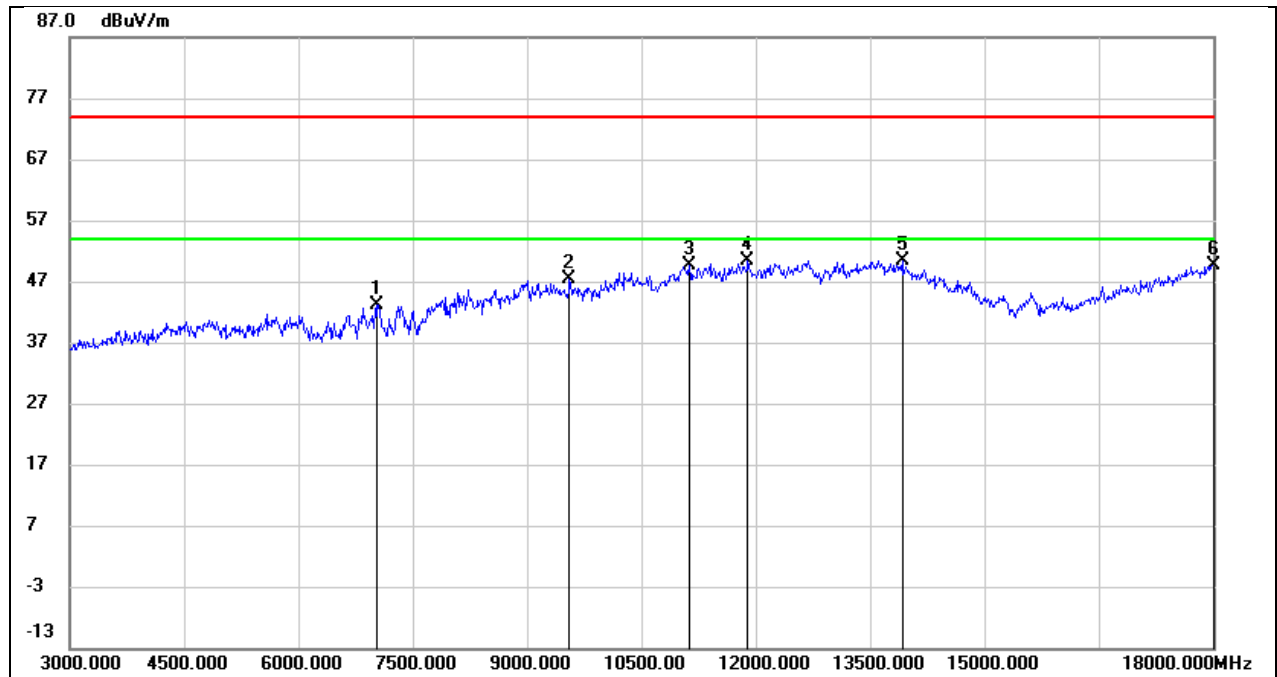


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	35.87	7.28	43.15	74.00	-30.85	peak
2	9555.000	36.45	10.94	47.39	74.00	-26.61	peak
3	11130.000	34.41	15.22	49.63	74.00	-24.37	peak
4	11895.000	32.23	18.04	50.27	74.00	-23.73	peak
5	13920.000	27.63	22.71	50.34	74.00	-23.66	peak
6	18000.000	22.74	26.83	49.57	74.00	-24.43	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

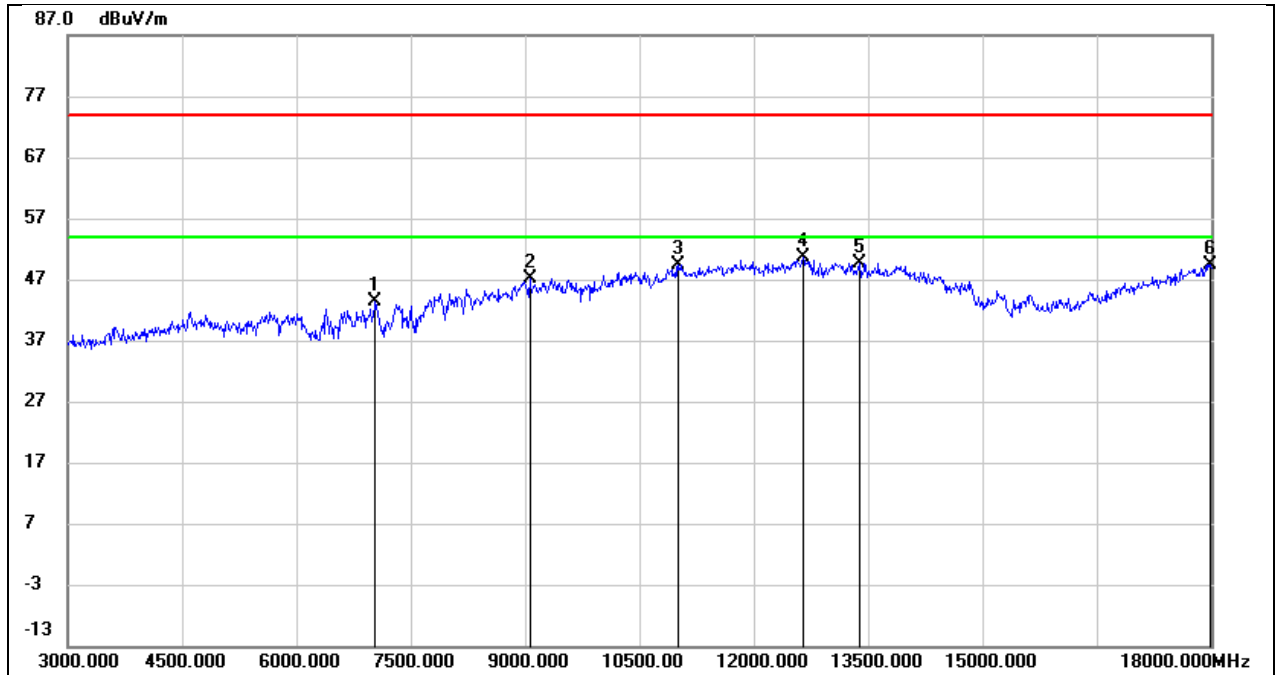


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.20	7.28	43.48	74.00	-30.52	peak
2	9060.000	36.26	10.82	47.08	74.00	-26.92	peak
3	11010.000	34.40	14.94	49.34	74.00	-24.66	peak
4	12645.000	32.19	18.44	50.63	74.00	-23.37	peak
5	13395.000	28.30	21.43	49.73	74.00	-24.27	peak
6	17985.000	22.73	26.77	49.50	74.00	-24.50	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

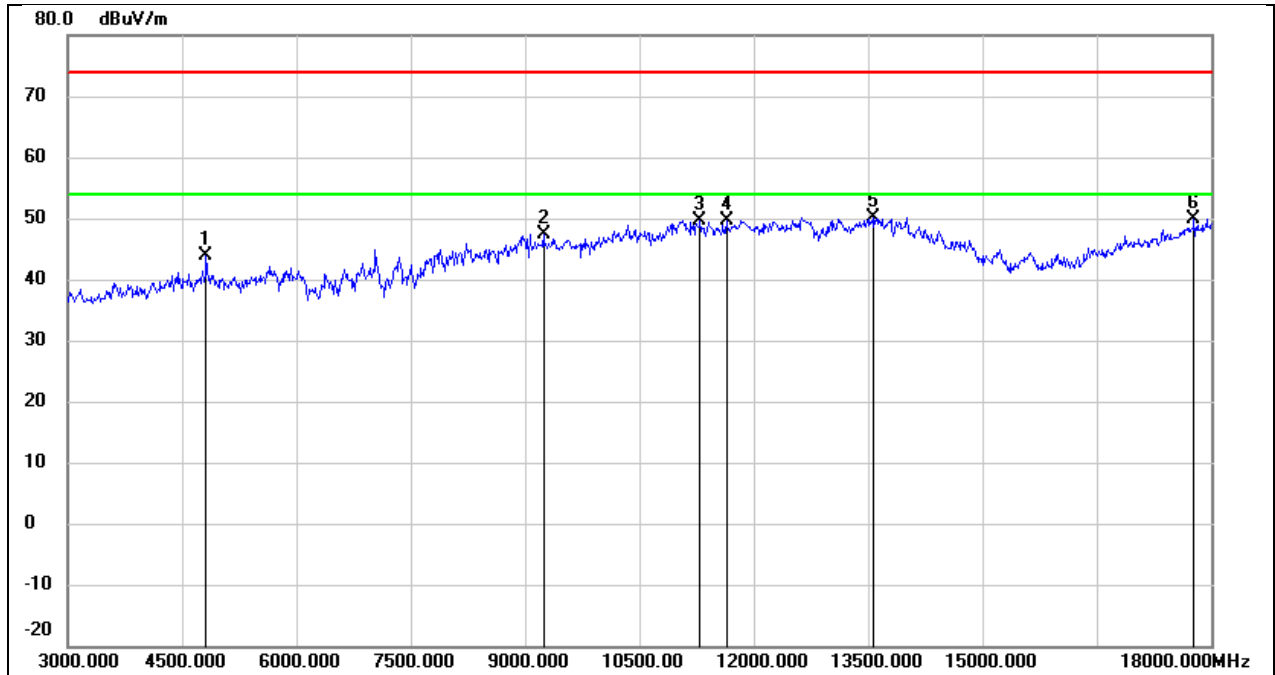


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.44	0.49	43.93	74.00	-30.07	peak
2	9240.000	37.38	10.10	47.48	74.00	-26.52	peak
3	11295.000	33.76	15.93	49.69	74.00	-24.31	peak
4	11640.000	32.42	17.14	49.56	74.00	-24.44	peak
5	13560.000	28.51	21.67	50.18	74.00	-23.82	peak
6	17775.000	23.90	25.86	49.76	74.00	-24.24	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

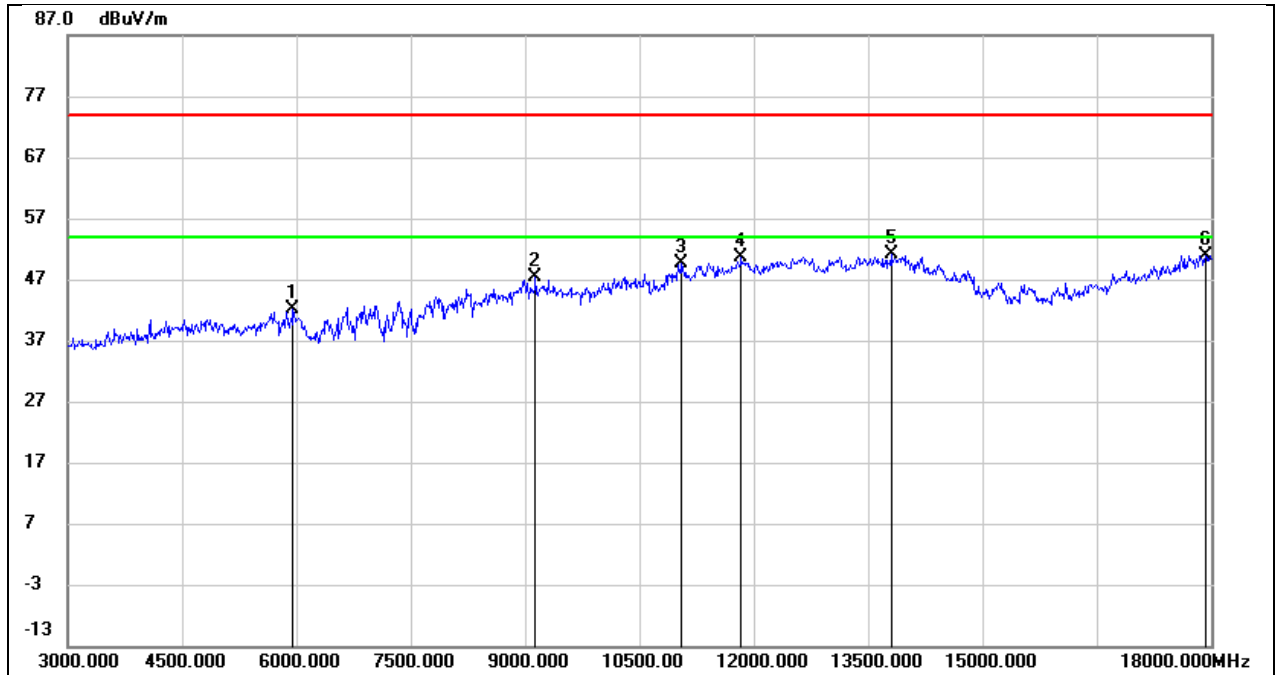


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5955.000	39.12	2.93	42.05	74.00	-31.95	peak
2	9135.000	36.97	10.39	47.36	74.00	-26.64	peak
3	11055.000	34.69	15.04	49.73	74.00	-24.27	peak
4	11835.000	32.78	17.79	50.57	74.00	-23.43	peak
5	13800.000	28.46	22.64	51.10	74.00	-22.90	peak
6	17925.000	24.38	26.55	50.93	74.00	-23.07	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

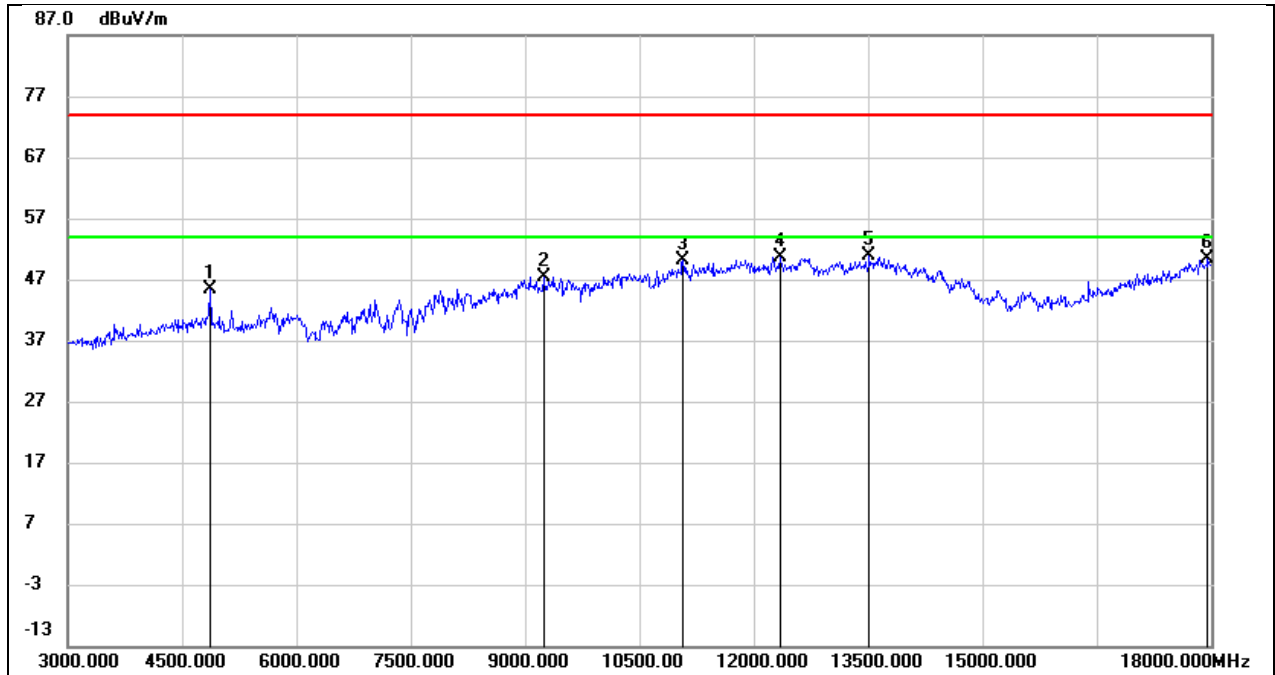


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.67	0.61	45.28	74.00	-28.72	peak
2	9240.000	37.31	10.10	47.41	74.00	-26.59	peak
3	11070.000	34.97	15.08	50.05	74.00	-23.95	peak
4	12345.000	31.92	18.81	50.73	74.00	-23.27	peak
5	13515.000	29.09	21.69	50.78	74.00	-23.22	peak
6	17955.000	23.64	26.66	50.30	74.00	-23.70	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

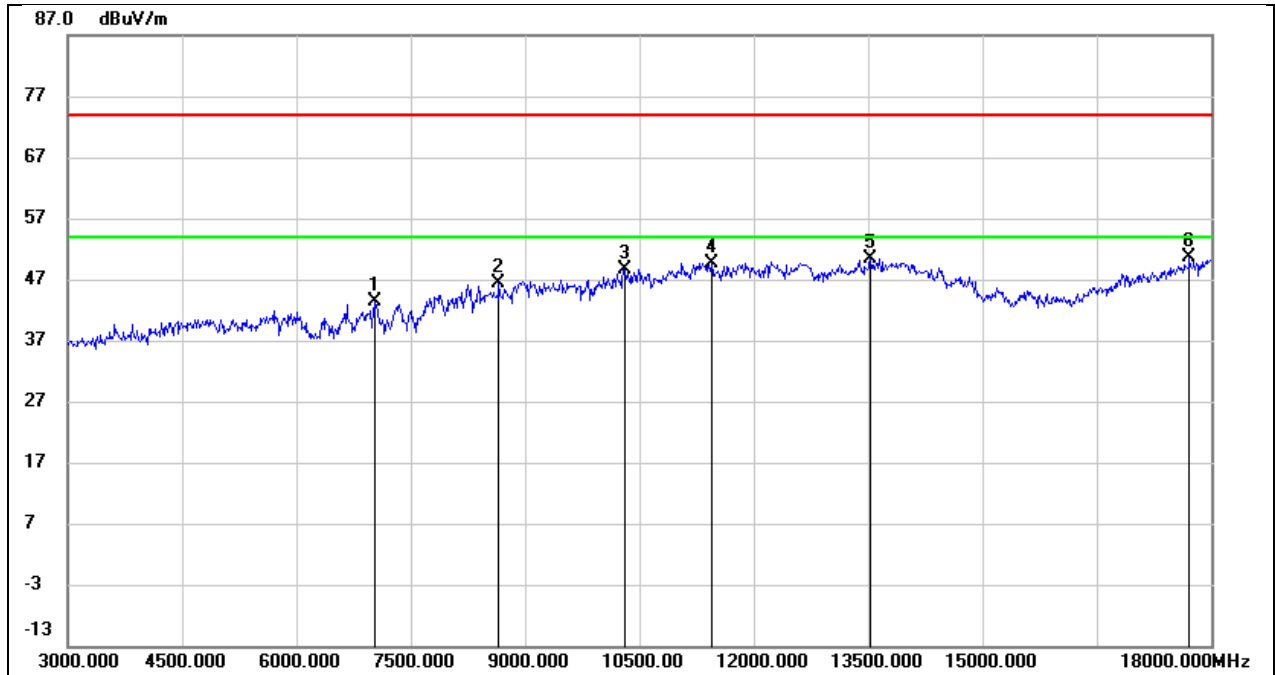


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.20	7.28	43.48	74.00	-30.52	peak
2	8655.000	37.63	8.65	46.28	74.00	-27.72	peak
3	10305.000	35.67	13.00	48.67	74.00	-25.33	peak
4	11445.000	32.95	16.69	49.64	74.00	-24.36	peak
5	13530.000	28.79	21.68	50.47	74.00	-23.53	peak
6	17715.000	25.37	25.31	50.68	74.00	-23.32	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

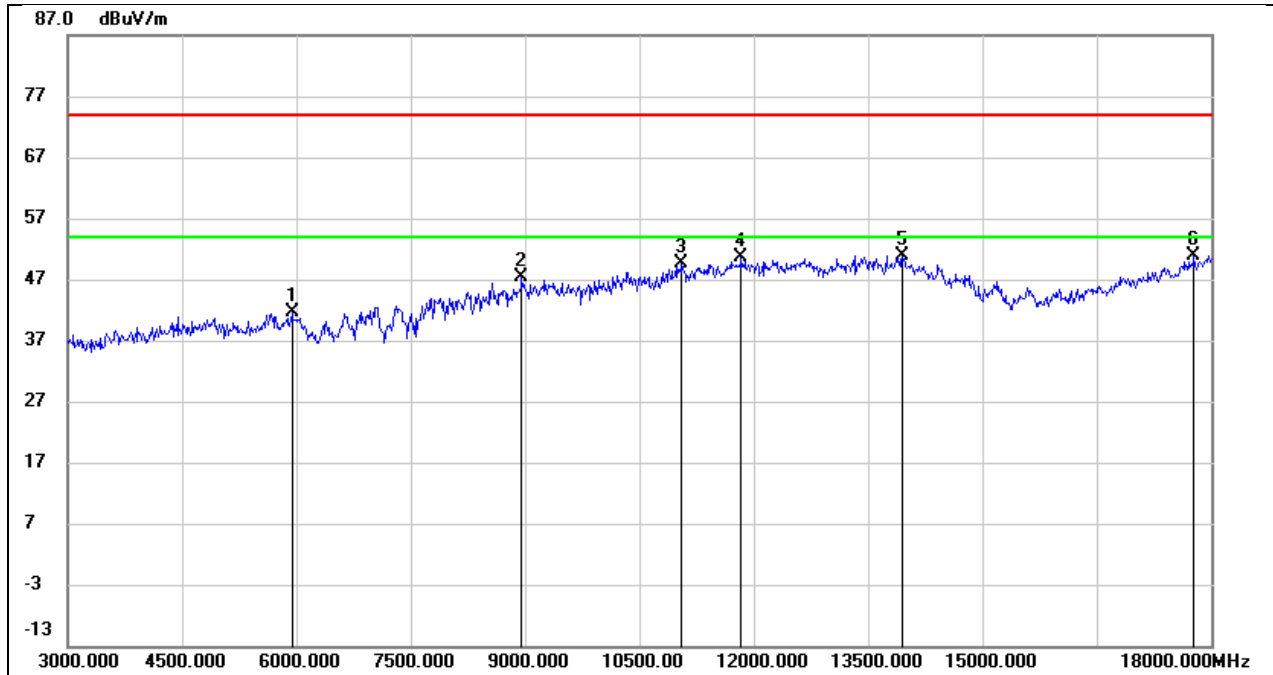


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	38.68	2.85	41.53	74.00	-32.47	peak
2	8955.000	36.72	10.56	47.28	74.00	-26.72	peak
3	11055.000	34.59	15.04	49.63	74.00	-24.37	peak
4	11835.000	32.92	17.79	50.71	74.00	-23.29	peak
5	13950.000	28.19	22.73	50.92	74.00	-23.08	peak
6	17775.000	25.06	25.86	50.92	74.00	-23.08	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

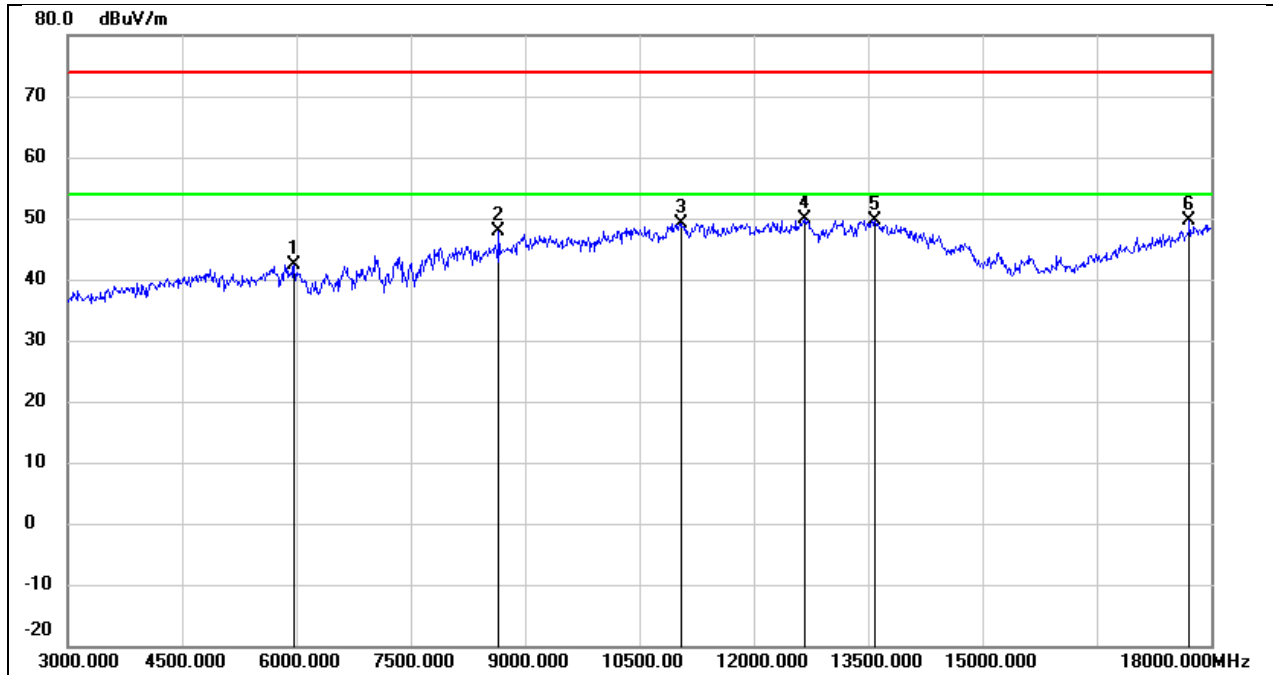


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	39.41	2.99	42.40	74.00	-31.60	peak
2	8655.000	39.16	8.65	47.81	74.00	-26.19	peak
3	11055.000	34.15	15.04	49.19	74.00	-24.81	peak
4	12660.000	31.29	18.49	49.78	74.00	-24.22	peak
5	13590.000	28.02	21.66	49.68	74.00	-24.32	peak
6	17715.000	24.32	25.31	49.63	74.00	-24.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

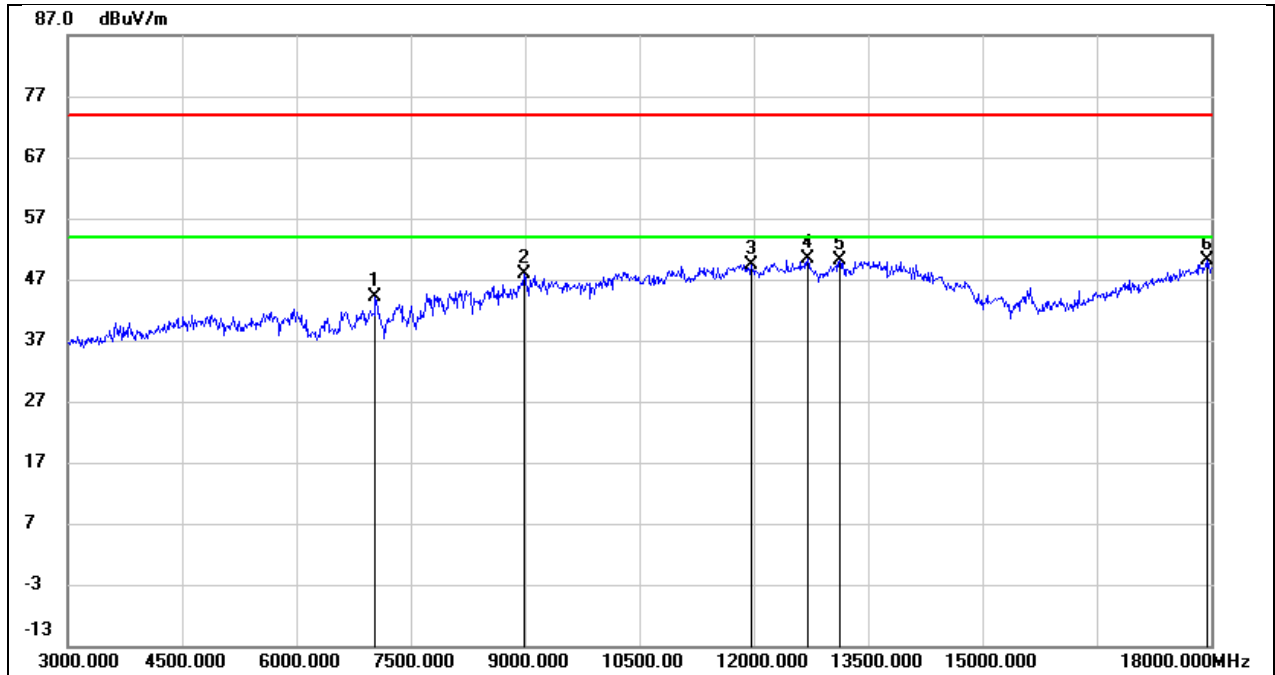


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.80	7.28	44.08	74.00	-29.92	peak
2	8985.000	36.87	10.97	47.84	74.00	-26.16	peak
3	11970.000	31.05	18.37	49.42	74.00	-24.58	peak
4	12705.000	31.66	18.66	50.32	74.00	-23.68	peak
5	13125.000	30.42	19.72	50.14	74.00	-23.86	peak
6	17940.000	23.63	26.61	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

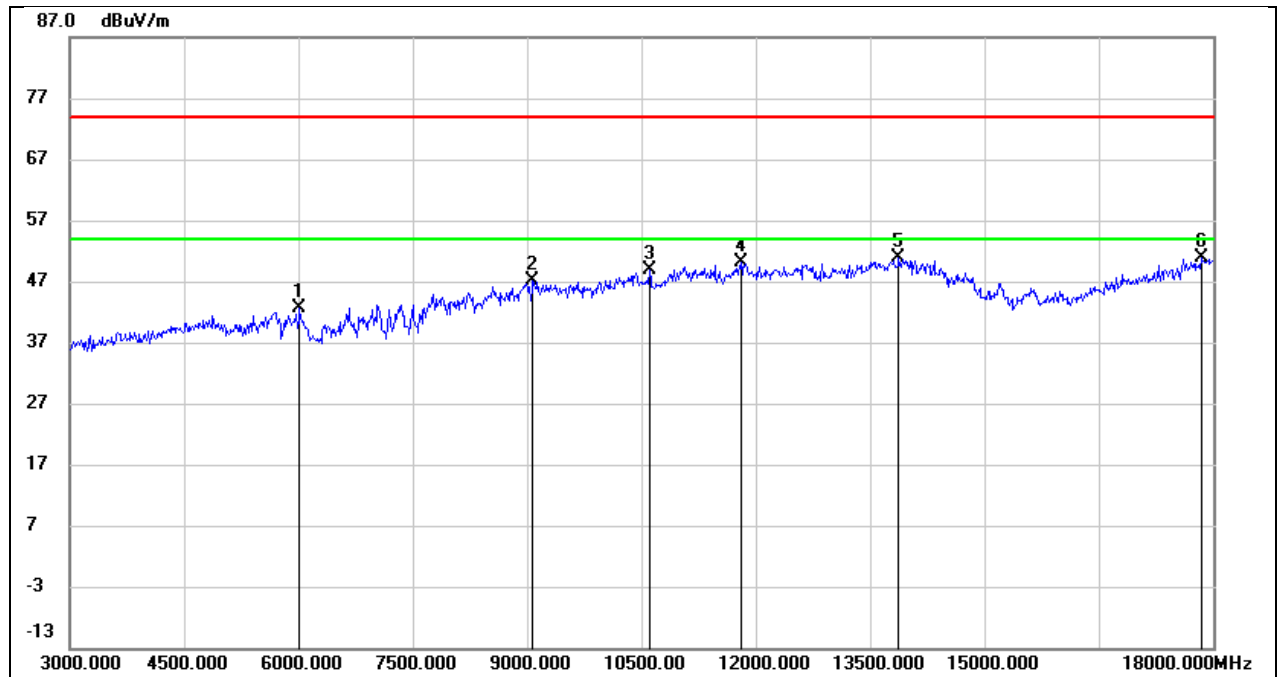


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	39.52	3.09	42.61	74.00	-31.39	peak
2	9075.000	36.31	10.74	47.05	74.00	-26.95	peak
3	10605.000	35.02	13.94	48.96	74.00	-25.04	peak
4	11805.000	32.36	17.65	50.01	74.00	-23.99	peak
5	13875.000	28.17	22.68	50.85	74.00	-23.15	peak
6	17850.000	24.63	26.28	50.91	74.00	-23.09	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

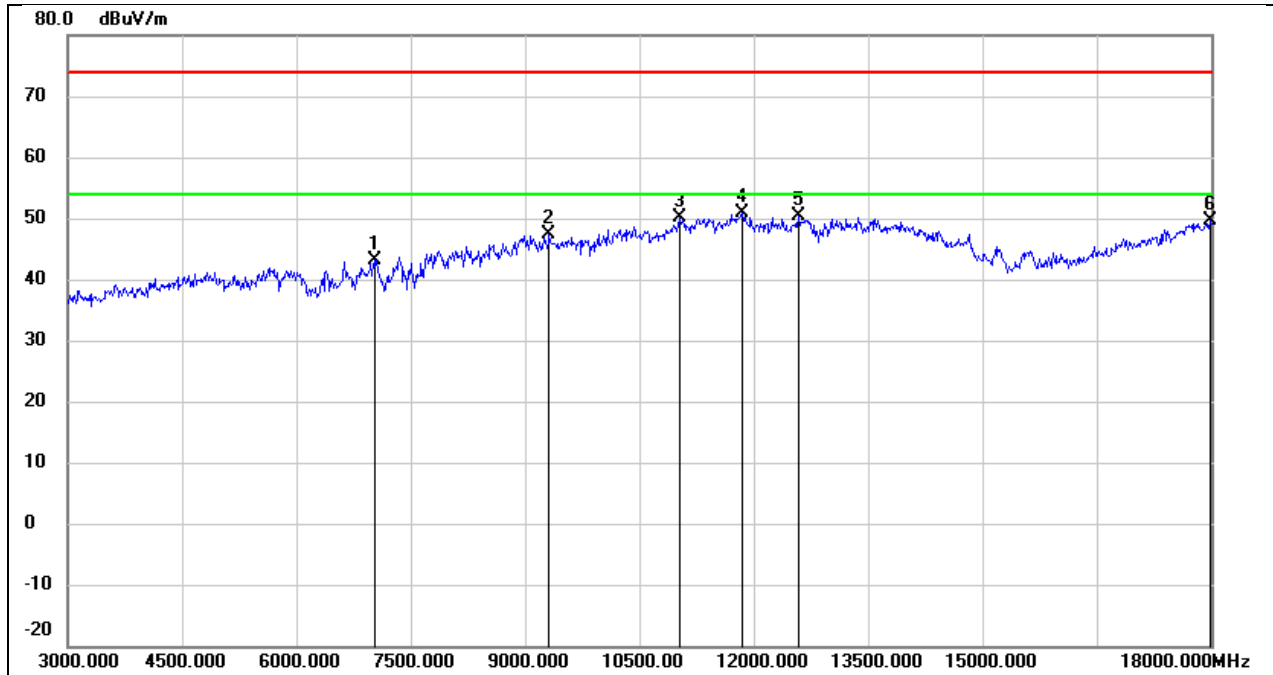


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	35.87	7.28	43.15	74.00	-30.85	peak
2	9315.000	37.14	10.26	47.40	74.00	-26.60	peak
3	11025.000	35.25	14.97	50.22	74.00	-23.78	peak
4	11850.000	32.98	17.84	50.82	74.00	-23.18	peak
5	12585.000	32.15	18.31	50.46	74.00	-23.54	peak
6	17985.000	22.97	26.77	49.74	74.00	-24.26	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

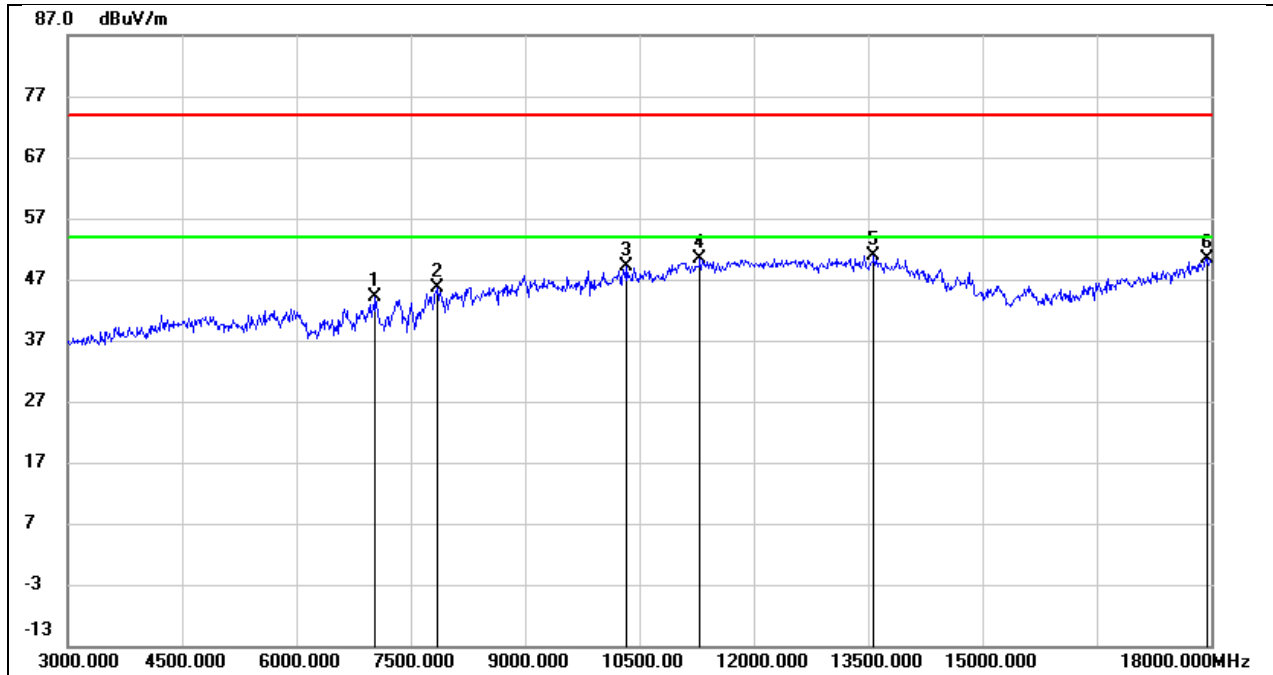


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.92	7.28	44.20	74.00	-29.80	peak
2	7845.000	38.23	7.42	45.65	74.00	-28.35	peak
3	10335.000	36.05	13.14	49.19	74.00	-24.81	peak
4	11295.000	34.36	15.93	50.29	74.00	-23.71	peak
5	13575.000	29.17	21.67	50.84	74.00	-23.16	peak
6	17940.000	23.84	26.61	50.45	74.00	-23.55	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

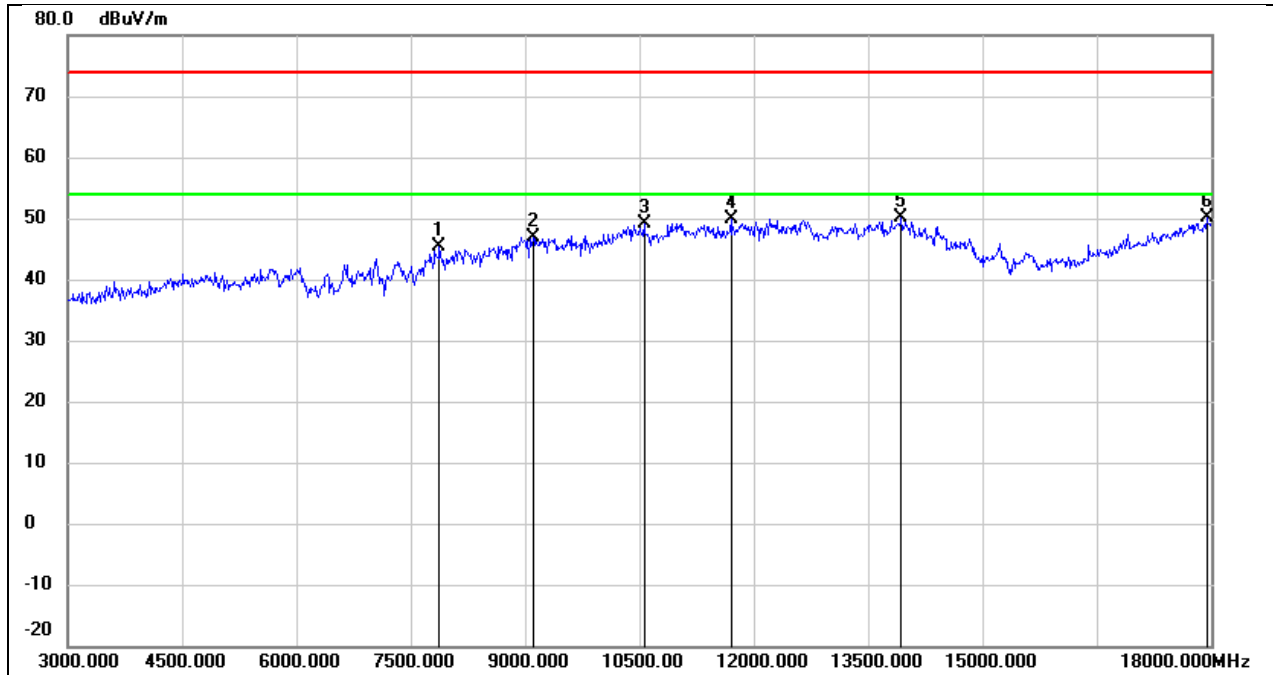


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7875.000	38.13	7.33	45.46	74.00	-28.54	peak
2	9105.000	36.23	10.57	46.80	74.00	-27.20	peak
3	10560.000	35.17	13.84	49.01	74.00	-24.99	peak
4	11700.000	32.47	17.32	49.79	74.00	-24.21	peak
5	13935.000	27.33	22.72	50.05	74.00	-23.95	peak
6	17940.000	23.44	26.61	50.05	74.00	-23.95	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2447
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

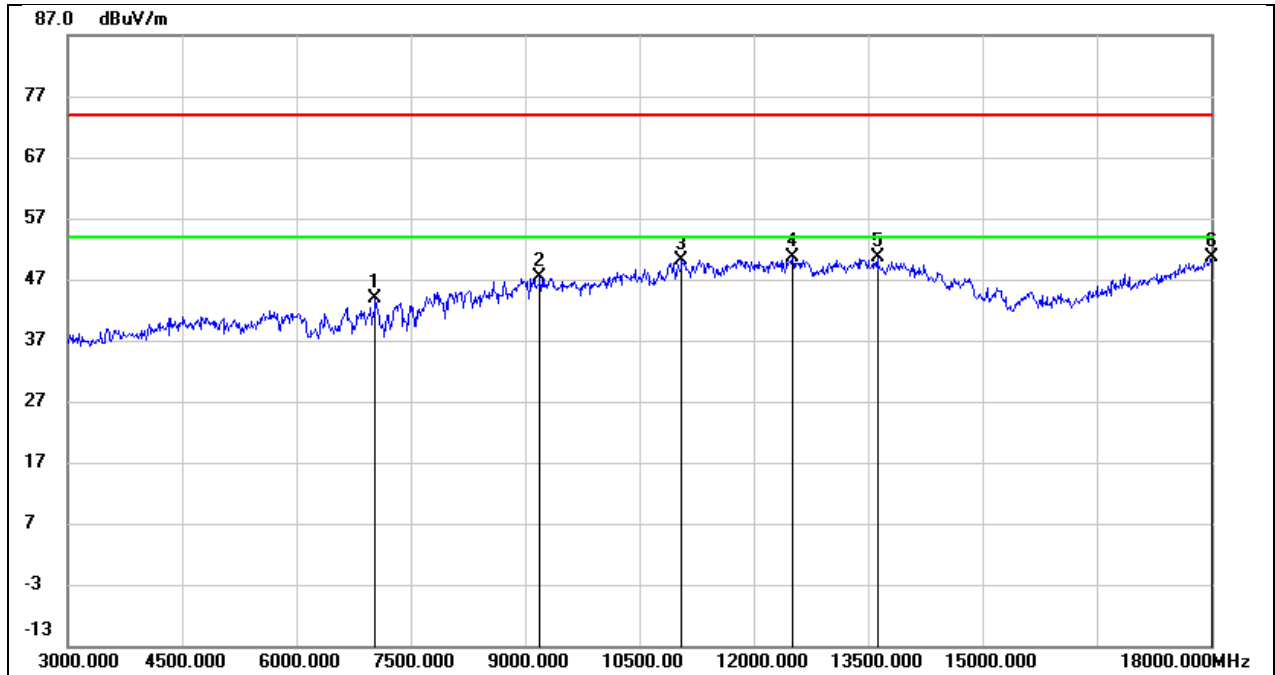


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.53	7.28	43.81	74.00	-30.19	peak
2	9195.000	37.26	10.03	47.29	74.00	-26.71	peak
3	11055.000	35.15	15.04	50.19	74.00	-23.81	peak
4	12510.000	32.22	18.51	50.73	74.00	-23.27	peak
5	13620.000	28.76	21.76	50.52	74.00	-23.48	peak
6	18000.000	23.71	26.83	50.54	74.00	-23.46	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

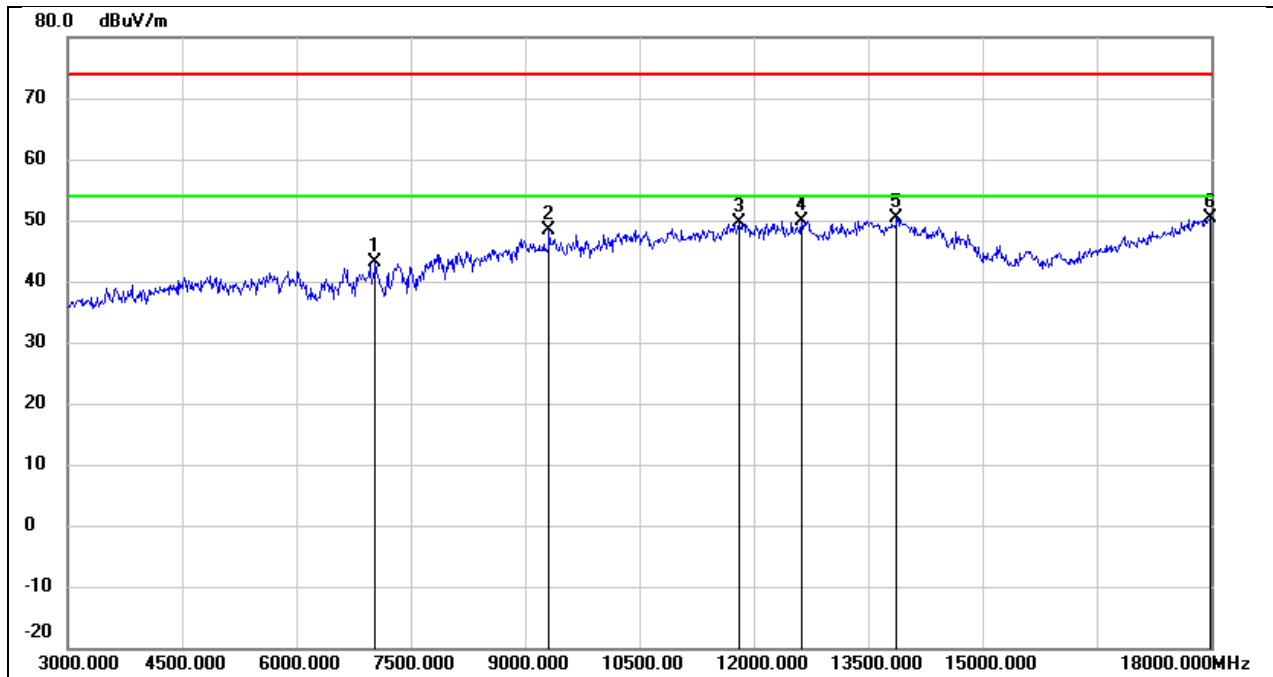


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	35.88	7.28	43.16	74.00	-30.84	peak
2	9315.000	38.03	10.26	48.29	74.00	-25.71	peak
3	11805.000	31.99	17.65	49.64	74.00	-24.36	peak
4	12630.000	31.54	18.39	49.93	74.00	-24.07	peak
5	13875.000	27.67	22.68	50.35	74.00	-23.65	peak
6	17985.000	23.65	26.77	50.42	74.00	-23.58	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

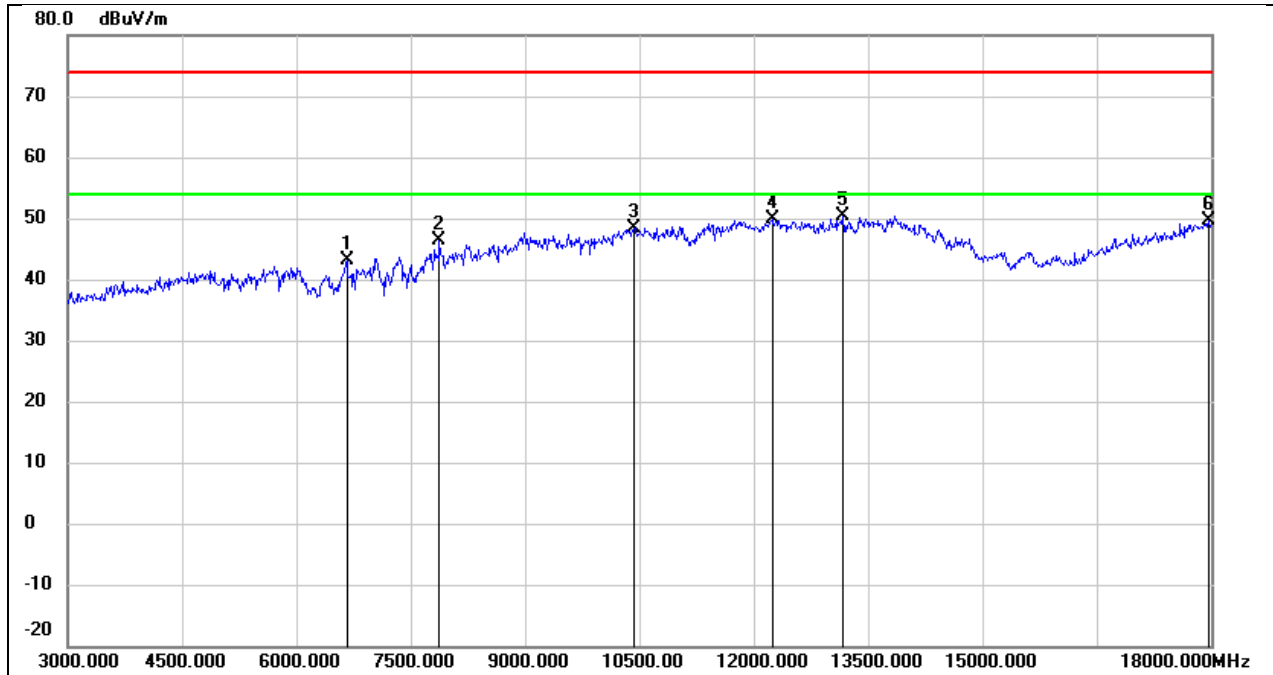


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6660.000	38.06	4.95	43.01	74.00	-30.99	peak
2	7875.000	39.08	7.33	46.41	74.00	-27.59	peak
3	10425.000	34.93	13.51	48.44	74.00	-25.56	peak
4	12240.000	31.40	18.46	49.86	74.00	-24.14	peak
5	13170.000	30.41	19.95	50.36	74.00	-23.64	peak
6	17970.000	22.81	26.72	49.53	74.00	-24.47	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

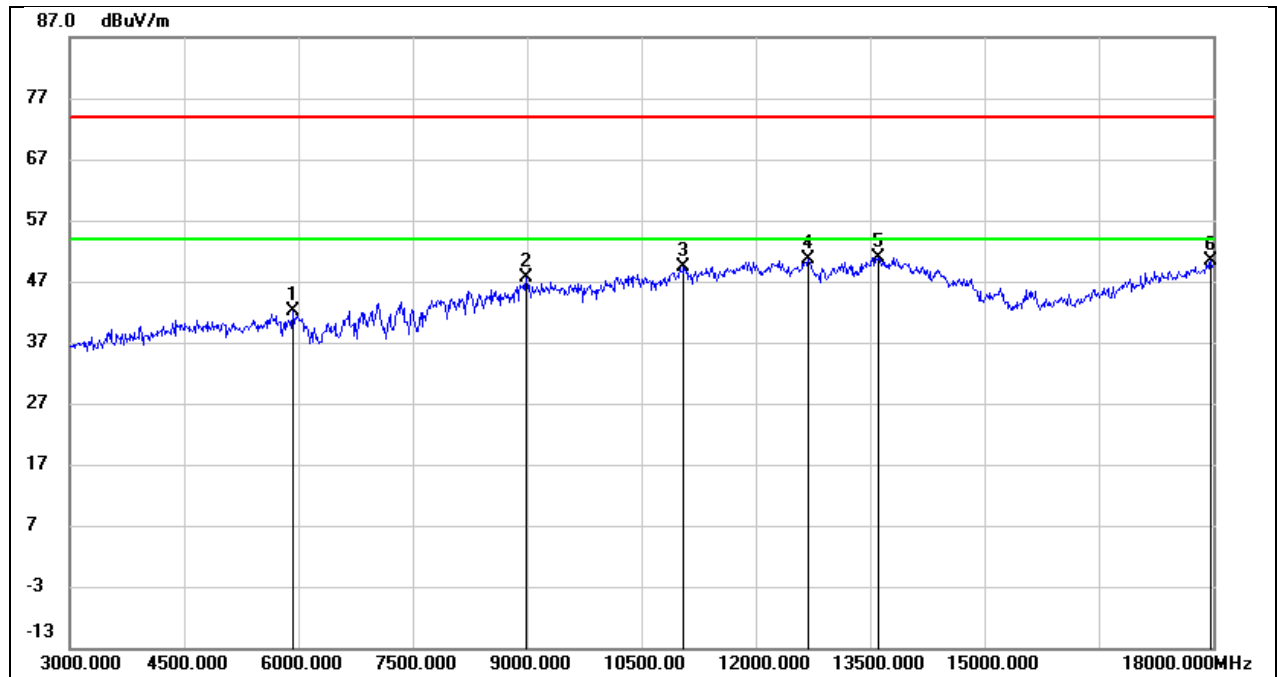


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	39.22	2.80	42.02	74.00	-31.98	peak
2	8985.000	36.70	10.97	47.67	74.00	-26.33	peak
3	11055.000	34.40	15.04	49.44	74.00	-24.56	peak
4	12690.000	32.03	18.60	50.63	74.00	-23.37	peak
5	13605.000	29.30	21.68	50.98	74.00	-23.02	peak
6	17970.000	23.70	26.72	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

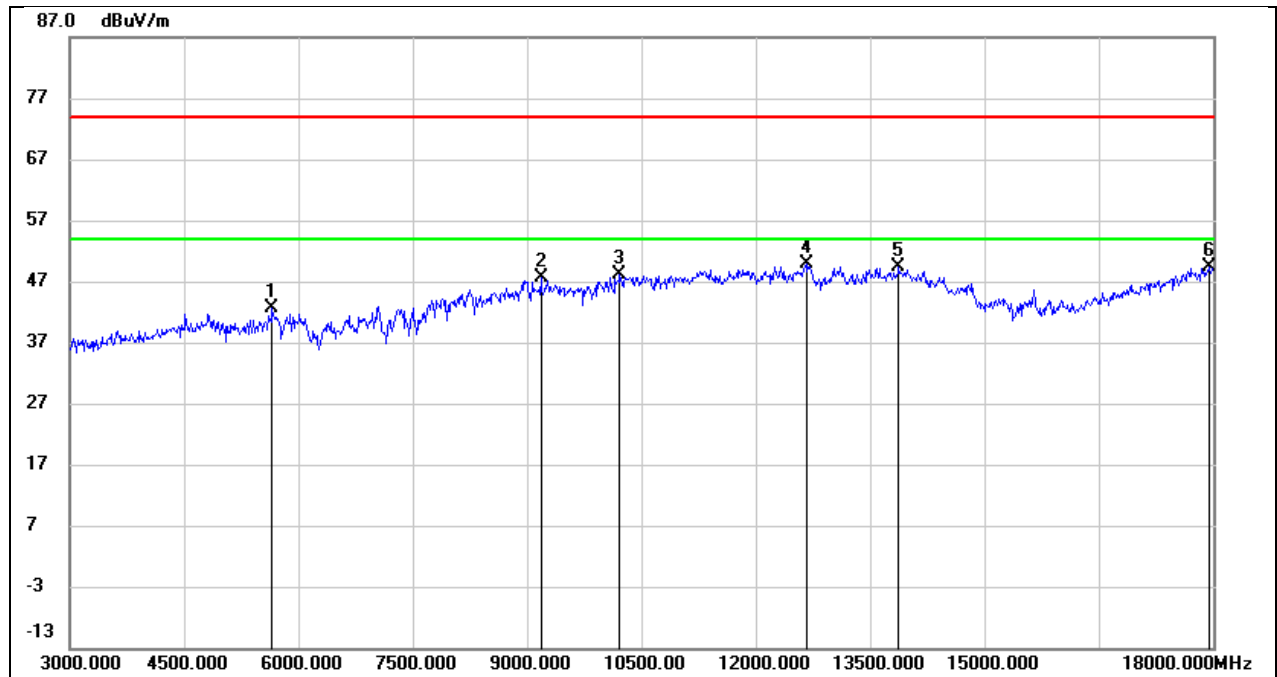


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.85	2.67	42.52	74.00	-31.48	peak
2	9180.000	37.54	10.13	47.67	74.00	-26.33	peak
3	10215.000	35.52	12.56	48.08	74.00	-25.92	peak
4	12660.000	31.49	18.49	49.98	74.00	-24.02	peak
5	13875.000	26.73	22.68	49.41	74.00	-24.59	peak
6	17955.000	22.71	26.66	49.37	74.00	-24.63	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

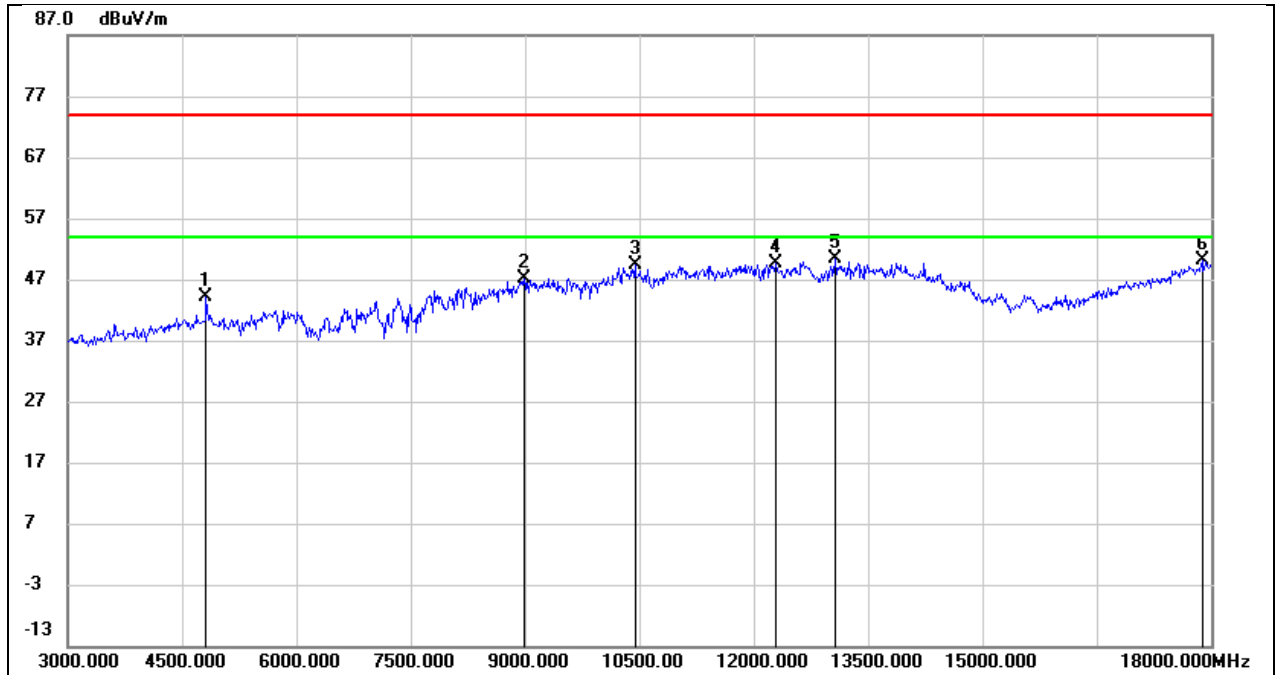


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.54	0.49	44.03	74.00	-29.97	peak
2	8985.000	36.26	10.97	47.23	74.00	-26.77	peak
3	10440.000	35.79	13.56	49.35	74.00	-24.65	peak
4	12285.000	31.00	18.60	49.60	74.00	-24.40	peak
5	13065.000	31.07	19.42	50.49	74.00	-23.51	peak
6	17880.000	23.86	26.39	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

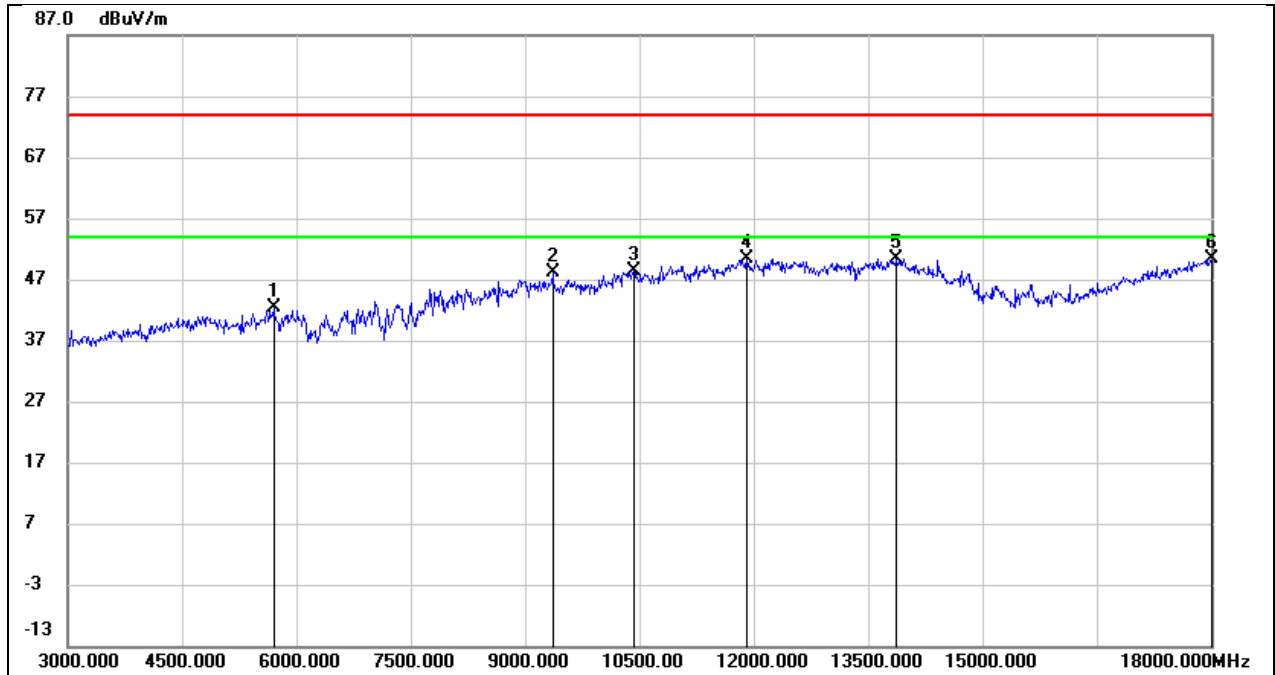


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	39.95	2.54	42.49	74.00	-31.51	peak
2	9360.000	37.80	10.36	48.16	74.00	-25.84	peak
3	10425.000	34.78	13.51	48.29	74.00	-25.71	peak
4	11910.000	32.32	18.11	50.43	74.00	-23.57	peak
5	13875.000	27.77	22.68	50.45	74.00	-23.55	peak
6	18000.000	23.55	26.83	50.38	74.00	-23.62	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

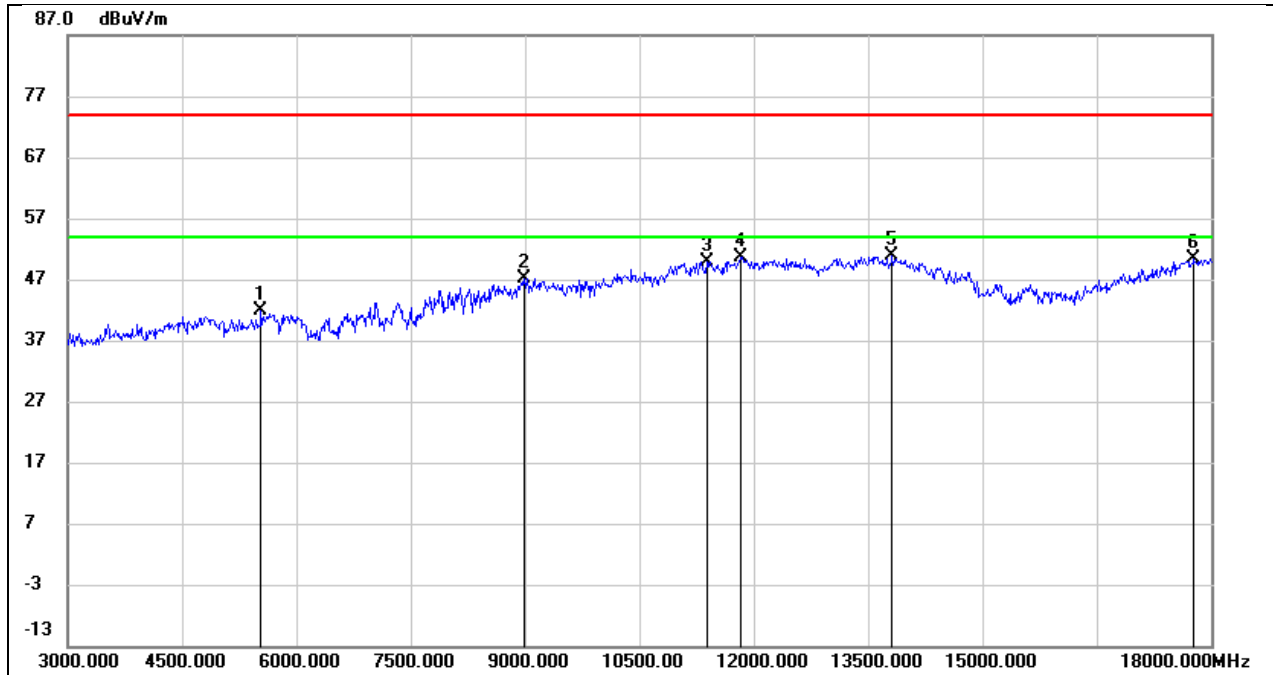


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5535.000	39.51	2.49	42.00	74.00	-32.00	peak
2	8985.000	36.23	10.97	47.20	74.00	-26.80	peak
3	11385.000	33.49	16.45	49.94	74.00	-24.06	peak
4	11835.000	32.85	17.79	50.64	74.00	-23.36	peak
5	13815.000	28.17	22.65	50.82	74.00	-23.18	peak
6	17775.000	24.59	25.86	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

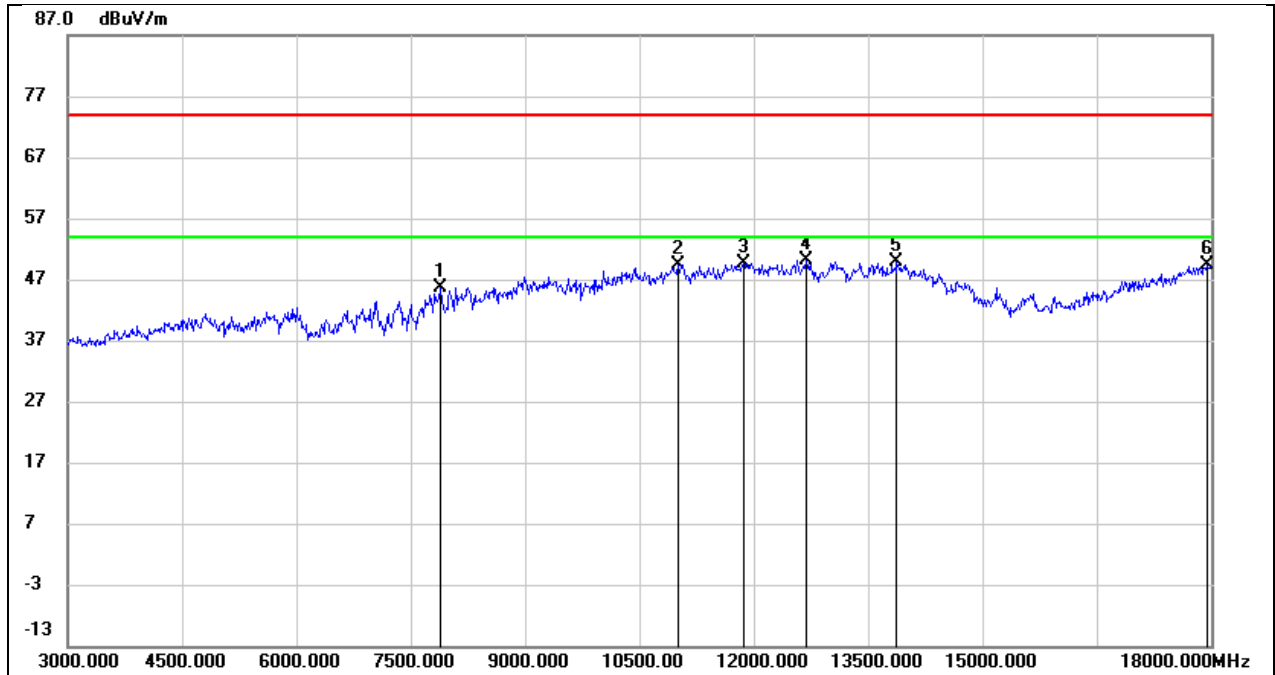


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7890.000	38.41	7.29	45.70	74.00	-28.30	peak
2	11010.000	34.55	14.94	49.49	74.00	-24.51	peak
3	11865.000	31.76	17.91	49.67	74.00	-24.33	peak
4	12690.000	31.51	18.60	50.11	74.00	-23.89	peak
5	13875.000	27.16	22.68	49.84	74.00	-24.16	peak
6	17940.000	22.80	26.61	49.41	74.00	-24.59	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

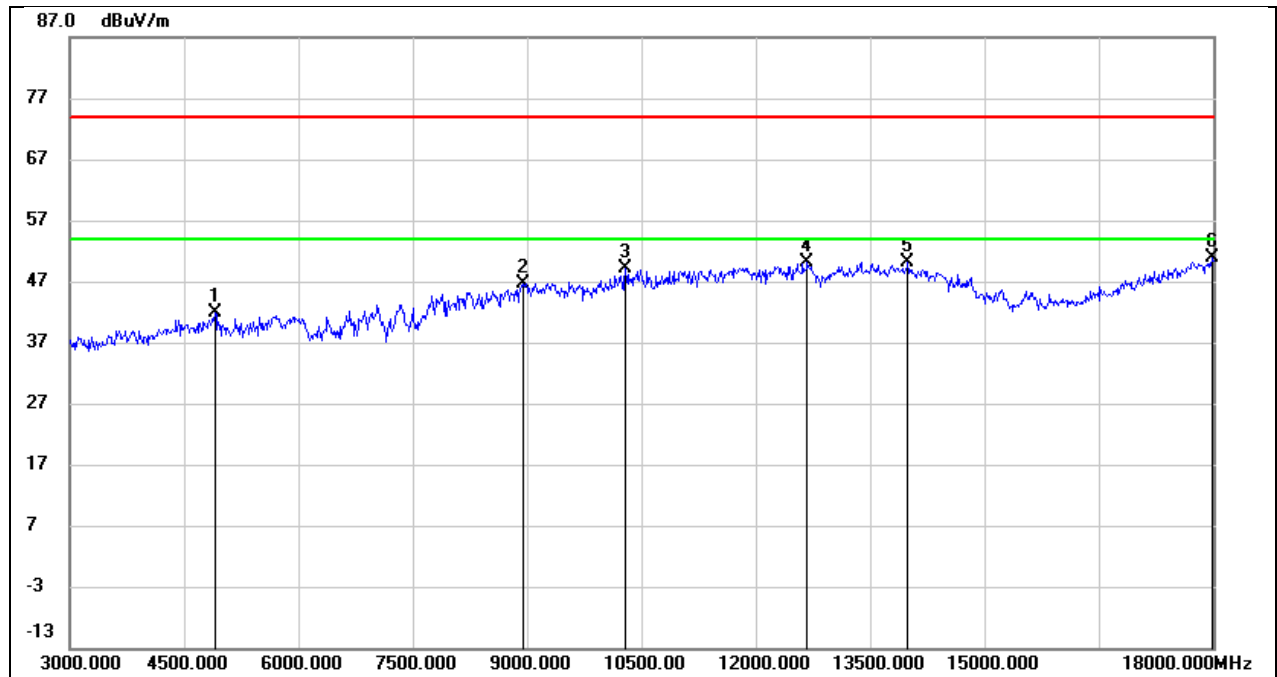


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	41.11	0.66	41.77	74.00	-32.23	peak
2	8940.000	36.37	10.35	46.72	74.00	-27.28	peak
3	10290.000	36.24	12.93	49.17	74.00	-24.83	peak
4	12675.000	31.65	18.54	50.19	74.00	-23.81	peak
5	13995.000	27.48	22.76	50.24	74.00	-23.76	peak
6	17985.000	24.15	26.77	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

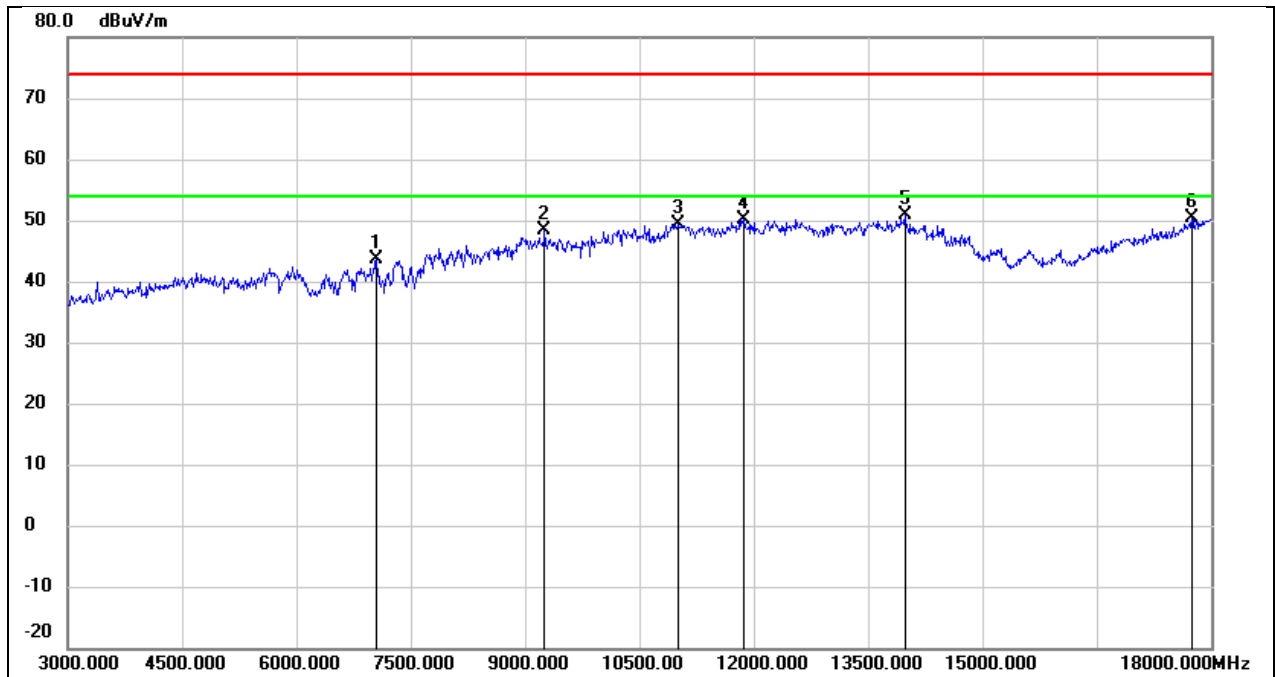


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7050.000	36.37	7.19	43.56	74.00	-30.44	peak
2	9255.000	38.13	10.14	48.27	74.00	-25.73	peak
3	11010.000	34.52	14.94	49.46	74.00	-24.54	peak
4	11865.000	32.11	17.91	50.02	74.00	-23.98	peak
5	13980.000	28.07	22.75	50.82	74.00	-23.18	peak
6	17745.000	24.74	25.58	50.32	74.00	-23.68	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

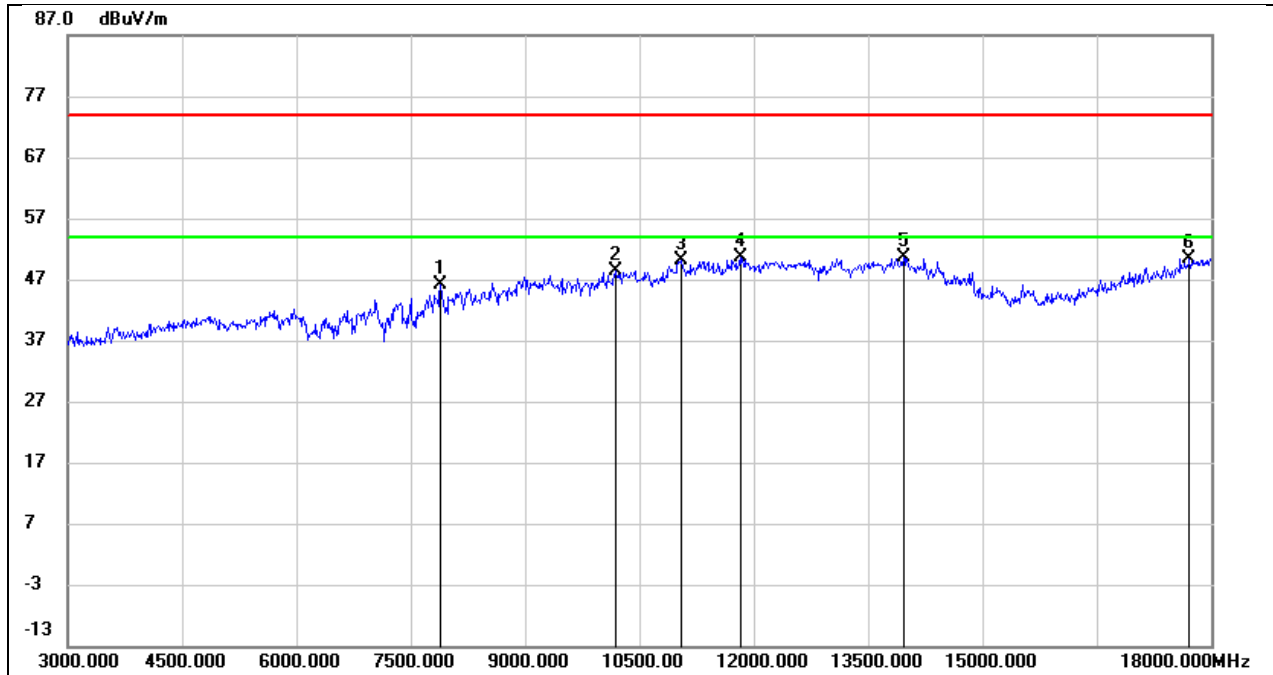


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7890.000	38.73	7.29	46.02	74.00	-27.98	peak
2	10185.000	35.90	12.48	48.38	74.00	-25.62	peak
3	11055.000	35.12	15.04	50.16	74.00	-23.84	peak
4	11820.000	32.80	17.73	50.53	74.00	-23.47	peak
5	13965.000	27.85	22.74	50.59	74.00	-23.41	peak
6	17715.000	25.17	25.31	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

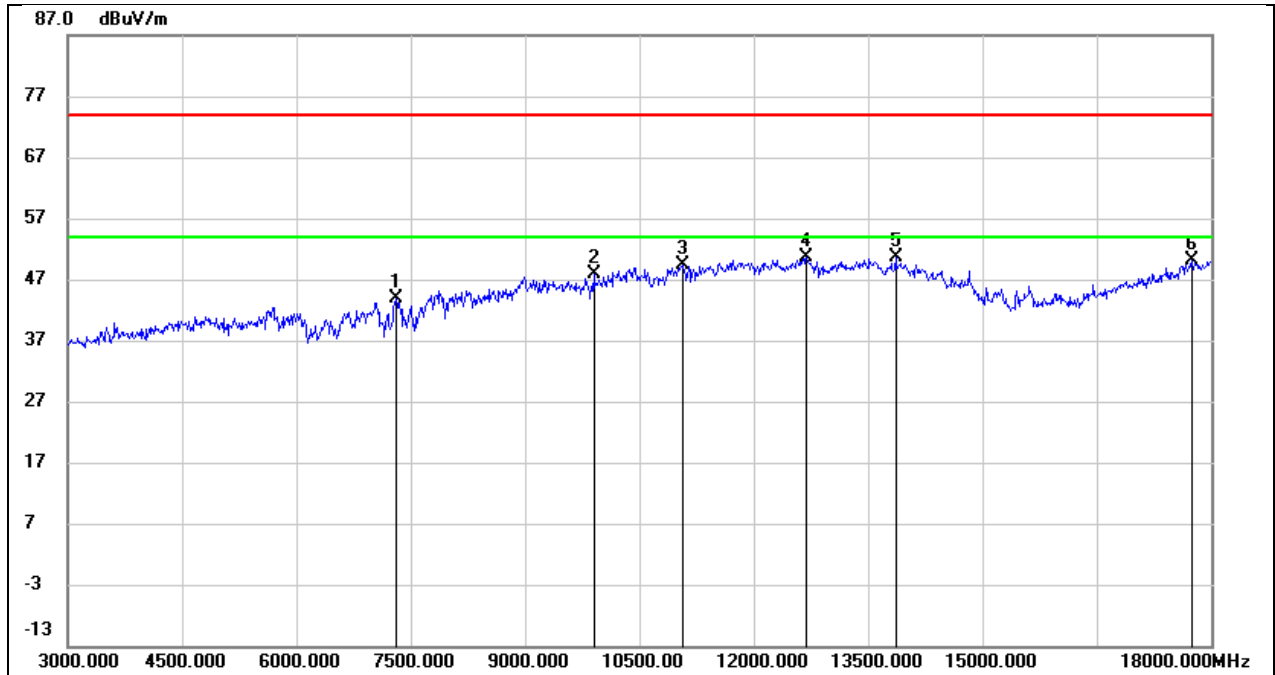


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	36.90	6.89	43.79	74.00	-30.21	peak
2	9900.000	35.77	12.00	47.77	74.00	-26.23	peak
3	11070.000	34.21	15.08	49.29	74.00	-24.71	peak
4	12690.000	32.10	18.60	50.70	74.00	-23.30	peak
5	13860.000	27.89	22.68	50.57	74.00	-23.43	peak
6	17745.000	24.61	25.58	50.19	74.00	-23.81	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

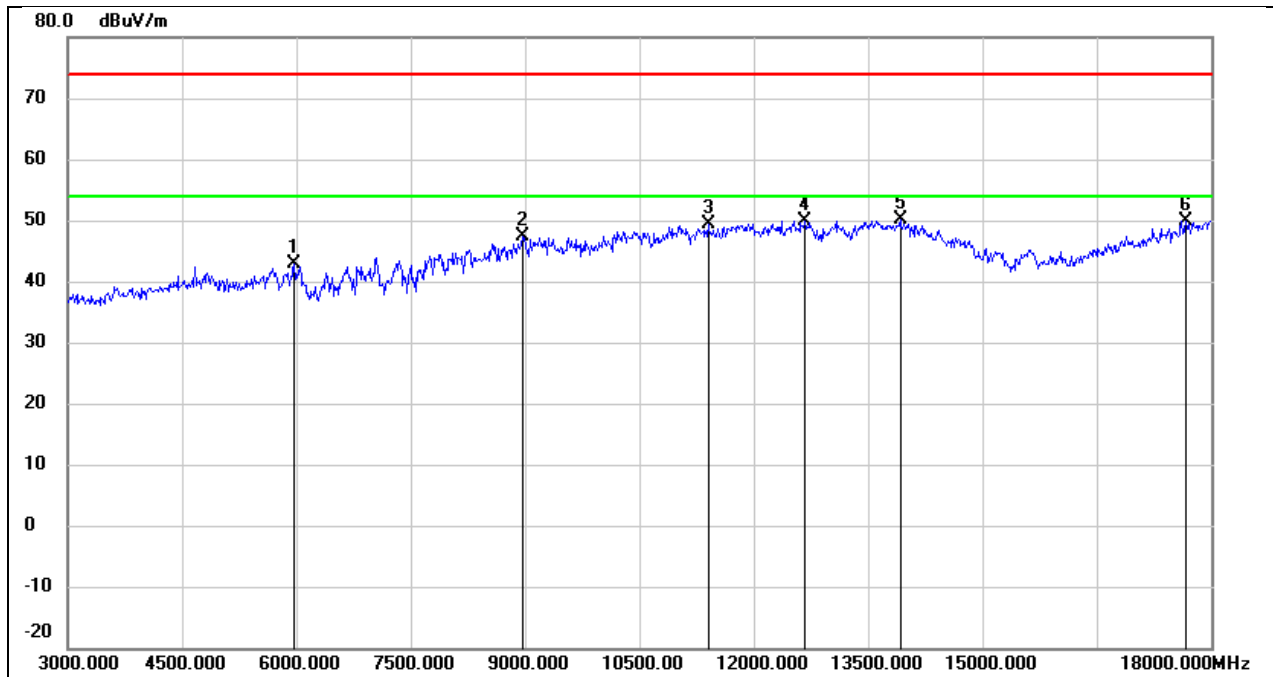


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	39.89	2.99	42.88	74.00	-31.12	peak
2	8970.000	36.58	10.75	47.33	74.00	-26.67	peak
3	11400.000	32.72	16.54	49.26	74.00	-24.74	peak
4	12675.000	31.27	18.54	49.81	74.00	-24.19	peak
5	13920.000	27.34	22.71	50.05	74.00	-23.95	peak
6	17670.000	25.05	24.89	49.94	74.00	-24.06	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

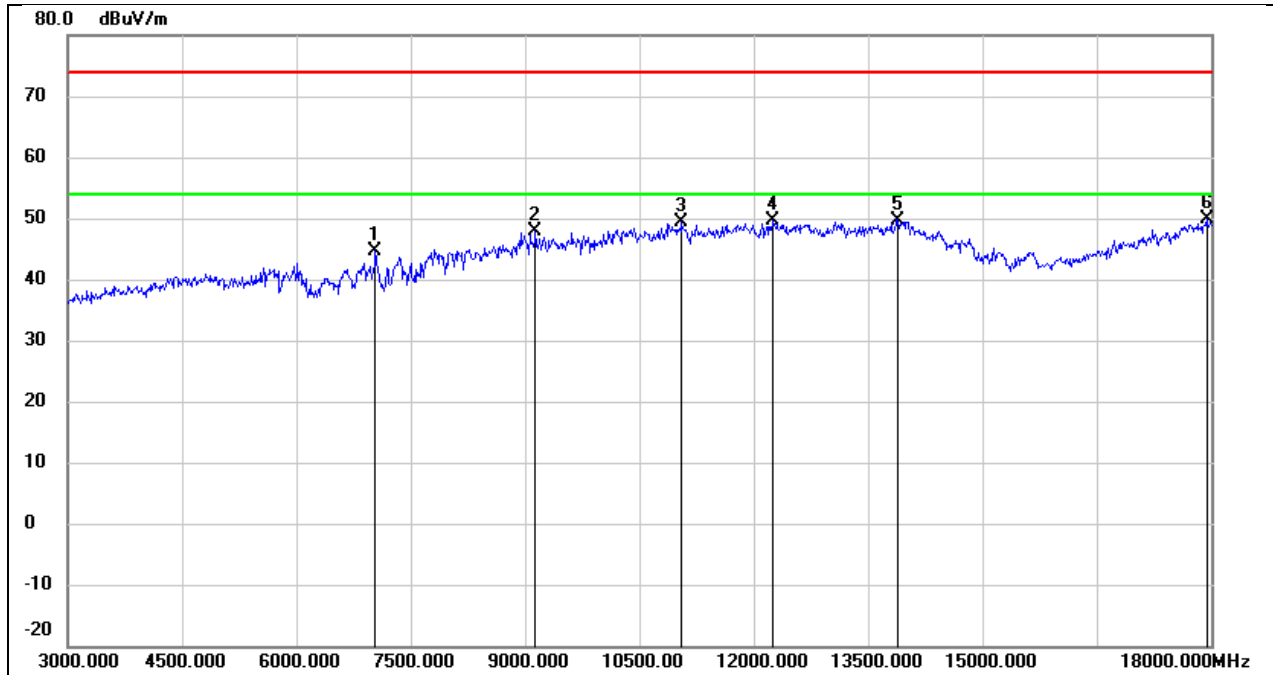


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	37.44	7.28	44.72	74.00	-29.28	peak
2	9135.000	37.53	10.39	47.92	74.00	-26.08	peak
3	11055.000	34.44	15.04	49.48	74.00	-24.52	peak
4	12255.000	31.02	18.50	49.52	74.00	-24.48	peak
5	13890.000	26.94	22.69	49.63	74.00	-24.37	peak
6	17940.000	23.18	26.61	49.79	74.00	-24.21	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

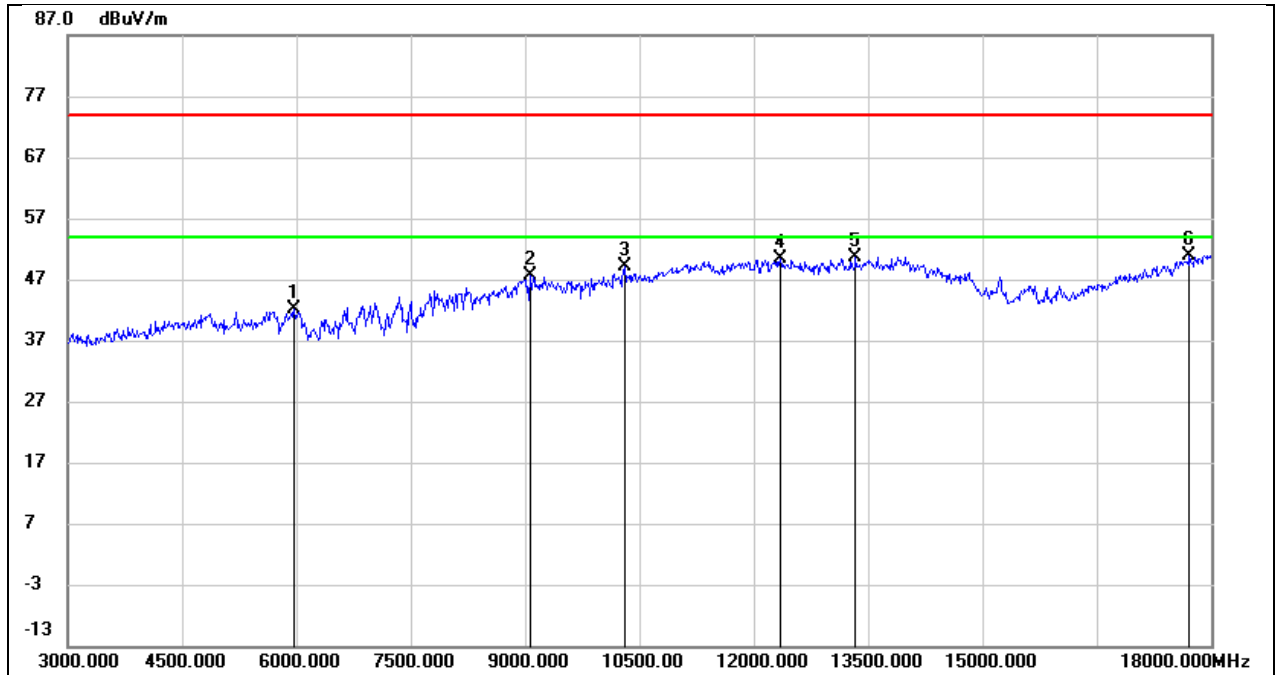


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	39.02	2.99	42.01	74.00	-31.99	peak
2	9060.000	36.77	10.82	47.59	74.00	-26.41	peak
3	10305.000	36.21	13.00	49.21	74.00	-24.79	peak
4	12345.000	31.46	18.81	50.27	74.00	-23.73	peak
5	13335.000	29.67	21.02	50.69	74.00	-23.31	peak
6	17715.000	25.60	25.31	50.91	74.00	-23.09	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2447
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

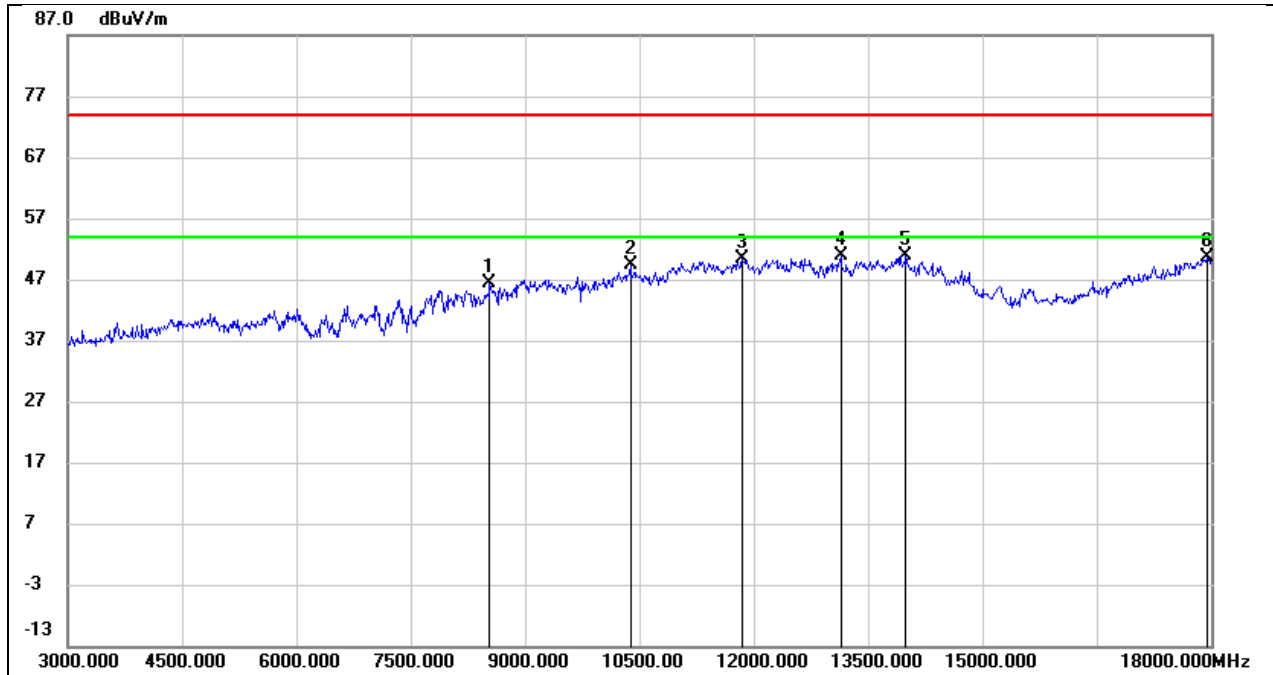


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8535.000	37.92	8.39	46.31	74.00	-27.69	peak
2	10380.000	35.97	13.36	49.33	74.00	-24.67	peak
3	11850.000	32.47	17.84	50.31	74.00	-23.69	peak
4	13140.000	30.99	19.80	50.79	74.00	-23.21	peak
5	13995.000	28.01	22.76	50.77	74.00	-23.23	peak
6	17940.000	23.90	26.61	50.51	74.00	-23.49	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

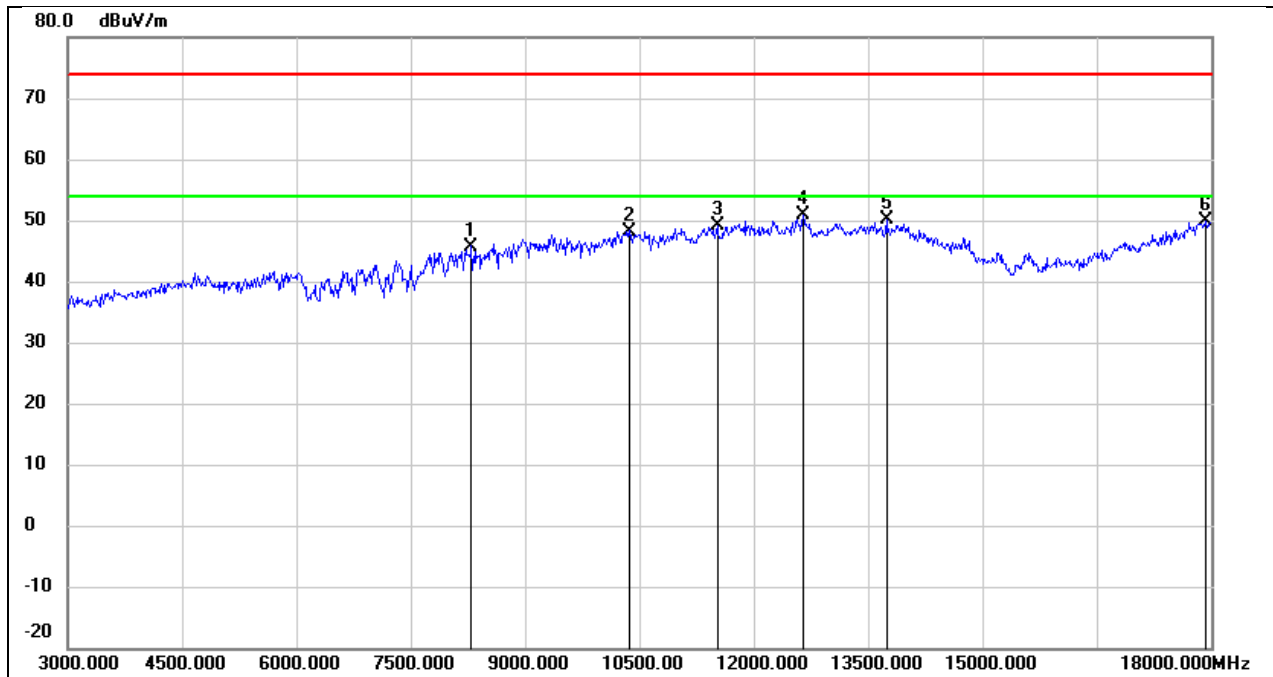


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8295.000	37.37	8.38	45.75	74.00	-28.25	peak
2	10365.000	34.96	13.29	48.25	74.00	-25.75	peak
3	11520.000	32.22	16.91	49.13	74.00	-24.87	peak
4	12645.000	32.42	18.44	50.86	74.00	-23.14	peak
5	13740.000	27.68	22.35	50.03	74.00	-23.97	peak
6	17925.000	23.21	26.55	49.76	74.00	-24.24	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

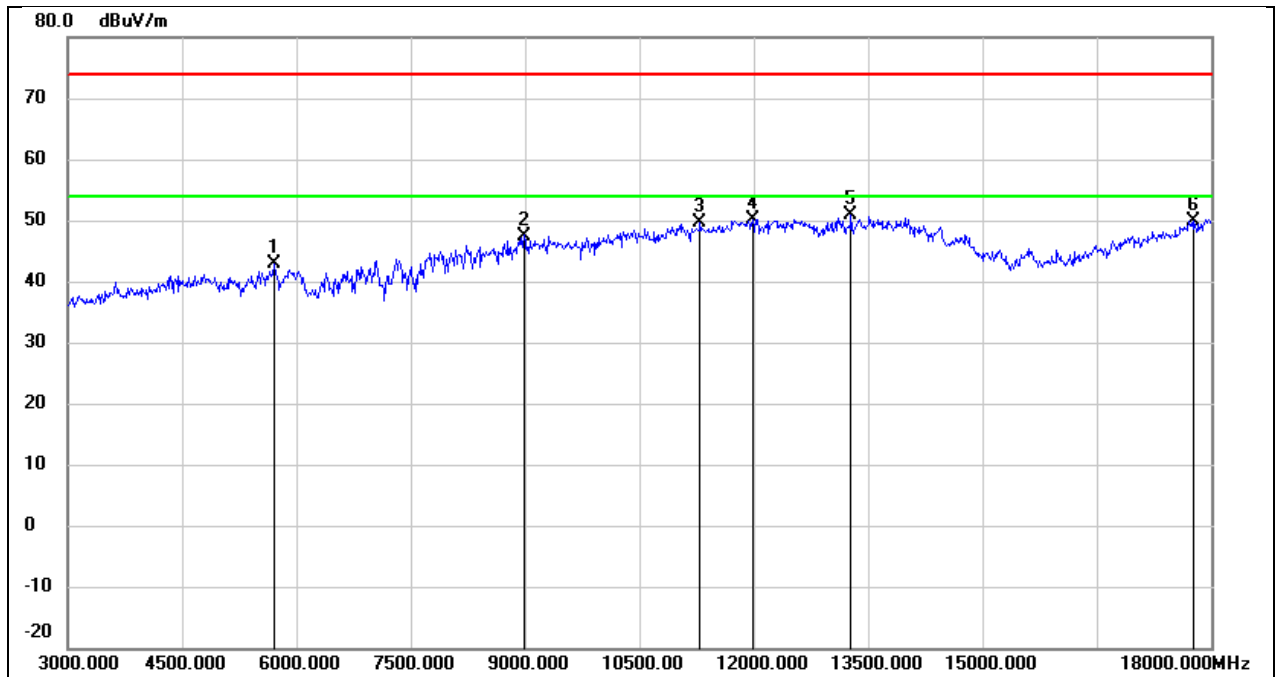

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	40.33	2.54	42.87	74.00	-31.13	peak
2	8985.000	36.53	10.97	47.50	74.00	-26.50	peak
3	11295.000	33.73	15.93	49.66	74.00	-24.34	peak
4	11985.000	31.65	18.44	50.09	74.00	-23.91	peak
5	13275.000	30.36	20.61	50.97	74.00	-23.03	peak
6	17775.000	24.02	25.86	49.88	74.00	-24.12	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

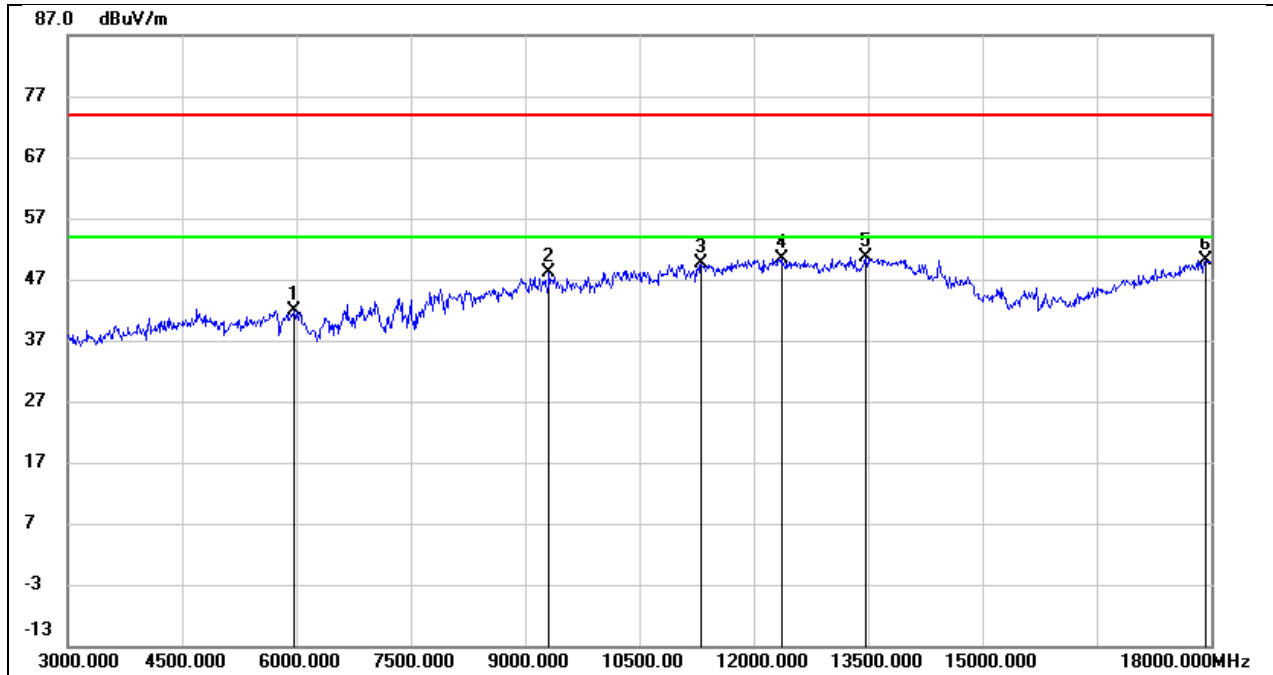

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	38.91	2.99	41.90	74.00	-32.10	peak
2	9315.000	37.98	10.26	48.24	74.00	-25.76	peak
3	11310.000	33.67	16.02	49.69	74.00	-24.31	peak
4	12360.000	31.63	18.85	50.48	74.00	-23.52	peak
5	13470.000	29.00	21.62	50.62	74.00	-23.38	peak
6	17925.000	23.57	26.55	50.12	74.00	-23.88	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60HZ

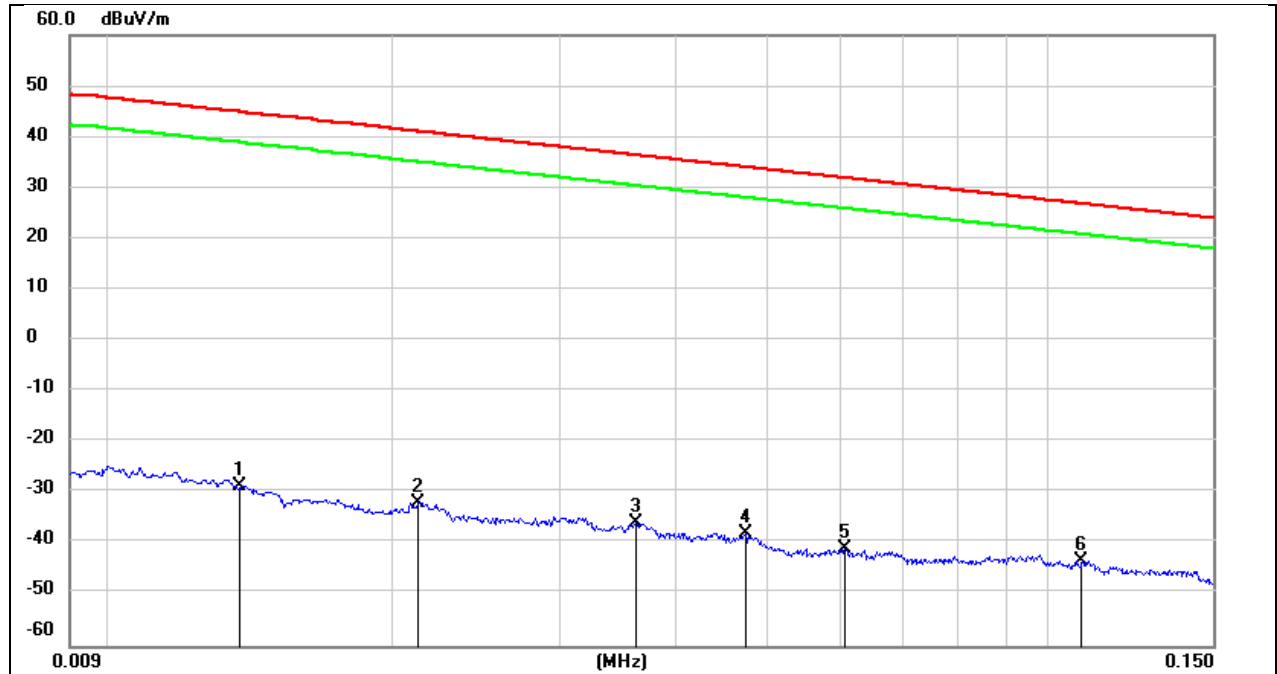


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0137	72.86	-101.38	-28.52	44.87	-80.02	-6.63	-73.39	peak
2	0.0212	69.54	-101.35	-31.81	41.07	-83.31	-10.43	-72.88	peak
3	0.0362	65.51	-101.42	-35.91	36.43	-87.41	-15.07	-72.34	peak
4	0.0475	63.44	-101.47	-38.03	34.07	-89.53	-17.43	-72.10	peak
5	0.0606	60.45	-101.52	-41.07	31.95	-92.57	-19.55	-73.02	peak
6	0.1087	58.38	-101.78	-43.4	26.88	-94.90	-24.62	-70.28	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60HZ

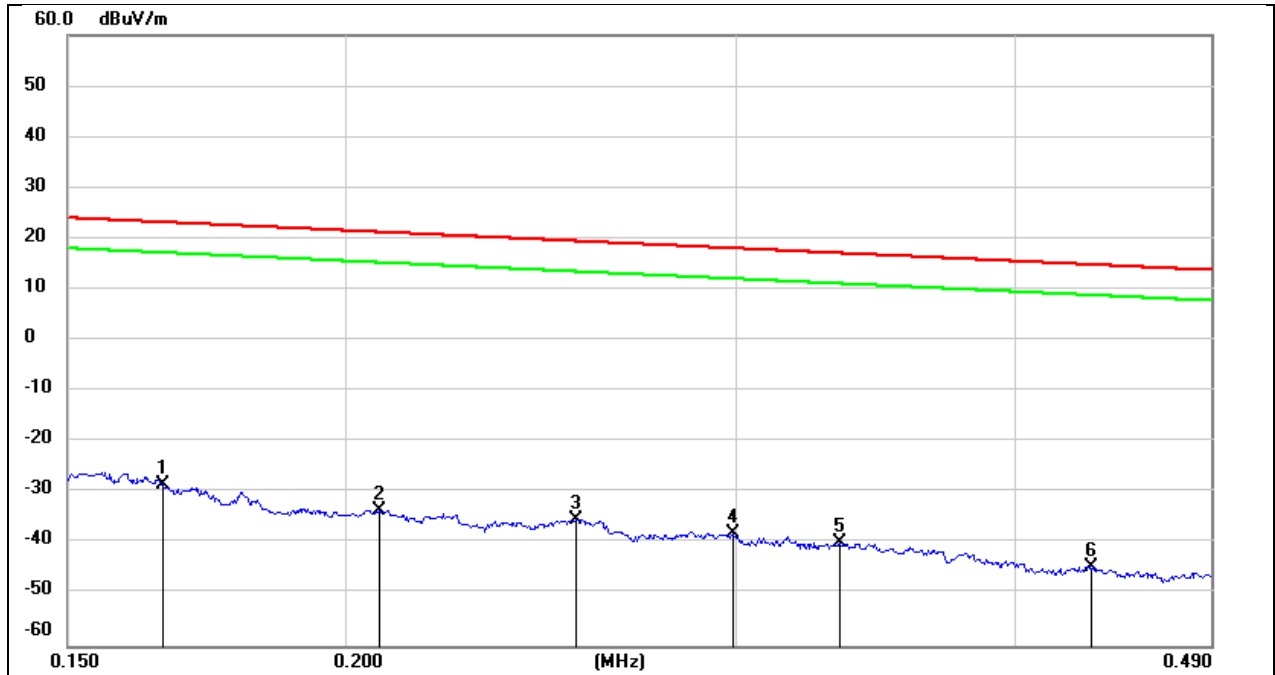

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1655	73.33	-101.66	-28.33	23.23	-79.83	-28.27	-51.56	peak
2	0.2071	68.39	-101.73	-33.34	21.28	-84.84	-30.22	-54.62	peak
3	0.2535	66.64	-101.80	-35.16	19.52	-86.66	-31.98	-54.68	peak
4	0.2988	63.77	-101.85	-38.08	18.09	-89.58	-33.41	-56.17	peak
5	0.3336	62.01	-101.89	-39.88	17.14	-91.38	-34.36	-57.02	peak
6	0.4329	57.57	-101.99	-44.42	14.87	-95.92	-36.63	-59.29	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60HZ

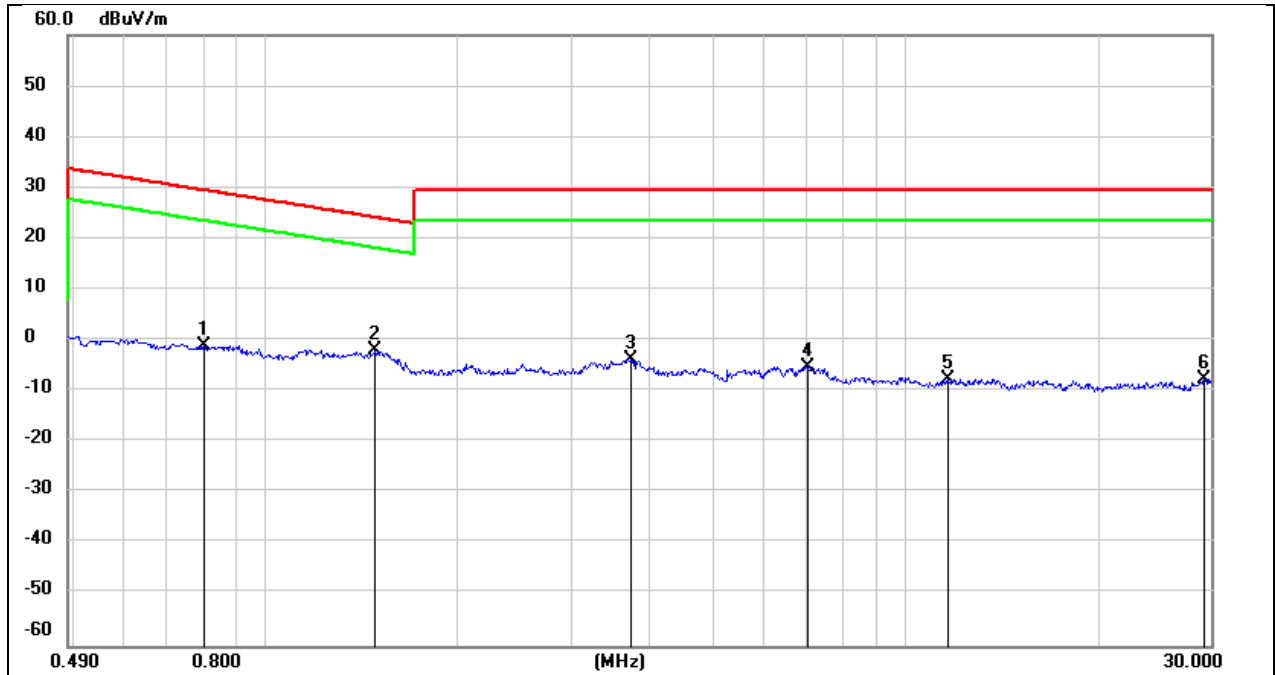

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.7993	61.22	-62.15	-0.93	29.55	-52.43	-21.95	-30.48	peak
2	1.4818	60.11	-62.05	-1.94	24.19	-53.44	-27.31	-26.13	peak
3	3.7100	57.70	-61.41	-3.71	29.54	-55.21	-21.96	-33.25	peak
4	7.0411	56.06	-61.21	-5.15	29.54	-56.65	-21.96	-34.69	peak
5	11.6743	53.25	-60.88	-7.63	29.54	-59.13	-21.96	-37.17	peak
6	29.3213	52.30	-60.02	-7.72	29.54	-59.22	-21.96	-37.26	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60HZ

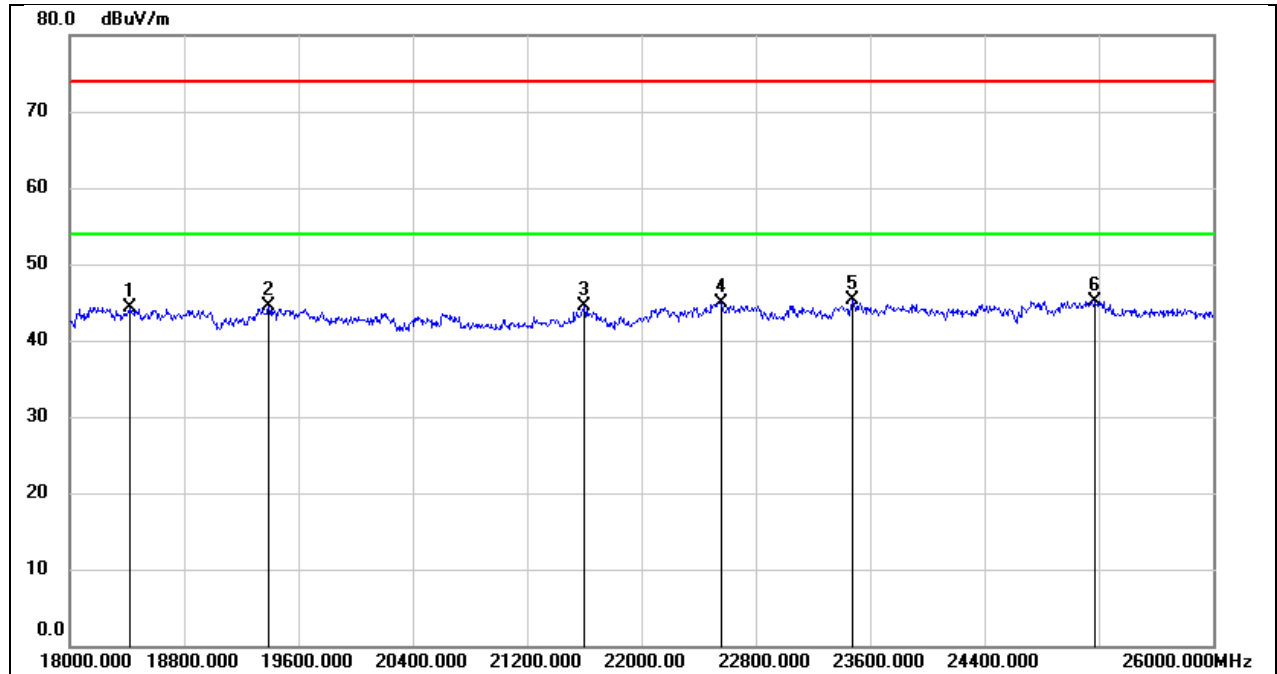

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18416.000	49.73	-5.35	44.38	74.00	-29.62	peak
2	19392.000	50.12	-5.57	44.55	74.00	-29.45	peak
3	21600.000	49.02	-4.54	44.48	74.00	-29.52	peak
4	22560.000	48.78	-3.83	44.95	74.00	-29.05	peak
5	23480.000	48.54	-3.16	45.38	74.00	-28.62	peak
6	25168.000	46.94	-1.81	45.13	74.00	-28.87	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V 60HZ

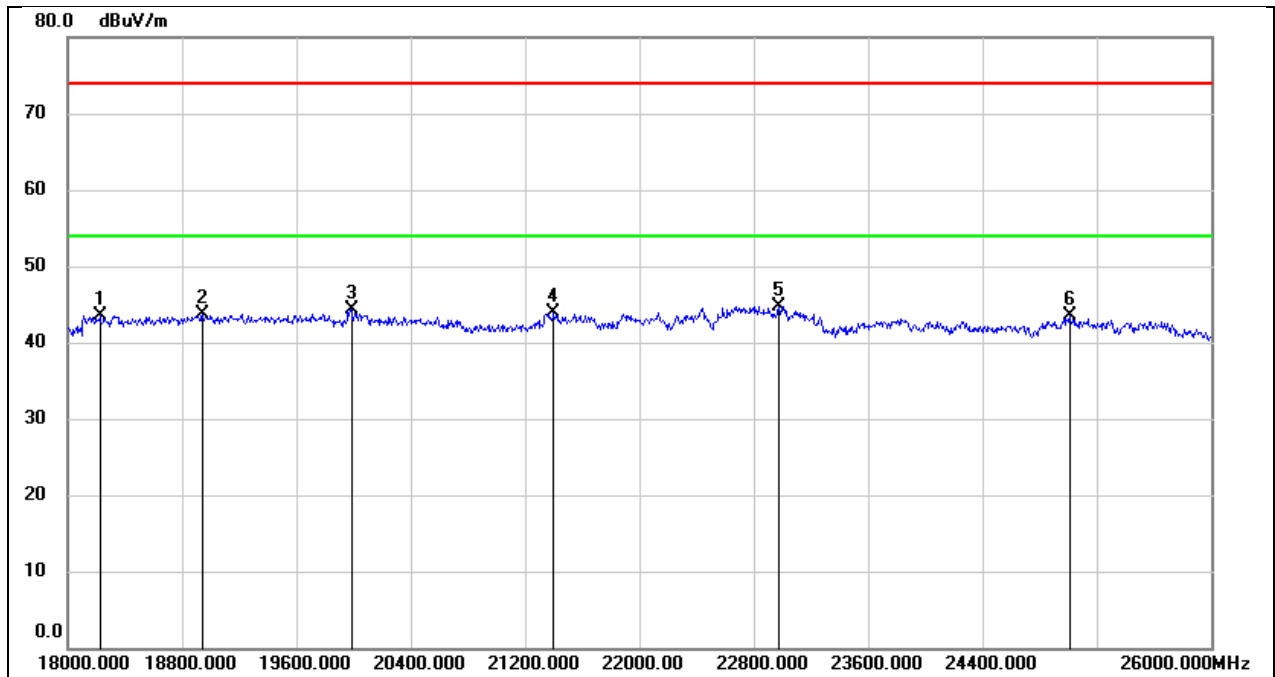

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	49.08	-5.53	43.55	74.00	-30.45	peak
2	18944.000	48.92	-5.27	43.65	74.00	-30.35	peak
3	19984.000	49.71	-5.44	44.27	74.00	-29.73	peak
4	21400.000	48.54	-4.72	43.82	74.00	-30.18	peak
5	22976.000	48.26	-3.46	44.80	74.00	-29.20	peak
6	25008.000	45.50	-2.08	43.42	74.00	-30.58	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60HZ

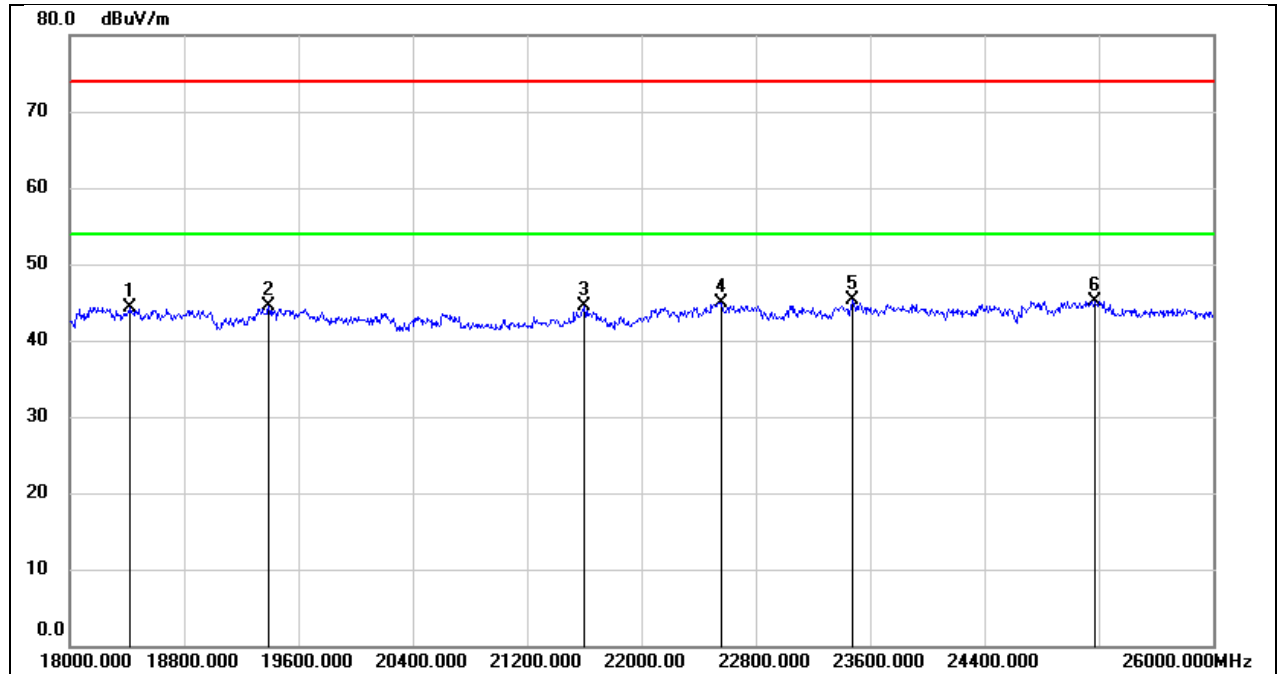

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18416.000	49.73	-5.35	44.38	74.00	-29.62	peak
2	19392.000	50.12	-5.57	44.55	74.00	-29.45	peak
3	21600.000	49.02	-4.54	44.48	74.00	-29.52	peak
4	22560.000	48.78	-3.83	44.95	74.00	-29.05	peak
5	23480.000	48.54	-3.16	45.38	74.00	-28.62	peak
6	25168.000	46.94	-1.81	45.13	74.00	-28.87	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V 60HZ

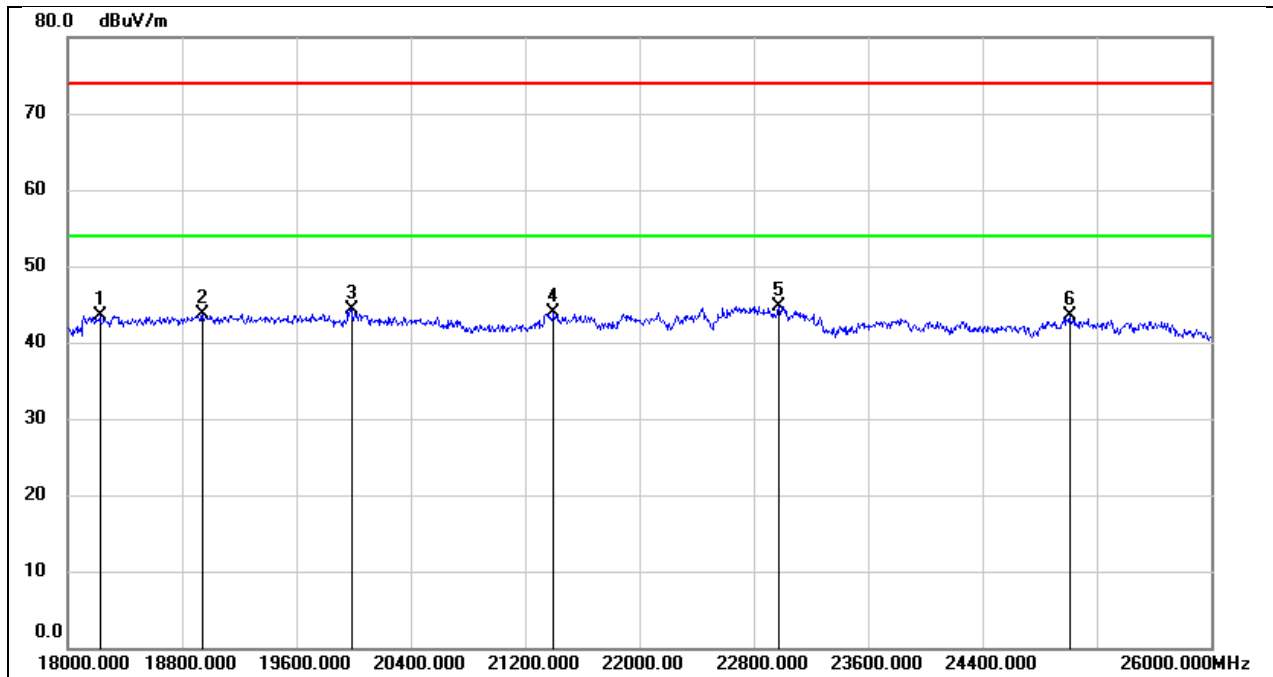

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	49.08	-5.53	43.55	74.00	-30.45	peak
2	18944.000	48.92	-5.27	43.65	74.00	-30.35	peak
3	19984.000	49.71	-5.44	44.27	74.00	-29.73	peak
4	21400.000	48.54	-4.72	43.82	74.00	-30.18	peak
5	22976.000	48.26	-3.46	44.80	74.00	-29.20	peak
6	25008.000	45.50	-2.08	43.42	74.00	-30.58	peak

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

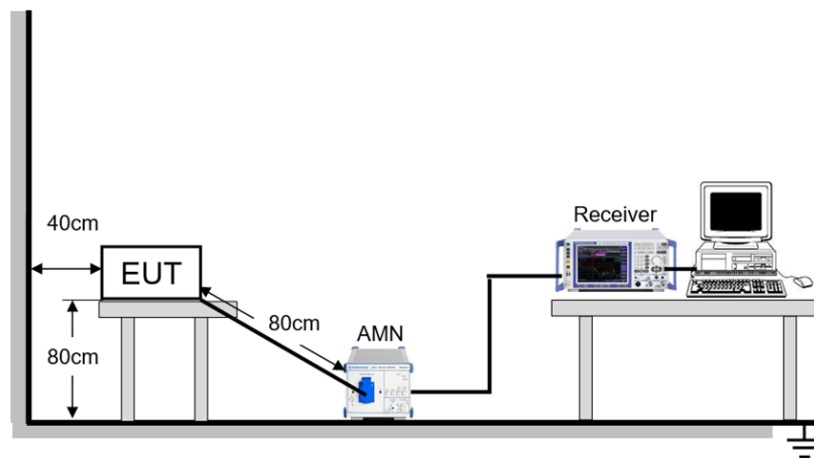

TEST ENVIRONMENT


Temperature	22.6°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	June 28, 2024	Test By	Fanny Huang
-----------	---------------	---------	-------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

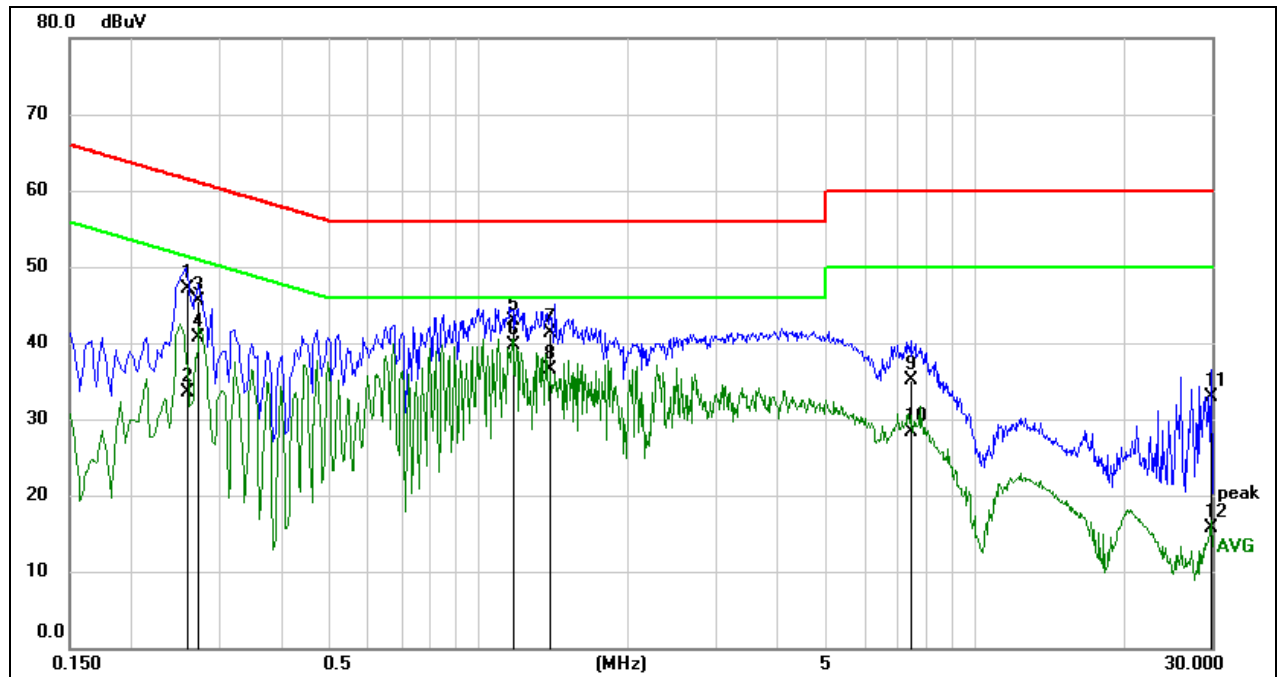


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2594	36.85	10.24	47.09	61.45	-14.36	QP
2	0.2594	23.27	10.24	33.51	51.45	-17.94	AVG
3	0.2710	35.19	10.24	45.43	61.09	-15.66	QP
4	0.2710	30.53	10.24	40.77	51.09	-10.32	AVG
5	1.1704	32.99	10.01	43.00	56.00	-13.00	QP
6	1.1704	29.72	10.01	39.73	46.00	-6.27	AVG
7	1.3964	31.29	10.00	41.29	56.00	-14.71	QP
8	1.3964	26.50	10.00	36.50	46.00	-9.50	AVG
9	7.4400	24.80	10.33	35.13	60.00	-24.87	QP
10	7.4400	18.04	10.33	28.37	50.00	-21.63	AVG
11	29.9832	22.10	10.84	32.94	60.00	-27.06	QP
12	29.9832	4.78	10.84	15.62	50.00	-34.38	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

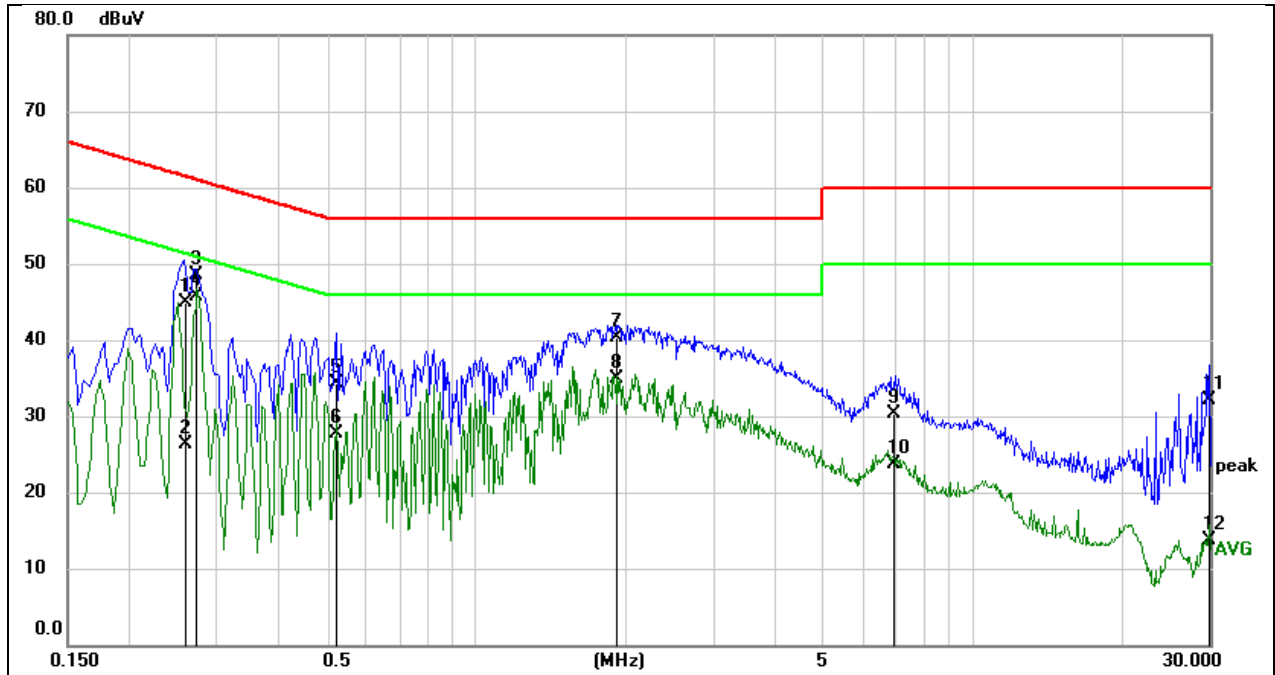

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2596	34.84	10.12	44.96	61.44	-16.48	QP
2	0.2596	16.20	10.12	26.32	51.44	-25.12	AVG
3	0.2726	38.34	10.12	48.46	61.04	-12.58	QP
4	0.2726	35.57	10.12	45.69	51.04	-5.35	AVG
5	0.5222	24.27	10.04	34.31	56.00	-21.69	QP
6	0.5222	17.70	10.04	27.74	46.00	-18.26	AVG
7	1.9100	30.20	10.02	40.22	56.00	-15.78	QP
8	1.9100	24.89	10.02	34.91	46.00	-11.09	AVG
9	6.9078	19.78	10.43	30.21	60.00	-29.79	QP
10	6.9078	13.21	10.43	23.64	50.00	-26.36	AVG
11	29.9831	21.01	11.14	32.15	60.00	-27.85	QP
12	29.9831	2.64	11.14	13.78	50.00	-36.22	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA


11.1. APPENDIX A: DTS BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant3	2412	7.60	2407.96	2415.56	≥0.5	PASS
	Ant4	2412	7.04	2408.48	2415.52	≥0.5	PASS
	Ant3	2417	8.12	2412.48	2420.60	≥0.5	PASS
	Ant4	2417	7.56	2413.44	2421.00	≥0.5	PASS
	Ant3	2437	7.12	2433.44	2440.56	≥0.5	PASS
	Ant4	2437	7.08	2433.44	2440.52	≥0.5	PASS
	Ant3	2457	7.60	2452.96	2460.56	≥0.5	PASS
	Ant4	2457	7.08	2453.44	2460.52	≥0.5	PASS
11G-CDD	Ant3	2462	7.08	2458.44	2465.52	≥0.5	PASS
	Ant4	2462	9.04	2457.48	2466.52	≥0.5	PASS
11N20MIMO	Ant3	2412	16.32	2403.84	2420.16	≥0.5	PASS
	Ant4	2412	16.32	2403.84	2420.16	≥0.5	PASS
	Ant3	2417	16.48	2408.72	2425.20	≥0.5	PASS
	Ant4	2417	15.32	2409.44	2424.76	≥0.5	PASS
	Ant3	2437	16.28	2428.84	2445.12	≥0.5	PASS
	Ant4	2437	16.36	2428.80	2445.16	≥0.5	PASS
	Ant3	2457	16.32	2448.84	2465.16	≥0.5	PASS
	Ant4	2457	16.32	2448.84	2465.16	≥0.5	PASS
11N40MIMO	Ant3	2462	16.48	2453.72	2470.20	≥0.5	PASS
	Ant4	2462	16.28	2453.84	2470.12	≥0.5	PASS
11AX20MIMO	Ant3	2412	17.60	2403.20	2420.80	≥0.5	PASS
	Ant4	2412	16.80	2403.60	2420.40	≥0.5	PASS
	Ant3	2417	17.68	2408.12	2425.80	≥0.5	PASS
	Ant4	2417	17.72	2408.16	2425.88	≥0.5	PASS
	Ant3	2437	17.60	2428.20	2445.80	≥0.5	PASS
	Ant4	2437	16.88	2428.24	2445.12	≥0.5	PASS
	Ant3	2457	17.20	2448.20	2465.40	≥0.5	PASS
	Ant4	2457	17.72	2448.16	2465.88	≥0.5	PASS
11AX40MIMO	Ant3	2462	17.60	2453.20	2470.80	≥0.5	PASS
	Ant4	2462	17.56	2453.24	2470.80	≥0.5	PASS
11AX20MIMO	Ant3	2422	36.08	2403.84	2439.92	≥0.5	PASS
	Ant4	2422	35.92	2404.24	2440.16	≥0.5	PASS
	Ant3	2427	35.76	2408.84	2444.60	≥0.5	PASS
	Ant4	2427	35.12	2409.48	2444.60	≥0.5	PASS
	Ant3	2437	36.08	2418.84	2454.92	≥0.5	PASS
	Ant4	2437	35.68	2419.48	2455.16	≥0.5	PASS
	Ant3	2447	36.32	2428.84	2465.16	≥0.5	PASS
	Ant4	2447	35.36	2429.24	2464.60	≥0.5	PASS
11AX40MIMO	Ant3	2452	36.32	2433.84	2470.16	≥0.5	PASS
	Ant4	2452	35.60	2434.56	2470.16	≥0.5	PASS
11AX20MIMO	Ant3	2412	18.80	2402.56	2421.36	≥0.5	PASS
	Ant4	2412	19.00	2402.48	2421.48	≥0.5	PASS
	Ant3	2417	18.64	2407.72	2426.36	≥0.5	PASS
	Ant4	2417	18.24	2407.60	2425.84	≥0.5	PASS
	Ant3	2437	18.72	2427.64	2446.36	≥0.5	PASS
	Ant4	2437	18.76	2427.68	2446.44	≥0.5	PASS
	Ant3	2457	19.00	2447.48	2466.48	≥0.5	PASS
	Ant4	2457	18.76	2447.60	2466.36	≥0.5	PASS
11AX40MIMO	Ant3	2462	19.08	2452.44	2471.52	≥0.5	PASS
	Ant4	2462	19.04	2452.48	2471.52	≥0.5	PASS
11AX40MIMO	Ant3	2422	37.92	2403.12	2441.04	≥0.5	PASS
	Ant4	2422	37.52	2403.20	2440.72	≥0.5	PASS


	Ant3	2427	38.08	2407.96	2446.04	≥0.5	PASS
	Ant4	2427	38.08	2408.04	2446.12	≥0.5	PASS
	Ant3	2437	37.92	2418.04	2455.96	≥0.5	PASS
	Ant4	2437	37.12	2418.36	2455.48	≥0.5	PASS
	Ant3	2447	37.92	2428.04	2465.96	≥0.5	PASS
	Ant4	2447	37.52	2428.36	2465.88	≥0.5	PASS
	Ant3	2452	38.00	2432.96	2470.96	≥0.5	PASS
	Ant4	2452	37.76	2433.20	2470.96	≥0.5	PASS

11.1.2. Test Graphs

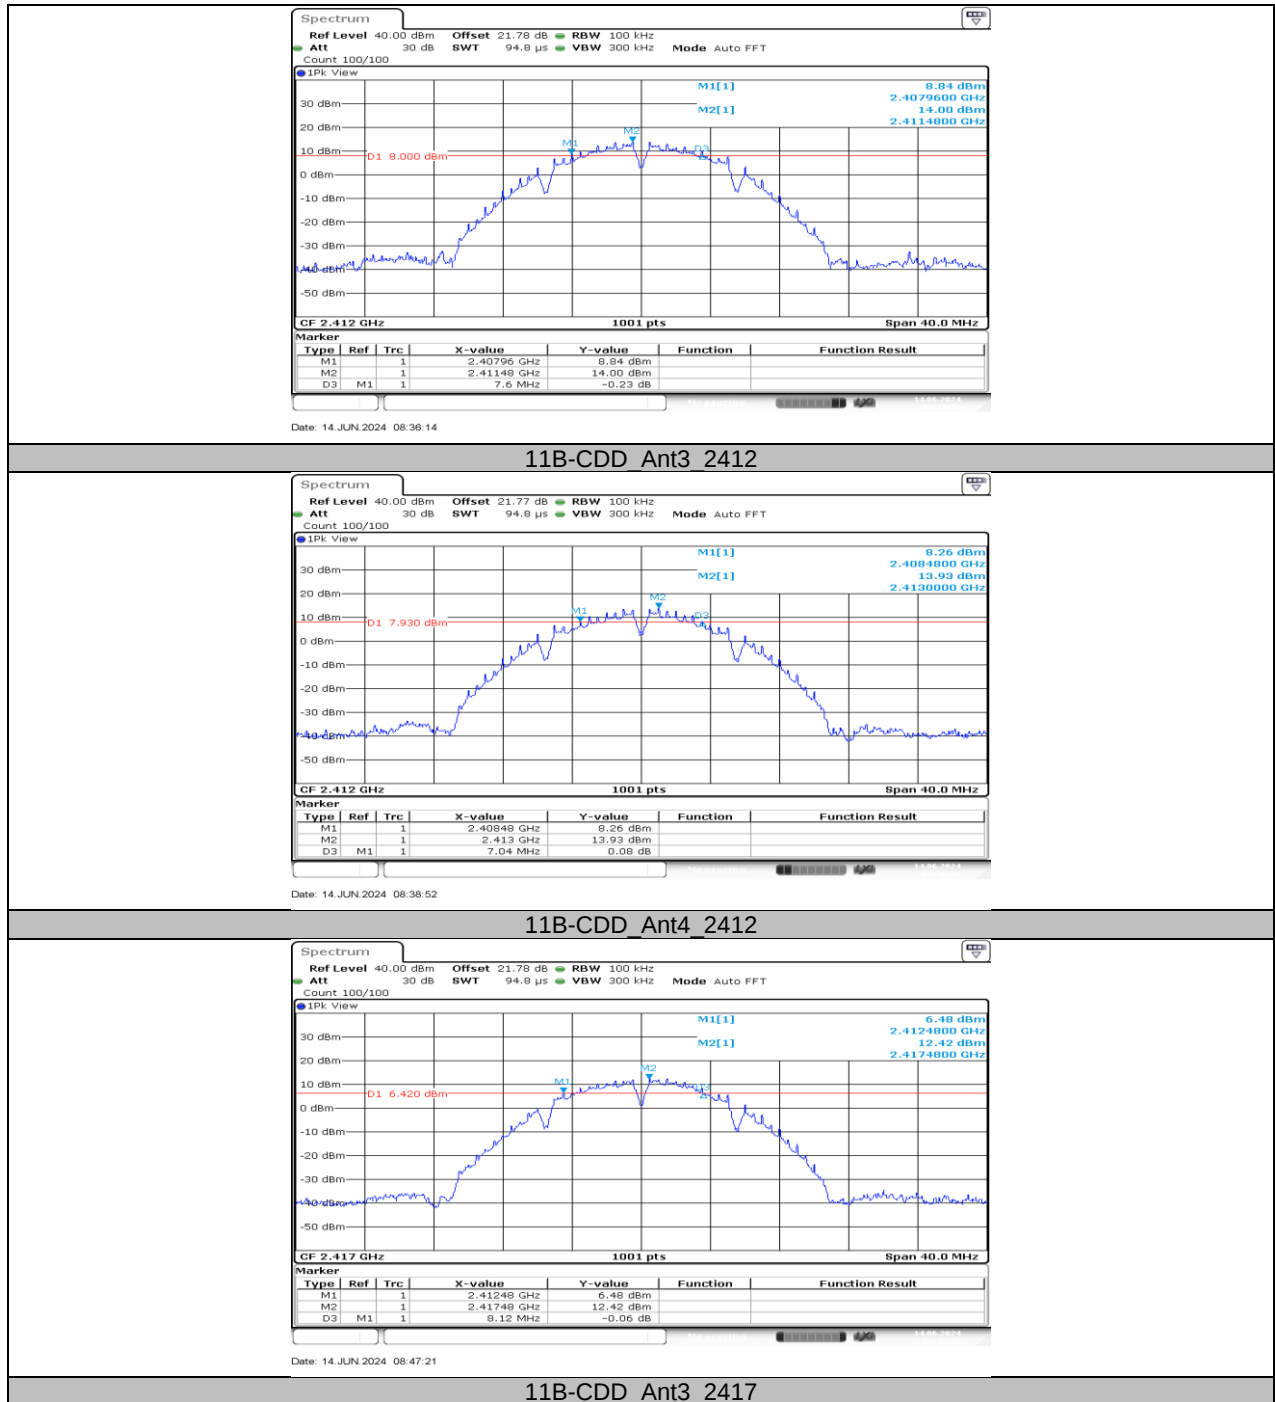


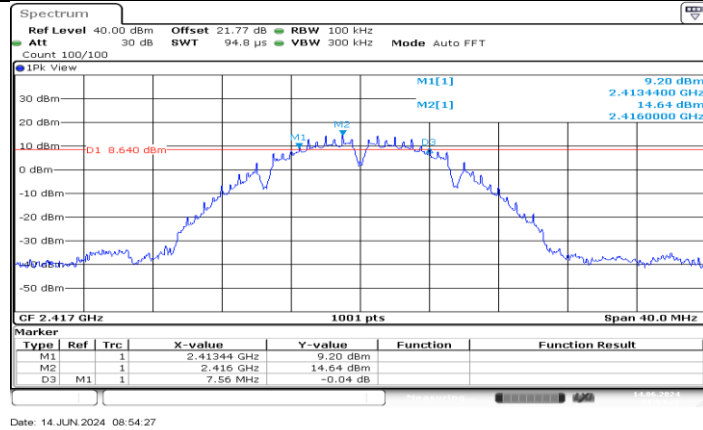


11B-CDD Ant4 2417

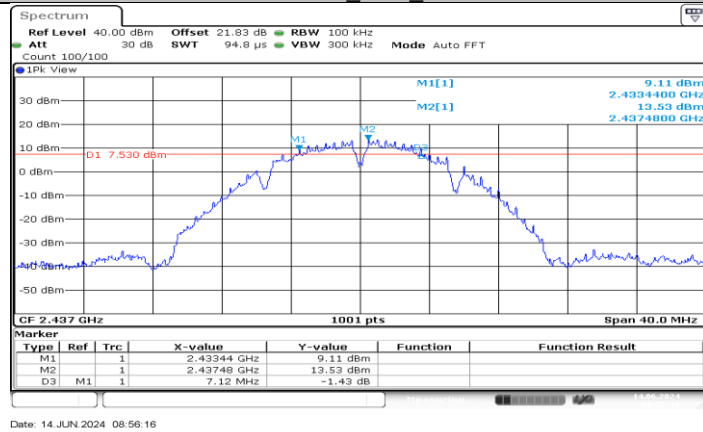


11B-CDD Ant3 2437

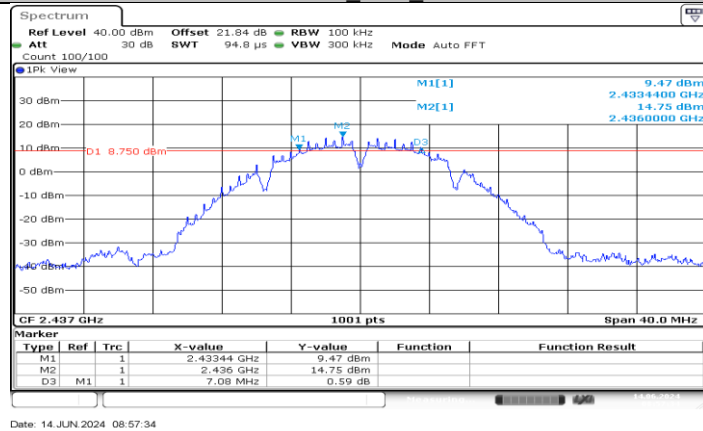


11B-CDD Ant4 2437

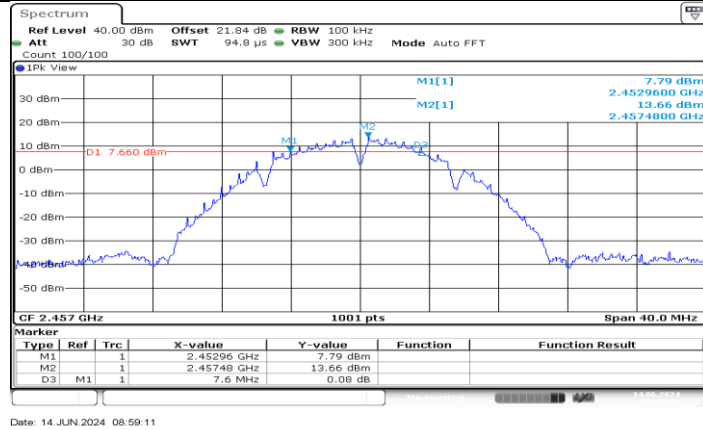


11B-CDD_Ant3_2457

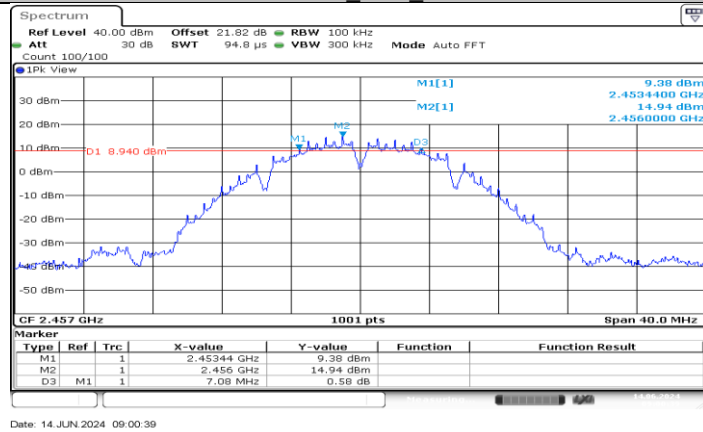


11B-CDD_Ant4_2457

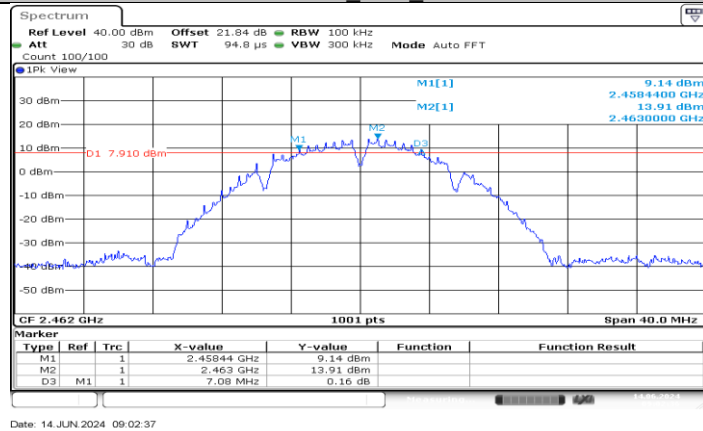


11B-CDD_Ant3_2462

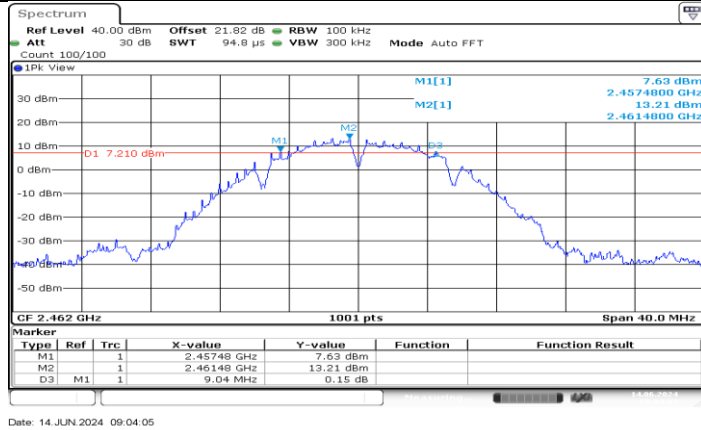


11B-CDD_Ant4_2462

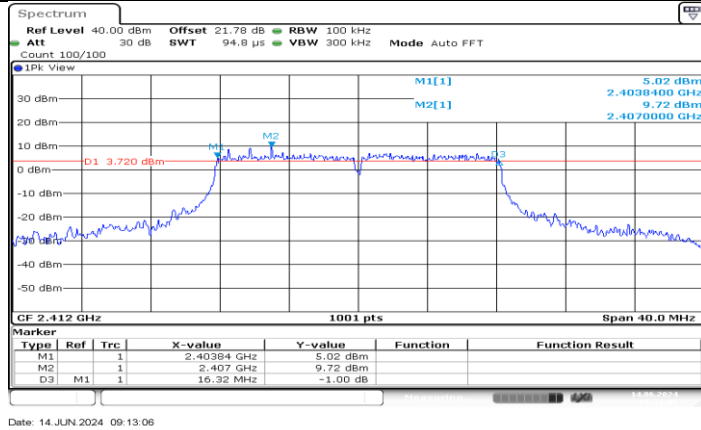


11G-CDD_Ant3_2412

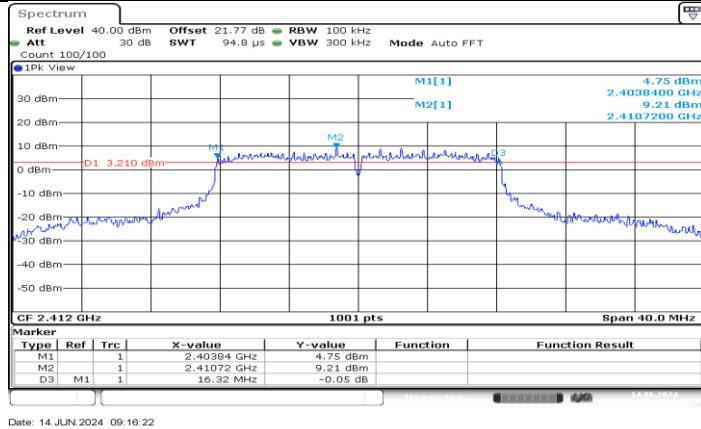


11G-CDD_Ant4_2412

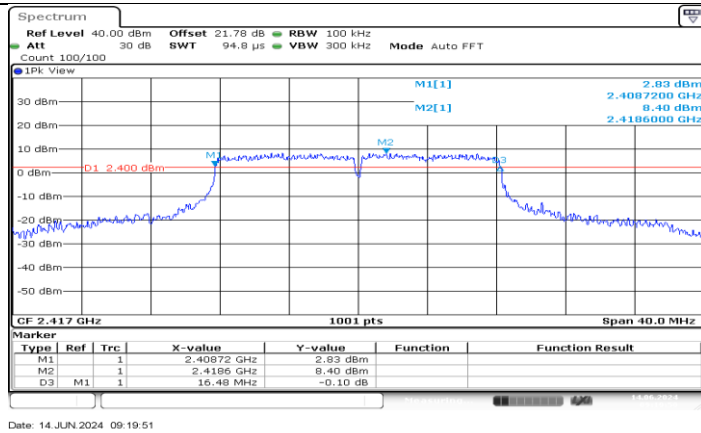


11G-CDD_Ant3_2417

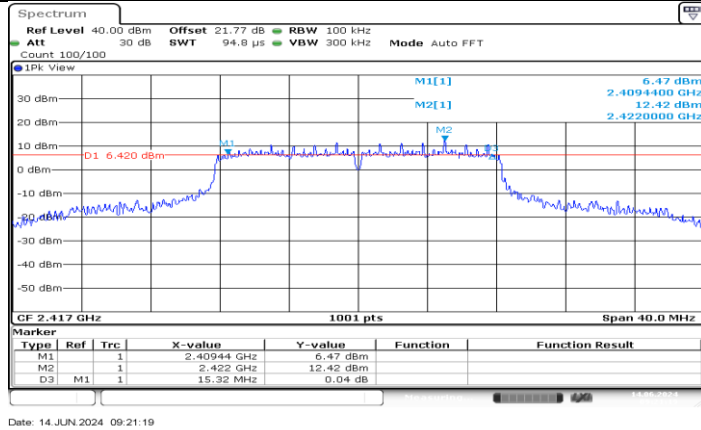


11G-CDD_Ant4_2417

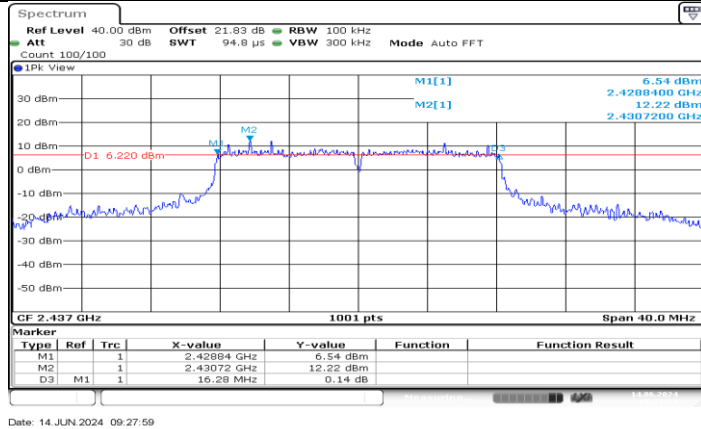


11G-CDD_Ant3_2437

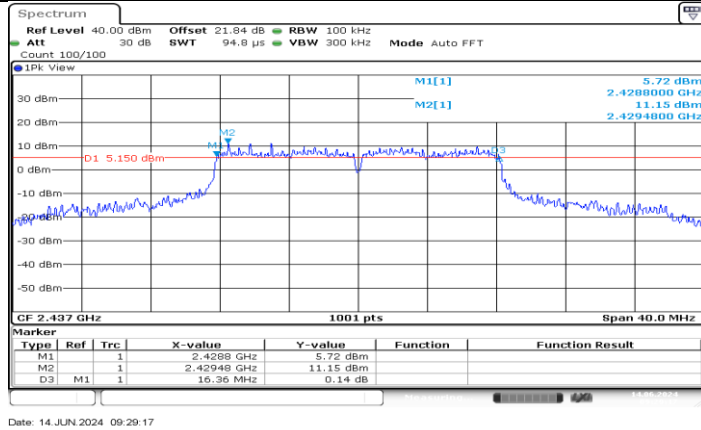


11G-CDD_Ant4_2437

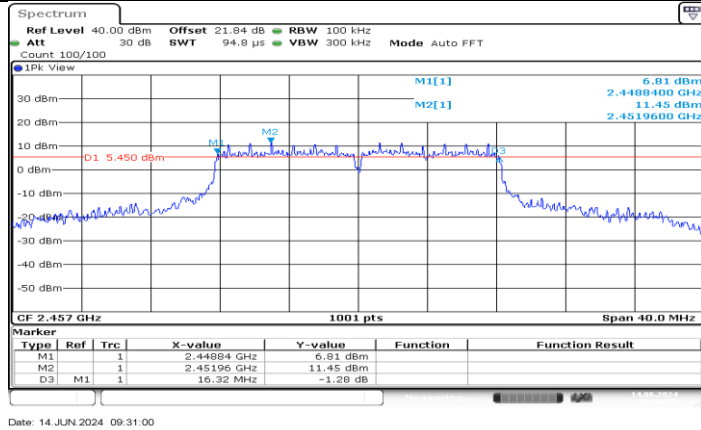


11G-CDD_Ant3_2457

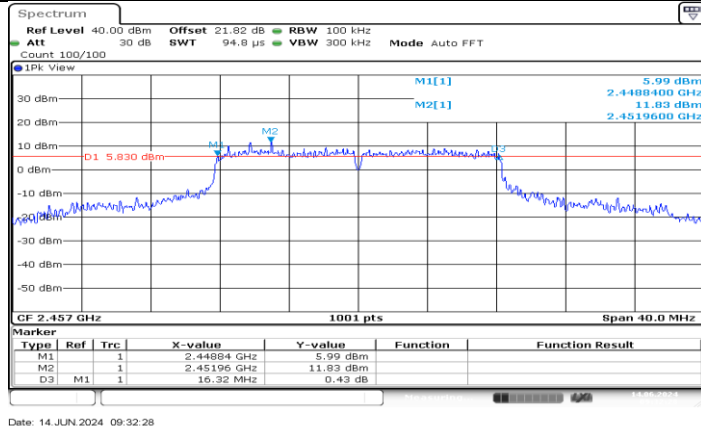


11G-CDD_Ant4_2457

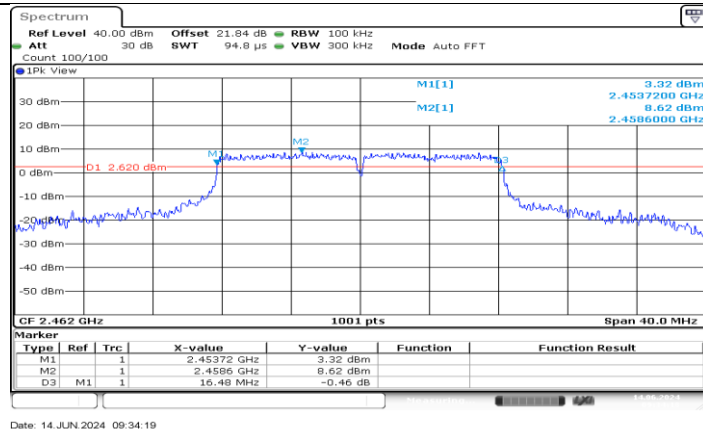


11G-CDD_Ant3_2462

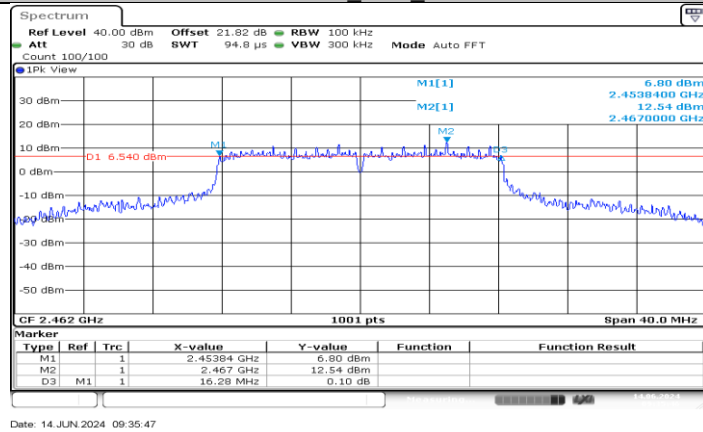


11G-CDD_Ant4_2462

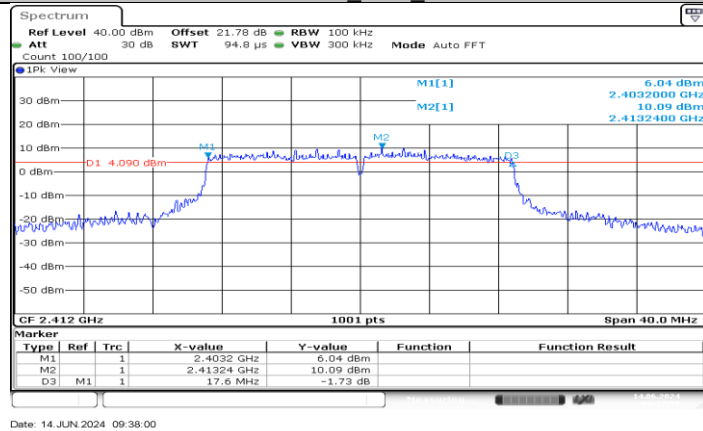


11N20MIMO_Ant3_2412

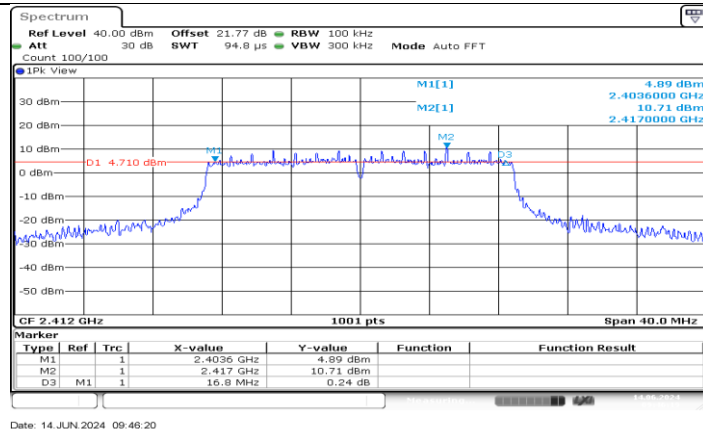


11N20MIMO_Ant4_2412

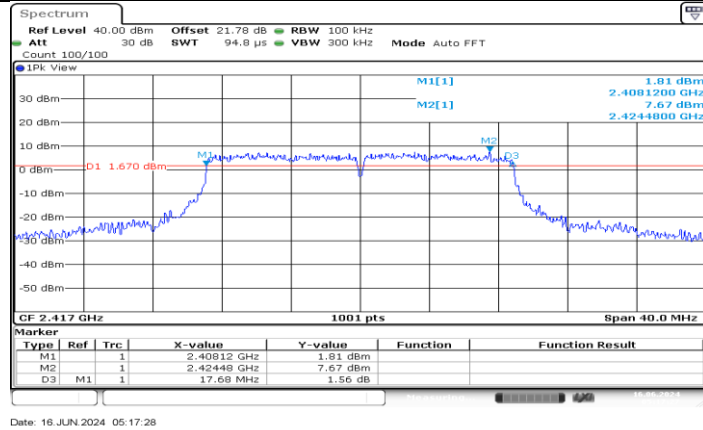


11N20MIMO_Ant3_2417

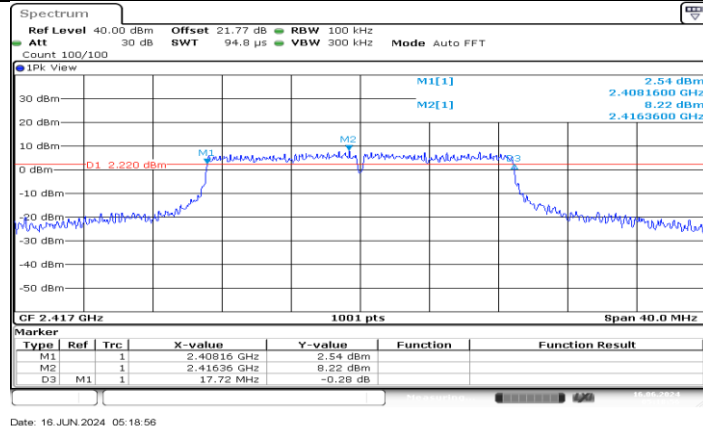


11N20MIMO_Ant4_2417

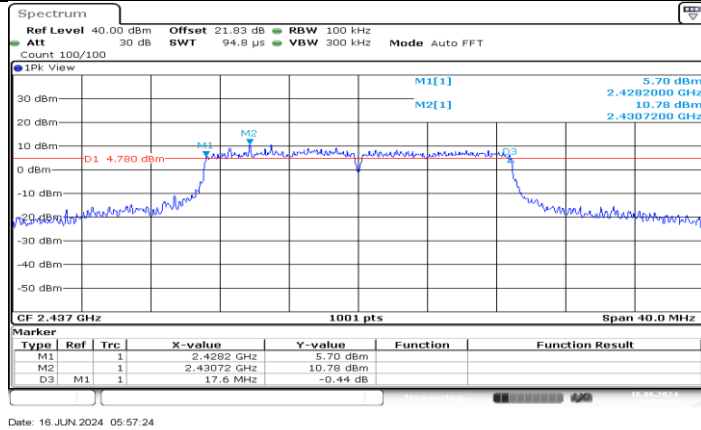


11N20MIMO_Ant3_2437

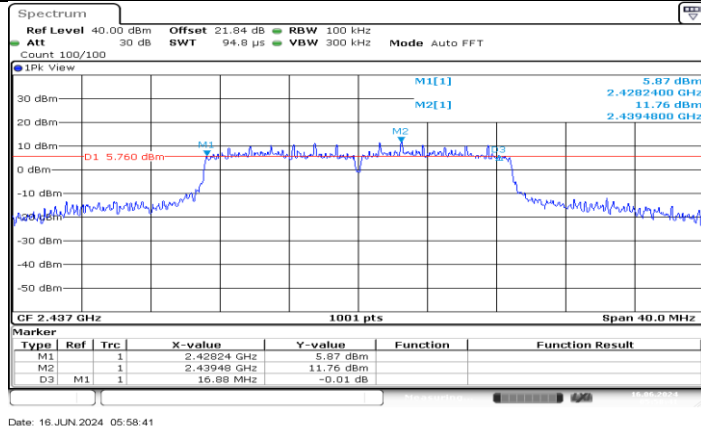


11N20MIMO_Ant4_2437

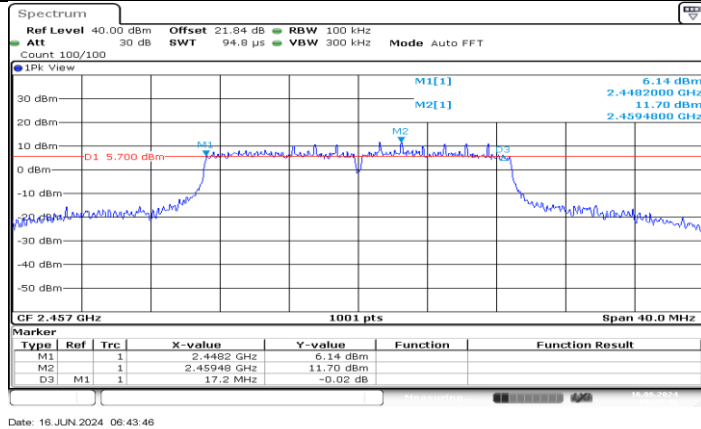


11N20MIMO_Ant3_2457

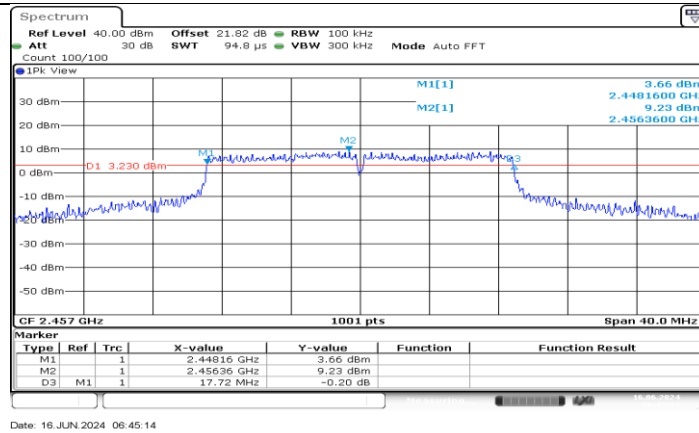


11N20MIMO_Ant4_2457

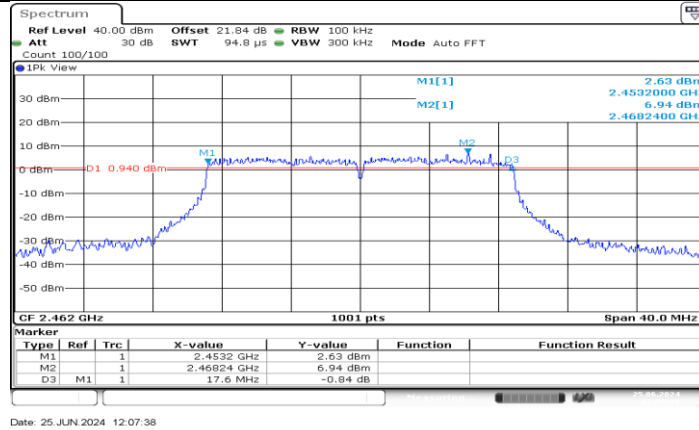


11N20MIMO_Ant3_2462

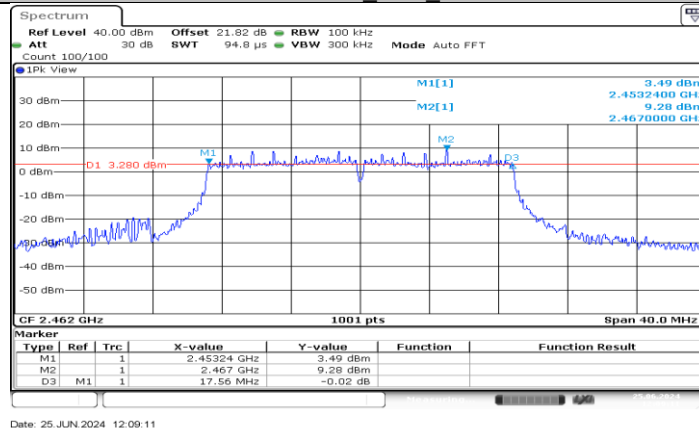


11N20MIMO_Ant4_2462

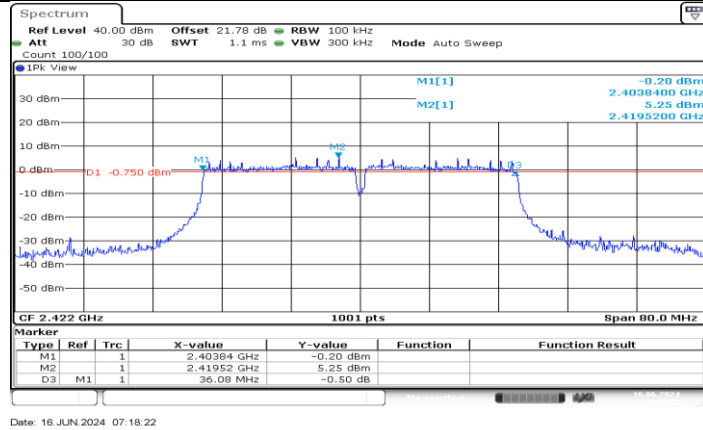


11N40MIMO_Ant3_2422

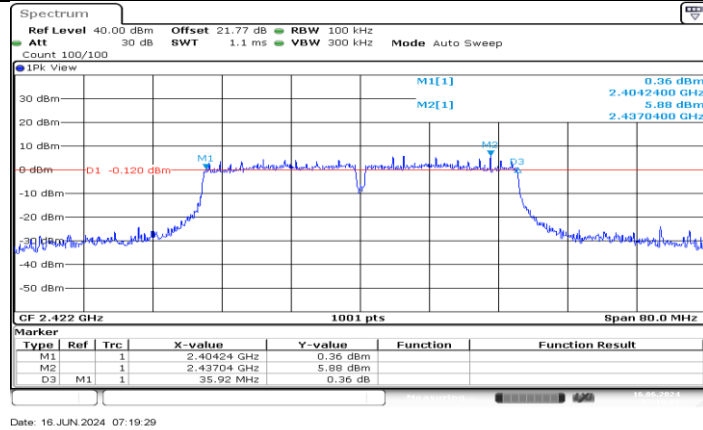


11N40MIMO_Ant4_2422

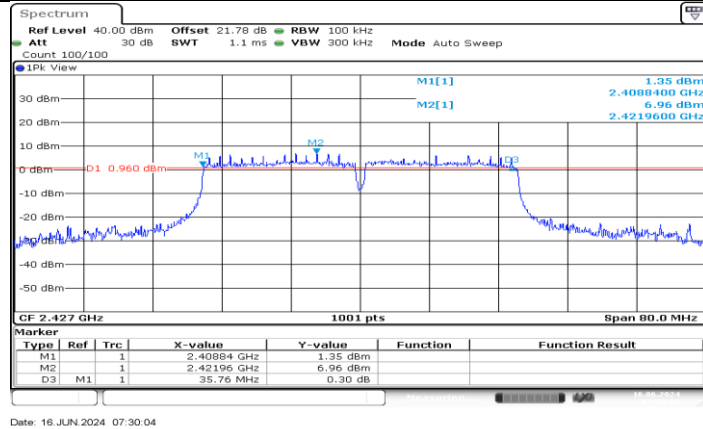


11N40MIMO_Ant3_2427

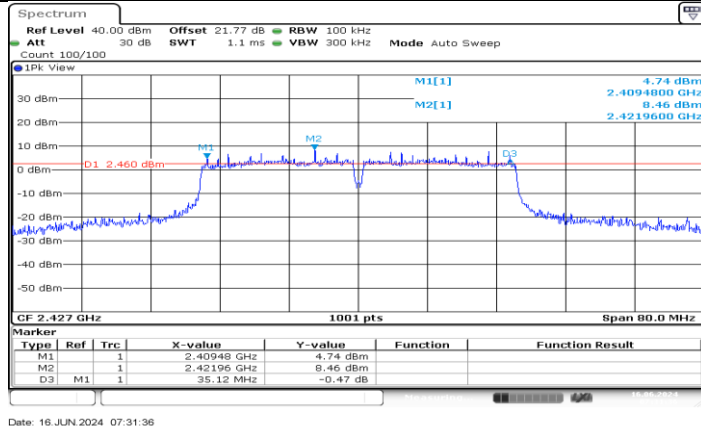


11N40MIMO_Ant4_2427

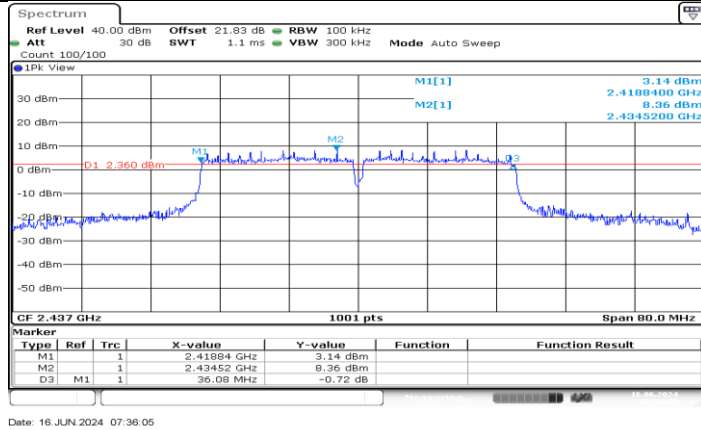


11N40MIMO_Ant3_2437

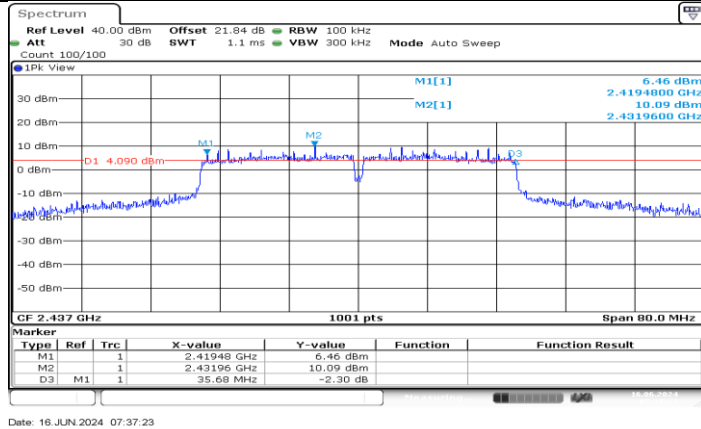


11N40MIMO_Ant4_2437

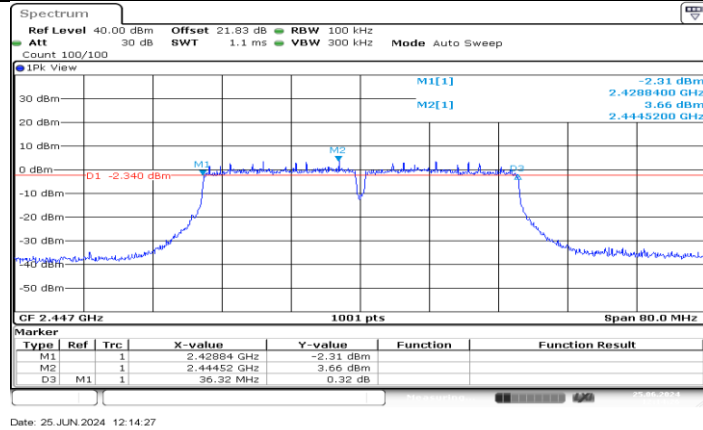


11N40MIMO_Ant3_2447

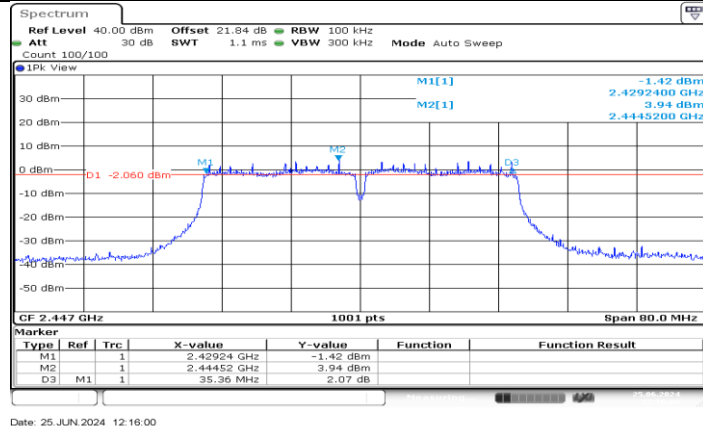


11N40MIMO_Ant4_2447

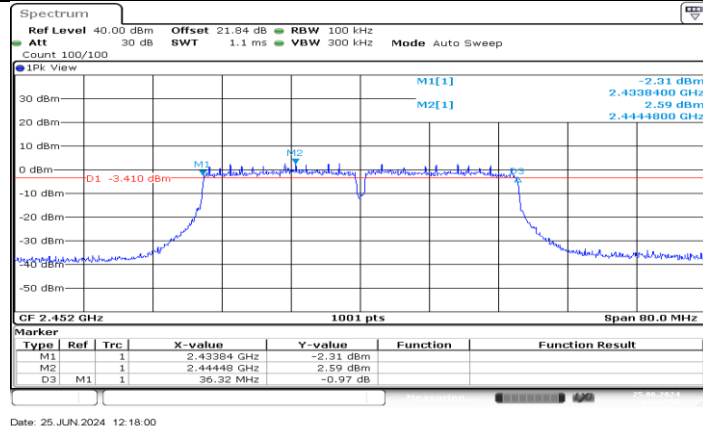


11N40MIMO_Ant3_2452

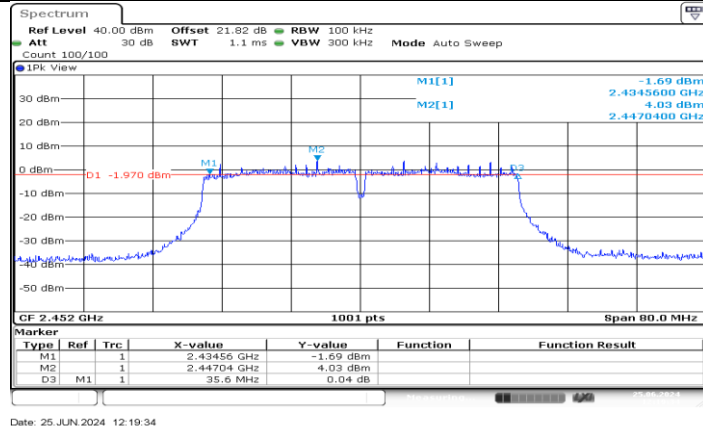


11N40MIMO_Ant4_2452

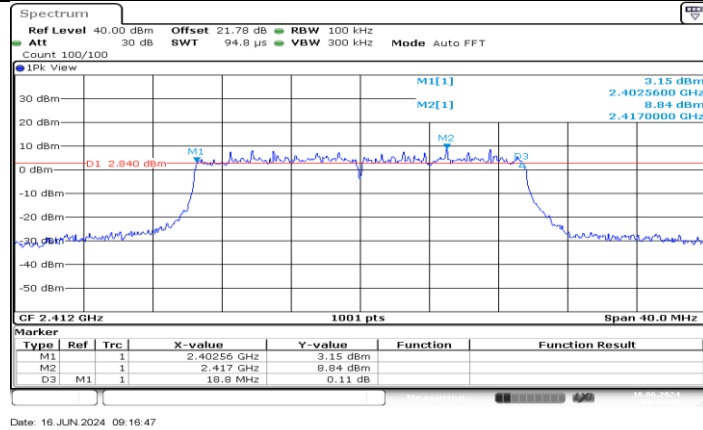


11AX20MIMO_Ant3_2412

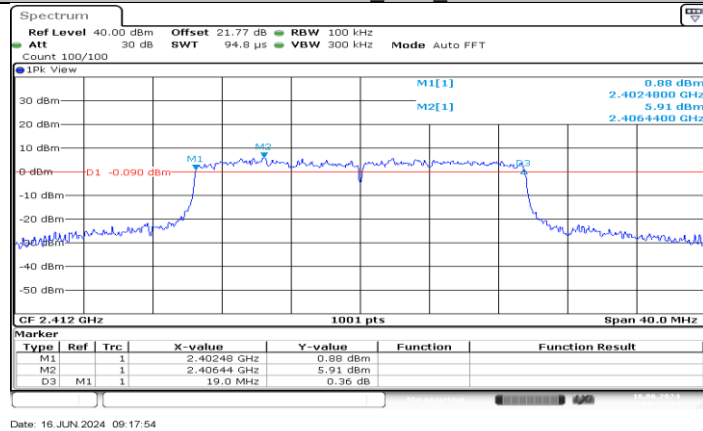


11AX20MIMO_Ant4_2412

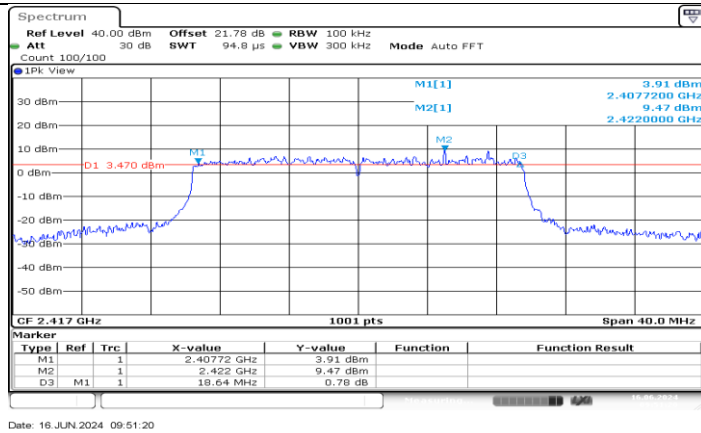

11AX20MIMO_Ant3_2417

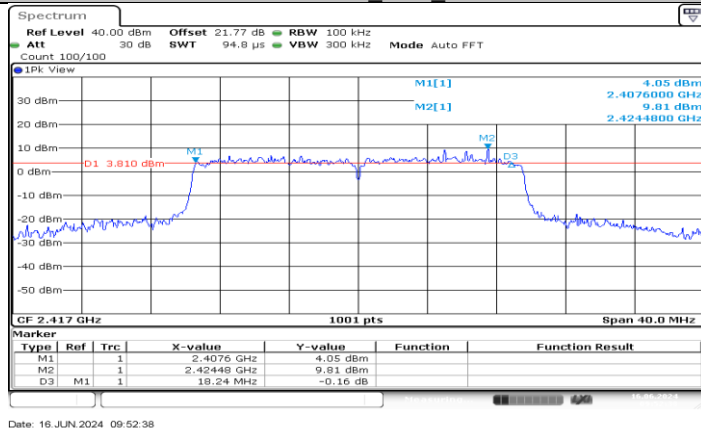

11AX20MIMO_Ant4_2417

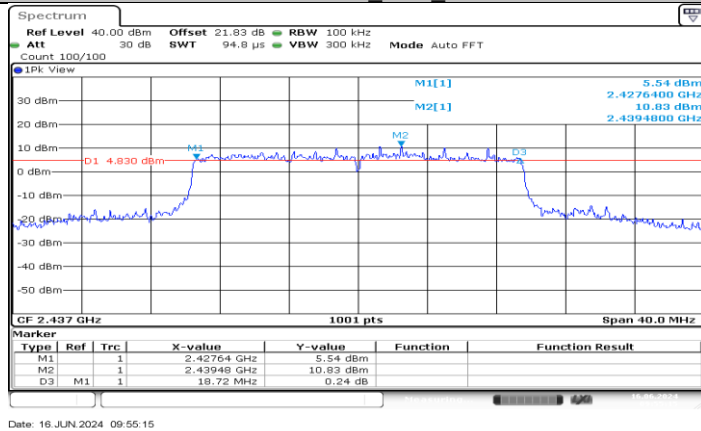

11AX20MIMO_Ant3_2437