

FCC PART 15.247 TEST REPORT

For

Nokia Shanghai Bell Co. Ltd.

No. 388, Ningqiao Rd. Pilot Free Trade Zone, Shanghai, China 201206

FCC ID: 2ADZR23002690FM20

Report Type: Original Report	Product Type: FastMile Compact
Test Engineer: Hope Zhang	<i>Hope Zhang</i>
Report Number: RSHA181008001-00B	
Report Date: 2018-11-09	
Reviewed By: Oscar Ye RF Leader	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
APPLICABLE STANDARD	12
CALCULATED FORMULARY:.....	12
CALCULATED DATA:.....	13
FCC §15.203 – ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	20
TEST DATA	21
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	63
APPLICABLE STANDARD	63
TEST PROCEDURE	63
TEST DATA	63
FCC §15.247(d) - BAND EDGES TESTING	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
TEST DATA	69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Nokia Shanghai Bell Co. Ltd.
Tested Model	3FE75113ACAA
Product Type	FastMile Compact
Dimension	220.0 mm (L)* 220.0 mm (W)*50.5mm(H)
Power Supply	DC 53V from POE Adapter

Adapter Information:

Model: G0545-530-060-PSE1000

Input: AC100-240 V 50/60Hz 0.75A

Output: DC53V,0.6A

**All measurement and test data in this report was gathered from production sample serial number: 20181008001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-10-08)*

Objective

This test report is prepared on behalf of *Nokia Shanghai Bell Co. Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 27 TNB submissions with FCC ID: 2ADZR23002690FM20.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

The EUT was tested under the engineering mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SHENZHEN GOSPELL	POE Input: AC 100-240V, 50/60Hz, 0.75A Max Output: DC 53V, 0.6A	G0545-530-060-PSE1000	/
DELL	Notebook	GX620	D65874152

External I/O Cable


Cable Description	Length (m)	From Port	To
RJ45 Cable-1	3.0	EUT	POE
RJ45 Cable-2	15.0	POE	Notebook
Power Cable	1.0	POE	AC Source/Socket

Block Diagram of Test Setup


For Conducted Emissions:

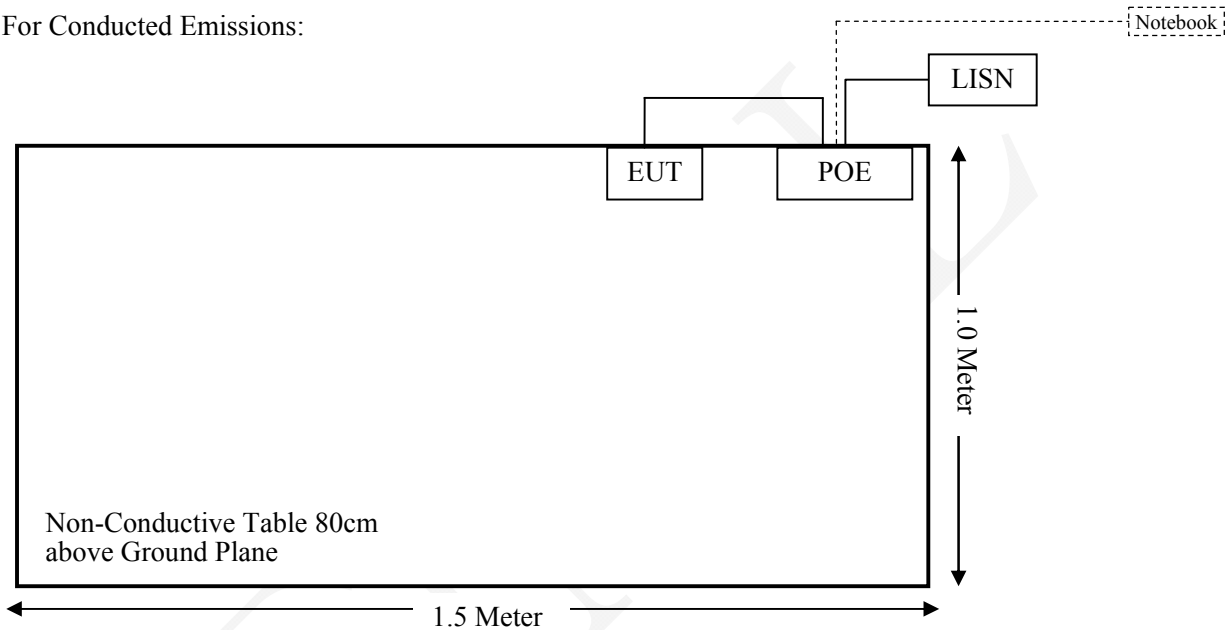

For Radiated Emissions (Below 1GHz):

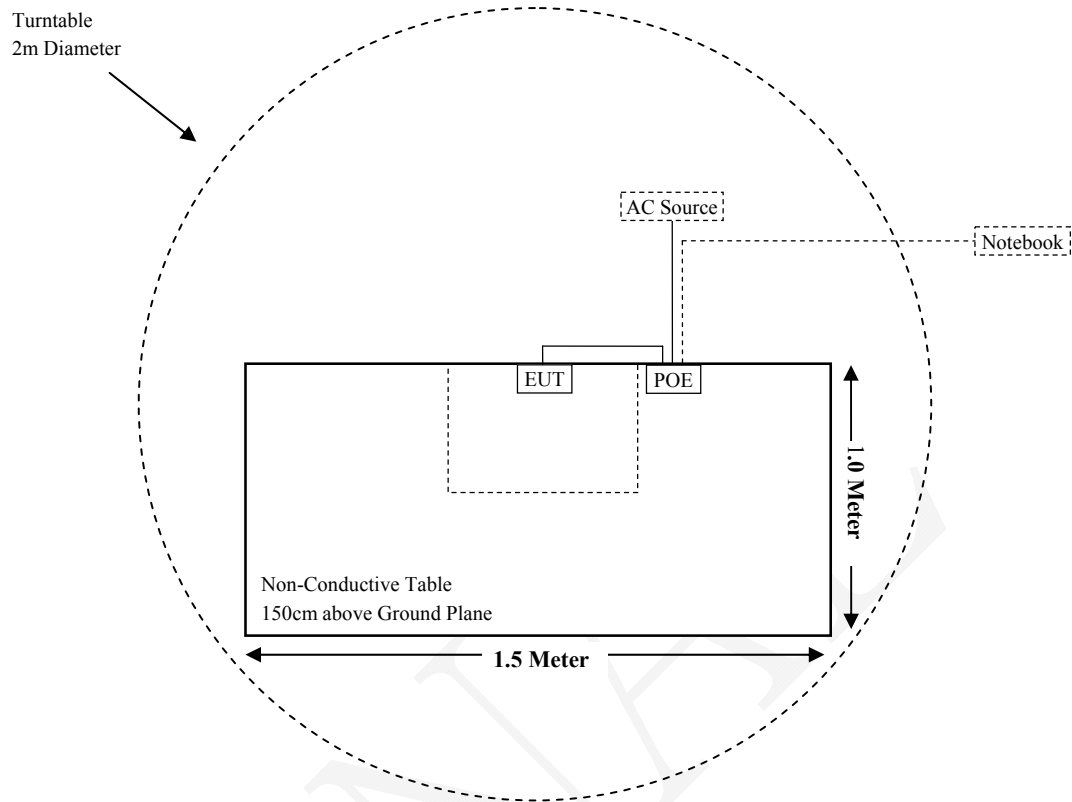

For Radiated Emissions (Above 1GHz):

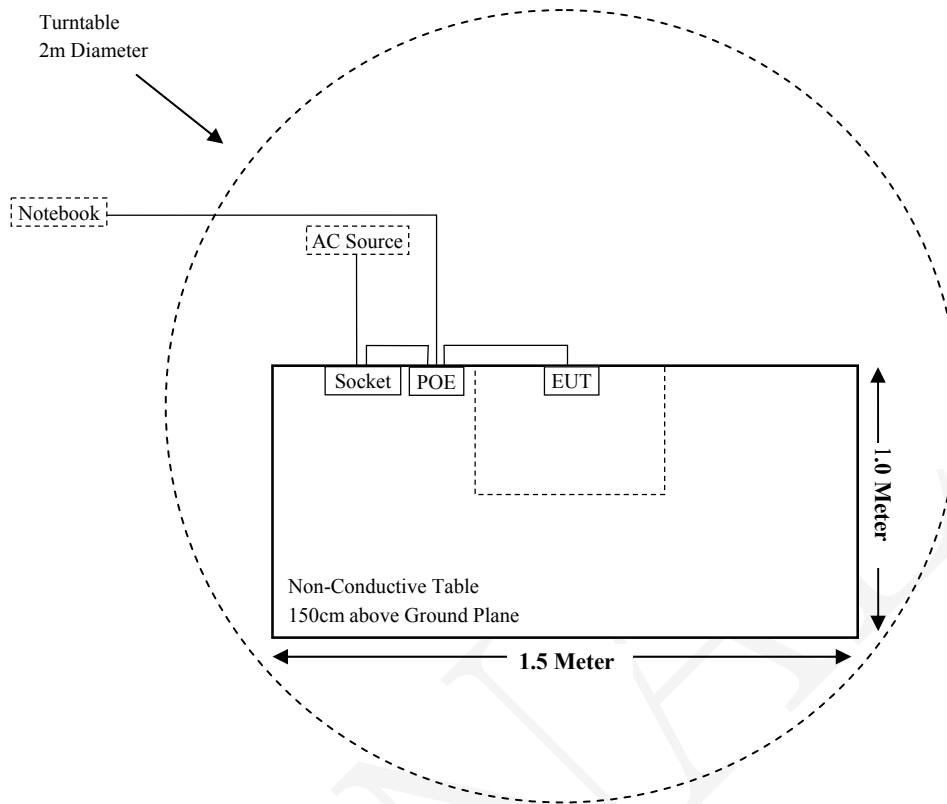

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-05	2019-08-04
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-05	2019-08-04
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-05	2019-08-04
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Notch filter	BRM50702	G024	2018-08-05	2019-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-05	2019-08-04
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-05	2019-08-04
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-05	2019-08-04
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-05	2019-08-04
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-11-12	2018-11-11
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
Fastmile	RF Cable	Fastmile01	C01	Each	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	ANT	Frequency Range (MHz)	Max Antenna Gain		Target Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
			(dBi)	(numeric)	(dBm)	(mW)			
Bluetooth	ANT2	2402-2480	0.00	1.00	7	5.01	50	0.0002	1.00
LTE Band 7	ANT0	2500-2570	12.50	17.78	23	199.53	50	0.1129	1.00
LTE Band 7	ANT1	2500-2570	12.50	17.78	23	199.53	50	0.1129	1.00
LTE Band 41	ANT0	2496-2690	12.50	17.78	22	158.49	50	0.0897	1.00
LTE Band 41	ANT1	2496-2690	12.50	17.78	22	158.49	50	0.0897	1.00

Note: Bluetooth and LTE can transmit simultaneously; the worst condition is Bluetooth & LTE Band 7 ANT1 + LTE Band 7 ANT0, as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0002 + 0.1129 + 0.1129 = 0.2260 < 1.0$$

Result: The device meet FCC MPE at 50 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an internal PCB antenna for Bluetooth, which the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

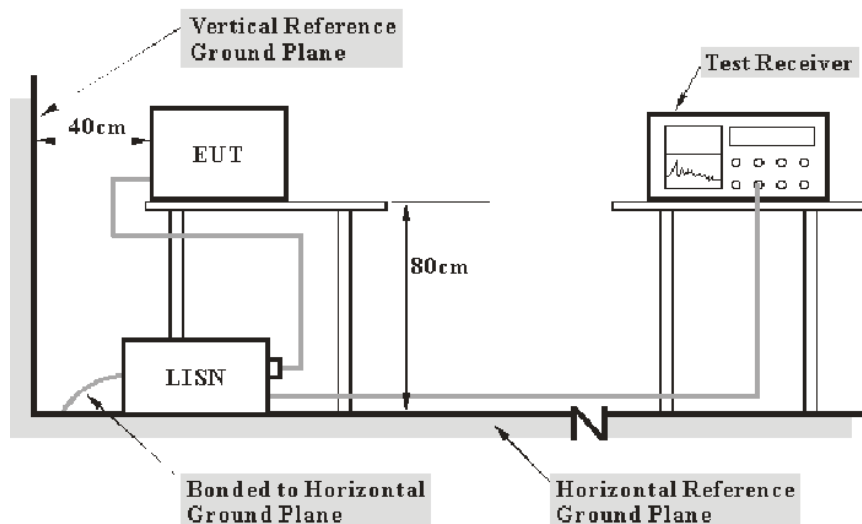

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa


The testing was performed by Hope Zhang on 2018-10-24.

EUT operation mode: Transmitting in low channel of GFSK mode (Worst case)

AC 120V/60 Hz, Line

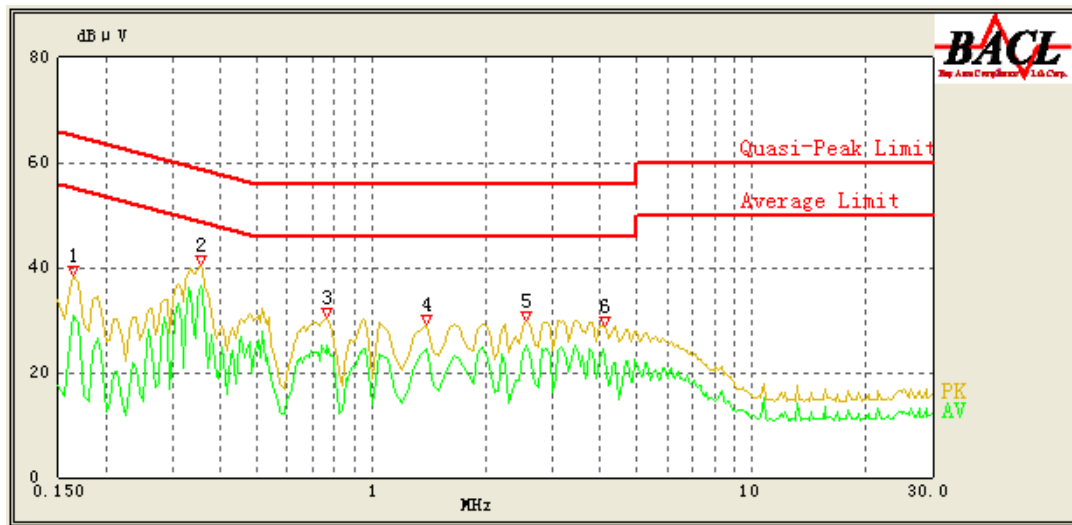

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.165	38.51	QP	9.000	L1	16.05	65.57	27.06	Compliant
0.165	30.94	AV	9.000	L1	16.05	55.57	24.63	Compliant
0.355	40.66	QP	9.000	L1	16.05	60.14	19.48	Compliant
0.355	36.65	AV	9.000	L1	16.05	50.14	13.49	Compliant
0.765	30.54	QP	9.000	L1	15.93	56.00	25.46	Compliant
0.765	25.19	AV	9.000	L1	15.93	46.00	20.81	Compliant
1.400	29.06	QP	9.000	L1	15.87	56.00	26.94	Compliant
1.400	24.43	AV	9.000	L1	15.87	46.00	21.57	Compliant
2.550	29.79	QP	9.000	L1	15.85	56.00	26.21	Compliant
2.550	25.16	AV	9.000	L1	15.85	46.00	20.84	Compliant
4.100	28.96	QP	9.000	L1	15.85	56.00	27.04	Compliant
4.100	23.25	AV	9.000	L1	15.85	46.00	22.75	Compliant

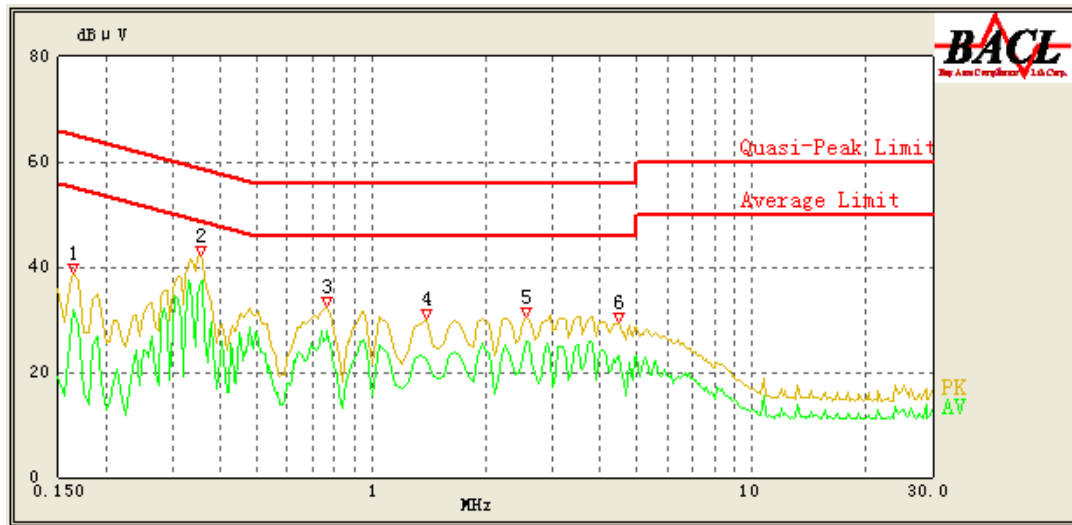AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.165	38.87	QP	9.000	N	16.06	65.57	26.70	Compliant
0.165	31.93	AV	9.000	N	16.06	55.57	23.64	Compliant
0.355	42.04	QP	9.000	N	16.08	60.14	18.10	Compliant
0.355	37.26	AV	9.000	N	16.08	50.14	12.88	Compliant
0.760	32.65	QP	9.000	N	15.98	56.00	23.35	Compliant
0.760	26.43	AV	9.000	N	15.98	46.00	19.57	Compliant
1.400	30.04	QP	9.000	N	15.93	56.00	25.96	Compliant
1.400	22.65	AV	9.000	N	15.93	46.00	23.35	Compliant
2.550	30.49	QP	9.000	N	15.90	56.00	25.51	Compliant
2.550	25.86	AV	9.000	N	15.90	46.00	20.14	Compliant
4.500	29.38	QP	9.000	N	15.88	56.00	26.62	Compliant
4.500	23.14	AV	9.000	N	15.88	46.00	22.86	Compliant



Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

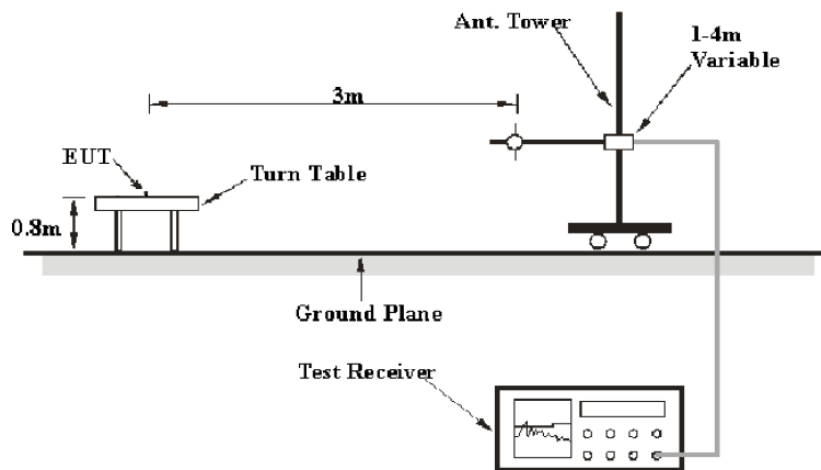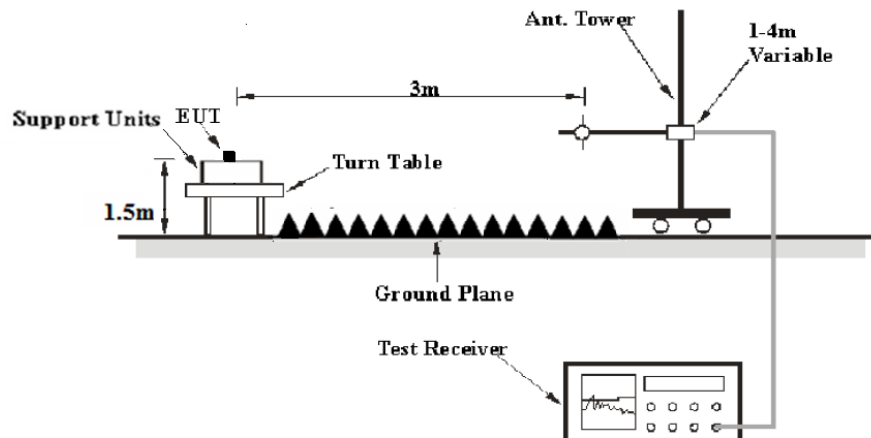EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	22.9-23.4 °C
Relative Humidity:	46-49 %
ATM Pressure:	101.0-101.3 kPa

The testing was performed by Hope Zhang from 2018-10-15 to 2018-11-09.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case low channel of GFSK Mode in X-axis of orientation was recorded

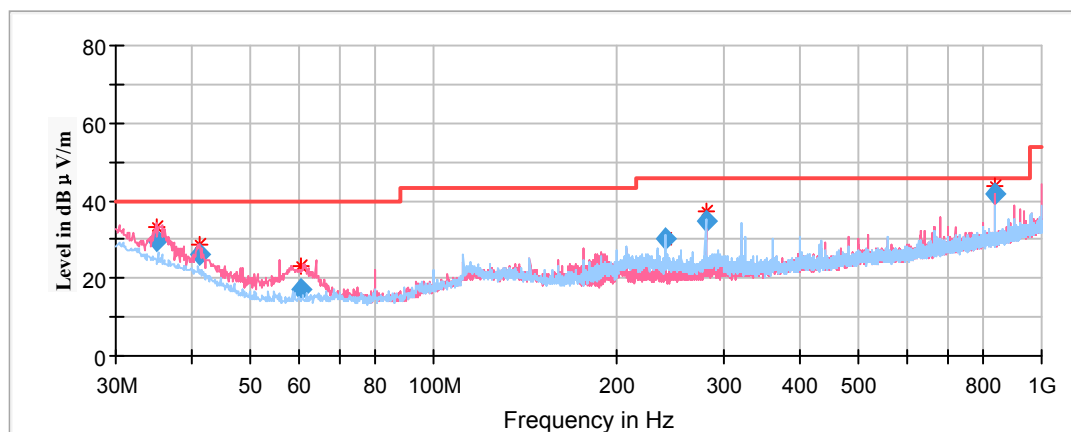

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
35.034850	29.63	101.0	V	64.0	-7.3	40.00	10.37
41.254600	26.24	101.0	V	19.0	-11.6	40.00	13.76
60.355150	17.18	101.0	V	75.0	-17.9	40.00	22.82
239.999900	30.35	101.0	H	90.0	-12.1	46.00	15.65
279.984450	34.49	101.0	H	101.0	-11.1	46.00	11.51
839.996250	41.57	101.0	V	59.0	-1.1	46.00	4.43

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case GFSK Mode in X-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

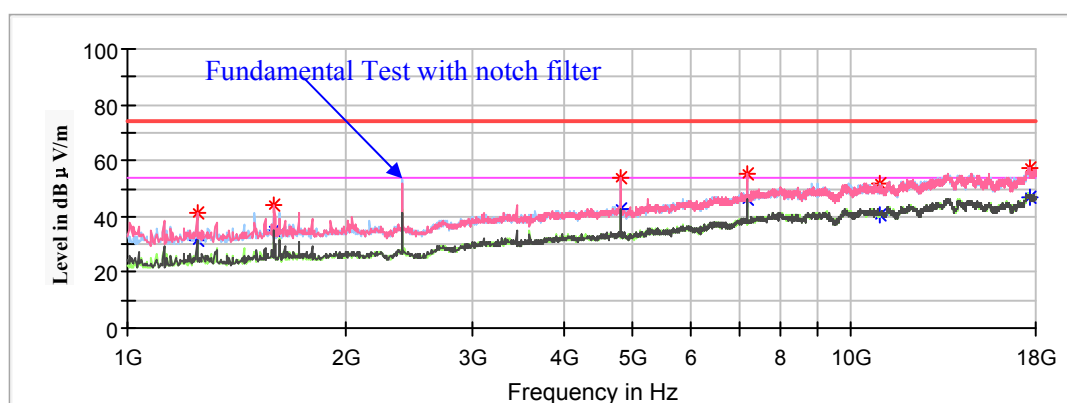

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1248.200000	---	31.80	200.0	V	339.0	-9.0	54.00	22.20
1248.200000	41.39	---	200.0	V	339.0	-9.0	74.00	32.61
1591.600000	---	34.87	200.0	V	158.0	-7.2	54.00	19.13
1591.600000	44.05	---	200.0	V	158.0	-7.2	74.00	29.95
4804.000000	---	42.43	200.0	V	275.0	1.8	54.00	11.57
4804.000000	53.96	---	200.0	V	275.0	1.8	74.00	20.04
7206.000000	---	46.48	200.0	V	348.0	8.9	54.00	7.52
7206.000000	55.40	---	200.0	V	348.0	8.9	74.00	18.60
10962.000000	---	40.74	100.0	H	187.0	13.4	54.00	13.26
10962.000000	51.76	---	100.0	H	187.0	13.4	74.00	22.24
17639.600000	---	46.65	200.0	V	56.0	17.3	54.00	7.35
17639.600000	57.60	---	200.0	V	56.0	17.3	74.00	16.40

Middle Channel: 2441MHz


Full Spectrum

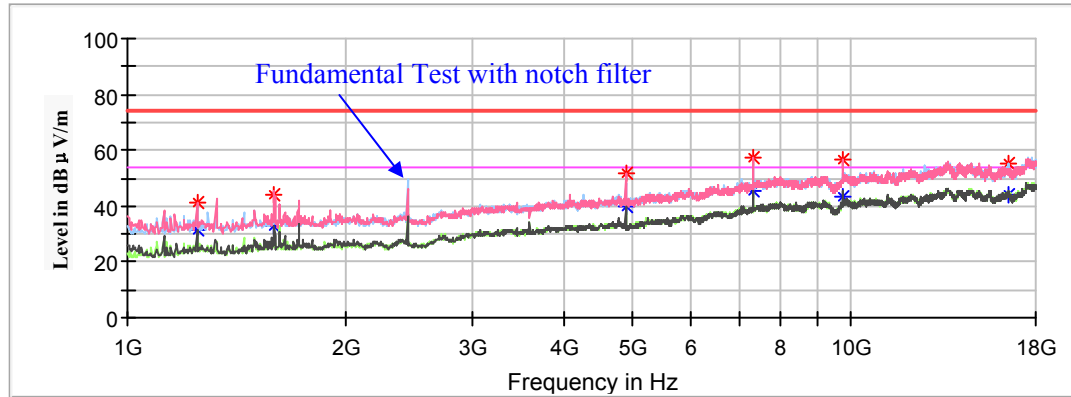

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1248.200000	---	31.54	200.0	V	349.0	-9.0	54.00	22.46
1248.200000	41.28	---	200.0	V	349.0	-9.0	74.00	32.72
1595.000000	44.06	---	150.0	V	153.0	-7.2	74.00	29.94
1595.000000	---	32.81	150.0	V	153.0	-7.2	54.00	21.19
4882.000000	51.59	---	200.0	V	340.0	1.9	74.00	22.41
4882.000000	---	39.51	200.0	V	340.0	1.9	54.00	14.49
7323.000000	57.29	---	200.0	V	18.0	9.2	74.00	16.71
7323.000000	---	45.30	200.0	V	18.0	9.2	54.00	8.70
9761.800000	56.42	---	200.0	V	179.0	12.0	74.00	17.58
9761.800000	---	43.57	200.0	V	179.0	12.0	54.00	10.43
16524.400000	---	43.92	100.0	H	5.0	13.7	54.00	10.08
16524.400000	55.01	---	100.0	H	5.0	13.7	74.00	18.99

High Channel: 2480MHz


Full Spectrum

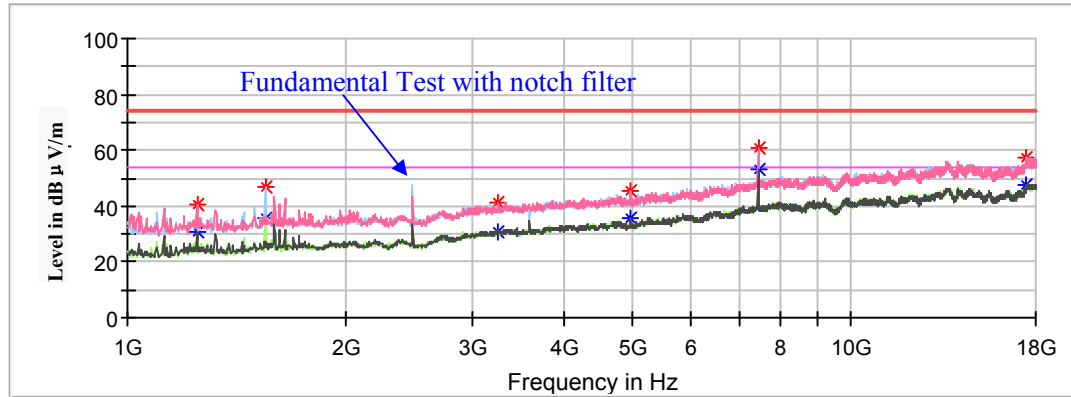


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1248.200000	---	30.76	100.0	V	349.0	-9.0	54.00	23.24
1248.200000	40.45	---	100.0	V	349.0	-9.0	74.00	33.55
1550.800000	---	35.82	200.0	H	115.0	-7.4	54.00	18.18
1550.800000	46.91	---	200.0	H	115.0	-7.4	74.00	27.09
3257.600000	---	30.74	150.0	V	8.0	-1.2	54.00	23.26
3257.600000	40.93	---	150.0	V	8.0	-1.2	74.00	33.07
4960.000000	---	35.88	200.0	V	343.0	2.0	54.00	18.12
4960.000000	45.17	---	200.0	V	343.0	2.0	74.00	28.83
7440.000000	---	52.98	150.0	V	98.0	9.6	54.00	1.02
7440.000000	61.12	---	150.0	V	98.0	9.6	74.00	12.88
17496.800000	---	47.27	150.0	H	143.0	17.2	54.00	6.73
17496.800000	57.37	---	150.0	H	143.0	17.2	74.00	16.63

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case low channel of 8DPSK Mode in X-axis of orientation was recorded

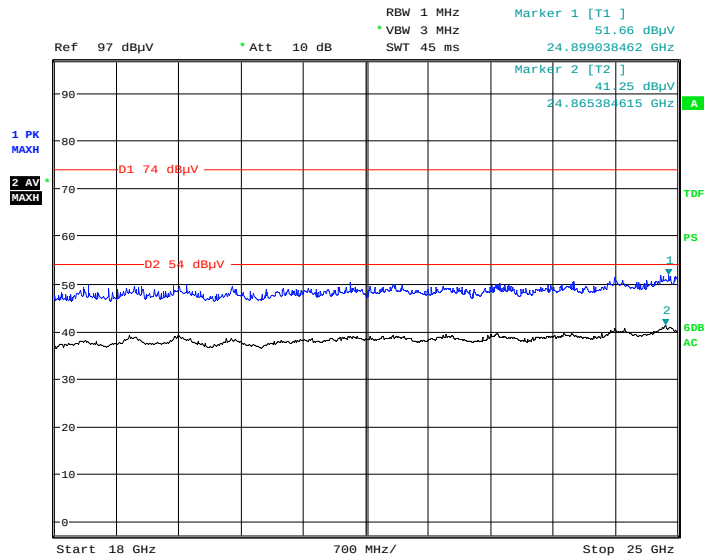Horizontal

Date: 25.OCT.2018 15:34:40

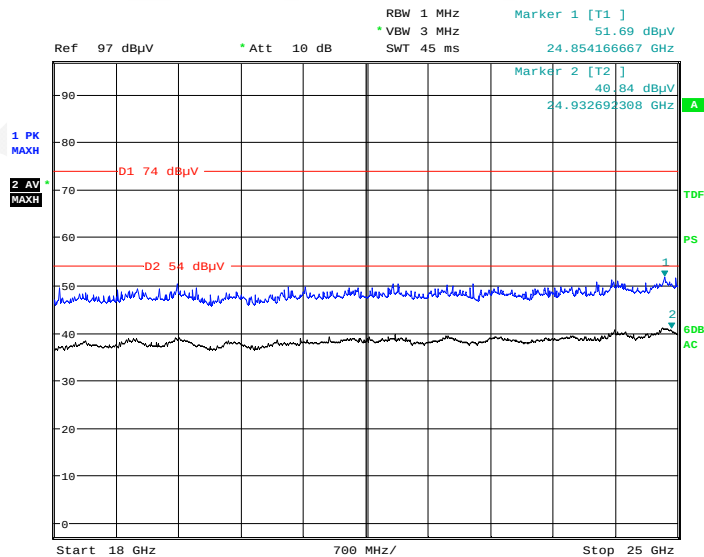Vertical

Date: 25.OCT.2018 15:52:53

Fundamental Test & Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case GFSK Mode in X-axis of orientation was recorded

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	100.87	---	150.0	H	61.0	6.0	/	/
2402.000000	---	99.66	150.0	H	61.0	6.0	/	/
2402.000000	98.40	---	150.0	V	285.0	6.0	/	/
2402.000000	---	97.26	150.0	V	285.0	6.0	/	/
2390.000000	56.69	---	200.0	H	73.0	6.0	74.00	17.31
2390.000000	---	43.45	100.0	H	73.0	6.0	54.00	10.55
Middle Channel: 2441MHz								
2441.000000	100.43	---	150.0	H	339.0	6.2	/	/
2441.000000	---	99.60	150.0	H	339.0	6.2	/	/
2441.000000	98.06	---	100.0	V	61.0	6.2	/	/
2441.000000	---	97.28	100.0	V	61.0	6.2	/	/
High Channel: 2480MHz								
2480.000000	99.23	---	150.0	H	80.0	6.3	/	/
2480.000000	---	98.30	150.0	H	80.0	6.3	/	/
2480.000000	97.02	---	150.0	V	239.0	6.3	/	/
2480.000000	---	96.14	150.0	V	239.0	6.3	/	/
2483.500000	---	43.11	200.0	H	75.0	6.3	54.00	10.89
2483.500000	56.50	---	150.0	H	67.0	6.4	74.00	17.50

Conducted Spurious Emissions at Antenna Port


BDR (GFSK): Low Channel

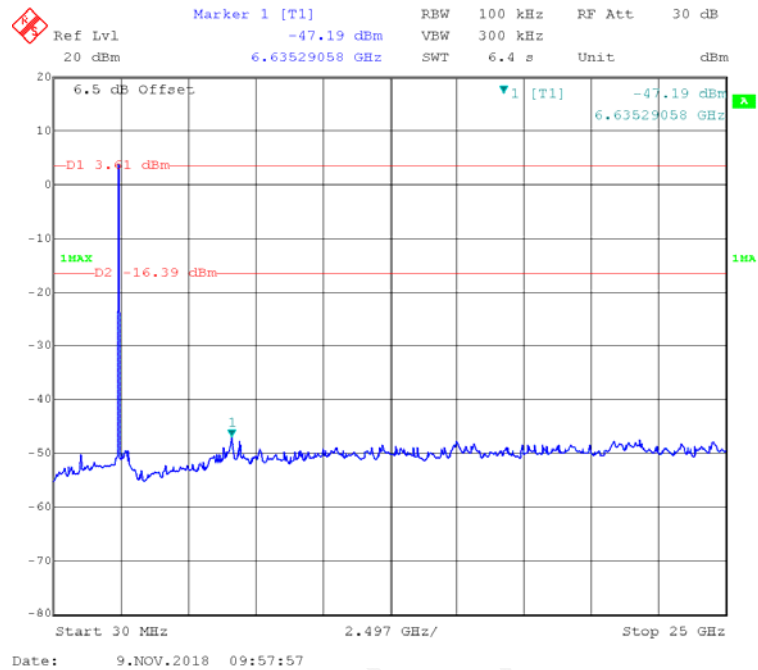


BDR (GFSK): Middle Channel

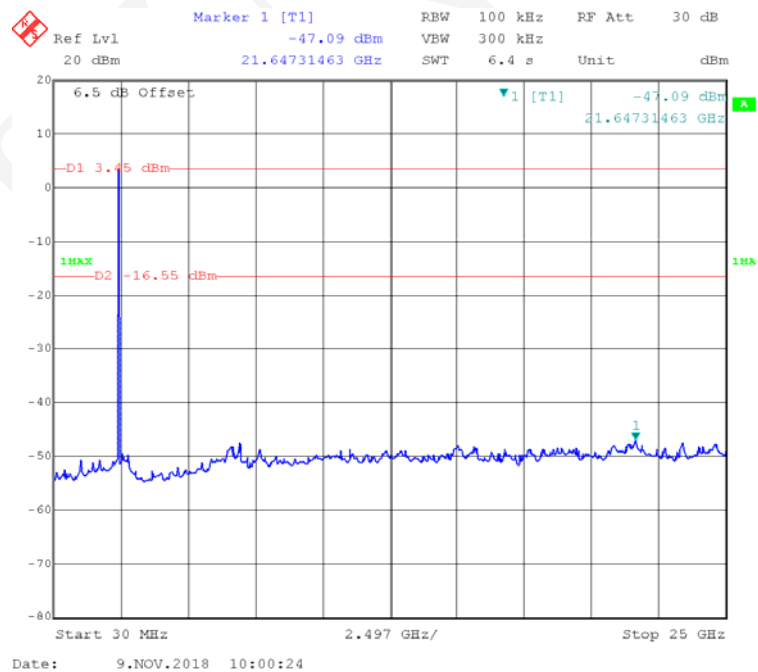


BDR (GFSK): High Channel

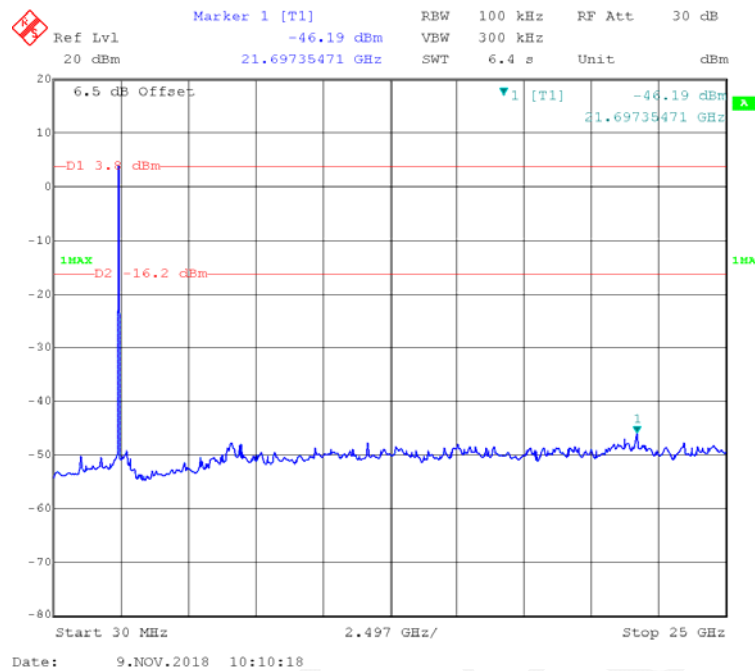


EDR ($\pi/4$ -DQPSK): Low Channel

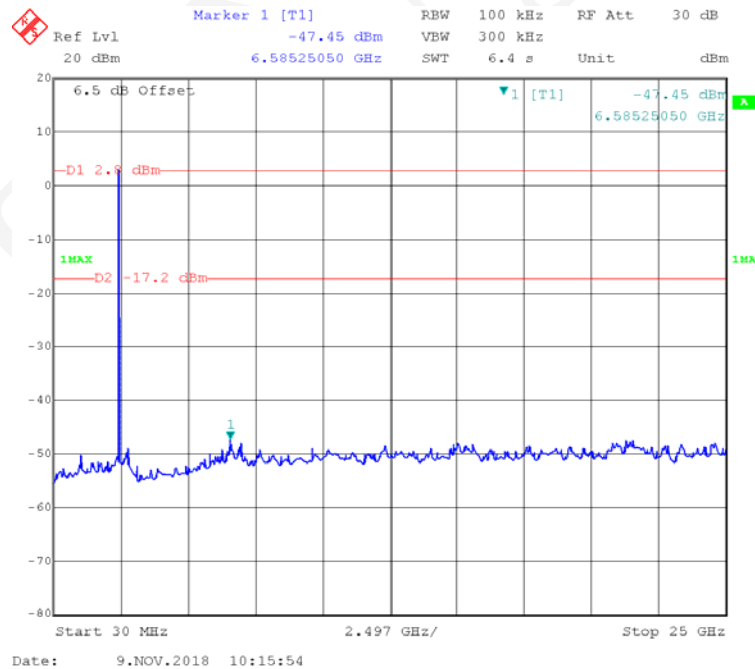


EDR ($\pi/4$ -DQPSK): Middle Channel

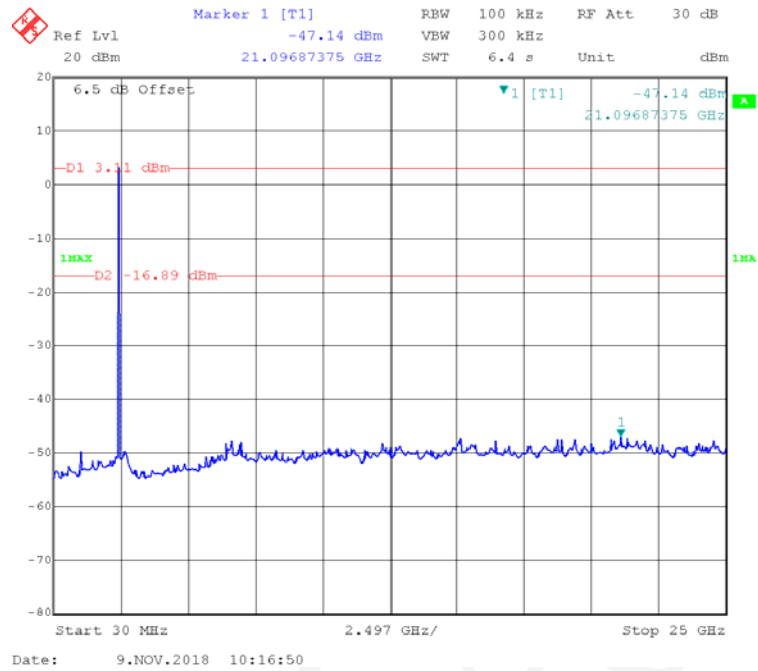


EDR ($\pi/4$ -DQPSK): High Channel

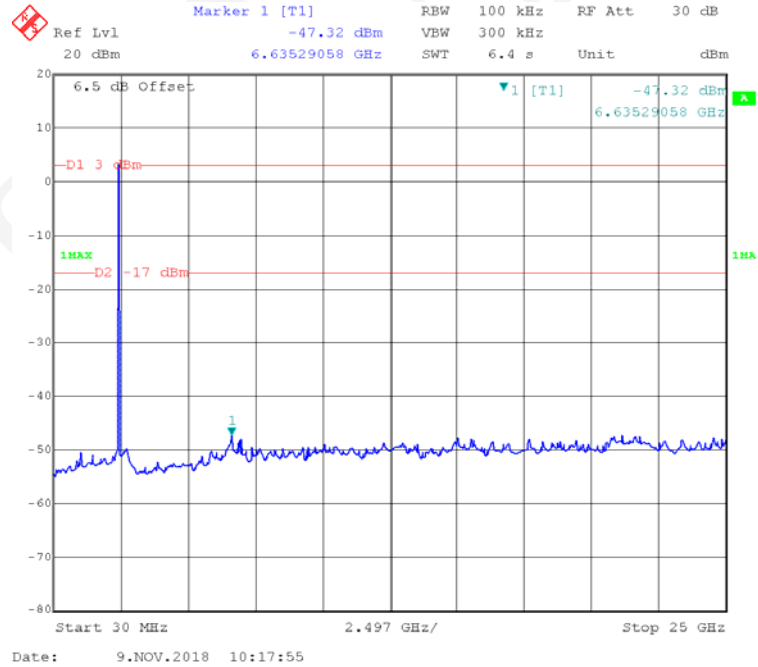


EDR (8DPSK): Low Channel

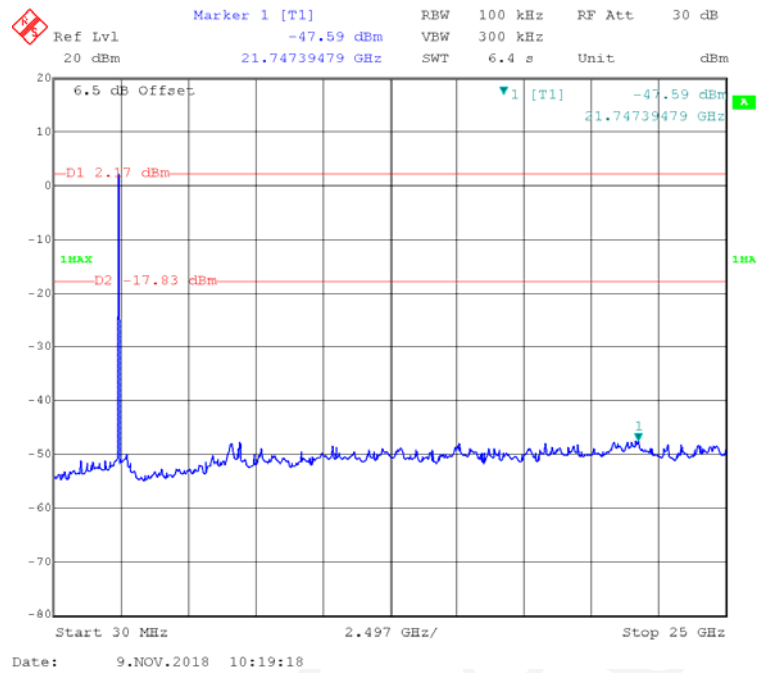

EDR (8DPSK): Middle Channel

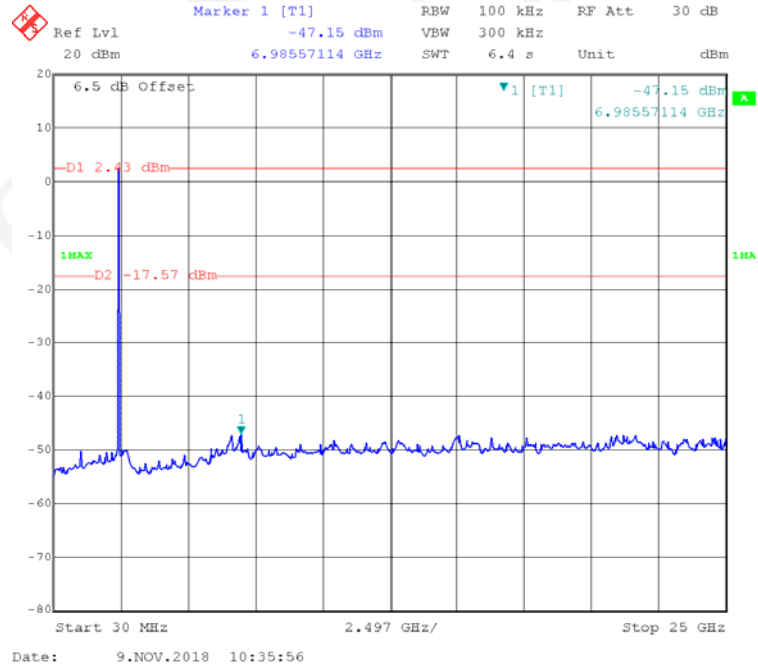

EDR (8DPSK): High Channel

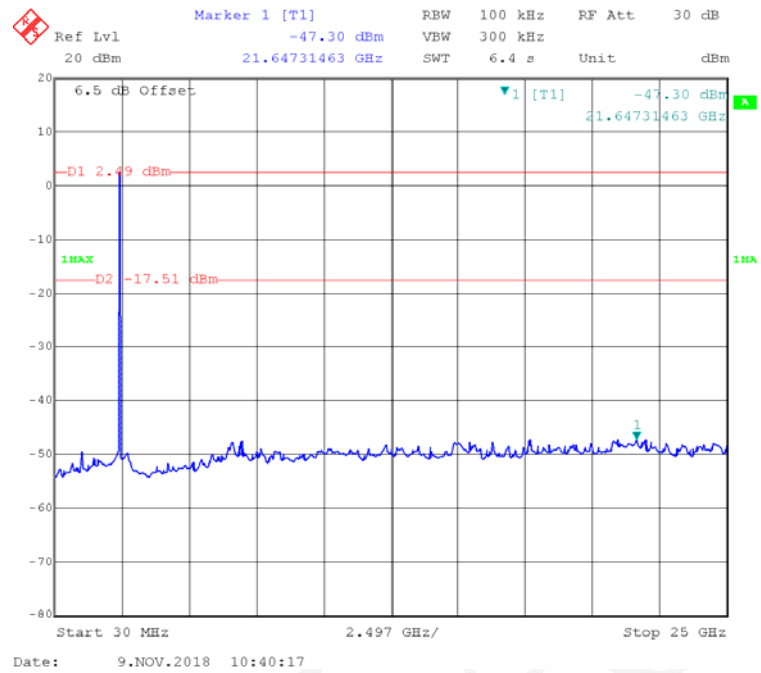

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data**Environmental Conditions**

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Hope Zhang on 2018-10-19.


EUT operation mode: Transmitting

Test Result: Compliance.


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.022	0.956	Pass
	Adjacent	2403			
	Middle	2441	1.010	0.956	Pass
	Adjacent	2442			
	High	2480	1.010	0.956	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.016	0.898	Pass
	Adjacent	2403			
	Middle	2441	0.992	0.898	Pass
	Adjacent	2442			
	High	2480	1.010	0.898	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.022	0.886	Pass
	Adjacent	2403			
	Middle	2441	1.022	0.886	Pass
	Adjacent	2442			
	High	2480	1.004	0.886	Pass
	Adjacent	2479			

Note: For BDR mode, Limit = 20 dB bandwidth; For EDR mode, Limit = 20 dB bandwidth*2/3


BDR (GFSK): Low Channel

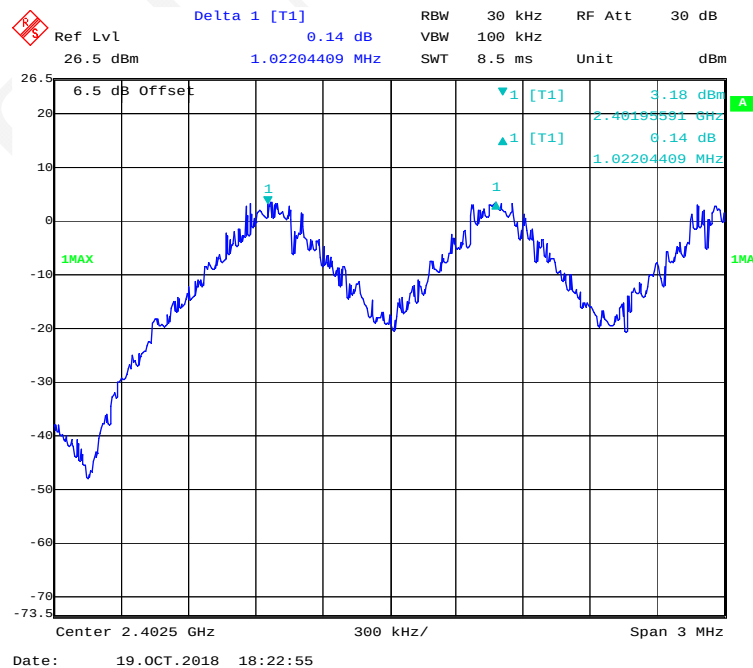

BDR (GFSK): Middle Channel

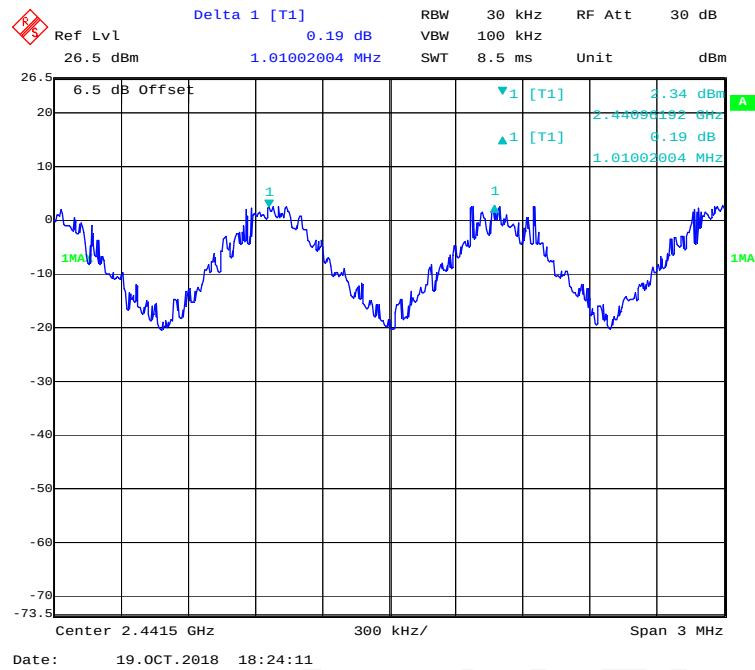

BDR (GFSK): High Channel

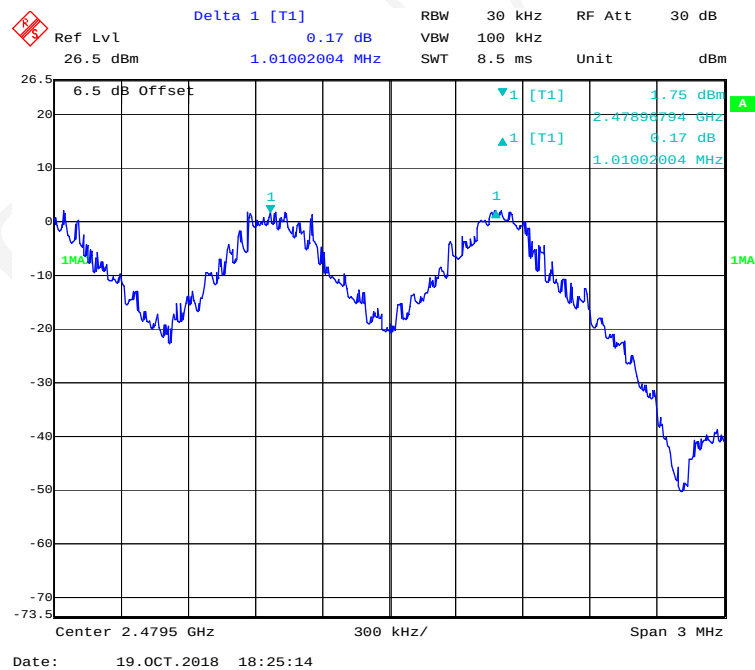

Delta 1 [T1]

Ref Lvl 15 dBm

0.21 dB

RBW 30 kHz

VBW 100 kHz

SWT 8.5 ms

RF Att 30 dB

Unit dBm

6.5 dB Offset

1.05 dBm

2.40197395 GHz

1.01603206 MHz

1MAX

Center 2.4025 GHz

300 kHz/

Span 3 MHz

Date: 19.OCT.2018 14:37:02

Delta 1 [T1]

Ref Lvl -0.15 dB

15 dBm -991.98396794 kHz

RBW 30 kHz

VBW 100 kHz

SWT 8.5 ms

RF Att 30 dB

Unit dBm

6.5 dB Offset

1 [T1]

1 [T1]

1 [T1]

2.44198397 GHz

-0.15 dB

991.98396794 kHz

1MAX

1MAX

Center 2.4415 GHz

300 kHz/

Span 3 MHz

Date: 19.OCT.2018 13:55:22

Ref Lvl 15 dBm
Delta 1 [T1] -0.28 dB
RBW 30 kHz
VBW 100 kHz
RF Att 30 dB
15 dBm
-1.01002004 MHz
SWT 8.5 ms
Unit dBm

6.5 dB Offset

1 [T1] -6.62 dBm
1 [T1] -6.28 dB
1.01002004 MHz

1MAX

Center 2.4795 GHz
300 kHz/
Span 3 MHz

Date: 19.OCT.2018 14:01:26

Delta 1 [T1] -0.41 dB RBW 30 kHz RF Att 30 dB

Ref Lvl 15 dBm VBW 100 kHz Unit dBm

1.02204409 MHz

6.5 dB Offset

1 [T1] 1.31 dBm

1 [T1] -6.41 dB

1.02204409 MHz

1MAX

Center 2.4025 GHz 300 kHz/ Span 3 MHz

Date: 19.OCT.2018 14:24:48

Delta 1 [T1] -0.33 dB RBW 30 kHz RF Att 30 dB

Ref Lvl 15 dBm 1.02204409 MHz SWT 8.5 ms Unit dBm

6.5 dB Offset

1 [T1] 1 [T1]

2.44097395 GHz -0.33 dB

1.02204409 MHz

1MAX

Center 2.4415 GHz 300 kHz/ Span 3 MHz

Date: 19.OCT.2018 14:15:07

[illegible]

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	22.8-23.2 °C
Relative Humidity:	48-50 %
ATM Pressure:	101.0-101.3 kPa


The testing was performed by Hope Zhang from 2018-10-15 to 2018-10-19.

EUT operation mode: Transmitting


Test Result: Compliance.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.956
	Middle	2441	0.956
	High	2480	0.956
EDR ($\pi/4$-DQPSK)	Low	2402	1.347
	Middle	2441	1.347
	High	2480	1.347
EDR (8DPSK)	Low	2402	1.329
	Middle	2441	1.329
	High	2480	1.329


BDR (GFSK): Low Channel

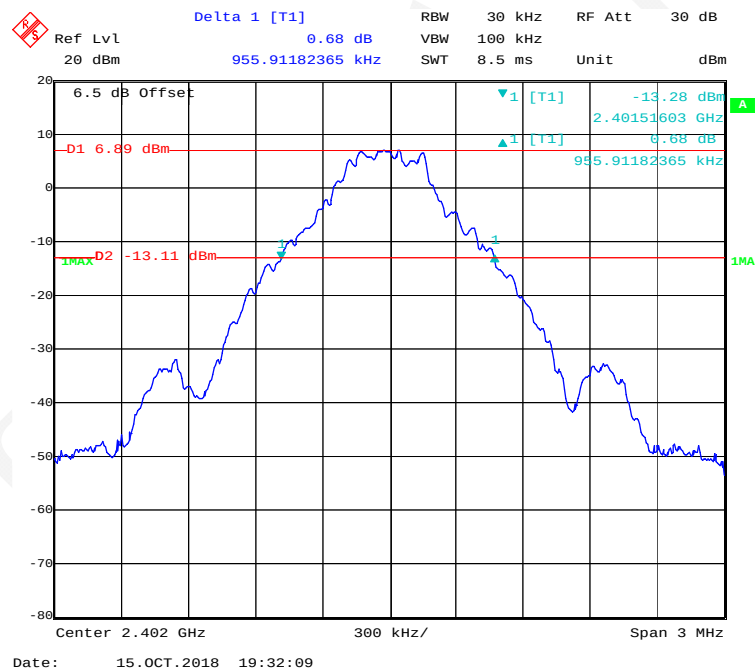

BDR (GFSK): Middle Channel

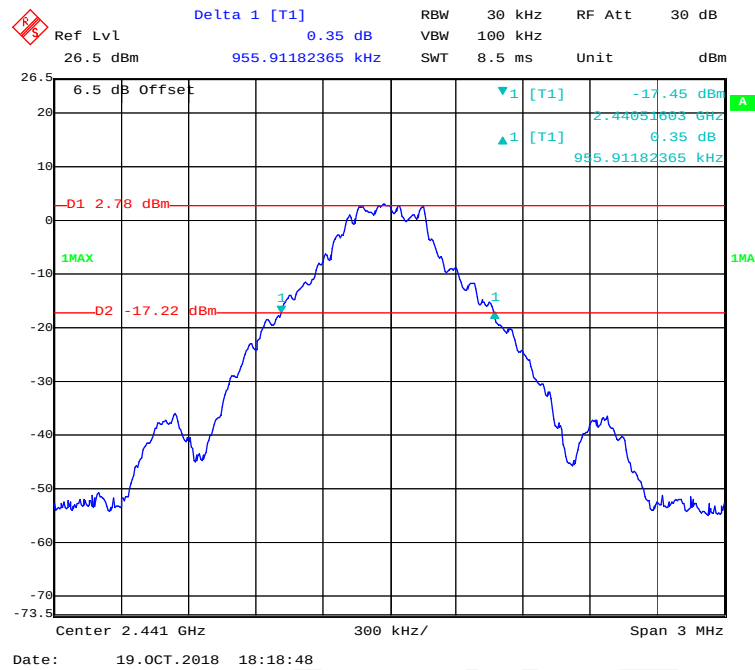

BDR (GFSK): High Channel

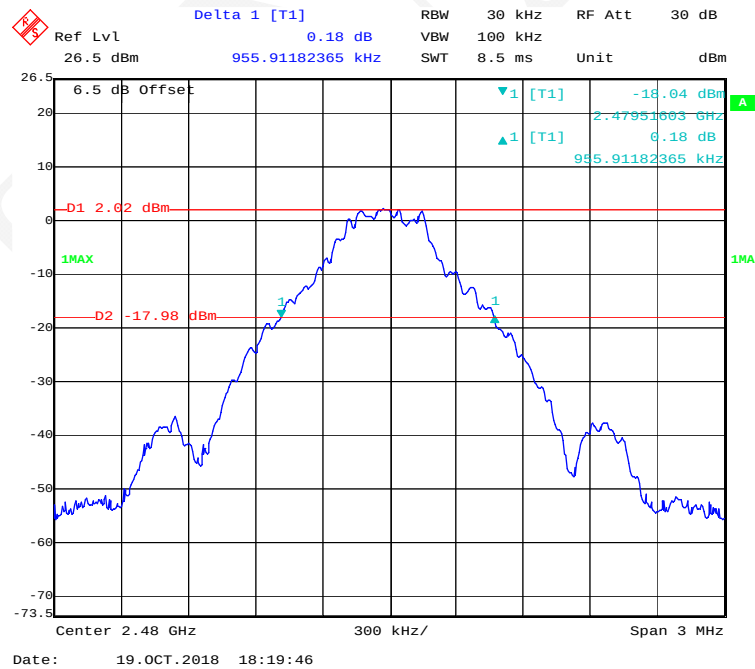

Delta 1 [T1] 0.02 dB
 RBW 30 kHz
 VBW 100 kHz
 RF Att 30 dB
 Ref Lvl 20 dBm
 1.34669339 MHz
 SWT 8.5 ms
 Unit dBm

6.5 dB Offset
 -D1 1.45 dBm
 1MAX
 -D2 -18.55 dBm
 1 [T1]
 -18.44 dBm
 2.40131162 GHz
 0.02 dB
 1.34669339 MHz
 1 [T1]
 1MA

Center 2.402 GHz
 300 kHz/
 Span 3 MHz

Date: 15.OCT.2018 19:49:07

[illegible]

Delta 1 [T1] 0.04 dB
 RBW 30 kHz RF Att 30 dB
 Ref Lvl 20 dBm VBW 100 kHz
 1.34669339 MHz SWT 8.5 ms Unit dBm

6.5 dB Offset
 -20.66 dBm
 2.47931162 GHz
 0.04 dB
 1.34669339 MHz

D1 -0.09 dBm
 1MAX
 D2 -20.69 dBm
 1
 1

Center 2.48 GHz
 300 kHz/
 Span 3 MHz

Date: 15.OCT.2018 19:44:06

Spectrum Analyzer Readings:

- Center Frequency:** 2.402 GHz
- Span:** 3 MHz
- Ref Lvl:** 20 dBm
- RBW:** 30 kHz
- VBW:** 100 kHz
- SWT:** 8.5 ms
- RF Att:** 30 dB
- Unit:** dBm

Peak Data:

Label	Frequency (MHz)	Power (dBm)
D1	1.53	-1.53
D2	18.47	-18.47
Delta 1 [T1]	1.32865731	-0.11
T1	2.40131764	-18.26

Delta 1 [T1] -0.16 dB
 RBW 30 kHz RF Att 30 dB
 Ref Lvl 20 dBm Unit dBm
 20 dBm 1.32865731 MHz

6.5 dB Offset
 D1 0.54 dBm
 D2 -19.46 dBm
 1MAX
 1MA

1 [T1] -19.02 dBm
 2.44031764 GHz
 1 [T1] -0.16 dB
 1.32865731 MHz

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 15.OCT.2018 19:57:10

Delta 1 [T1] 0.04 dB RBW 30 kHz RF Att 30 dB

Ref Lvl 20 dBm 20 dBm Unit dBm

6.5 dB Offset

b1 -0.7 dBm

1MAX

b2 -20.7 dBm

1

1 [T1] -20.40 dBm

2.47931764 GHz

0.04 dB

1.32865731 MHz

Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 15.OCT.2018 19:59:58

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Hope Zhang on 2018-10-19.

EUT operation mode: Hopping


Test Result: Compliance.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

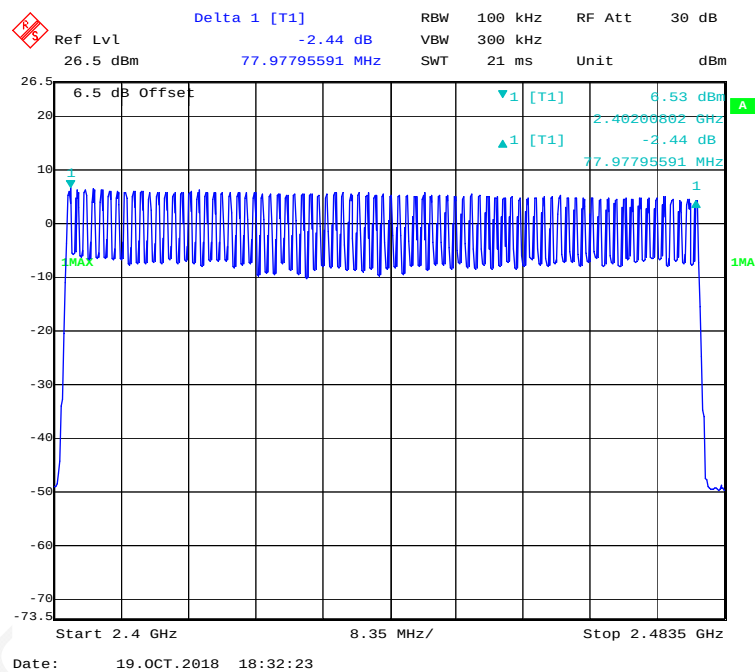

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

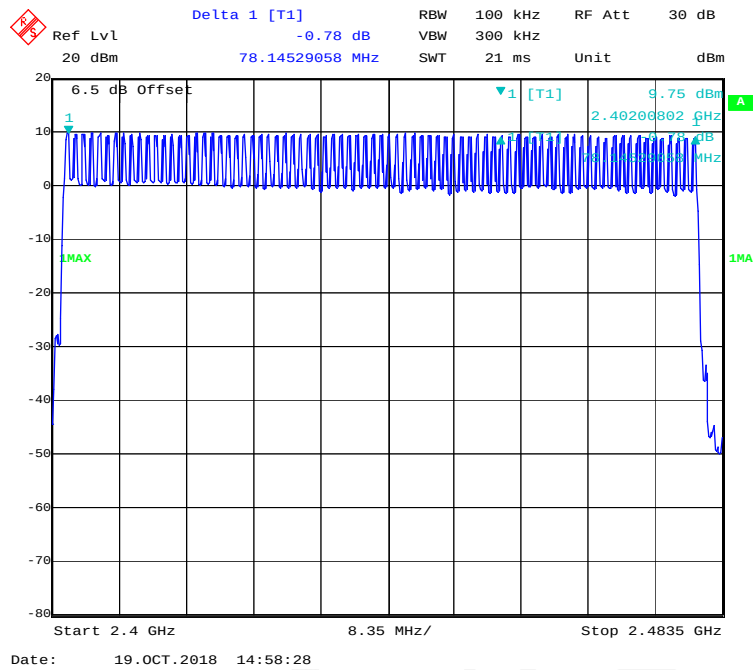

EDR (8DPSK): Number of Hopping Channels

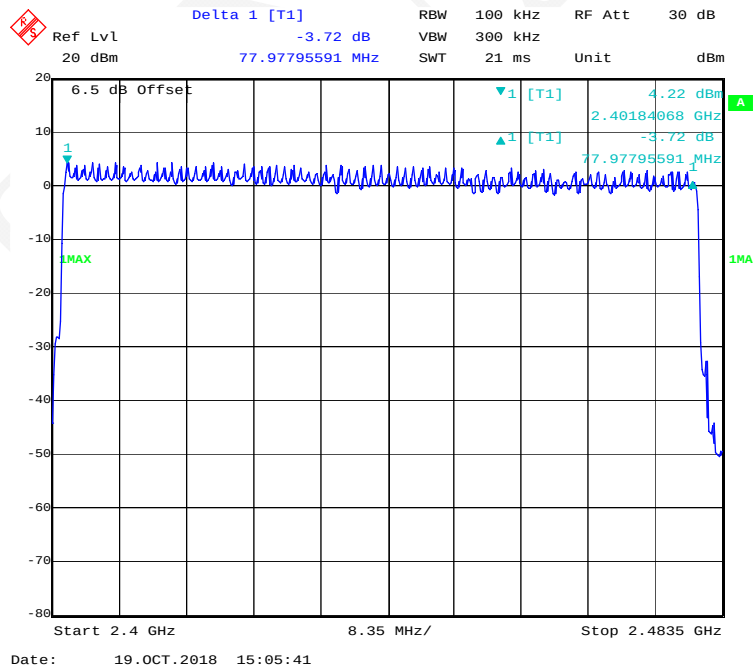

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	23.4 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-11-09.


EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.419	0.134	0.4	Pass
		Middle	0.417	0.133	0.4	Pass
		High	0.415	0.133	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.703	0.272	0.4	Pass
		Middle	1.679	0.269	0.4	Pass
		High	1.687	0.270	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	3.008	0.321	0.4	Pass
		Middle	2.958	0.316	0.4	Pass
		High	2.948	0.314	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.463	0.148	0.4	Pass
		Middle	0.435	0.139	0.4	Pass
		High	0.443	0.142	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.719	0.275	0.4	Pass
		Middle	1.703	0.272	0.4	Pass
		High	1.695	0.271	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.958	0.316	0.4	Pass
		Middle	2.978	0.318	0.4	Pass
		High	2.958	0.316	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.445	0.142	0.4	Pass
		Middle	0.451	0.144	0.4	Pass
		High	0.437	0.140	0.4	Pass
		Note: 3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.735	0.278	0.4	Pass
		Middle	1.711	0.274	0.4	Pass
		High	1.703	0.272	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.978	0.318	0.4	Pass
		Middle	2.978	0.318	0.4	Pass
		High	2.968	0.317	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

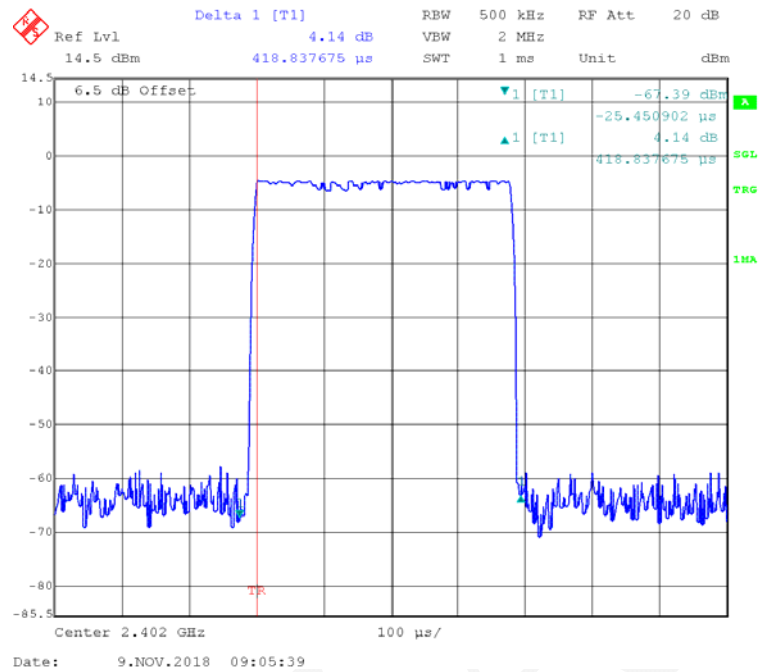


BDR (GFSK): Pulse time, Middle Channel, DH1

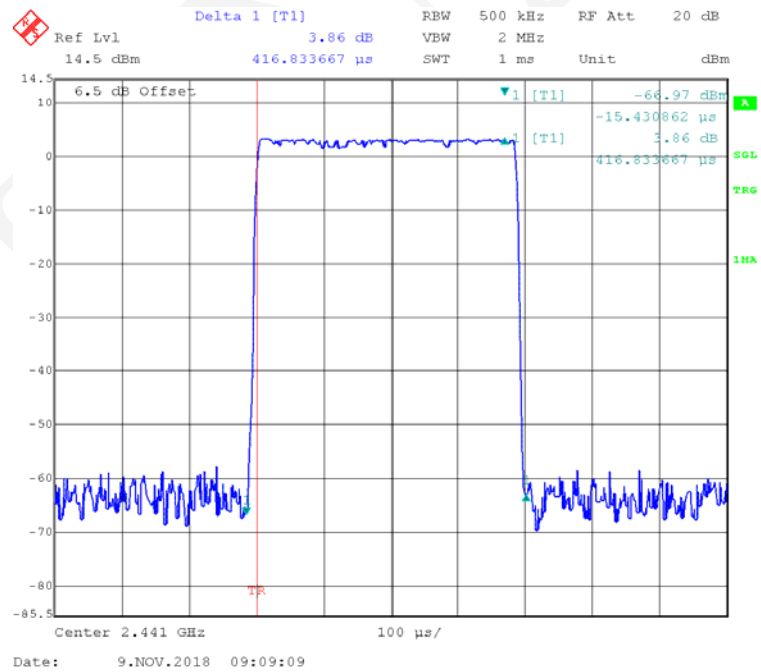


BDR (GFSK): Pulse time, High Channel, DH1

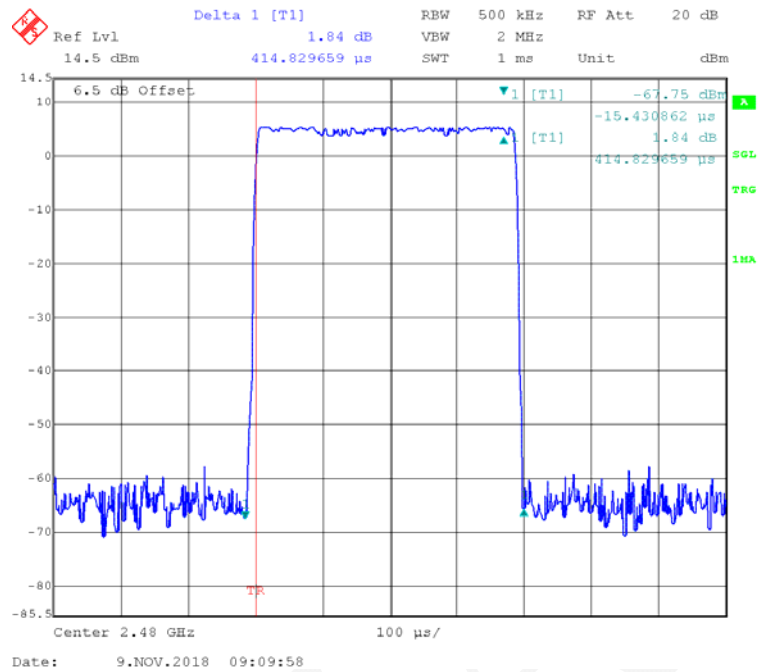


BDR (GFSK): Pulse time, Low Channel, DH3

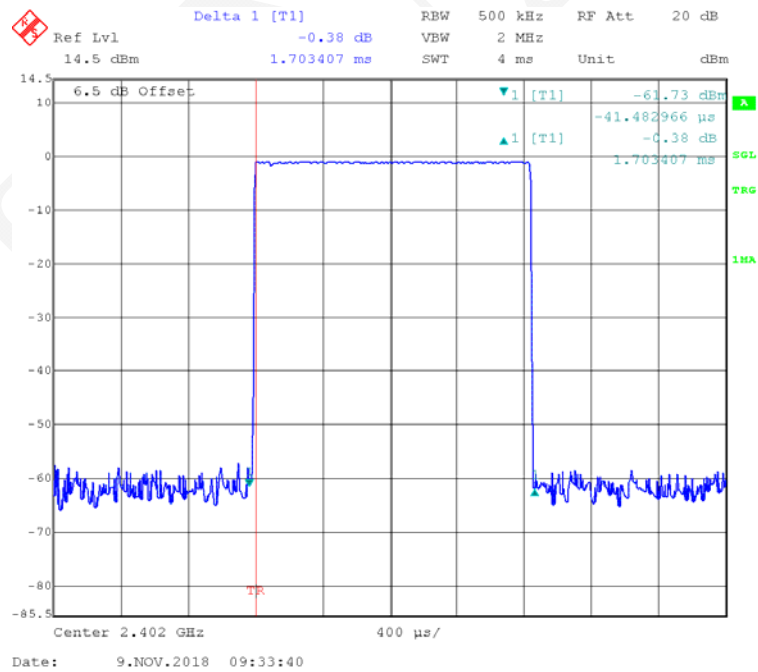


BDR (GFSK): Pulse time, Middle Channel, DH3

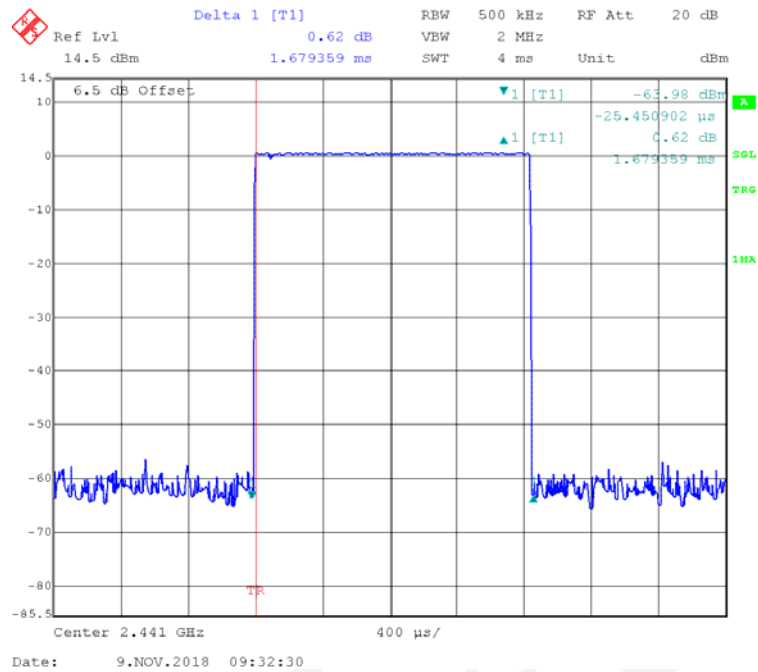


BDR (GFSK): Pulse time, High Channel, DH3

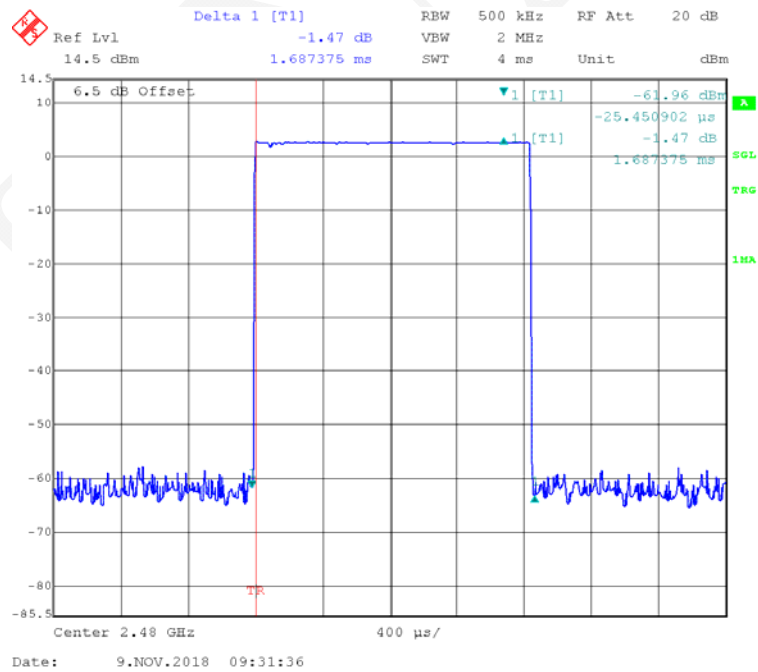


BDR (GFSK): Pulse time, Low Channel, DH5

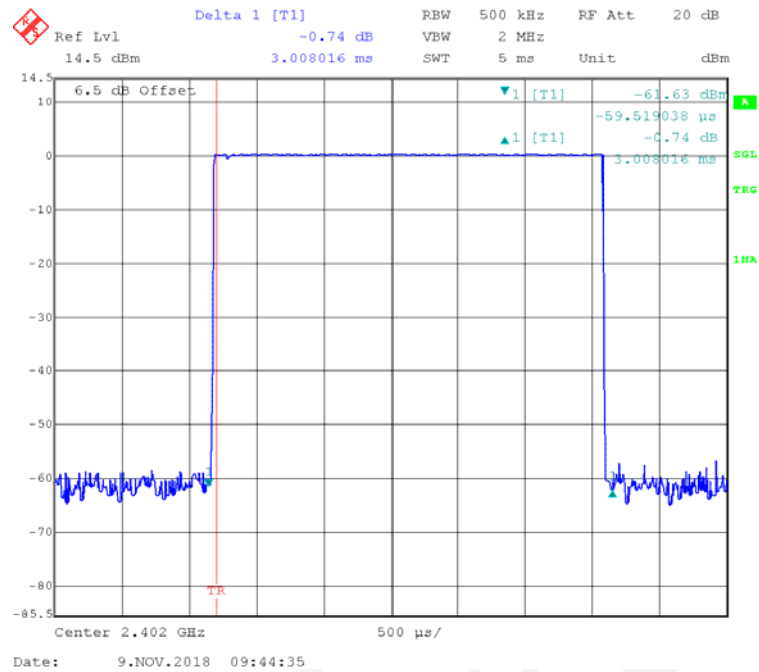


BDR (GFSK): Pulse time, Middle Channel, DH5

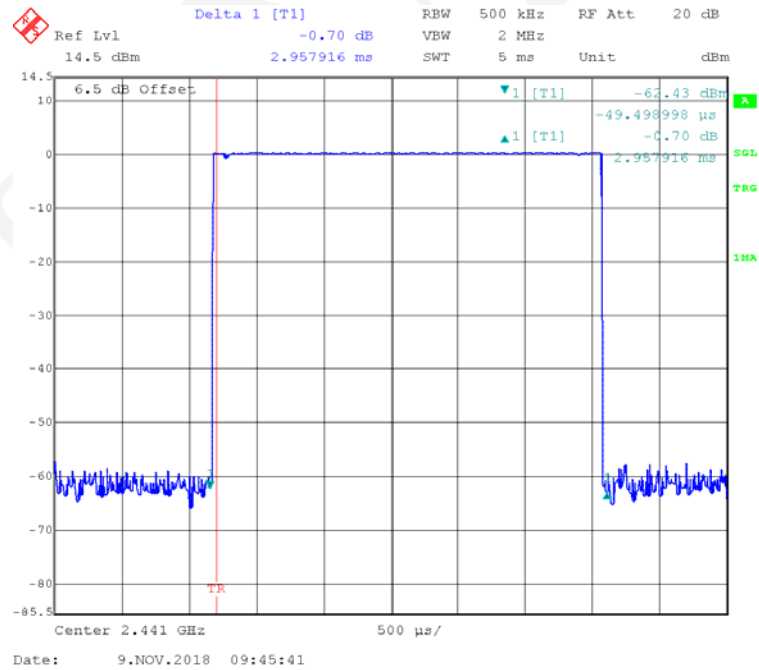

BDR (GFSK): Pulse time, High Channel, DH5

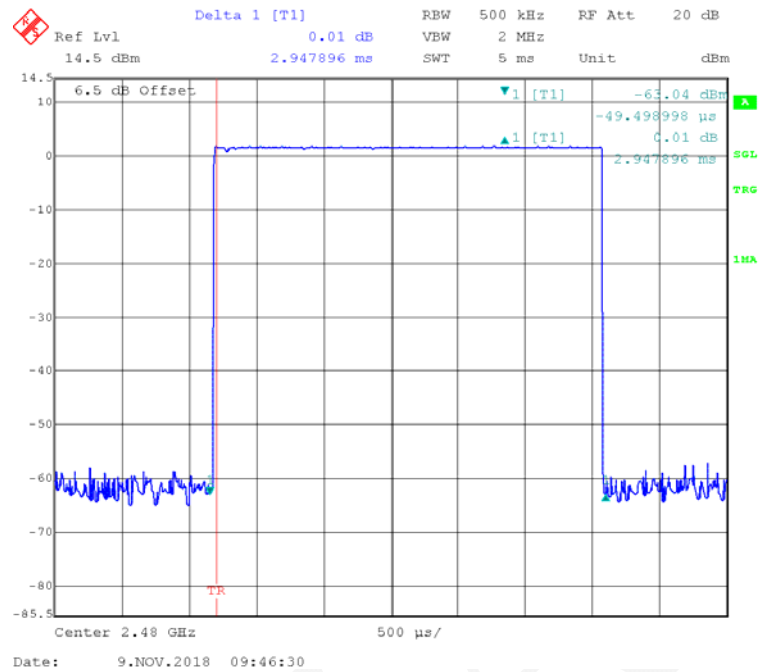

EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

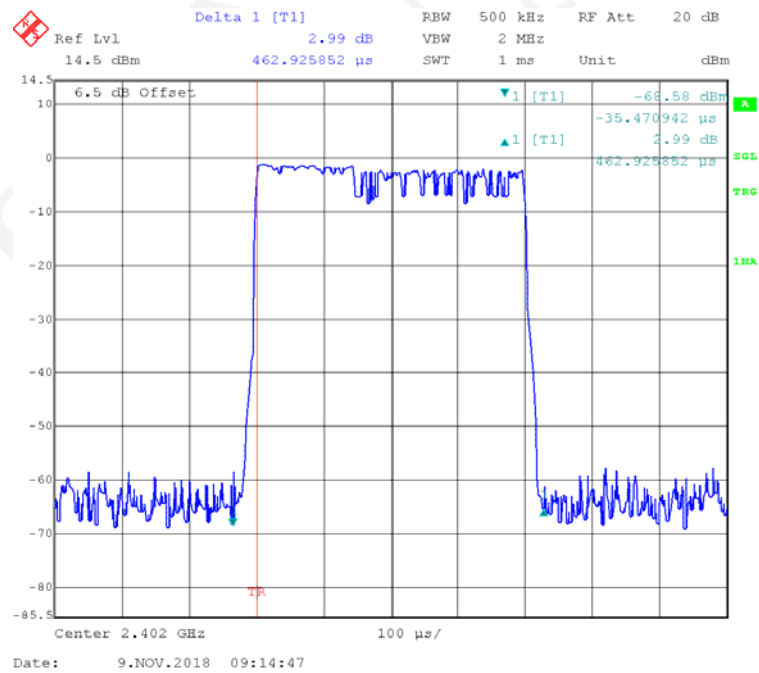

Delta 1 [T1] RBW 500 kHz RF Att 20 dB
 Ref Lvl -0.60 dB VBW 2 MHz
 14.5 dBm 434.869739 μs SWT 1 ms Unit dBm

6.5 dB Offset

▼1 [T1] -66.90 dBm
 ▲1 [T1] -13.426854 μs
 -0.60 dB
 434.869739 μs

Center 2.441 GHz 100 μs/



Date: 9.NOV.2018 09:13:34



Delta 1 [T1] RBW 500 kHz RF Att 20 dB
 Ref Lvl -3.83 dB VBW 2 MHz
 14.5 dBm 442.885772 μs SWT 1 ms Unit dBm



6.5 dB Offset
 1 [T1] -66.64 dBm
 1 [T1] -19.438878 μs
 -3.83 dB
 442.885772 μs



Center 2.48 GHz 100 μs/

Date: 9.NOV.2018 09:12:32

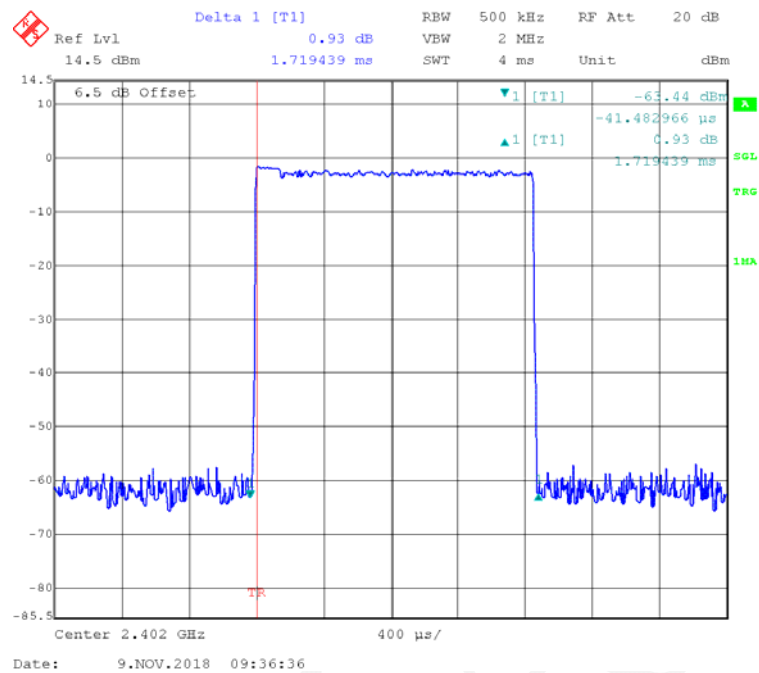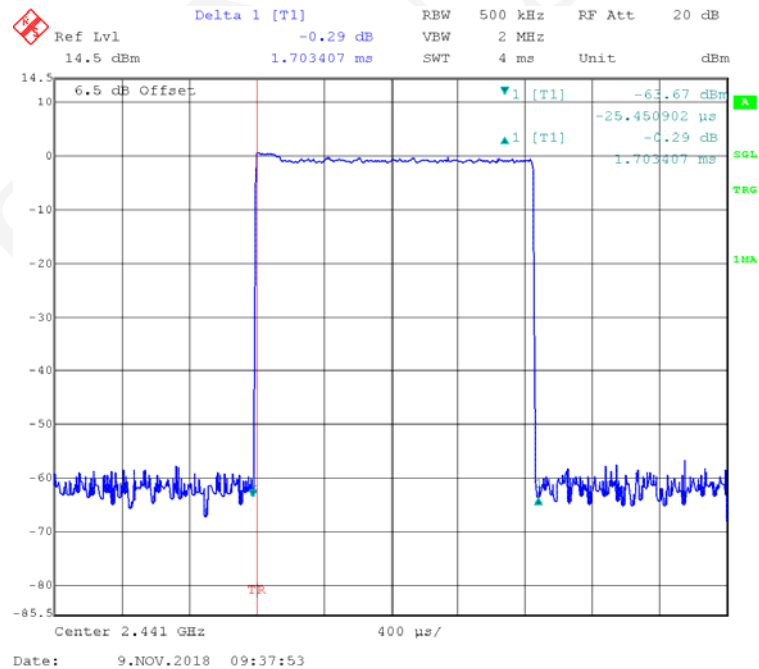
EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3**EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3**

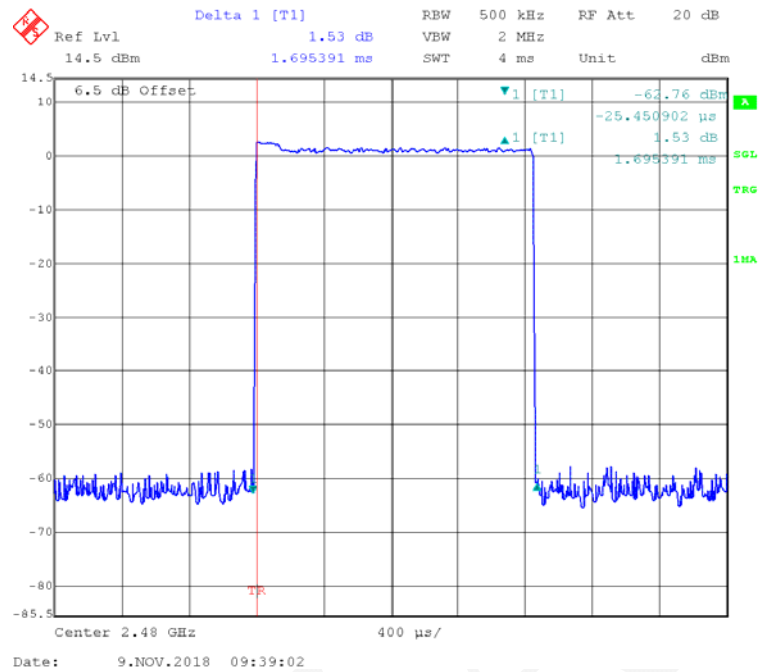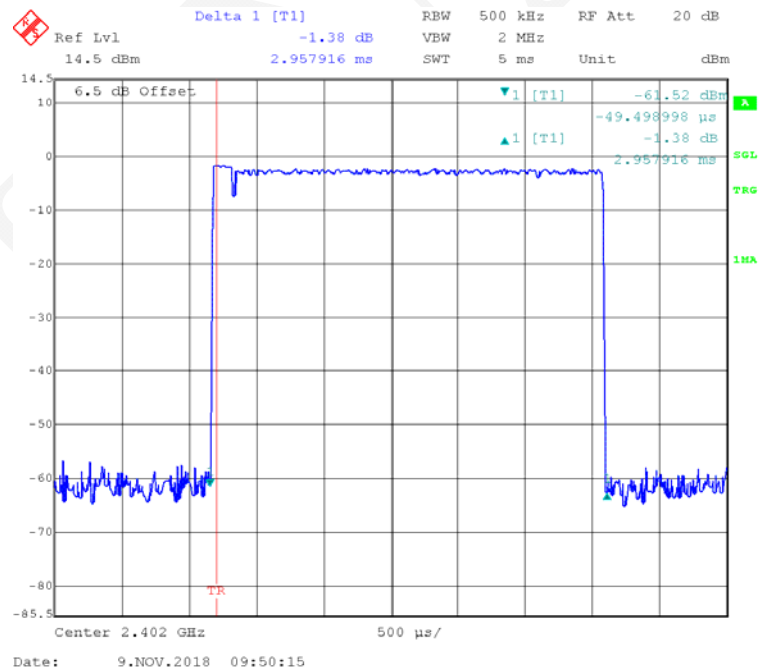EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3**EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5**

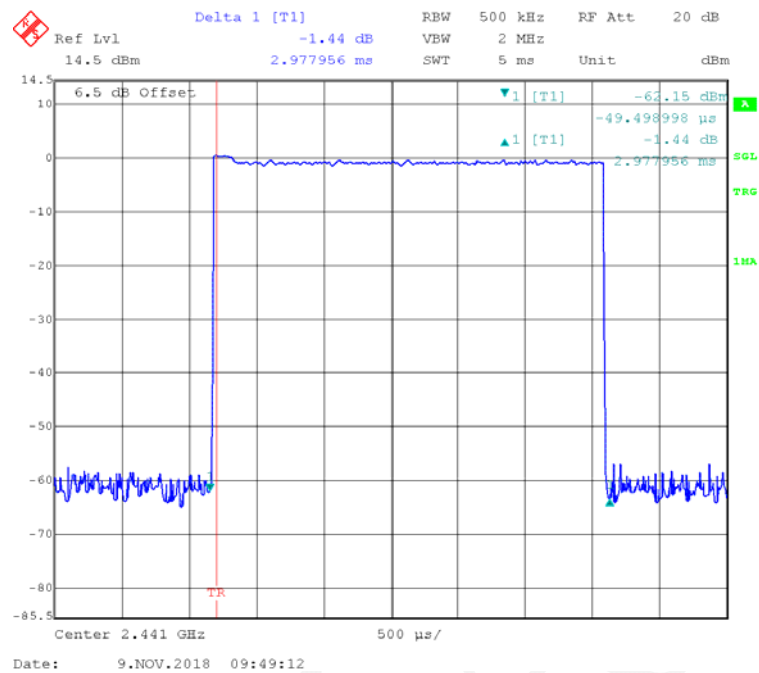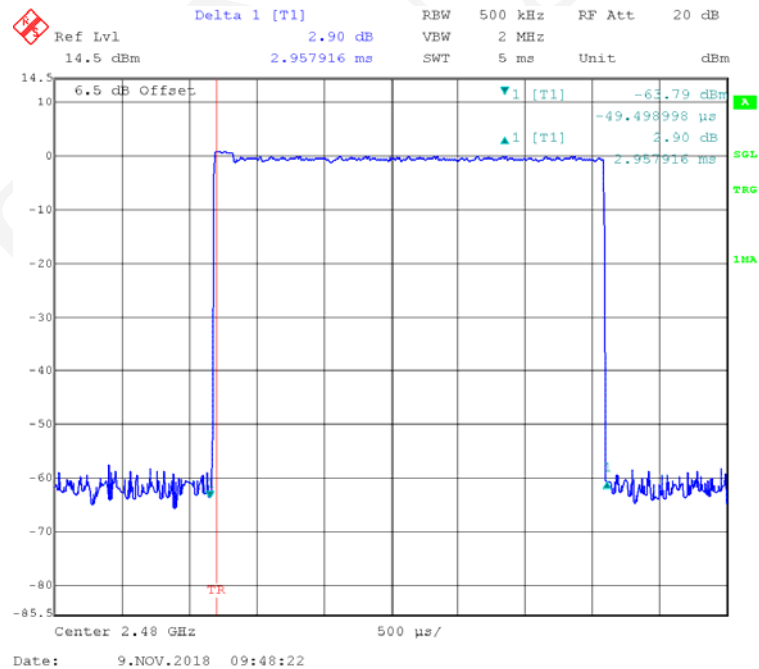
EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5**EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5**

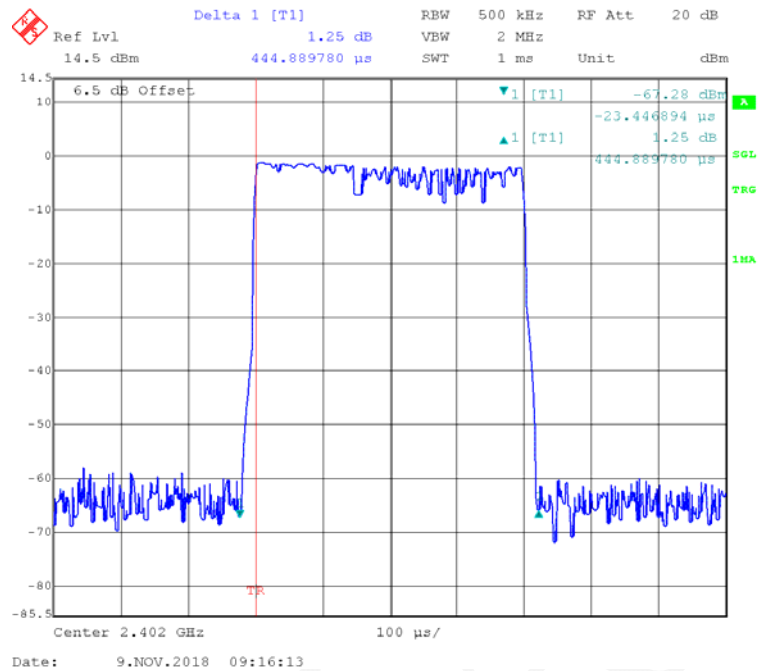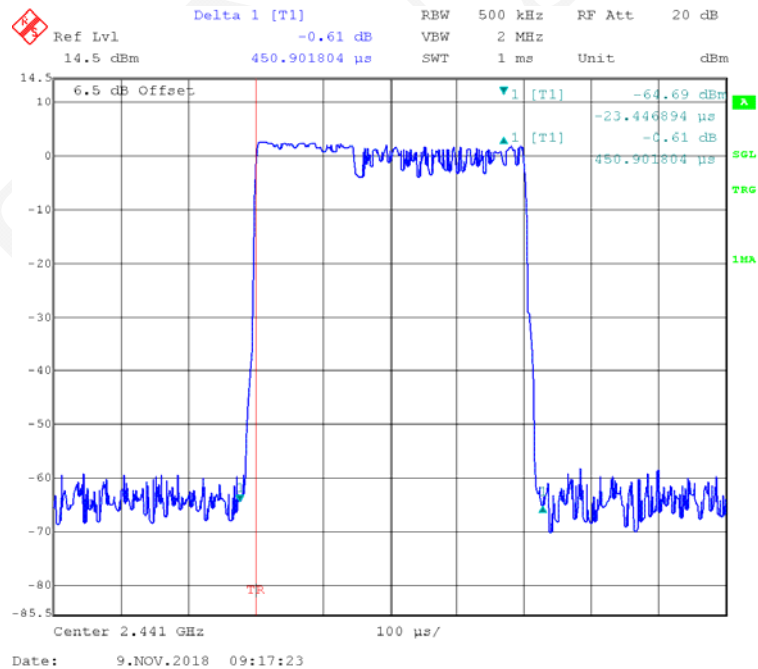EDR (8DPSK): Pulse time, Low Channel, 3DH1**EDR (8DPSK): Pulse time, Middle Channel, 3DH1**


EDR (8DPSK): Pulse time, High Channel, 3DH1

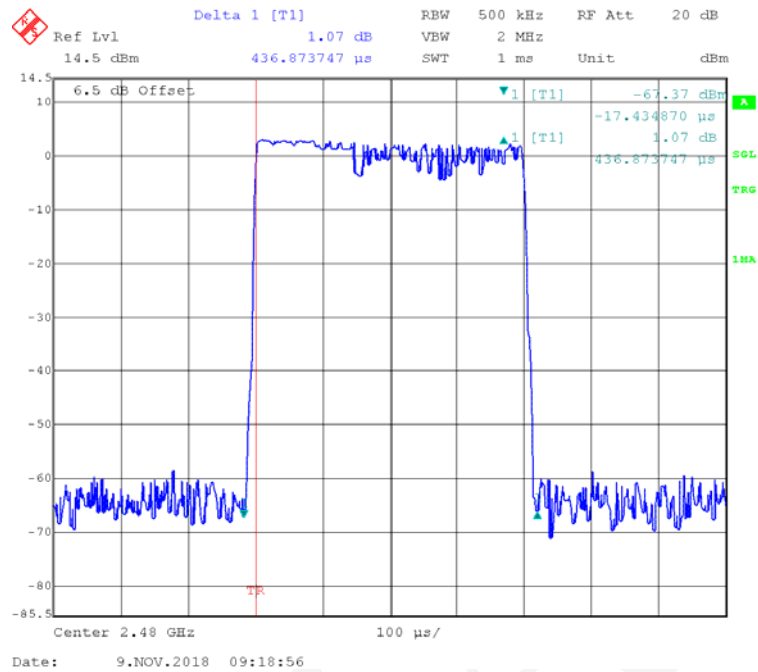


EDR (8DPSK): Pulse time, Low Channel, 3DH3

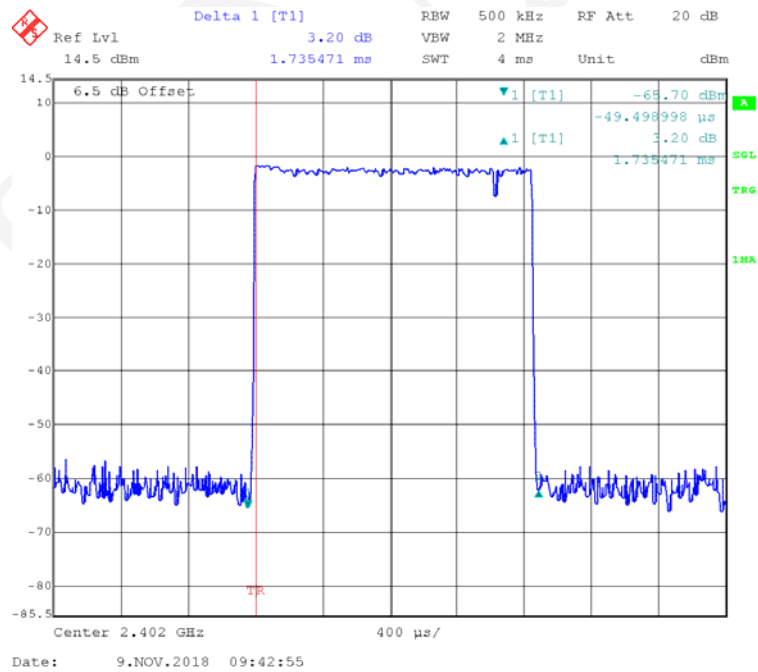


EDR (8DPSK): Pulse time, Middle Channel, 3DH3

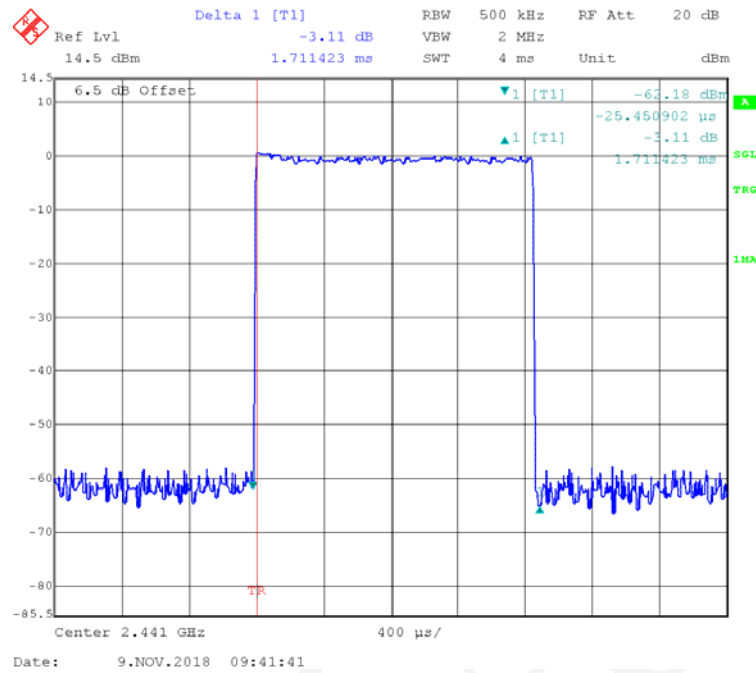


EDR (8DPSK): Pulse time, High Channel, 3DH3

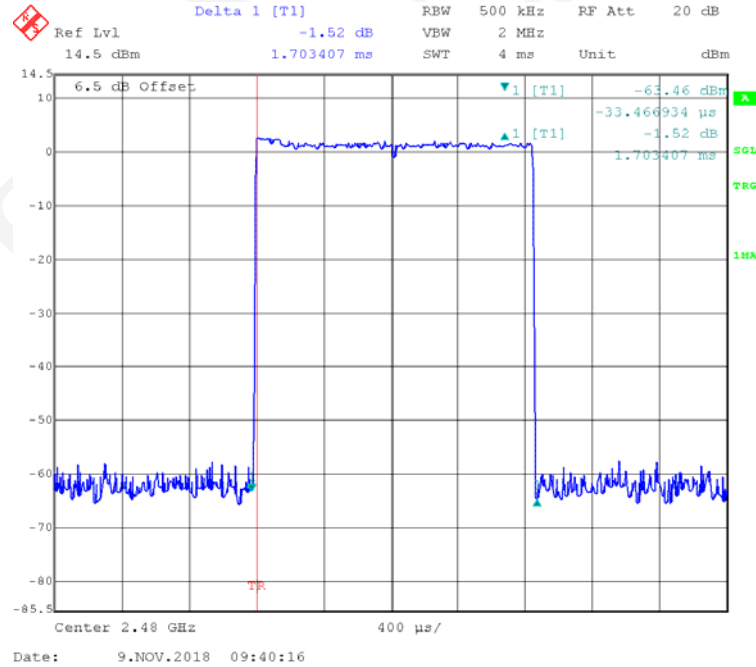


EDR (8DPSK): Pulse time, Low Channel, 3DH5

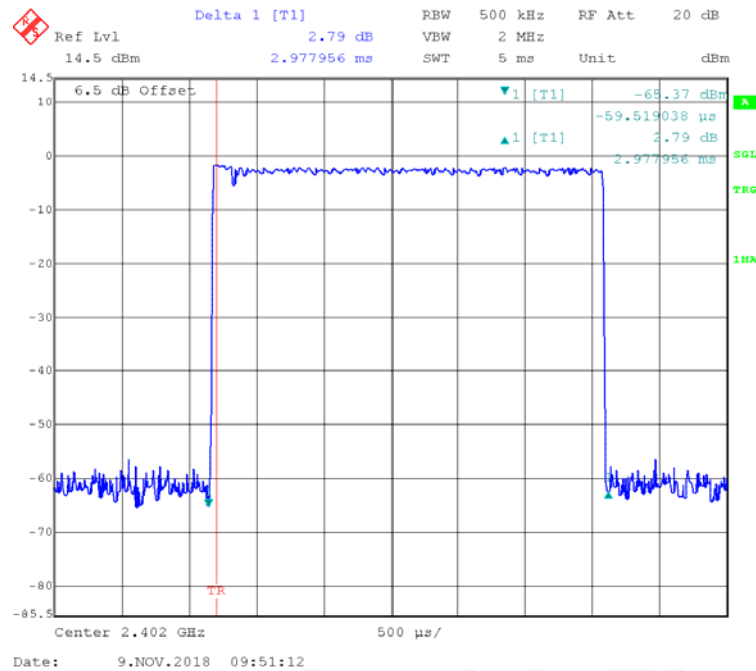

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

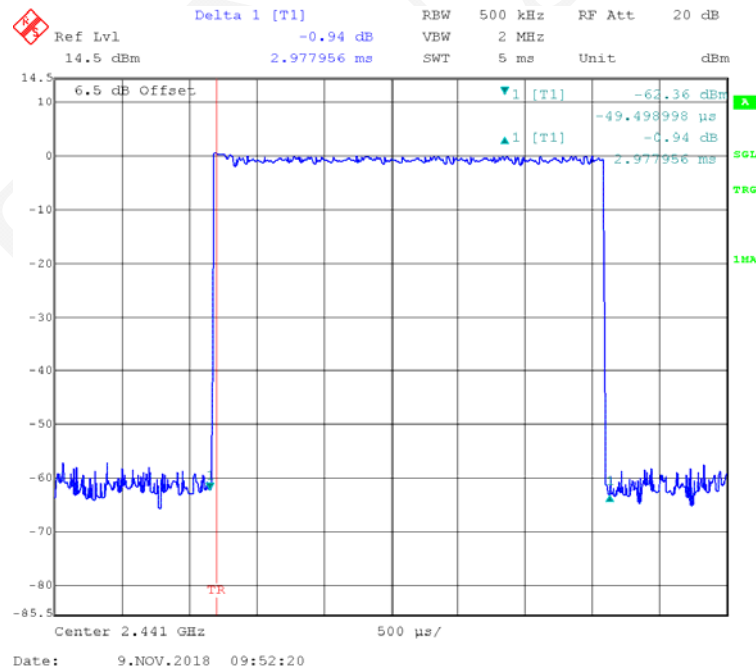

EDR (8DPSK): Pulse time, High Channel, 3DH5

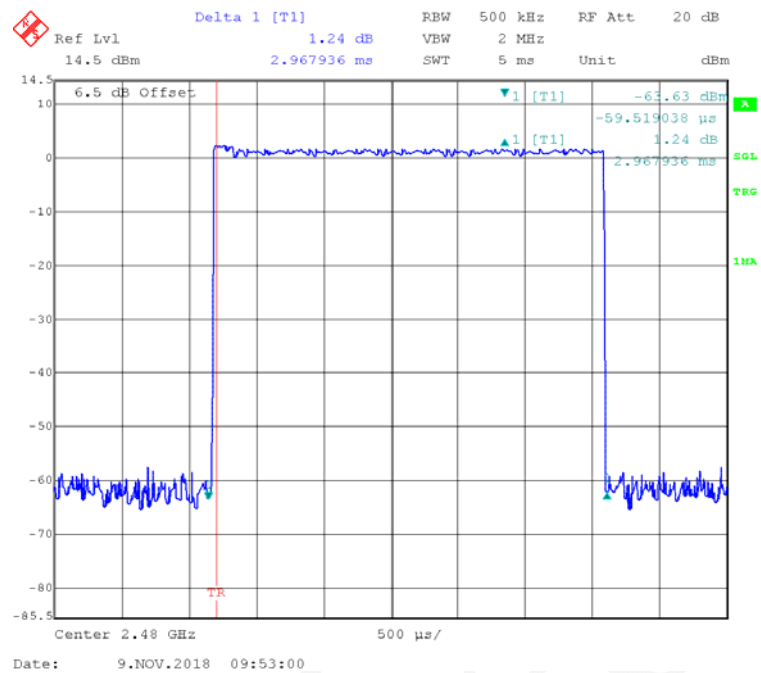

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data

Environmental Conditions


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-10-19.


EUT operation mode: Transmitting

Test Result: Compliance.


Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	6.57	4.54	125
	2441	5.89	3.88	125
	2480	5.08	3.22	125
EDR ($\pi/4$-DQPSK)	2402	5.68	3.70	125
	2441	5.12	3.25	125
	2480	4.25	2.66	125
EDR (8DPSK)	2402	6.18	4.15	125
	2441	5.77	3.78	125
	2480	5.00	3.16	125

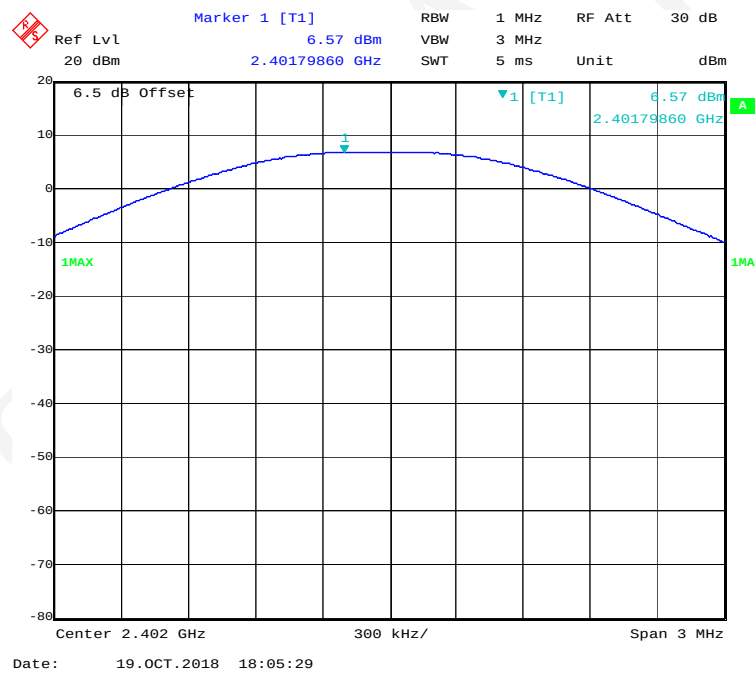BDR (GFSK): 2402MHz


BDR (GFSK): 2441MHz

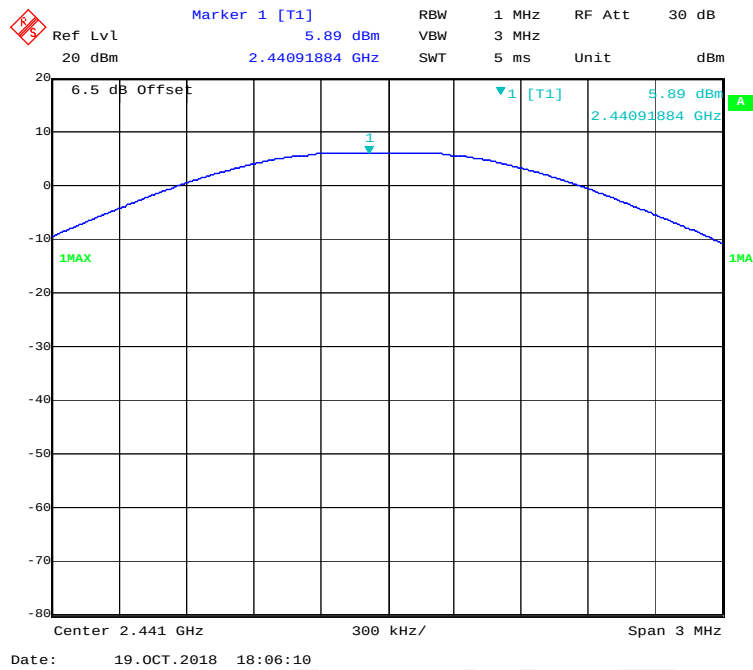


BDR (GFSK): 2480MHz

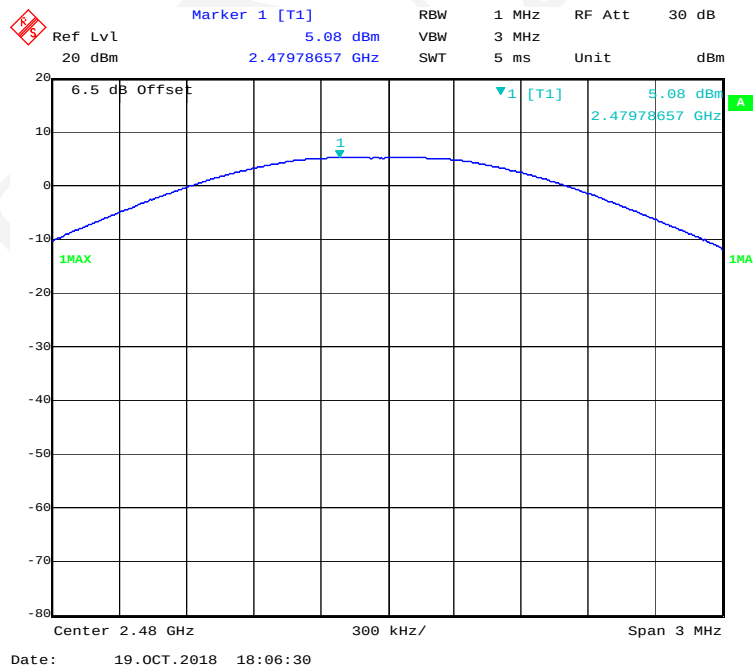


EDR($\pi/4$ -DQPSK): 2402MHz

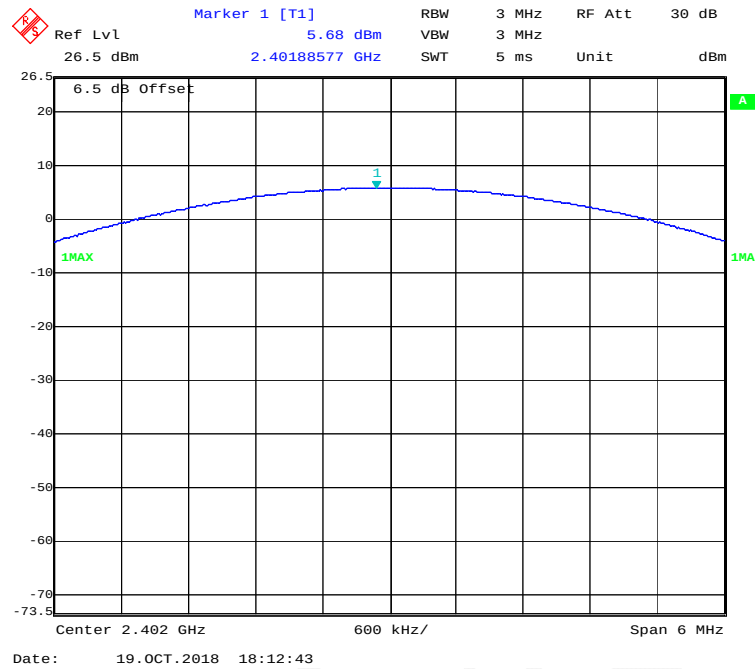


EDR($\pi/4$ -DQPSK): 2441MHz

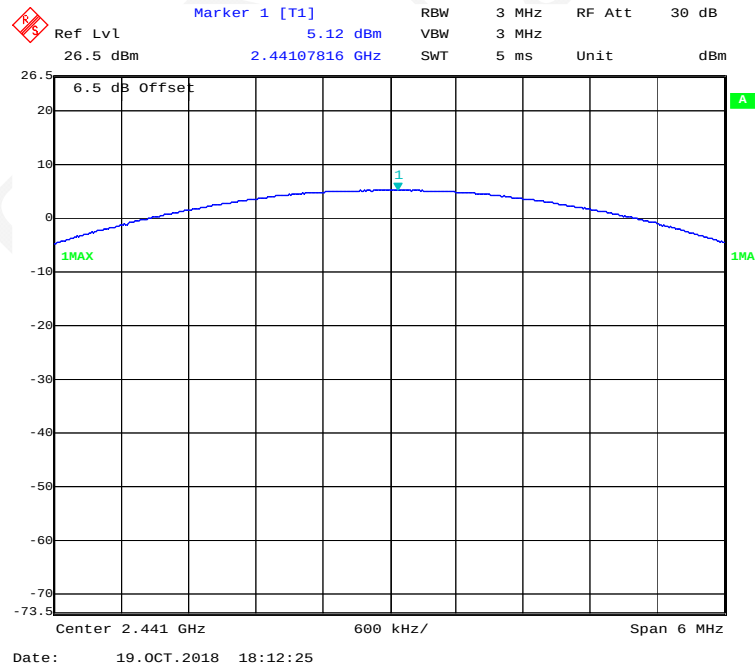


EDR($\pi/4$ -DQPSK): 2480MHz

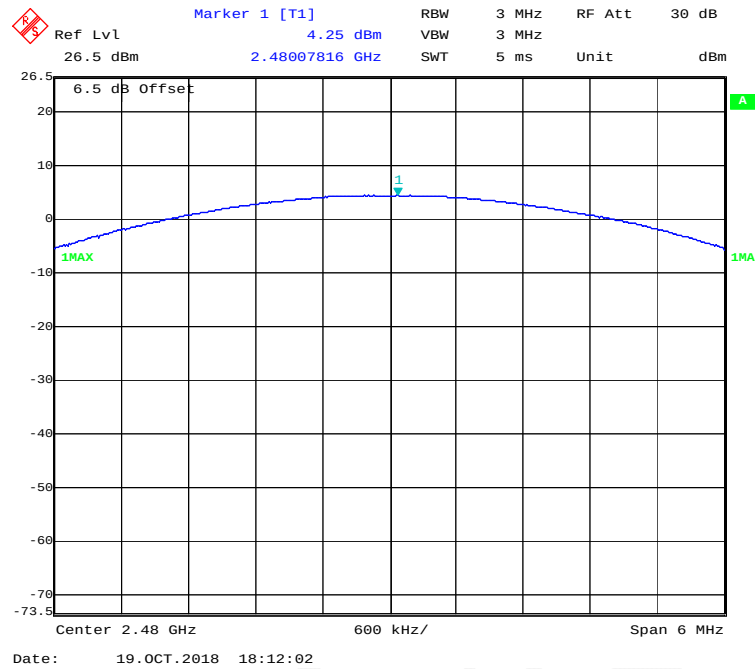


EDR(8DPSK): 2402MHz

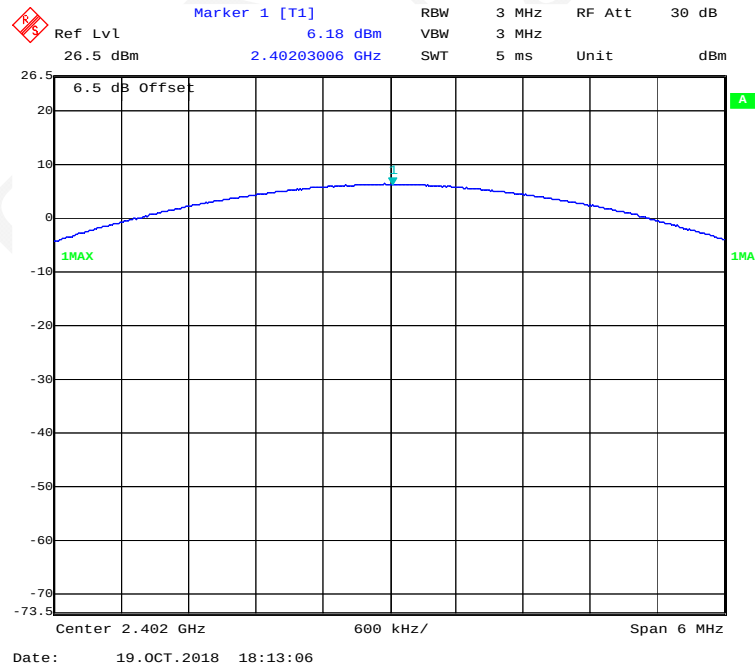

EDR(8DPSK): 2441MHz

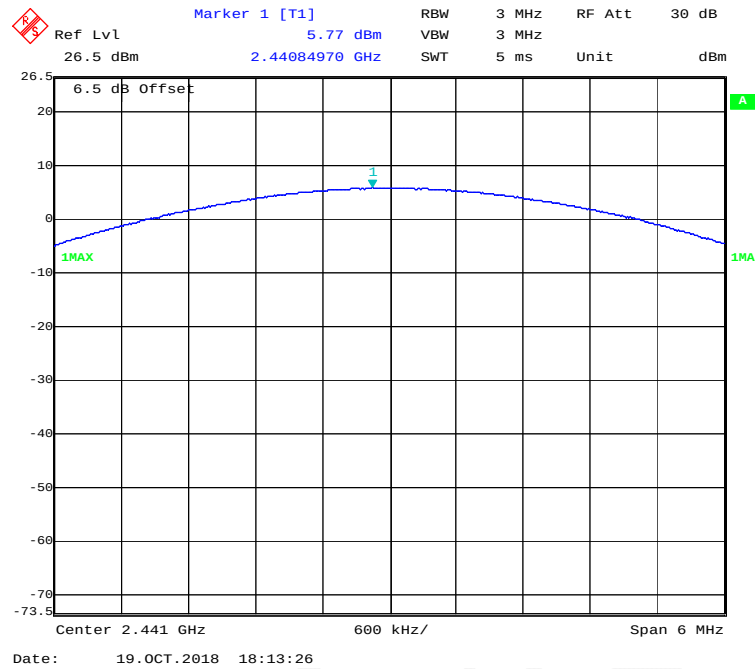

EDR(8DPSK): 2480MHz

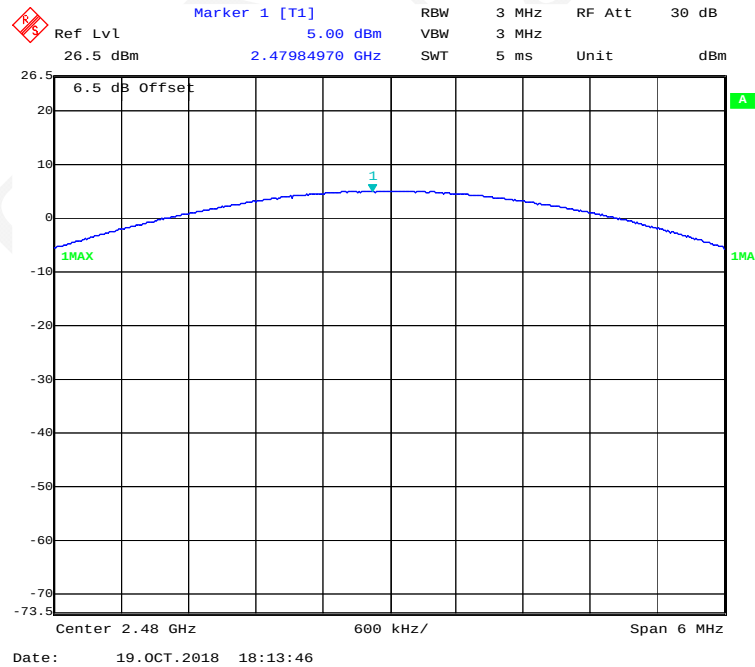

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Hope Zhang on 2018-10-19.

EUT operation mode: Transmitting & Hopping


Test Result: Compliance.

Band Edge


BDR (GFSK): Left Side

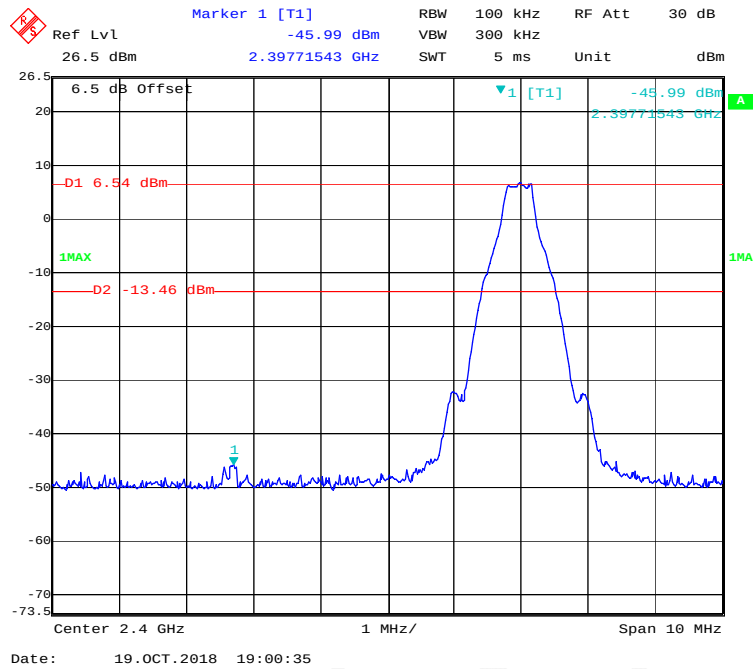


BDR (GFSK): Right Side

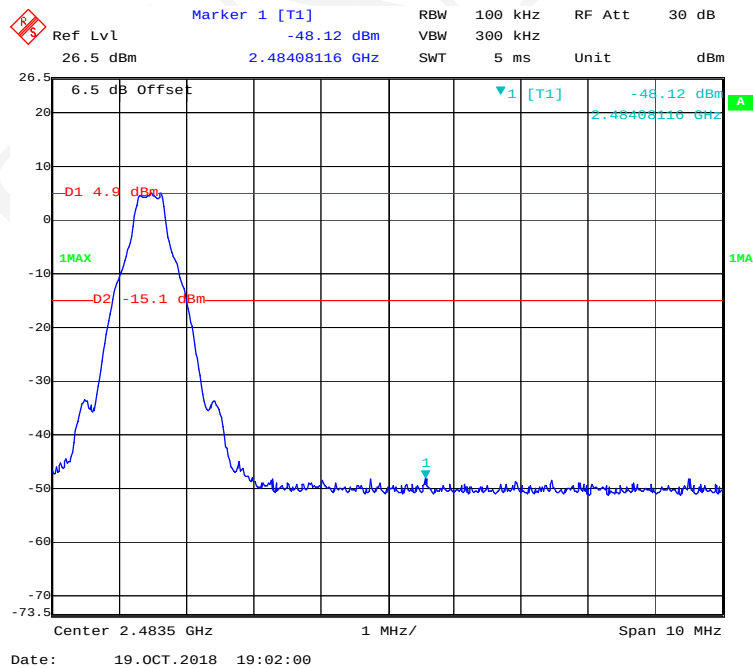


EDR ($\pi/4$ -DQPSK): Left Side

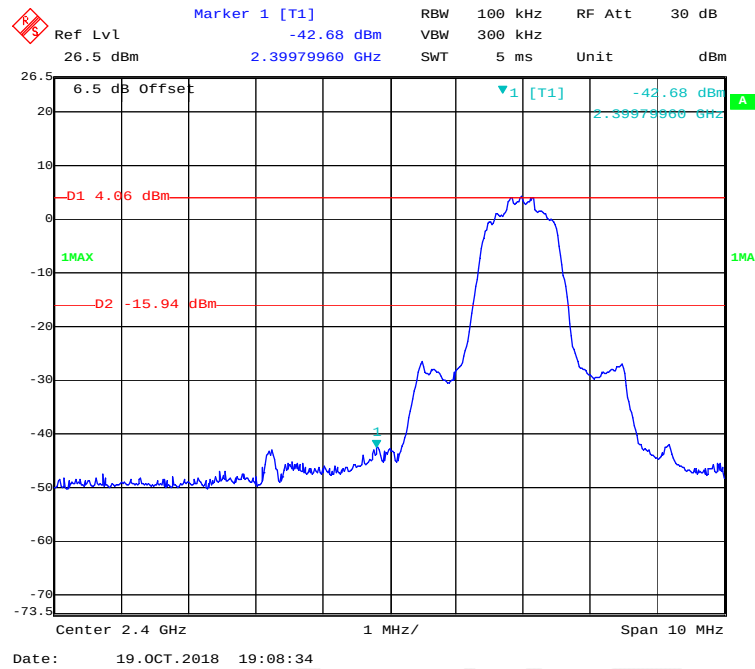


EDR ($\pi/4$ -DQPSK): Right Side


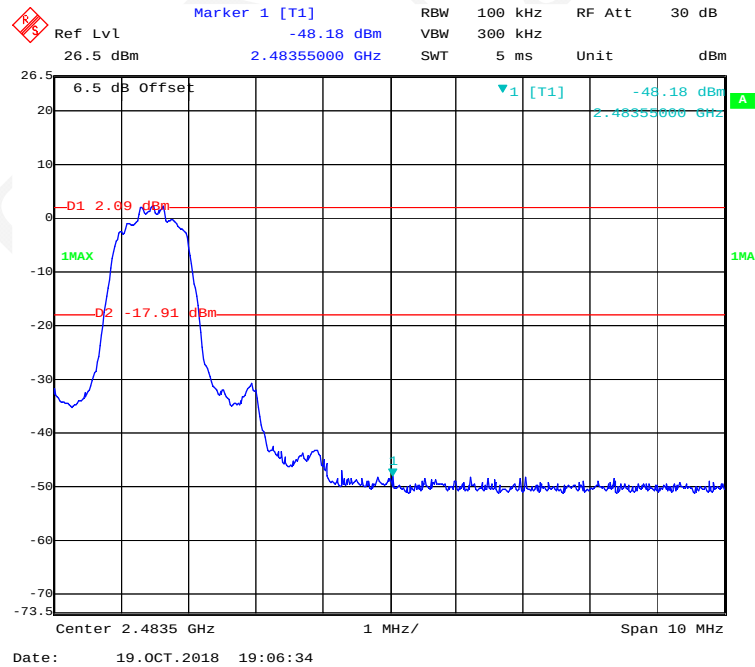


EDR (8DPSK): Left Side

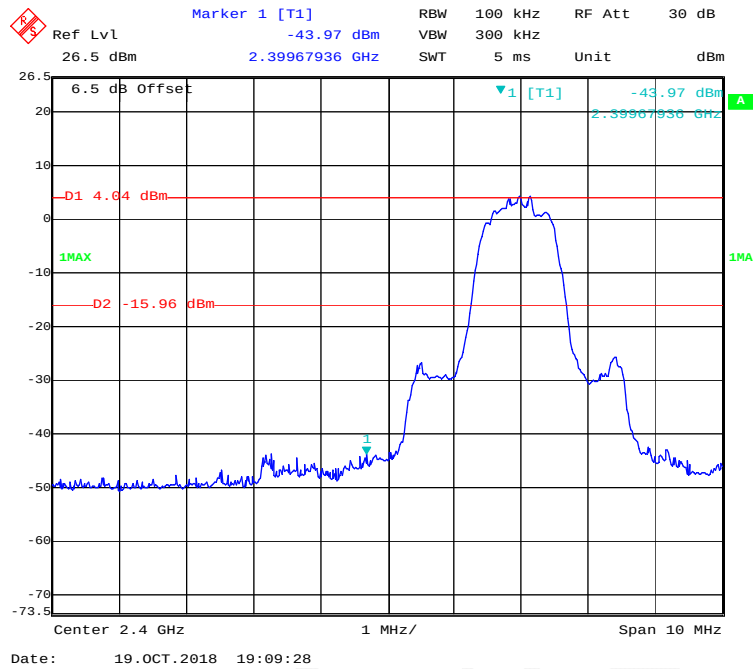

EDR (8DPSK): Right Side

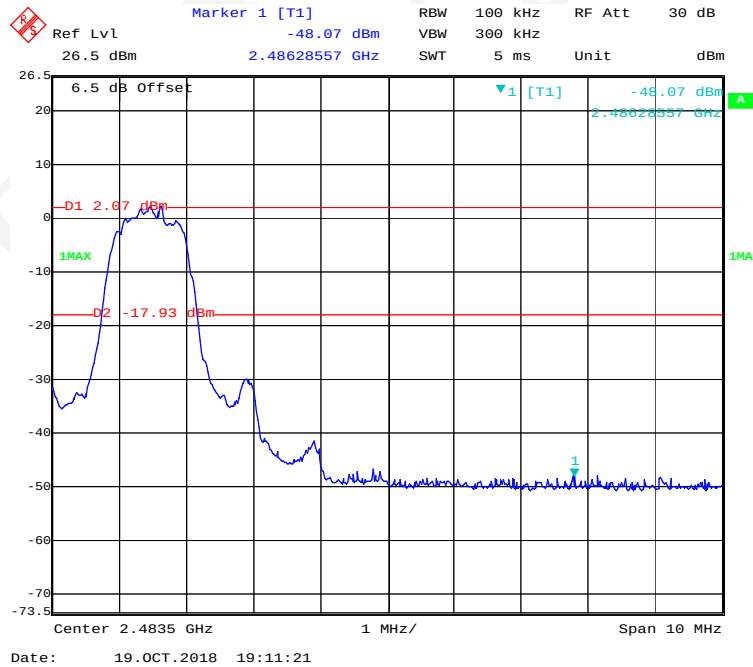


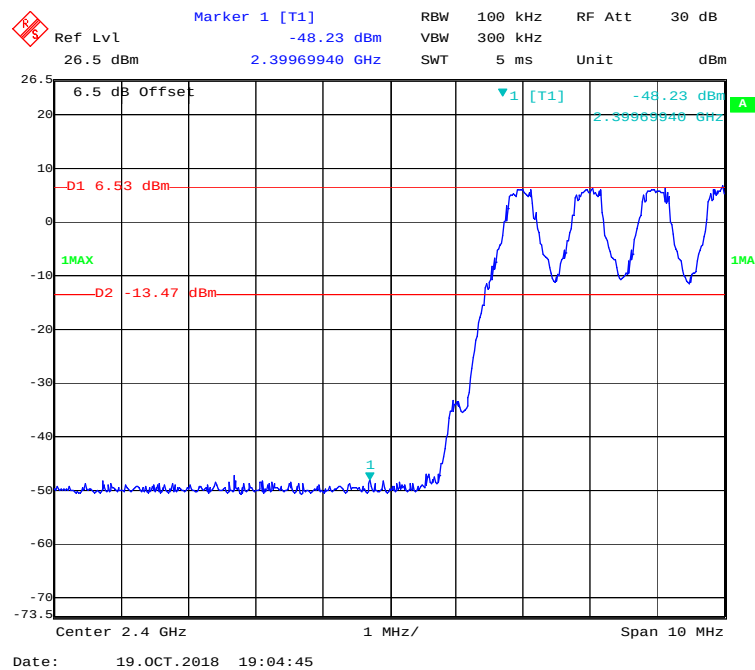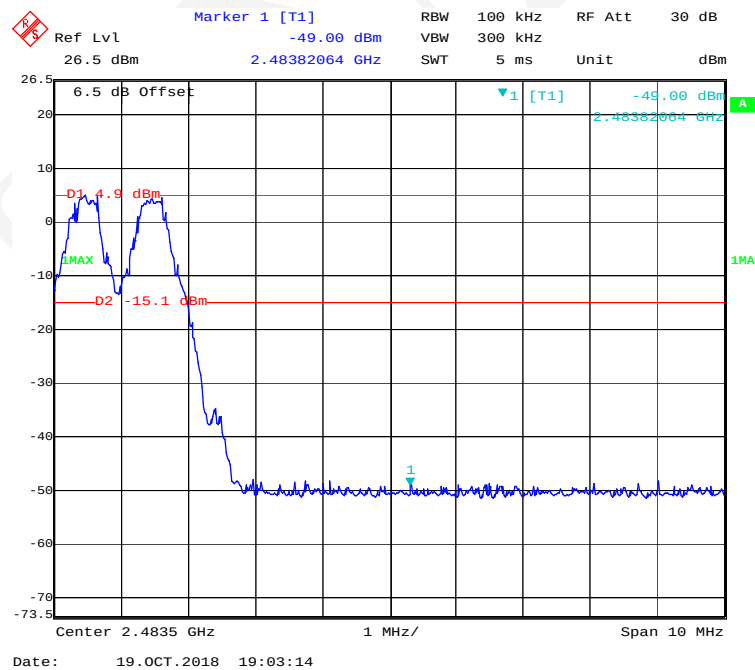BDR (GFSK): Left Side - Hopping**BDR (GFSK): Right Side- Hopping**


REF Lvl 26.5 dBm
 RBW 100 kHz
 RF Att 30 dB
 Unit dBm
 Marker 1 [T1]
 -45.17 dBm
 2.39985972 GHz
 6.5 dB Offset
 -D1 3.68 dBm
 1MAX
 -D2 -16.32 dBm
 -1 [T1]
 -45.17 dBm
 2.39985972 GHz
 Center 2.4 GHz
 1 MHz/
 Span 10 MHz
 Date: 19.OCT.2018 19:17:46

[illegible]

EDR (8DPSK): Left Side- Hopping

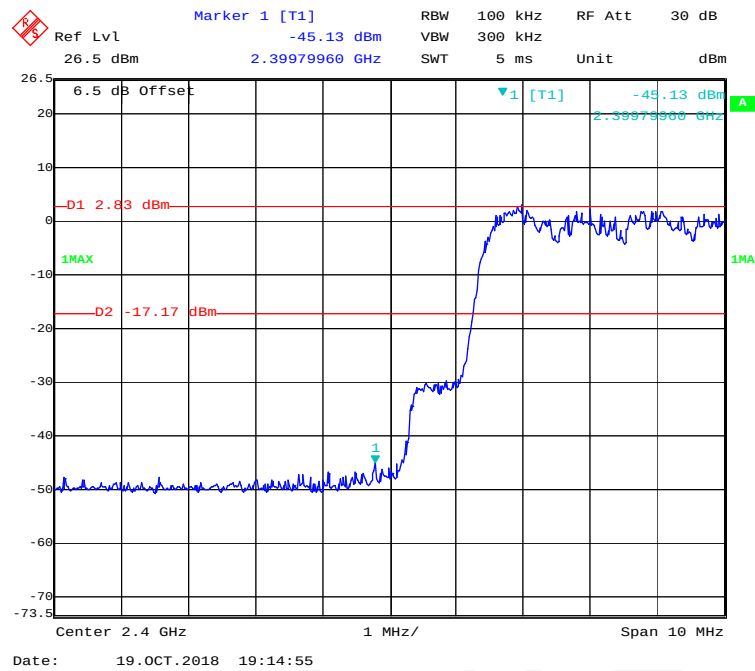

EDR (8DPSK): Right Side- Hopping

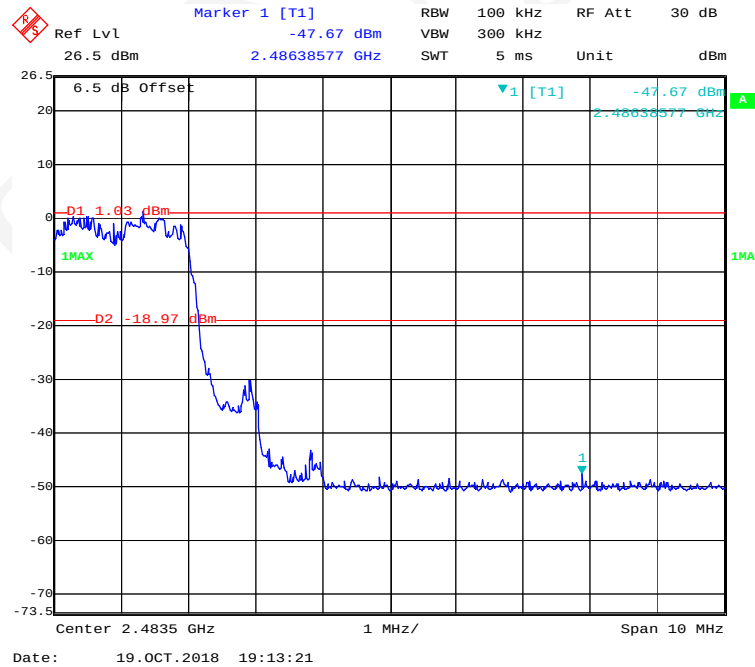

***** END OF REPORT *****