

**MEASUREMENT REPORT****FCC PART 15.247 / ISED RSS-247 Bluetooth (HDR)****Applicant Name:**

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

11/28/2023 - 2/22/2024

Test Report Issue Date:

4/2/2024

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2311270068-16.BCG

FCC ID:

BCGA2837

IC:

579C-A2837

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2837, A3006

EUT Type:

Tablet Device

Max. RF Output Power:

39.355 mW (15.95 dBm) Peak Conducted

Frequency Range:

2404 – 2476MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:


RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President

Prepared by: WKR0000010596

Reviewed by: WKR0000005805



FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 1 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Materials Technology Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	5
2.4	Test Support Equipment	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions	9
3.4	Environmental Conditions	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA	12
7.0	TEST RESULTS	13
7.1	Summary	13
7.2	Bandwidth Measurement – Bluetooth (HDR)	14
7.3	Output Power Measurement – Bluetooth (HDR)	24
7.4	Power Spectral Density – Bluetooth (HDR)	28
7.5	Conducted Authorized Band Edge	57
7.6	Conducted Spurious Emissions	62
7.7	Radiated Spurious Emissions – Above 1GHz	70
7.8	Radiated Spurious Emissions – Below 1GHz	95
7.9	AC Line-Conducted Emissions Measurement	99
8.0	CONCLUSION	103

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 2 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 3 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2837, IC: 579C-A2837**. The data found in this test report was taken with the EUT operating in Bluetooth HDR mode. While in HDR mode, the Bluetooth transmitter hops pseudo-randomly between 73 channels.

Test Device Serial No.: FLYQYPVW7Q, N4LP6X9FG4, DWC2PQLW19, DLXH1C000140000662

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8), 802.15.4

This device supports BT Beamforming

Ch.	Frequency (MHz)
01	2404
:	:
38	2441
:	:
73	2476

Table 2-1. Bluetooth HDR Frequency / Channel Operations

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 73 different channels in the 2400 – 2483.5MHz band.

Measured Duty Cycles				
HDRMode		Duty Cycle [%]		
		Antenna 4a	Antenna 2a	TxBF
4M	ePA	100	100	100
	iPA	100	100	100
8M	ePA	100	100	100
	iPA	100	100	100

Table 2-2. Measured Duty Cycles

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 4 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII	LTE/FR1 NR	
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8	MB/HB	UHB
2a	Config 1	X	✓	X	✓	X	X	X	X
2a	Config 2	X	✓	X	X	✓	X	X	X
2a	Config 3	✓	X	X	X	X	✓	X	X
2a	Config 4	X	X	✓	✓	X	X	X	X
2a	Config 5	X	X	✓	X	✓	X	X	X
4a	Config 1	X	✓	X	✓	X	X	X	X
4a	Config 2	X	✓	X	X	✓	X	X	X
4a	Config 3	✓	X	X	X	X	✓	X	X
4a	Config 4	X	X	✓	✓	X	X	X	X
4a	Config 5	X	X	✓	X	✓	X	X	X

Table 2-3. Simultaneous Transmission Configurations

✓ = Support; ✕ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 1 and reported in UNII OFDM and Bluetooth Reports.

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

2.3 Antenna Description

The following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna 4a	Antenna 2a
2.4	3.6	1.9

Table 2-4. Highest Antenna Gain

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 5 of 103

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-5. Test Support Equipment List

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 6 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and the worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 7 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 8 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 73%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 9 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 10 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 11 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 12 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2837
 IC: 579C-A2837
 FCC Classification: Digital Transmission System (DTS)
 Number of Channels: 73

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(3)	RSS-247 [5.4(d)]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.7.1, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	AC LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Bluetooth HDR Automation,” Version 2.0
5. For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.0.0.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 13 of 103

V 10.6 09/14/2023

7.2 Bandwidth Measurement – Bluetooth (HDR)

§2.1049; §15.247(a.2); RSS-247 [5.2]; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

RSS-Gen [6.7]

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 14 of 103

V 10.6 09/14/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 15 of 103

Antenna 4a


Frequency [MHz]	Mode	Power Scheme	Channel	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2404	HDR4	ePA	1	2.34	2.12	0.50	Pass
2441	HDR4	ePA	38	2.35	2.12	0.50	Pass
2476	HDR4	ePA	73	2.35	2.12	0.50	Pass
2404	HDR8	ePA	1	4.86	4.19	0.50	Pass
2441	HDR8	ePA	38	4.86	4.19	0.50	Pass
2476	HDR8	ePA	73	4.86	4.19	0.50	Pass

Table 7-2. 6dB BW & 99% OBW Measurements Antenna 4a


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 16 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

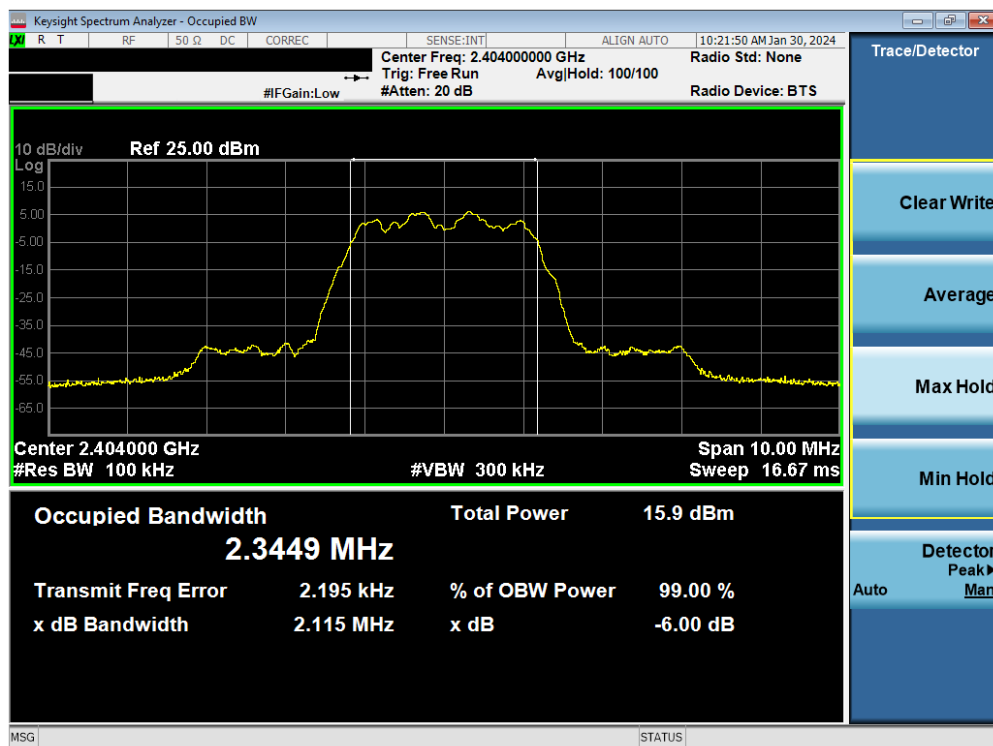

Plot 7-1. 6dB BW & 99% OBW Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

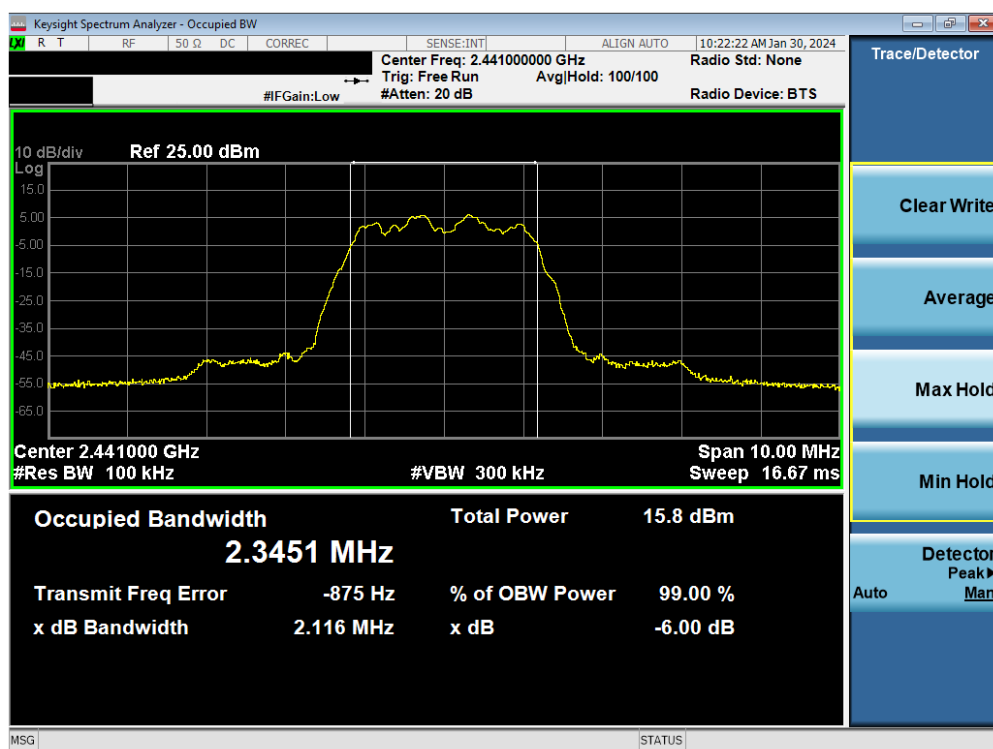


Plot 7-2. 6dB BW & 99% OBW Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 17 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

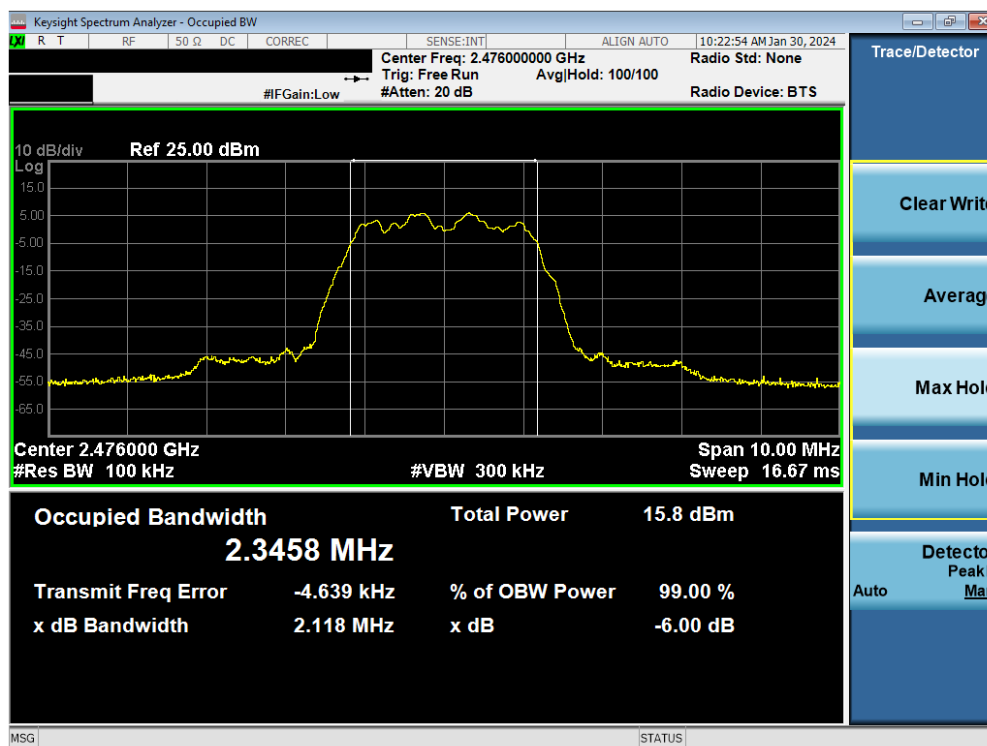

Plot 7-3. 6dB BW & 99% OBW Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

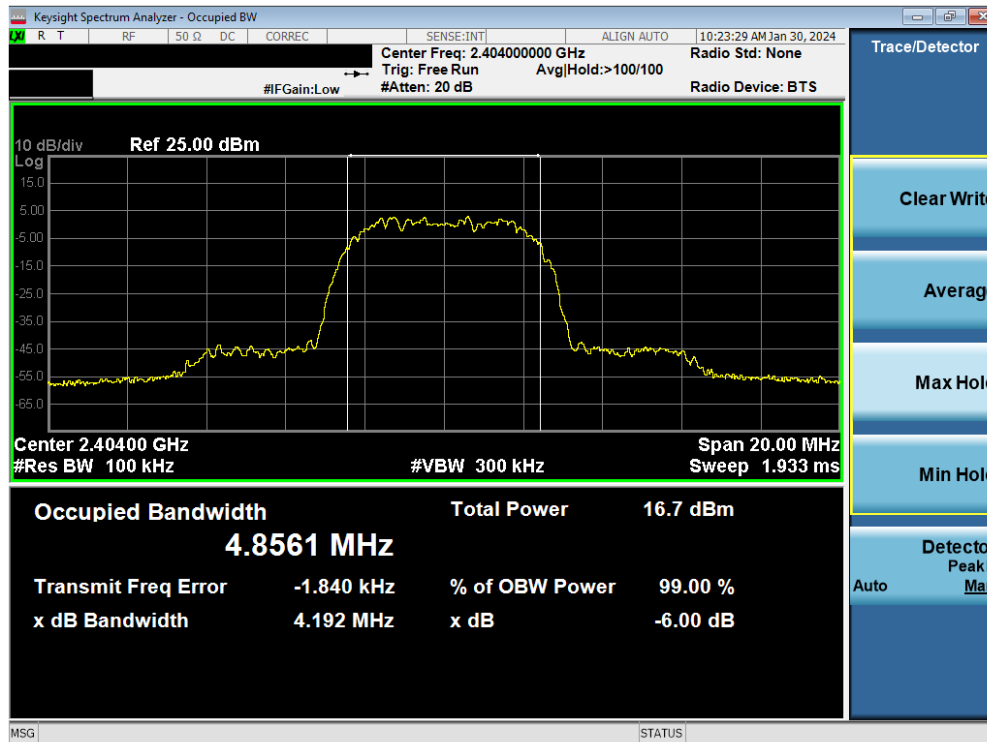


Plot 7-4. 6dB BW & 99% OBW Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 18 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

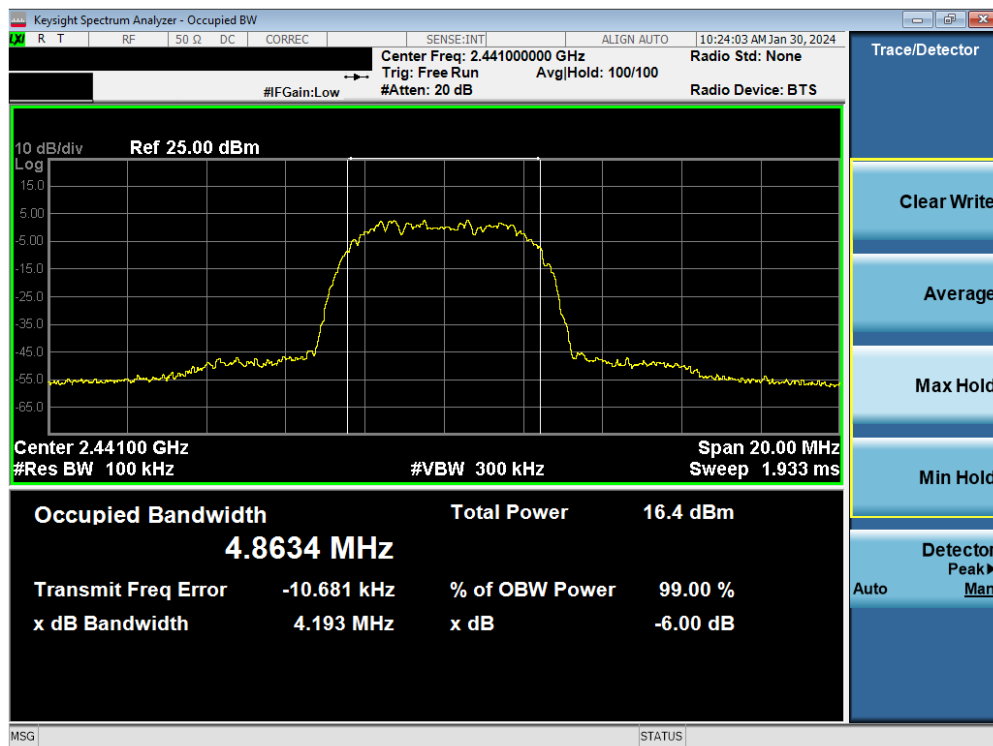

Plot 7-5. 6dB BW & 99% OBW Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

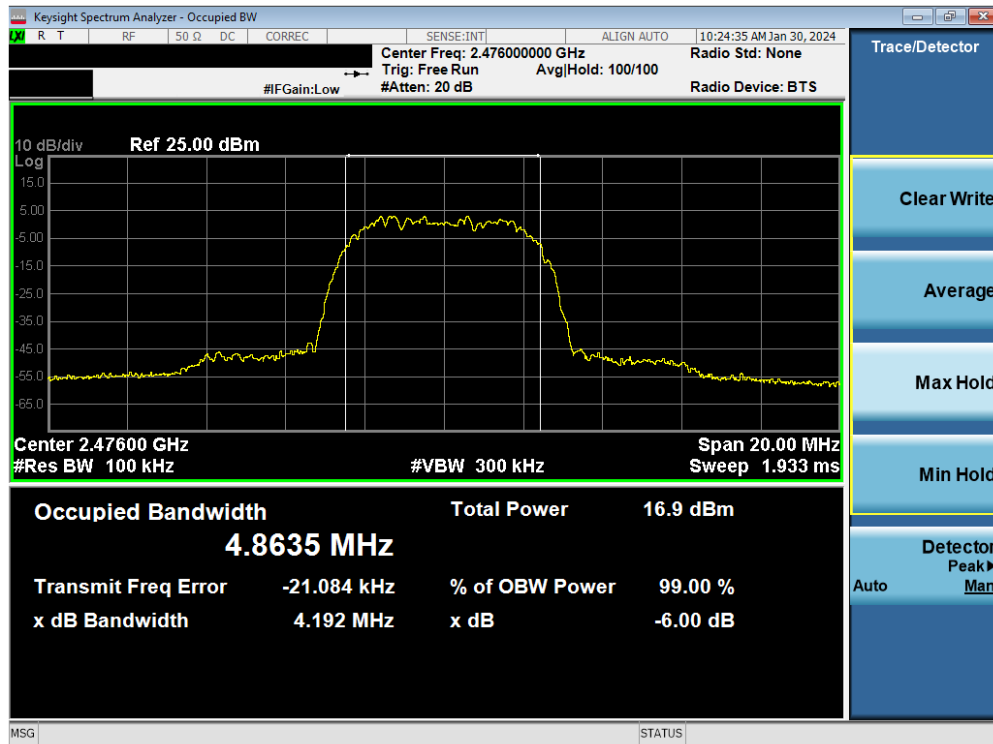

Plot 7-6. 6dB BW & 99% OBW Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 19 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna 2a


Frequency [MHz]	Mode	Power Scheme	Channel	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2404	HDR4	ePA	1	2.35	2.11	0.50	Pass
2441	HDR4	ePA	38	2.35	2.12	0.50	Pass
2476	HDR4	ePA	73	2.34	2.12	0.50	Pass
2404	HDR8	ePA	1	4.86	4.19	0.50	Pass
2441	HDR8	ePA	38	4.86	4.19	0.50	Pass
2476	HDR8	ePA	73	4.86	4.19	0.50	Pass

Table 7-3. 6dB BW & 99% OBW Measurements Antenna 2a


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 20 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

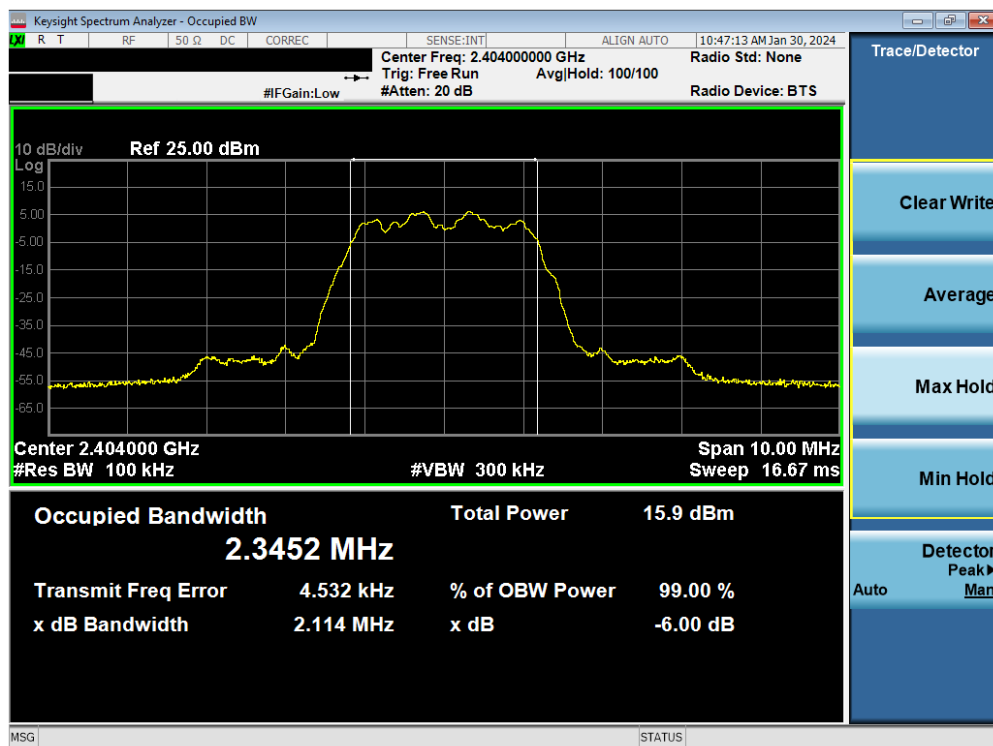

Plot 7-7. 6dB BW & 99% OBW Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

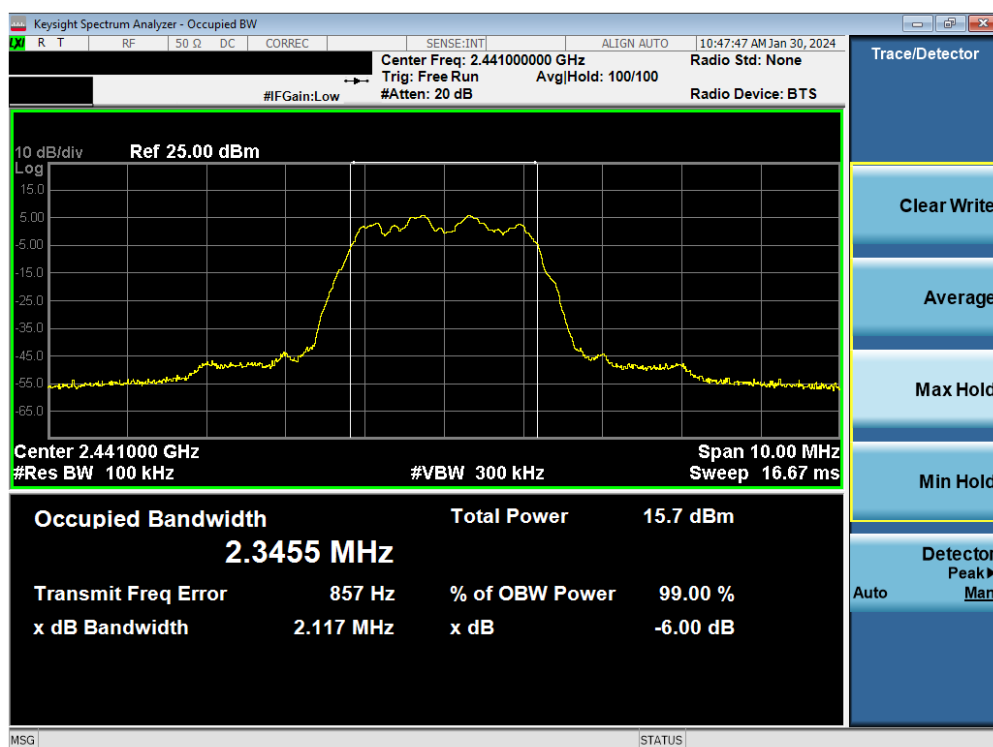


Plot 7-8. 6dB BW & 99% OBW Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 21 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

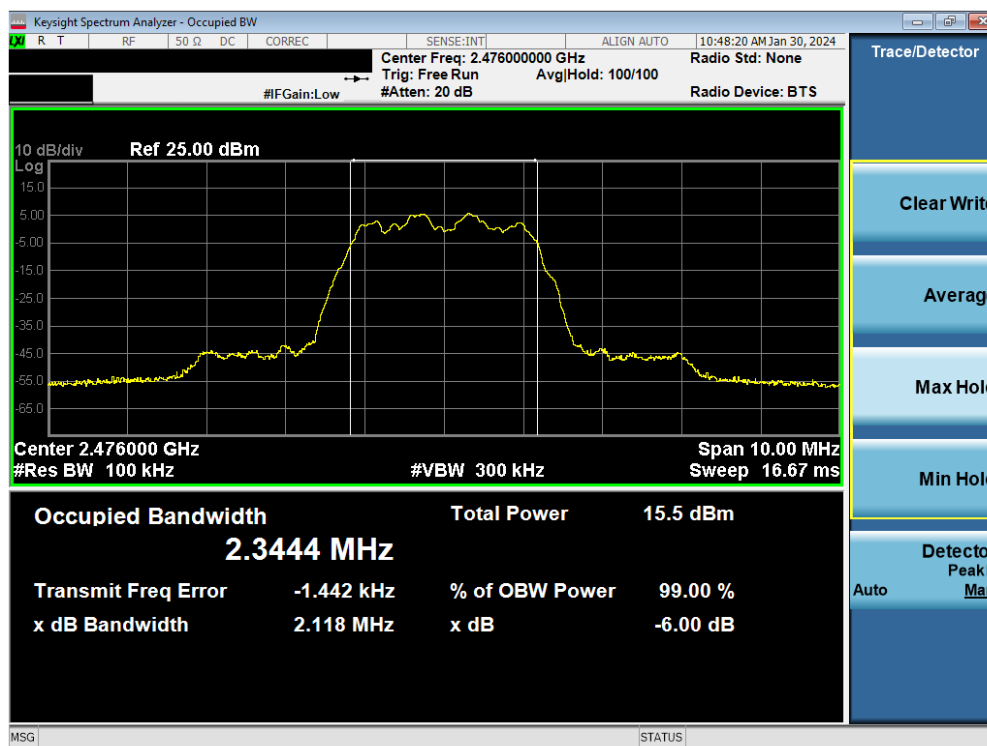

Plot 7-9. 6dB BW & 99% OBW Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

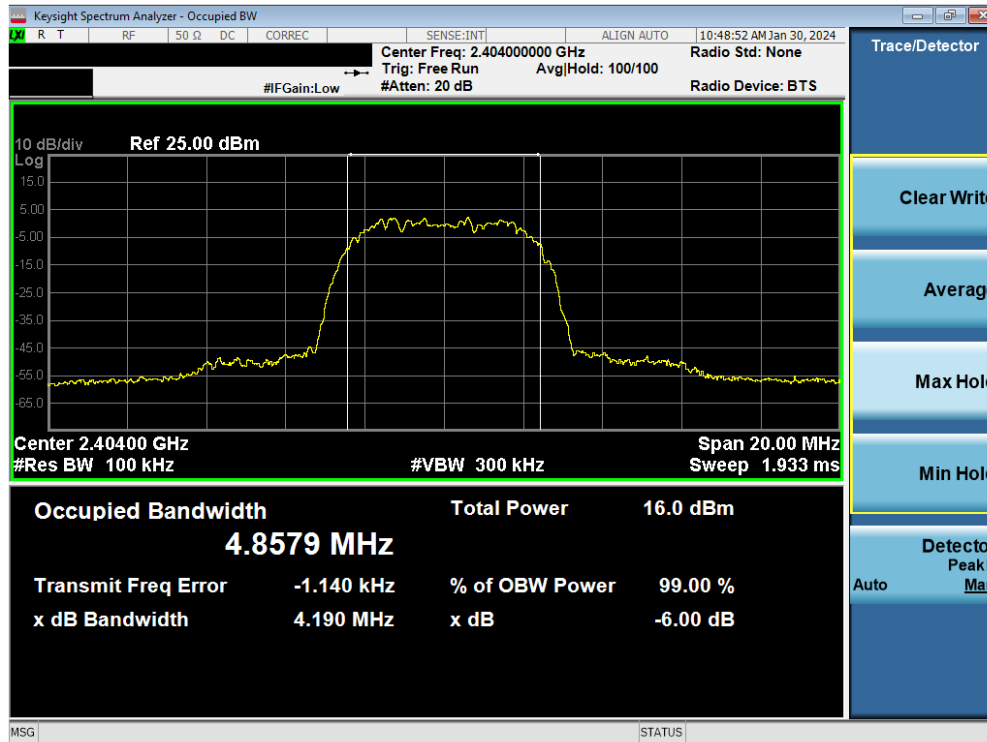


Plot 7-10. 6dB BW & 99% OBW Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 22 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

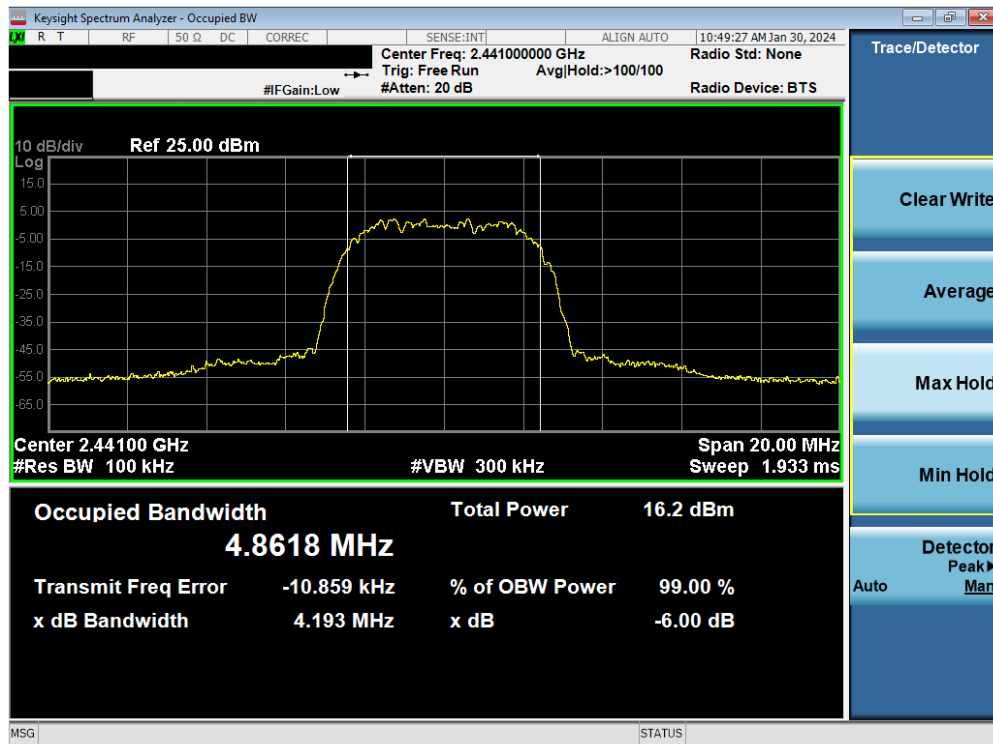

Plot 7-11. 6dB BW & 99% OBW Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

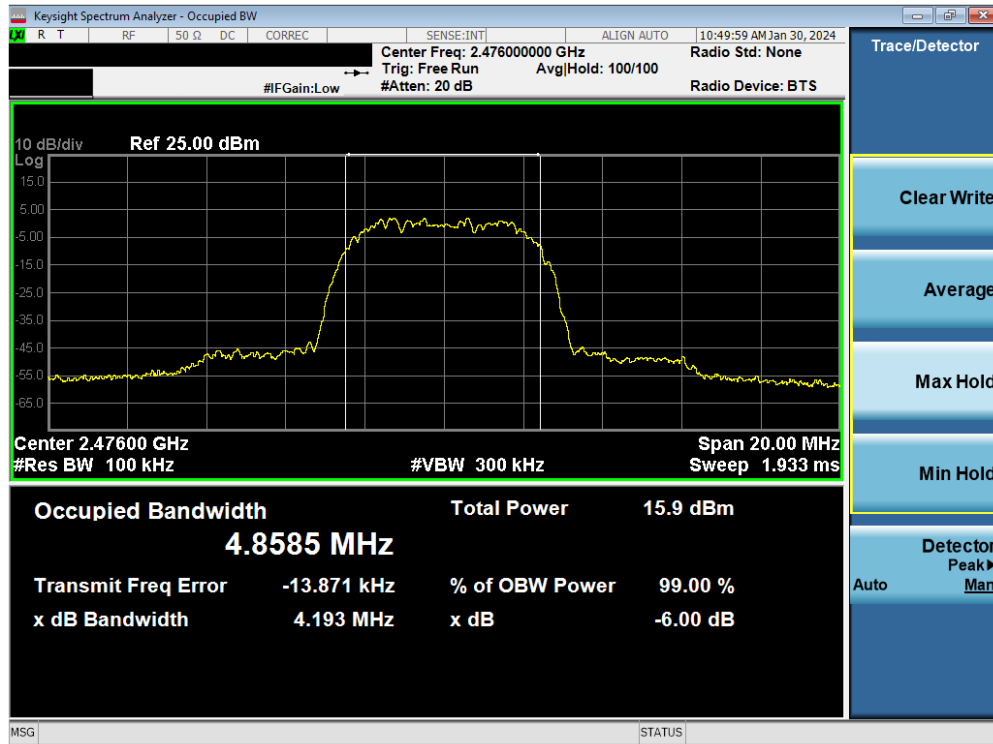

Plot 7-12. 6dB BW & 99% OBW Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 23 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 Output Power Measurement – Bluetooth (HDR)

§15.247(b.3); RSS-247 [5.4(d)]

Test Overview and Limits

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum peak conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt.

The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.9.1.3

ANSI C63.10-2013 – Subclause 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3, 8.3.2.3

ANSI C63.10-2013 – Subclause 14.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Test Notes

None

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 24 of 103

7.3.1 Peak Output Power Measurement – Bluetooth (HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	12.62	18.289	30.00	-17.38	3.60	16.22	36.02	-19.80
2441	4.0	ePA	38	12.46	17.599	30.00	-17.55	3.60	16.06	36.02	-19.97
2476	4.0	ePA	73	12.36	17.223	30.00	-17.64	3.60	15.96	36.02	-20.06
2404	4.0	iPA	1	6.78	4.764	30.00	-23.22	3.60	10.38	36.02	-25.64
2441	4.0	iPA	38	7.10	5.127	30.00	-22.90	3.60	10.70	36.02	-25.32
2476	4.0	iPA	73	6.97	4.972	30.00	-23.04	3.60	10.57	36.02	-25.46
2404	8.0	ePA	1	12.68	18.540	30.00	-17.32	3.60	16.28	36.02	-19.74
2441	8.0	ePA	38	12.57	18.055	30.00	-17.43	3.60	16.17	36.02	-19.85
2476	8.0	ePA	73	12.78	18.954	30.00	-17.22	3.60	16.38	36.02	-19.64
2404	8.0	iPA	1	7.17	5.214	30.00	-22.83	3.60	10.77	36.02	-25.25
2441	8.0	iPA	38	7.26	5.319	30.00	-22.74	3.60	10.86	36.02	-25.16
2476	8.0	iPA	73	7.34	5.416	30.00	-22.66	3.60	10.94	36.02	-25.08

Table 7-4. Peak Conducted Output Power Measurements Antenna 4a (Bluetooth HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	12.39	17.318	30.00	-17.62	1.90	14.29	36.02	-21.74
2441	4.0	ePA	38	12.18	16.504	30.00	-17.82	1.90	14.08	36.02	-21.94
2476	4.0	ePA	73	12.42	17.438	30.00	-17.59	1.90	14.32	36.02	-21.71
2404	4.0	iPA	1	6.01	3.992	30.00	-23.99	1.90	7.91	36.02	-28.11
2441	4.0	iPA	38	5.75	3.760	30.00	-24.25	1.90	7.65	36.02	-28.37
2476	4.0	iPA	73	5.64	3.667	30.00	-24.36	1.90	7.54	36.02	-28.48
2404	8.0	ePA	1	12.84	19.249	30.00	-17.16	1.90	14.74	36.02	-21.28
2441	8.0	ePA	38	12.66	18.429	30.00	-17.35	1.90	14.56	36.02	-21.47
2476	8.0	ePA	73	12.49	17.721	30.00	-17.52	1.90	14.39	36.02	-21.64
2404	8.0	iPA	1	6.33	4.290	30.00	-23.68	1.90	8.23	36.02	-27.80
2441	8.0	iPA	38	6.27	4.234	30.00	-23.73	1.90	8.17	36.02	-27.85
2476	8.0	iPA	73	6.22	4.188	30.00	-23.78	1.90	8.12	36.02	-27.90

Table 7-5. Peak Conducted Output Power Measurements Antenna 2a (Bluetooth HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				Antenna 4a		Antenna 2a		Summed							
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2404	4.0	ePA	1	12.48	17.697	12.49	17.750	15.50	35.481	30.00	-14.50	5.80	21.30	36.02	-14.72
2441	4.0	ePA	38	12.55	17.968	12.36	17.199	15.46	35.156	30.00	-14.54	5.80	21.26	36.02	-14.76
2476	4.0	ePA	73	12.68	18.540	12.20	16.581	15.46	35.156	30.00	-14.54	5.80	21.26	36.02	-14.76
2404	4.0	iPA	1	7.12	5.151	5.71	3.721	9.48	8.872	30.00	-20.52	5.80	15.28	36.02	-20.74
2441	4.0	iPA	38	7.05	5.071	5.61	3.635	9.40	8.710	30.00	-20.60	5.80	15.20	36.02	-20.82
2476	4.0	iPA	73	6.94	4.940	5.52	3.564	9.30	8.511	30.00	-20.70	5.80	15.10	36.02	-20.92
2404	8.0	ePA	1	13.09	20.352	12.78	18.985	15.95	39.355	30.00	-14.05	5.80	21.75	36.02	-14.27
2441	8.0	ePA	38	12.97	19.820	12.85	19.253	15.92	39.084	30.00	-14.08	5.80	21.72	36.02	-14.30
2476	8.0	ePA	73	12.63	18.302	12.71	18.681	15.68	36.983	30.00	-14.32	5.80	21.48	36.02	-14.54
2404	8.0	iPA	1	7.12	5.151	6.18	4.150	9.69	9.311	30.00	-20.31	5.80	15.49	36.02	-20.53
2441	8.0	iPA	38	7.16	5.200	6.09	4.067	9.67	9.268	30.00	-20.33	5.80	15.47	36.02	-20.55
2476	8.0	iPA	73	7.29	5.354	6.03	4.004	9.71	9.354	30.00	-20.29	5.80	15.51	36.02	-20.51

Table 7-6. Peak Conducted Output Power Measurements TxBF (Bluetooth HDR)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 25 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.2 Average Output Power Measurement – Bluetooth (HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	9.94	9.867	30.00	-20.06	3.60	13.54	36.02	-22.48
2441	4.0	ePA	38	9.82	9.598	30.00	-20.18	3.60	13.42	36.02	-22.60
2476	4.0	ePA	73	9.74	9.423	30.00	-20.26	3.60	13.34	36.02	-22.68
2404	4.0	iPA	1	4.21	2.636	30.00	-25.79	3.60	7.81	36.02	-28.21
2441	4.0	iPA	38	4.49	2.814	30.00	-25.51	3.60	8.09	36.02	-27.93
2476	4.0	iPA	73	4.41	2.761	30.00	-25.59	3.60	8.01	36.02	-28.01
2404	8.0	ePA	1	9.72	9.371	30.00	-20.28	3.60	13.32	36.02	-22.70
2441	8.0	ePA	38	9.67	9.260	30.00	-20.33	3.60	13.27	36.02	-22.75
2476	8.0	ePA	73	9.80	9.552	30.00	-20.20	3.60	13.40	36.02	-22.62
2404	8.0	iPA	1	4.28	2.680	30.00	-25.72	3.60	7.88	36.02	-28.14
2441	8.0	iPA	38	4.39	2.747	30.00	-25.61	3.60	7.99	36.02	-28.03
2476	8.0	iPA	73	4.45	2.784	30.00	-25.55	3.60	8.05	36.02	-27.97

Table 7-7. Average Conducted Output Power Measurements Antenna 4a (Bluetooth HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	9.78	9.510	30.00	-20.22	1.90	11.68	36.02	-24.34
2441	4.0	ePA	38	9.59	9.097	30.00	-20.41	1.90	11.49	36.02	-24.53
2476	4.0	ePA	73	9.79	9.526	30.00	-20.21	1.90	11.69	36.02	-24.33
2404	4.0	iPA	1	3.39	2.180	30.00	-26.62	1.90	5.29	36.02	-30.74
2441	4.0	iPA	38	3.14	2.062	30.00	-26.86	1.90	5.04	36.02	-30.98
2476	4.0	iPA	73	3.10	2.040	30.00	-26.90	1.90	5.00	36.02	-31.02
2404	8.0	ePA	1	9.92	9.822	30.00	-20.08	1.90	11.82	36.02	-24.20
2441	8.0	ePA	38	9.72	9.378	30.00	-20.28	1.90	11.62	36.02	-24.40
2476	8.0	ePA	73	9.52	8.960	30.00	-20.48	1.90	11.42	36.02	-24.60
2404	8.0	iPA	1	3.42	2.200	30.00	-26.58	1.90	5.32	36.02	-30.70
2441	8.0	iPA	38	3.40	2.186	30.00	-26.60	1.90	5.30	36.02	-30.72
2476	8.0	iPA	73	3.34	2.158	30.00	-26.66	1.90	5.24	36.02	-30.78

Table 7-8. Average Conducted Output Power Measurements Antenna 2a (Bluetooth HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				Antenna 4a		Antenna 2a		Summed							
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2404	4.0	ePA	1	9.82	9.587	9.91	9.784	12.87	19.364	30.00	-17.13	5.80	18.67	36.02	-17.35
2441	4.0	ePA	38	9.93	9.833	9.78	9.508	12.86	19.320	30.00	-17.14	5.80	18.66	36.02	-17.36
2476	4.0	ePA	73	10.00	10.000	9.58	9.080	12.81	19.099	30.00	-17.19	5.80	18.61	36.02	-17.41
2404	4.0	iPA	1	4.48	2.808	3.11	2.045	6.86	4.853	30.00	-23.14	5.80	12.66	36.02	-23.36
2441	4.0	iPA	38	4.49	2.814	3.01	2.001	6.83	4.819	30.00	-23.17	5.80	12.63	36.02	-23.39
2476	4.0	iPA	73	4.39	2.749	2.95	1.971	6.74	4.721	30.00	-23.26	5.80	12.54	36.02	-23.48
2404	8.0	ePA	1	9.99	9.977	9.88	9.727	12.95	19.724	30.00	-17.05	5.80	18.75	36.02	-17.27
2441	8.0	ePA	38	9.98	9.954	9.50	8.915	12.76	18.880	30.00	-17.24	5.80	18.56	36.02	-17.46
2476	8.0	ePA	73	9.66	9.256	9.71	9.361	12.70	18.621	30.00	-17.30	5.80	18.50	36.02	-17.52
2404	8.0	iPA	1	4.23	2.650	3.32	2.148	6.81	4.797	30.00	-23.19	5.80	12.61	36.02	-23.41
2441	8.0	iPA	38	4.31	2.700	3.23	2.104	6.82	4.808	30.00	-23.18	5.80	12.62	36.02	-23.40
2476	8.0	iPA	73	4.40	2.752	3.17	2.076	6.84	4.831	30.00	-23.16	5.80	12.64	36.02	-23.38

Table 7-9. Average Conducted Output Power Measurements TxBF (Bluetooth HDR)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 26 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 4a and Antenna 2a were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Subclause 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample TxBF Calculation:

At 2404MHz the average conducted output power was measured to be 9.82 dBm for Antenna 4a and 9.91 dBm for Antenna 2a.

$$\text{Antenna 4a} + \text{Antenna 2a} = \text{TxBF}$$

$$(9.82 \text{ dBm} + 9.91 \text{ dBm}) = (9.587 \text{ mW} + 9.784 \text{ mW}) = 19.364 \text{ mW} = 12.87 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2404MHz, the average conducted output power was calculated to be 12.87 dBm with directional antenna gain of 5.80 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$12.87 \text{ dBm} + 5.80 \text{ dBi} = 19.364 \text{ dBm}$$

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 27 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4 Power Spectral Density – Bluetooth (HDR)

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Subclause 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 28 of 103

Antenna 4a


Frequency [MHz]	Mode	Power Scheme	Channel No.	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2404	HDR4	ePA	1	-6.77	8.0	-14.77
2441	HDR4	ePA	38	-6.57	8.0	-14.57
2476	HDR4	ePA	73	-6.47	8.0	-14.47
2404	HDR4	iPA	1	-12.50	8.0	-20.50
2441	HDR4	iPA	38	-12.39	8.0	-20.39
2476	HDR4	iPA	73	-12.37	8.0	-20.37
2404	HDR8	ePA	1	-9.44	8.0	-17.44
2441	HDR8	ePA	38	-9.53	8.0	-17.53
2476	HDR8	ePA	73	-9.39	8.0	-17.39
2404	HDR8	iPA	1	-15.77	8.0	-23.77
2441	HDR8	iPA	38	-15.70	8.0	-23.70
2476	HDR8	iPA	73	-15.27	8.0	-23.27

Table 7-10. Conducted Power Density Measurements Antenna 4a


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 29 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

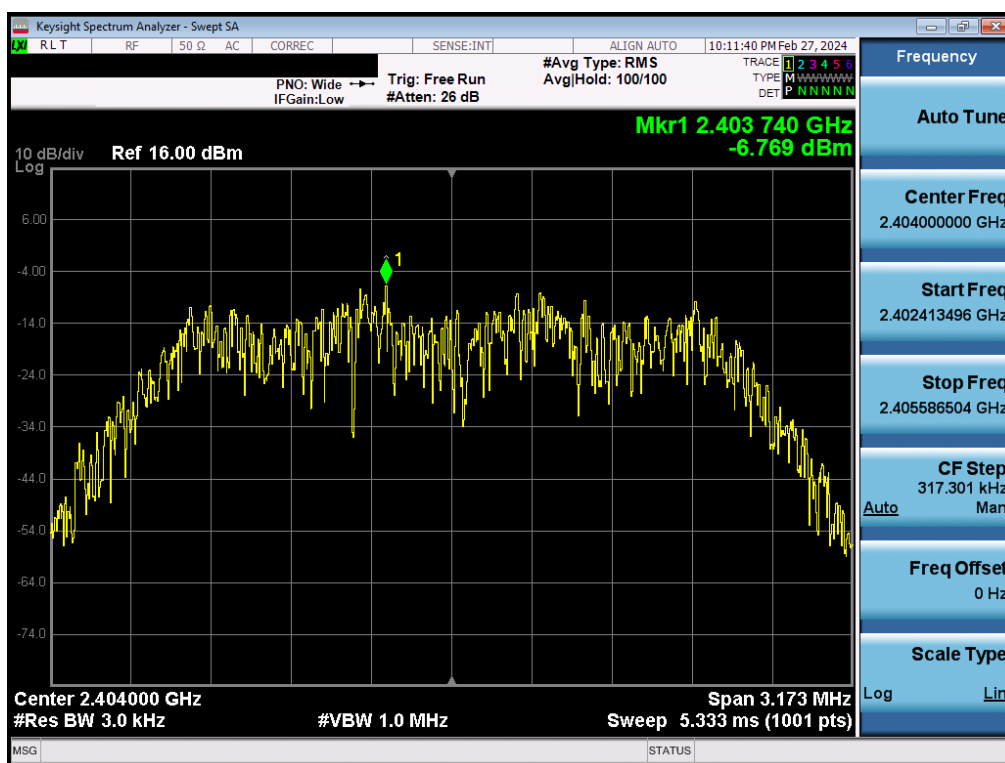

Plot 7-13. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

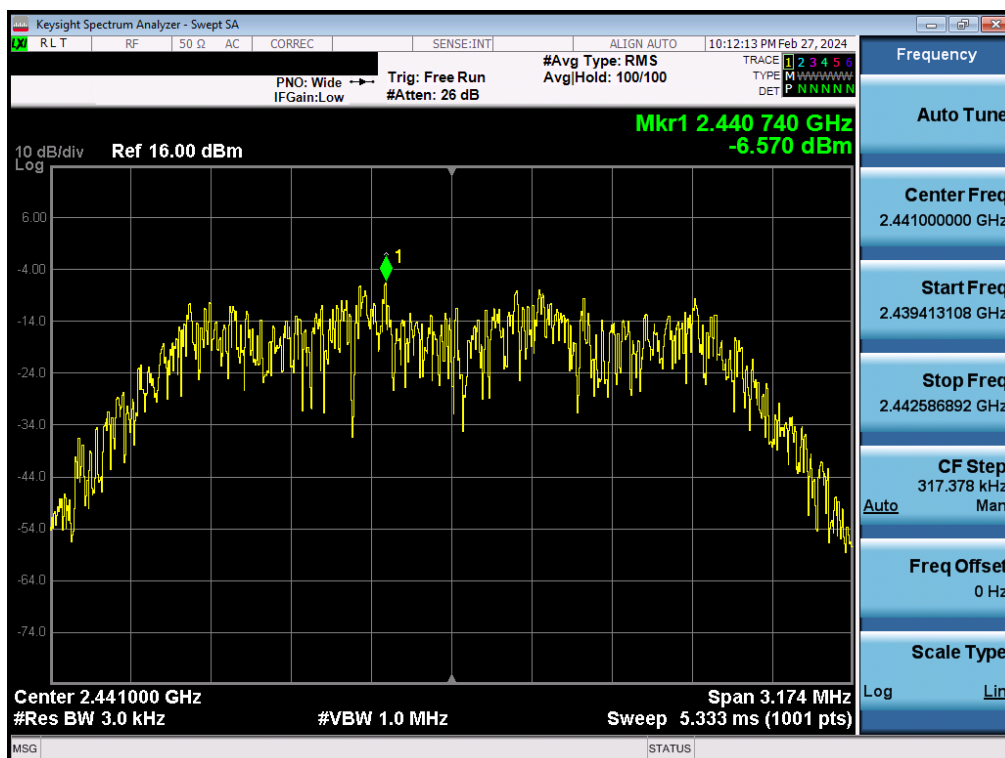


Plot 7-14. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 30 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

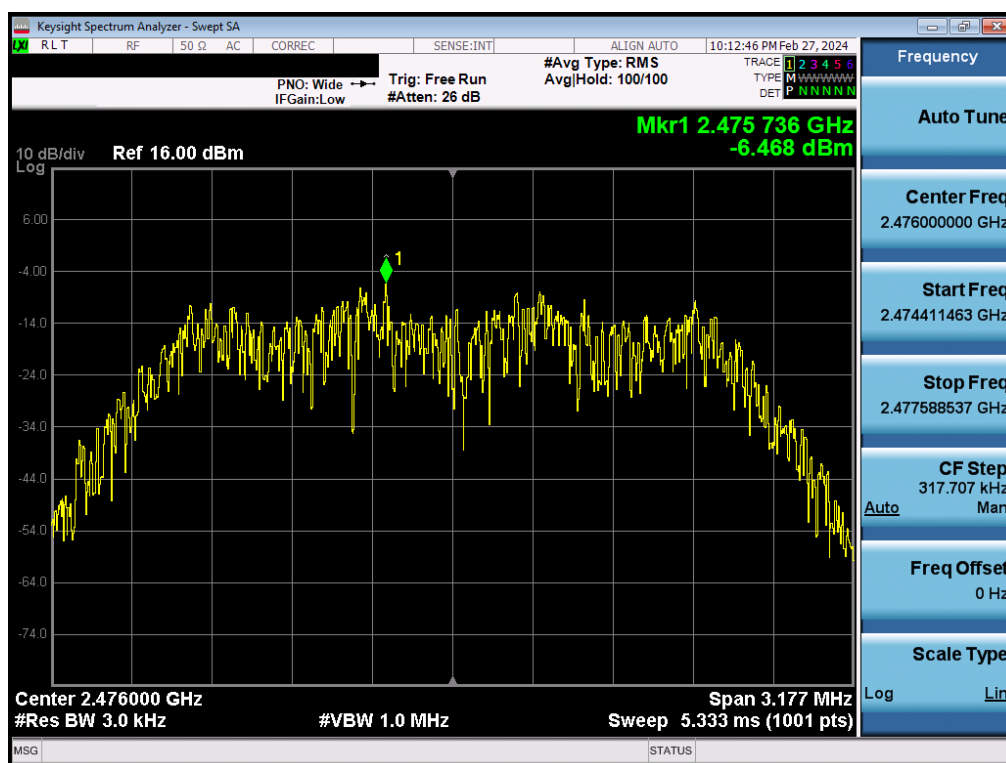


Plot 7-15. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

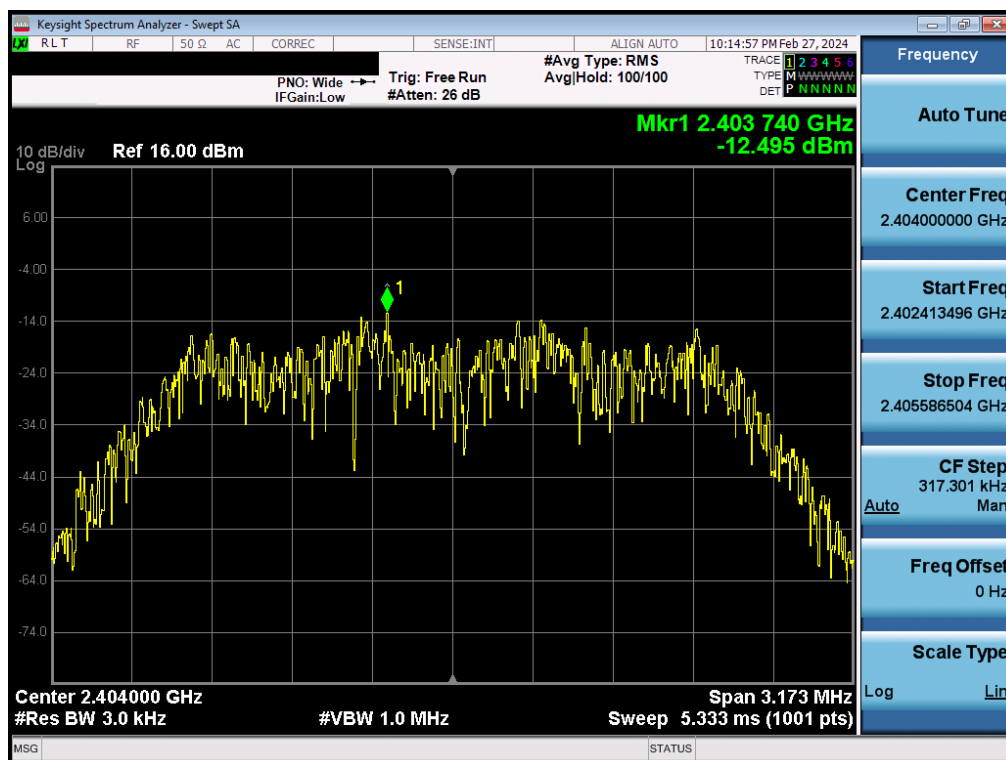


Plot 7-16. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 31 of 103

V 10.6 09/14/2023

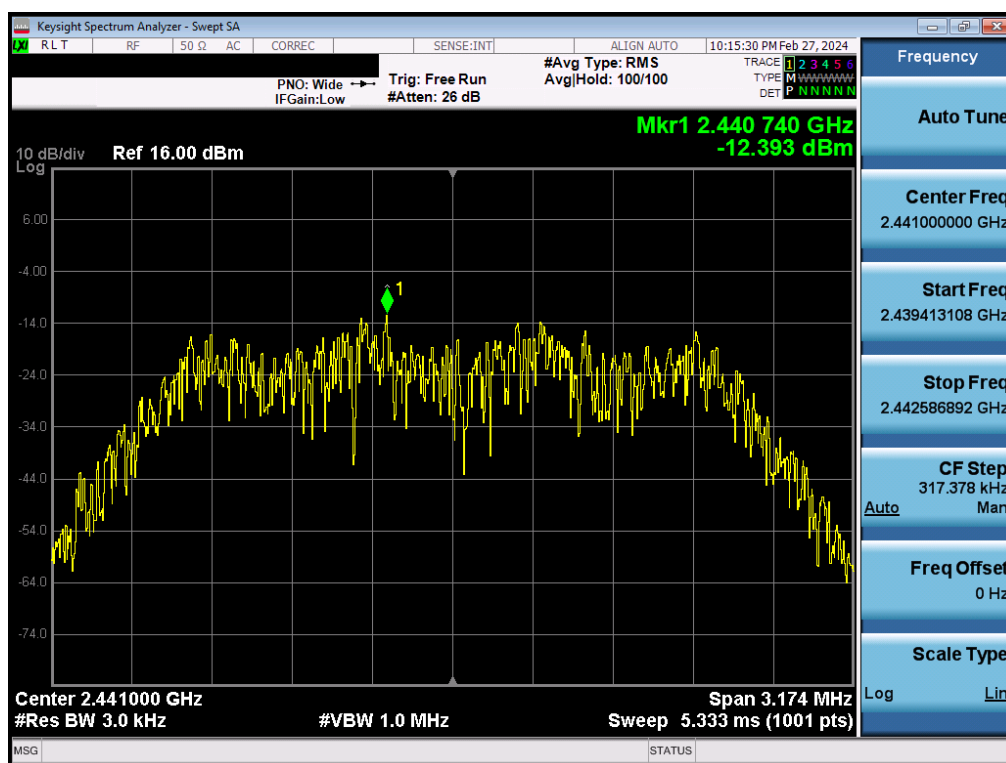

Plot 7-17. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

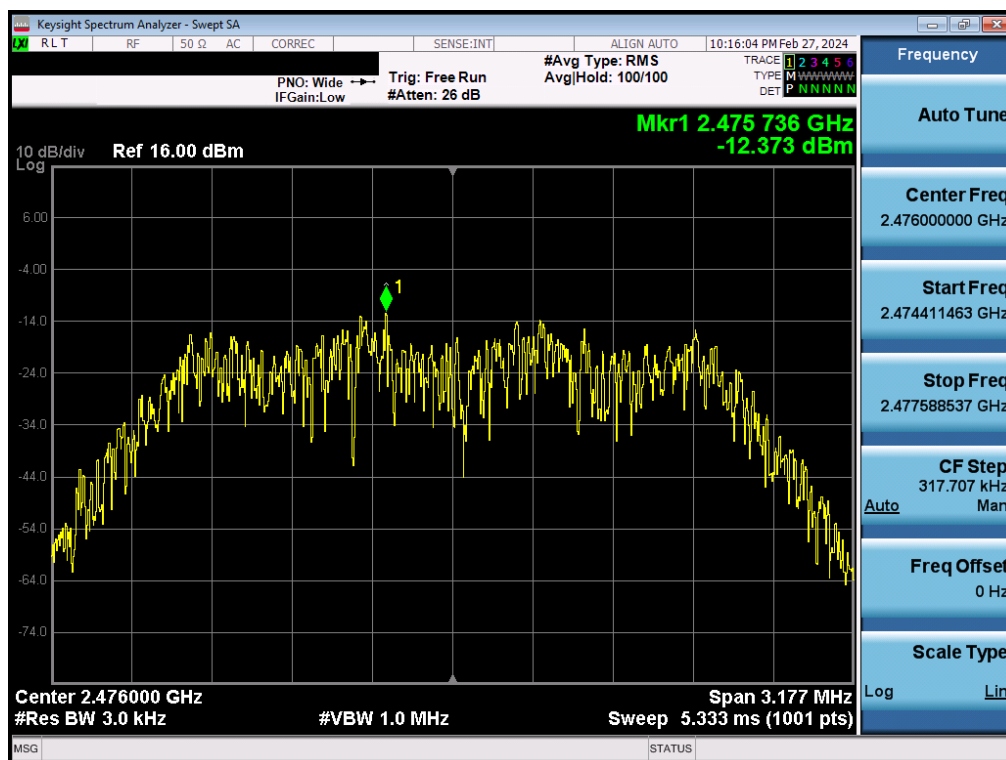


Plot 7-18. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 32 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

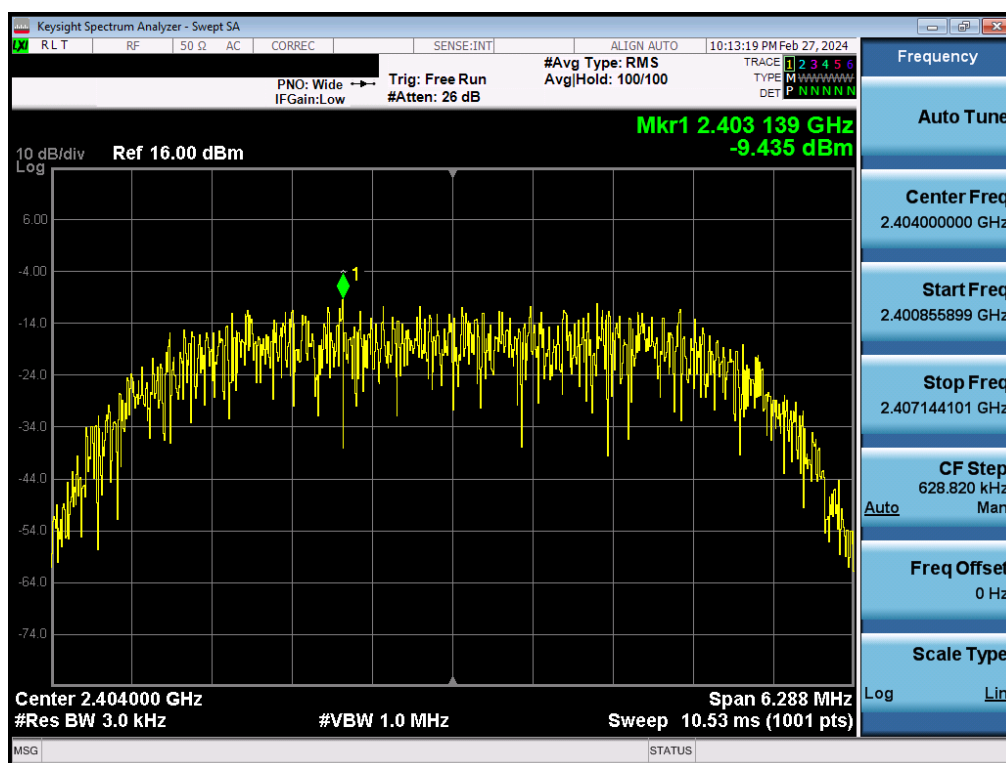

Plot 7-19. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

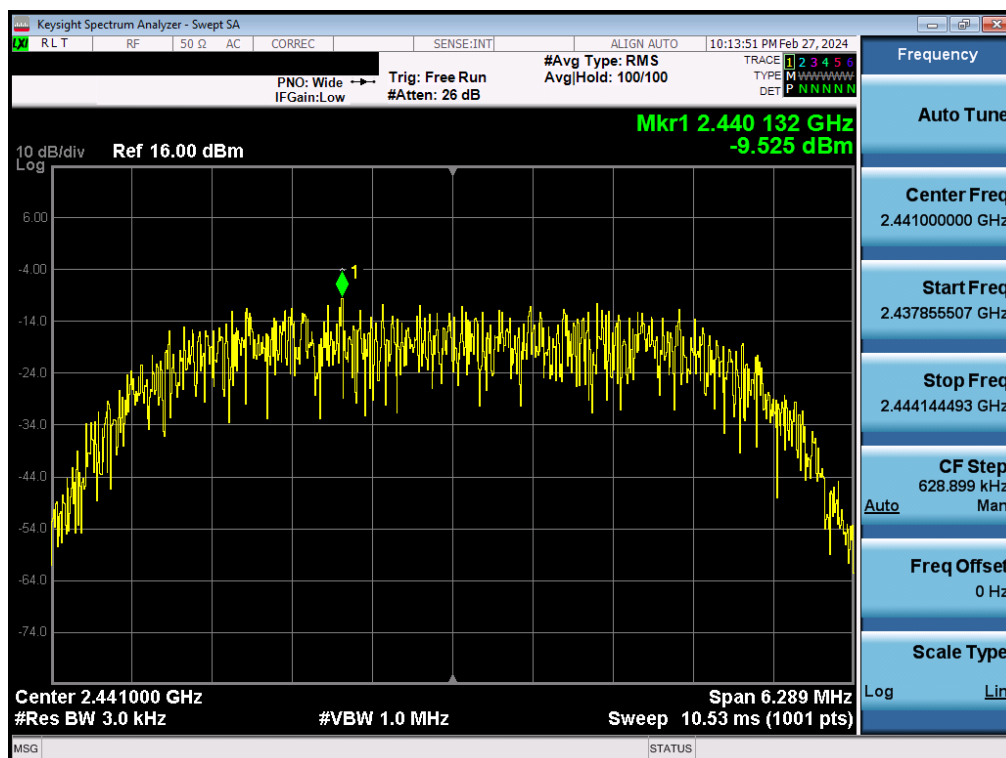


Plot 7-20. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 33 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

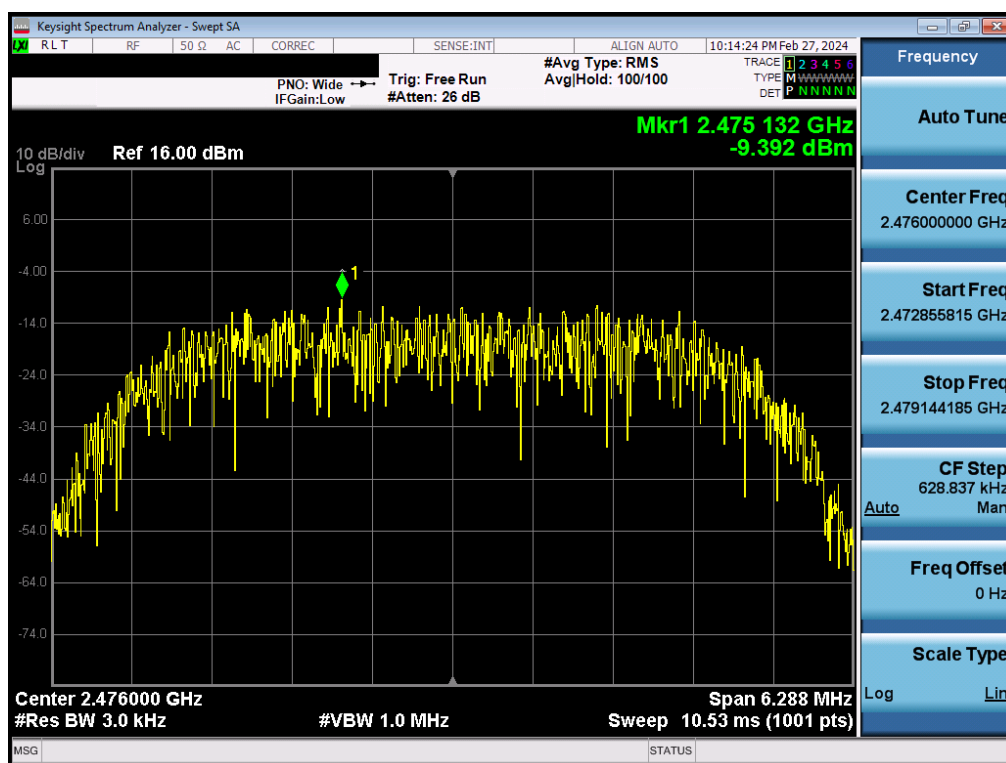

Plot 7-21. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

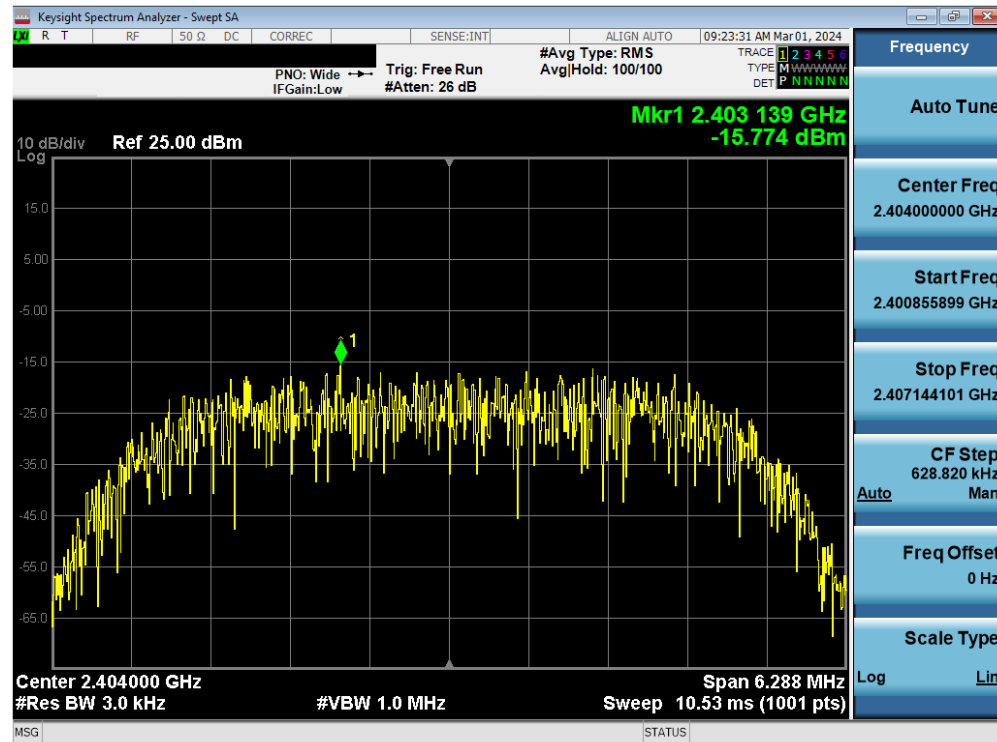


Plot 7-22. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 34 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

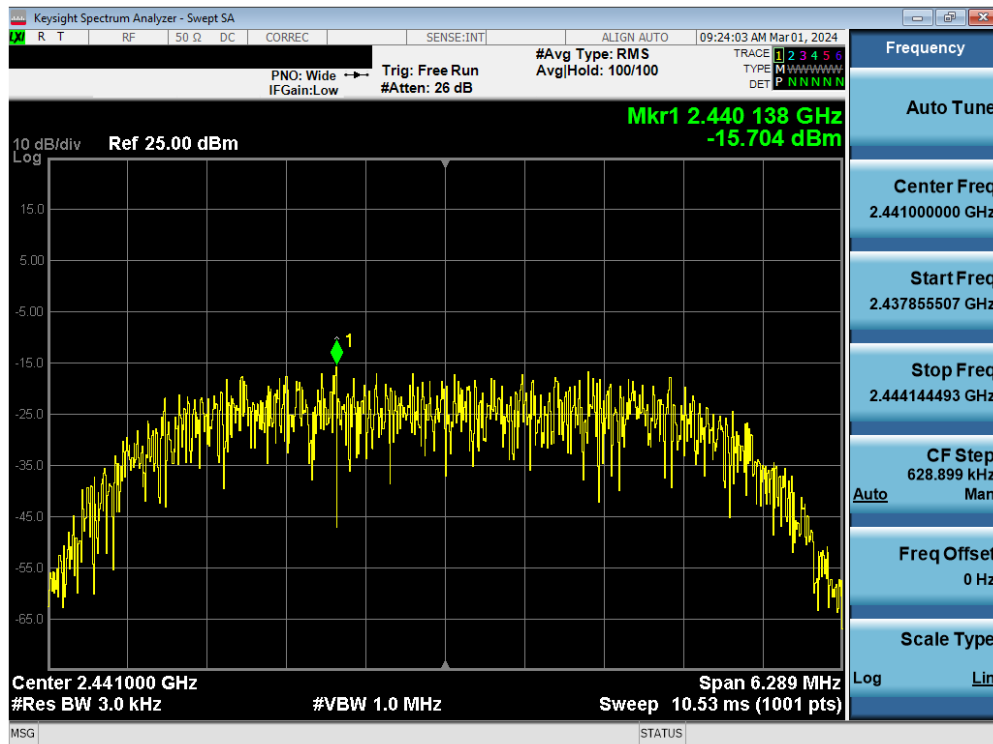

Plot 7-23. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

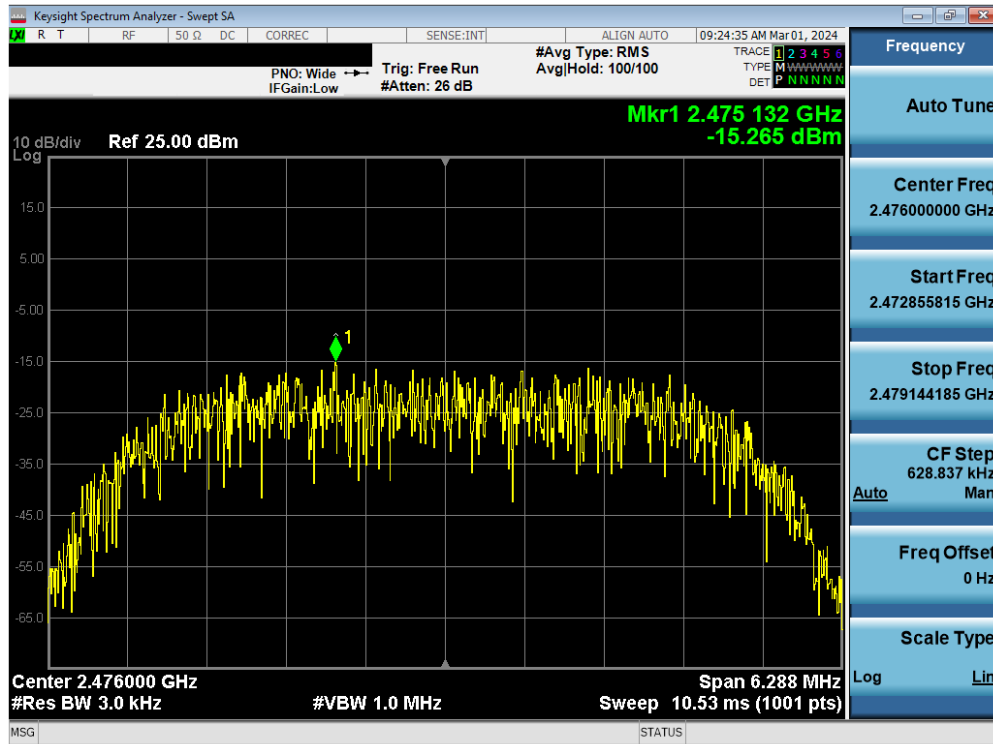

Plot 7-24. Power Spectral Density Plot Antenna 4a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 35 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna 2a


Frequency [MHz]	Mode	Power Scheme	Channel No.	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2404	HDR4	ePA	1	-6.42	8.0	-14.42
2441	HDR4	ePA	38	-6.65	8.0	-14.65
2476	HDR4	ePA	73	-6.50	8.0	-14.50
2404	HDR4	iPA	1	-12.95	8.0	-20.95
2441	HDR4	iPA	38	-12.99	8.0	-20.99
2476	HDR4	iPA	73	-12.85	8.0	-20.85
2404	HDR8	ePA	1	-9.26	8.0	-17.26
2441	HDR8	ePA	38	-9.33	8.0	-17.33
2476	HDR8	ePA	73	-9.35	8.0	-17.35
2404	HDR8	iPA	1	-15.47	8.0	-23.47
2441	HDR8	iPA	38	-15.52	8.0	-23.52
2476	HDR8	iPA	73	-15.30	8.0	-23.30

Table 7-11. Conducted Power Density Measurements Antenna 2a


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 36 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

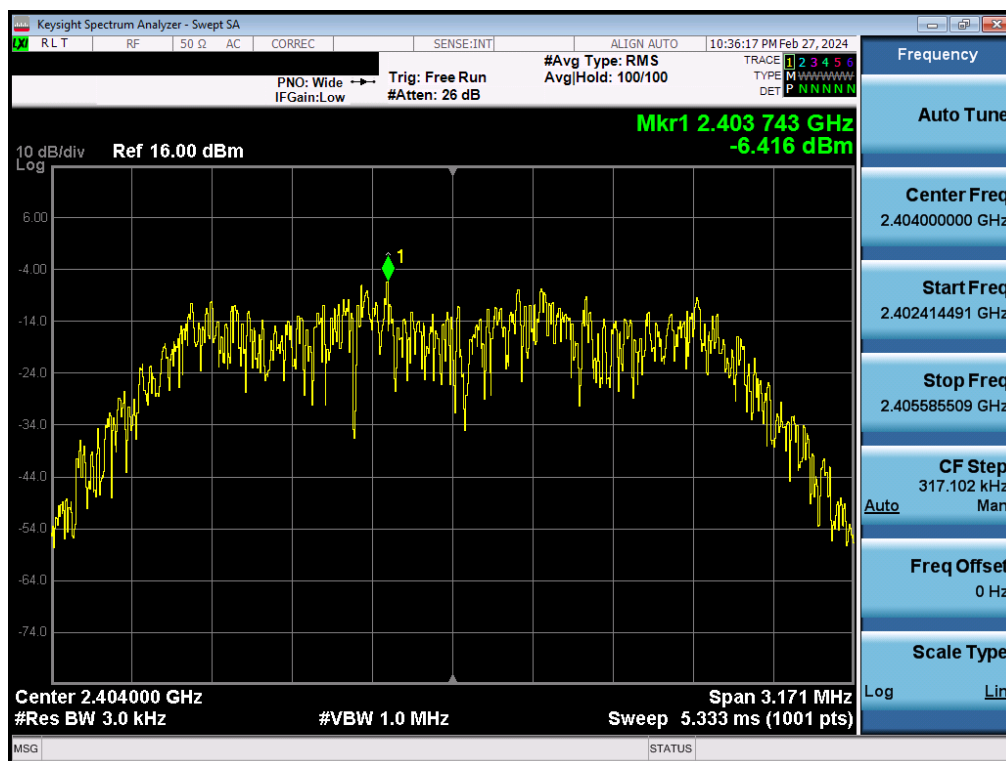

Plot 7-25. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

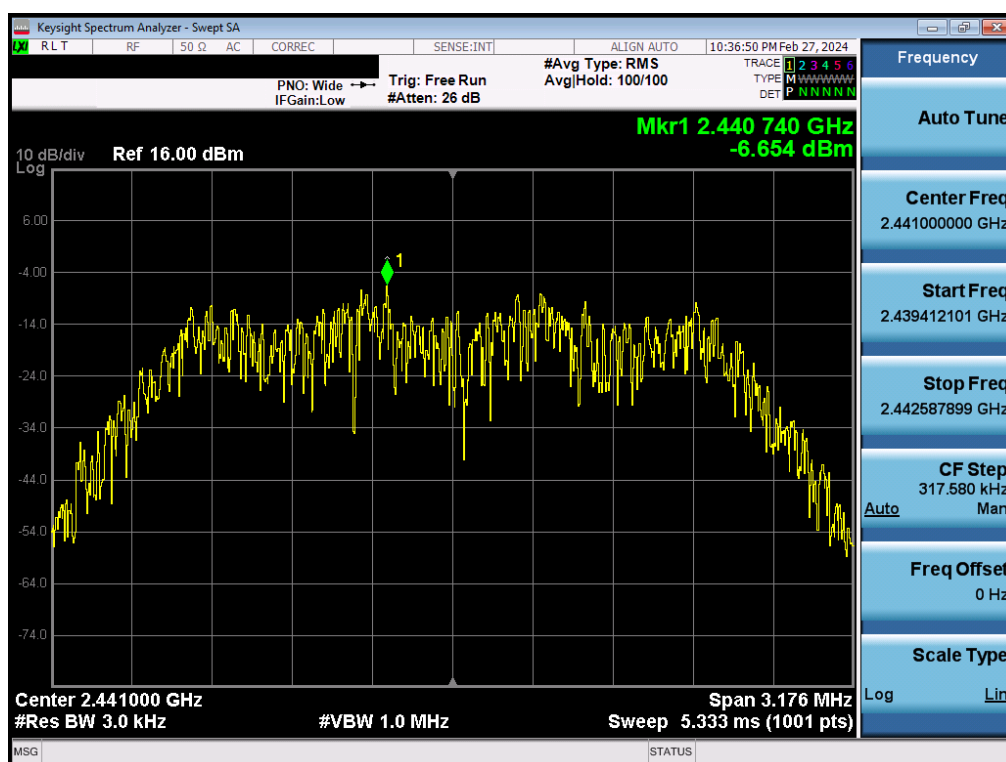


Plot 7-26. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 37 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

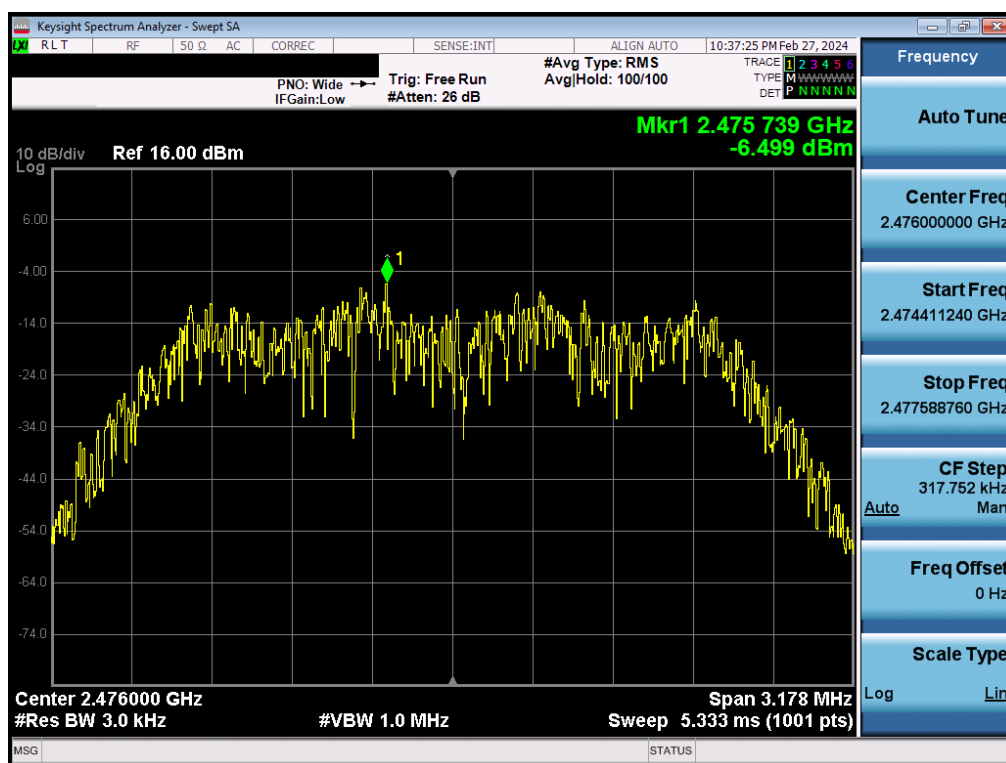


Plot 7-27. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

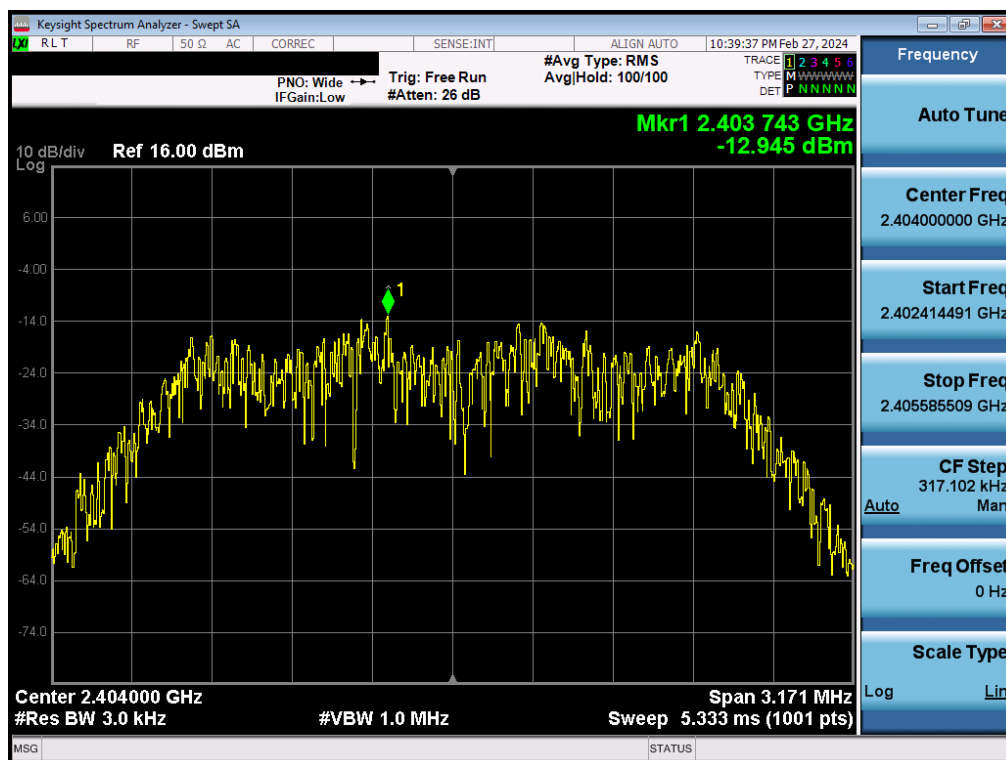


Plot 7-28. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 38 of 103

V 10.6 09/14/2023

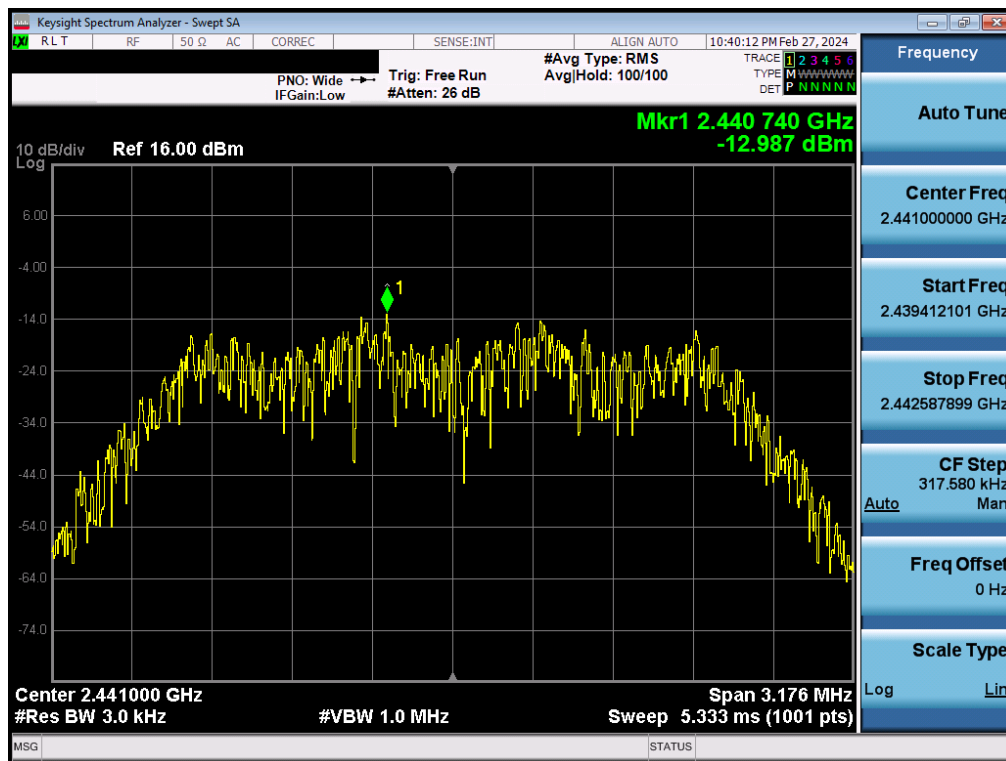


Plot 7-29. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

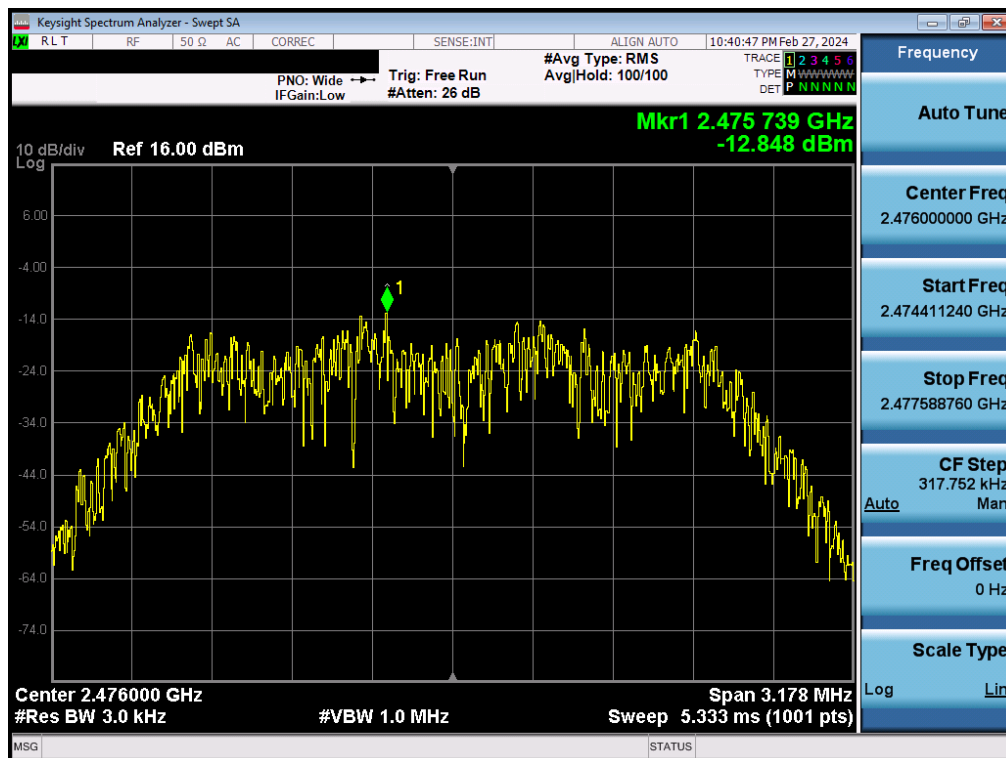


Plot 7-30. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 39 of 103

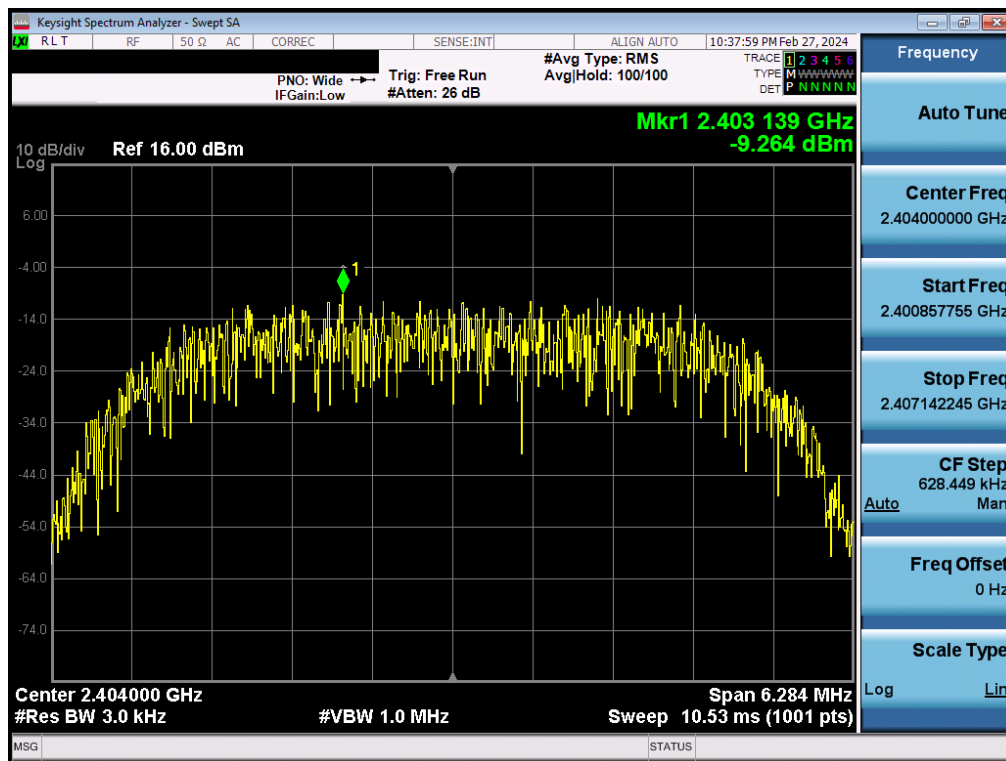

Plot 7-31. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

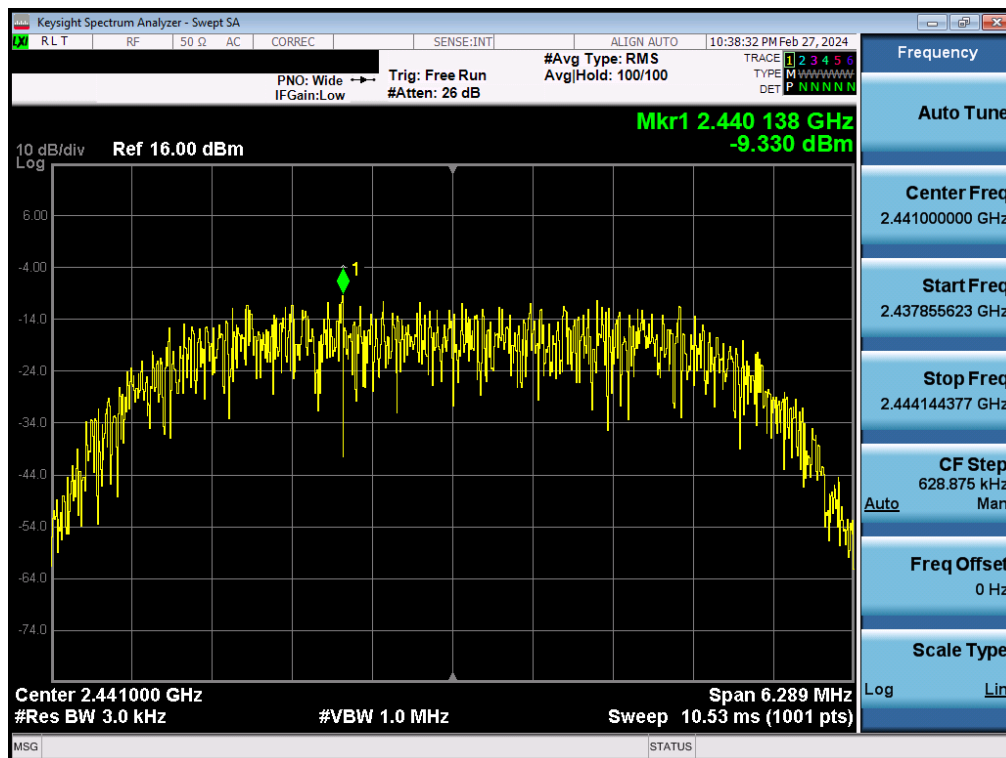


Plot 7-32. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 40 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

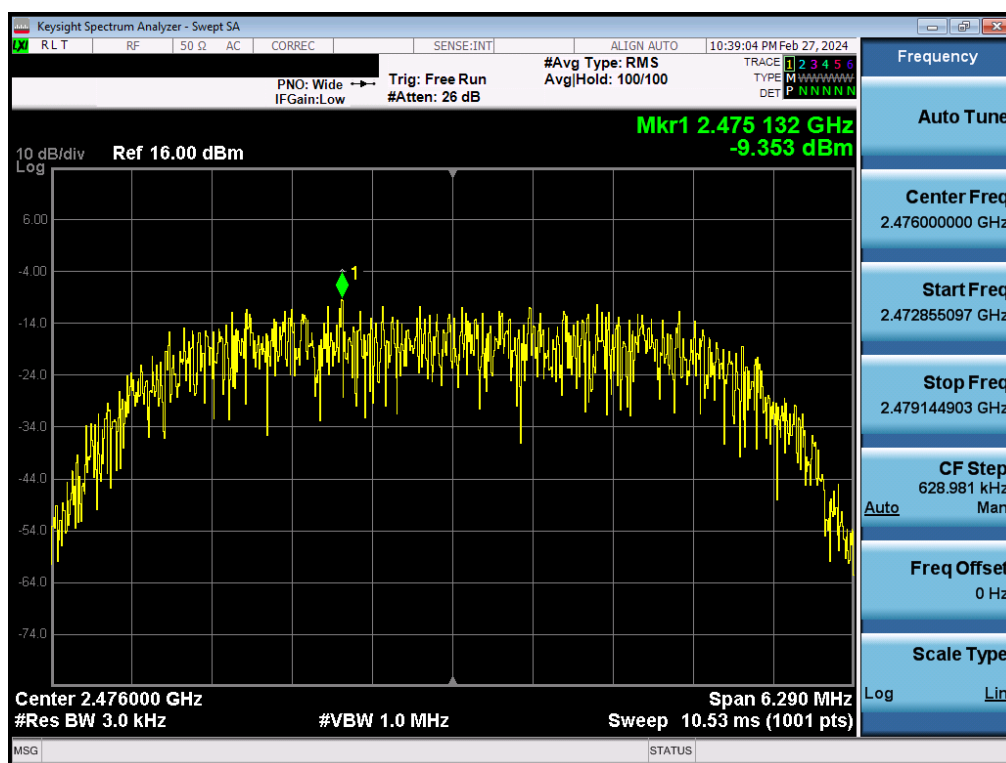


Plot 7-33. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

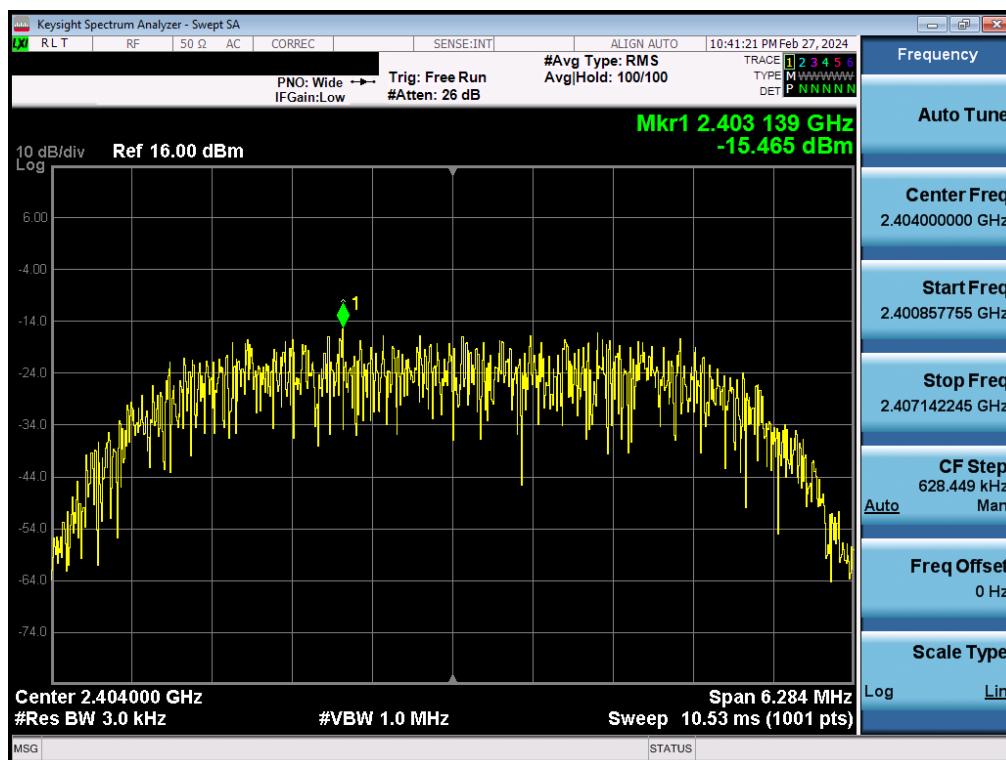


Plot 7-34. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 41 of 103

V 10.6 09/14/2023

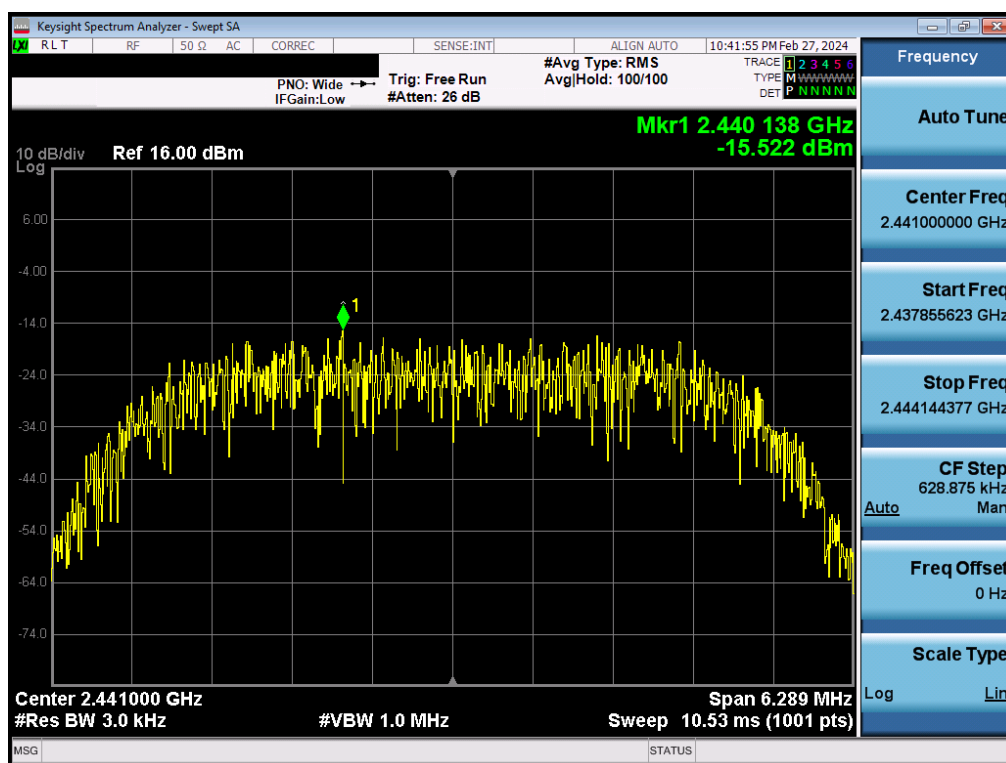

Plot 7-35. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

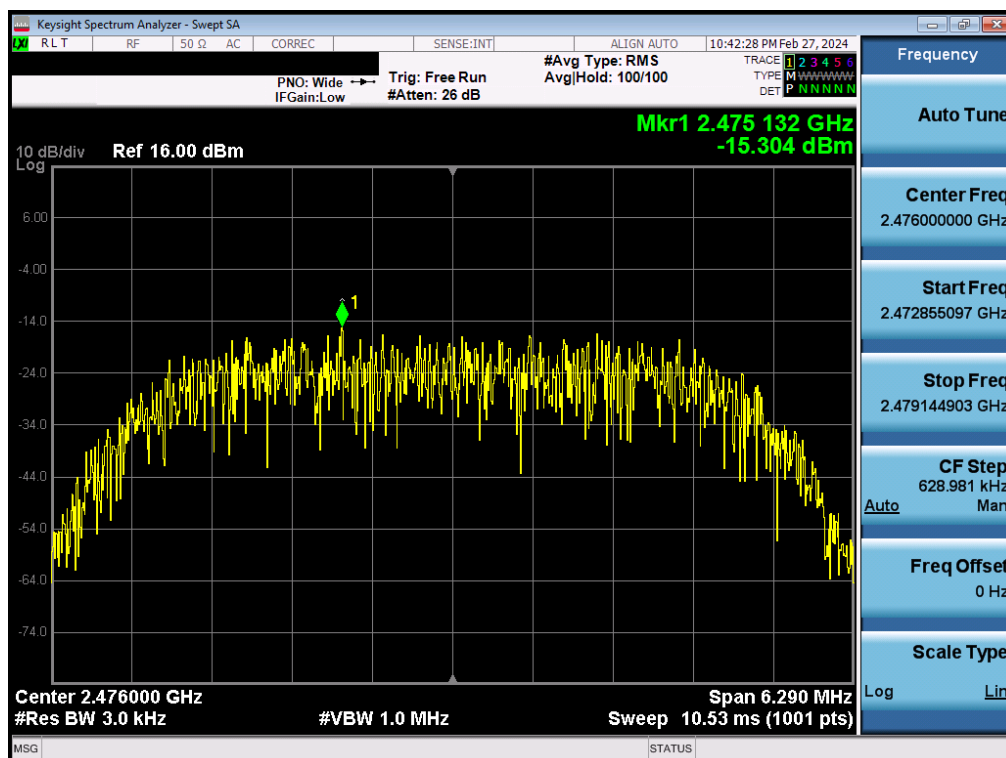

Plot 7-36. Power Spectral Density Plot Antenna 2a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 42 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TxBF


Frequency [MHz]	Mode	Power Scheme	Channel No.	Antenna 4a Power Density [dBm/3kHz]	Antenna 2a Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2404	HDR4	ePA	1	-6.75	-6.79	-3.76	8.0	-14.79
2441	HDR4	ePA	38	-6.53	-6.76	-3.63	8.0	-14.76
2476	HDR4	ePA	73	-6.63	-6.66	-3.64	8.0	-14.66
2404	HDR4	iPA	1	-11.88	-12.91	-9.35	8.0	-20.91
2441	HDR4	iPA	38	-12.27	-12.98	-9.60	8.0	-20.98
2476	HDR4	iPA	73	-12.26	-12.80	-9.51	8.0	-20.80
2404	HDR8	ePA	1	-8.94	-9.45	-6.17	8.0	-17.45
2441	HDR8	ePA	38	-9.04	-9.55	-6.27	8.0	-17.55
2476	HDR8	ePA	73	-9.38	-9.16	-6.26	8.0	-17.16
2404	HDR8	iPA	1	-15.82	-15.38	-12.59	8.0	-23.38
2441	HDR8	iPA	38	-15.73	-15.43	-12.57	8.0	-23.43
2476	HDR8	iPA	73	-15.33	-15.27	-12.29	8.0	-23.27

Table 7-12. Conducted Power Density Measurements TxBF


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 43 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

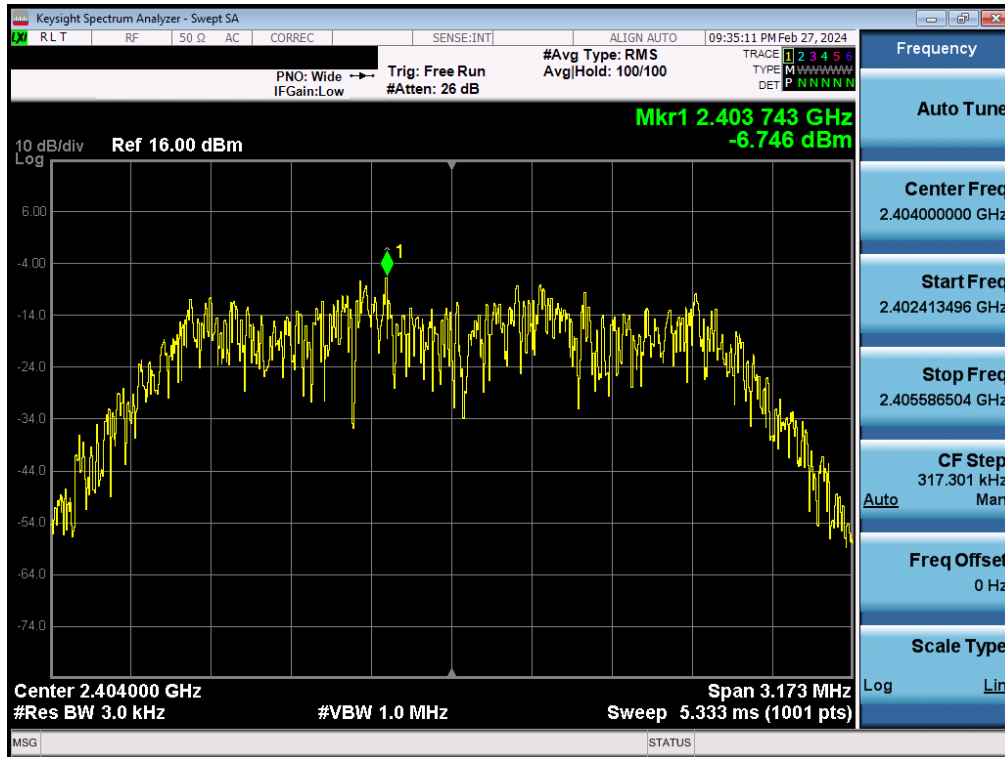

Plot 7-37. Power Spectral Density Plot TxBF Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

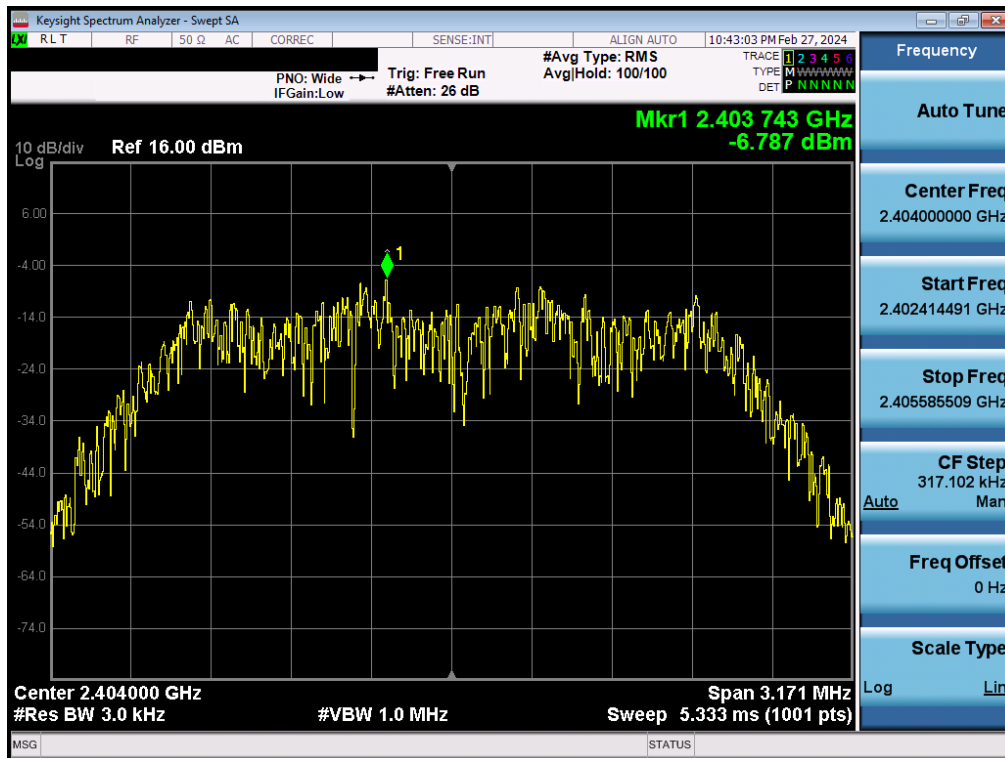


Plot 7-38. Power Spectral Density Plot TxBF Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 44 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

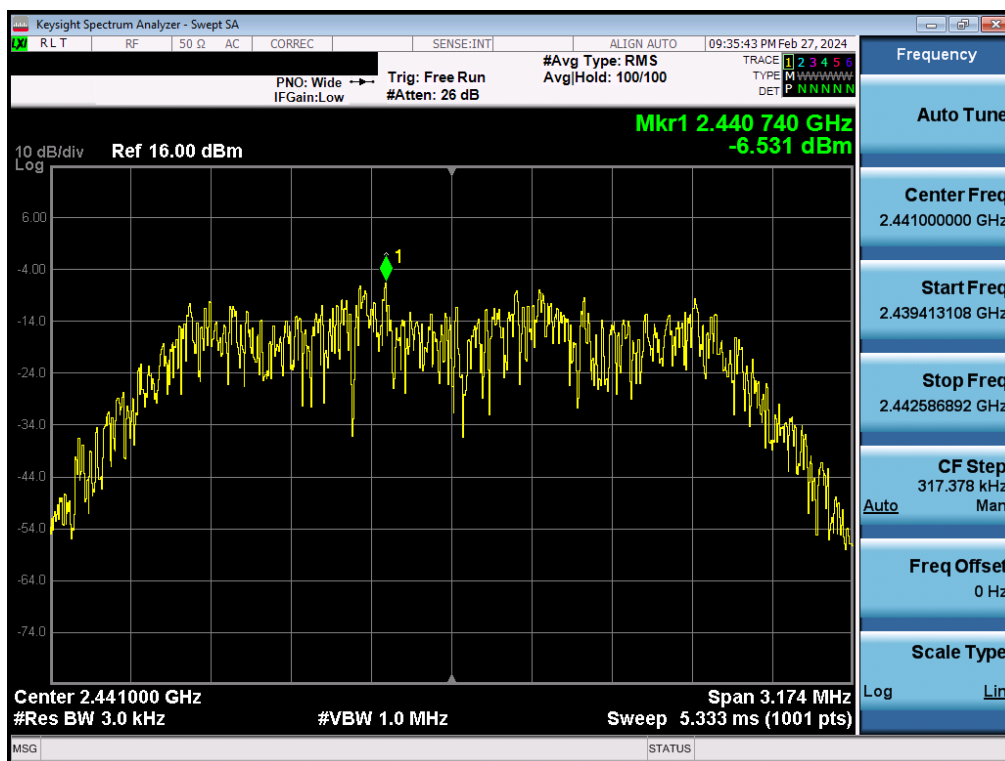

Plot 7-39. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

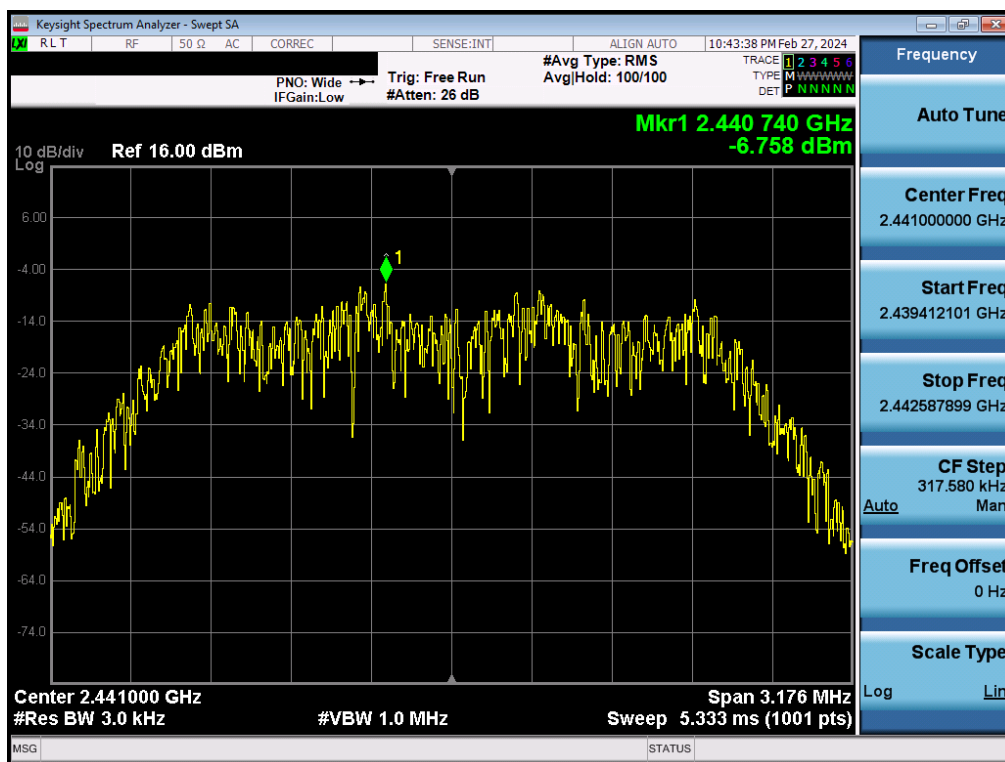


Plot 7-40. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 45 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

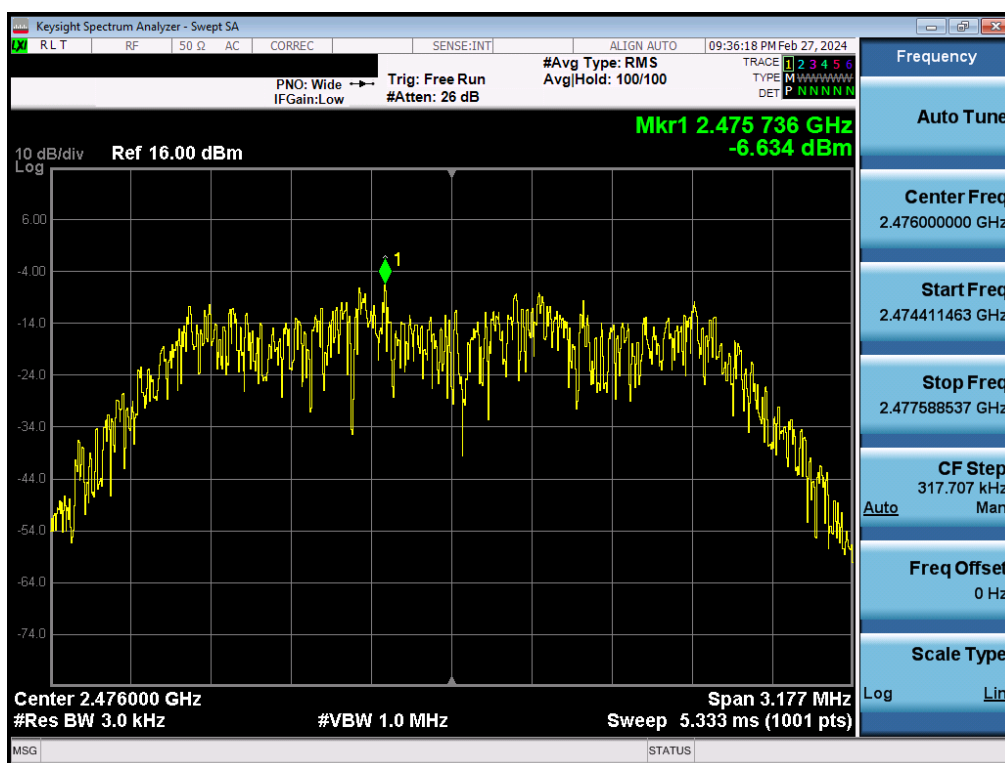

Plot 7-41. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

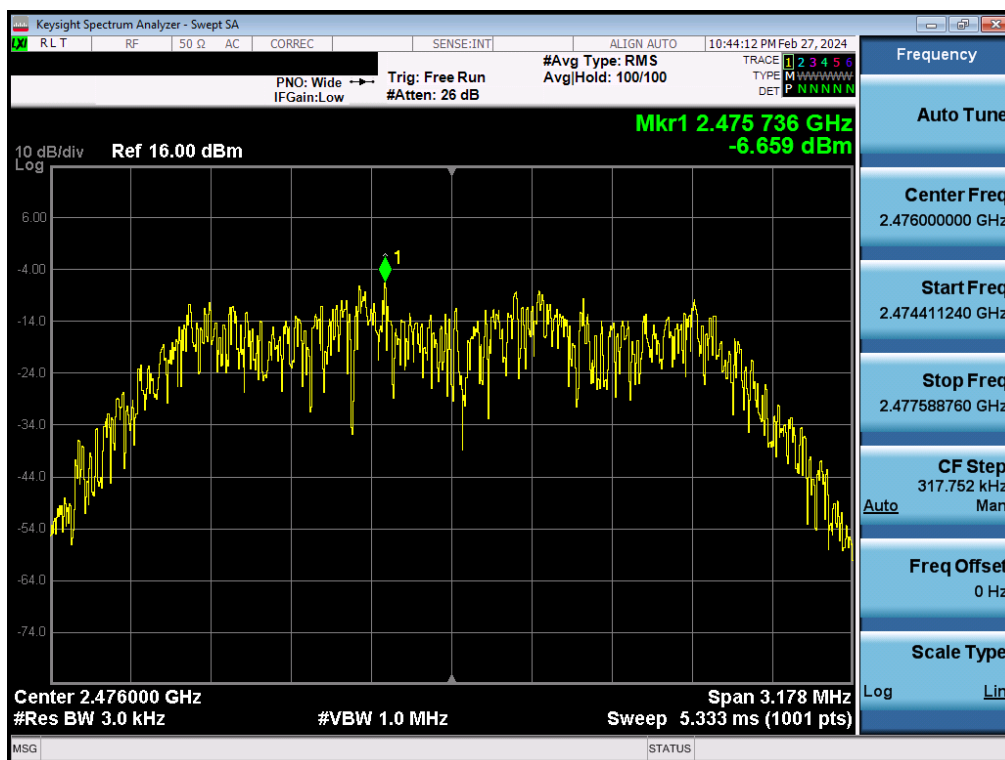


Plot 7-42. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 46 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

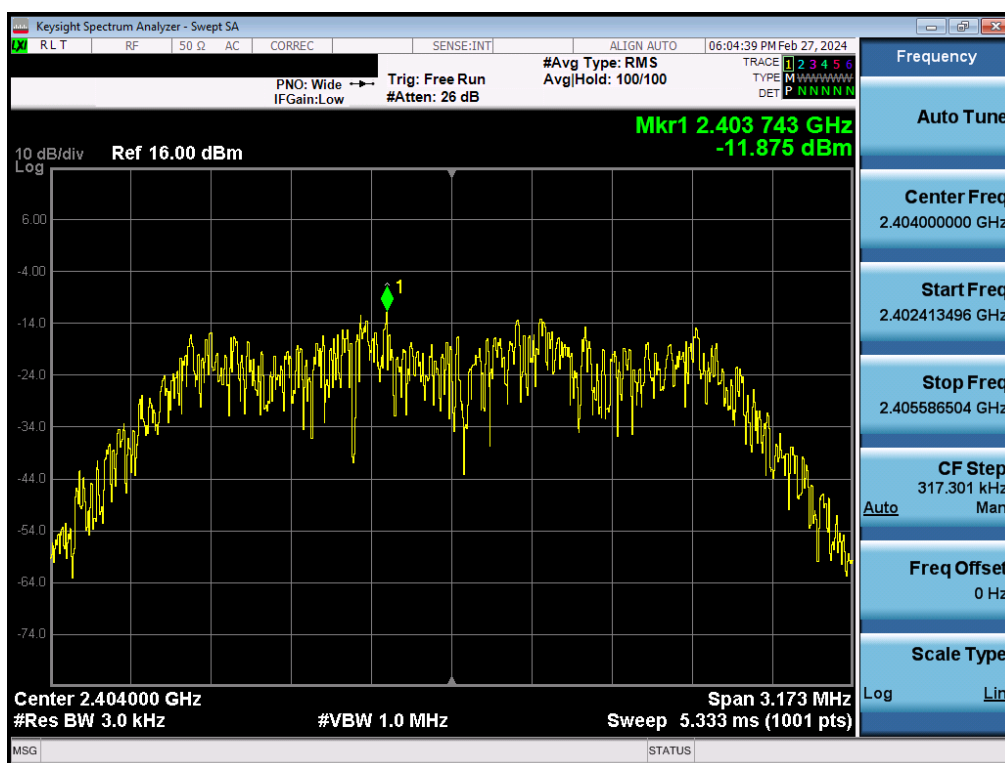

Plot 7-43. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

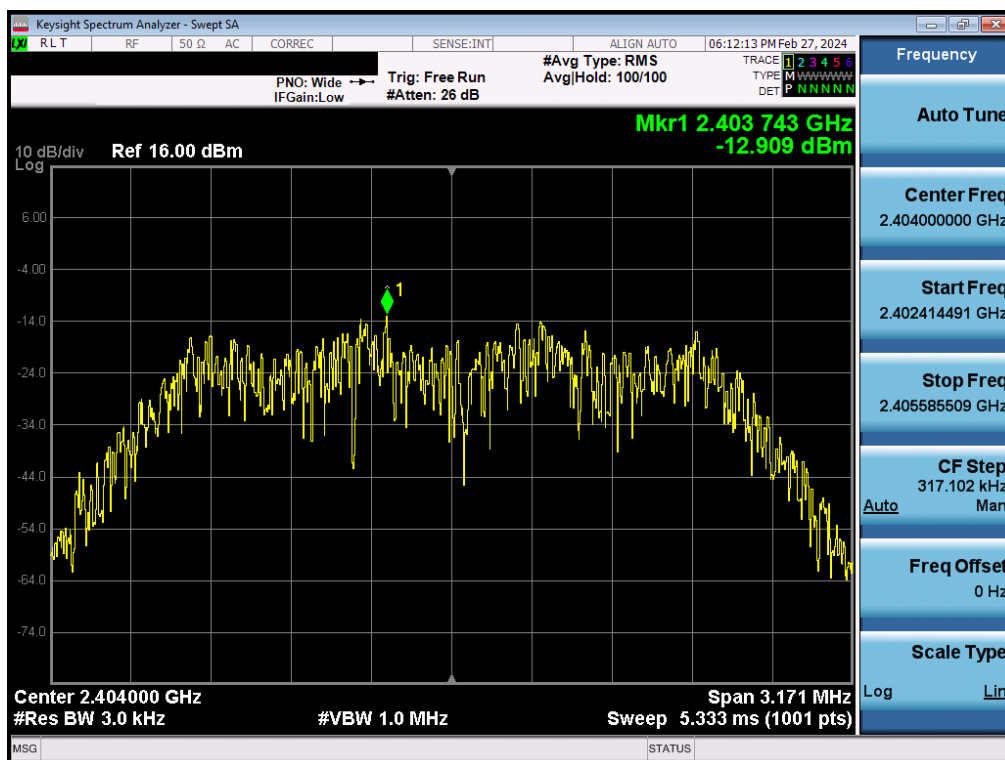


Plot 7-44. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 47 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

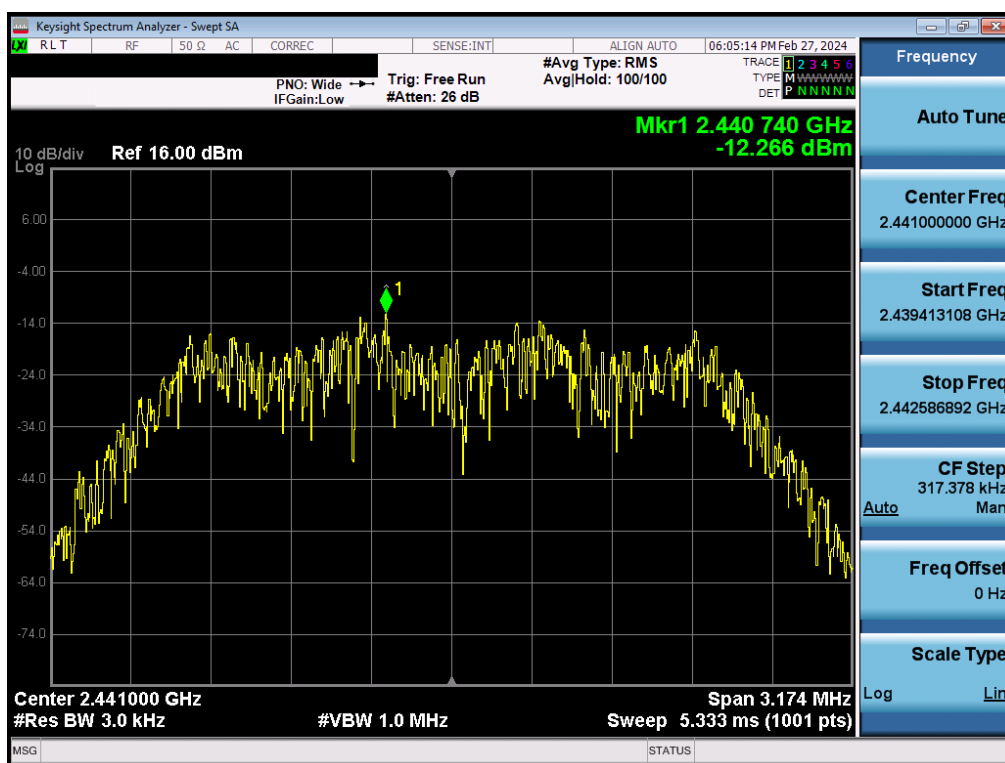


Plot 7-45. Power Spectral Density Plot TxBF Antenna 4a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

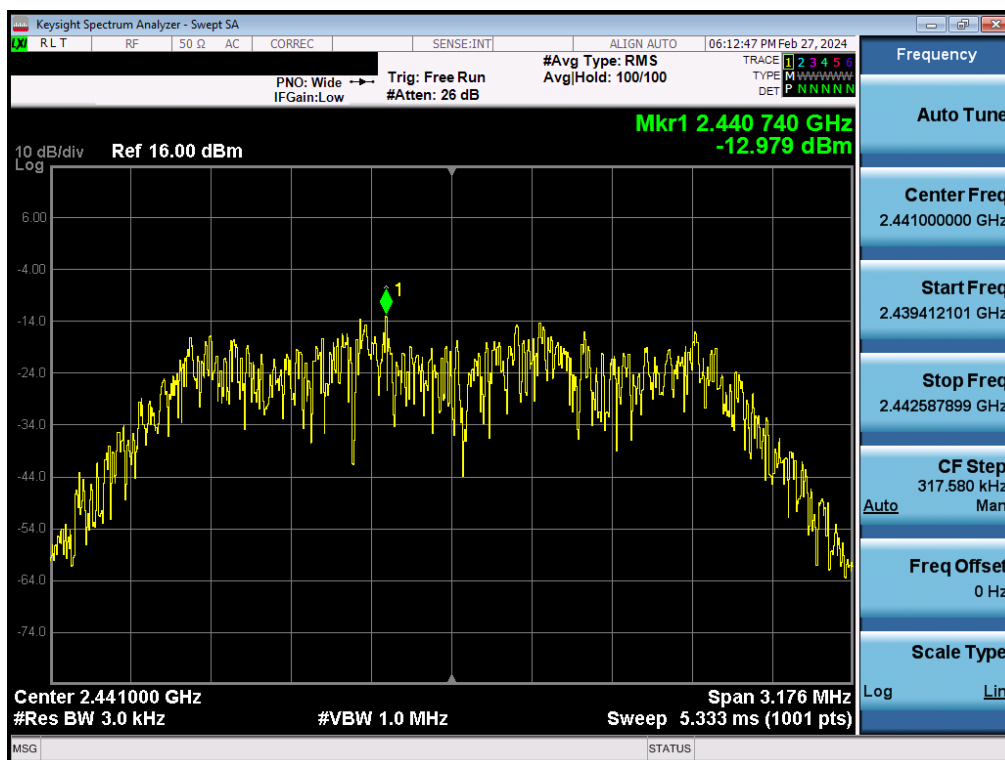


Plot 7-46. Power Spectral Density Plot TxBF Antenna 2a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 48 of 103

V 10.6 09/14/2023

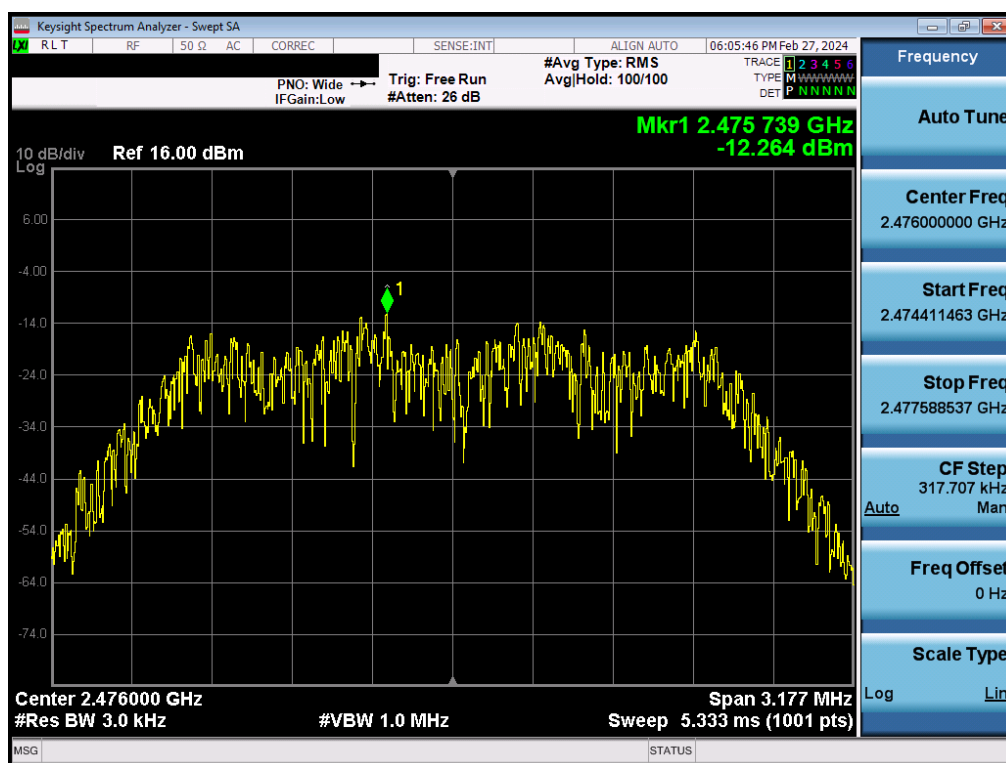

Plot 7-47. Power Spectral Density Plot TxBF Antenna 4a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)

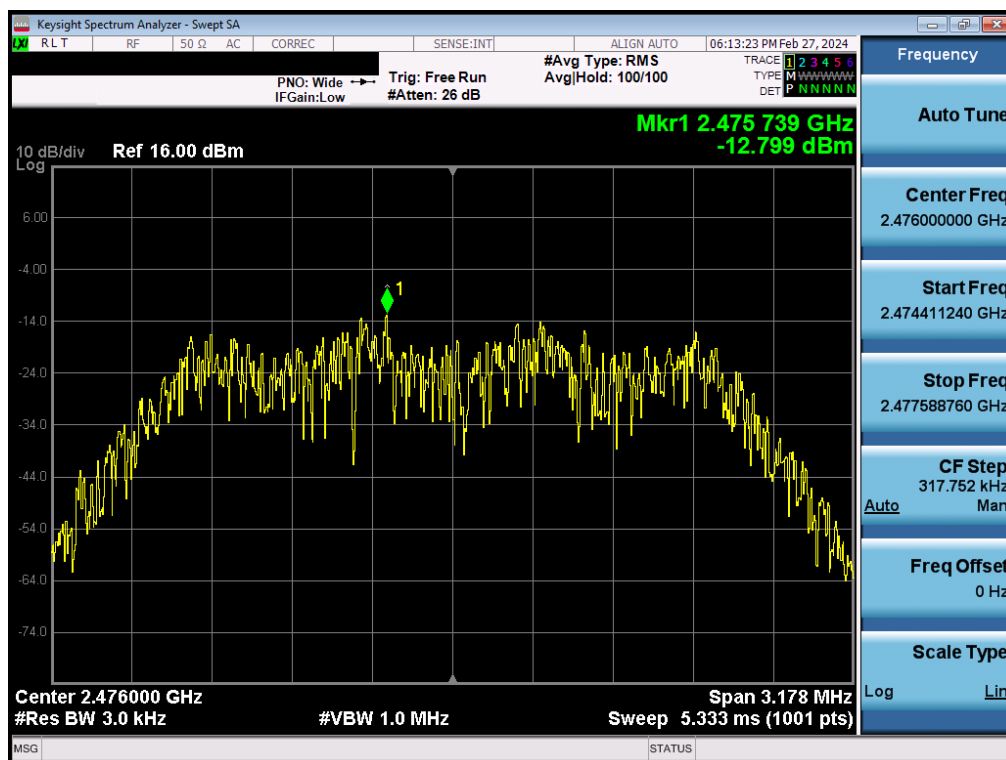


Plot 7-48. Power Spectral Density Plot TxBF Antenna 2a (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 49 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

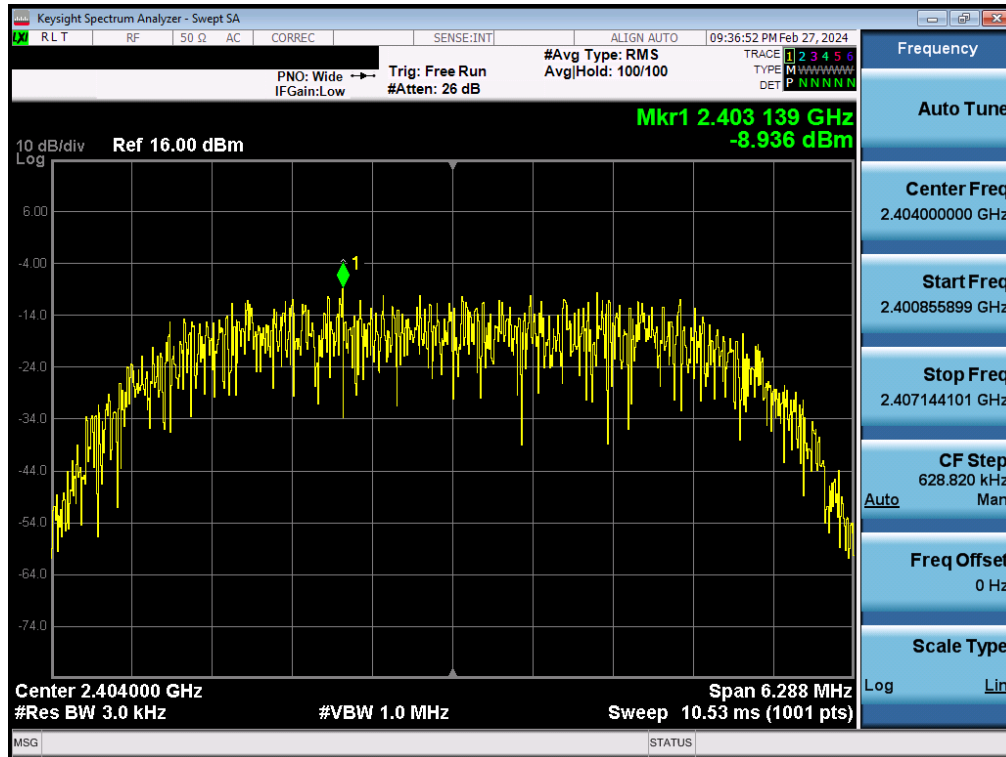


Plot 7-49. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

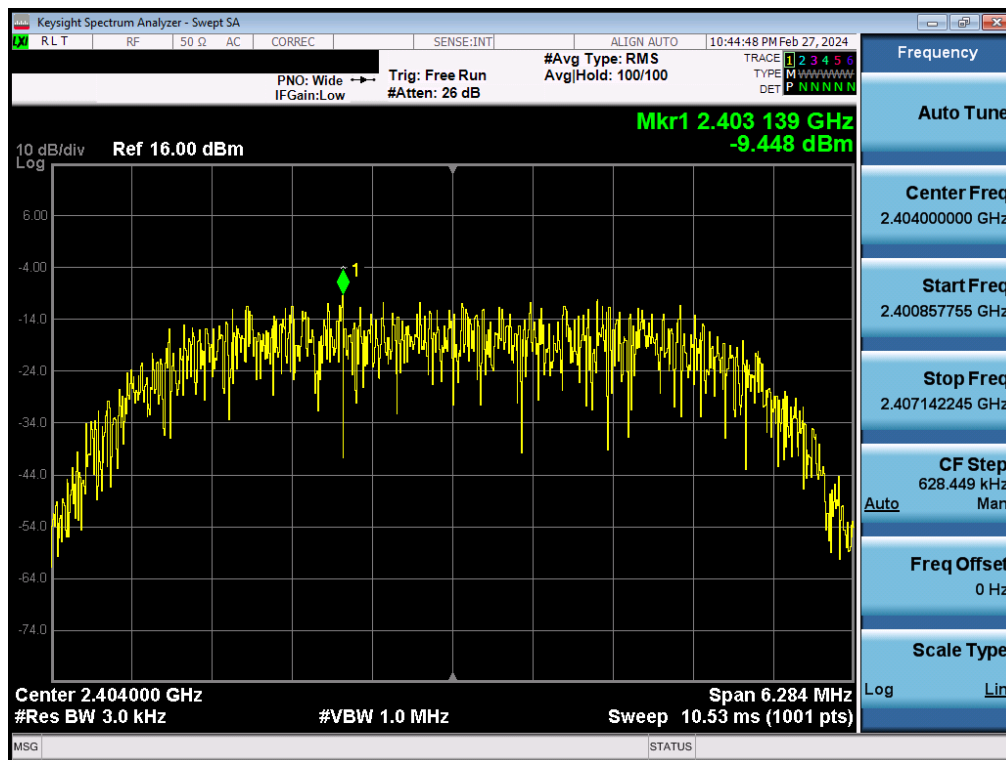


Plot 7-50. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 50 of 103

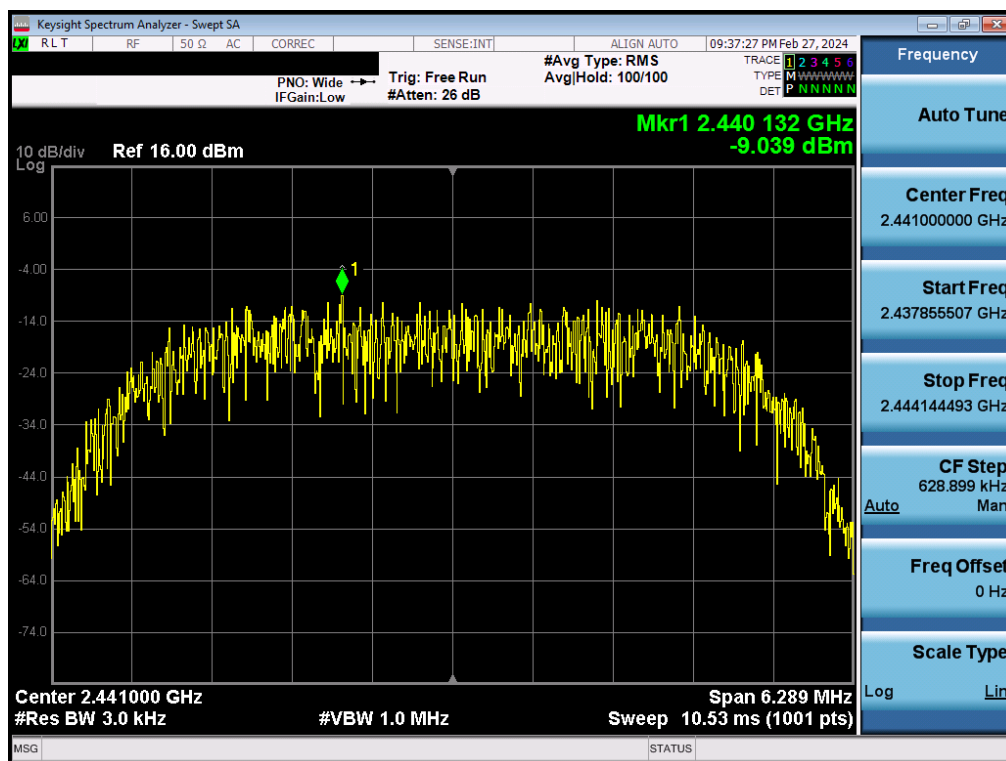

Plot 7-51. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

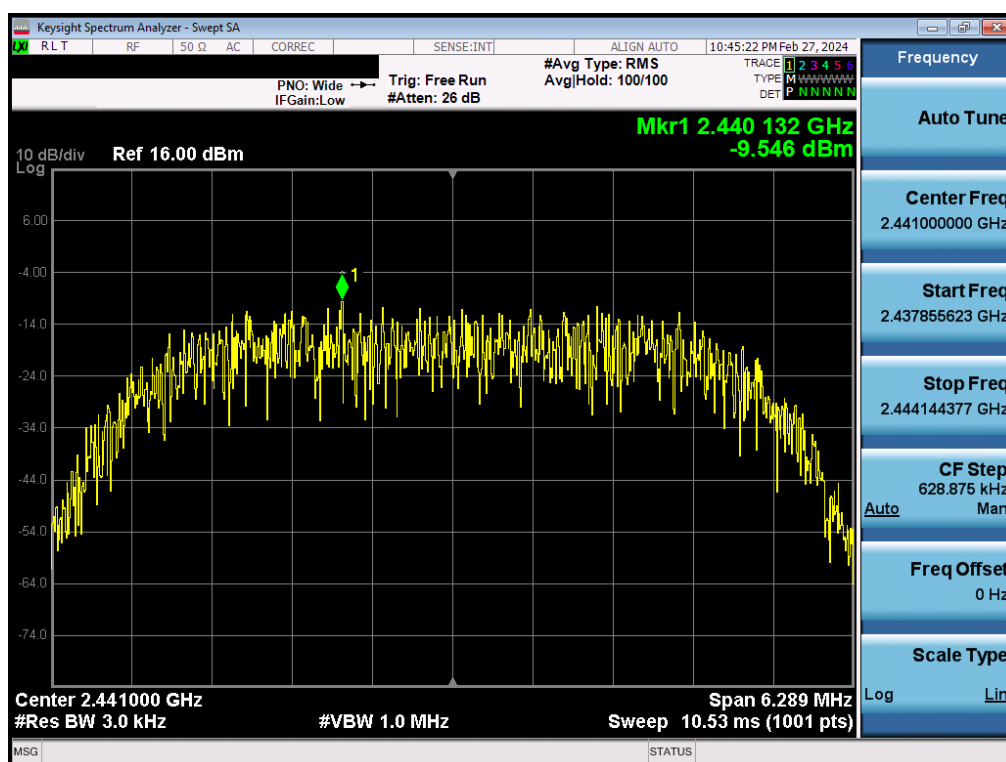


Plot 7-52. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 51 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

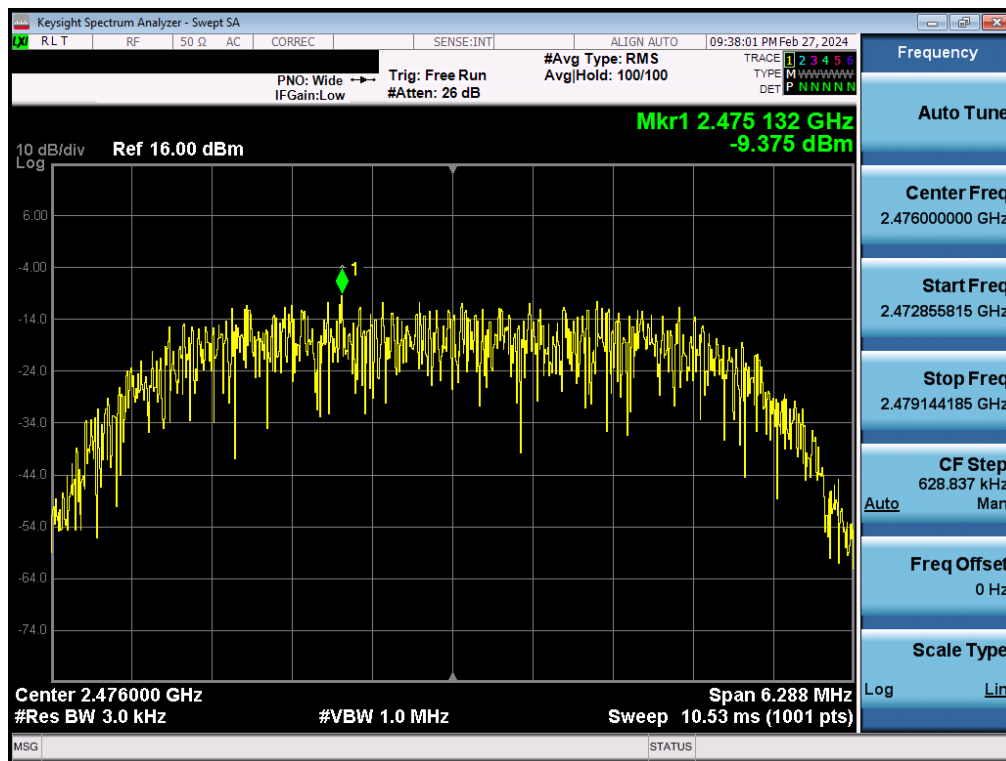

Plot 7-53. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

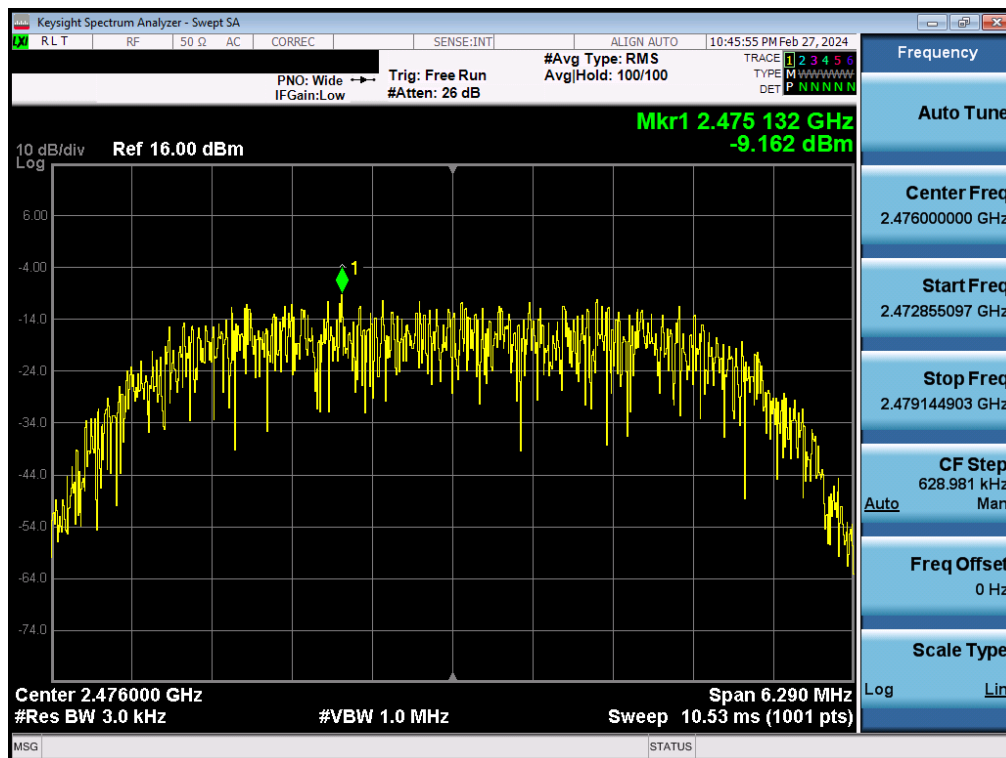


Plot 7-54. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 52 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

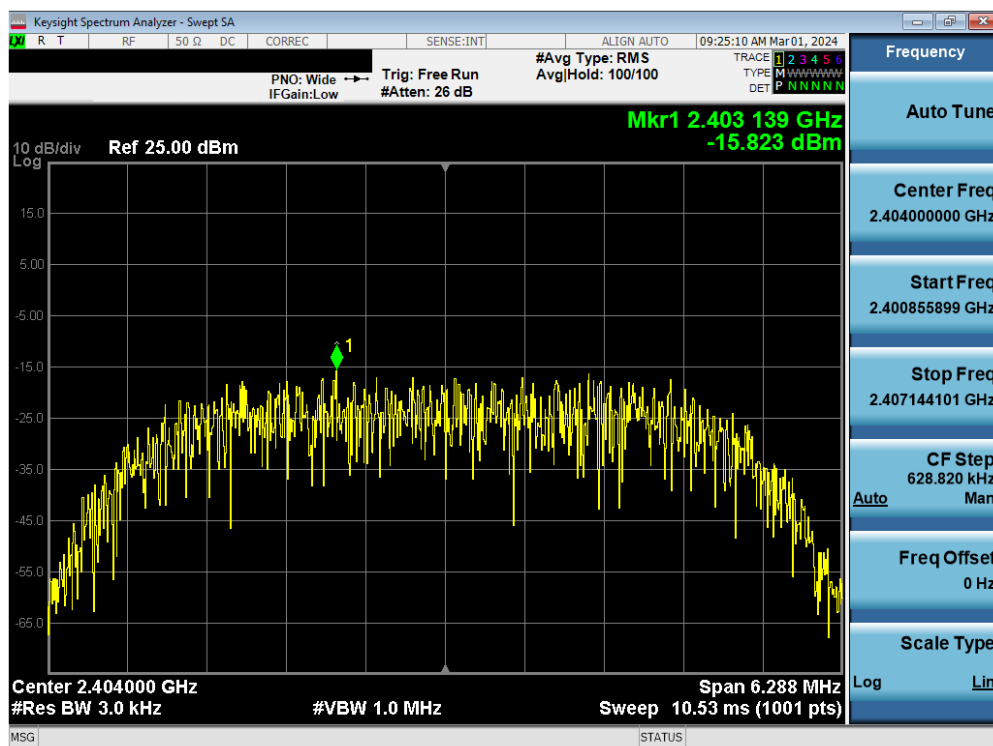

Plot 7-55. Power Spectral Density Plot Tx BF Antenna 4a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

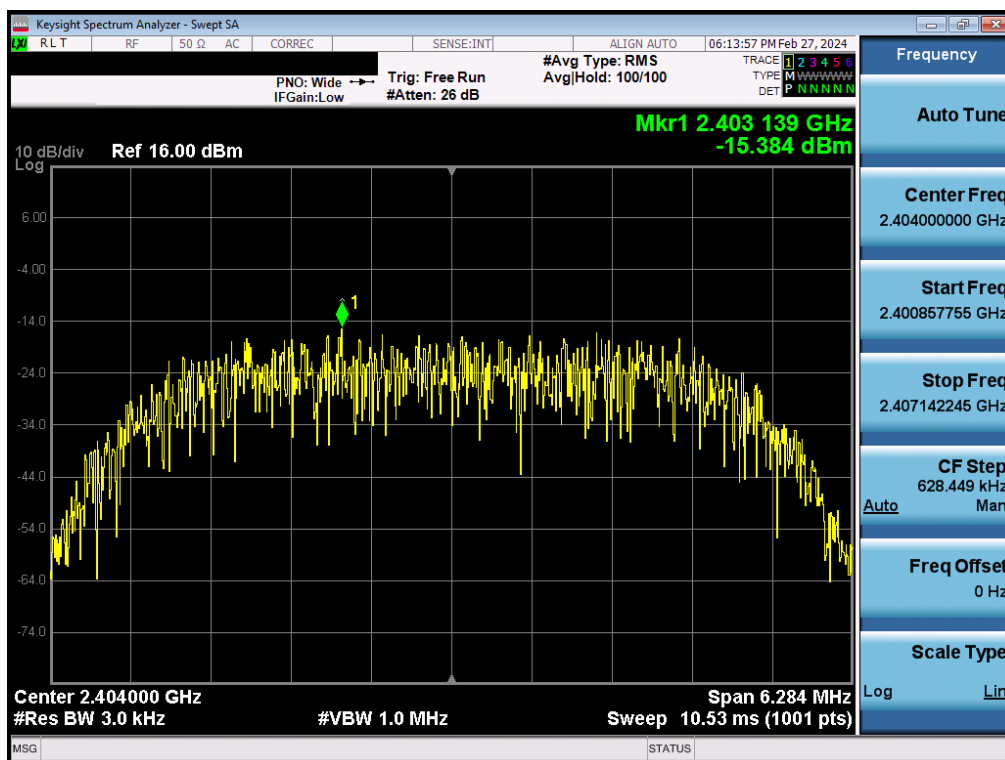


Plot 7-56. Power Spectral Density Plot Tx BF Antenna 2a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 53 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

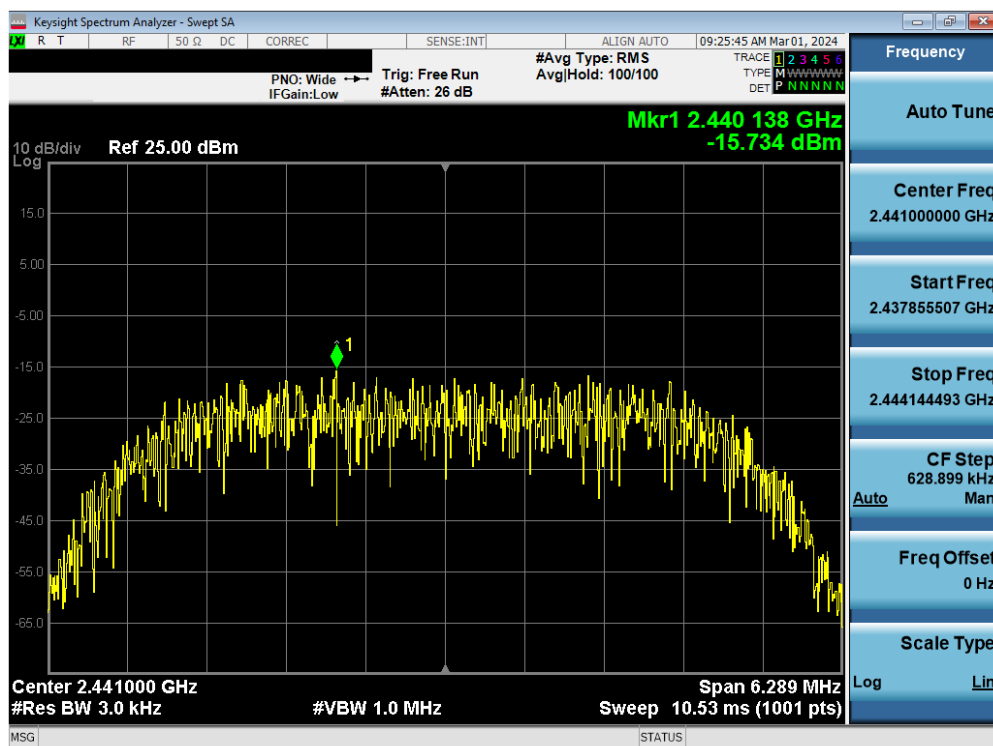

Plot 7-57. Power Spectral Density Plot TxBF Antenna 4a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

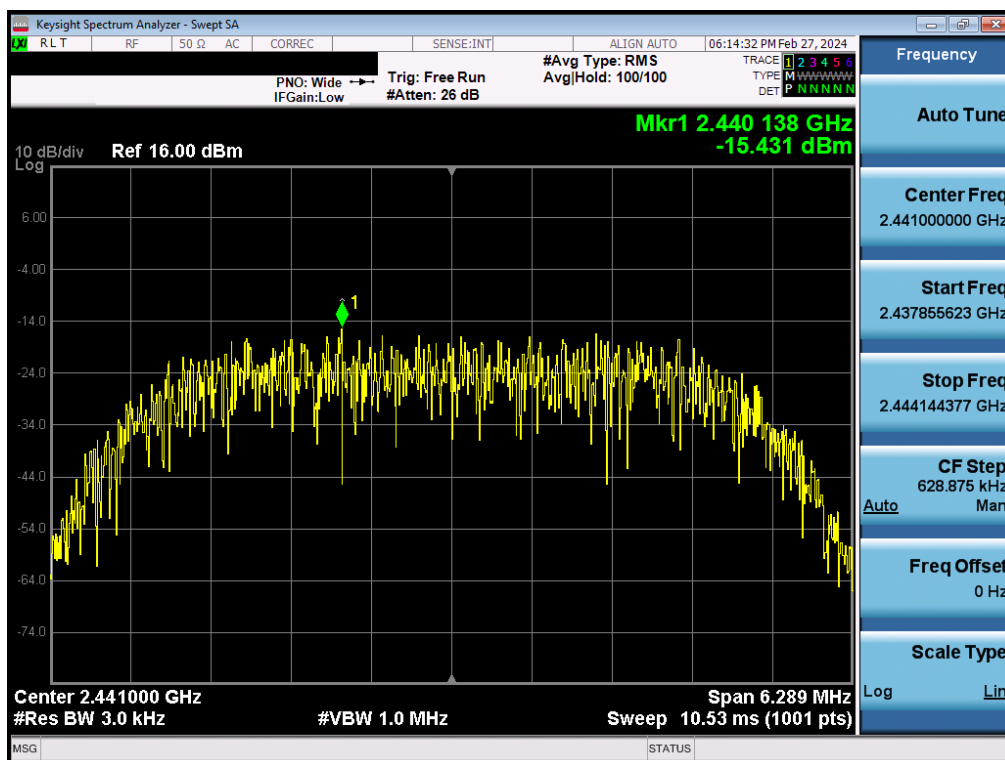


Plot 7-58. Power Spectral Density Plot TxBF Antenna 2a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 54 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

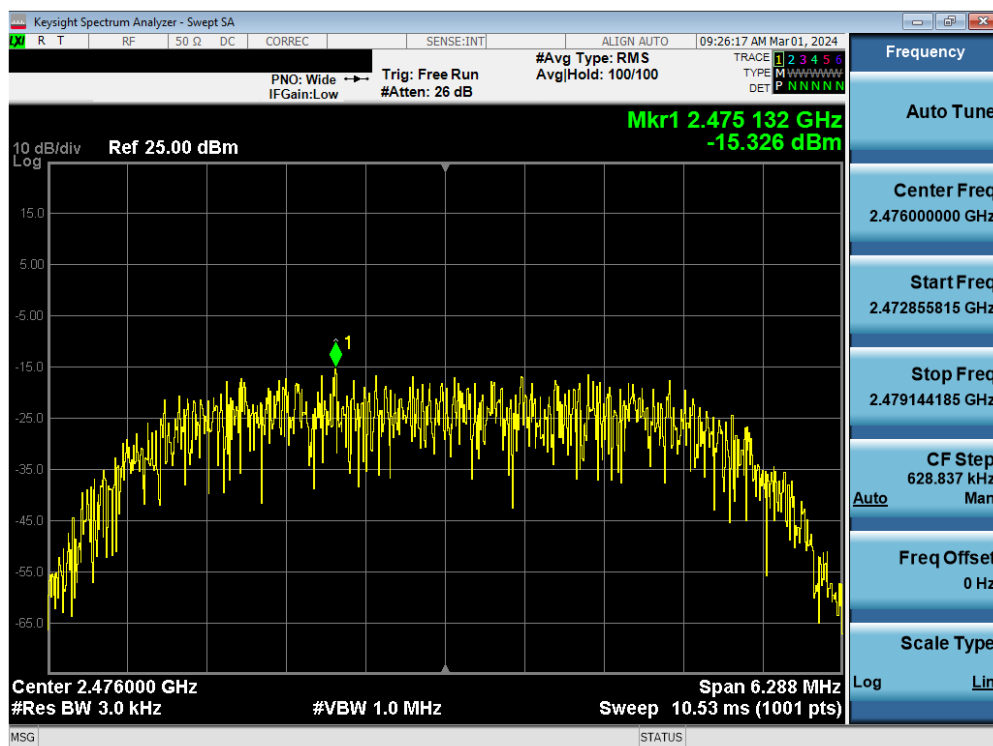

Plot 7-59. Power Spectral Density Plot TxBF Antenna 4a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

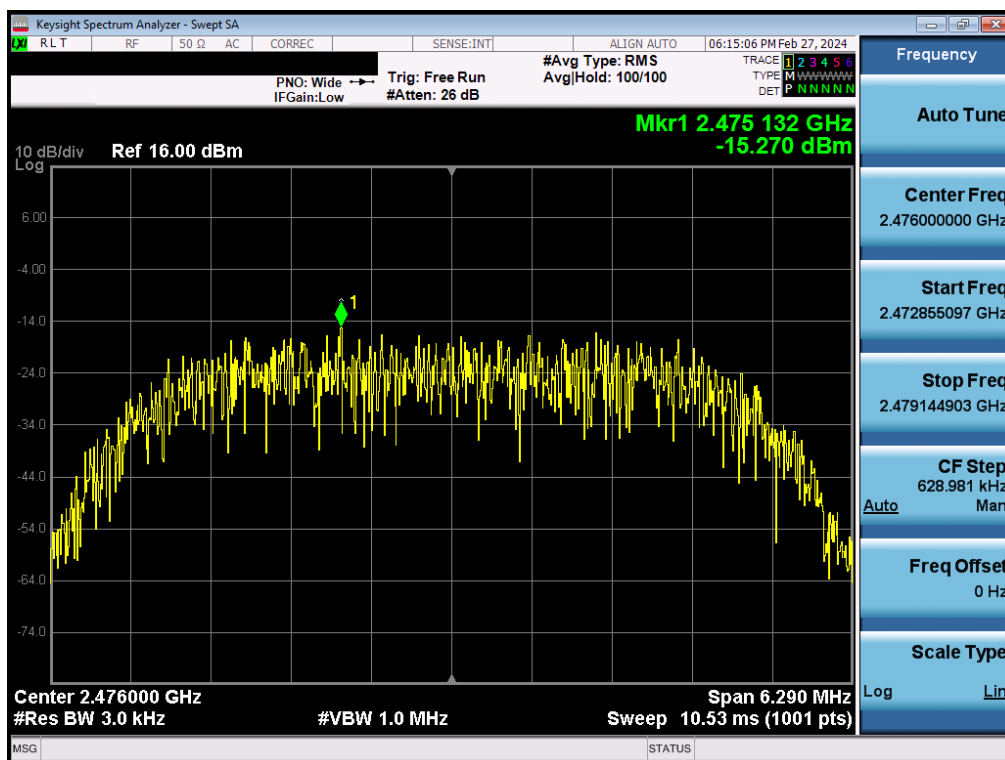

Plot 7-60. Power Spectral Density Plot TxBF Antenna 2a (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 55 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Note:

Per ANSI C63.10-2013 Subclause 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 4a and Antenna 2a were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample TxBF Calculation:

At 2404MHz the average conducted power spectral density was measured to be -6.75 dBm for Antenna 4a and -6.79 dBm for Antenna 2a.

$$\text{Antenna 4a} + \text{Antenna 2a} = \text{TxBF}$$

$$(-6.75 \text{ dBm} + -6.79 \text{ dBm}) = (0.211 \text{ mW} + 0.209 \text{ mW}) = 0.42 \text{ mW} = -3.76 \text{ dBm}$$

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 56 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Conducted Authorized Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

For the following out of band conducted spurious emissions plots at the band edge, the EUT was set to transmit at maximum power with the largest packet size available. These settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.11.3

KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 57 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna 4a

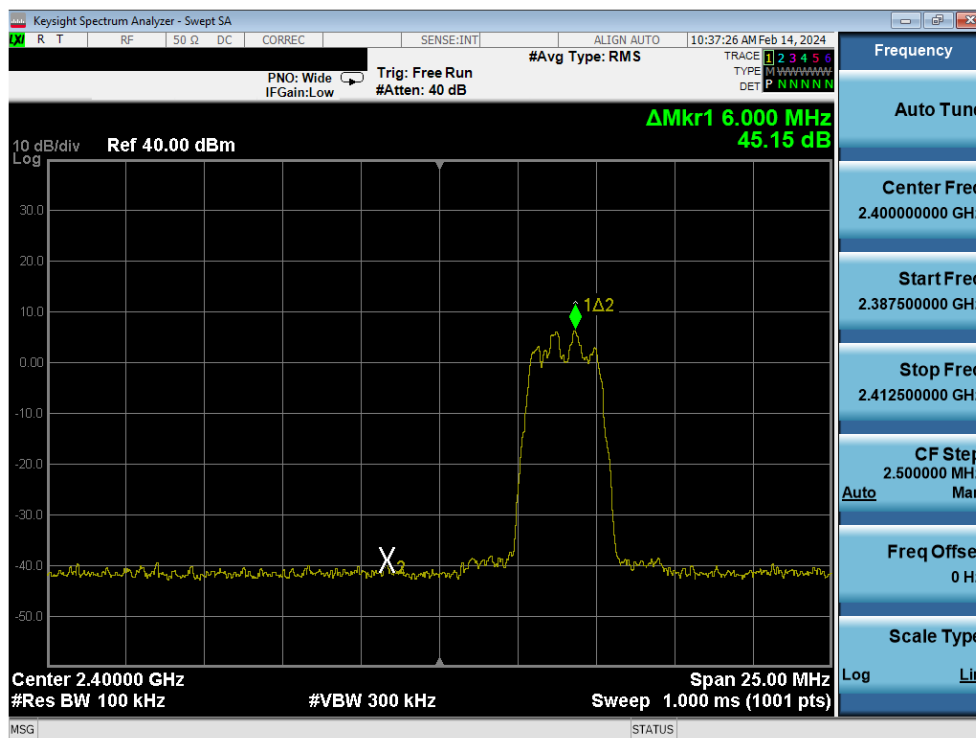

Plot 7-61. Band Edge Plot Antenna 4a (Bluetooth (HDR4), ePA – Ch. 1)

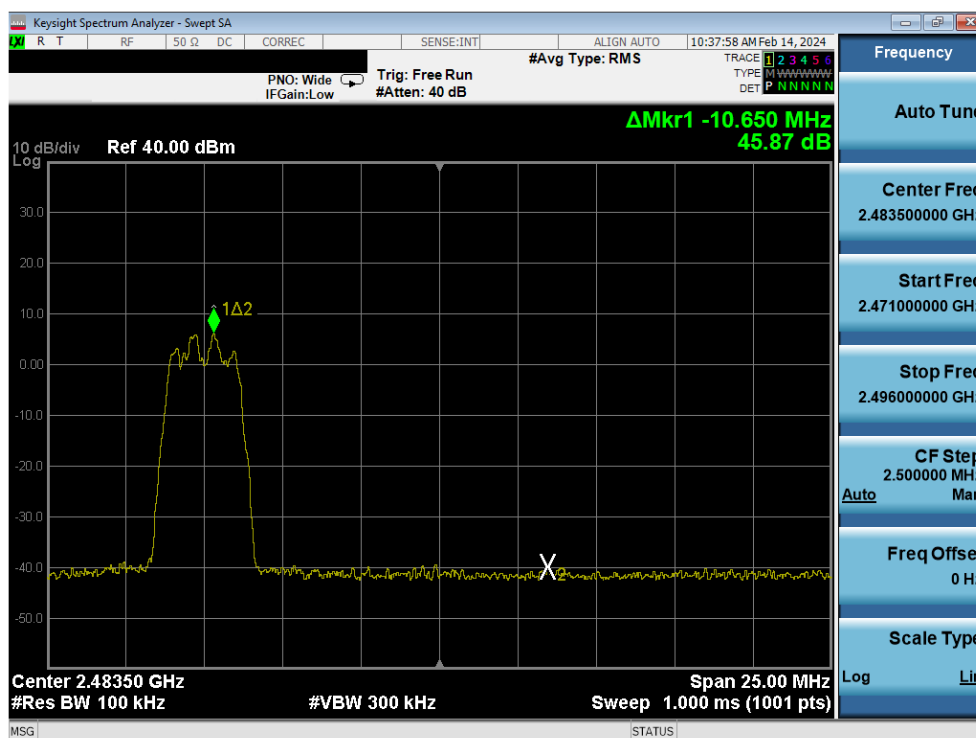


Plot 7-62. Band Edge Plot Antenna 4a (Bluetooth (HDR4), ePA – Ch. 73)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 58 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

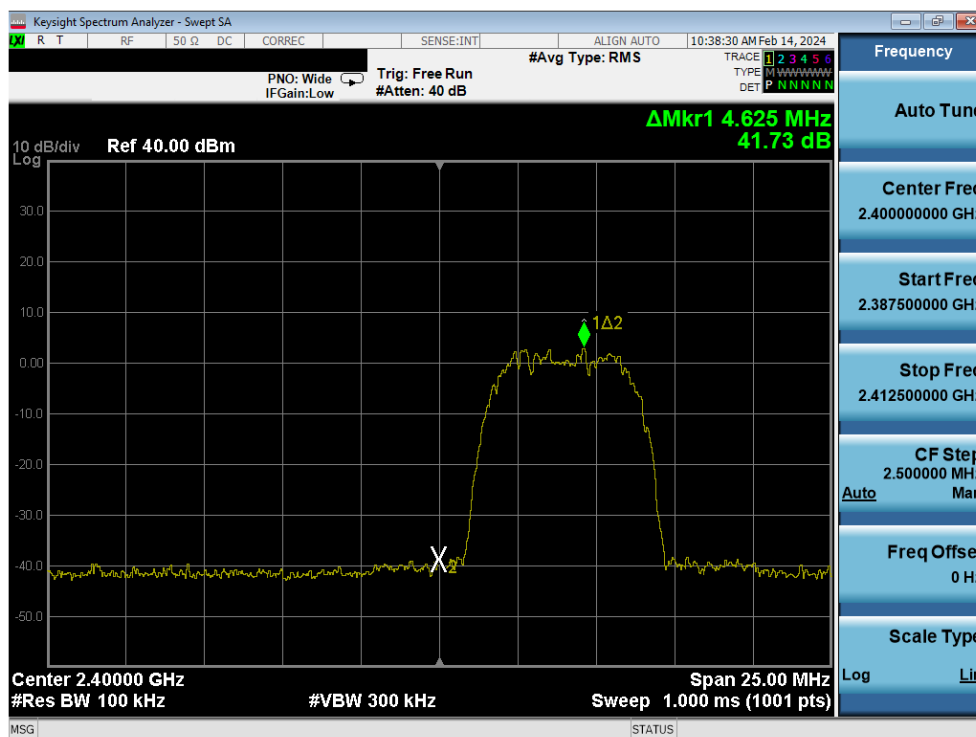

Plot 7-63. Band Edge Plot Antenna 4a (Bluetooth (HDR8), ePA – Ch. 1)

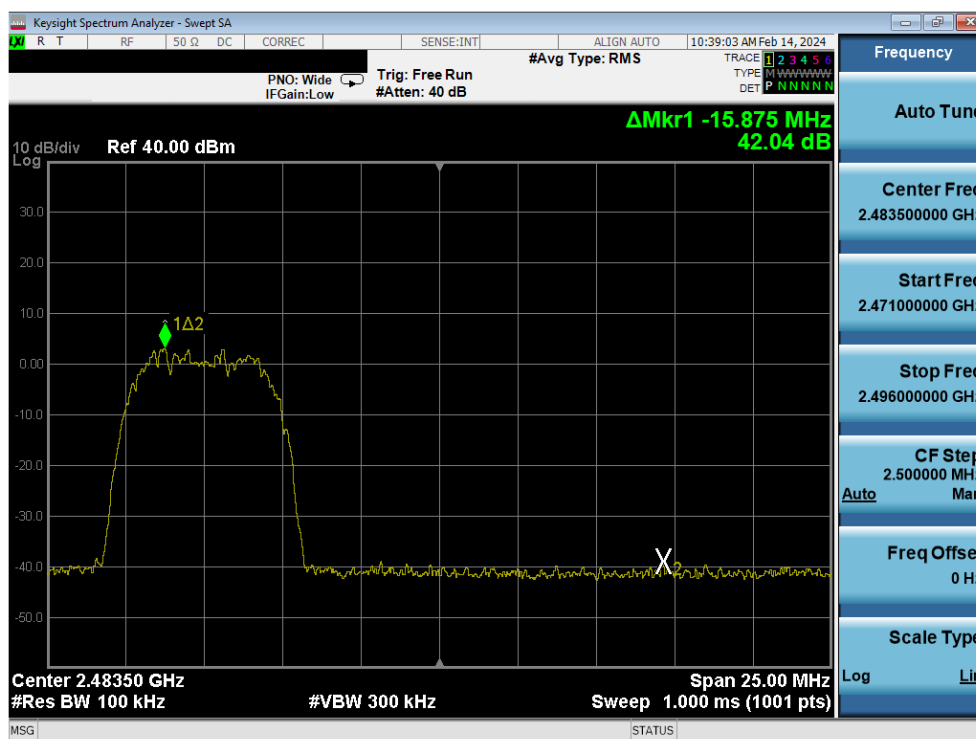


Plot 7-64. Band Edge Plot Antenna 4a (Bluetooth (HDR8), ePA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 59 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna 2a

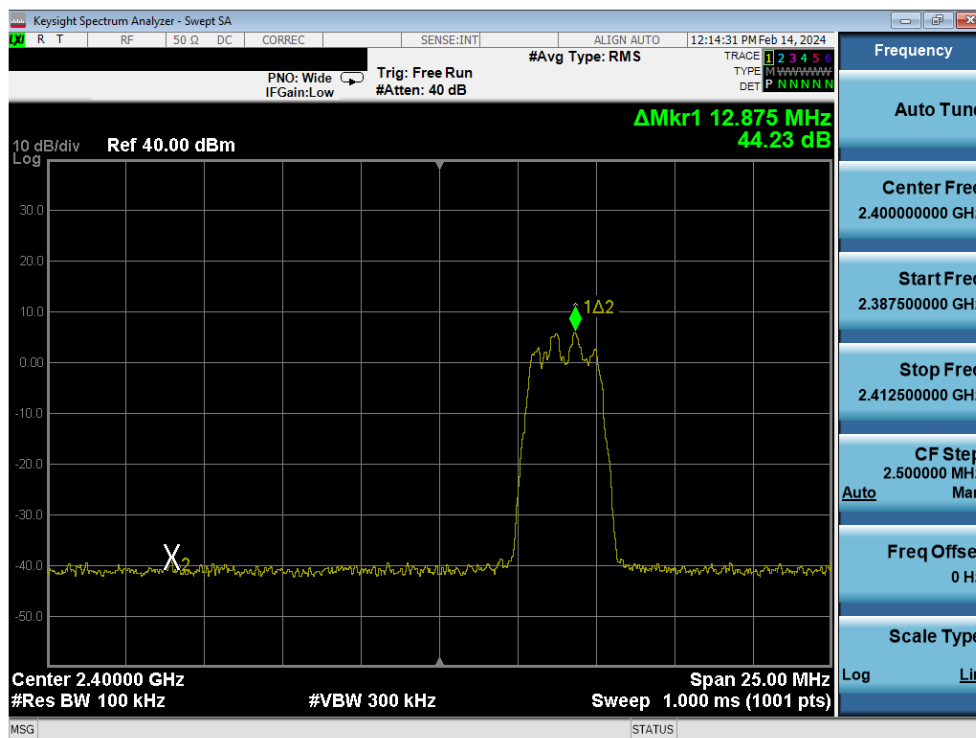

Plot 7-65. Band Edge Plot Antenna 2a (Bluetooth (HDR4), ePA – Ch. 1)

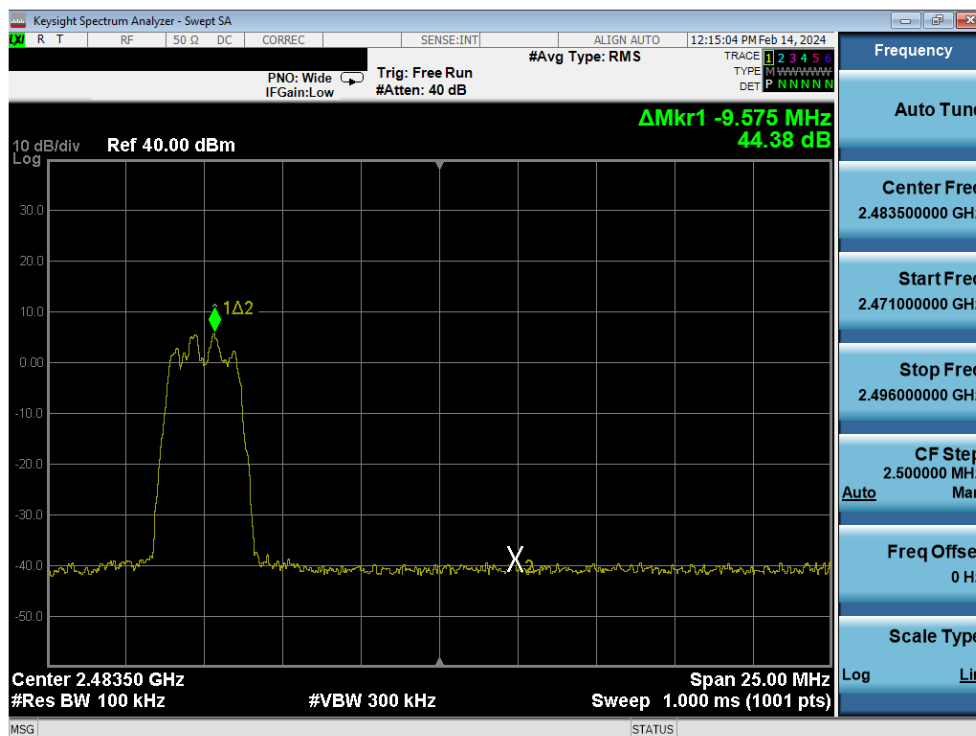


Plot 7-66. Band Edge Plot Antenna 2a (Bluetooth (HDR4), ePA – Ch. 73)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 60 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

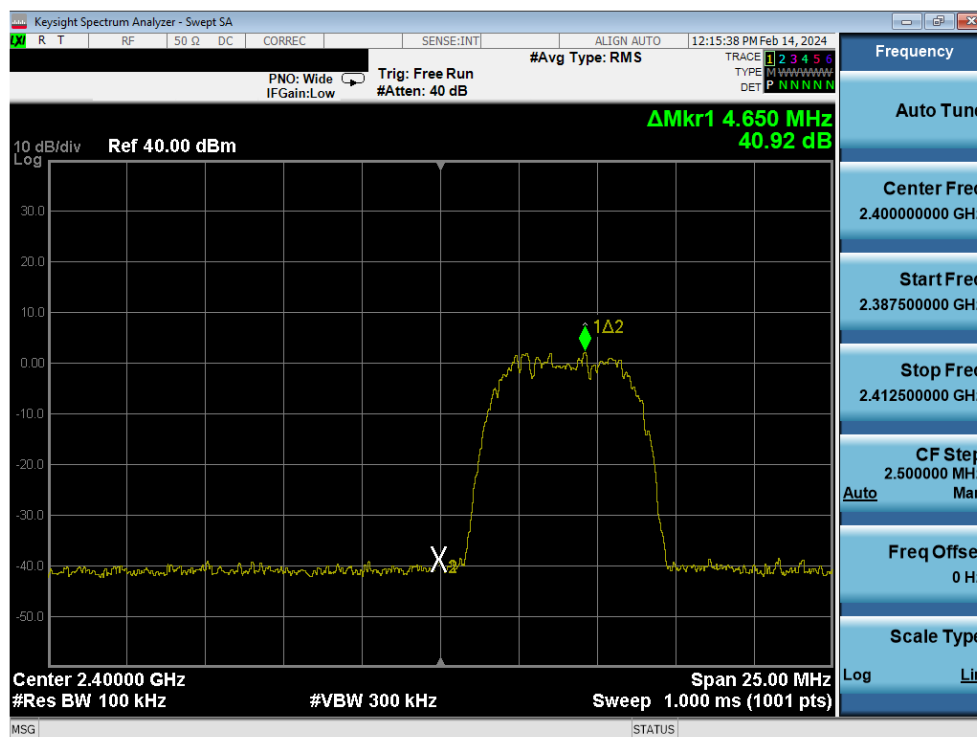

Plot 7-67. Band Edge Plot Antenna 2a (Bluetooth (HDR8), ePA – Ch. 1)

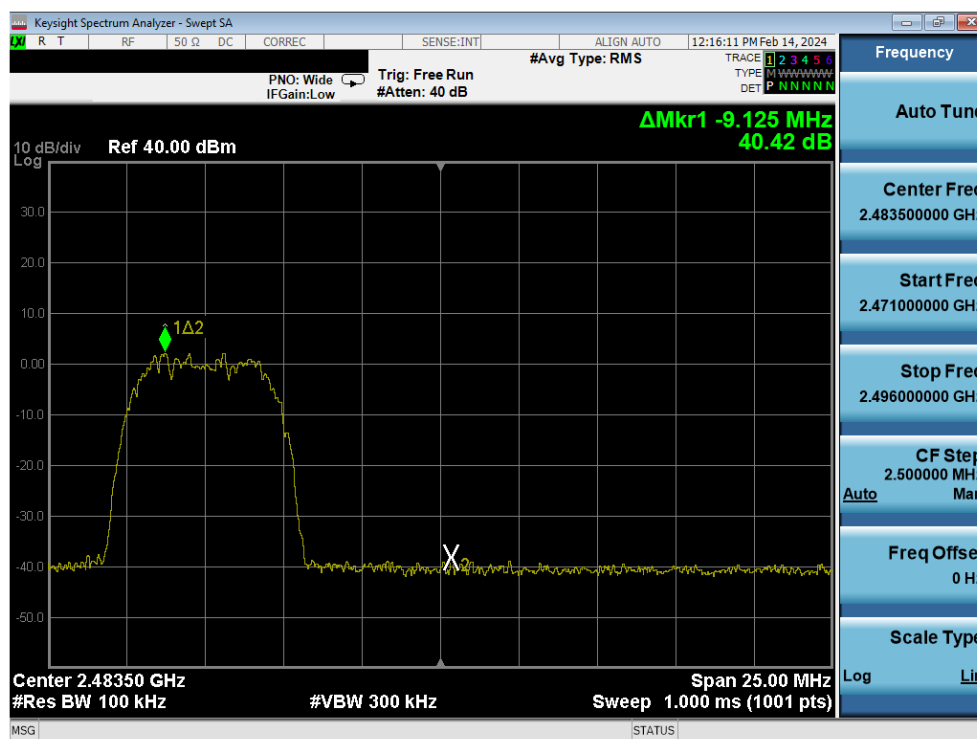

Plot 7-68. Band Edge Plot Antenna 2a (Bluetooth (HDR8), ePA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 61 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 8.5 of KDB 558074 D01 v05r02 and Subclause 11.11 of ANSI C63.10-2013.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 62 of 103

V 10.6 09/14/2023

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst-case configuration is reported.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 63 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna 4a

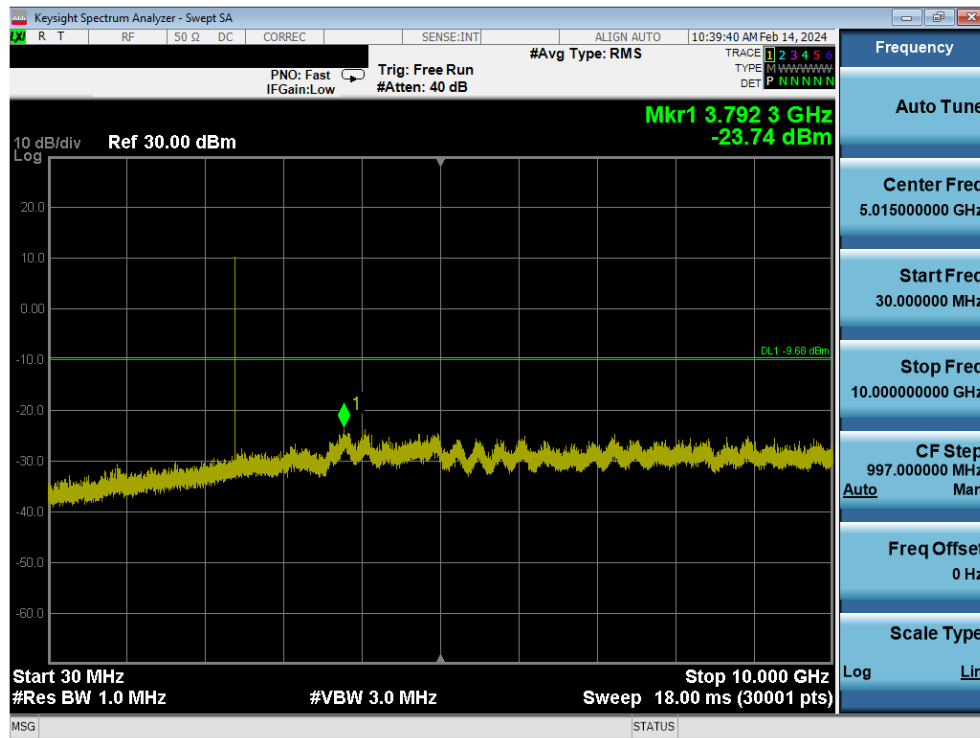

Plot 7-69. Conducted Spurious Plot Antenna 4a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

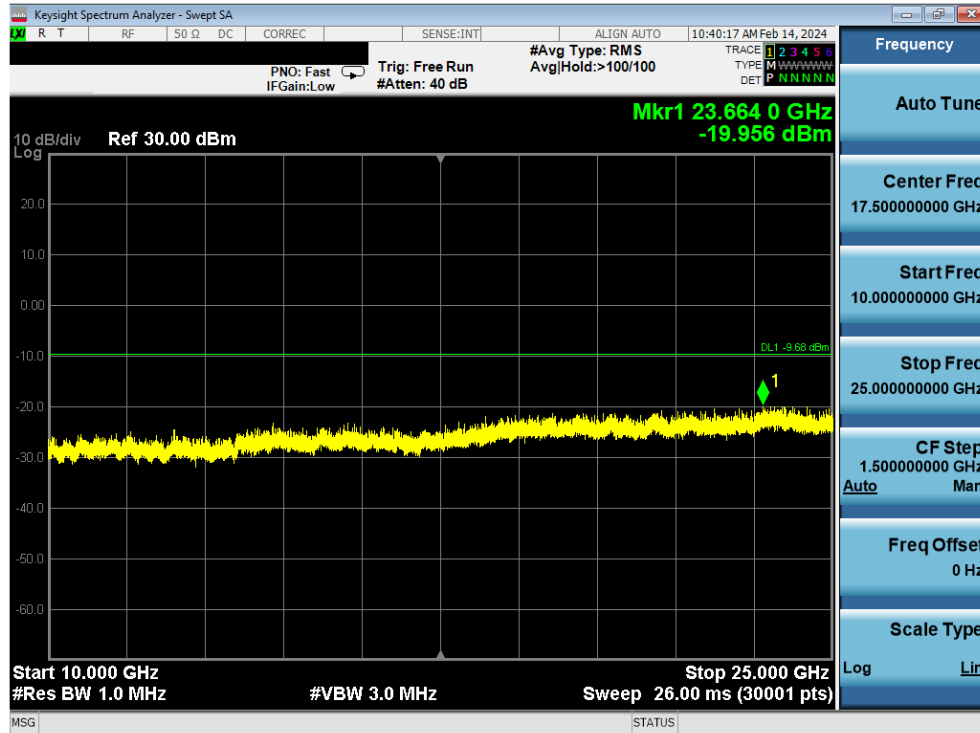


Plot 7-70. Conducted Spurious Plot Antenna 4a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 64 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

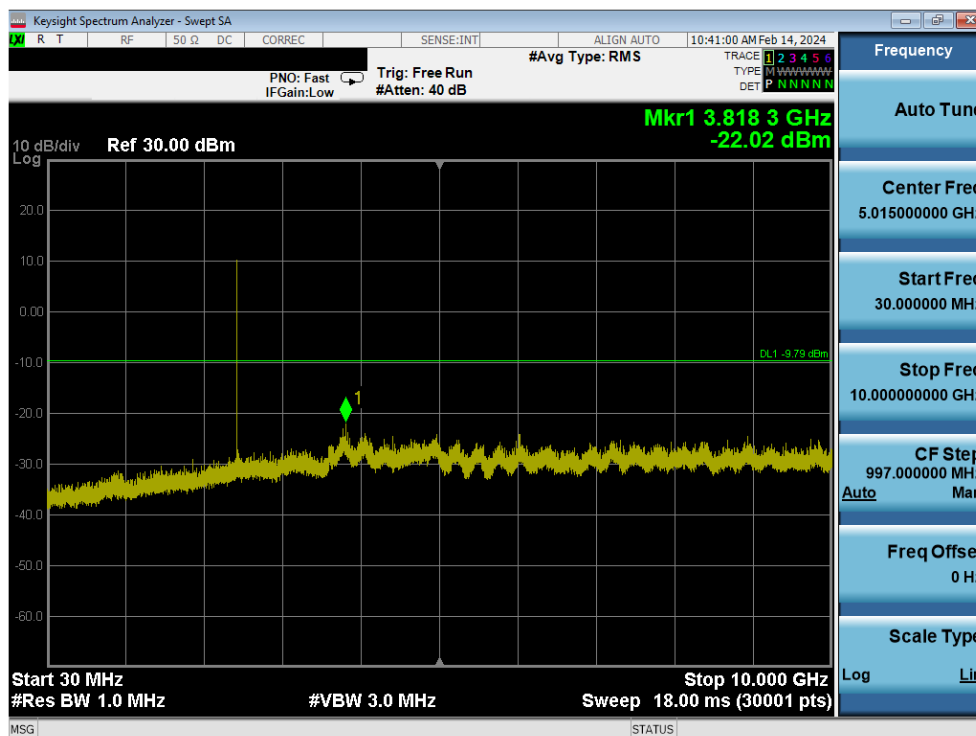

Plot 7-71. Conducted Spurious Plot Antenna 4a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

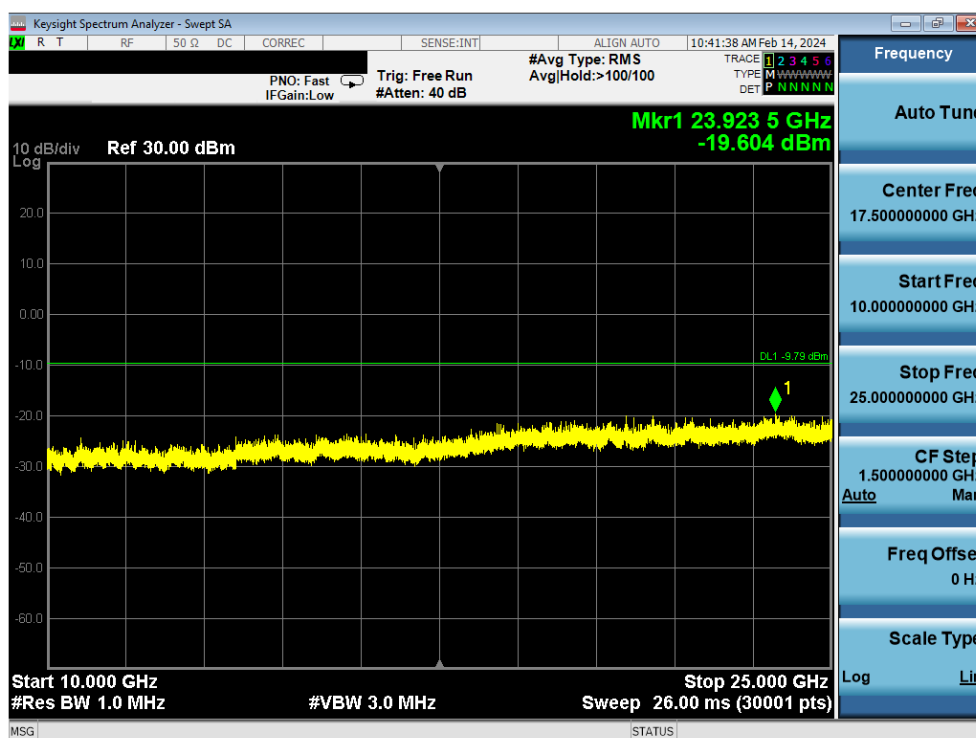


Plot 7-72. Conducted Spurious Plot Antenna 4a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 65 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

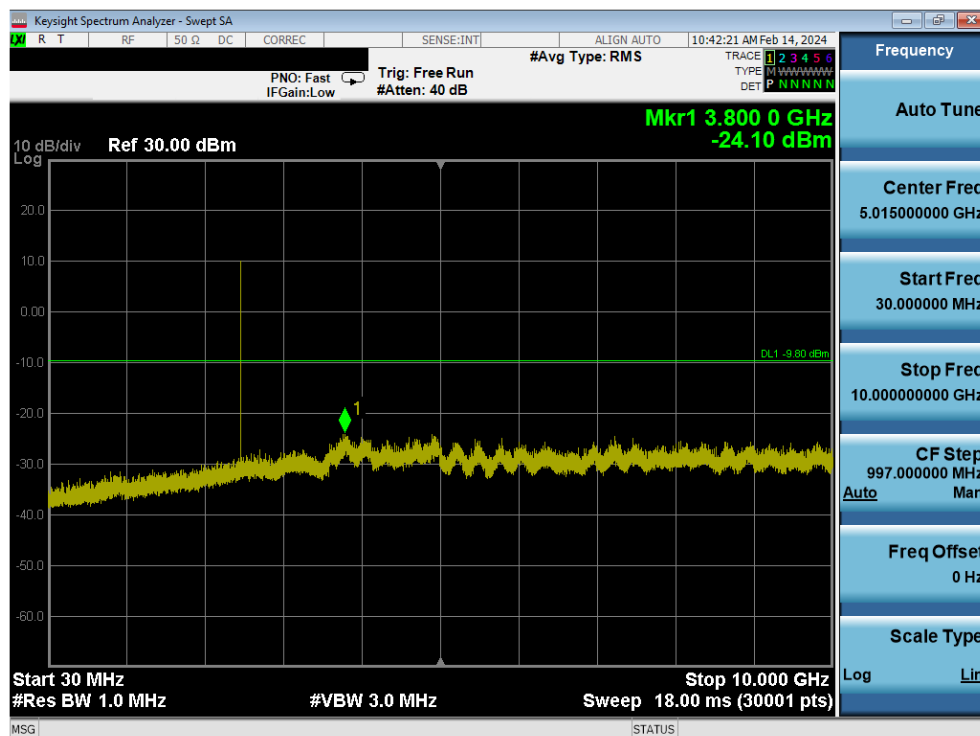


Plot 7-73. Conducted Spurious Plot Antenna 4a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

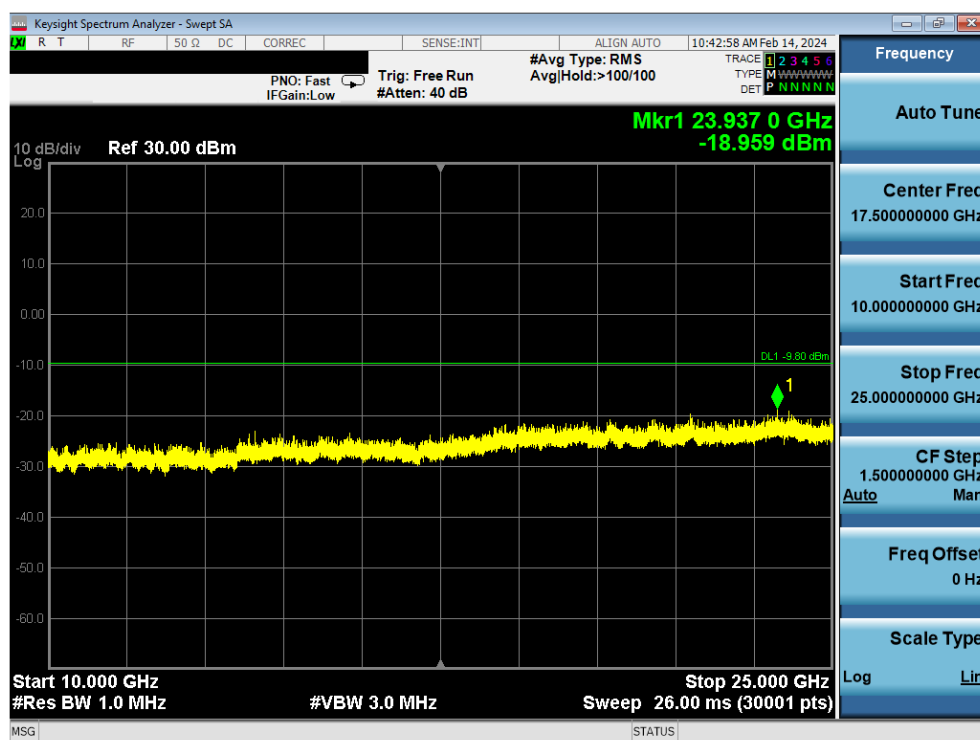


Plot 7-74. Conducted Spurious Plot Antenna 4a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 66 of 103

Antenna 2a

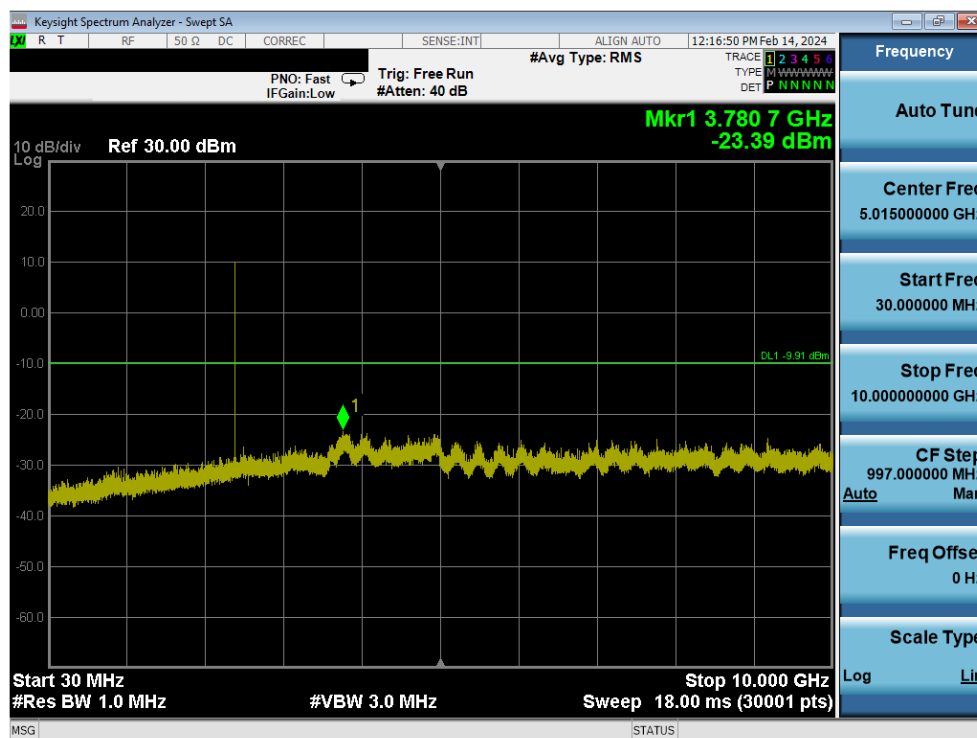

Plot 7-75. Conducted Spurious Plot Antenna 2a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

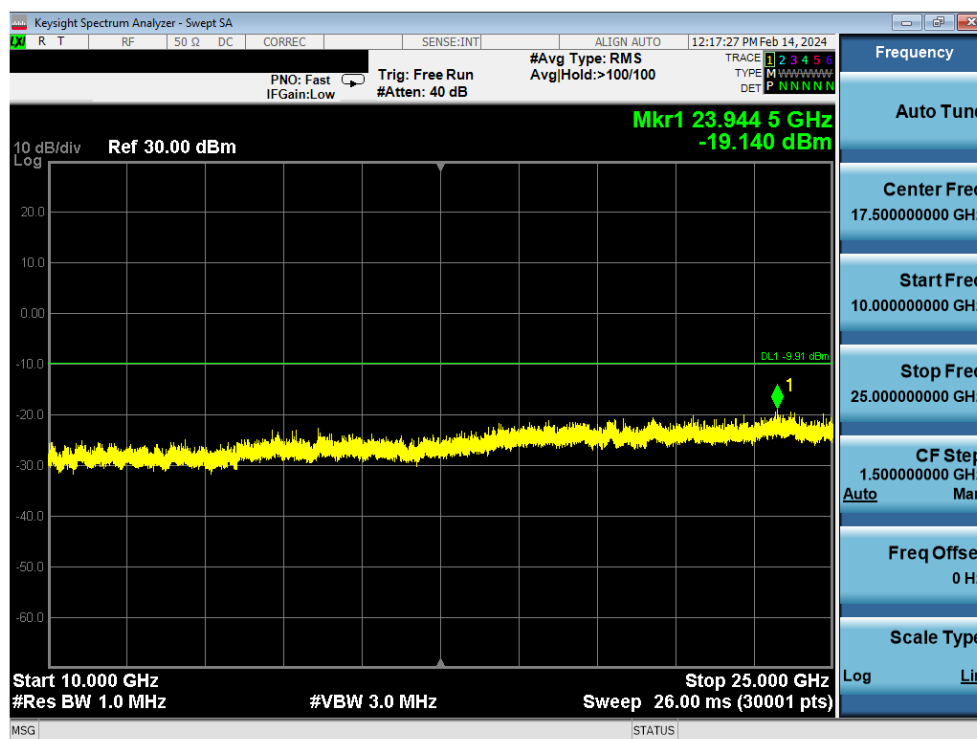


Plot 7-76. Conducted Spurious Plot Antenna 2a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 67 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

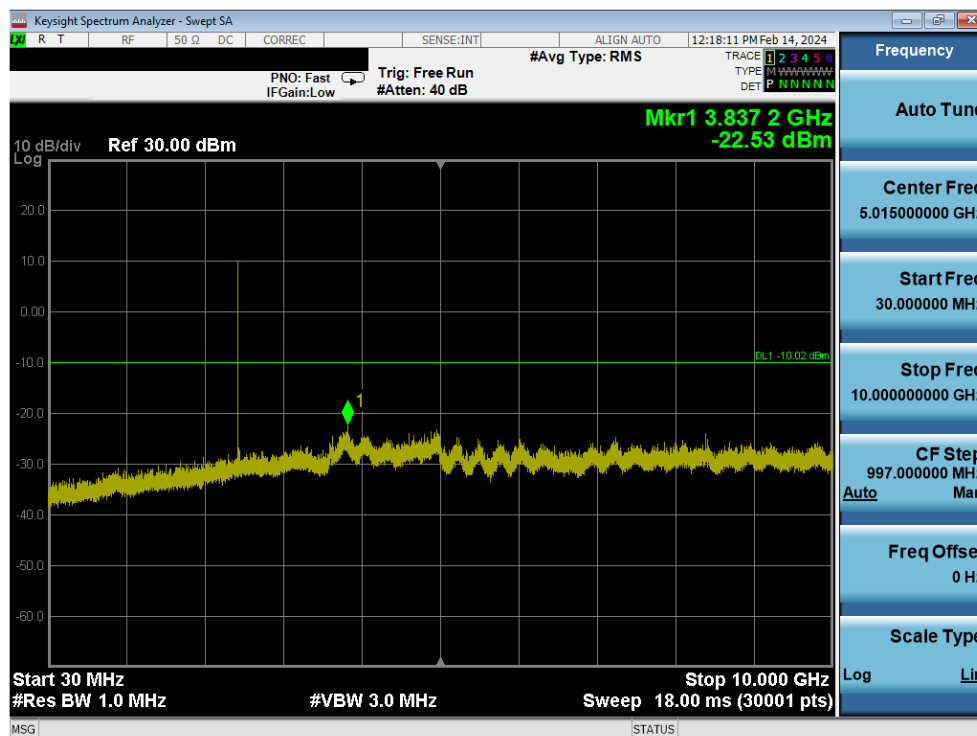

Plot 7-77. Conducted Spurious Plot Antenna 2a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

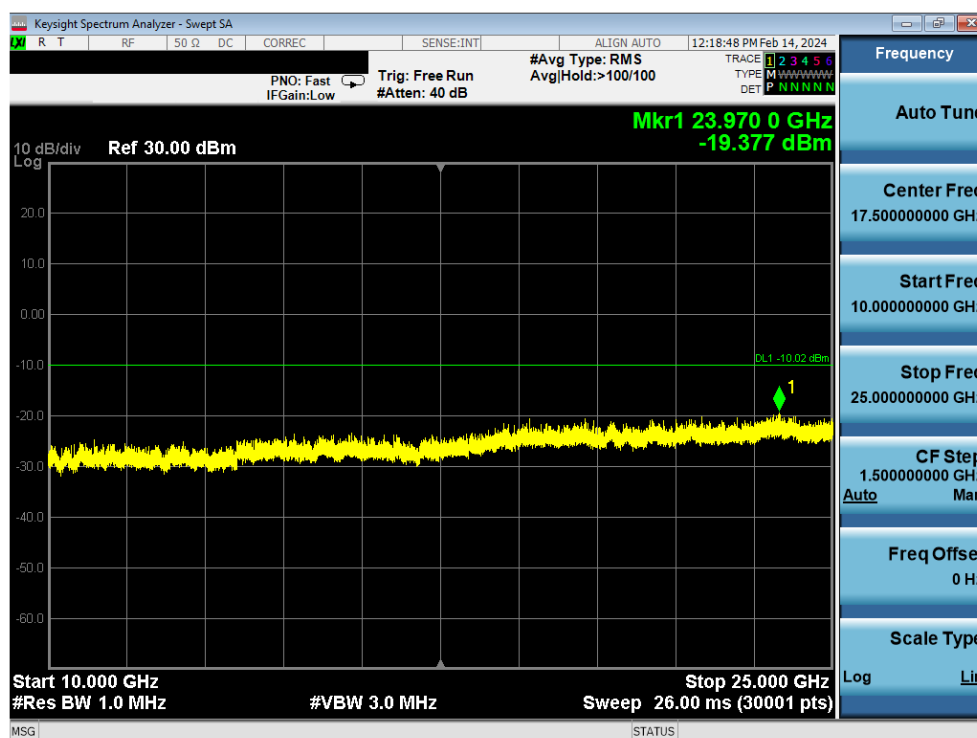


Plot 7-78. Conducted Spurious Plot Antenna 2a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 68 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

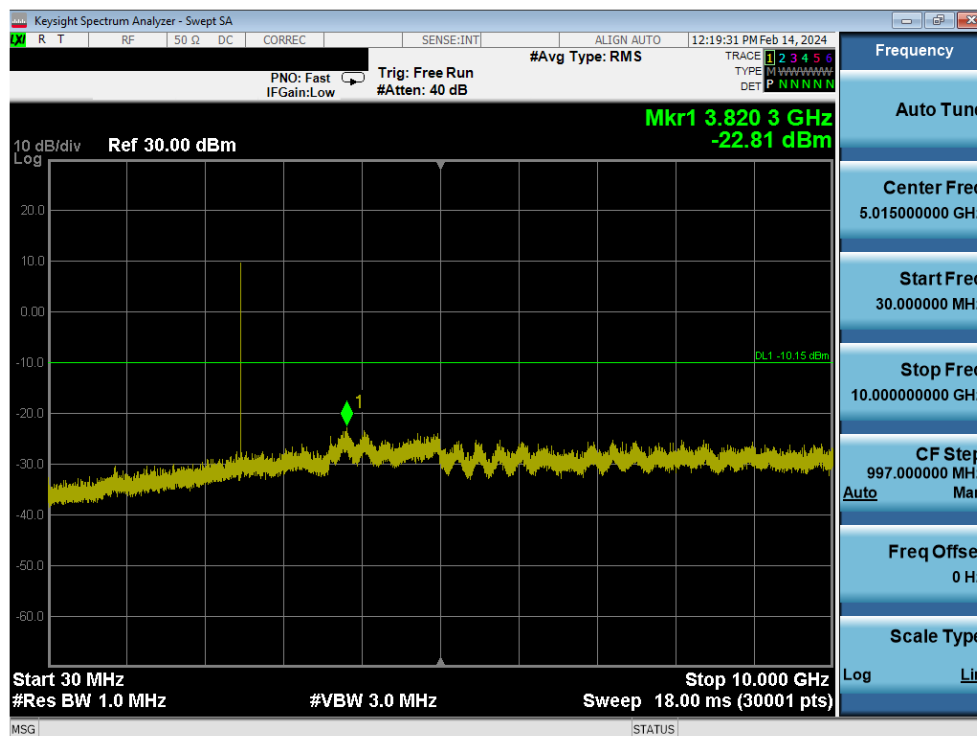

Plot 7-79. Conducted Spurious Plot Antenna 2a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

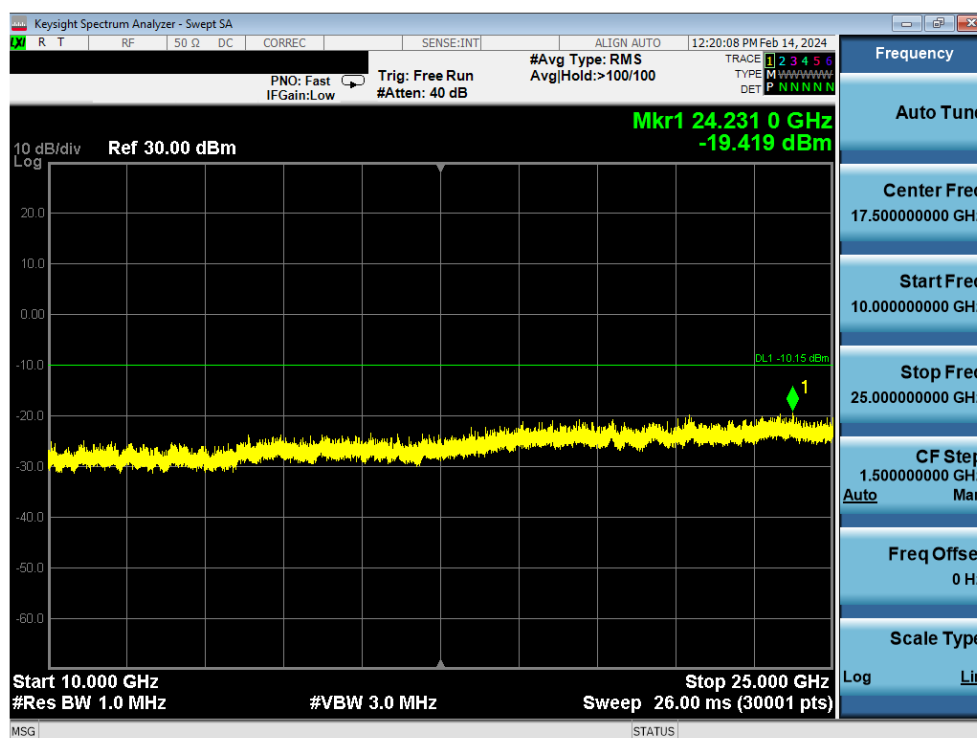

Plot 7-80. Conducted Spurious Plot Antenna 2a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 69 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-13 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Subclause 6.6.4.3

KDB 558074 D01 v05r02 – Section 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 70 of 103

V 10.6 09/14/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

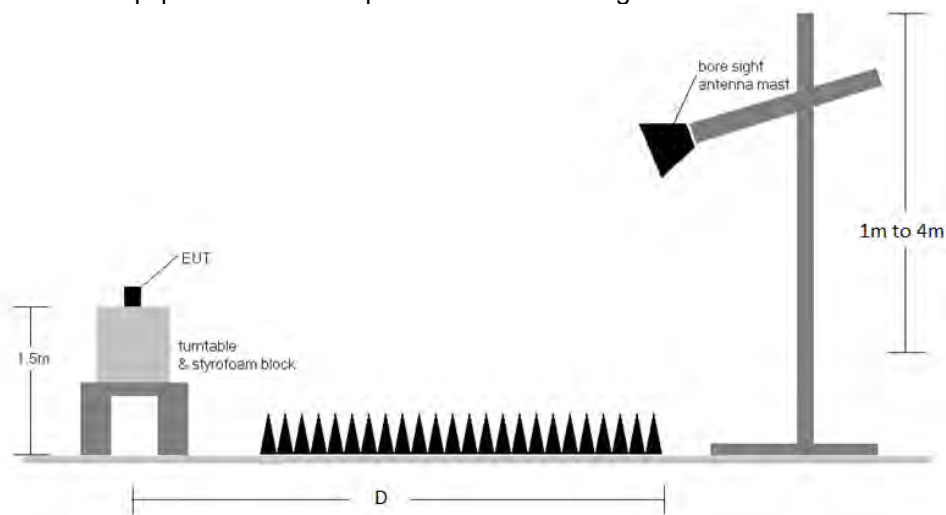


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-13.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 71 of 103

V 10.6 09/14/2023

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- o $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- o $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$

Radiated Band Edge Measurement Offset

- o The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.1 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 72 of 103

V 10.6 09/14/2023

Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 4a

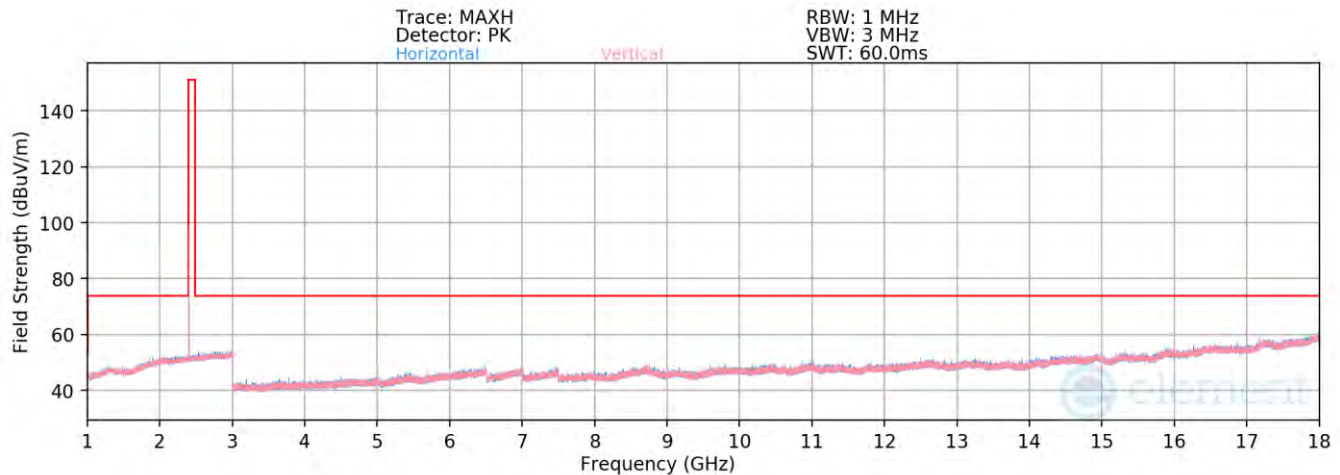

Plot 7-81. Radiated Spurious Emissions 1-18GHz Antenna 4a (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2404MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4808.00	Avg	-	-	-	-78.67	4.73	33.06	53.98	-20.92
4808.00	Peak	-	-	-	-66.50	4.73	45.23	73.98	-28.75
12020.00	Avg	-	-	-	-80.99	12.74	38.75	53.98	-15.23
12020.00	Peak	-	-	-	-69.37	12.74	50.37	73.98	-23.61

Table 7-14. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 73 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

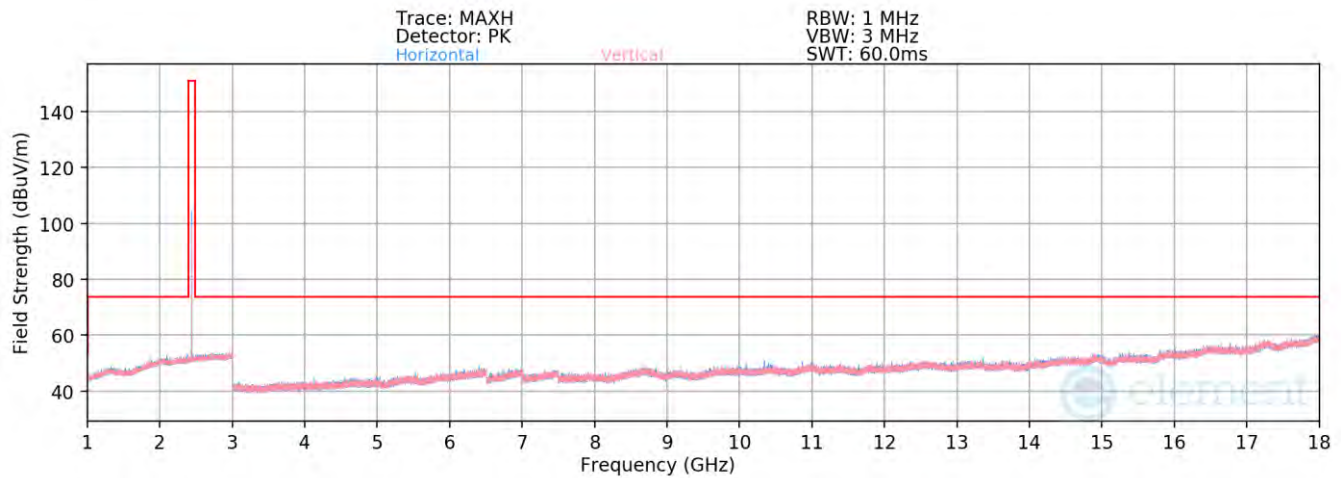

Plot 7-82. Radiated Spurious Emissions 1-18GHz Antenna 4a (4Mbps, HDR4, ePA – Ch. 38)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2441MHz
Channel: 38


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	-	-	-	-78.11	4.57	33.46	53.98	-20.52
4882.00	Peak	-	-	-	-66.42	4.57	45.15	73.98	-28.83
7323.00	Avg	-	-	-	-79.51	8.28	35.77	53.98	-18.21
7323.00	Peak	-	-	-	-67.96	8.28	47.32	73.98	-26.66
12205.00	Avg	-	-	-	-81.06	13.15	39.09	53.98	-14.89
12205.00	Peak	-	-	-	-69.11	13.15	51.04	73.98	-22.94

Table 7-15. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 74 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

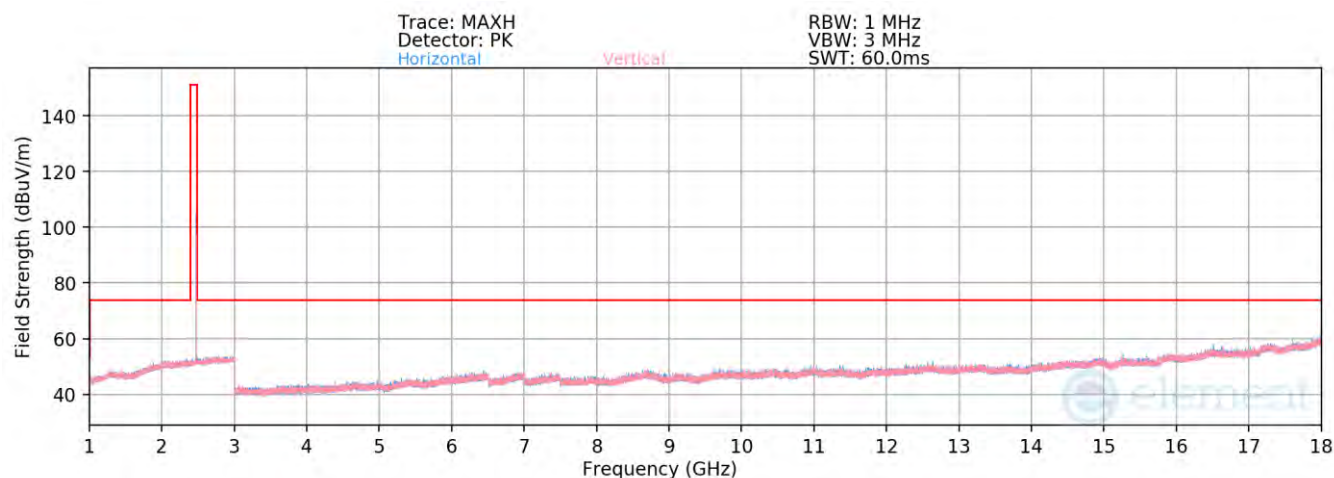

Plot 7-83. Radiated Spurious Emissions 1-18GHz Antenna 4a (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2476MHz
Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4952.00	Avg	-	-	-	-78.81	4.80	32.99	53.98	-20.99
4952.00	Peak	-	-	-	-67.09	4.80	44.71	73.98	-29.27
7428.00	Avg	-	-	-	-79.18	8.23	36.05	53.98	-17.93
7428.00	Peak	-	-	-	-67.58	8.23	47.65	73.98	-26.33
12380.00	Avg	-	-	-	-81.40	13.47	39.07	53.98	-14.91
12380.00	Peak	-	-	-	-69.84	13.47	50.63	73.98	-23.35

Table 7-16. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 75 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 2a

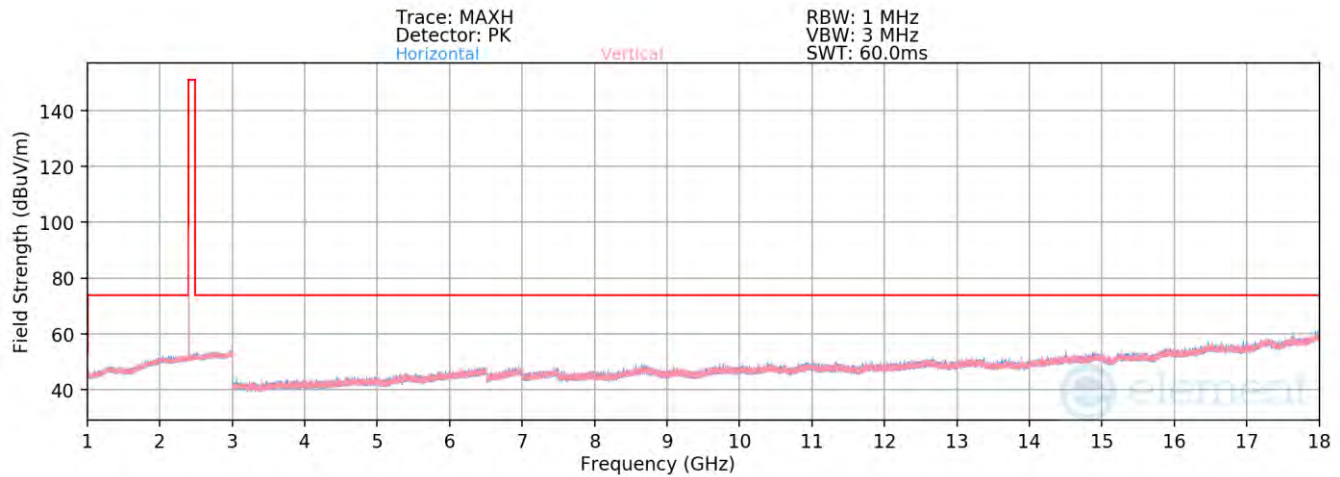

Plot 7-84. Radiated Spurious Emissions 1-18GHz Antenna 2a (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2404MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4808.00	Avg	-	-	-	-78.54	4.73	33.19	53.98	-20.79
4808.00	Peak	-	-	-	-66.77	4.73	44.96	73.98	-29.02
12020.00	Avg	-	-	-	-80.96	12.74	38.78	53.98	-15.20
12020.00	Peak	-	-	-	-69.19	12.74	50.55	73.98	-23.43

Table 7-17. Radiated Spurious Emission Measurements Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 76 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

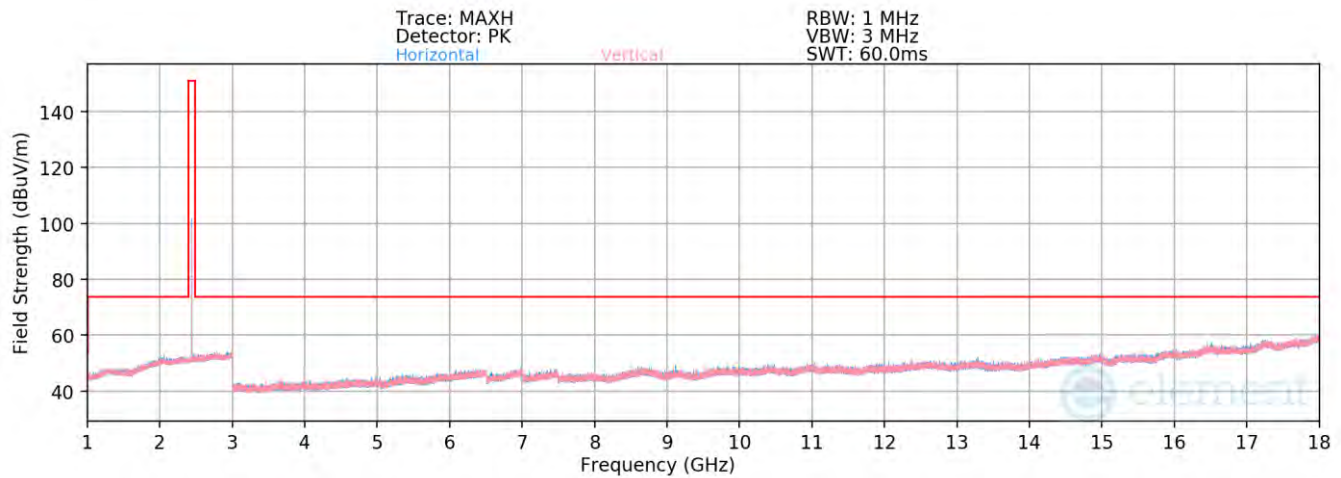

Plot 7-85. Radiated Spurious Emissions 1-18GHz Antenna 2a (4Mbps, HDR4, ePA – Ch. 38)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2441MHz
Channel: 38


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	-	-	-	-78.17	4.57	33.40	53.98	-20.58
4882.00	Peak	-	-	-	-66.66	4.57	44.91	73.98	-29.07
7323.00	Avg	-	-	-	-79.53	8.28	35.75	53.98	-18.23
7323.00	Peak	-	-	-	-67.90	8.28	47.38	73.98	-26.60
12205.00	Avg	-	-	-	-81.14	13.15	39.01	53.98	-14.97
12205.00	Peak	-	-	-	-69.55	13.15	50.60	73.98	-23.38

Table 7-18. Radiated Spurious Emission Measurements Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 77 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

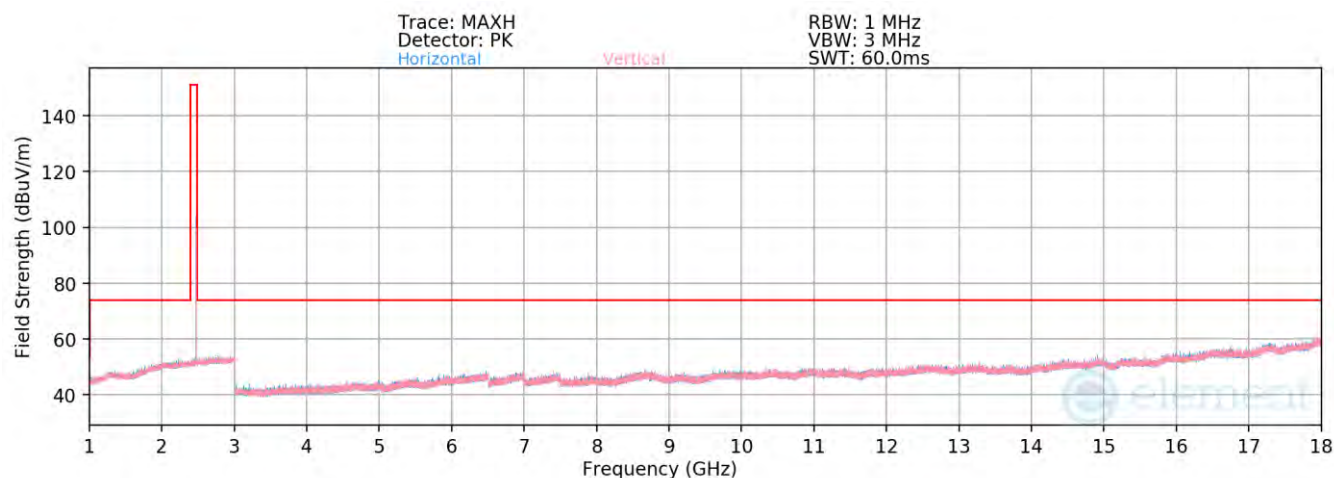

Plot 7-86. Radiated Spurious Emissions 1-18GHz Antenna 2a (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2476MHz
Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4952.00	Avg	-	-	-	-78.53	4.80	33.27	53.98	-20.71
4952.00	Peak	-	-	-	-67.08	4.80	44.72	73.98	-29.26
7428.00	Avg	-	-	-	-79.18	8.23	36.05	53.98	-17.93
7428.00	Peak	-	-	-	-67.47	8.23	47.76	73.98	-26.22
12380.00	Avg	-	-	-	-81.33	13.47	39.14	53.98	-14.84
12380.00	Peak	-	-	-	-69.78	13.47	50.69	73.98	-23.29

Table 7-19. Radiated Spurious Emission Measurements Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 78 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Spurious Emission Measurements (1-18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

TxBF

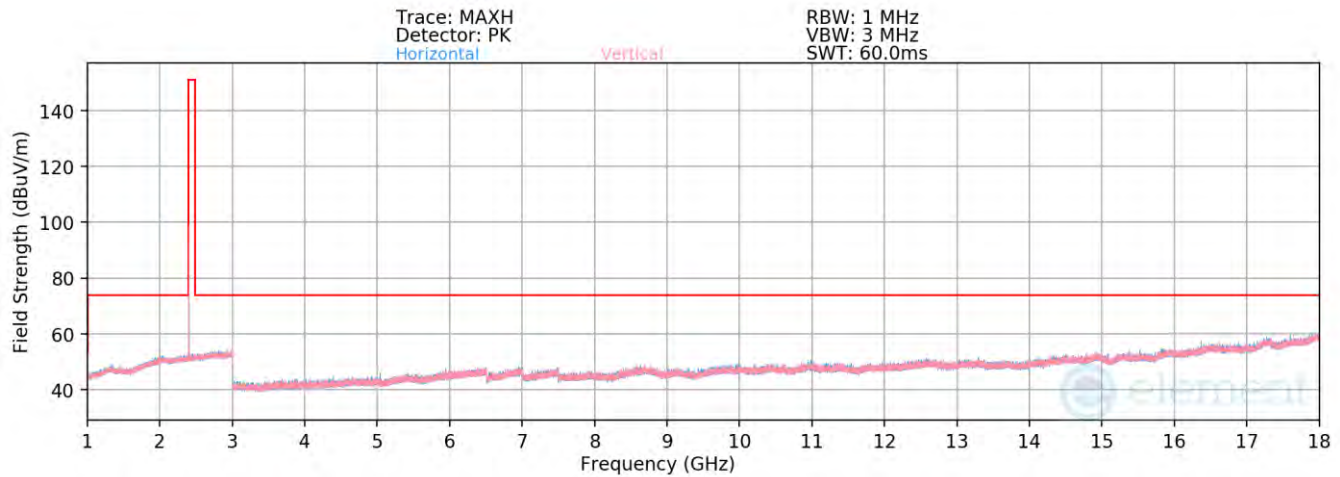

Plot 7-87. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2404MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4808.00	Avg	-	-	-	-78.61	4.73	33.12	53.98	-20.86
4808.00	Peak	-	-	-	-66.70	4.73	45.03	73.98	-28.95
12020.00	Avg	-	-	-	-80.93	12.74	38.81	53.98	-15.17
12020.00	Peak	-	-	-	-68.80	12.74	50.94	73.98	-23.04

Table 7-20. Radiated Spurious Emission Measurements TxBF


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 79 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

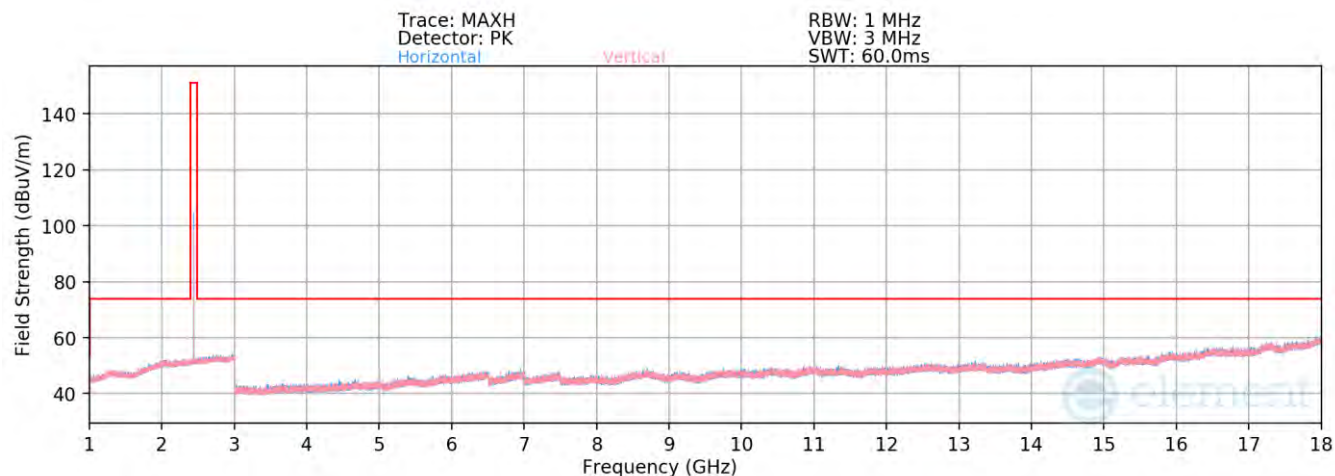

Plot 7-88. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)

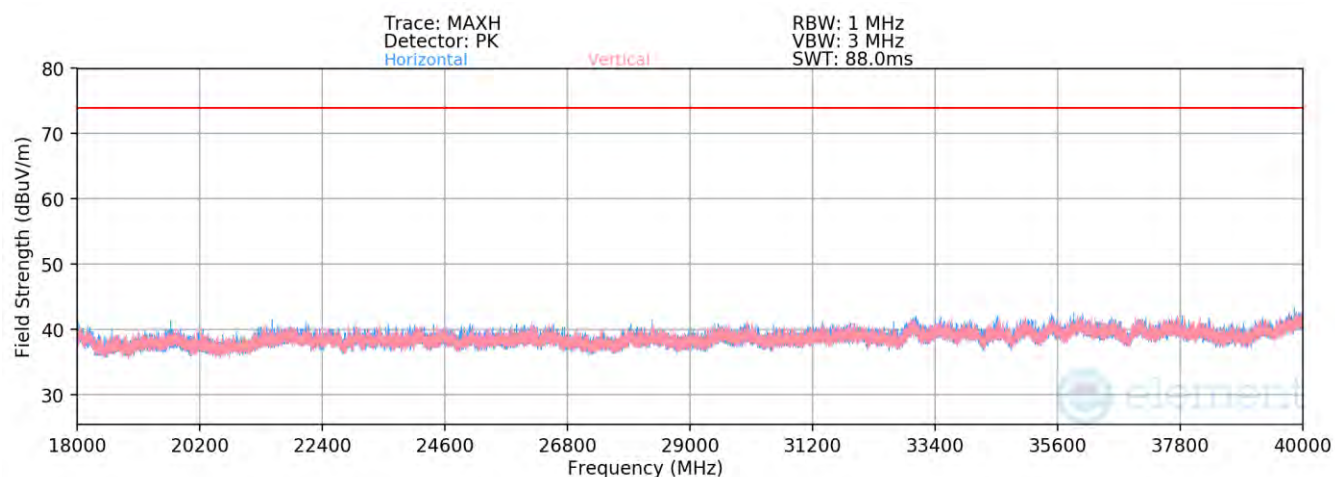

Plot 7-89. Radiated Spurious Emissions Above 18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)

FCC ID: BCGA2837 IC: 579C-A2837			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device		Page 80 of 103

V 10.6 09/14/2023

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	-	-	-	-78.26	4.57	33.31	53.98	-20.67
4882.00	Peak	-	-	-	-66.27	4.57	45.30	73.98	-28.68
7323.00	Avg	-	-	-	-79.58	8.28	35.70	53.98	-18.28
7323.00	Peak	-	-	-	-67.88	8.28	47.40	73.98	-26.58
12205.00	Avg	-	-	-	-81.11	13.15	39.04	53.98	-14.94
12205.00	Peak	-	-	-	-69.72	13.15	50.43	73.98	-23.55

Table 7-21. Radiated Spurious Emission Measurements TxBF

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 81 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

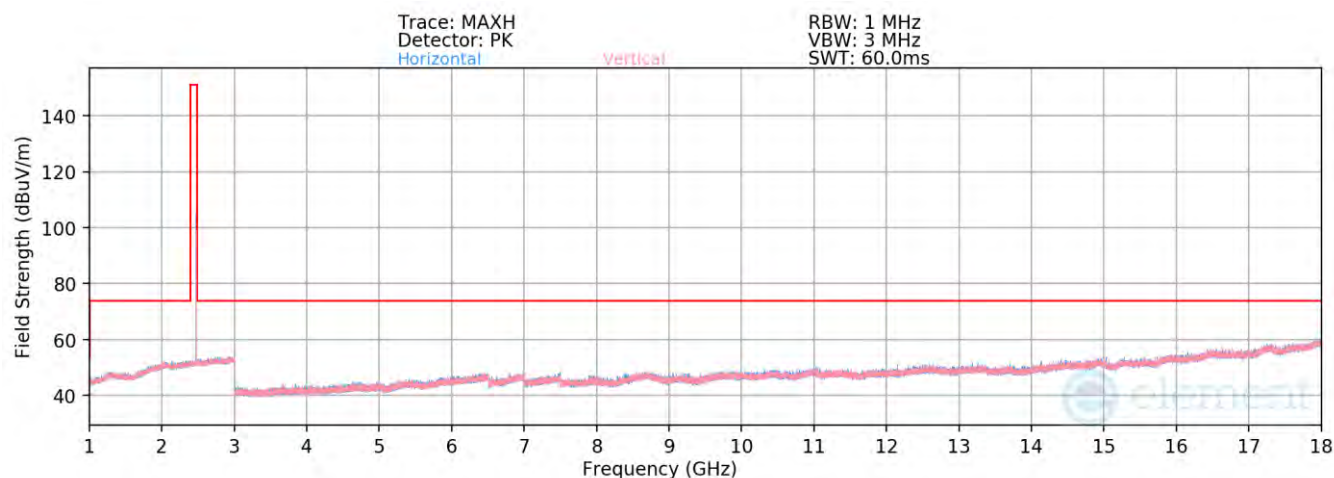

Plot 7-90. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2476MHz
Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4952.00	Avg	-	-	-	-78.78	4.80	33.02	53.98	-20.96
4952.00	Peak	-	-	-	-67.16	4.80	44.64	73.98	-29.34
7428.00	Avg	-	-	-	-79.08	8.23	36.15	53.98	-17.83
7428.00	Peak	-	-	-	-67.50	8.23	47.73	73.98	-26.25
12380.00	Avg	-	-	-	-81.32	13.47	39.15	53.98	-14.83
12380.00	Peak	-	-	-	-70.18	13.47	50.29	73.98	-23.69

Table 7-22. Radiated Spurious Emission Measurements TxBF

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 82 of 103

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.1 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Antenna 4a

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

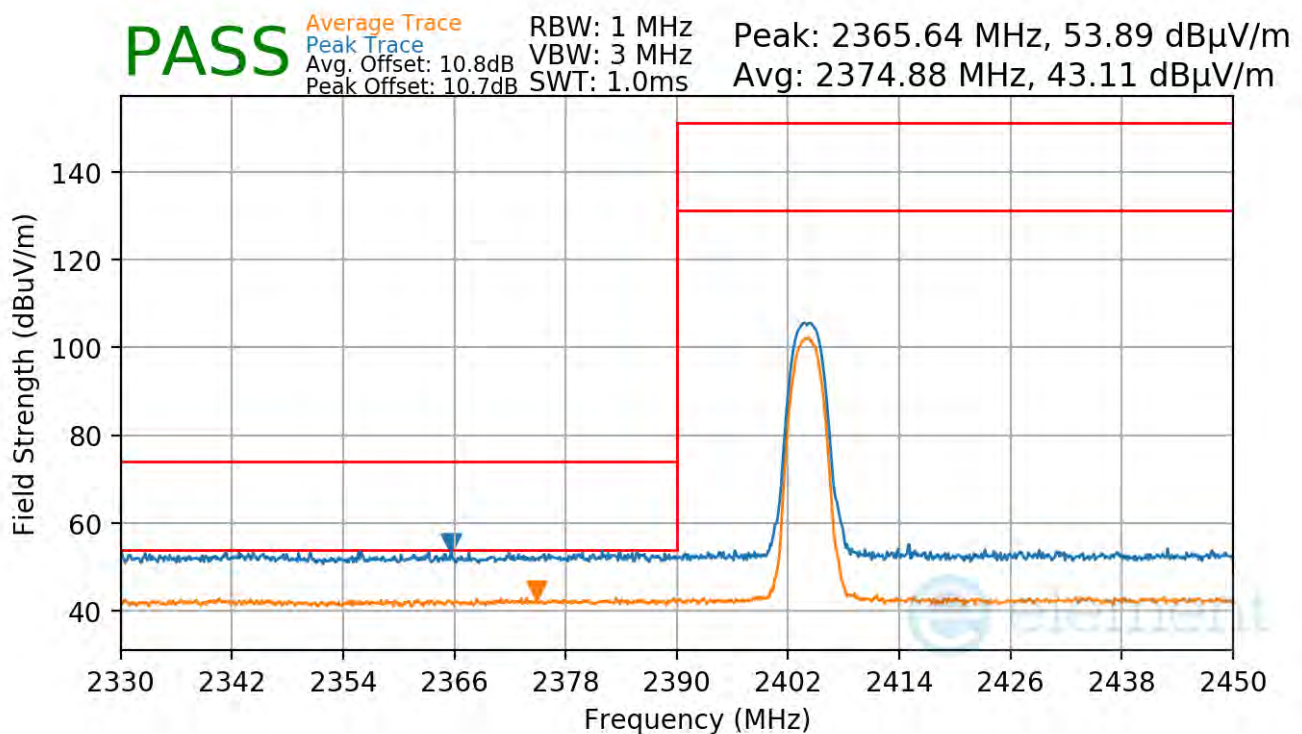

Plot 7-91. Radiated Restricted Lower Band Edge Measurement Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 83 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

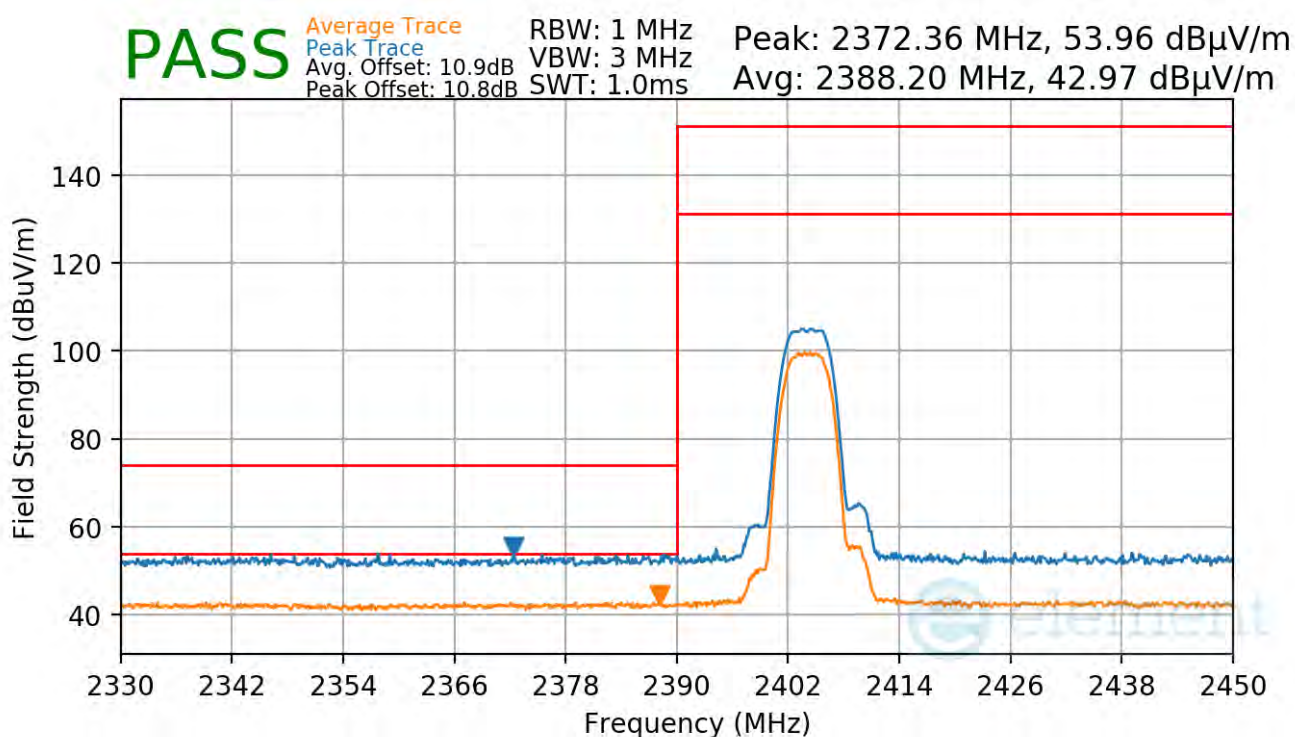

Plot 7-92. Radiated Restricted Lower Band Edge Measurement Antenna 4a


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 84 of 103

V 10.6 09/14/2023

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

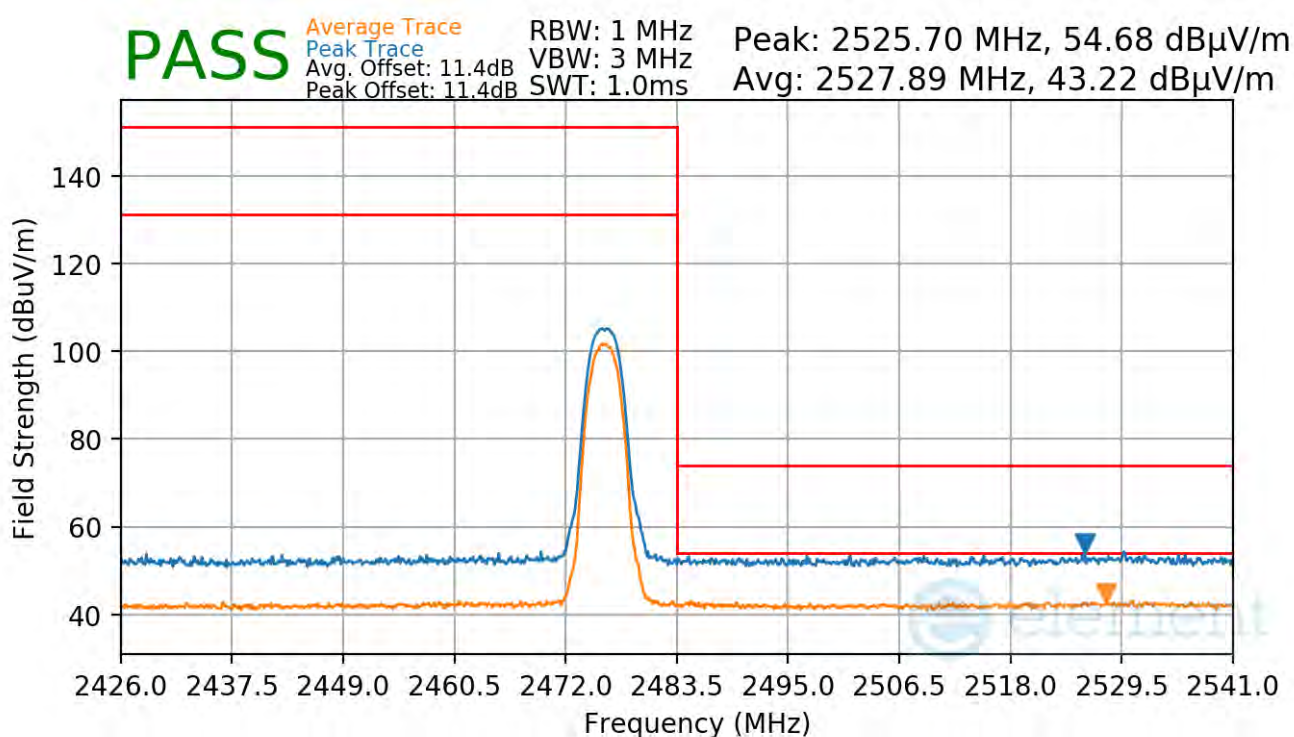

Plot 7-93. Radiated Restricted Upper Band Edge Measurement Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 85 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

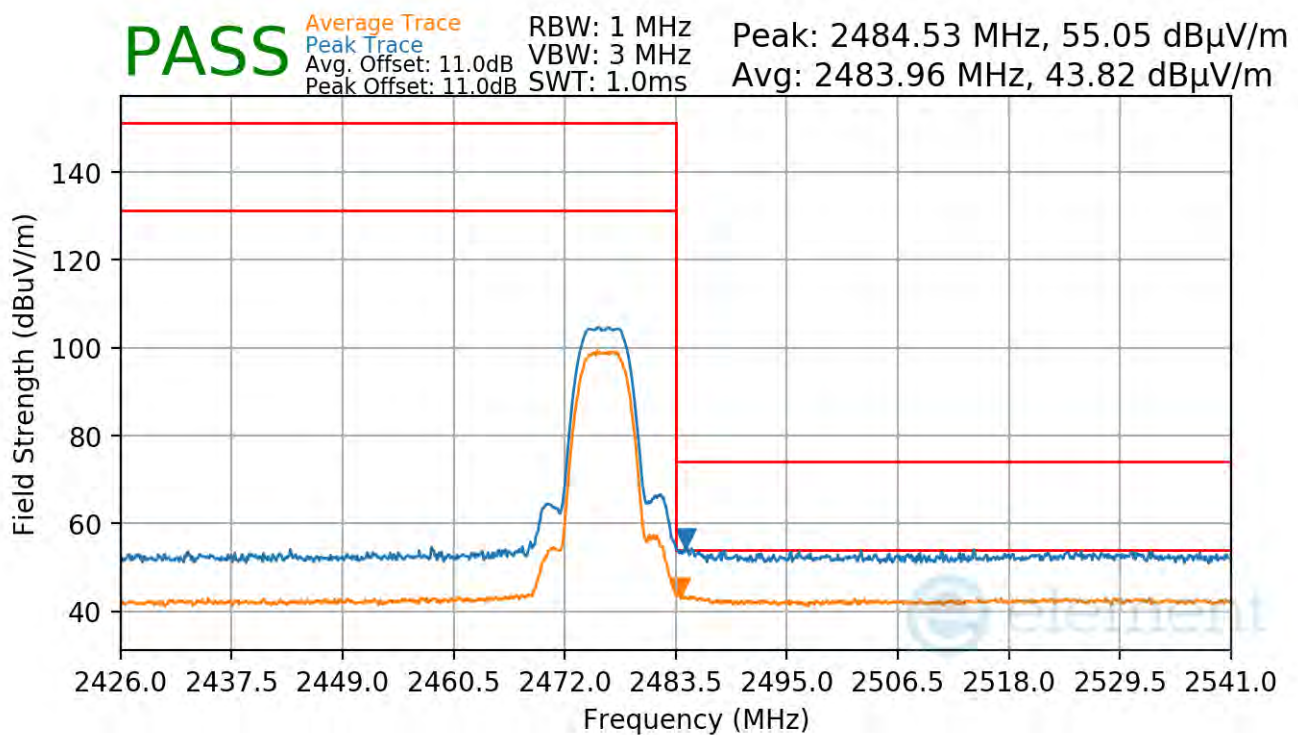

Plot 7-94. Radiated Restricted Upper Band Edge Measurement Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 86 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Antenna 2a

Bluetooth Mode: HDR4


Data Rate: 4Mbps

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

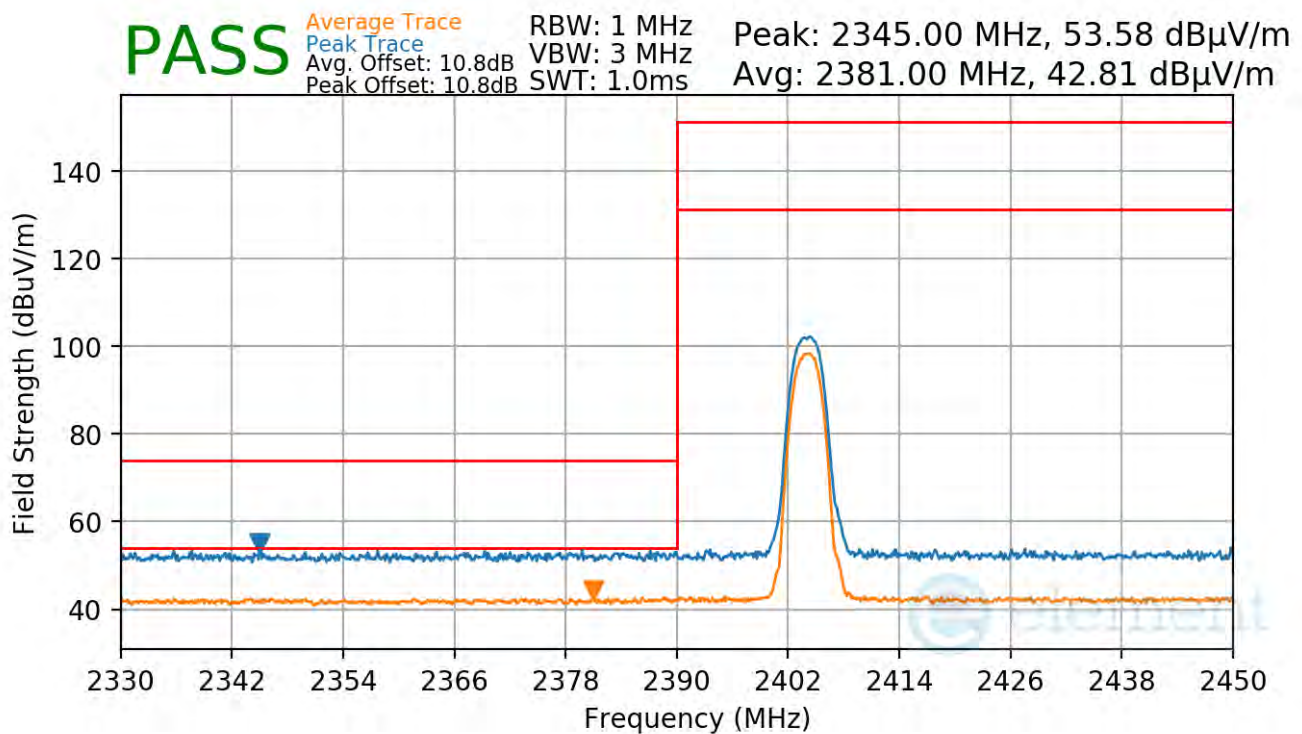

Plot 7-95. Radiated Restricted Lower Band Edge Measurement Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 87 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

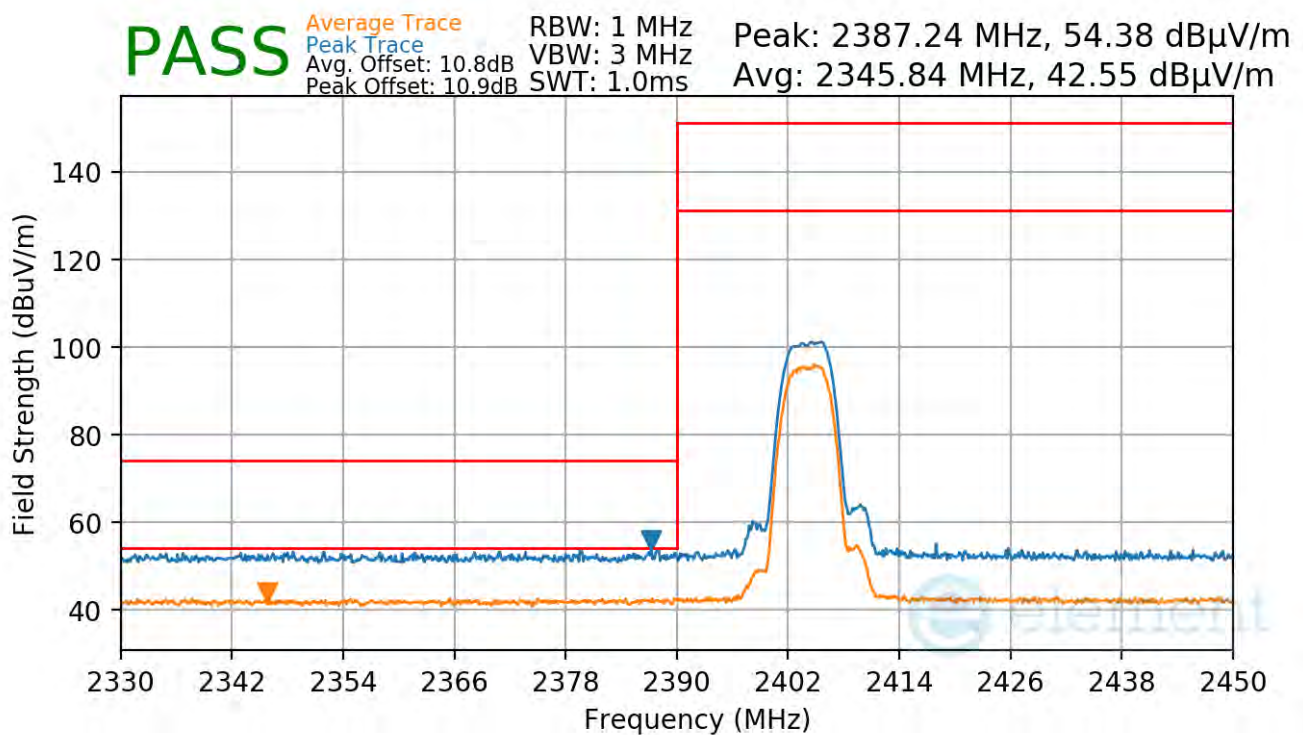

Plot 7-96. Radiated Restricted Lower Band Edge Measurement Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 88 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

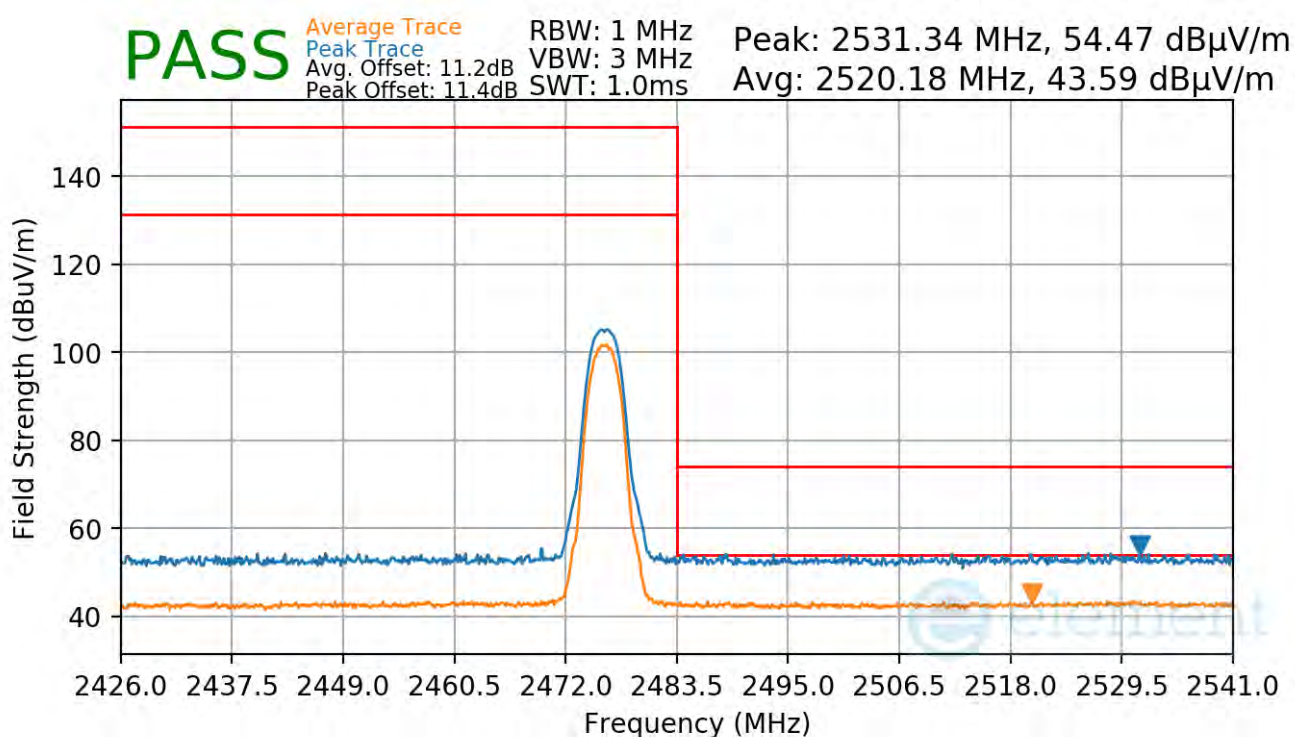

Plot 7-97. Radiated Restricted Upper Band Edge Measurement Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 89 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

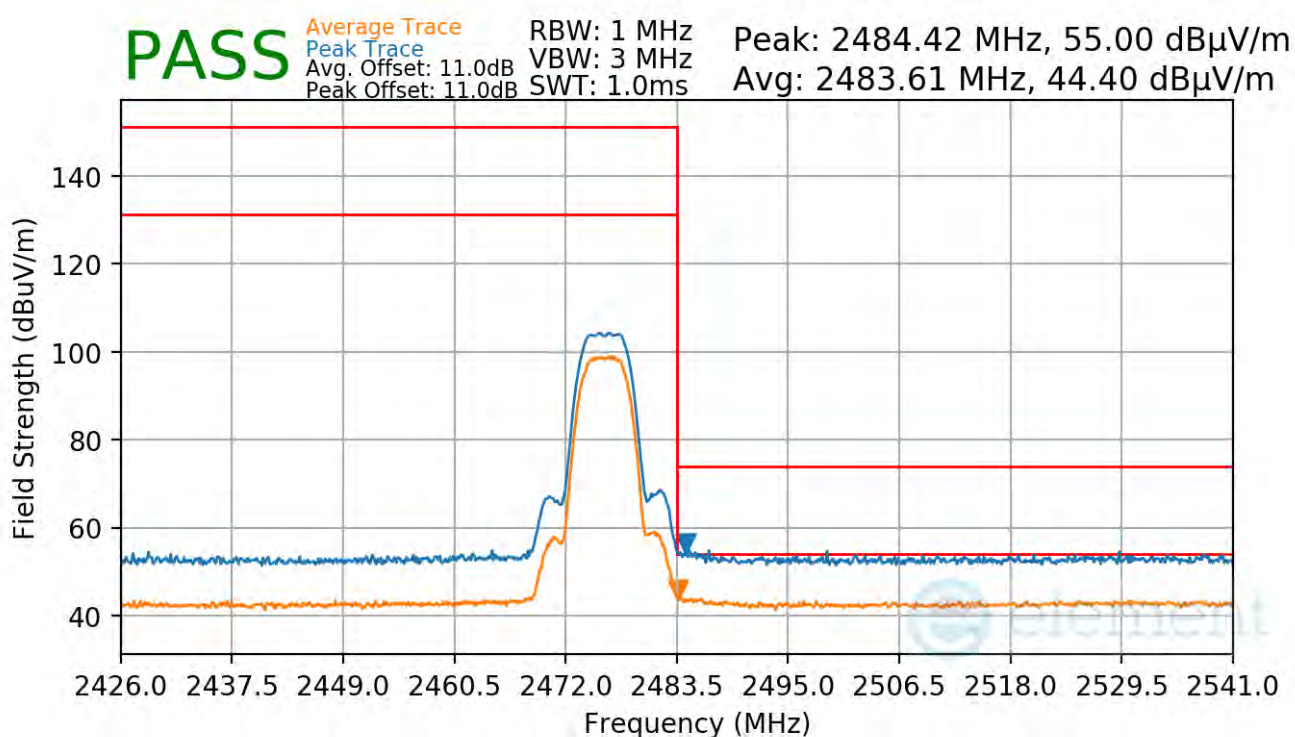

Plot 7-98. Radiated Restricted Upper Band Edge Measurement Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 90 of 103

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

TxBF

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

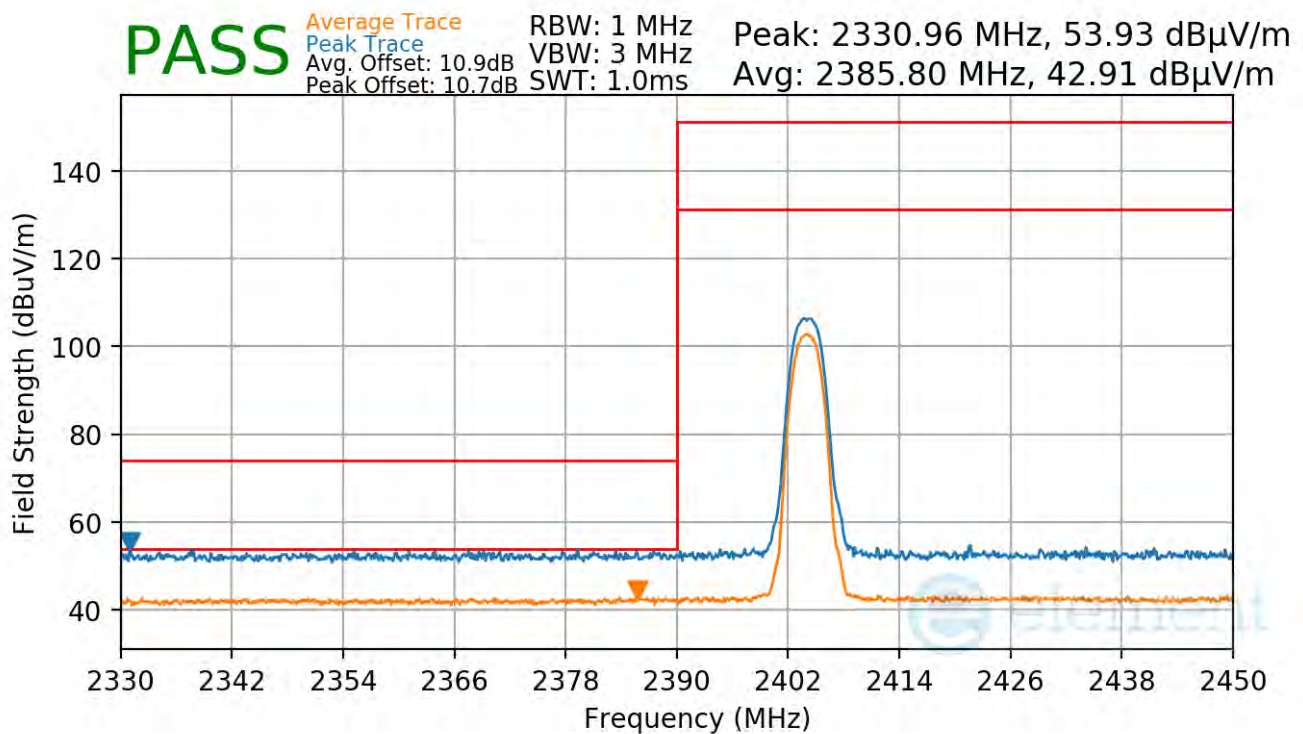

Plot 7-99. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 91 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode: HDR8


Data Rate: 8Mbps

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

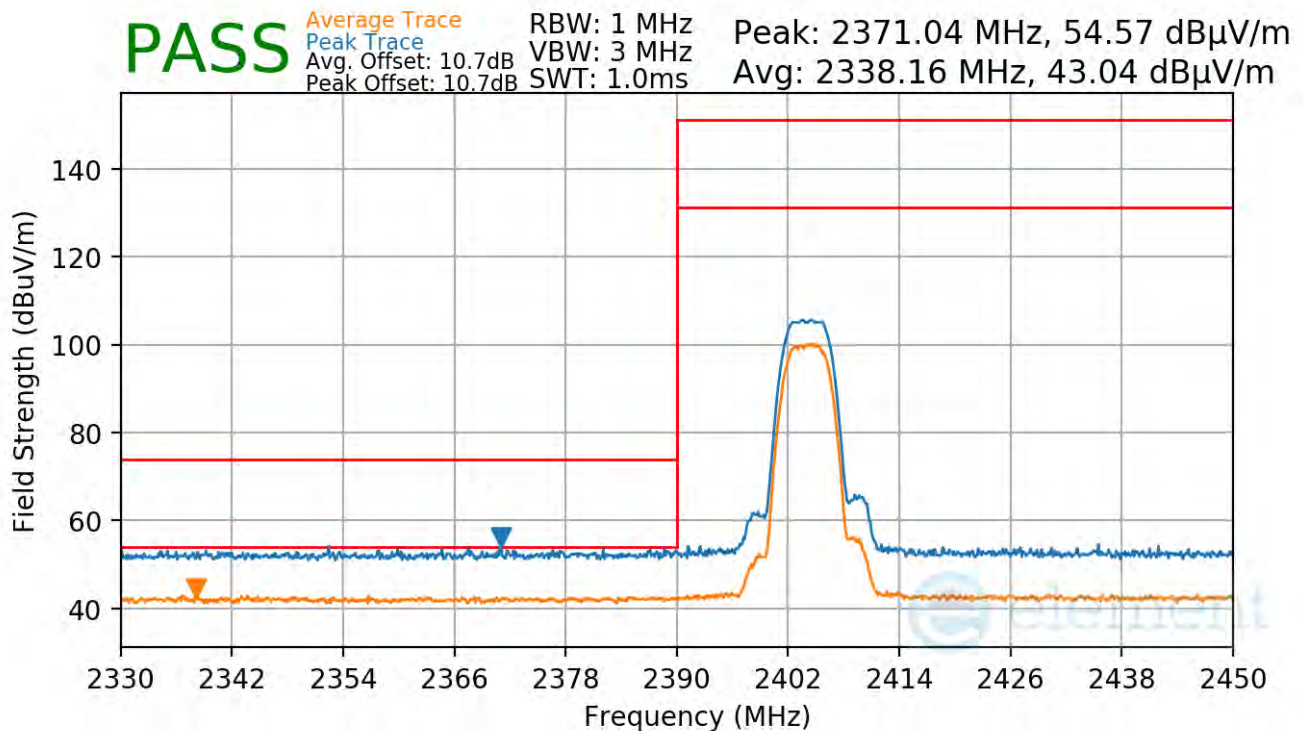

Plot 7-100. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 92 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

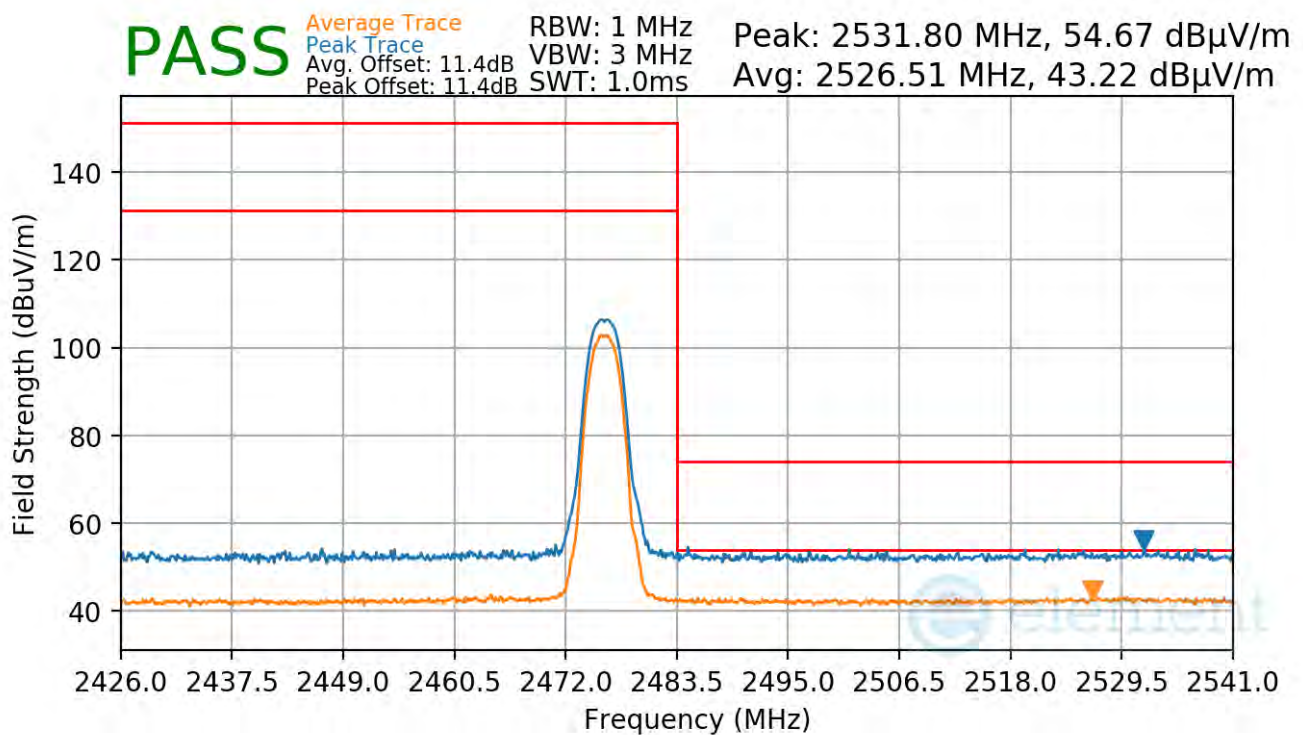

Plot 7-101. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 93 of 103


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

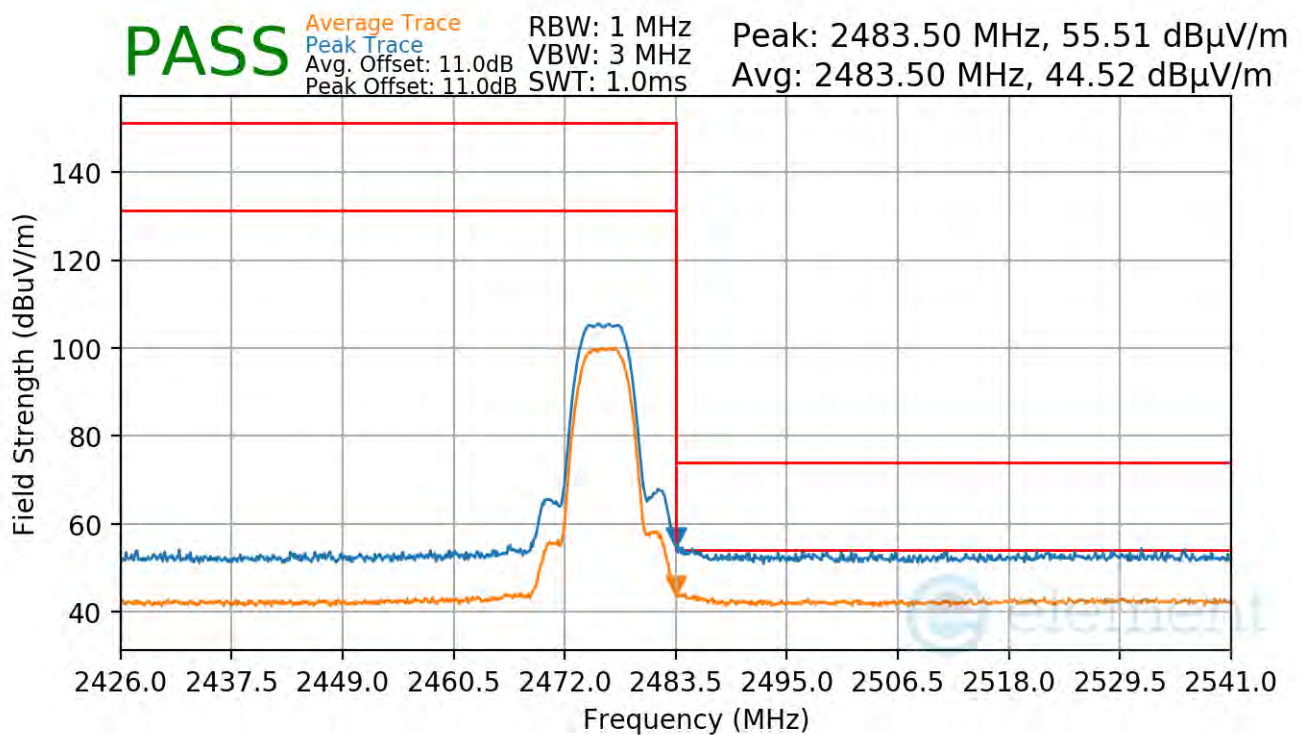

Plot 7-102. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 94 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-23 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-23. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 95 of 103

V 10.6 09/14/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

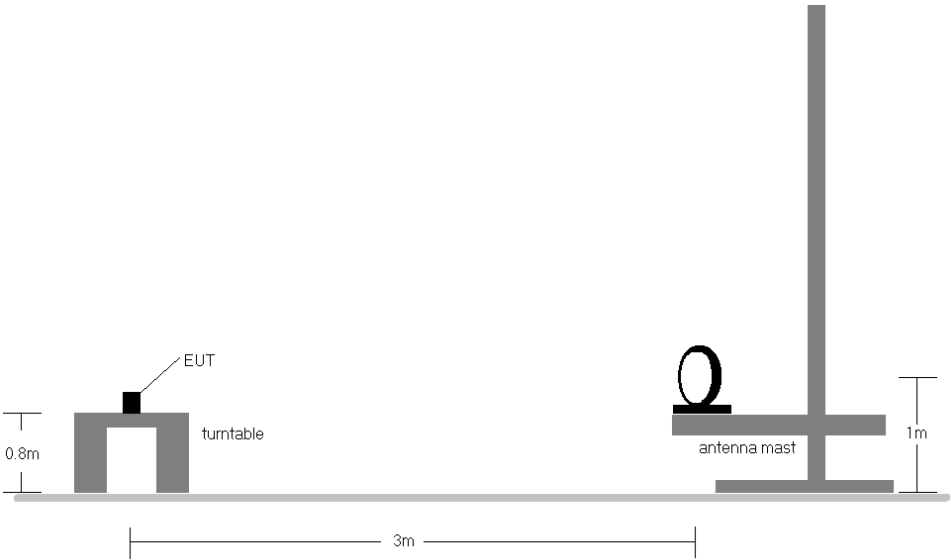


Figure 7-7. Radiated Test Setup < 30MHz

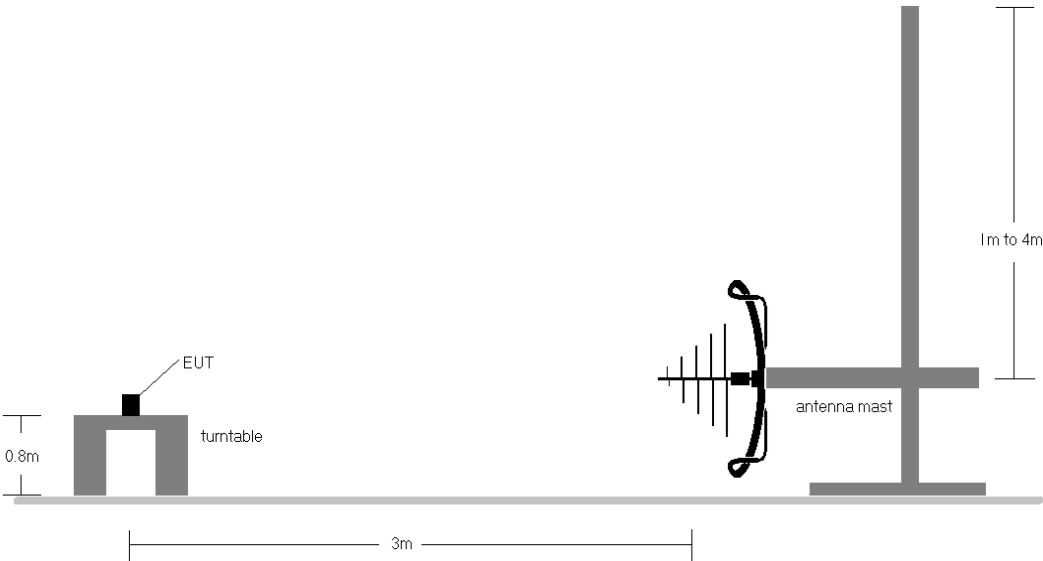


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 96 of 103

V 10.6 09/14/2023

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-23.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + AFCL_{[dB/m]}$
- o $AFCL_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- o $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 97 of 103

V 10.6 09/14/2023

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF

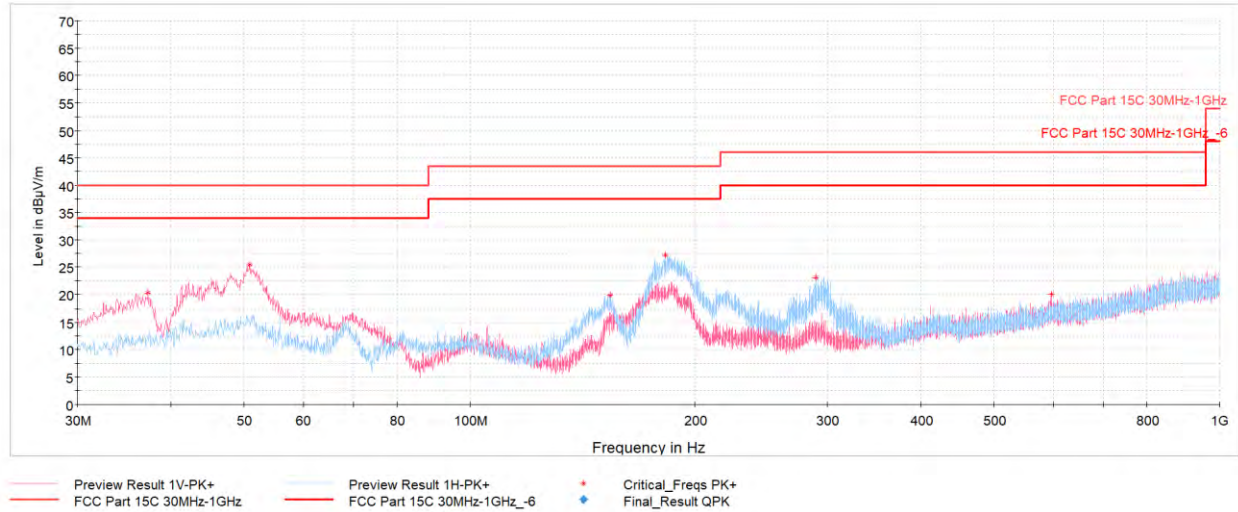

Plot 7-103. Radiated Spurious Emissions Below 1GHz TxBF (4Mbps, ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.28	Max-Peak	V	100	302	-71.53	-15.17	20.30	40.00	-19.70
50.86	Max-Peak	V	100	53	-68.35	-13.12	25.53	40.00	-14.47
153.82	Max-Peak	H	200	177	-67.05	-19.99	19.96	43.52	-23.56
182.24	Max-Peak	H	200	227	-61.22	-18.54	27.24	43.52	-16.28
289.81	Max-Peak	H	100	5	-69.02	-14.79	23.19	46.02	-22.83
596.48	Max-Peak	V	100	337	-79.38	-7.51	20.11	46.02	-25.91

Table 7-24. Radiated Spurious Emissions Below 1GHz TxBF (4Mbps, ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 98 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-25. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013 – Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 99 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

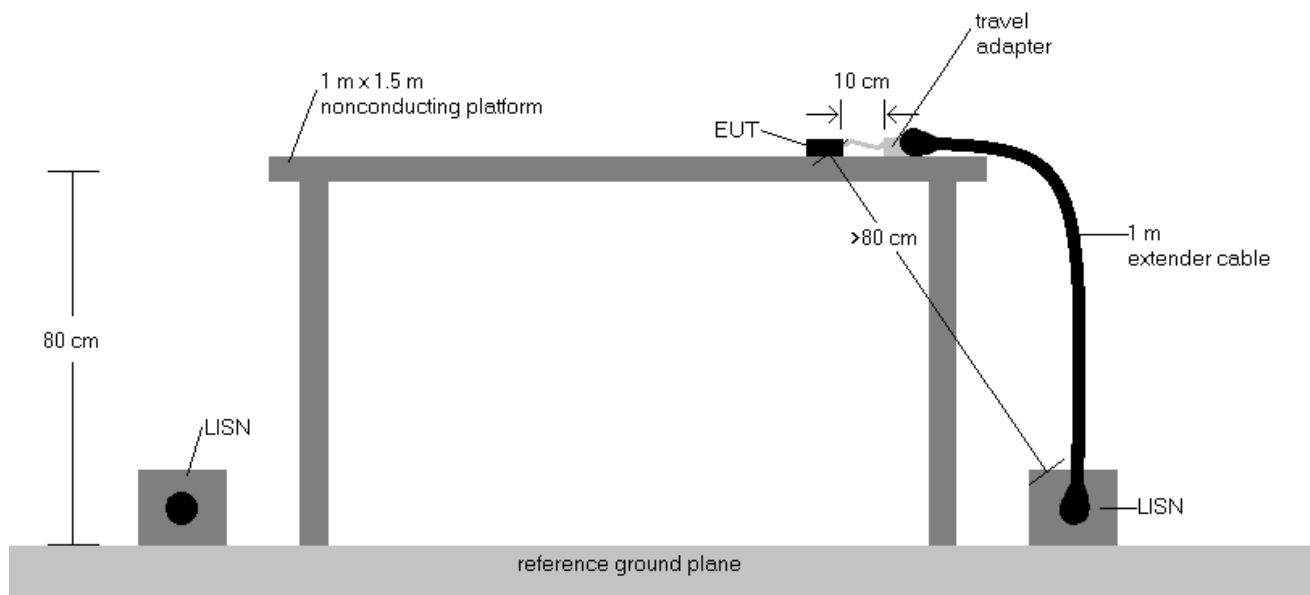



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 100 of 103

V 10.6 09/14/2023

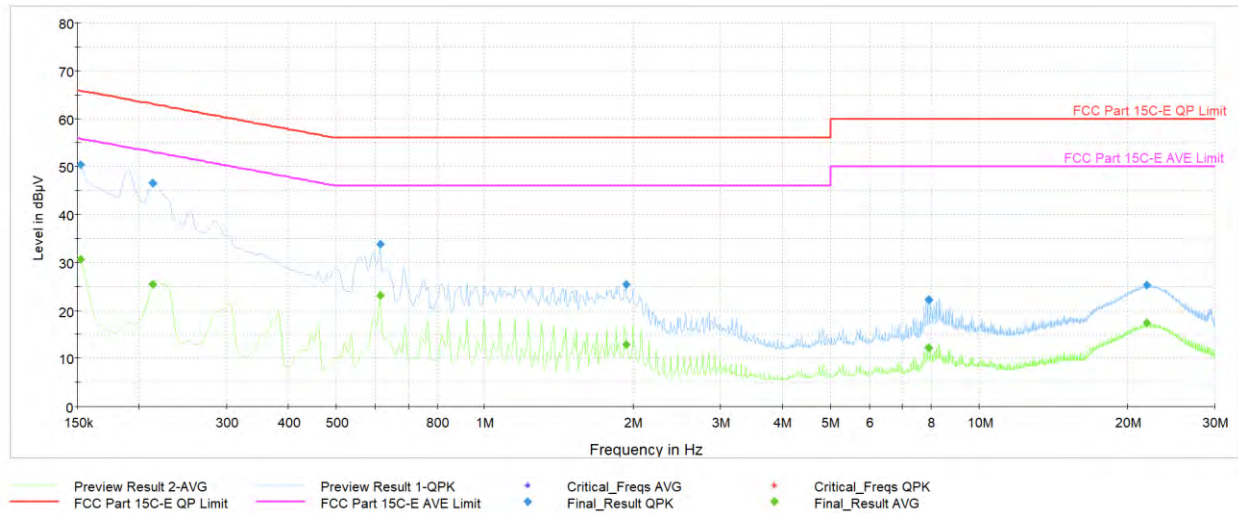

Plot 7-104. AC Line Conducted Plot with Bluetooth HDR TxBF (L1, 4Mbps ePA - Ch.38 with Laptop)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	30.65	55.88	-25.22	L1	GND
0.152	FINAL	50.4	—	65.88	-15.49	L1	GND
0.213	FINAL	—	25.38	53.09	-27.71	L1	GND
0.213	FINAL	46.5	—	63.09	-16.55	L1	GND
0.614	FINAL	33.8	—	56.00	-22.18	L1	GND
0.614	FINAL	—	23.08	46.00	-22.92	L1	GND
1.930	FINAL	25.4	—	56.00	-30.63	L1	GND
1.930	FINAL	—	12.96	46.00	-33.04	L1	GND
7.913	FINAL	—	12.30	50.00	-37.70	L1	GND
7.919	FINAL	22.3	—	60.00	-37.66	L1	GND
21.827	FINAL	—	17.36	50.00	-32.64	L1	GND
21.827	FINAL	25.3	—	60.00	-34.75	L1	GND

Table 7-26. AC Line Conducted Data with Bluetooth HDR TxBF (L1, 4Mbps ePA - Ch.38 with Laptop)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 101 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

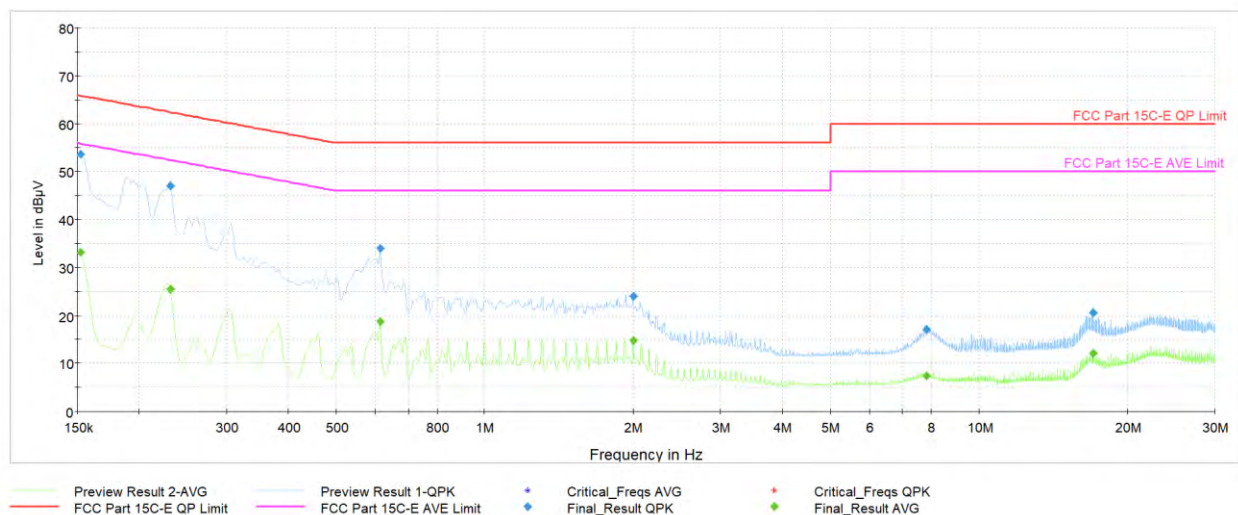

Plot 7-105. AC Line Conducted Plot with Bluetooth HDR TxBF (N, 4Mbps ePA - Ch.38 with Laptop)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	33.13	55.88	-22.75	N	GND
0.152	FINAL	53.5	—	65.88	-12.37	N	GND
0.231	FINAL	—	25.44	52.41	-26.97	N	GND
0.231	FINAL	47.0	—	62.41	-15.46	N	GND
0.614	FINAL	—	18.76	46.00	-27.24	N	GND
0.614	FINAL	33.9	—	56.00	-22.08	N	GND
1.995	FINAL	24.0	—	56.00	-31.99	N	GND
1.995	FINAL	—	14.79	46.00	-31.21	N	GND
7.841	FINAL	17.1	—	60.00	-42.90	N	GND
7.841	FINAL	—	7.41	50.00	-42.59	N	GND
17.003	FINAL	—	12.08	50.00	-37.92	N	GND
17.003	FINAL	20.7	—	60.00	-39.35	N	GND

Table 7-27. AC Line Conducted Data with Bluetooth HDR TxBF (N, 4Mbps ePA - Ch.38 with Laptop)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 102 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2837 and IC: 579C-A2837** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-16.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 103 of 103

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.