



FCC ID: 2AD9XWATERH
Report No.: T180829N03-RP1

Page: 1 / 41
Rev.: 02

FCC 47 CFR PART 15 SUBPART C

ANSI C63.10: 2013

TEST REPORT

For

Versa Water

Model: Water-2GIG

Brand: versa

Test Report Number:
T180829N03-RP1

Issued to

Versa Wireless Inc.

206-20353 64 Ave. Langley Canada V2Y1N5

Issued by

Compliance Certification Services Inc.
Tainan Lab.

No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: (06) 580-2201

FAX: (06) 580-2202

Issued Date: December 12, 2018

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180829N03-RP1

Page: 2 / 41
Rev.: 02

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	October 15, 2018	Initial Issue	ALL	Gina Lin
01	December 11, 2018	See the following note rev.01	ALL	Gina Lin
02	December 12, 2018	See the following note rev.02	ALL	Gina Lin

Note:

- ※ Rev.01 Issue Date : December 11, 2018
Revise typo and update the data of RADIATED EMISSIONS.
- ※ Rev.02 Issue Date : December 12, 2018
Revise typo.

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. TEST RESULT SUMMARY	5
3. EUT DESCRIPTION	6
4. TEST METHODOLOGY	7
4.1 EUT CONFIGURATION	7
4.2 EUT EXERCISE	7
4.3 GENERAL TEST PROCEDURES	7
4.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	8
4.5 DESCRIPTION OF TEST MODES	8
5. INSTRUMENT CALIBRATION	9
5.1 MEASURING INSTRUMENT CALIBRATION	9
5.2 MEASUREMENT EQUIPMENT USED	9
5.3 MEASUREMENT UNCERTAINTY	10
6. FACILITIES AND ACCREDITATIONS	11
6.1 FACILITIES	11
6.2 EQUIPMENT	11
6.3 TABLE OF ACCREDITATIONS AND LISTINGS	11
6.4 TABLE OF ACCREDITATIONS AND LISTINGS	12
7. SETUP OF EQUIPMENT UNDER TEST	13
7.1 SETUP CONFIGURATION OF EUT	13
7.2 SUPPORT EQUIPMENT	13
8. FCC PART 15.231 REQUIREMENTS	14
8.1 99% BANDWIDTH	14
8.2 20dB BANDWIDTH	16
8.3 LIMIT OF TRANSMISSION TIME	18
8.4 DUTY CYCLE	20
8.5 CENTRAL FREQUENCY	24
8.6 RADIATED EMISSIONS	26
8.7 POWERLINE CONDUCTED EMISSIONS	37
9. APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	38



Report No.: T180829N03-RP1

Page: 4 / 41
Rev.: 02

1. TEST RESULT CERTIFICATION

Product: Versa Water

Model: Water-2GIG

Brand Name: **versa**

Applicant: Versa Wireless Inc.
206-20353 64 Ave. Langley Canada V2Y1N5

Manufacturer: Vision Automobile Electronics Industrial Co Ltd.
No.78, Gongye 3rd Rd., Technology Industrial Park,
Tainan , Taiwan , 70955

Tested: October 03, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C ANSI C63.10: 2013	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Jeter Wu
Assistant Manager

Reviewed by:

Eric Huang
Section Manager



Report No.: T180829N03-RP1

Page: 5 / 41
Rev.: 02

2. TEST RESULT SUMMARY

FCC Standard Section	Report Section	Test Item	Result
15.203	3	Antenna Requirement	Pass
-	8.1	Occupied Bandwidth (99%)	-
15.231(c)	8.2	20dB Bandwidth	Pass
15.231(a)(1)	8.3	Limit of Transmission Time	Pass
-	8.4	Duty Cycle	-
15.231(d)	8.5	Central Frequency	Pass
15.231(b)	8.6	Radiated Emissions	Pass
15.207(a)	8.7	Powerline Conducted Emissions	-

3. EUT DESCRIPTION

Product.	Versa Water
Model Number	Water-2GIG
Brand Name	versa
Received Date	August 29, 2018
Operation Frequency	345MHZ \pm 15kHz
Transmit Peak Power	95.661 dB μ V/m
Number of Channels	1 Channel
Type of Modulation	ASK
Power Supply	3Vdc (Powered from battery)
Antenna Type	Type: Helical Antenna Model: Water-2GIG Manufacturer: N/A Gain: -3.6dBi
MCU CHIP Brand /Model	(U1) Microchip / PIC12F635-I
RF Module Brand /Model	(U2) Maximum / MAX7044
Hardware Version	Rev.0
Software Version	Rev.0
Temperature Range	0°C ~ +60°C

Remark:

1. Client consigns only one model sample to test (Model Number: **Water-2GIG**). Therefore, the testing Lab. just guarantees the unit, which has been tested.
2. This submittal(s) (test report) is intended for FCC ID: **2AD9XWATERH** filing to comply with Section 15.207, 15.209 and 15.231 of the FCC Part 15, Subpart C Rules.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 (2013) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.231

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

4.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Clause 6.2 of ANSI C63.10: 2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5m high is for radiated emission above 1GHz and 0.8m for below 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Clause 6.3 – 6.6 of ANSI C63.10: 2013.

4.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 □ 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 □ 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 □ 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390-	15.35 - 16.2
8.362 □ 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 □ 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4.5 DESCRIPTION OF TEST MODES

The EUT (Model: **Water-2GIG**) had been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.

Note :

- 1) The field strength of spurious emission was measured in the following position:
EUT stand-up position (Y axis), lie-down position (X, Z axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

5. INSTRUMENT CALIBRATION

5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	07/20/2017	07/19/2019
Amplifier	HP	8447F	2443A01671	01/22/2018	01/21/2019
Bi-Log Antenna	Sunol	JB1	A070506-2	02/09/2018	02/08/2019
Cable	Rosnol+Suhner	SUCOFLEX 104PEA	SN25737 /4PEA	01/27/2018	01/26/2019
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/20/2017	03/19/2019
EMI Test Receiver	R&S	ESCI	100960	10/31/2017	10/30/2018
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
Hi-Pass Filter	MICRO-TRONICS	BRM50702-01	018	01/22/2018	01/21/2019
Horn Antenna	Com-Power	AH-118	071032	04/19/2018	04/18/2019
Pre-Amplifier	EMCI	EMC012645	980098	01/22/2018	01/21/2019
Pre-Amplifier	MITEQ	AMF-6F-26040 0-40-8P	985646	06/21/2018	06/20/2019

Remark: Each piece of equipment is scheduled for calibration once a year.

5.3 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Radiated Emission, 150kHz to 30 MHz Test Site : Chamber 966	$\pm 5.2\text{dB}$
Radiated Emission, 30 to 200 MHz Test Site : Chamber 966	$\pm 3.21\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : Chamber 966	$\pm 3.09\text{dB}$
Radiated Emission, 1 to 8 GHz	$\pm 2.65\text{dB}$
Radiated Emission, 8 to 18 GHz	$\pm 2.66\text{dB}$
Radiated Emission, 18 to 26.5 GHz	$\pm 2.65\text{dB}$
Radiated Emission, 26 to 40 GHz	$\pm 3.03\text{dB}$
Power Line Conducted Emission	$\pm 1.91\text{dB}$
Band Width	136.49kHz
Peak Output Power MU	$\pm 1.34\text{dB}$
Band Edge MU	$\pm 0.30\text{dBuV}$
Channel Separation MU	361.69Hz
Duty Cycle MU	0.064ms
Frequency Stability MU	0.223kHz

Uncertainty figures are valid to a confidence level of 95%, $k=2$

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7:1992, ANSI C63.10: 2013 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.3 TABLE OF ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).



Report No.: T180829N03-RP1

Page: 12 / 41
Rev.: 02

6.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

【RF】

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A	---	---	---	---

No.	Signal cable description				
A	Sensor	Unshielded, 2.0m, 1 pcs.			

【EMC】

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A	---	---	---	---

No.	Signal cable description				
A	N/A	---			

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. shd. = shielded; unshd. = unshielded

7.3 EUT OPERATING CONDITION

RF Setup

1. Set up a whole system as the setup diagram.
2. Turn on power.


8. FCC PART 15.231 REQUIREMENTS

8.1 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST CONFIGURATION

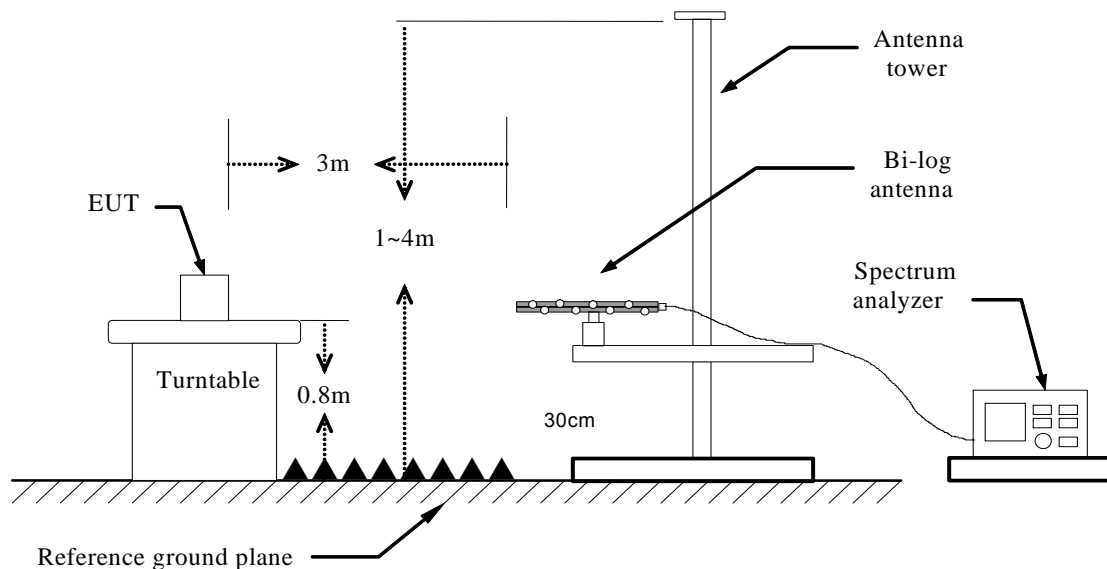

TEST PROCEDURE


1. The spectrum shall be set as follows :
 - Span : The minimum span to fully display the emission and approximately 20dB below peak level.
 - RBW : The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%.
 - VBW: The video bandwidth shall be set to 3 times the resolution bandwidth.
 - Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.
2. Compute the combined power of all signal responses contained in the trace by covering all the data points.
3. For 99% occupied BW, place the markers at the frequency at which 0.5% of the power lies to the right of the right marker and 0.5% of the power lies to the left of the left marker.
4. The 99% BW is the bandwidth between the right and left markers.

TEST RESULTS

Model Name	Water-2GIG	Test By	Ted Huang
Temp & Humidity	26.4°C, 52%	Test Date	2018/10/03

Frequency (MHz)	99% Bandwidth (kHz)
345	379.7

99% BANDWIDTH

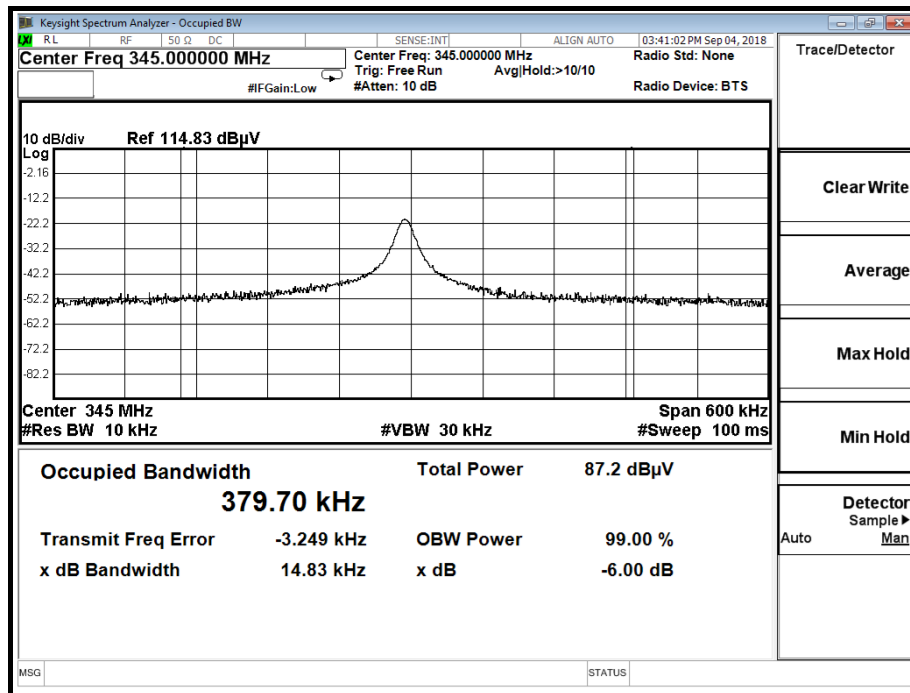


8.2 20dB BANDWIDTH

LIMIT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

TEST CONFIGURATION

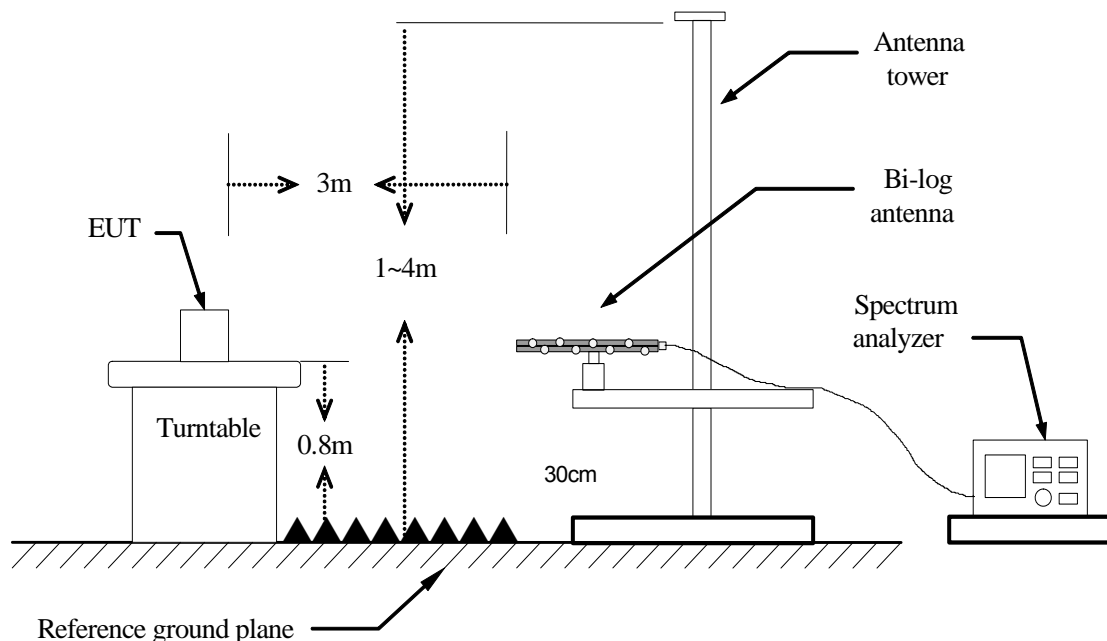

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the spectrum analyzer in the following setting as:
RBW is set to 1%~5%OBW and VBW is set 3×RBW.


TEST RESULTS

No non-compliance noted.

TEST DATA

Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Result
345	54.8	862.5	PASS

TEST PLOT

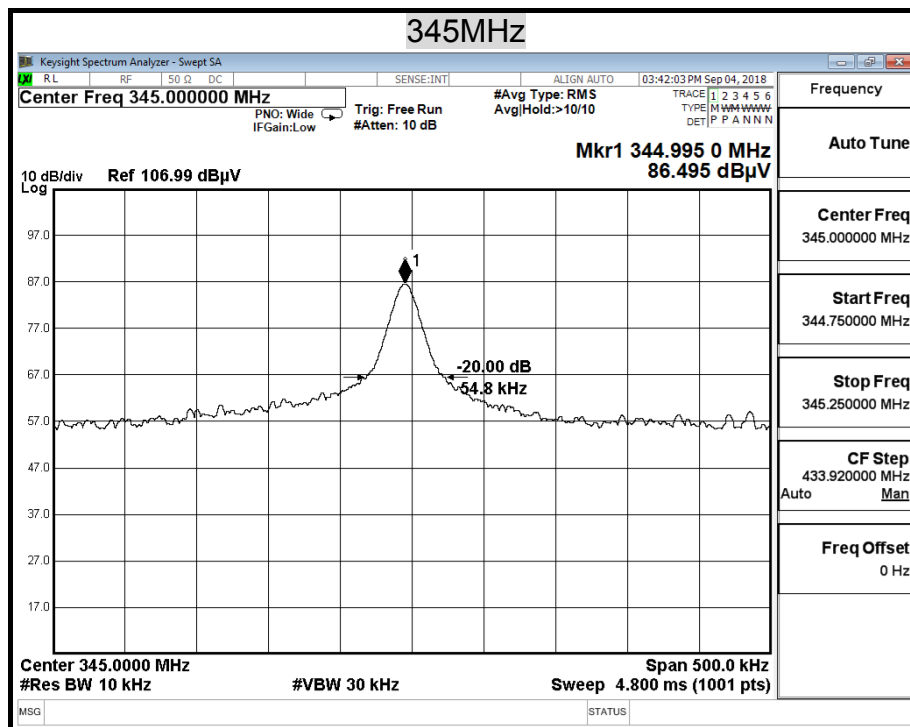


8.3 LIMIT OF TRANSMISSION TIME

LIMIT

According to 15.231, a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

TEST CONFIGURATION

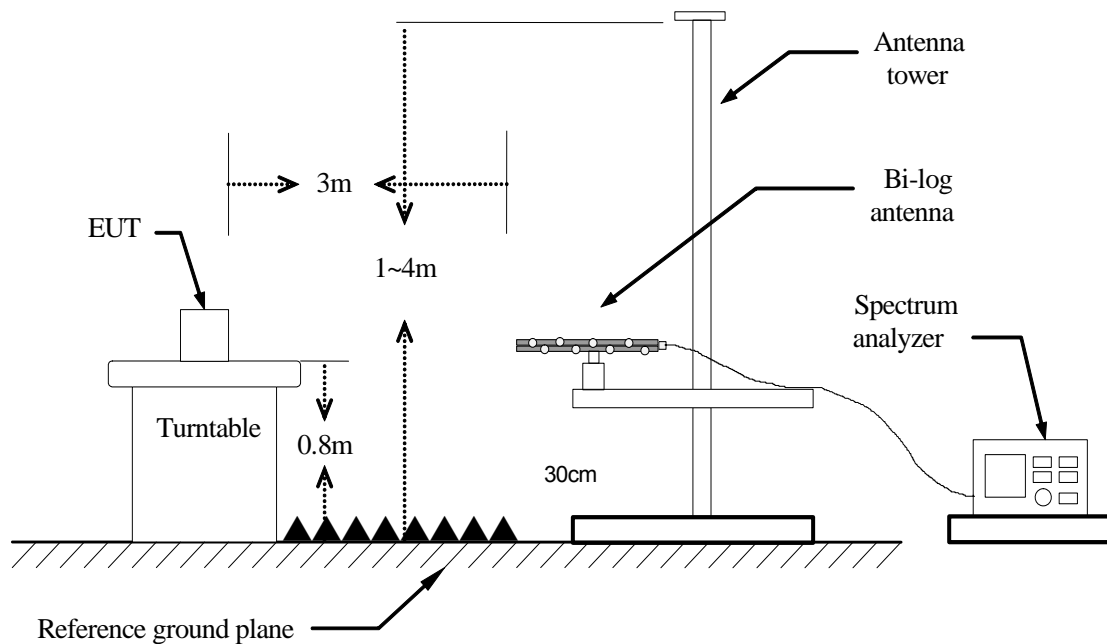

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, a suitable Sweep Time.
4. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

No non-compliance noted.

TEST DATA

Frequency (MHz)	Transmission Time (s)	Limit (Second)	Result
345	4.584	5	PASS

TEST PLOT

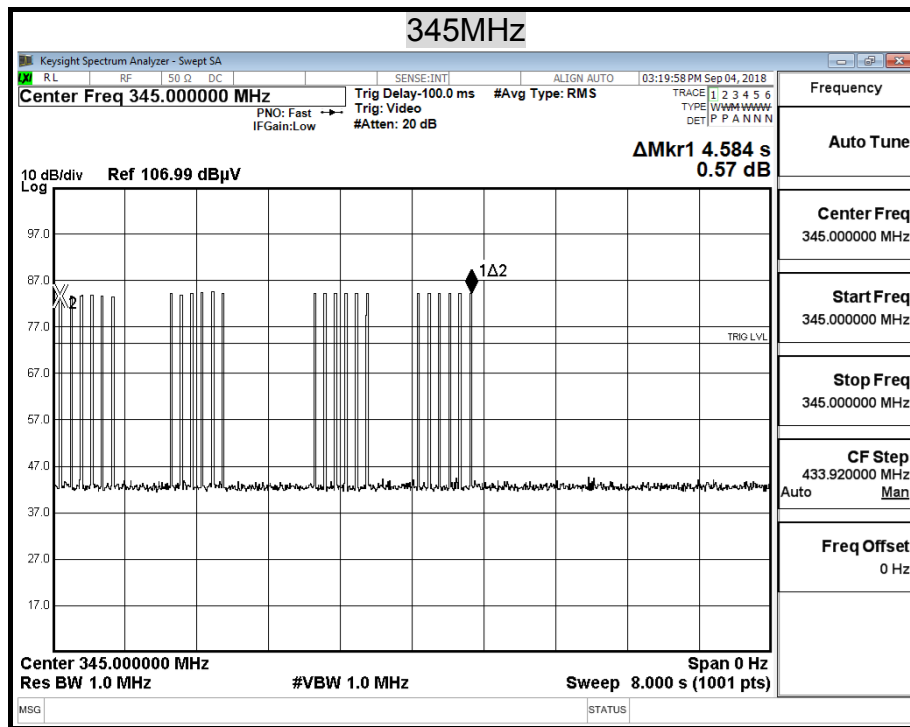


8.4 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST CONFIGURATION

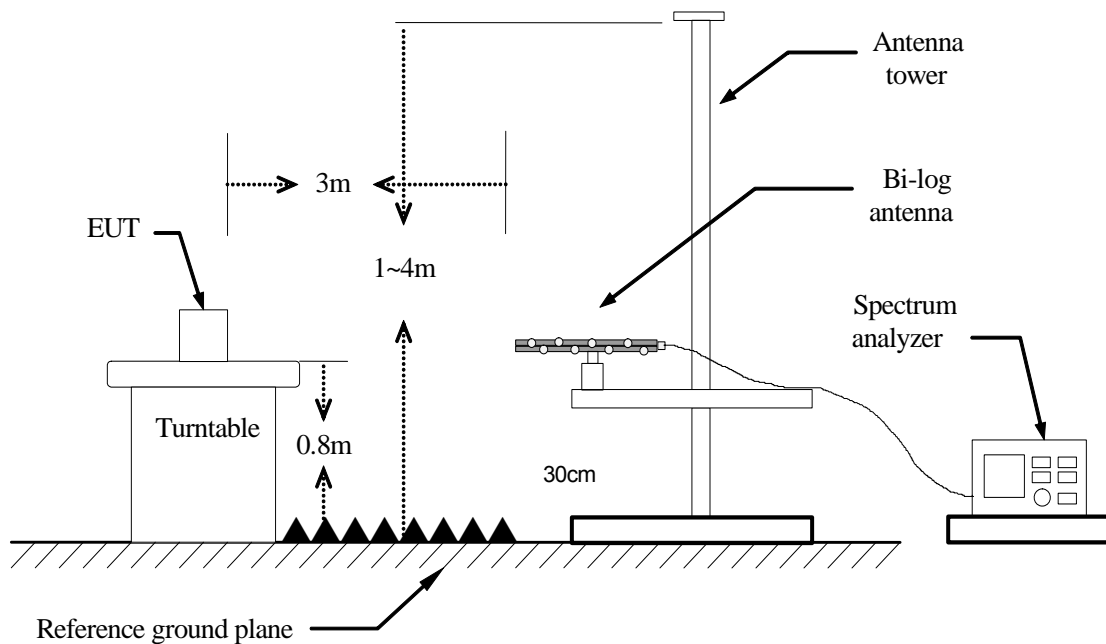

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, a suitable Sweep Time.
4. Repeat above procedures until all frequency measured were complete.



Report No.: T180829N03-RP1

Page: 21 / 41
Rev.: 02

TEST RESULTS

No non-compliance noted.

TEST DATA


	us	Times	Ton	Total Ton time(ms)
Ton1	140.000	45	6300.000	8.820
Ton2	280.000	9	2520.000	
Ton3			0.000	
Tp				100.000

Ton	8.820
Tp(Ton+Toff)	100.000
Duty Cycle	0.088
Duty Factor	-21.11


8.82 %

TEST PLOT


Ton

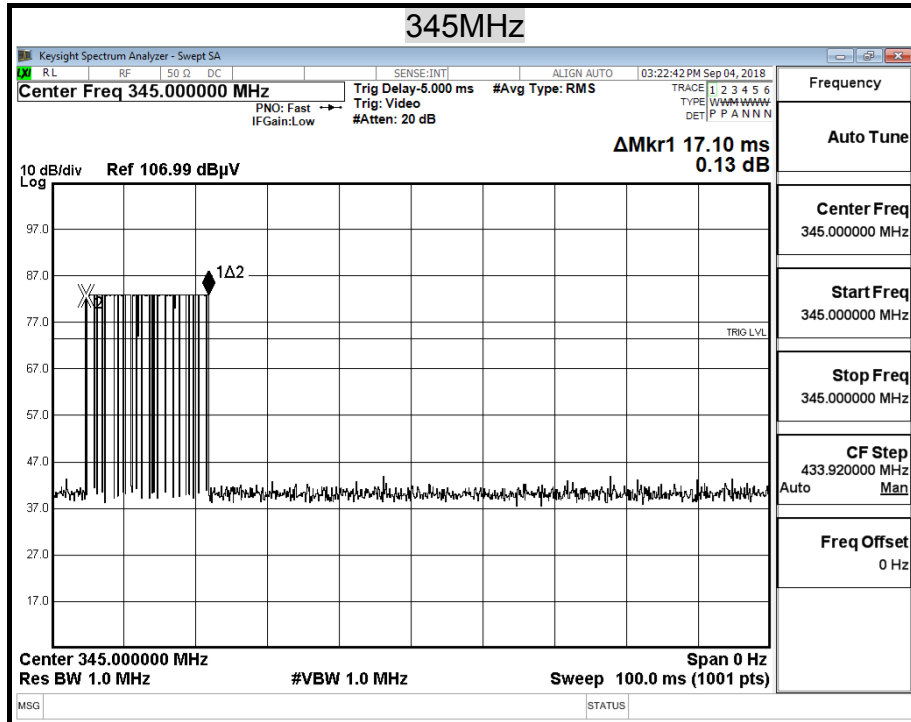


Ton1

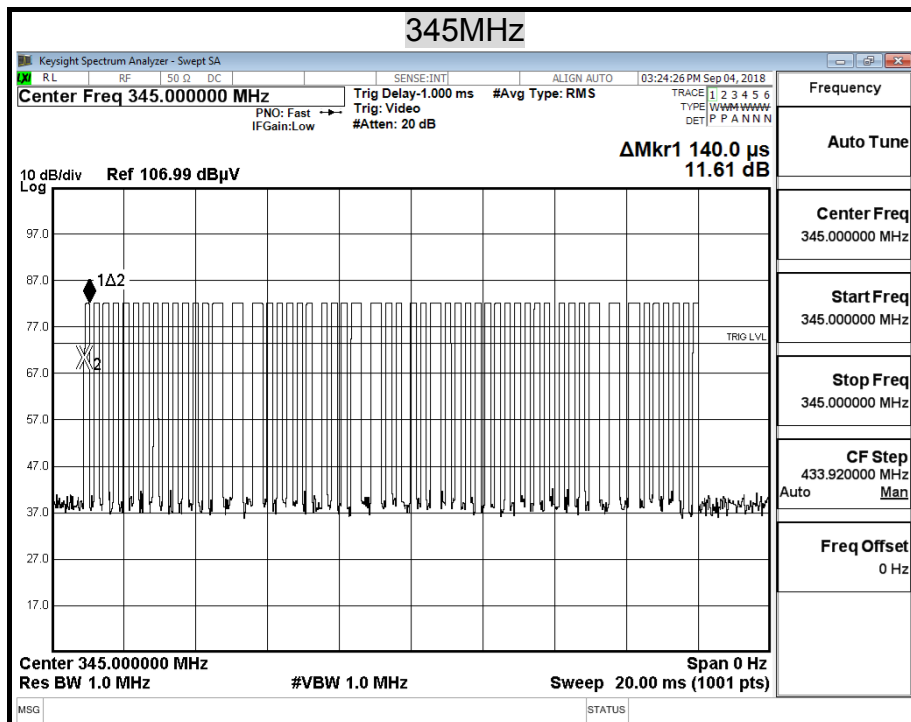

Ton2

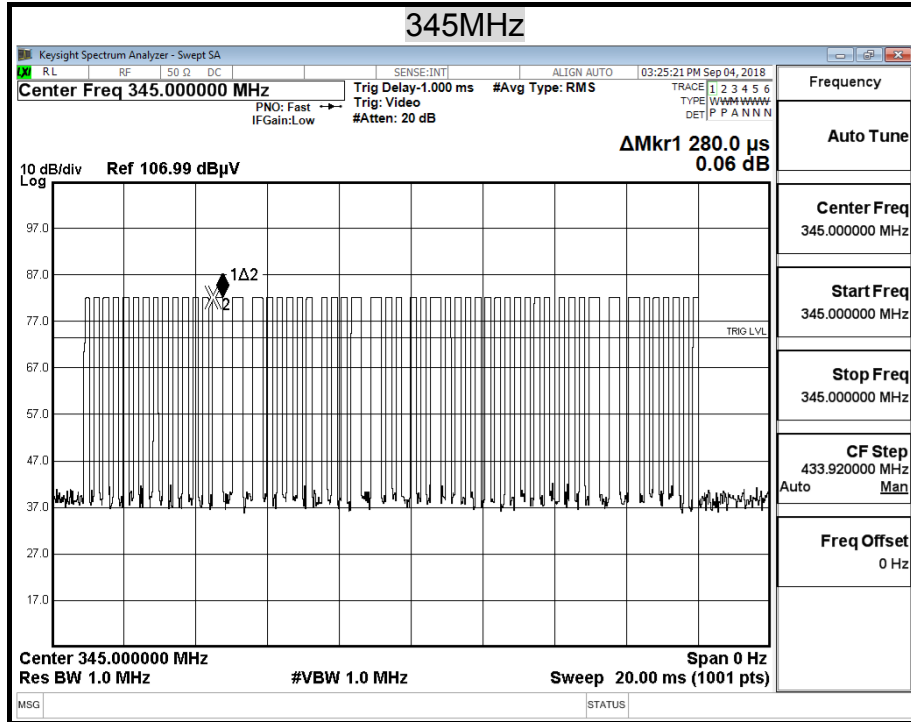


Tp

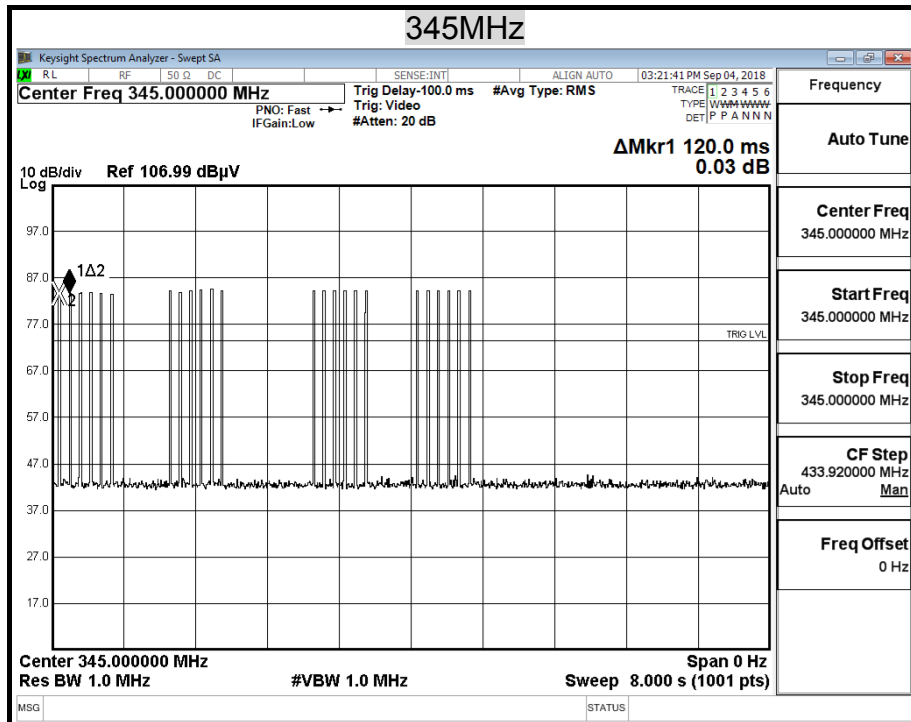

8.5 CENTRAL FREQUENCY

TEST CONFIGURATION

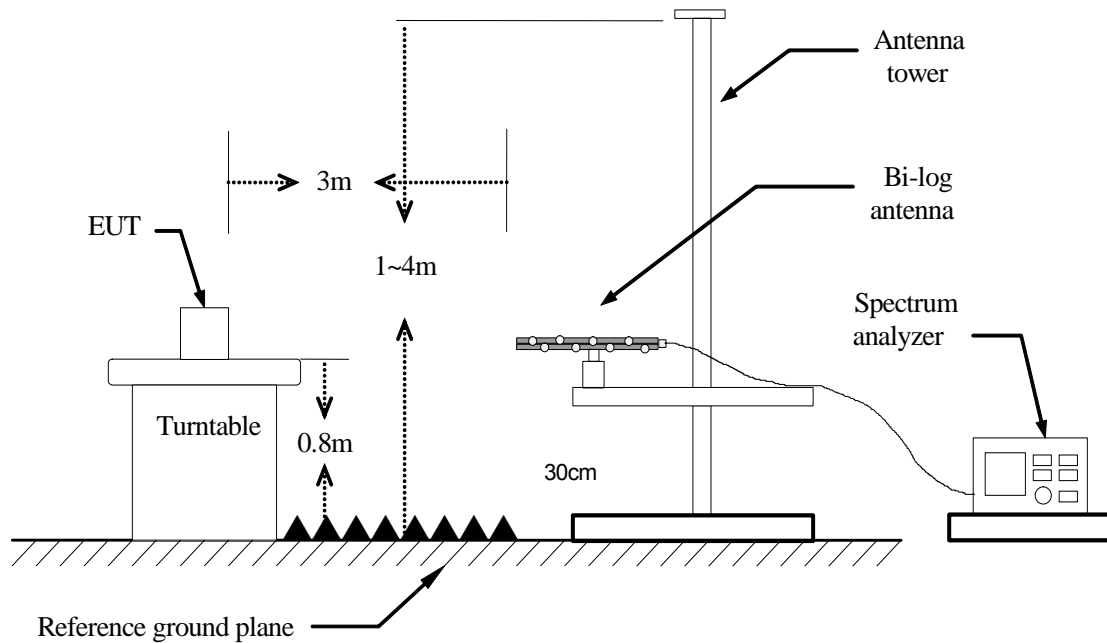

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1KHz, VBW=3KHz, Span = 100KHz, a suitable Sweep Time.
4. Repeat above procedures until all frequency measured were complete.



Report No.: T180829N03-RP1

Page: 25 / 41
Rev.: 02

TEST RESULTS

No non-compliance noted.

TEST DATA

Frequency (MHz)	Central frequency (MHz)	Frequency Error (MHz)
345	344.995	0.005

8.6 RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Field Strength (dBμV/m at 3-meter)	Measurement Distance (m)
30-88	100*	40	3
88-216	150*	43.5	3
216-960	200*	46	3
Above 960	500	54	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54□72 MHz, 76□88 MHz, 174□216 MHz or 470□806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. For intentional device, according to § 15.231, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following table.


Fundamental Frequency (MHz)	Field Strength of Fundamental (μV/M)	Field Strength of Spurious Emission (μV/M)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

Note :


1. “ ※※ ” linear interpolations.
2. Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

TEST CONFIGURATION


9kHz ~ 30MHz

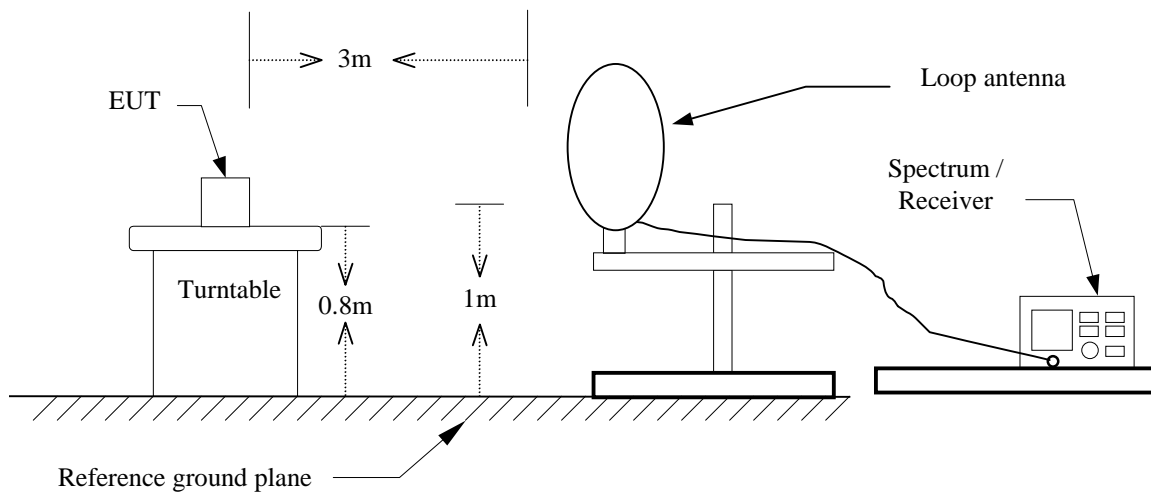

Below 1 GHz

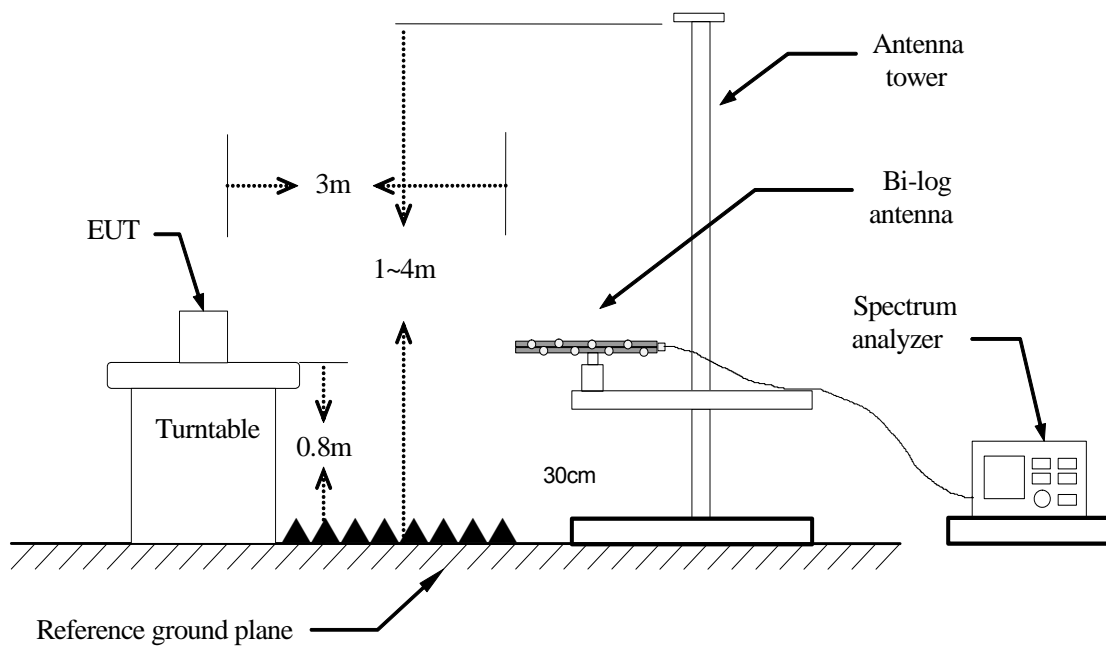


Above 1 GHz

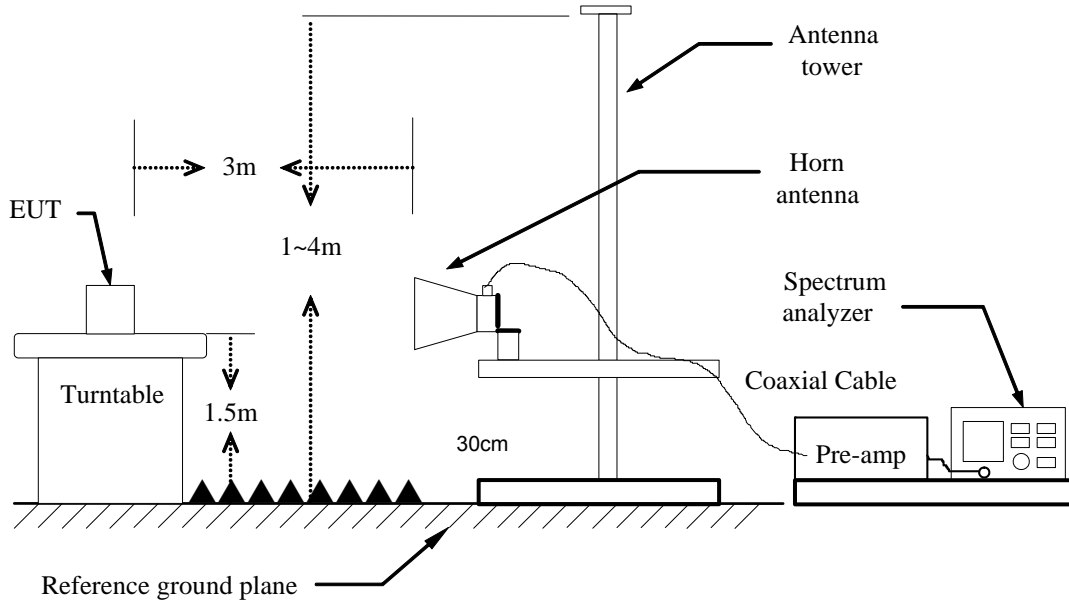

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m/1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: Peak Level + Duty Factor
7. Repeat above procedures until the measurements for all frequencies are complete.
8. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
9. Average level=Peak level + Duty factor
10. In order to comply the KDB 41477 requirement, although the test data is done in chamber, there has made the comparison with open site test area, and confirming the data is valid.

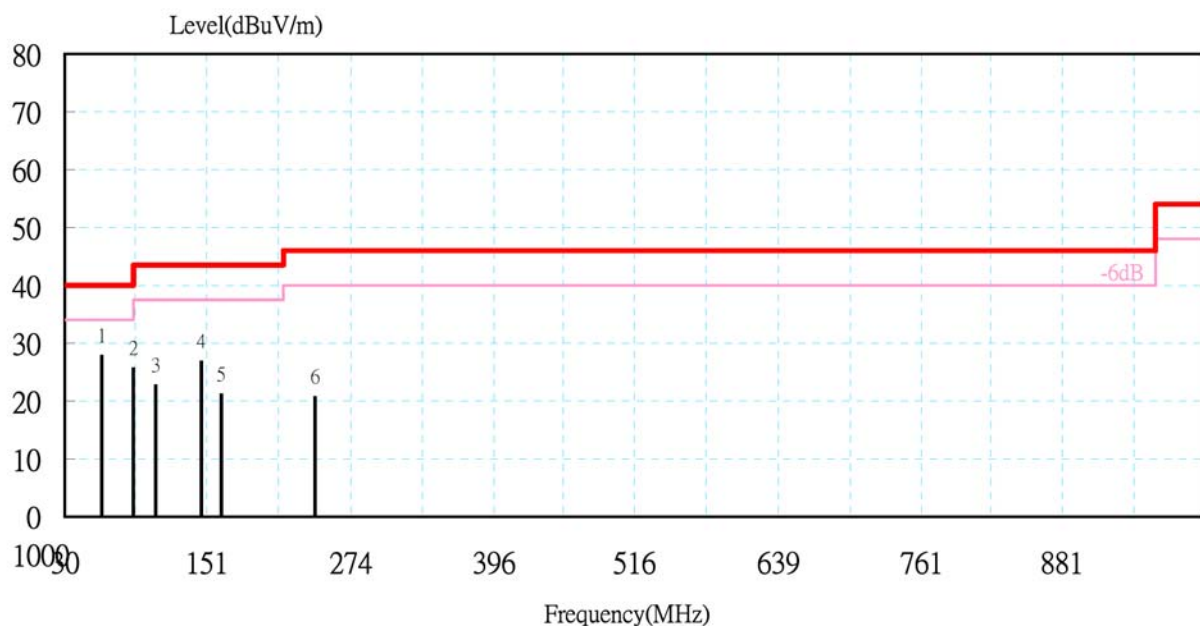TEST RESULTS**Below 1GHz****Operation Mode:** TX**Test Date:** 2018/10/03**Temperature:** 26.4°C**Tested by:** Ted Huang**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Vertical**


No.	Freq- uency (MHz)	Meter Reading at 3 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 3 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode
1	61.52	18.67	8.02	1.11	27.80	40.00	-12.20	QP
2	88.20	16.48	7.79	1.36	25.63	43.50	-17.87	QP
3	107.60	8.78	12.38	1.51	22.67	43.50	-20.83	QP
4	146.40	11.87	13.09	1.84	26.80	43.50	-16.70	QP
5	163.38	6.74	12.40	1.98	21.12	43.50	-22.38	QP
6	243.40	5.47	12.61	2.60	20.67	46.00	-25.33	QP

Remark:

- No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).
- That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Operation Mode: TX
Temperature: 26.4°C
Humidity: 52% RH

Test Date: 2018/10/03
Tested by: Ted Huang
Polarity: Ver. / Hor.

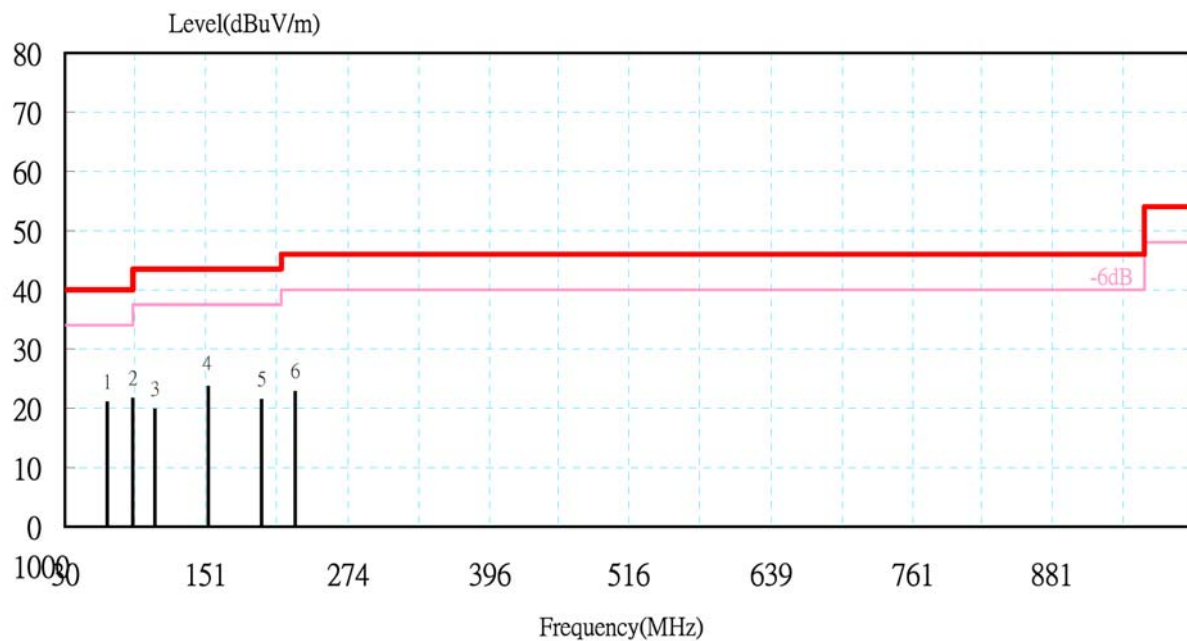Horizontal

No.	Freq- Uency (MHz)	Meter Reading at 3 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 3 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode PK/QP
1	66.37	11.42	8.41	1.13	20.96	40.00	-19.04	QP
2	88.20	12.42	7.79	1.36	21.57	43.50	-21.93	QP
3	107.60	5.86	12.38	1.51	19.75	43.50	-23.75	QP
4	153.68	8.97	12.73	1.90	23.60	43.50	-19.90	QP
5	199.75	5.86	13.27	2.25	21.38	43.50	-22.12	QP
6	228.85	7.42	12.84	2.48	22.74	46.00	-23.26	QP

Remark:

- No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).
- That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
- The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

The fundamental signal

Operation Mode:	TX	Test Date:	2018/10/03
Temperature:	26.4°C	Tested by:	Ted Huang
Humidity:	52% RH	Polarity:	Ver. / Hor.

Horizontal

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
345.000	103.867	14.945	3.424	26.575	0.000	95.661	97.257	-1.595	P
345.000	-	-	-	-	-	74.551	77.257	-2.705	A

Vertical

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
345.000	100.291	14.945	3.424	26.575	0.000	92.085	97.257	-5.171	P
345.000	-	-	-	-	-	70.975	77.257	-6.281	A

Remark:

1. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Quasi-peak limit (dBuV/m)}$.
2. $\text{Average level} = \text{Peak level} + \text{Duty factor}$

The Harmonic

Operation Mode:	TX	Test Date:	2018/10/03
Temperature:	26.4°C	Tested by:	Ted Huang
Humidity:	52% RH	Polarity:	Ver. / Hor.

Horizontal

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
689.98	66.01	20.38	5.71	25.63	0.00	66.48	77.26	-10.78	P
689.98	-	-	-	-	-	45.37	57.26	-11.89	A

Vertical

Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
345.000	100.291	14.945	3.424	26.575	0.000	92.085	97.257	-5.171	P
345.000	-	-	-	-	-	70.975	77.257	-6.281	A

Remark:

1. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Quasi-peak limit (dBuV/m)}$.
2. $\text{Average level} = \text{Peak level} + \text{Duty factor}$

Above 1 GHz

Operation Mode:	TX	Test Date:	2018/10/03
Temperature:	26.4°C	Tested by:	Ted Huang
Humidity:	52% RH	Polarity:	Ver. / Hor.

Horizontal

	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	1034.93	59.54	24.55	1.89	45.40	1.53	42.11	74.00	-31.89	P
*	1034.93	-	-	-	-	-	21.00	54.00	-33.00	A
*	1380.27	80.50	26.00	2.21	45.12	1.01	64.59	74.00	-9.41	P
*	1380.27	-	-	-	-	-	43.48	54.00	-10.52	A
	1725.03	75.65	28.26	2.48	44.88	0.64	62.15	77.26	-15.11	P
	1725.03	-	-	-	-	-	41.04	57.26	-16.22	A
	2070.04	84.26	30.34	2.72	44.68	0.41	73.06	77.26	-4.20	P
	2070.04	-	-	-	-	-	51.95	57.26	-5.31	A
	2414.96	81.16	30.07	2.91	44.54	0.40	70.00	77.26	-7.25	P
	2414.96	-	-	-	-	-	48.89	57.26	-8.36	A
*	2760.27	69.38	30.10	3.15	44.39	0.34	58.58	74.00	-15.42	P
*	2760.27	-	-	-	-	-	37.47	54.00	-16.53	A
	3105.21	66.10	30.20	3.42	44.27	0.27	55.71	77.26	-21.54	P
	3105.21	-	-	-	-	-	34.60	57.26	-22.65	A
	3449.50	66.49	30.20	3.74	44.24	0.23	56.43	77.26	-20.82	P
	3449.50	-	-	-	-	-	35.32	57.26	-21.93	A
*	3795.60	68.78	30.61	3.90	44.19	0.30	59.39	74.00	-14.61	P
*	3795.60	-	-	-	-	-	38.28	54.00	-15.72	A
	4139.97	62.80	31.21	4.04	44.19	0.33	54.19	77.26	-23.07	P
	4139.97	-	-	-	-	-	33.08	57.26	-24.18	A
	5519.30	63.81	33.92	4.90	44.64	0.22	58.21	77.26	-19.05	P
	5519.30	-	-	-	-	-	37.10	57.26	-20.16	A

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.

Report No.: T180829N03-RP1

4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m). Peak detector mode and average detector mode of the emission shown in Result column.
7. Average level=Peak level + Duty factor
8. *=Restricted bands of operation

Report No.: T180829N03-RP1

Operation Mode: TX **Test Date:** 2018/10/03
Temperature: 26.4°C **Tested by:** Ted Huang
Humidity: 52% RH **Polarity:** Ver. / Hor.

Vertical

	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	1034.81	58.82	24.55	1.89	45.40	1.53	41.39	74.00	-32.61	P
*	1034.81	-	-	-	-	-	20.28	54.00	-33.72	A
*	1380.02	77.35	26.00	2.21	45.12	1.01	61.44	74.00	-12.56	P
*	1380.02	-	-	-	-	-	40.33	54.00	-13.67	A
	1725.06	77.72	28.26	2.48	44.88	0.64	64.22	77.26	-13.04	P
	1725.06	-	-	-	-	-	43.11	57.26	-14.15	A
	2070.14	80.13	30.34	2.72	44.68	0.41	68.92	77.26	-8.33	P
	2070.14	-	-	-	-	-	47.81	57.26	-9.44	A
	2415.09	72.23	30.07	2.91	44.54	0.40	61.07	77.26	-16.18	P
	2415.09	-	-	-	-	-	39.96	57.26	-17.29	A
*	2760.19	62.98	30.10	3.15	44.39	0.34	52.18	74.00	-21.82	P
*	2760.19	-	-	-	-	-	31.07	54.00	-22.93	A
	3105.01	61.60	30.20	3.42	44.27	0.27	51.22	77.26	-26.04	P
	3105.01	-	-	-	-	-	30.11	57.26	-27.15	A
	3449.49	58.71	30.20	3.74	44.24	0.23	48.65	77.26	-28.60	P
	3449.49	-	-	-	-	-	27.54	57.26	-29.71	A
*	3795.07	67.82	30.61	3.90	44.19	0.30	58.43	74.00	-15.57	P
*	3795.07	-	-	-	-	-	37.32	54.00	-16.68	A
	4140.24	61.08	31.21	4.04	44.19	0.33	52.47	77.26	-24.79	P
	4140.24	-	-	-	-	-	31.36	57.26	-25.90	A
*	4830.12	60.53	32.99	4.39	44.32	0.37	53.96	74.00	-20.04	P
*	4830.12	-	-	-	-	-	32.85	54.00	-21.15	A

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field



Report No.: T180829N03-RP1

Page: 36 / 41
Rev.: 02

strength is too small to be measured.

5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m). Peak detector mode and average detector mode of the emission shown in Result column.
9. Average level=Peak level + Duty factor.
10. *=Restricted bands of operation

8.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
BNC Coaxial Cable	CCS	BNC50	11	01/23/2019
EMI Test Receiver	R&S	ESCS 30	100348	01/30/2019
LISN	SCHWARZBECK	NNLK8130	8130124	11/30/2018
LISN	FCC	FCC-LISN-50-32-2	08009	05/23/2019
Pulse Limiter	R&S	ESH3-Z2	100116	01/23/2019

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST RESULTS

※ This EUT is not connected to AC Source directly. No applicability for this test.

=== END of Report ===