

TEST REPORT

Applicant:	Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd
Address of Applicant:	No.2 Plant ,West of Shanxi country , Dashi street, Panyu District, Guangzhou City, China
Manufacturer:	Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd
Address of Manufacturer:	No.2 Plant ,West of Shanxi country , Dashi street, Panyu District, Guangzhou City, China
Factory:	Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd
Address of Factory:	No.2 Plant ,West of Shanxi country , Dashi street, Panyu District, Guangzhou City, China
Product name:	WNVR
Model(s):	WNVR-C20-81-JUN, WNVR-C20-8-JUN, WNVR201-44P, WNVR201-84P, WNVR201-88P, WNVR201-88P-B, CAN-WNVR201-44P, WM-WNVR-421, C-WNVR861P-B, WNVR201-86P-B, WNVR201-42P, WNVR201-42P-B, WNVR201-44P-B, WM-WNVR-841, WNVR201-44P-R, CL-2WNC1-82, CL-2WNC1-88, WNC21-82-B, WNVRC20-821, WNVRC20-841
Rating(s):	DC12V 2A
Trademark:	NIGHT OWL
Standards:	47 CFR PART 15 Subpart C: 2018 section 15.247
FCC ID:	2APRB-WNVR-C20-JUNE
Data of Receipt:	2018-12-18
Date of Test:	2018-12-18~2019-01-04
Date of Issue:	2019-01-04
Test Result	Pass*

* In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:

Test by:

Reviewed by:

Jan.04, 2019 Galen Xiao

Jan.04, 2019 Pauler Li

Project Engineer

Project Manager

Date

Name/Position

Signature

Date

Name/Position

Signature

Testing Laboratory information:

Testing Laboratory Name: ITL Co., Ltd

Address : No. 8 Jinqianling Street 5, Huangjiang Town, Dongguan,
Guangdong, 523757 P.R.C.

Testing location : Same as above

Tel : 0086-769-39001678

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

Possible test case verdicts:

- test case does not apply to the test object . : N/A
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement . : F (Fail)

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

The models WNVR-C20-81-JUN, WNVR-C20-8-JUN, WNVR201-44P, WNVR201-84P, WNVR201-88P, WNVR201-88P-B, CAN-WNVR201-44P, WM-WNVR-421, C-WNVR861P-B, WNVR201-86P-B, WNVR201-42P, WNVR201-42P-B, WNVR201-44P-B, WM-WNVR-841, WNVR201-44P-R, CL-2WNC1-82, CL-2WNC1-88, WNC21-82-B, WNVRC20-821 and WNVRC20-841 are identical to each other except for model names.

All tests were performed on the model WNVR-C20-81-JUN WNVR-C20-81-JUNas representative.

1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10:2013 Clause 6.9 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: 2013 Clause 6.10 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01 (Power Output Option 2-Method #1).	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10:2013 Clause 6.11 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01 (PSD Option 1).	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10:2013 Clause 6.7 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10:2013 Clause 6.4, 6.5 and 6.6 & KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01	PASS
Band Edges Measurement	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10:2013 Clause 6.9 & KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10:2013 Clause 6.2	PASS

2 Contents

	Page
TEST REPORT	1
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF E.U.T.....	5
3.3 DETAILS OF E.U.T.....	5
3.4 DESCRIPTION OF SUPPORT UNITS	6
3.5 TEST LOCATION	6
3.6 DEVIATION FROM STANDARDS	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
3.9 TEST FACILITY	6
3.10 MEASUREMENT UNCERTAINTY	7
4 INSTRUMENTS USED DURING TEST	8
5 TEST RESULTS	9
5.1 E.U.T. TEST CONDITIONS	9
5.2 ANTENNA REQUIREMENT	11
5.3 OCCUPIED BANDWIDTH	12
5.4 MAXIMUM PEAK OUTPUT POWER	26
5.5 PEAK POWER SPECTRAL DENSITY	40
5.6 CONDUCTED SPURIOUS EMISSIONS.....	58
5.7 RADIATED SPURIOUS EMISSIONS	71
5.7.1 Harmonic and other spurious emissions	74
5.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	84
5.9 BAND EDGES REQUIREMENT	88
5.10 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 kHz TO 30MHz.....	98
5.10.1 Measurement Data.....	100

3 General Information

3.1 Client Information

Applicant: Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd
 Address of Applicant: No.2 Plant ,West of Shanxi country , Dashi street, Panyu District, Guangzhou City, China

3.2 General Description of E.U.T.

Name: WNVR
 Model No.: WNVR-C20-81-JUN
 Trade Mark: NIGHT OWL
 Operating Frequency: 802.11 b/g/n(HT20): 2412MHz-2462MHz; 802.11 n(HT40): 2422MHz-2452MHz
 802.11b, 802.11g, 802.11n(20MHz): 11

Working Frequency of Each Channel:			
channel	Frequency	channel	Frequency
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Channels:

802.11n(40MHz): 7

Working Frequency of Each Channel:			
channel	Frequency	channel	Frequency
3	2422		
4	2427		
5	2432		
6	2437		
7	2442		
8	2447		
9	2452		

Type of Modulation: CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
 Antenna Type: SMA-reverse antenna with 5dBi peak Gain
 Function: Network Video Recorder
 Hardware version: V125P
 Software version: WNVR-C20-81_20181212

3.3 Details of E.U.T.

EUT Power Supply: DC 12V adapter

Test mode:

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz,
TM2	802.11g	2412MHz, 2437MHz, 2462MHz,
TM3	802.11n(20MHz)	2412MHz, 2437MHz, 2462MHz,
TM4	802.11n(40MHz)	2422MHz, 2437MHz, 2452MHz,

Power cord:

/

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

3.5 Test Location

All tests were performed at:

ITL Co., Ltd

No. 8 Jinqianling Street 5, Huangjiang Town, Dongguan, Guangdong, 523757 P.R.C.

0086-769-39001678

itl@i-testlab.com

No tests were sub-contracted.

3.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS(Lab code:L9342)
- FCC (Registration No.: 239076)
- IC (Registration NO.:CN0025)

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	2.25%
total RF power, conducted	± 1.34 dB
RF power density , conducted	± 1.49 dB
All emissions, radiated	± 2.72 dB
Temperature	± 5.02 dB
Humidity	$\pm 0.8^{\circ}\text{C}$
DC and low frequency voltages	± 1.5 %

4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
DGITL-306	Spectrum Analyzer	Agilent Technologies	N9010A	MY54200334	2017.05.31	2020.05.31
DGITL-307	Test Receiver	R&S	ESVS 10	840698/013	2018.06.19	2019.06.19
DGITL-352	Pre Amplifier	Mini-Circuits	ZFC-1000HX	SN292801110	2018.06.19	2019.06.19
DGITL-350	Wideband Amplifier Super Ultra	Mini-circuits	ZVA-183-S+	SN986401426	2018.06.19	2019.06.19
DGITL-308	Biconilog Antenna	ETS•Lindgren	3142E	156975	2017.02.21	2020.02.21
DGITL-309	Horn Antenna	ETS•Lindgren	3117	SN00152265	2017.02.21	2020.02.21
DGITL-303a	EMI Test receiver	R&S	ESCI	100910	2018.06.19	2019.06.19
DGITL-304	L.I.S.N.#1	R&S	ESH3-Z5	100272	2018.06.19	2019.06.19
DGITL-316	Pulse Limiter	R&S	ESH3-Z2	100327	2018.06.19	2019.06.19
DGITL-300	50Ω Coaxial Cable	Mini-circuits	CBL	C002	2018.06.19	2019.06.19
DGITL-301	Anechoic chamber	ETS•Lindgren	9m*6m*6m	CT000874-1181	2017.05.31	2020.05.31
DGITL-363	Loop Antenna	ZHINAN	ZN30900A	002489	2017.02.21	2020.02.21
DGITL-364	Horn Antenna	Schwarzbeck	BBHA 9170	B09806543	2017.02.21	2020.02.21
DGITL-302	Shielded Room	ETS•Lindgren	8*4*3	CT09010	2018.06.19	2019.06.19

5 Test Results

5.1 E.U.T. test conditions

Test Voltage: DC 12V adapter

Temperature: 23.2 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Requirements: **15.31(e):** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.

Test frequencies and frequency range:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

Working Frequency of Each Channel:			
channel	Frequency	channel	Frequency
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz,
TM2	802.11g	2412MHz, 2437MHz, 2462MHz,
TM3	802.11n(20MHz)	2412MHz, 2437MHz, 2462MHz,
TM4	802.11n(40MHz)	2422MHz, 2437MHz, 2452MHz,

5.2 Antenna requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna


This product has two SMA-reverse antennas. The best case gain of the antenna is 5dBi.

Test result: The unit does meet the FCC requirements.

5.3 Occupied Bandwidth

Test Requirement:	FCC Part 15 C section 15.247 (a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10:2013 Clause 6.9 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

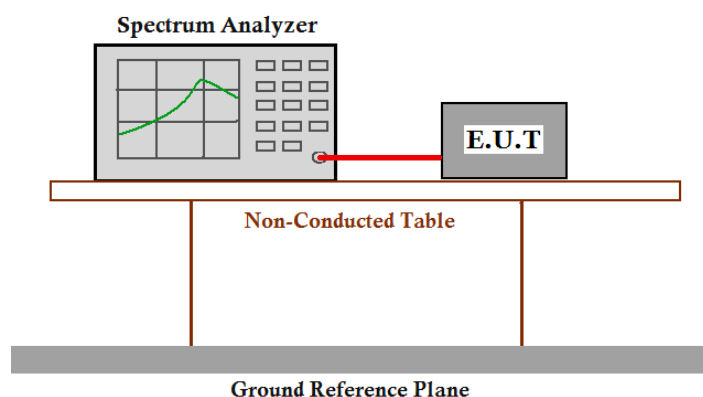

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable (Cable loss = 0.5dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=100kHz. VBW = 300kHz, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Test result (6 dB bandwidth)

Test Mode	Test Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		Antenna 1	Antenna 2		
802.11b	2412	9.829	10.01	≥500	Pass
	2437	9.696	9.288	≥500	Pass
	2462	10.36	9.812	≥500	Pass
802.11g	2412	16.46	16.49	≥500	Pass
	2437	16.48	16.50	≥500	Pass
	2462	16.46	16.49	≥500	Pass
802.11n(HT20)	2412	17.62	17.71	≥500	Pass
	2437	17.54	17.74	≥500	Pass
	2462	17.65	17.69	≥500	Pass
802.11n(HT40)	2412	36.10	35.99	≥500	Pass
	2437	35.80	36.04	≥500	Pass
	2452	35.36	36.05	≥500	Pass

The unit does meet the FCC requirements.

6dB bandwidth:

Result plot as follows:

Antenna 1 :

802.11b


Channel 1:2.412GHz:



Channel 6:2.437GHz:




Channel 11:2.462GHz:

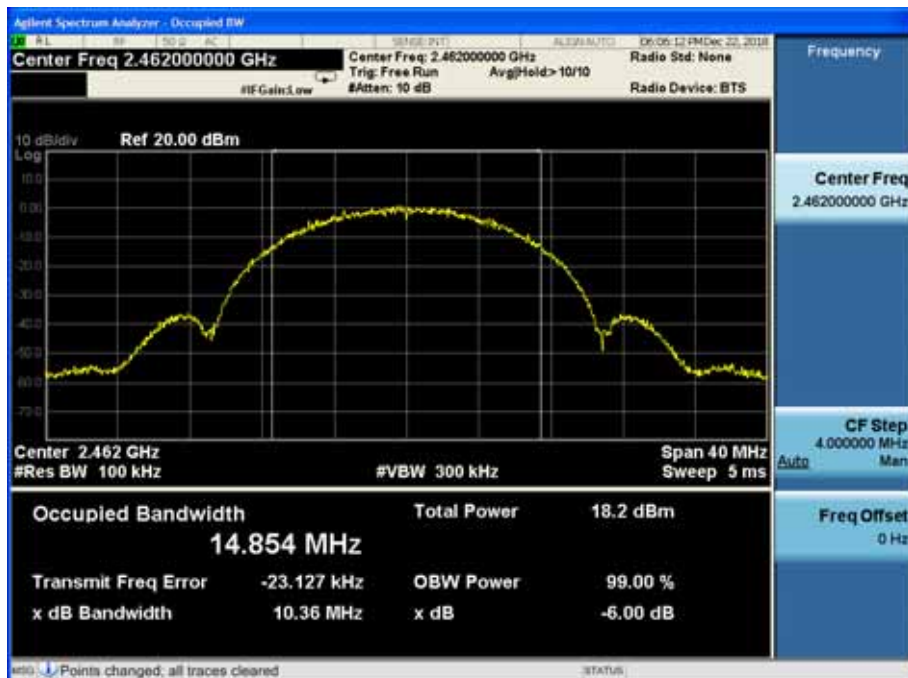


802.11g


Channel 1:2.412GHz:

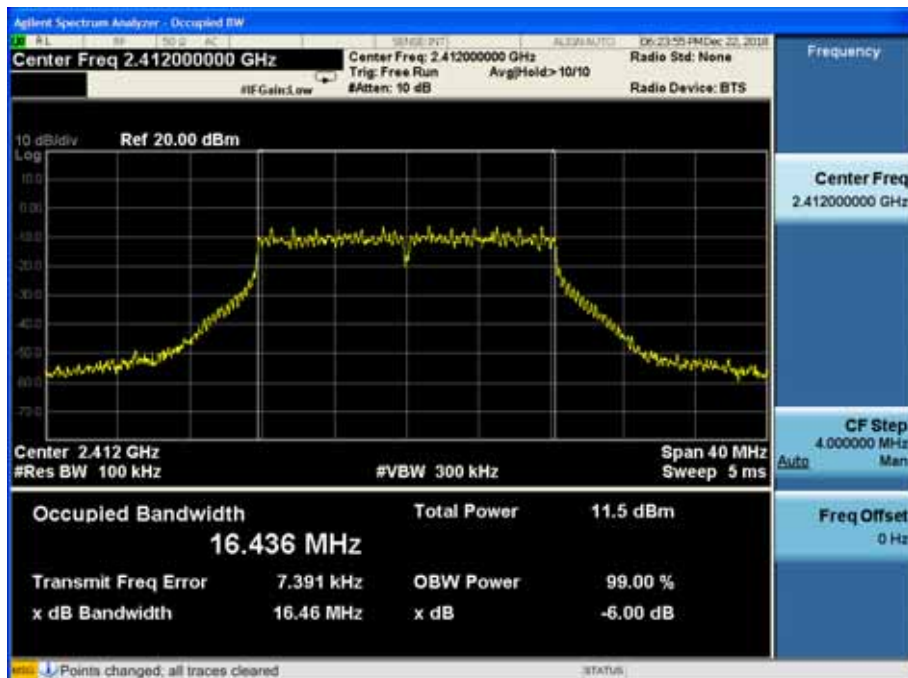

Channel 6:2.437GHz:

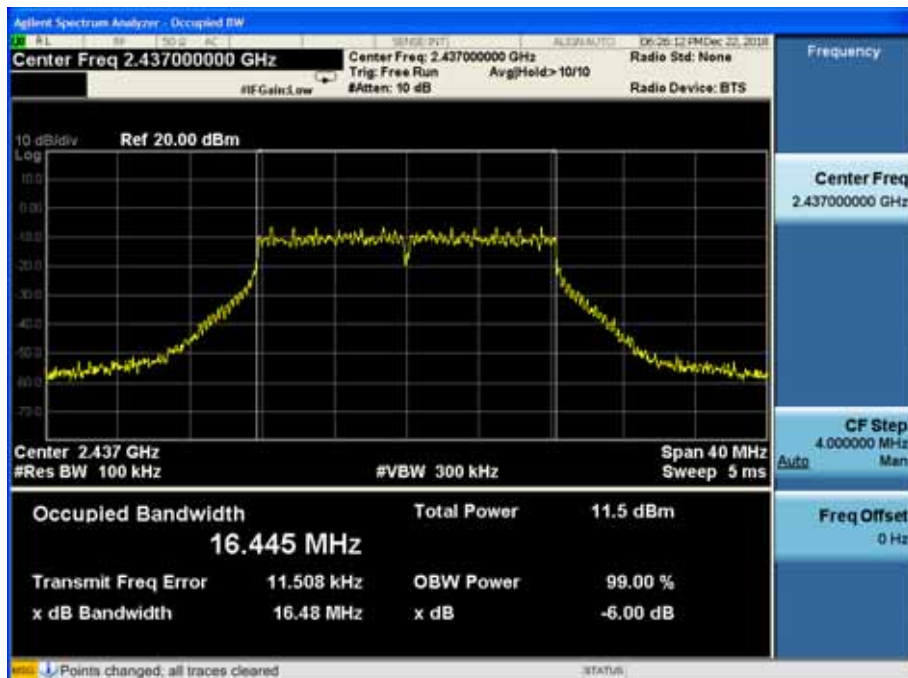


Channel 11:2.462GHz:

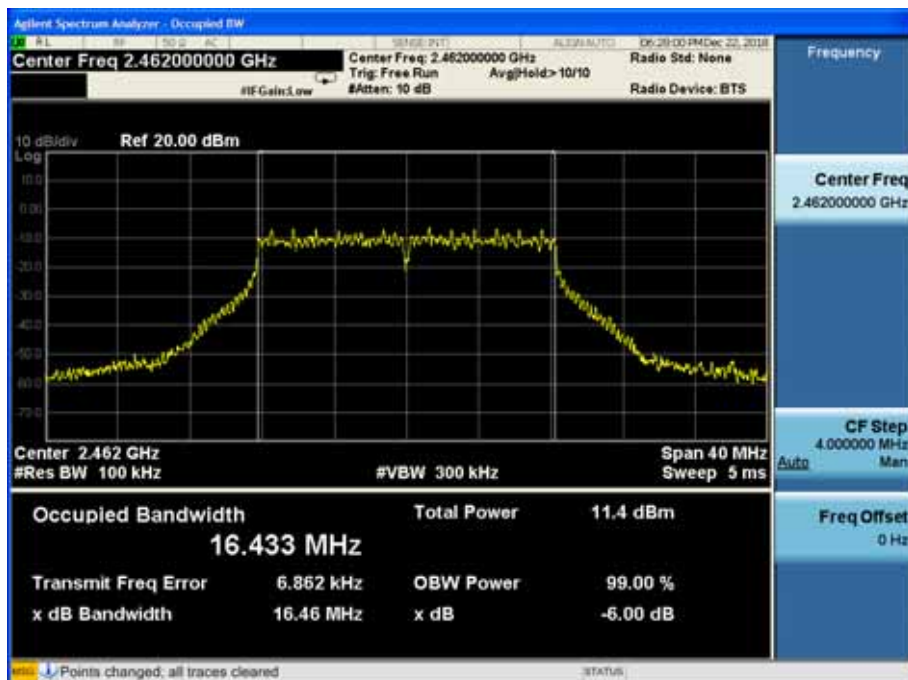


802.11n(HT20)


Channel 1:2.412GHz:

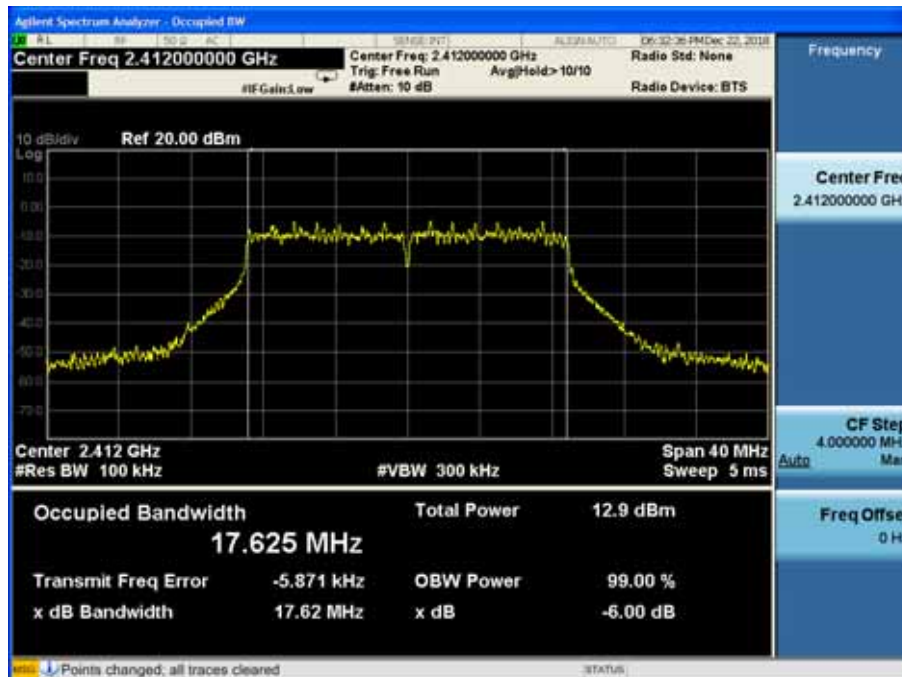

Channel 6:2.437GHz:

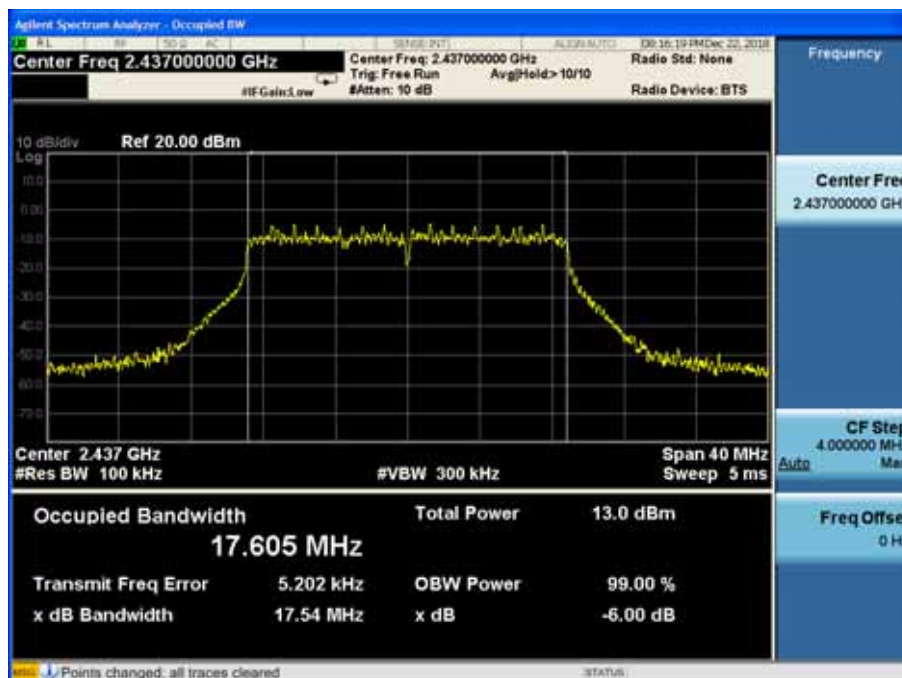


Channel 11:2.462GHz:

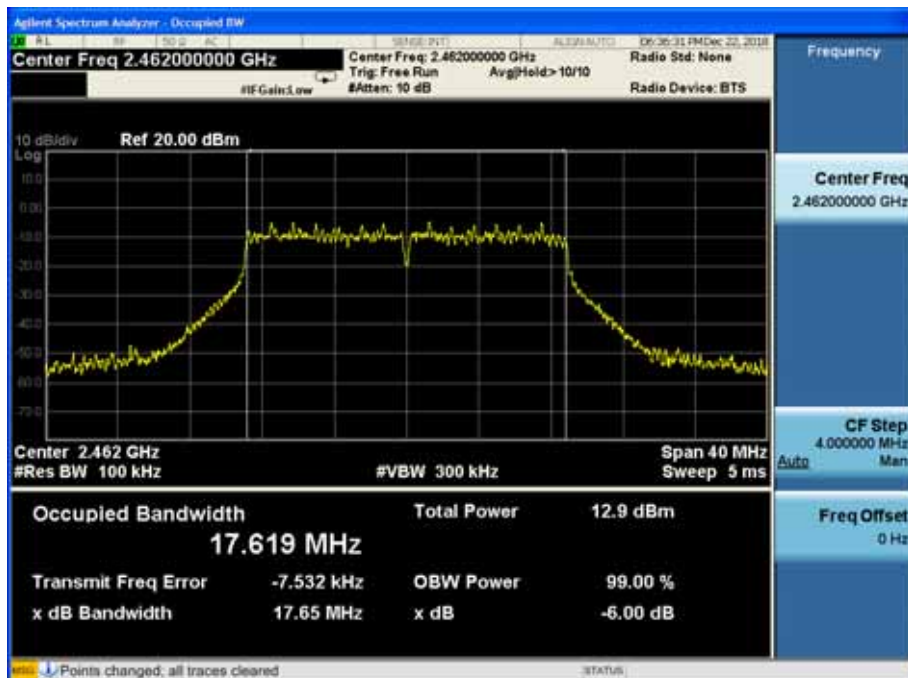


802.11n(HT40)


Channel 3:2.422GHz:

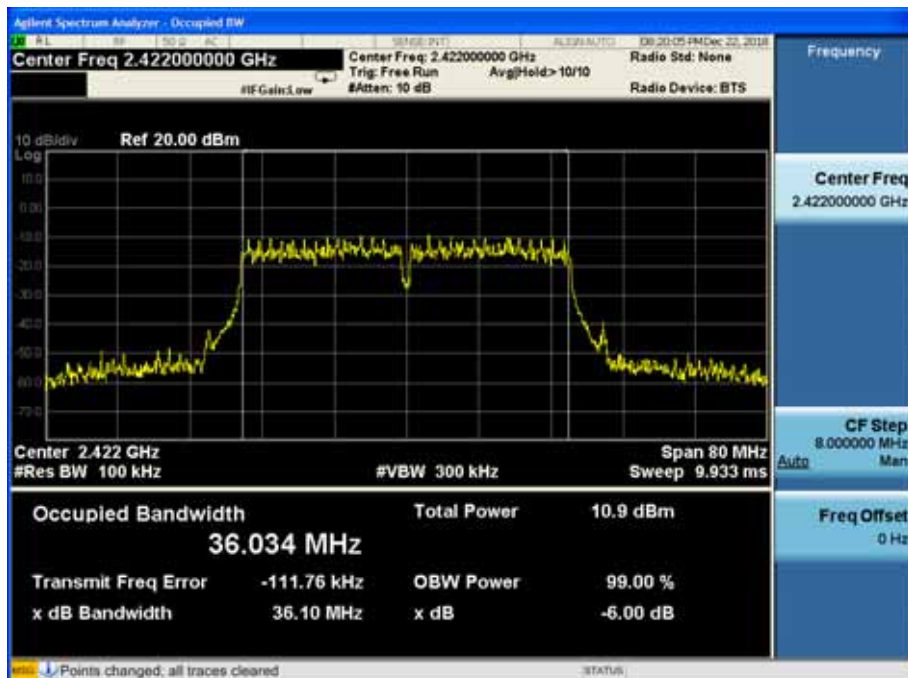

Channel 6:2.437GHz:

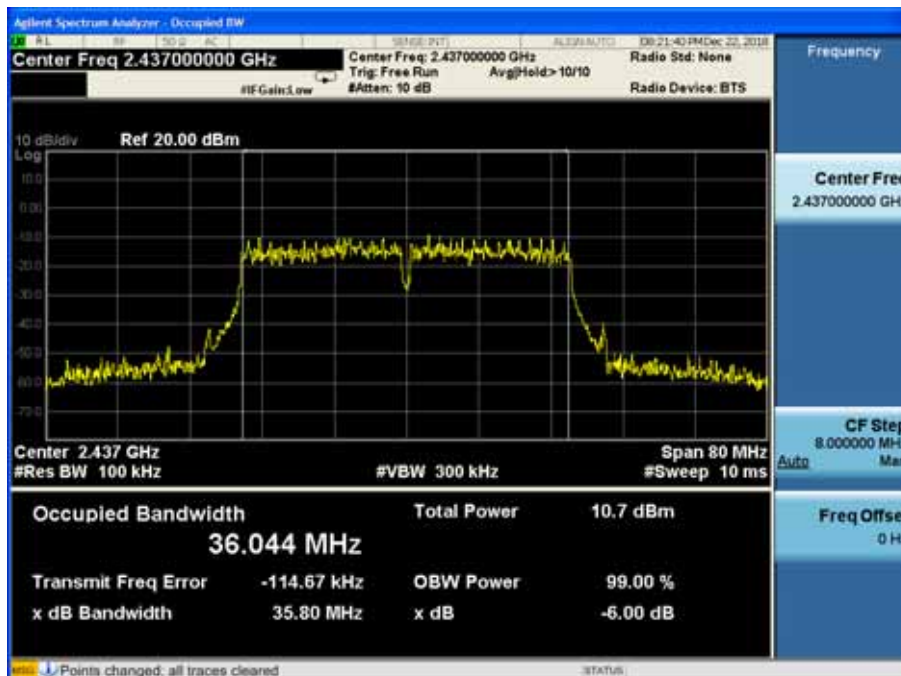


Channel 9:2.452GHz:

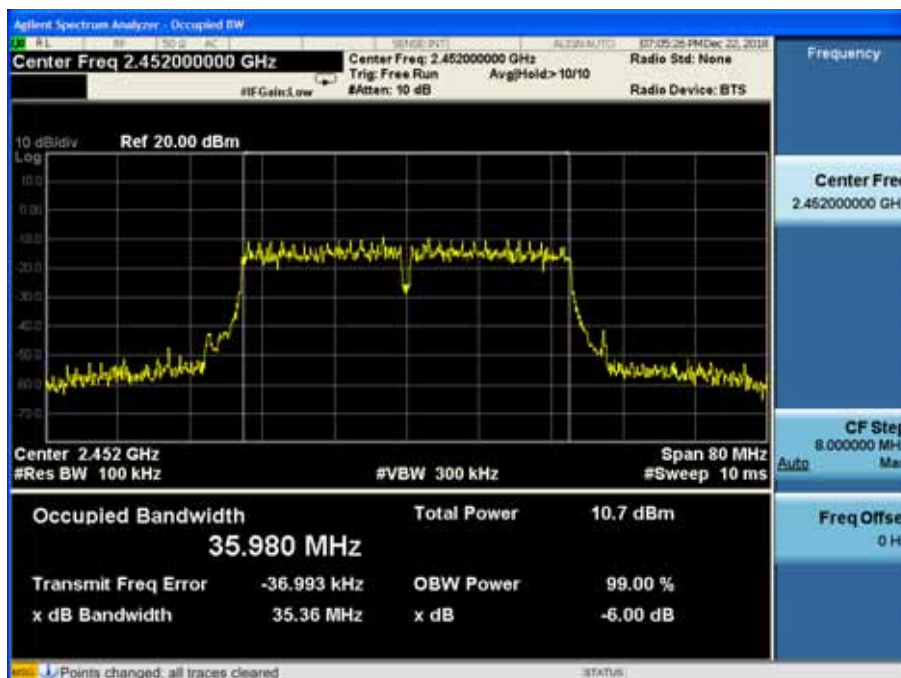


Antenna 2 :

802.11b

Channel 1:2.412GHz:

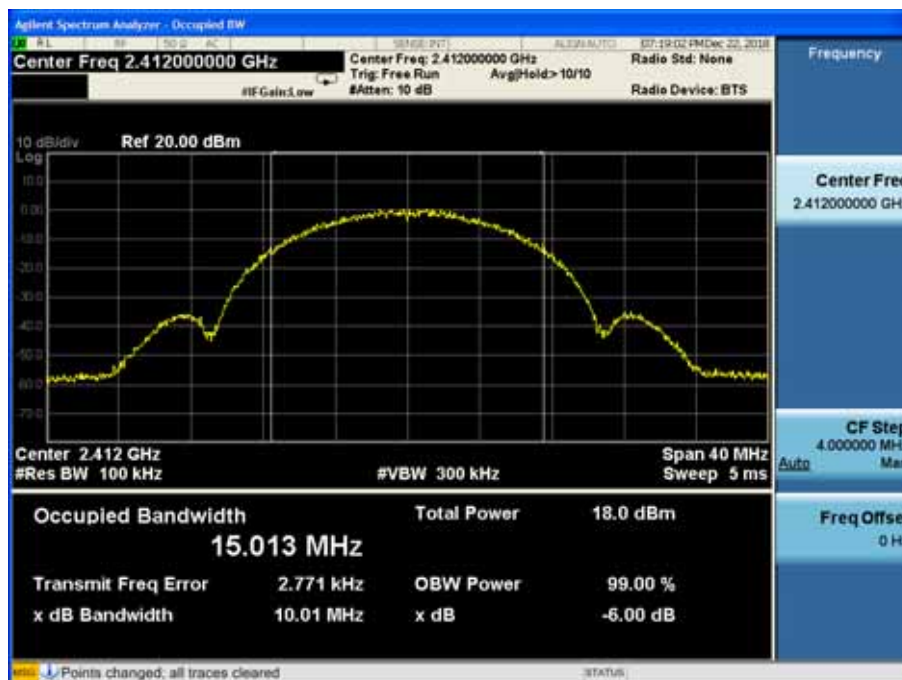

Channel 6:2.437GHz:

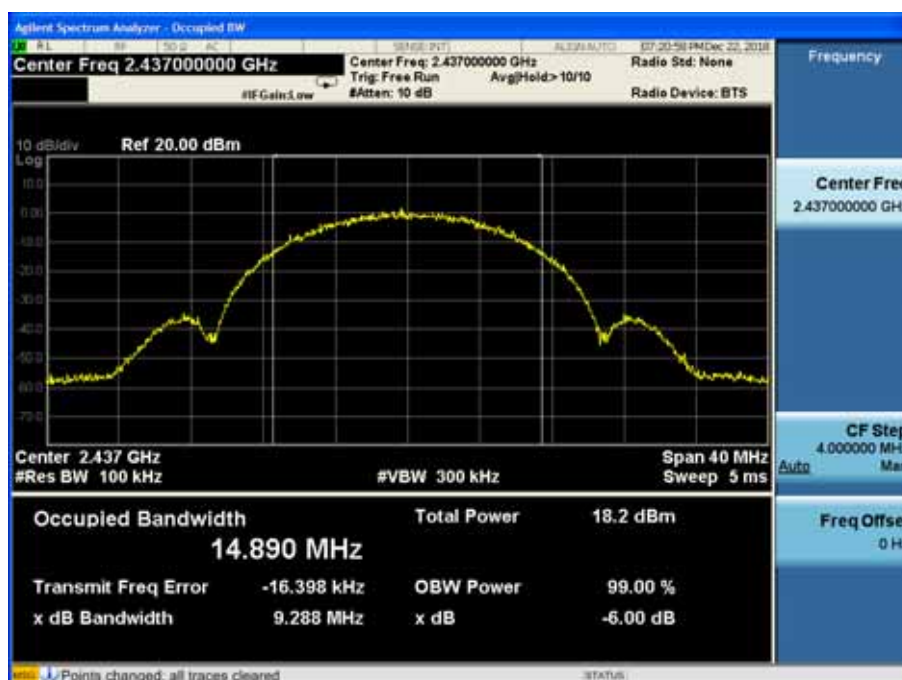


Channel 11:2.462GHz:




802.11g


Channel 1:2.412GHz:

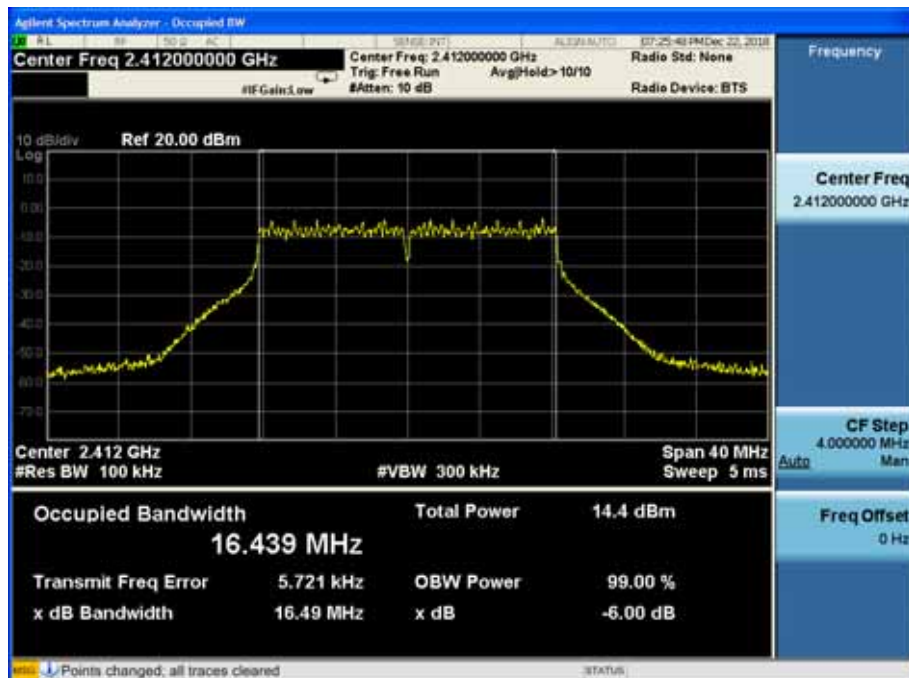

Channel 6:2.437GHz:

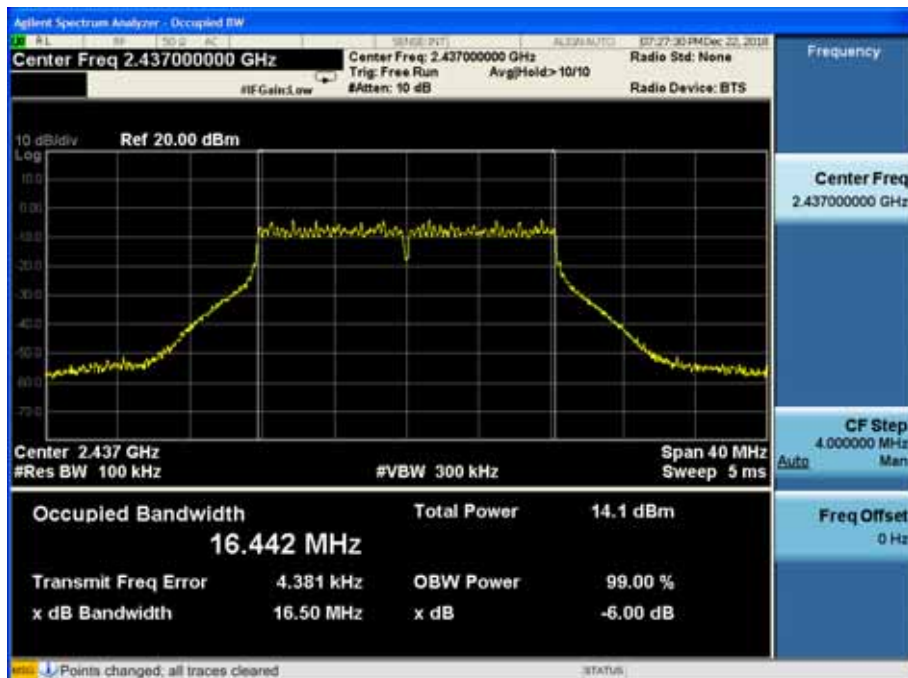


Channel 11:2.462GHz:

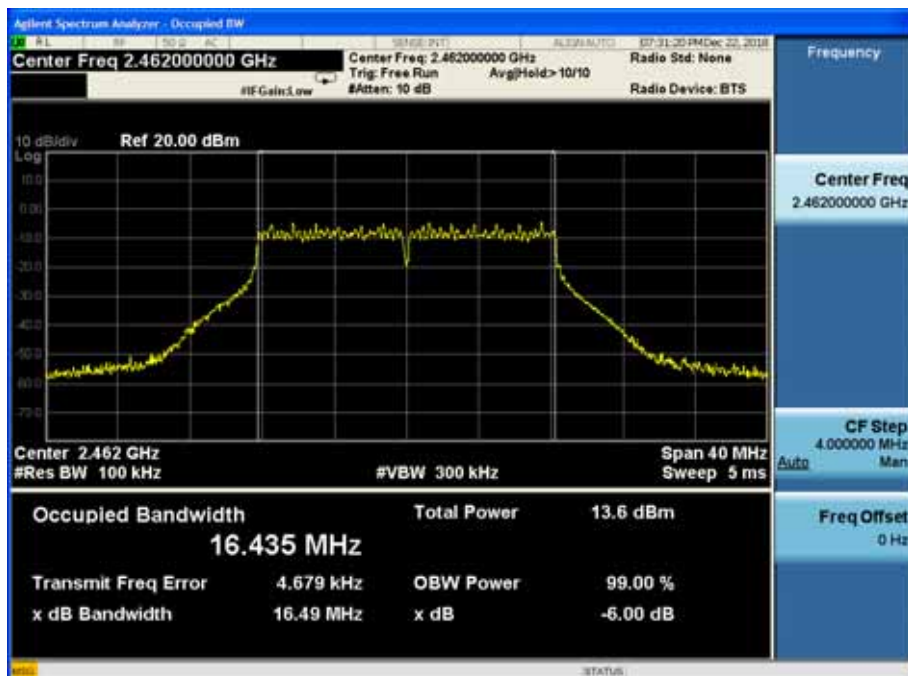


802.11n(HT20)


Channel 1:2.412GHz:

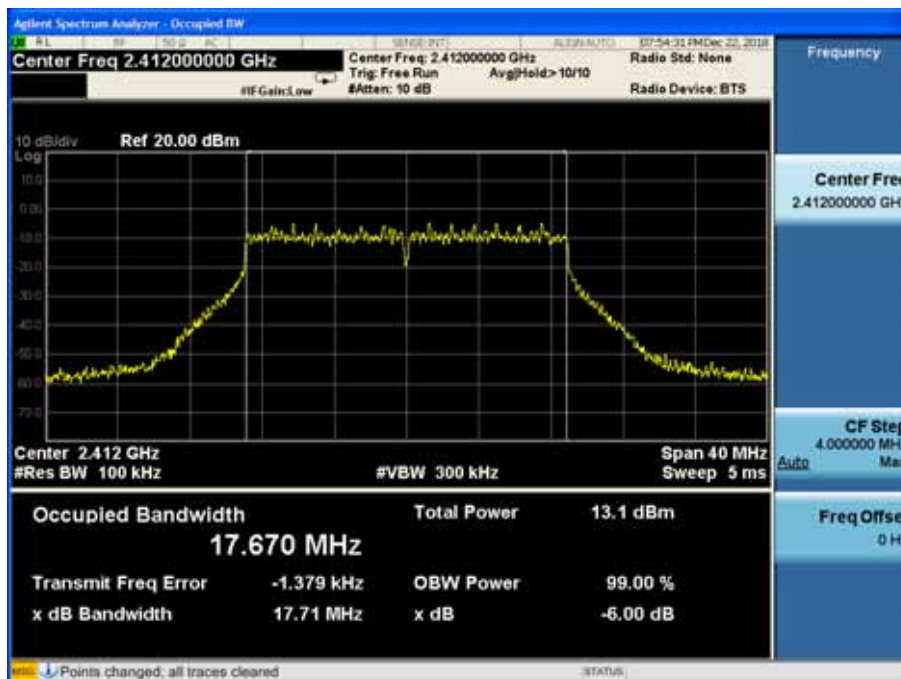

Channel 6:2.437GHz:

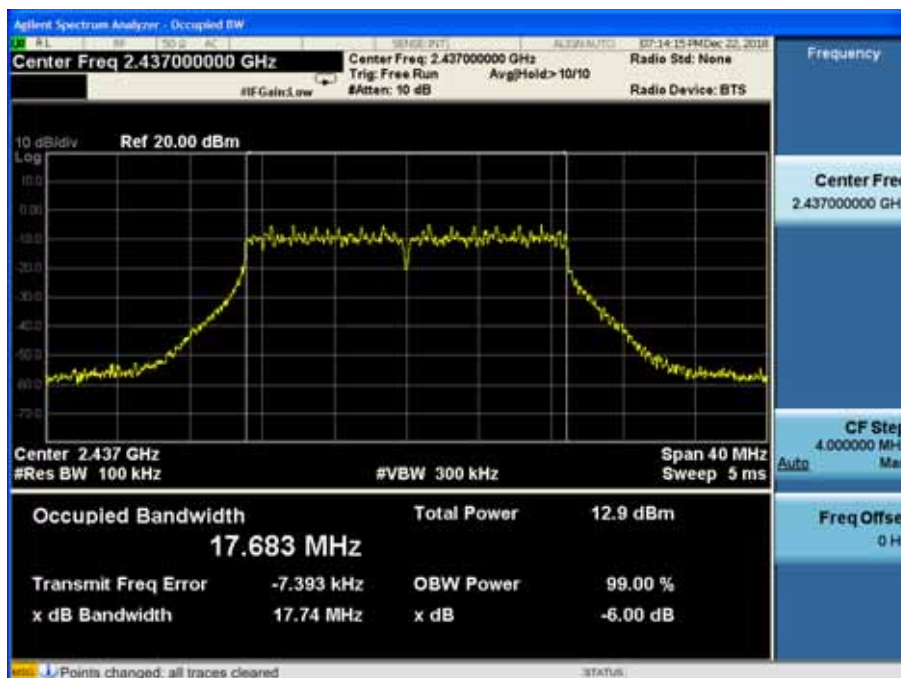


Channel 11:2.462GHz:

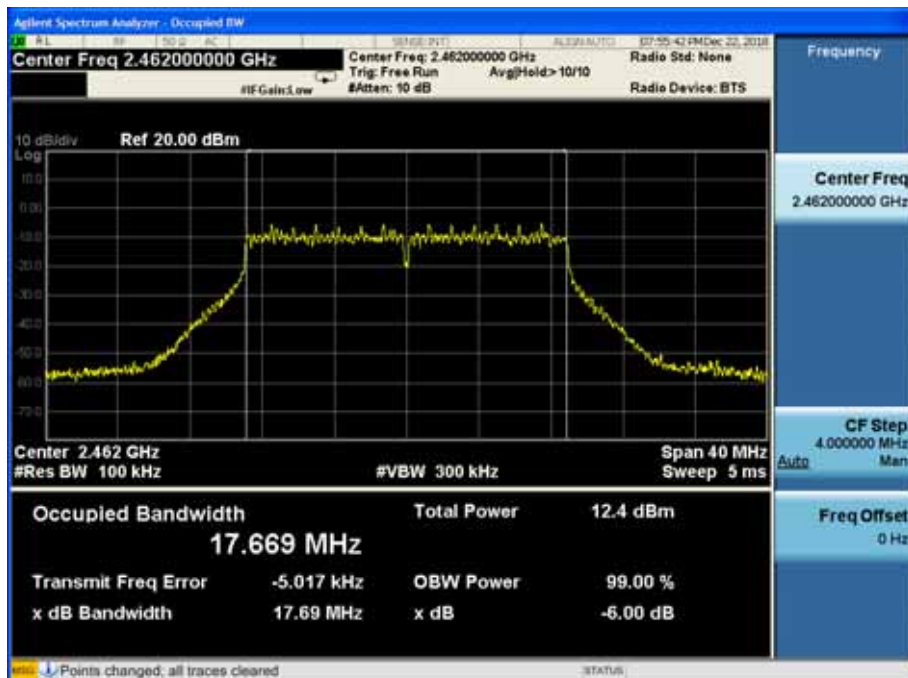


802.11n(HT40)


Channel 3:2.422GHz:

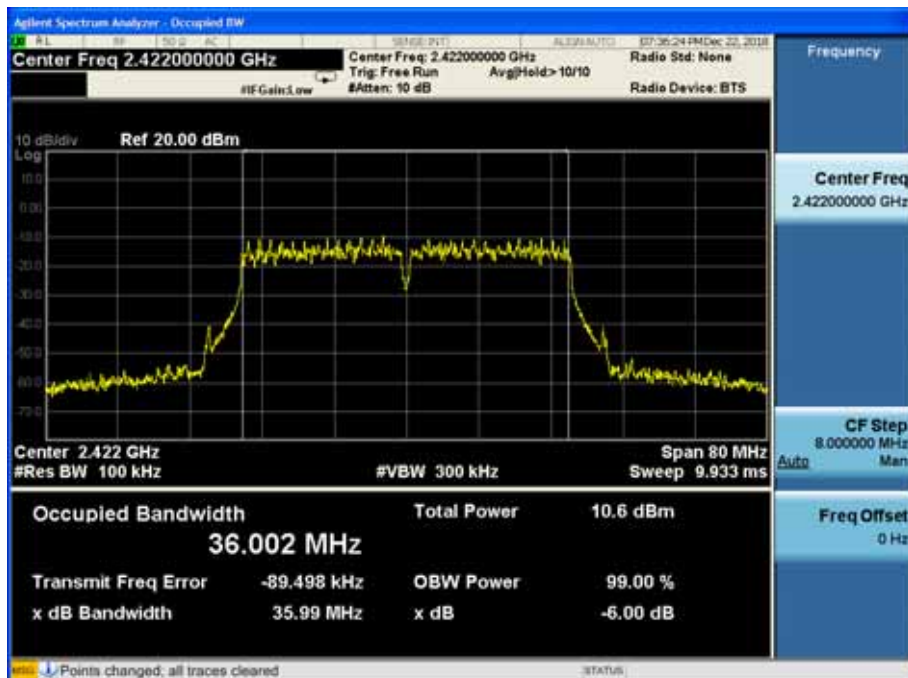

Channel 6:2.437GHz:

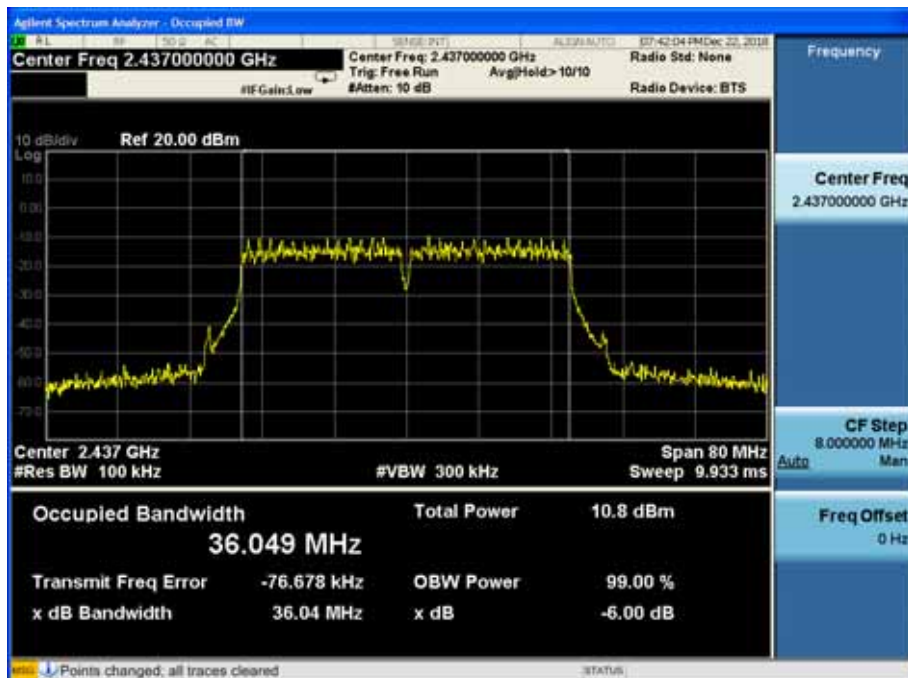

Channel 9:2.452GHz:

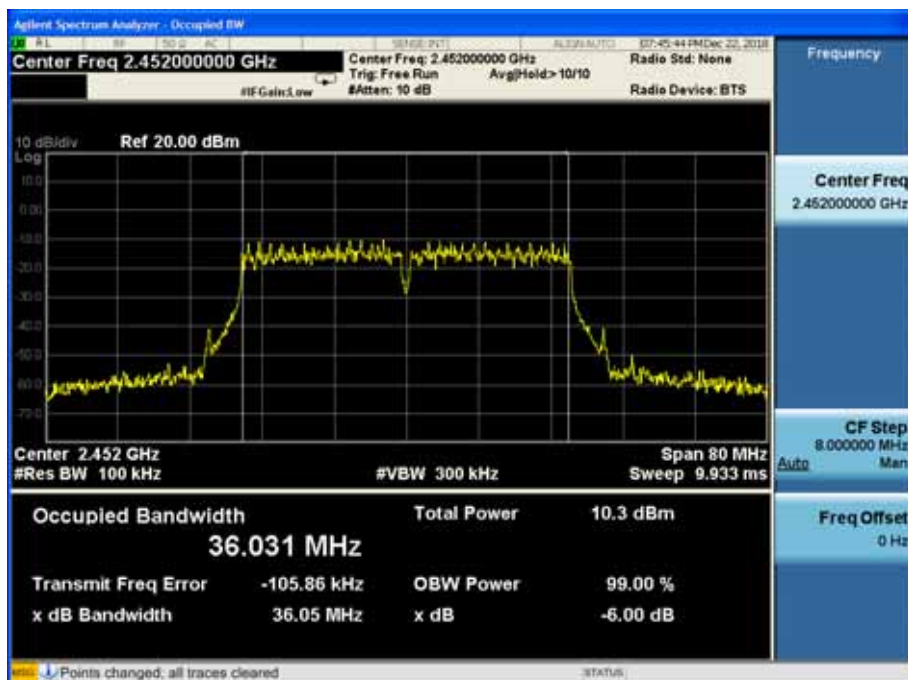

5.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247


(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10:2013 Clause 6.10 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01 (Power Output Option 2-Method #1).

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

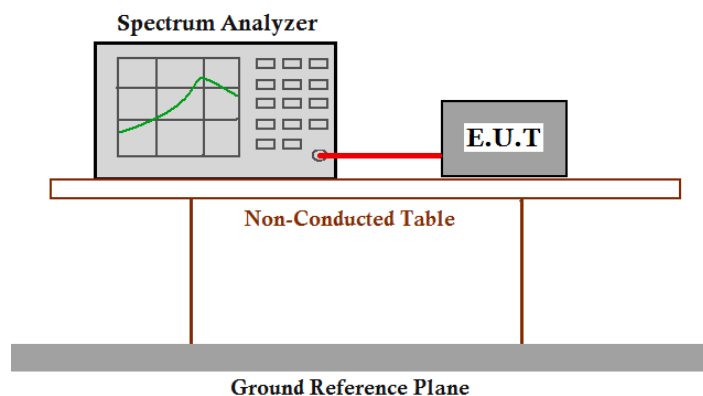

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss = 0.5dB) from the antenna port to the spectrum.
2. Set span to encompass the entire emission bandwidth (EBW) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW $\geq$ 3 MHz.

5. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.

6. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep.

If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run".

7. Trace average 100 traces in power averaging mode.

8. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

9. Measure the channel power of the test frequency with special test status.

10. Repeat until all the test status is investigated.

11. Report the worst case.

Test Data:

Test mode	Test Channel	Test Result (dBm)		Test Result (mW)		Total Pow. (dBm)	Total Pow. (mW)	Limit (mW)
		Ant 1	Ant 2	Ant 1	Ant 2			
802.11b	2412	15.70	16.17	37.15	41.40	/	/	1000
	2437	16.19	16.33	41.59	42.95	/	/	1000
	2462	16.49	16.35	44.57	43.15	/	/	1000
802.11g	2412	12.28	14.98	16.90	31.48	/	/	1000
	2437	12.31	14.69	17.02	29.44	/	/	1000
	2462	12.15	14.20	16.41	26.30	/	/	1000
802.11n(HT20)	2412	13.52	13.91	22.49	24.60	16.73	47.10	1000
	2437	13.55	13.67	22.65	23.28	16.62	45.92	1000
	2462	13.45	13.05	22.13	20.18	16.26	42.27	1000
802.11n(HT40)	2422	12.23	12.04	16.71	16.00	15.15	32.73	1000
	2437	12.25	12.13	16.79	16.33	15.20	33.11	1000
	2452	12.20	11.69	16.60	14.76	14.96	31.33	1000

Remark: 1) Cable loss=0.5dB

The unit does meet the FCC requirements.

Result plot as follows:

Antenna 1:

802.11 b

Channel 1: 2.412GHz:



Channel 6: 2.437GHz:



Channel 11: 2.462GHz:



802.11 g

Channel 1: 2.412GHz:



Channel 6: 2.437GHz:



Channel 11: 2.462GHz:



802.11 n (HT20)

Channel 1: 2.412GHz:



Channel 6: 2.437GHz:




Channel 11: 2.462GHz:



802.11 n (HT40)

Channel 3: 2.4122GHz:

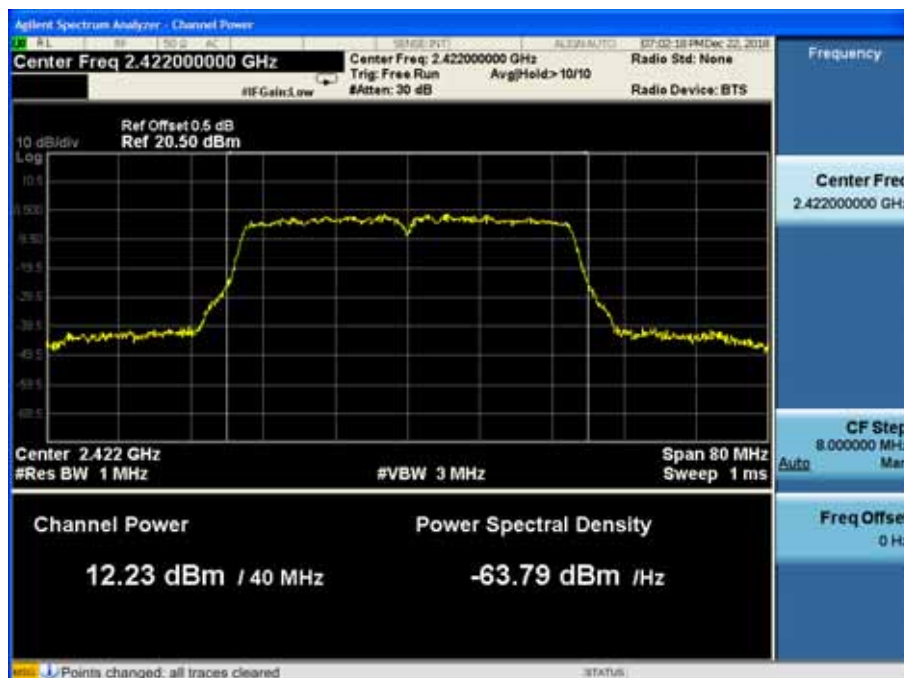

Channel 6: 2.437GHz:



Channel 9: 2.452GHz:



Antenna 2:

802.11 b

Channel 1: 2.412GHz:



Channel 6: 2.437GHz:



Channel 11: 2.462GHz:



802.11 g

Channel 1: 2.412GHz:



Channel 6: 2.437GHz:



Channel 11: 2.462GHz:



802.11 n (HT20)


Channel 1: 2.412GHz:



Channel 6: 2.437GHz:



Channel 11: 2.462GHz:

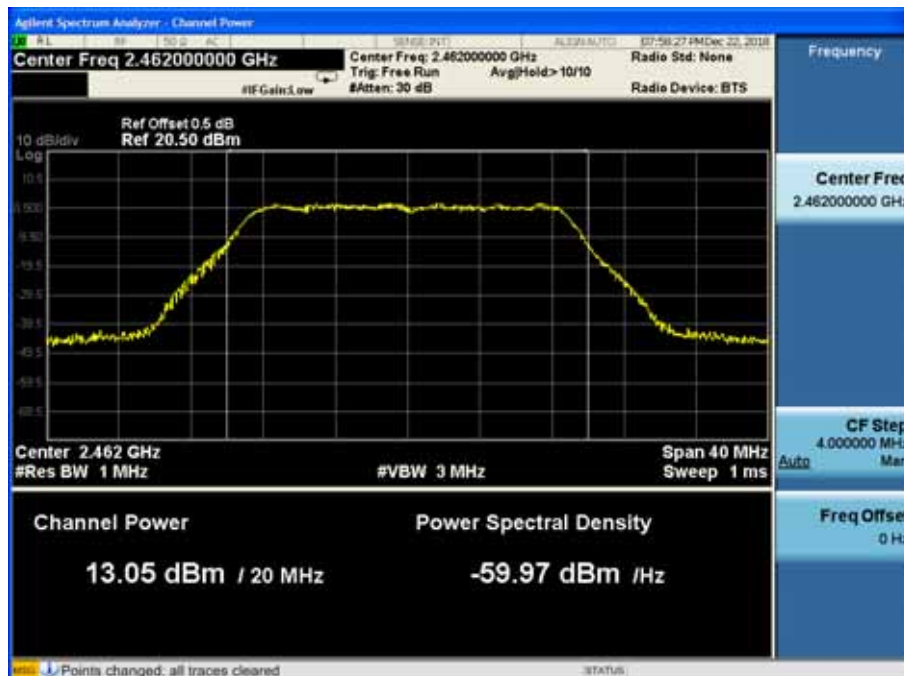

802.11 n (HT40)

Channel 3: 2.4122GHz:



Channel 6: 2.437GHz:




Channel 9: 2.452GHz:



5.5 Peak Power Spectral Density

Test Requirement:	FCC Part 15 C section 15.247 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10:2013 Clause 6.11 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01 (PSD Option 1).
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

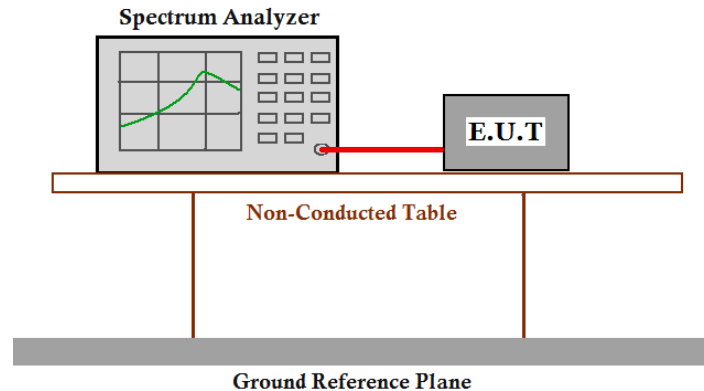

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable
(Cable loss = 0.5 dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set CENTER FREQUENCY = Frequency from Power Spectral Density Test Matrix (see 6.10.2)
 - b) Set SPAN = 1.5 times the DTS bandwidth,
 - c) Set REFERENCE LEVEL = 23 dBm
 - d) Set ATTENUATION = 0 dB (add internal attenuation, if necessary)
 - e) Set SWEEP TIME = Coupled
 - f) Set RBW = 3 kHz
 - g) Set VBW = 10 kHz
 - h) Set DETECTOR = Peak
 - i) Set MKR = Center Frequency
 - j) Set TRACE = CLEAR WRITE

Place the radio in continuous transmit mode. Set the TRACE to MAX HOLD, and after the trace stabilizes, the TRACE to VIEW. Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency.

After viewing the EUT waveform on the spectrum analyzer, perform the following spectrum analyzer functions to capture the trace:

Set SWEEP TIME = 3 s

Set TRACE = MAX HOLD

Set MKR = PEAK SEARCH

3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.

Test result:

Test mode	Test Channel	Test Result (dBm/3kHz)		Total (dBm/3kHz)	Limit (dBm/3kHz)
		ANTENNA 1	ANTENNA 2		
802.11b	2412	-12.279	-13.343	/	8
	2437	-11.265	-13.134	/	
	2462	-11.208	-11.874	/	
802.11g	2412	-22.034	-17.081	/	
	2437	-17.714	-17.531	/	
	2462	-16.802	-18.065	/	
802.11n(HT20)	2412	-22.719	-19.224	-21.284	
	2437	-21.816	-19.182	-20.887	
	2462	-22.416	-19.341	-21.426	
802.11n(HT40)	2422	-27.274	-23.518	-29.137	
	2437	-27.888	-22.614	-29.144	
	2452	-28.946	-23.849	-28.125	

Remark: 1) Output Peak Power=Reading Peak Power+Cable loss

2) Cable loss=0.5dB


The unit does meet the FCC requirements.

Result plot as follows:


Antenna 1:

802.11b

Channel 1:2.412 GHz:

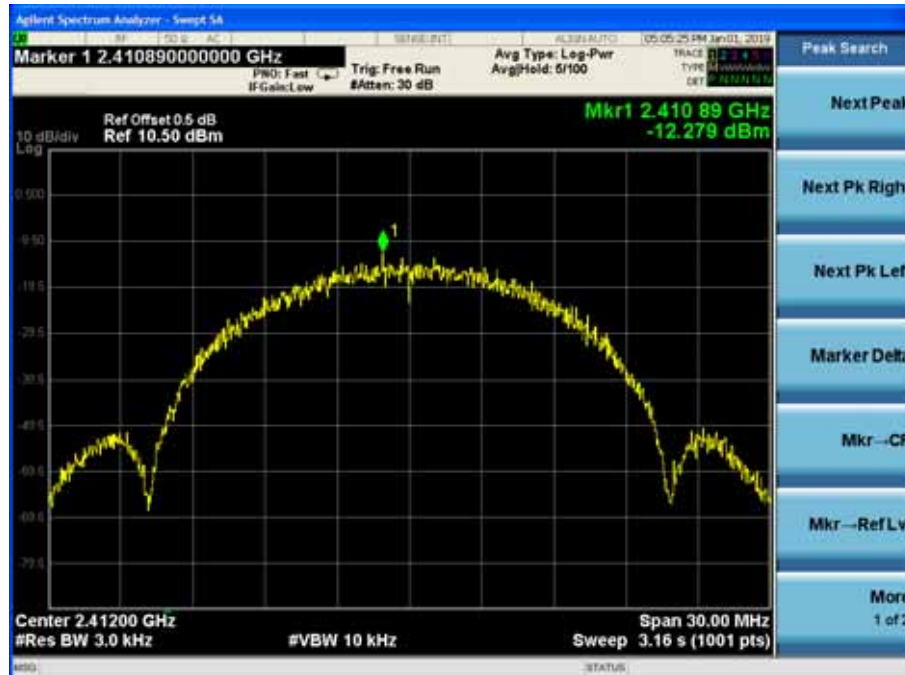

Channel 6: 2.437GHz:

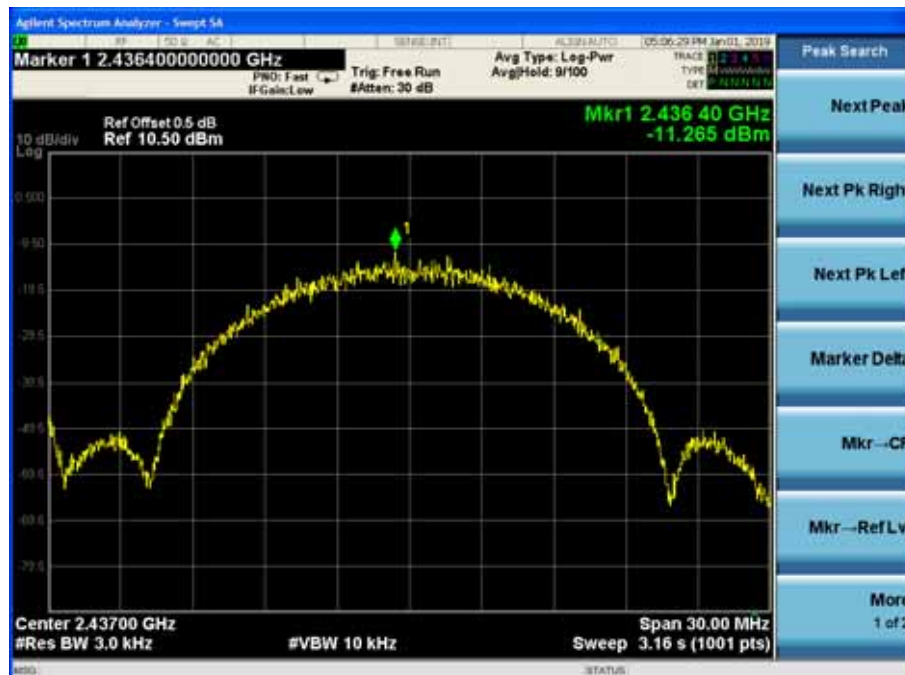


Channel 11:2.462 GHz:




802.11g


Channel 1:2.412 GHz:

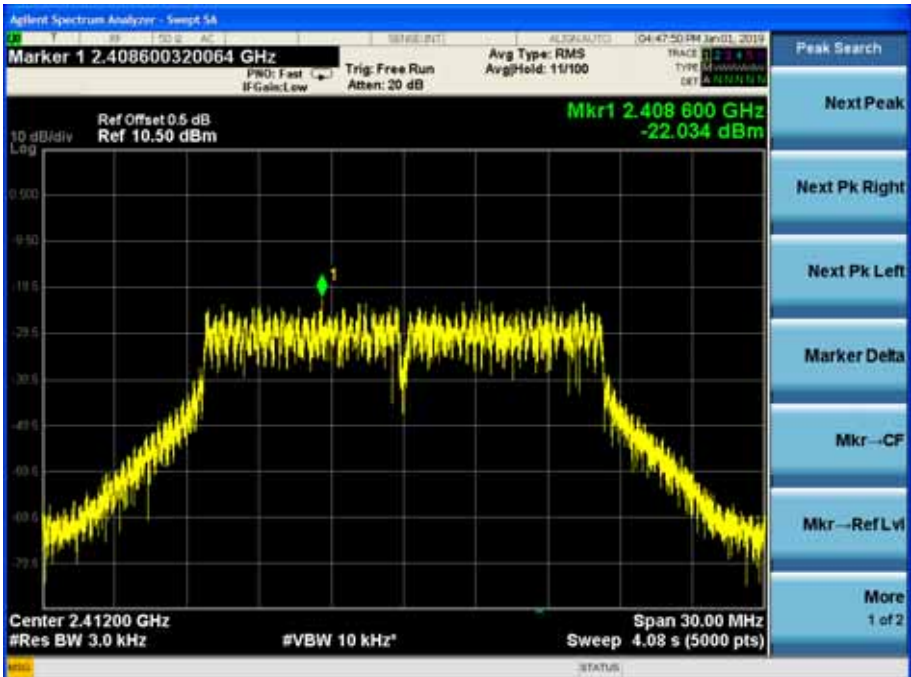

Channel 6: 2.437GHz:

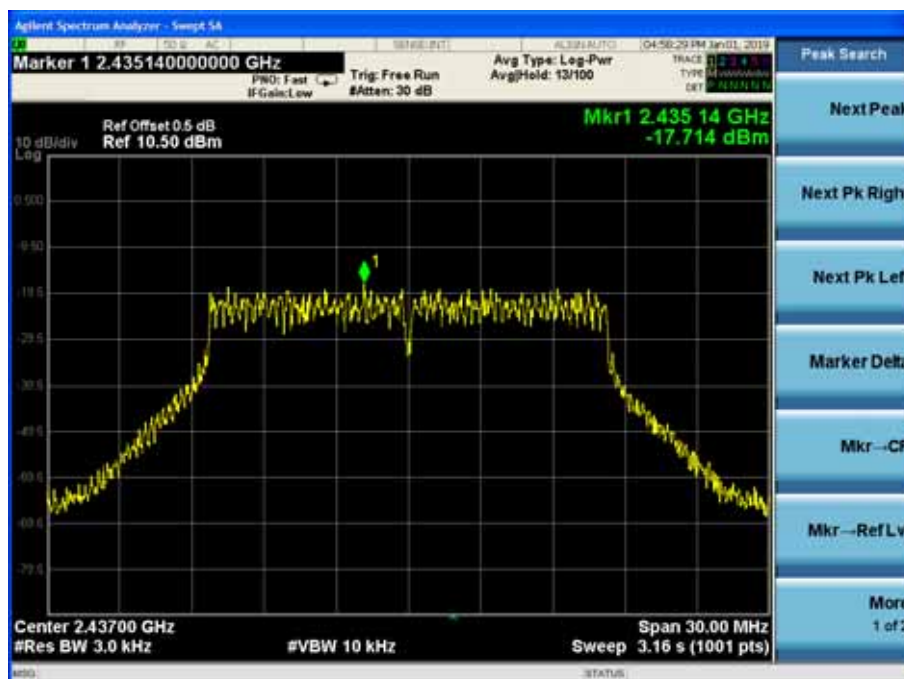


Channel 11: 2.462 GHz:

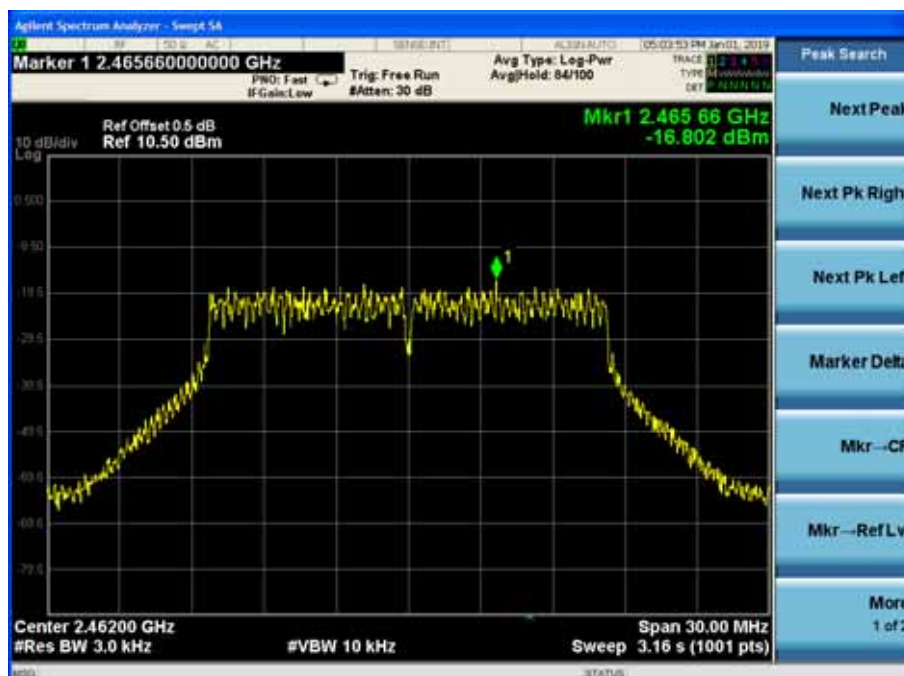


802.11n (HT20)


Channel 1: 2.412 GHz:

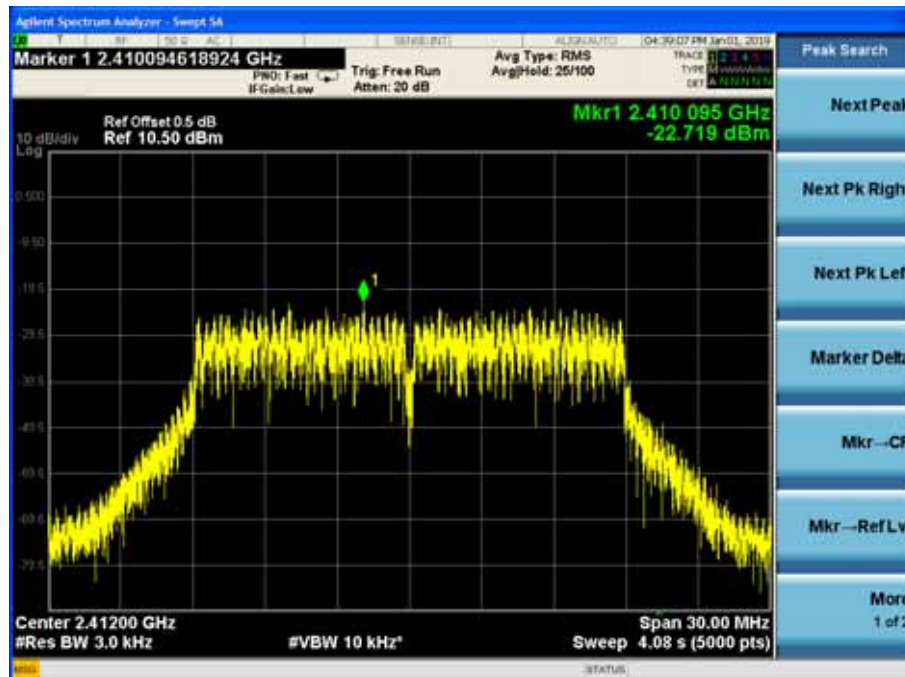

Channel 6: 2.437GHz:

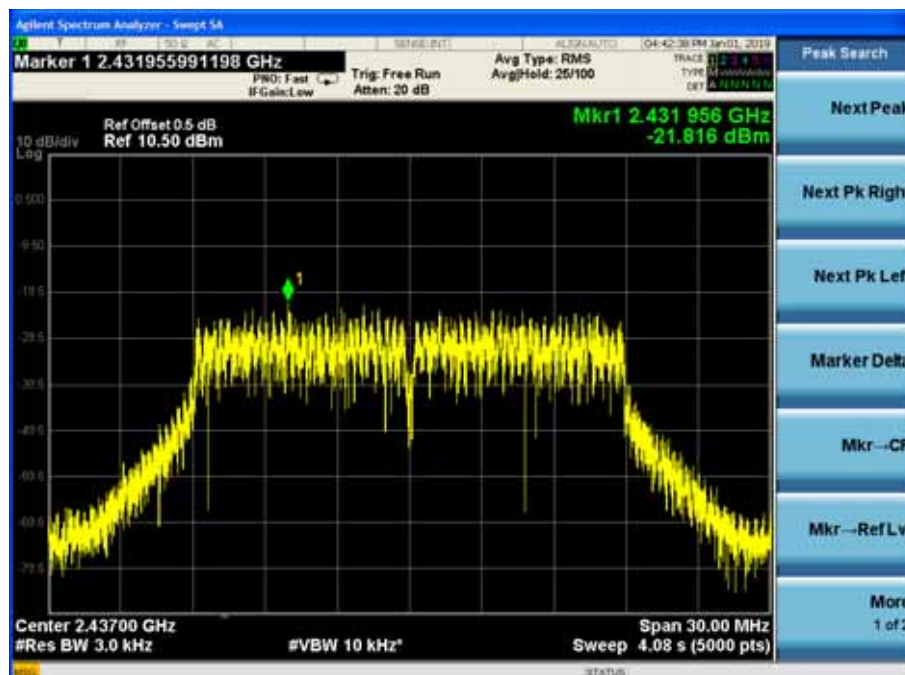


Channel 11:2.462 GHz:

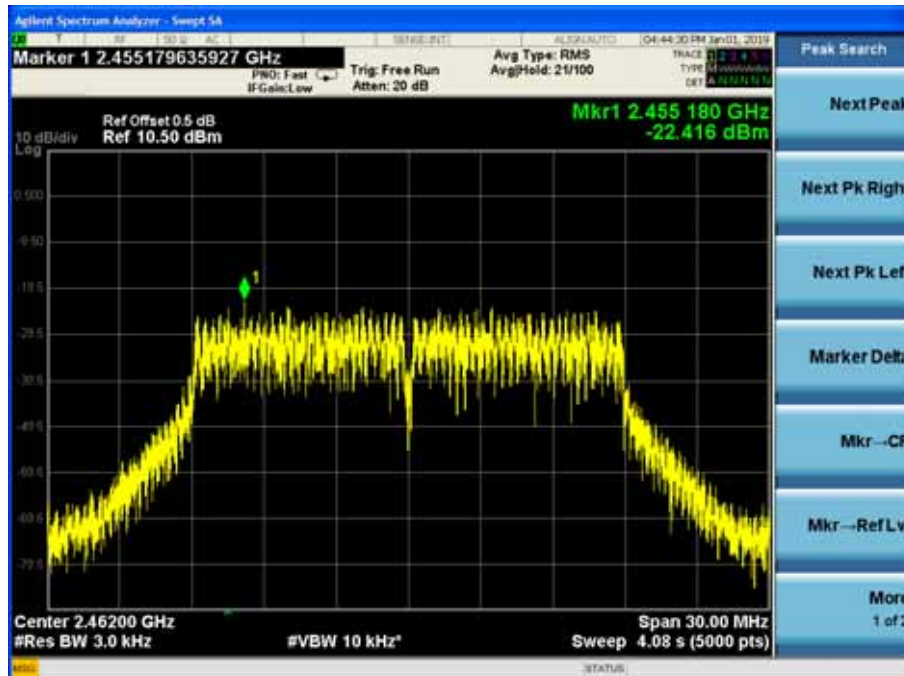


802.11n (HT40)


Channel 3:2.422 GHz:

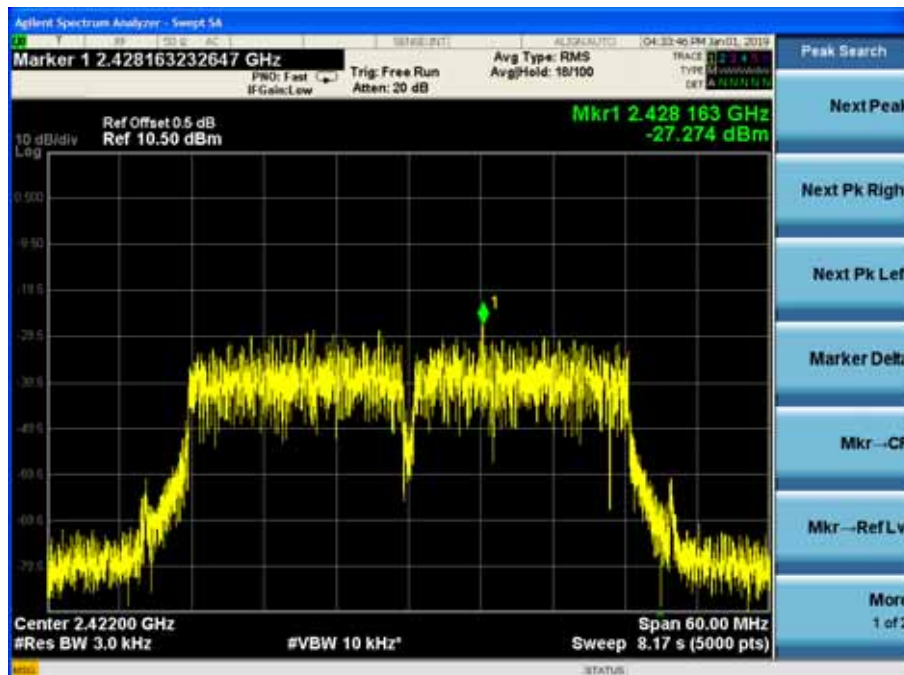

Channel 6:2.437GHz:

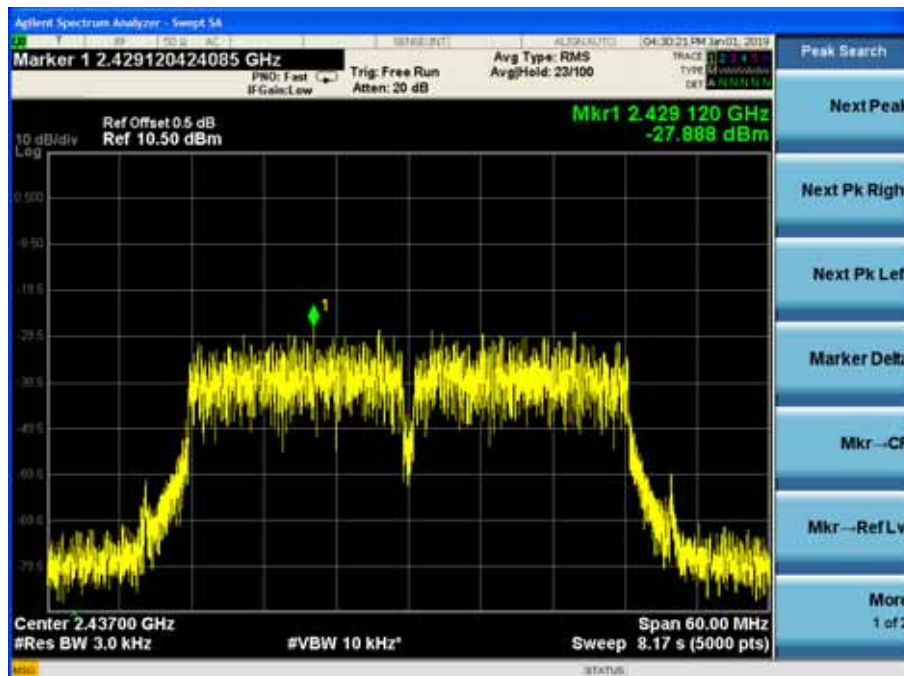


Channel 6:2.452 GHz:

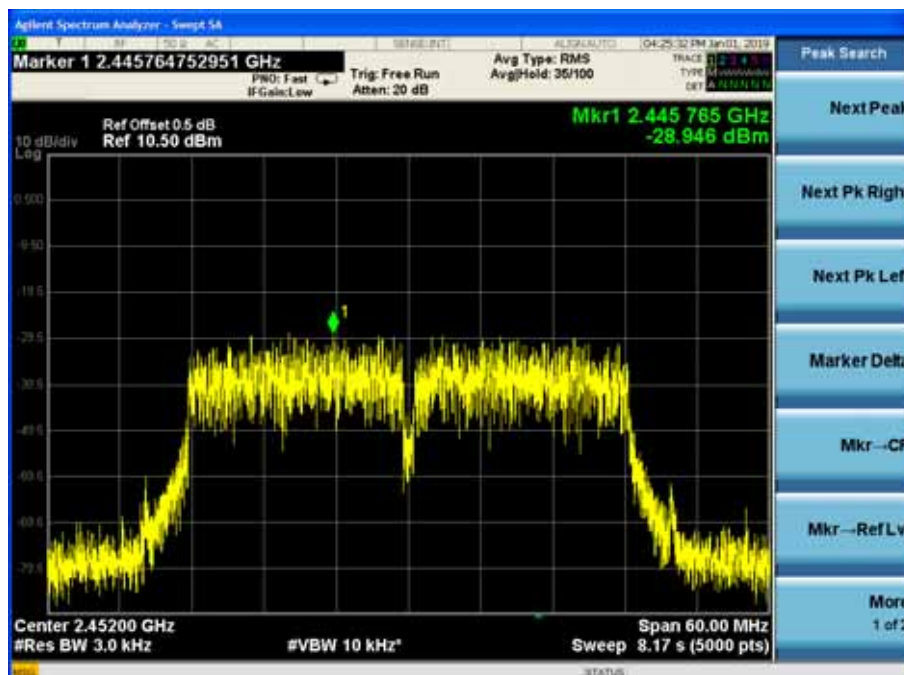


Antenna 2:

802.11b

Channel 1: 2.412 GHz:

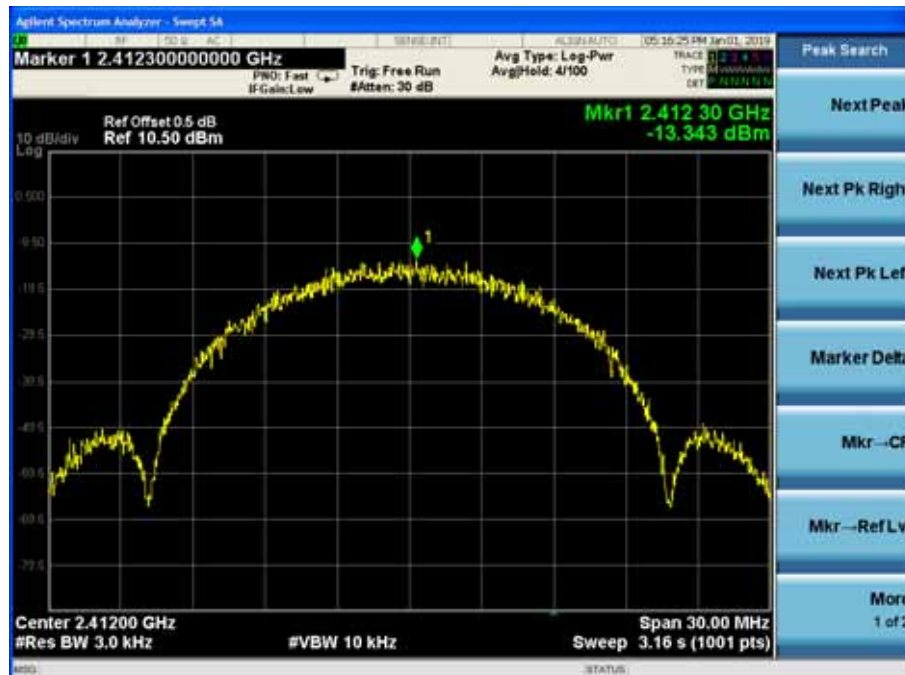

Channel 6: 2.437GHz:

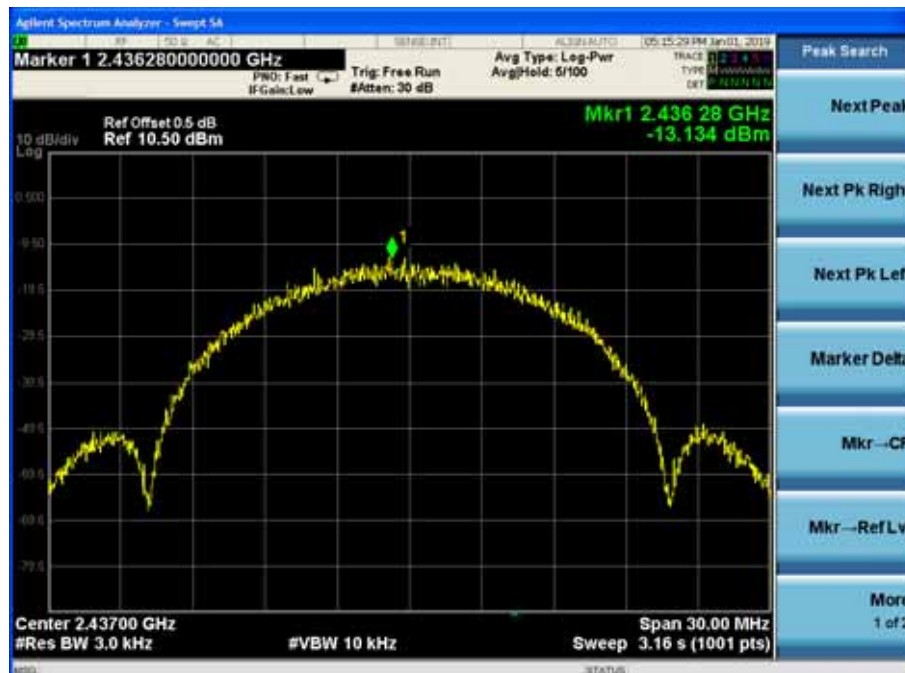


Channel 11:2.462 GHz:




802.11g


Channel 1:2.412 GHz:

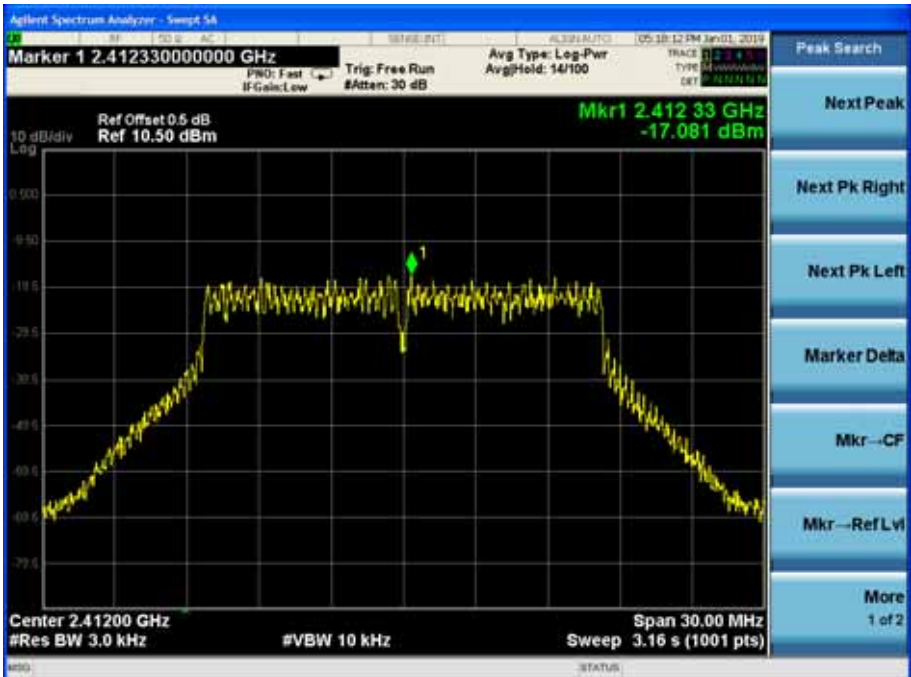

Channel 6: 2.437GHz:

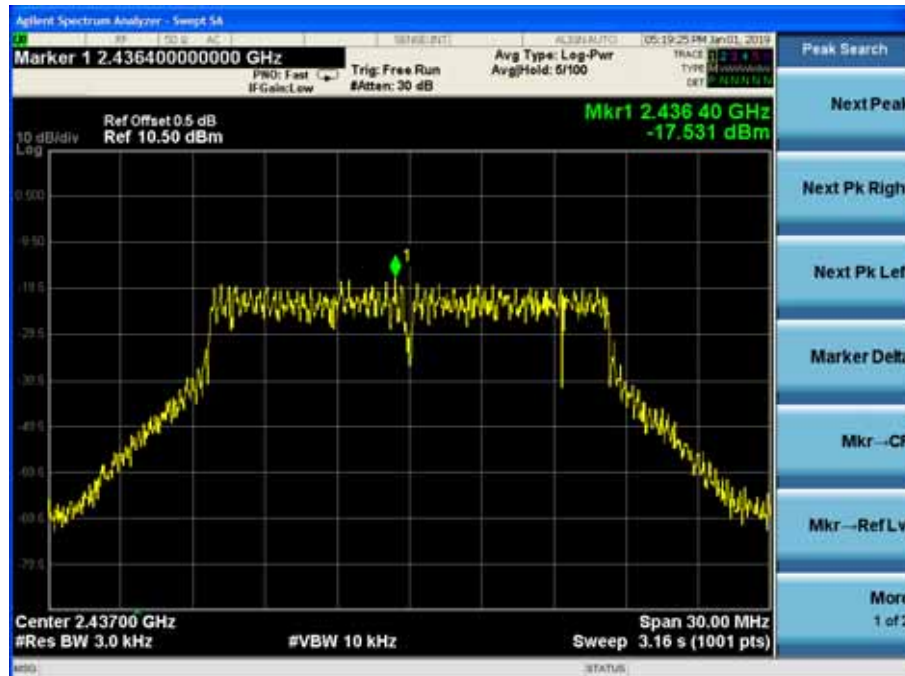


Channel 11: 2.462 GHz:

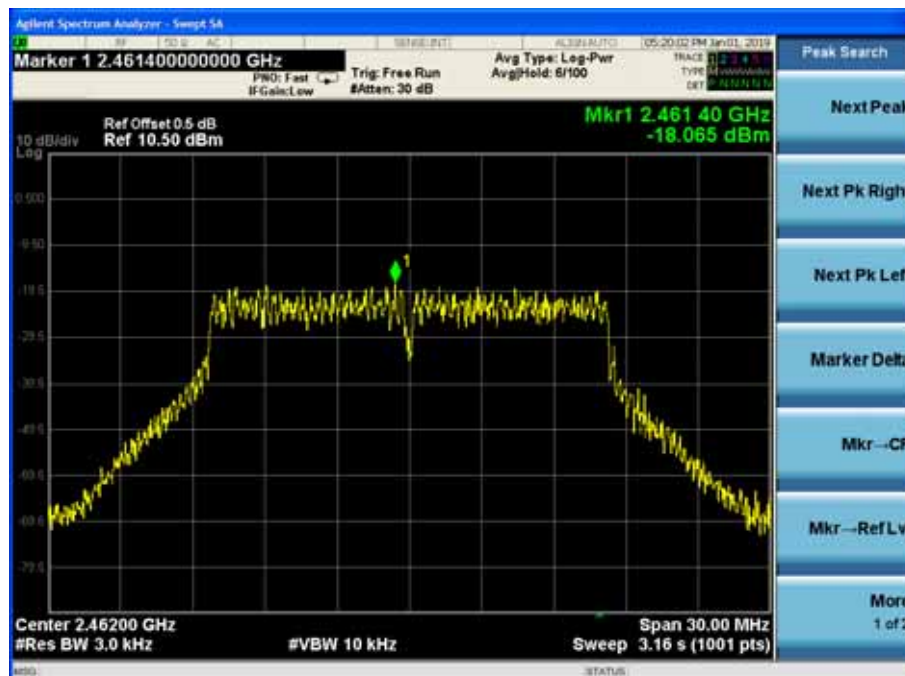


802.11n (HT20)


Channel 1:2.412 GHz:

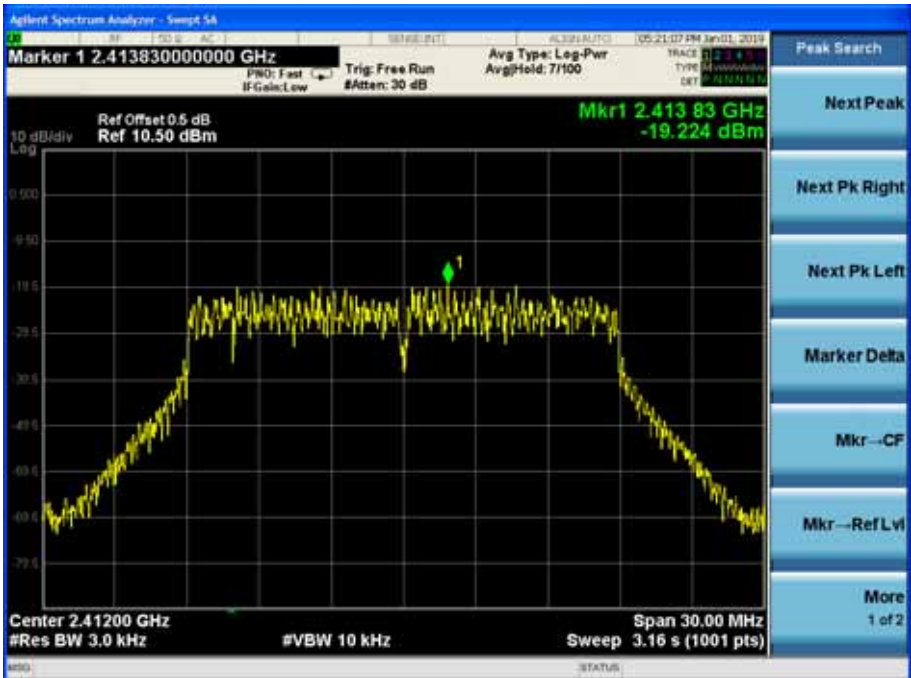

Channel 6: 2.437GHz:

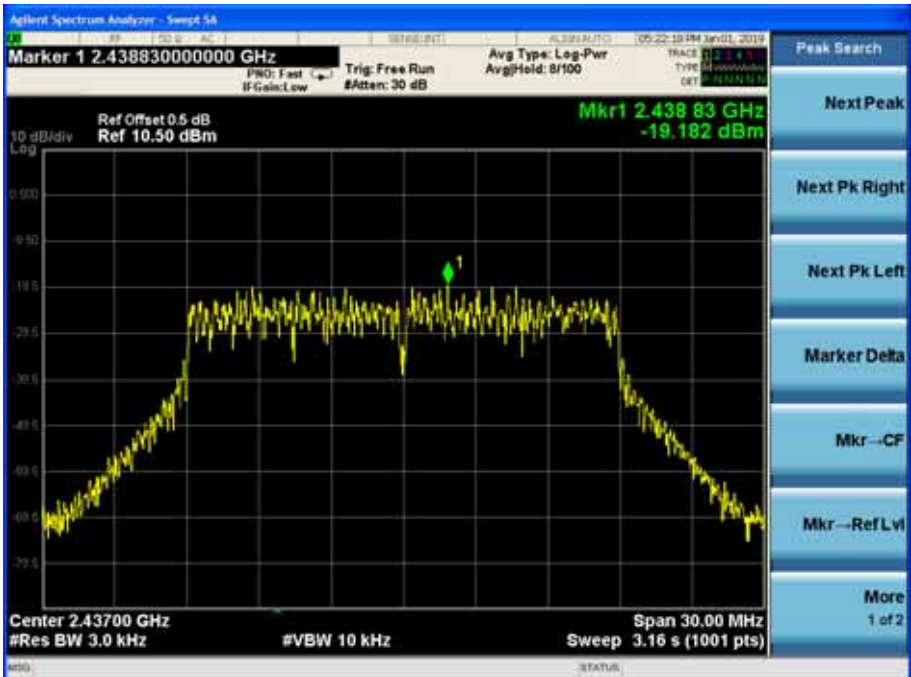


Channel 11:2.462 GHz:

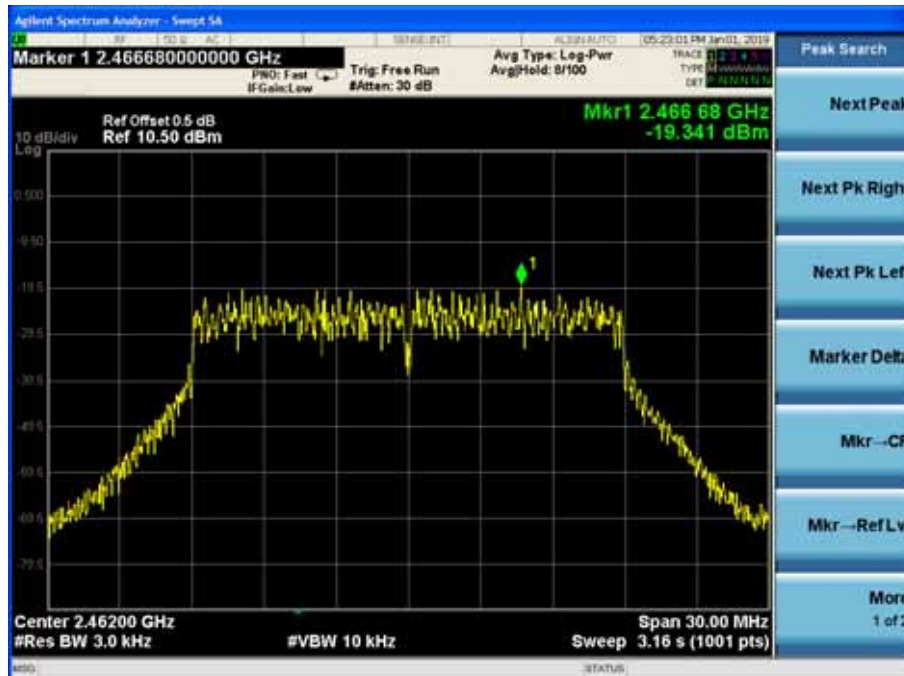


802.11n (HT40)


Channel 3:2.422 GHz:

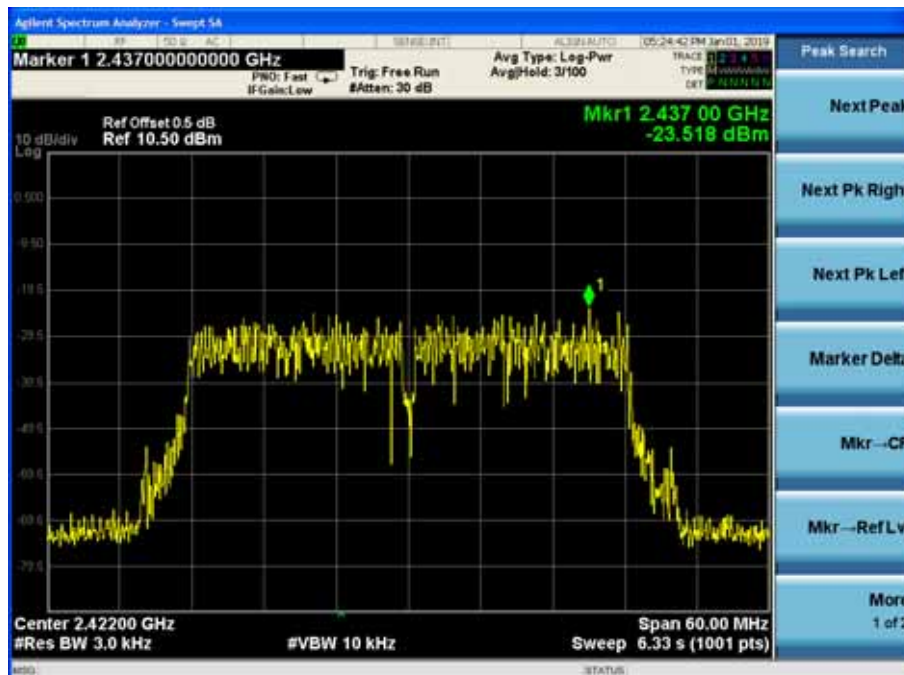

Channel 6:2.437GHz:

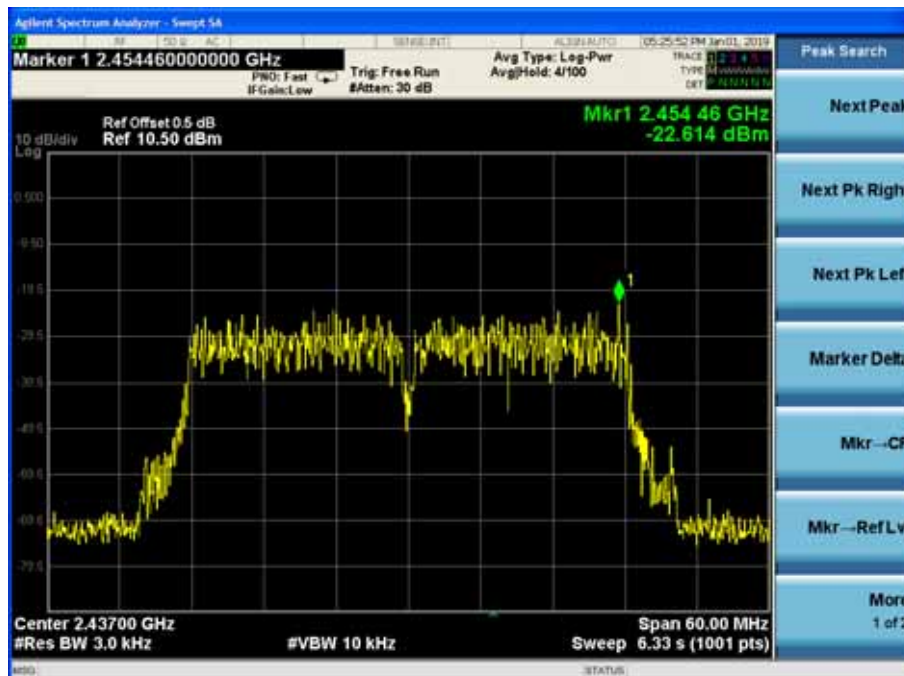


Channel 6:2.452 GHz:

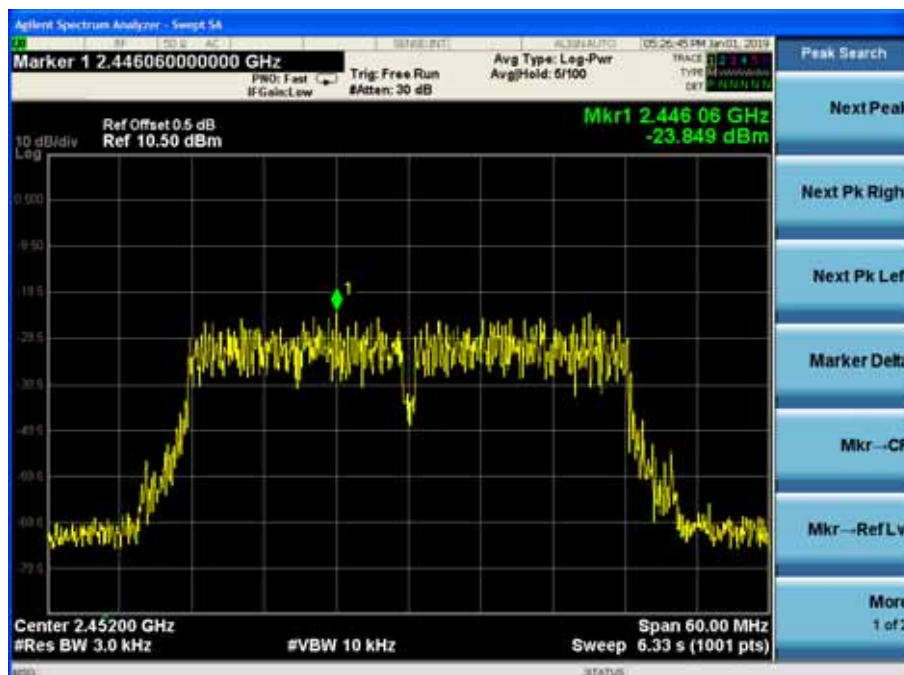


Total:

802.11n (HT20)


Channel 1: 2.412 GHz:

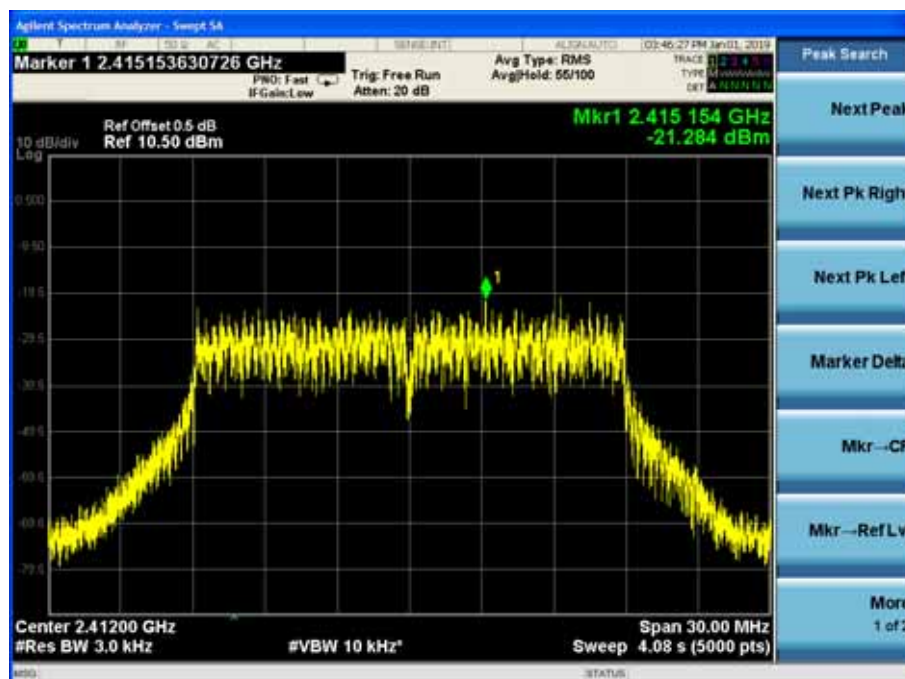

Channel 6: 2.437GHz:

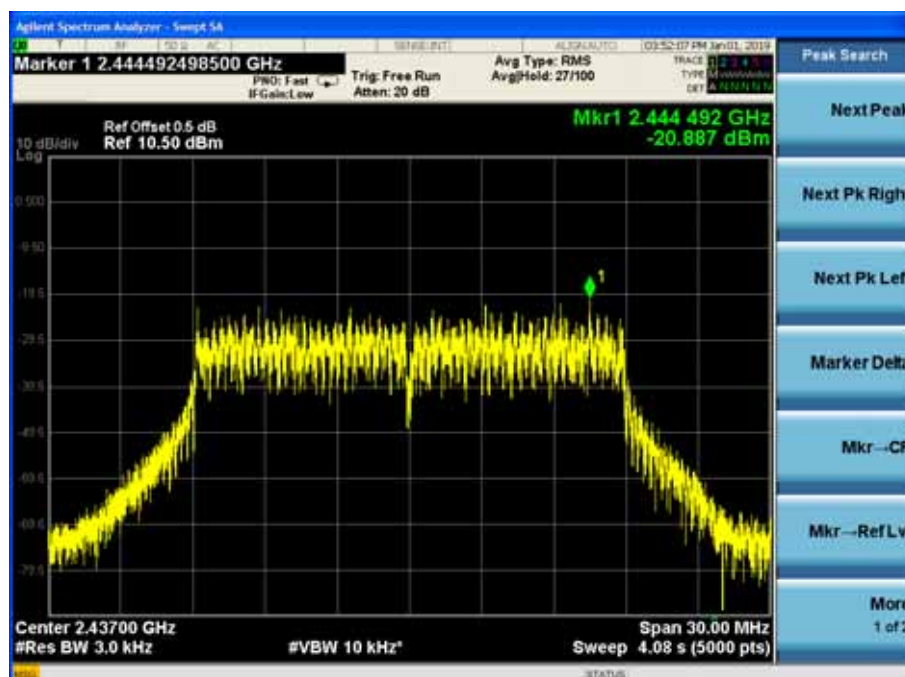


Channel 11:2.462 GHz:

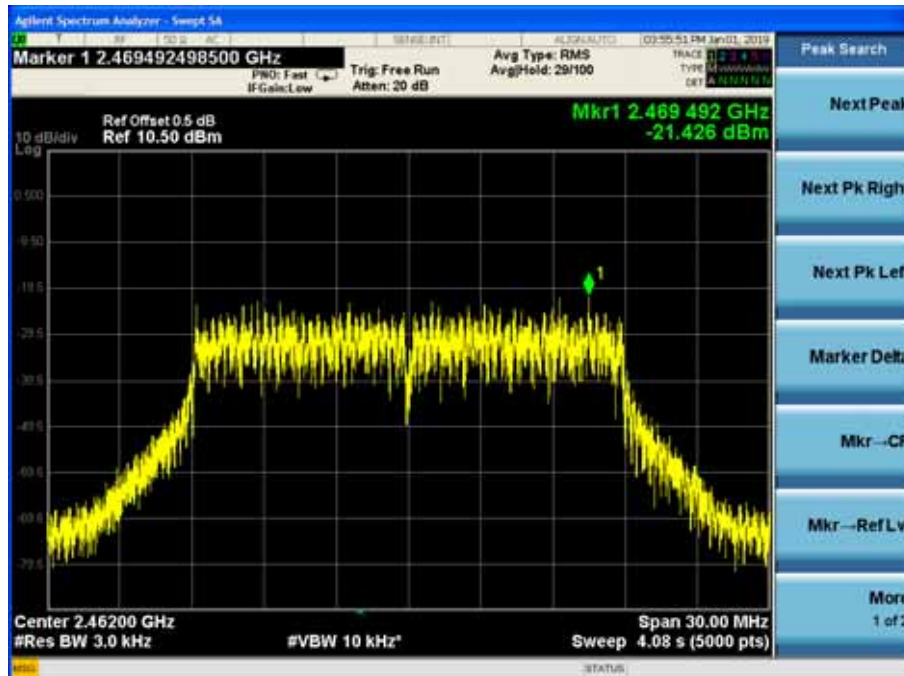


802.11n (HT40)


Channel 3:2.422 GHz:

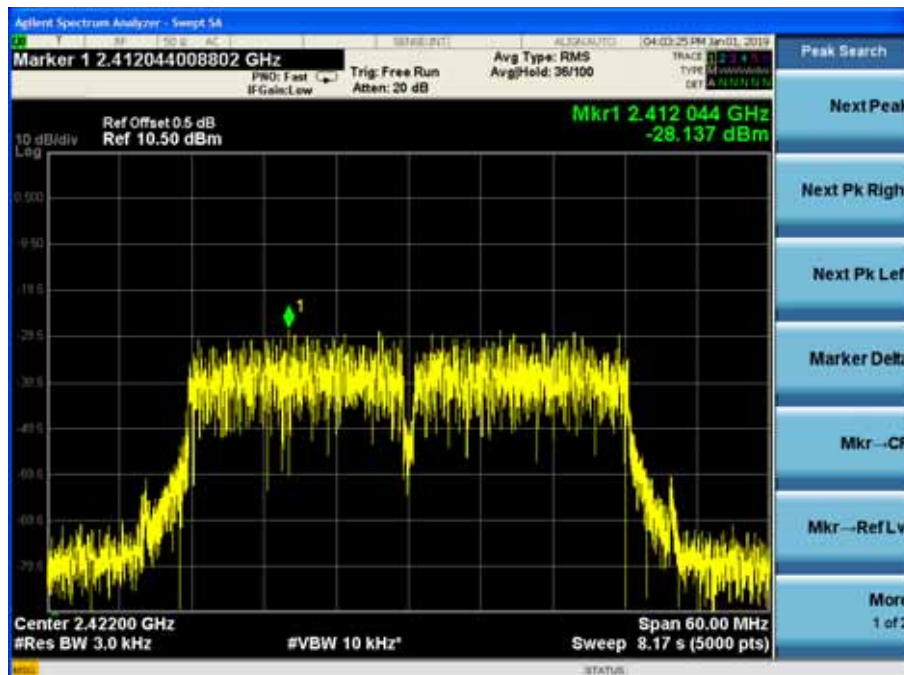

Channel 6:2.437GHz:

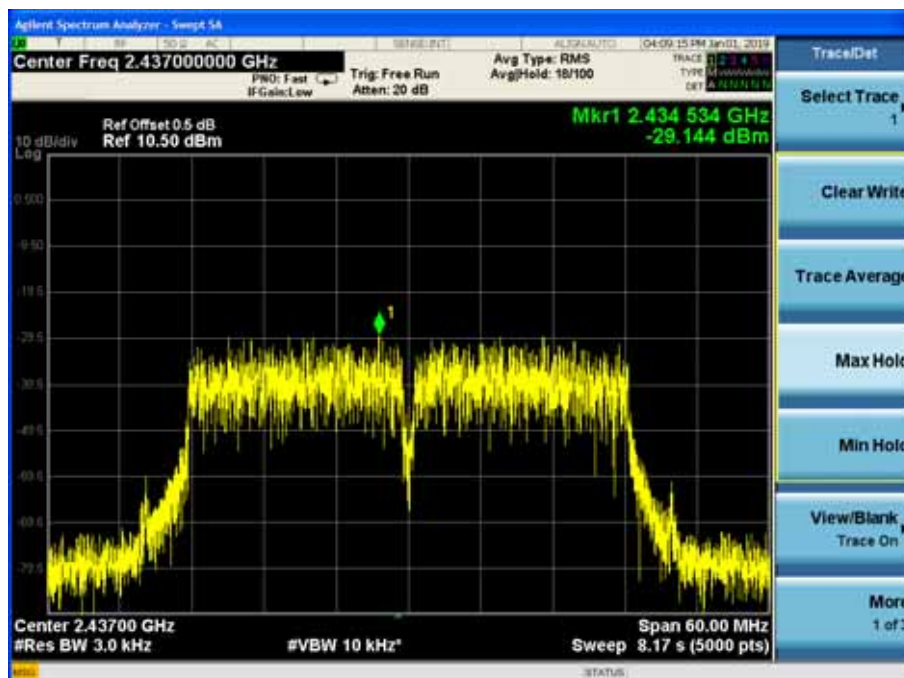

Channel 6:2.452 GHz:

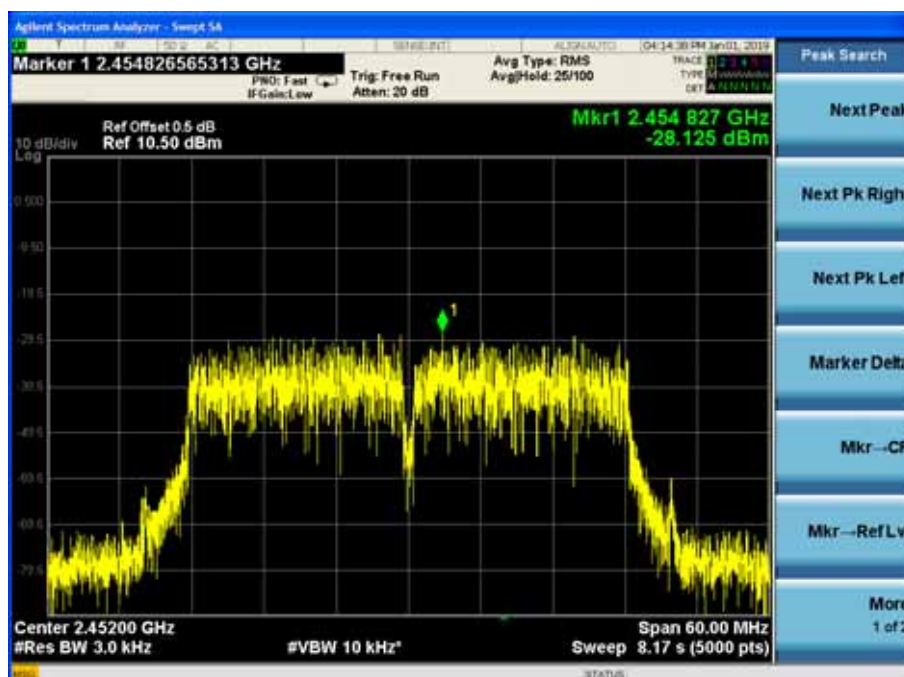

5.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013 Clause 6.7 and KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

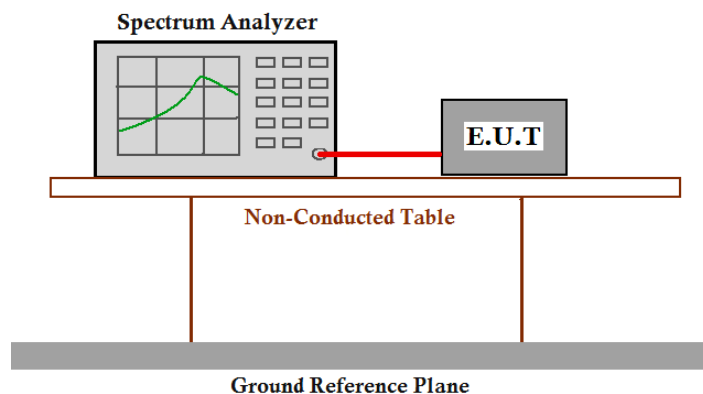

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.

Result plot as follows:

Antenna 1:

802.11b

Channel 1: 2.412 GHz



Channel 6: 2.437GHz:



Channel 11: 2.462 GHz



802.11g

Channel 1: 2.412 GHz



Channel 6: 2.437GHz:



Channel 11: 2.462 GHz



802.11n(HT20)

Channel 1: 2.412 GHz



Channel 6: 2.437GHz:



Channel 11: 2.462 GHz



802.11n(HT40)

Channel 3: 2.422 GHz



Channel 6: 2.437GHz:



Channel 9: 2.452 GHz



Antenna 2:

802.11b

Channel 1: 2.412 GHz



Channel 6: 2.437GHz:



Channel 11: 2.462 GHz



802.11g

Channel 1: 2.412 GHz



Channel 6: 2.437GHz:



Channel 11: 2.462 GHz



802.11n(HT20)

Channel 1: 2.412 GHz



Channel 6: 2.437GHz:



Channel 11: 2.462 GHz



802.11n(HT40)

Channel 3: 2.422 GHz



Channel 6: 2.437GHz:



Channel 9: 2.452 GHz




The unit does meet the FCC requirements.

5.7 Radiated Spurious Emissions


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10:2013 Clause 6.4, 6.5 and 6.6 & KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Detector: For PK value:	RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9kHz for < 30 MHz VBW = 10 Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB μ V/m between 30 MHz & 88 MHz 43.5 dB μ V/m between 88 MHz & 216 MHz 46.0 dB μ V/m between 216 MHz & 960 MHz 54.0 dB μ V/m above 960 MHz

Test Configuration:


- 1) 9kHz to 30MHz emissions:

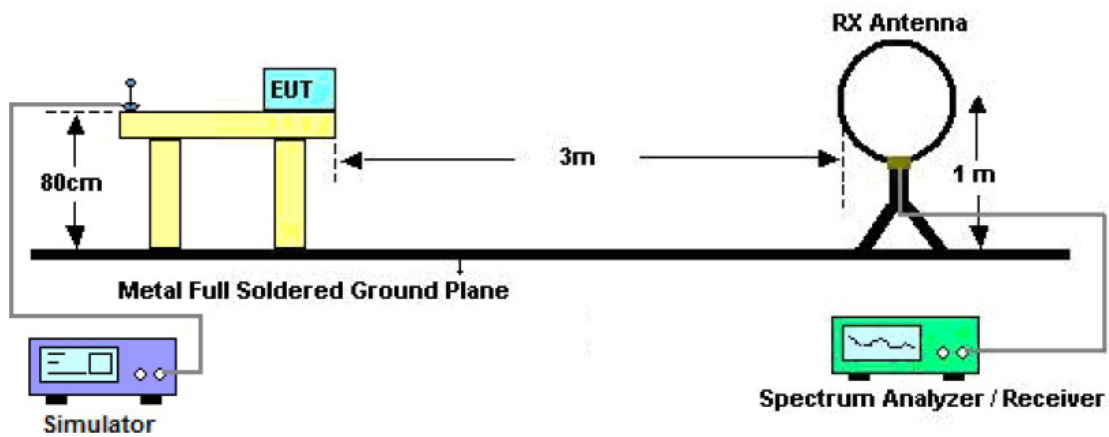

- 2) 30 MHz to 1 GHz emissions:

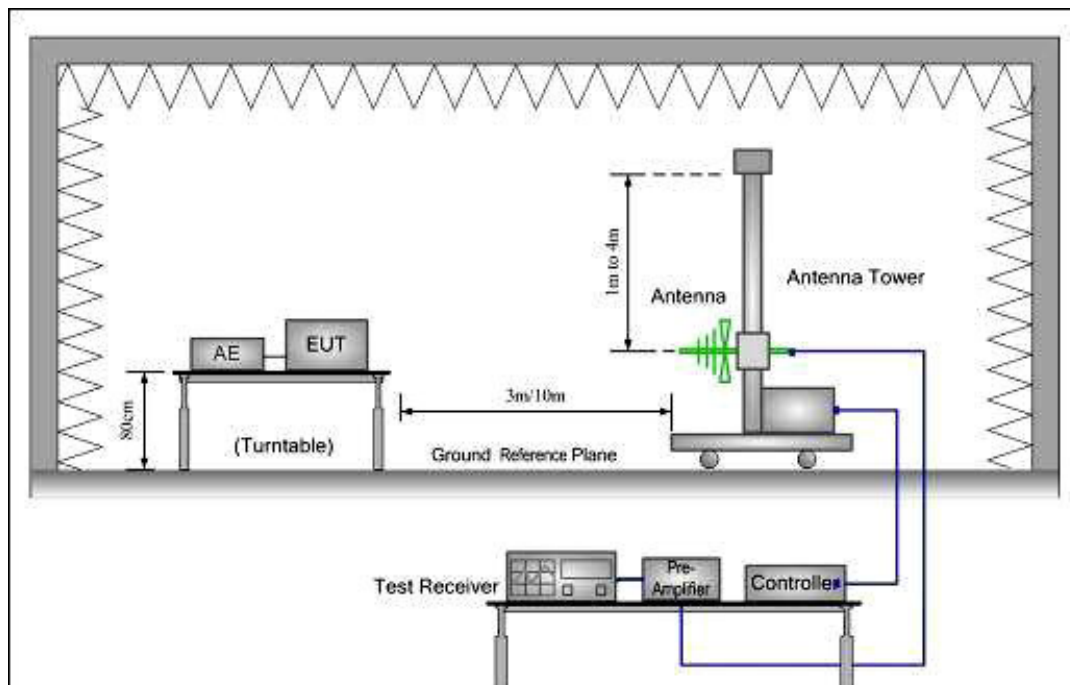

3) 1 GHz to 40 GHz emissions:

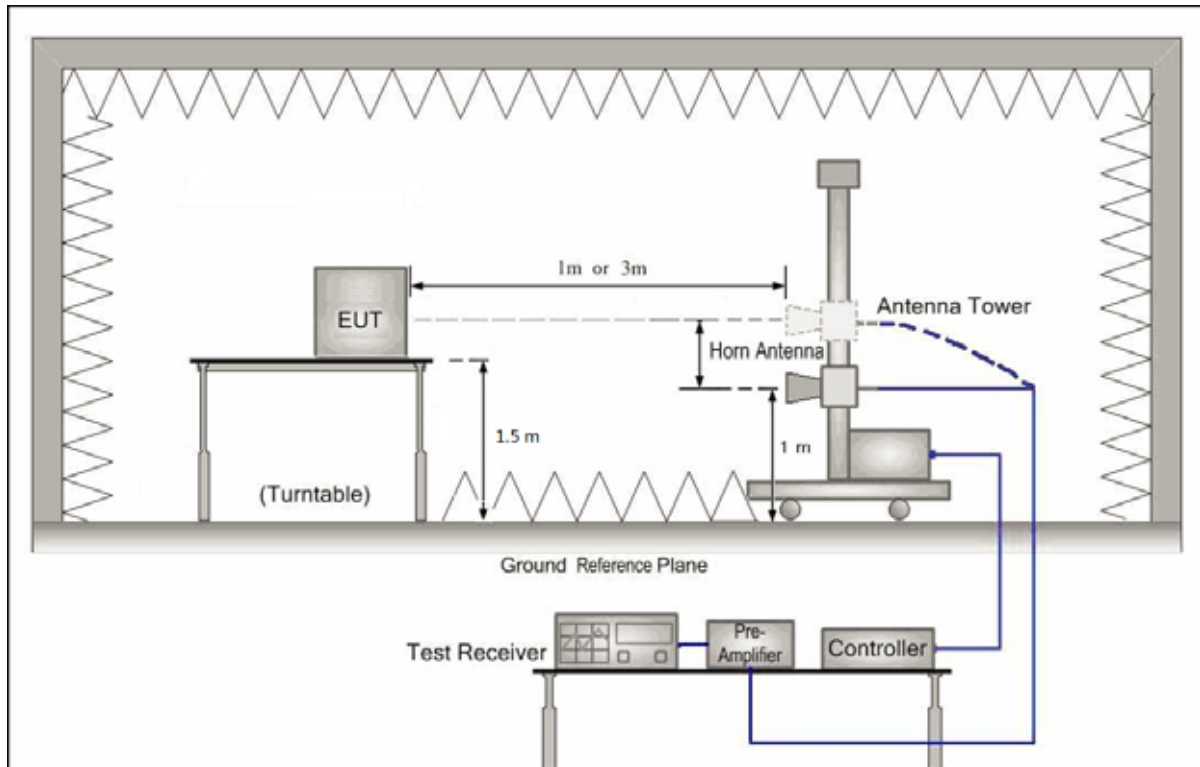

Test Procedure: (1) The receiver was scanned from 0.009MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only. The worst case emissions were reported.

(2) Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

(3) Pre-test under all modes below 1GHz, choose the worst case mode record On the report.

5.7.1 Harmonic and other spurious emissions

Worst case antenna 1

Test at Channel 1 (2.412 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

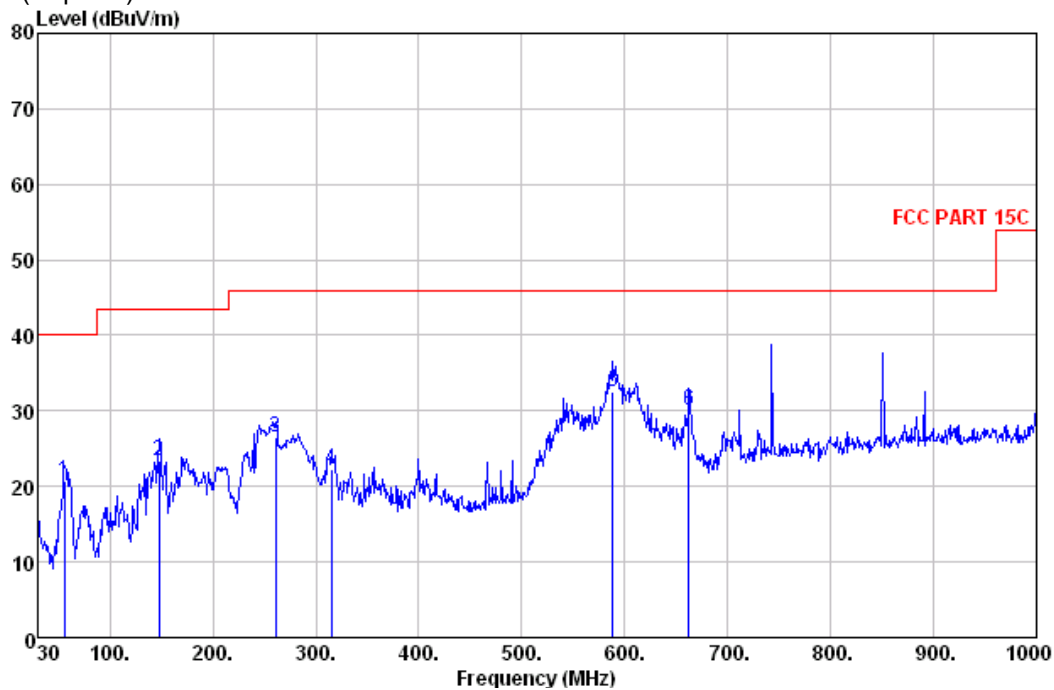


Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	56.190	40.70	7.45	0.86	28.34	20.67	40.00	-19.33	HORIZONTAL	QP
2	147.370	43.05	7.30	1.45	28.50	23.30	43.50	-20.20	HORIZONTAL	QP
3	260.860	39.88	12.27	1.97	27.57	26.55	46.00	-19.45	HORIZONTAL	QP
4	315.180	33.89	13.66	2.18	27.54	22.19	46.00	-23.81	HORIZONTAL	QP
5	588.720	37.96	20.06	3.03	28.42	32.63	46.00	-13.37	HORIZONTAL	QP
6	662.440	34.68	20.65	3.23	28.50	30.06	46.00	-15.94	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

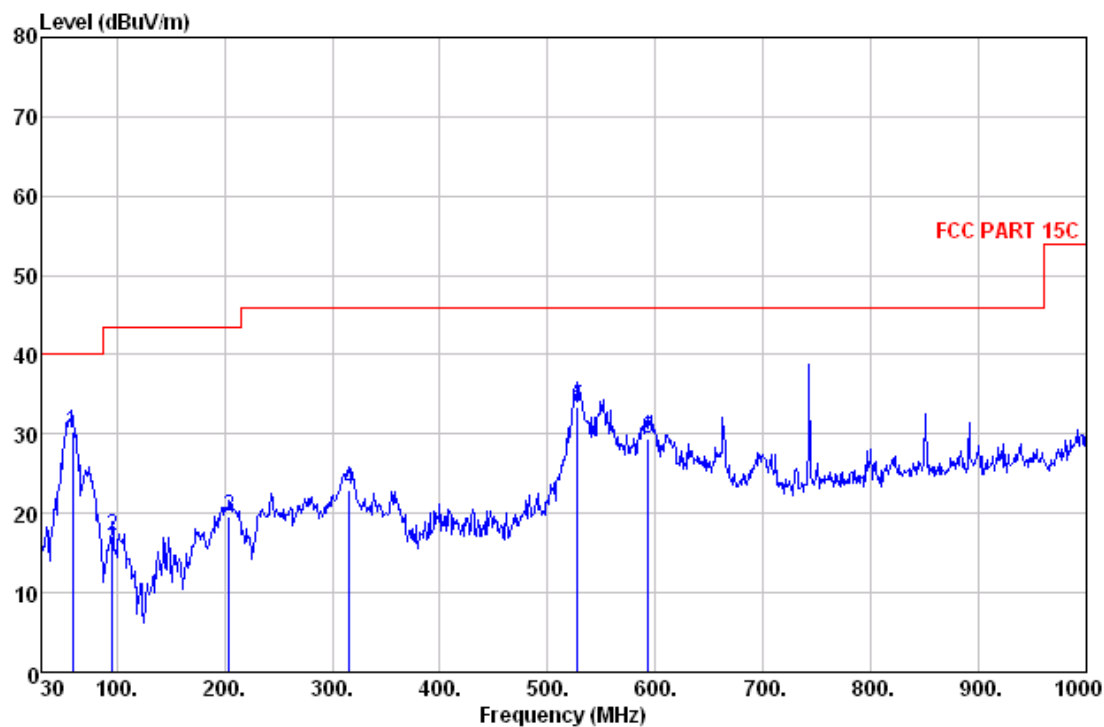Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Read Level dB μ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB μ V/m	Limit Line dB μ V/m	Over Limit dB	Pol/Phase	Remark
1	59.100	50.86	6.89	0.88	28.23	30.40	40.00	-9.60	VERTICAL	QP
2	95.960	36.17	8.38	1.14	28.64	17.05	43.50	-26.45	VERTICAL	QP
3	204.600	36.51	9.17	1.73	27.71	19.70	43.50	-23.80	VERTICAL	QP
4	316.150	34.56	13.68	2.18	27.53	22.89	46.00	-23.11	VERTICAL	QP
5	527.610	39.90	19.33	2.85	28.63	33.45	46.00	-12.55	VERTICAL	QP
6	593.570	34.73	19.92	3.04	28.33	29.36	46.00	-16.64	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Worst case antenna 1

Test at Channel 6 (2.437 GHz) in transmitting status

9 kHz~30MHz Test result


The Low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

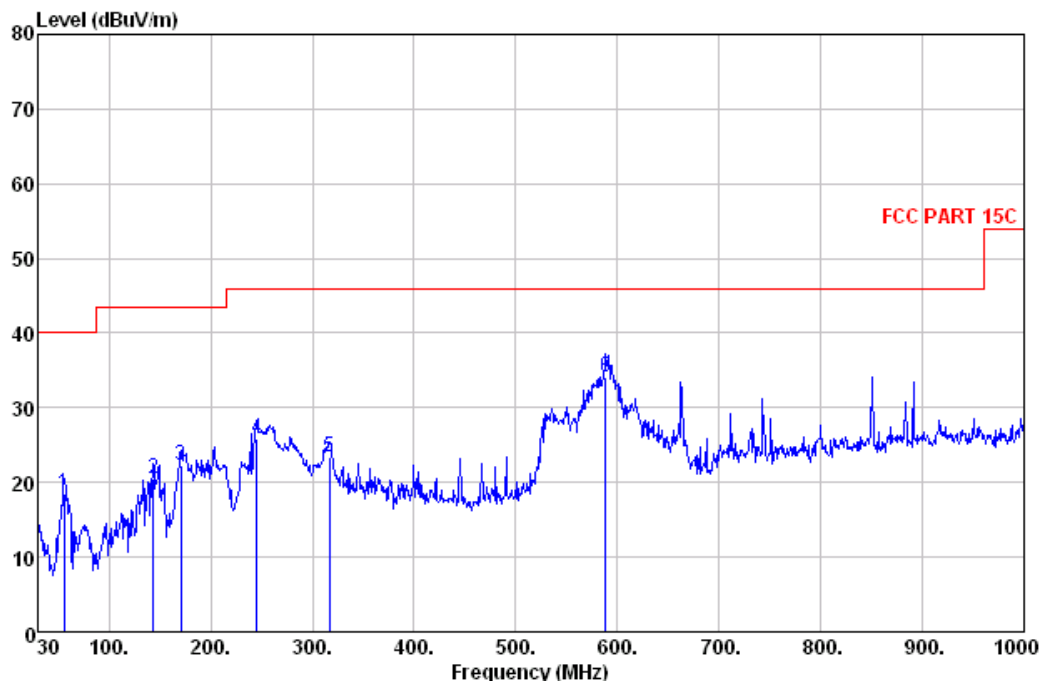

Quasi-peak measurement


No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	56.190	38.54	7.45	0.86	28.34	18.51	40.00	-21.49	HORIZONTAL	QP
2	143.490	40.00	7.33	1.43	28.34	20.42	43.50	-23.08	HORIZONTAL	QP
3	170.650	40.96	8.29	1.56	28.45	22.36	43.50	-21.14	HORIZONTAL	QP
4	245.340	40.01	11.13	1.91	27.25	25.80	46.00	-20.20	HORIZONTAL	QP
5	317.120	35.03	13.71	2.18	27.53	23.39	46.00	-22.61	HORIZONTAL	QP
6	588.720	39.53	20.06	3.03	28.42	34.20	46.00	-11.80	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBμV/m)

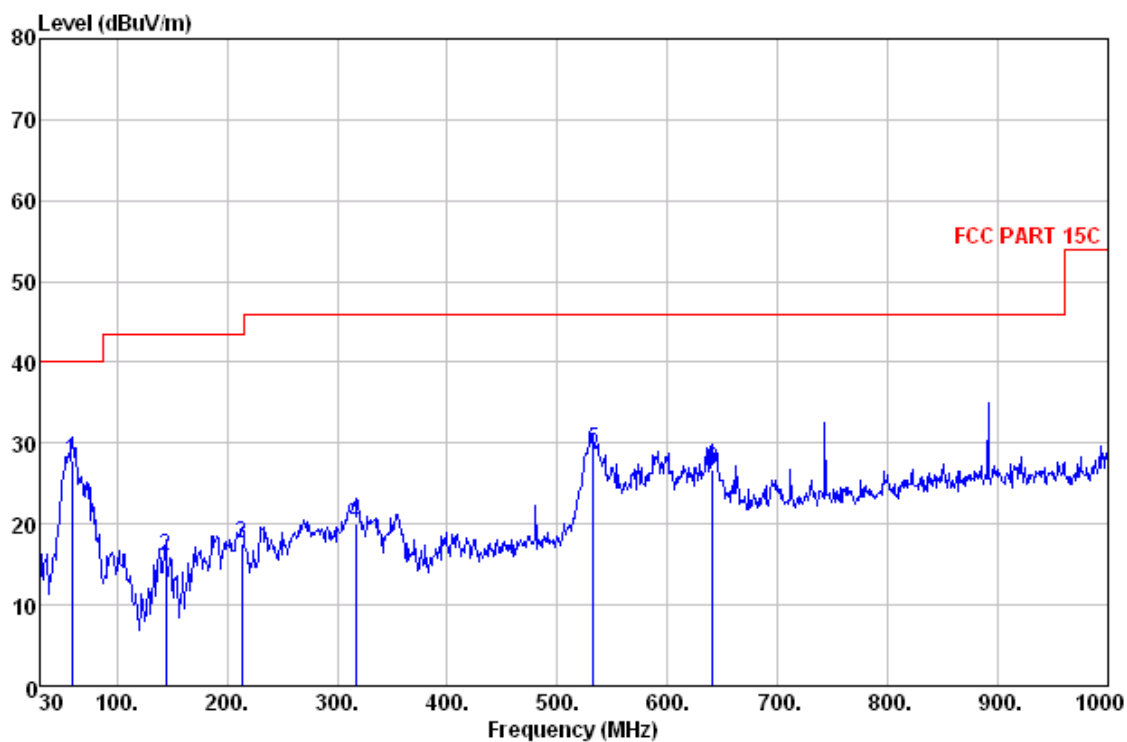

Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	59.100	48.22	6.89	0.88	28.23	27.76	40.00	-12.24	VERTICAL	QP
2	144.460	35.61	7.31	1.43	28.38	15.97	43.50	-27.53	VERTICAL	QP
3	213.330	33.95	9.50	1.76	27.60	17.61	43.50	-25.89	VERTICAL	QP
4	317.120	31.72	13.71	2.18	27.53	20.08	46.00	-25.92	VERTICAL	QP
5	532.460	35.54	19.45	2.87	28.69	29.17	46.00	-16.83	VERTICAL	QP
6	641.100	31.60	20.47	3.17	28.41	26.83	46.00	-19.17	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Worst case antenna 1

Test at Channel 11 (2.462 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

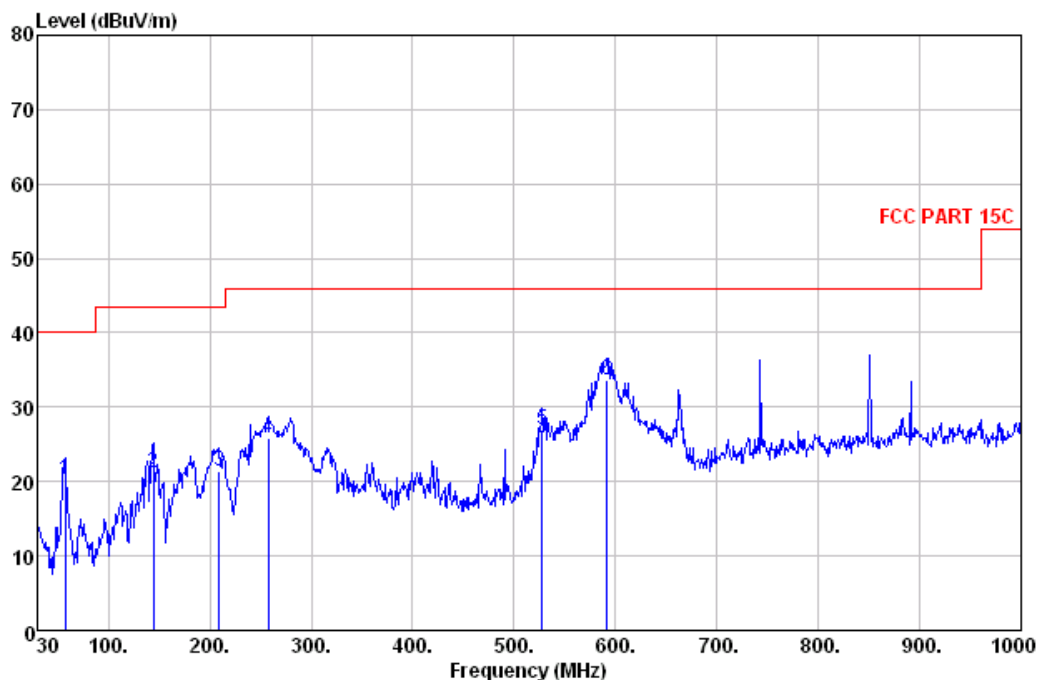


Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamplifier Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	57.160	40.43	7.21	0.87	28.31	20.20	40.00	-19.80	HORIZONTAL	QP
2	144.460	40.88	7.31	1.43	28.38	21.24	43.50	-22.26	HORIZONTAL	QP
3	209.450	38.12	9.11	1.75	27.52	21.46	43.50	-22.04	HORIZONTAL	QP
4	257.950	39.19	12.14	1.96	27.54	25.75	46.00	-20.25	HORIZONTAL	QP
5	527.610	33.36	19.33	2.85	28.63	26.91	46.00	-19.09	HORIZONTAL	QP
6	591.630	38.95	20.02	3.03	28.37	33.63	46.00	-12.37	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

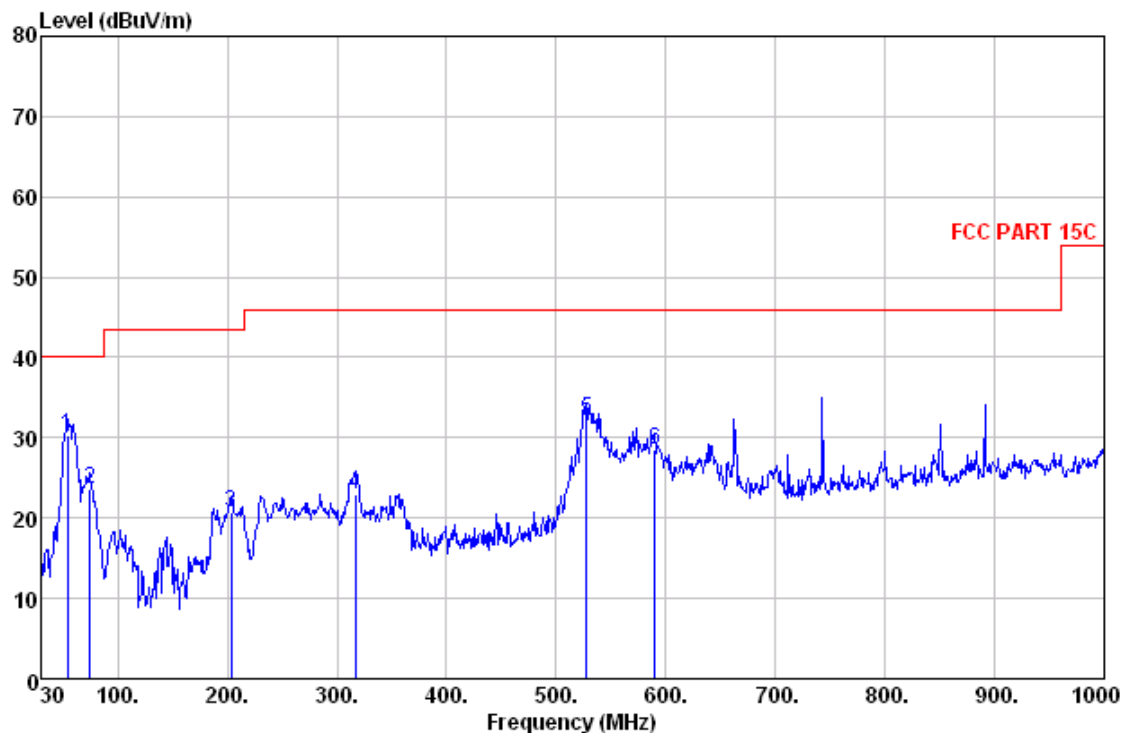Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Read Level dB μ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB μ V/m	Limit Line dB μ V/m	Over Limit dB	Pol/Phase	Remark
1	54.250	50.14	7.67	0.84	28.42	30.23	40.00	-9.77	VERTICAL	QP
2	74.620	43.47	7.28	1.01	28.20	23.56	40.00	-16.44	VERTICAL	QP
3	203.630	37.73	9.09	1.72	27.75	20.79	43.50	-22.71	VERTICAL	QP
4	317.120	34.49	13.71	2.18	27.53	22.85	46.00	-23.15	VERTICAL	QP
5	527.610	38.86	19.33	2.85	28.63	32.41	46.00	-13.59	VERTICAL	QP
6	589.690	33.73	20.09	3.03	28.40	28.45	46.00	-17.55	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Spurious emissions above 1GHz

Worst case antenna 1

Test mode: 802.11b

Frequency (MHz)	Reading Level (dBμV/m)	Correct (dB/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
4824.000	23.87	15.34	39.21	74.00	-34.79	H	PK
4824.000	10.88	15.34	26.22	54.00	-27.78	H	AV
7236.000	16.10	21.61	37.71	74.00	-36.29	H	PK
7236.000	4.74	21.61	26.35	54.00	-27.65	H	AV
4824.000	36.06	15.34	51.40	74.00	-22.60	V	PK
4824.000	12.03	15.34	27.37	54.00	-26.63	V	AV
7236.000	24.46	21.61	46.07	74.00	-27.93	V	PK
7236.000	10.51	21.61	32.12	54.00	-21.88	V	AV
Middle Channel							
4874.000	21.44	15.45	36.89	74.00	-37.11	H	PK
4874.000	11.65	15.45	27.10	54.00	-26.90	H	AV
7311.000	24.95	21.80	46.75	74.00	-27.25	H	PK
7311.000	10.96	21.80	32.76	54.00	-21.24	H	AV
4874.000	39.49	15.45	54.94	74.00	-19.06	V	PK
4874.000	16.51	15.45	31.96	54.00	-22.04	V	AV
7311.000	22.96	21.80	44.76	74.00	-29.24	V	PK
7311.000	11.69	21.80	33.49	54.00	-20.51	V	AV
High Channel							
4924.000	19.88	15.55	35.43	74.00	-35.57	H	PK
4924.000	9.65	15.55	25.20	54.00	-28.80	H	AV
7386.000	23.96	22.01	45.97	74.00	-28.03	H	PK
7386.000	11.94	22.01	33.95	54.00	-20.05	H	AV
4924.000	39.82	15.55	55.37	74.00	-18.63	V	PK
4924.000	28.59	15.55	44.14	54.00	-9.86	V	AV
7386.000	24.77	22.01	46.78	74.00	-27.22	V	PK
7386.000	12.71	22.01	34.72	54.00	-19.28	V	AV

Worst case antenna 2

Test mode: 802.11b

Frequency (MHz)	Reading Level (dB μ V/m)	Correct (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
4824.000	22.35	15.34	37.69	74.00	-36.31	H	PK
4824.000	12.37	15.34	27.17	54.00	-26.29	H	AV
7236.000	24.18	21.61	45.79	74.00	-28.21	H	PK
7236.000	12.19	21.61	33.80	54.00	-20.20	H	AV
4824.000	31.02	15.34	46.36	74.00	-27.64	V	PK
4824.000	18.03	15.34	33.37	54.00	-20.63	V	AV
7236.000	23.56	21.61	45.17	74.00	-28.83	V	PK
7236.000	12.56	21.61	34.17	54.00	-19.83	V	AV
Middle Channel							
4874.000	19.86	15.45	35.31	74.00	-38.69	H	PK
4874.000	10.38	15.45	25.83	54.00	-28.17	H	AV
7311.000	23.71	21.80	45.51	74.00	-28.49	H	PK
7311.000	11.27	21.80	33.07	54.00	-20.93	H	AV
4874.000	31.81	15.45	47.26	74.00	-26.74	V	PK
4874.000	15.79	15.45	31.24	54.00	-22.76	V	AV
7311.000	23.63	21.80	45.43	74.00	-28.57	V	PK
7311.000	12.56	21.80	34.36	54.00	-19.64	V	AV
High Channel							
4924.000	20.07	15.55	35.62	74.00	-38.38	H	PK
4924.000	9.86	15.55	25.41	54.00	-28.59	H	AV
7386.000	23.11	22.01	45.32	74.00	-28.88	H	PK
7386.000	13.15	22.01	35.16	54.00	-18.84	H	AV
4924.000	30.53	15.55	46.08	74.00	-27.92	V	PK
4924.000	15.52	15.55	31.07	54.00	-42.93	V	AV
7386.000	24.03	22.01	46.04	74.00	-27.96	V	PK
7386.000	11.03	22.01	33.04	54.00	-20.96	V	AV

Worst case antenna 1+2

Test mode: 802.11n(H20)

Frequency (MHz)	Reading Level (dBμV/m)	Correct (dB/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
4824.000	23.37	15.34	38.71	74.00	-35.29	H	PK
4824.000	12.32	15.34	27.66	54.00	-26.34	H	AV
7236.000	22.94	21.61	44.55	74.00	-29.45	H	PK
7236.000	11.05	21.61	32.66	54.00	-21.34	H	AV
4824.000	29.53	15.34	44.87	74.00	-29.13	V	PK
4824.000	16.55	15.34	31.89	54.00	-22.11	V	AV
7236.000	24.18	21.61	45.79	74.00	-28.21	V	PK
7236.000	14.19	21.61	35.80	54.00	-18.20	V	AV
Middle Channel							
4874.000	20.50	15.45	35.95	74.00	-38.05	H	PK
4874.000	10.49	15.45	25.94	54.00	-28.06	H	AV
7311.000	23.39	21.80	45.19	74.00	-28.81	H	PK
7311.000	11.13	21.80	32.93	54.00	-41.07	H	AV
4874.000	30.39	15.45	45.84	74.00	-28.16	V	PK
4874.000	16.39	15.45	31.84	54.00	-22.16	V	AV
7311.000	24.67	21.80	46.47	74.00	-27.53	V	PK
7311.000	13.66	21.80	35.46	54.00	-18.54	V	AV
High Channel							
4924.000	19.30	15.55	34.85	74.00	-39.15	H	PK
4924.000	11.34	15.55	26.89	54.00	-27.11	H	AV
7386.000	24.48	22.01	46.96	74.00	-27.51	H	PK
7386.000	10.86	22.01	32.87	54.00	-21.13	H	AV
4924.000	32.92	15.55	48.47	74.00	-25.53	V	PK
4924.000	17.65	15.55	33.20	54.00	-20.80	V	AV
7386.000	25.24	22.01	47.25	74.00	-26.75	V	PK
7386.000	13.34	22.01	35.35	54.00	-18.65	V	AV

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Correct= Antenna Factor + Cable Factor –Preamplifier Factor,

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

Remark:

- 1) .For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3rd harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

5.8 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013 Clause 6.4, 6.5 and 6.6 & KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Result:

Pre-test under all modes, choose the worst case mode record On the report.

Worst case antenna 1

Test mode: 802.11b

Frequency (MHz)	Reading Level (dBμV/m)	Correct (dB/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
2310.000	31.23	6.54	37.77	74.00	-36.23	H	PK
2310.000	22.24	6.54	28.78	54.00	-25.22	H	AV
2390.000	32.69	6.61	39.30	74.00	-34.70	H	PK
2390.000	20.86	6.61	27.29	54.00	-26.71	H	AV
2310.000	33.26	6.54	39.80	74.00	-34.20	V	PK
2310.000	20.25	6.54	26.79	54.00	-27.21	V	AV
2390.000	40.90	6.61	47.51	74.00	-26.49	V	PK
2390.000	29.50	6.61	32.51	54.00	-21.49	V	AV
High Channel							
2483.500	64.78	6.70	71.48	74.00	-2.52	H	PK
2483.500	41.78	6.70	48.48	54.00	-5.52	H	AV
2500.000	32.32	6.72	39.04	74.00	-34.96	H	PK
2500.000	24.53	6.72	31.25	54.00	-22.75	H	AV
2483.500	50.32	6.70	57.02	74.00	-16.98	V	PK
2483.500	36.72	6.70	43.42	54.00	-30.58	V	AV
2500.000	37.35	6.72	44.07	74.00	-29.93	V	PK
2500.000	27.34	6.72	34.06	54.00	-19.94	V	AV


Worst case antenna 1+2

Test mode: 802.11n(HT40)

Frequency (MHz)	Reading Level (dB μ V/m)	Correct (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
2310.000	29.40	6.54	35.94	74.00	-38.06	H	PK
2310.000	21.54	6.54	28.08	54.00	-25.92	H	AV
2390.000	48.46	6.61	55.07	74.00	-18.93	H	PK
2390.000	30.65	6.61	37.26	54.00	-16.74	H	AV
2310.000	48.46	6.54	35.94	74.00	-38.06	V	PK
2310.000	21.54	6.54	28.08	54.00	-25.92	V	AV
2390.000	48.46	6.61	55.07	74.00	-18.93	V	PK
2390.000	30.65	6.61	37.26	54.00	-16.74	V	AV
High Channel							
2483.500	65.33	6.70	72.03	74.00	-1.97	H	PK
2483.500	42.39	6.70	49.09	54.00	-4.91	H	AV
2500.000	28.11	6.72	34.83	74.00	-39.17	H	PK
2500.000	19.31	6.72	26.03	54.00	-27.97	H	AV
2483.500	62.50	6.70	69.20	74.00	-4.80	V	PK
2483.500	39.85	6.70	46.55	54.00	-7.45	V	AV
2500.000	40.60	6.72	47.32	74.00	-26.68	V	PK
2500.000	30.36	6.72	37.08	54.00	-16.92	V	AV

5.9 Band Edges Requirement

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10:2013 Clause 6.9 & KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

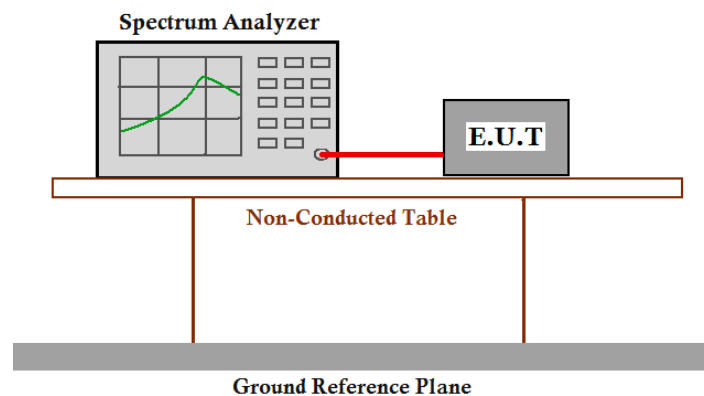

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW=100 kHz, VBW=300 KHz, suitable frequency span including 1000 kHz bandwidth from band edge.
3. Measure the Conducted Spurious Emissions and Radiated Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse.

Test result with plots as follows:

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

Result plot as follows:


Antenna 1

802.11b

Channel 1: 2.412 GHz

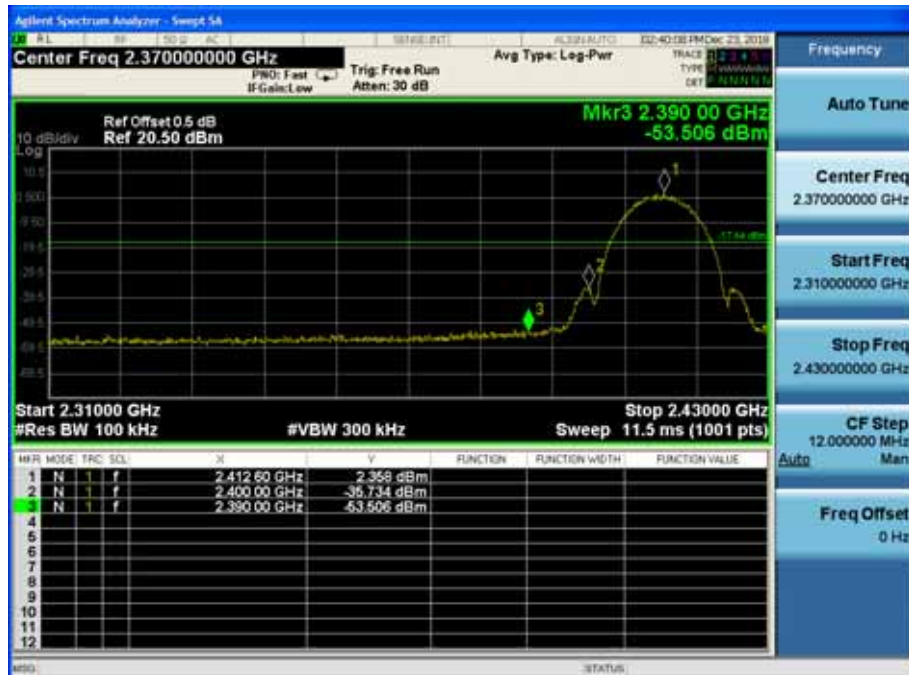

Channel 11: 2.462 GHz

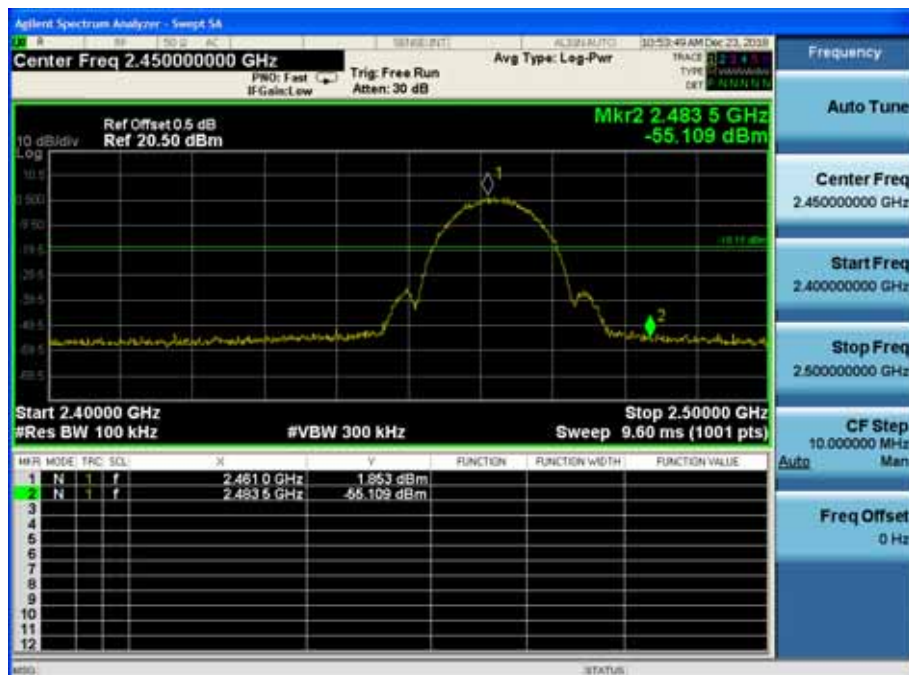

802.11g

Channel 1: 2.412 GHz



Channel 11: 2.462 GHz



802.11n(HT20)

Channel 1: 2.412 GHz



Channel 11: 2.462 GHz



802.11n(HT40)

Channel 3: 2.422 GHz



Channel 9: 2.452 GHz




Antenna 2

802.11b

Channel 1: 2.412 GHz



Channel 11: 2.462 GHz

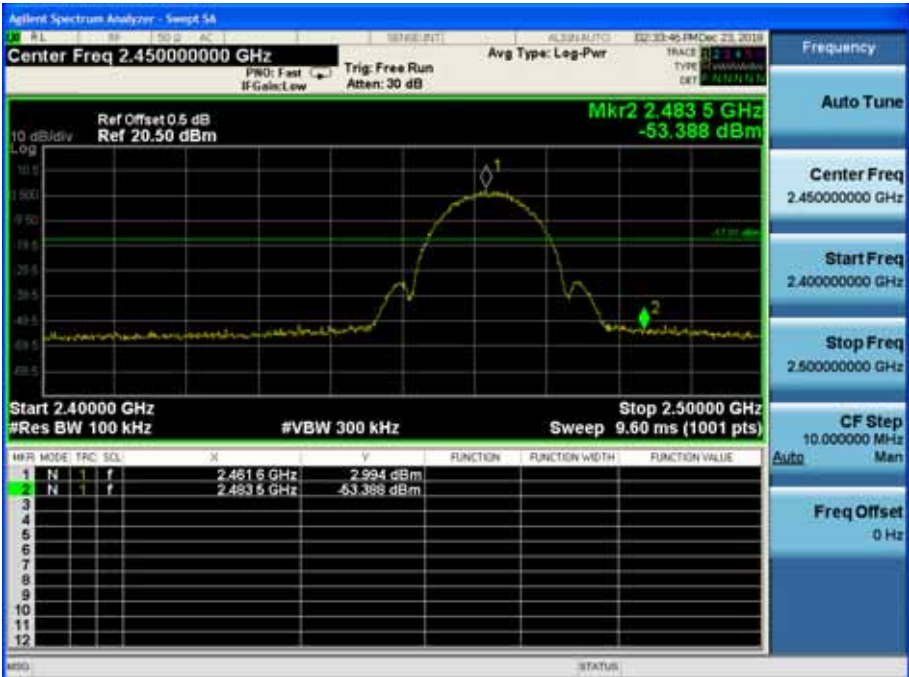


802.11g

Channel 1: 2.412 GHz




Channel 11: 2.462 GHz

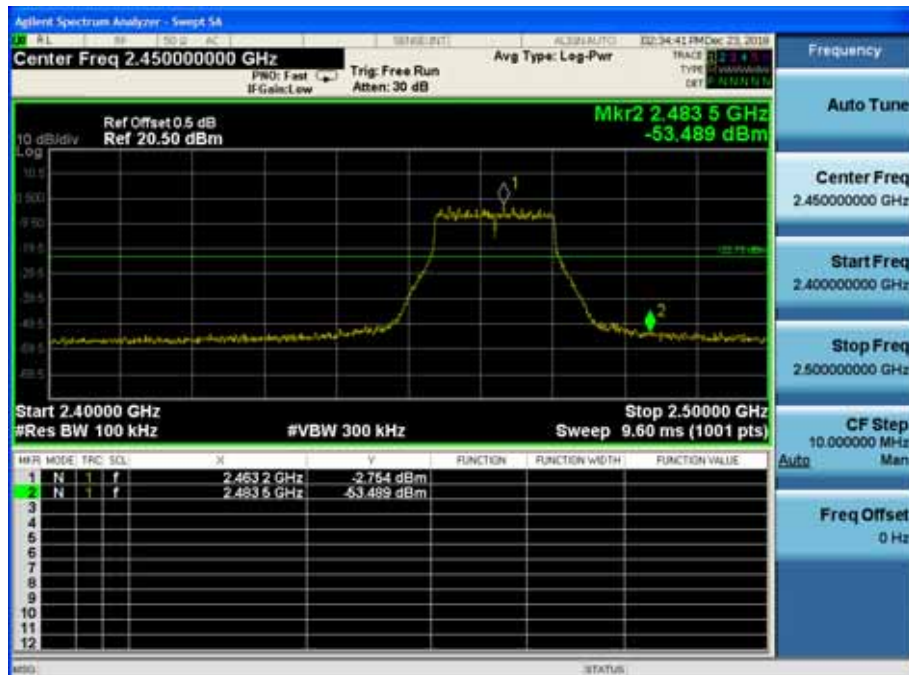


802.11n(HT20)

Channel 1: 2.412 GHz

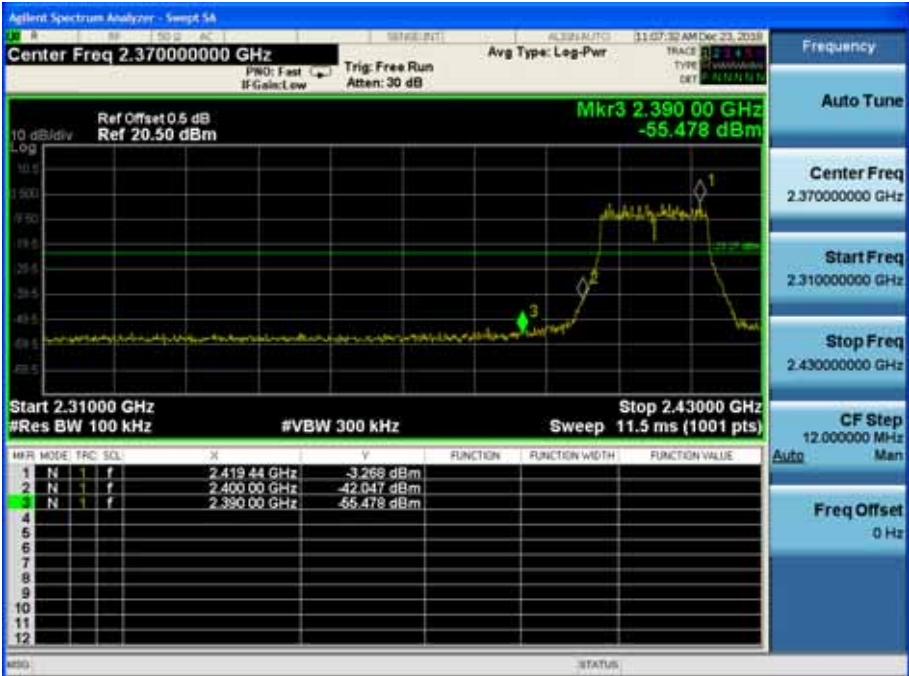

Channel 11: 2.462 GHz

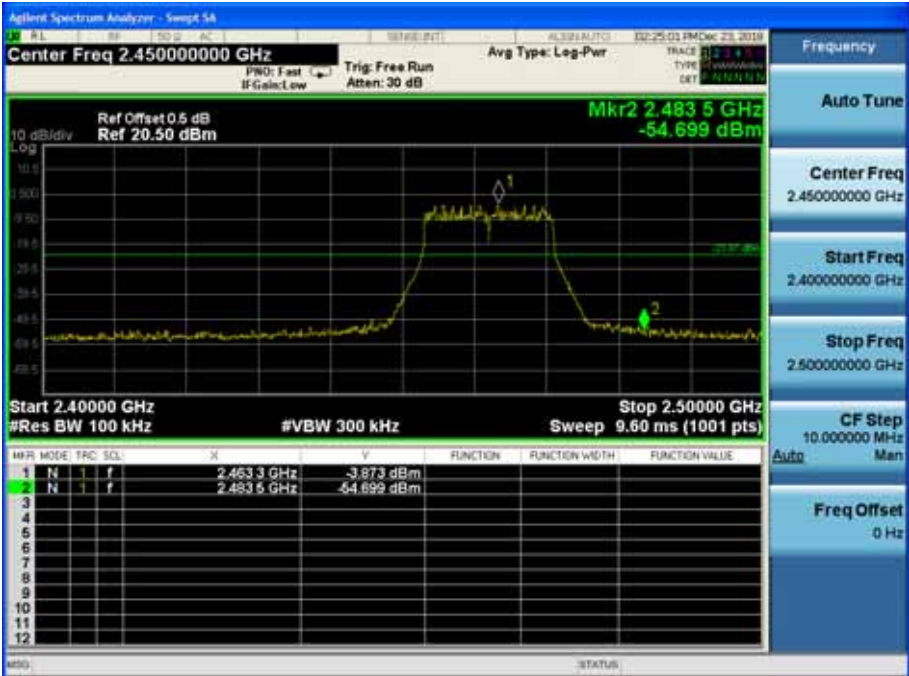

802.11n(HT40)

Channel 3: 2.422 GHz



Channel 9: 2.452 GHz



Test result: The unit does meet the FCC requirements.

5.10 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

Test Requirement: FCC Part 15 C section 15.207

Test Voltage: 120V~ 60Hz

Test Method: ANSI C63.10:2013 Clause 6.2

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit


Limits for conducted disturbance at the mains ports of class B

Frequency Range	Class B Limit dB(μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

EUT Operation:

Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture).

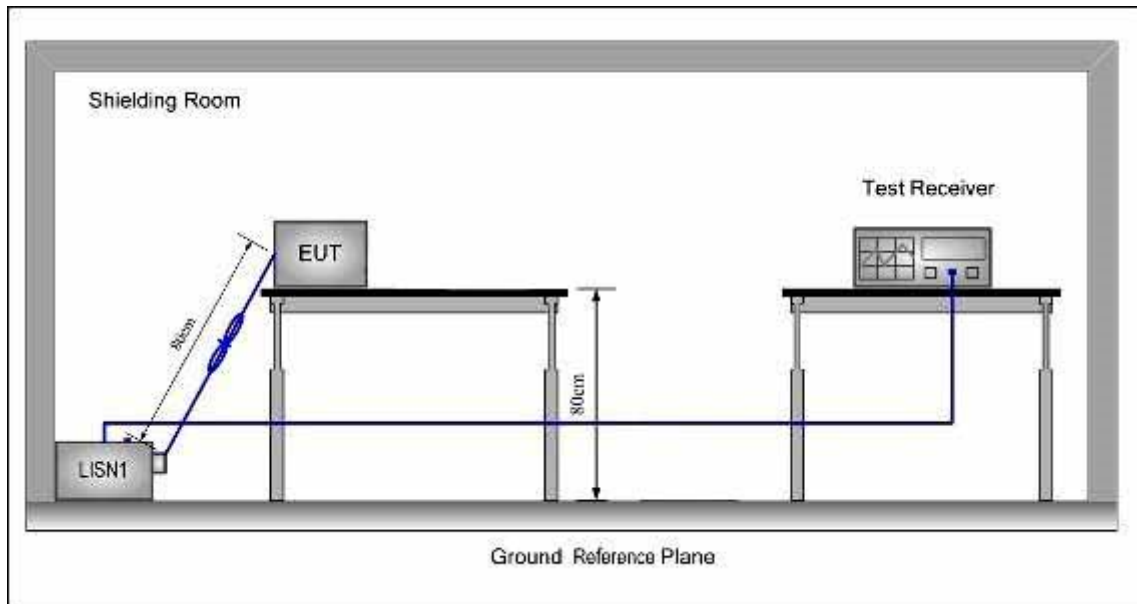Test Configuration:**Test procedure:**

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

5.10.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT Live line

Peak Scan:

Level (dBμV)

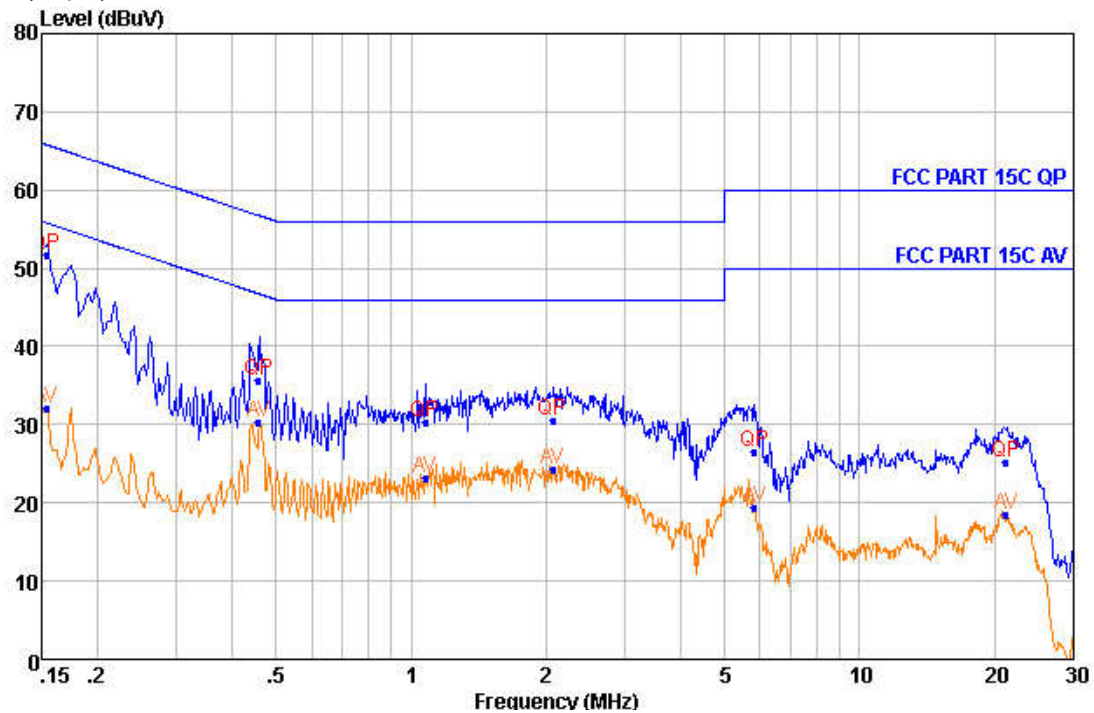


Quasi-peak and Average measurement

NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.154	51.61	QP	9.38	0.20	65.78	-14.17
2	0.154	31.99	Average	9.38	0.20	55.78	-23.79
3	0.458	35.55	QP	9.35	0.26	56.73	-21.18
4	0.458	30.40	Average	9.35	0.26	46.73	-16.33
5	1.075	30.39	QP	9.28	0.31	56.00	-25.61
6	1.075	23.26	Average	9.28	0.31	46.00	-22.74
7	2.073	30.60	QP	9.32	0.35	56.00	-25.40
8	2.073	24.32	Average	9.32	0.35	46.00	-21.68
9	5.825	26.51	QP	9.29	0.41	60.00	-33.49
10	5.825	19.31	Average	9.29	0.41	50.00	-30.69
11	21.213	25.10	QP	9.75	0.48	60.00	-34.90
12	21.213	18.49	Average	9.75	0.48	50.00	-31.51

Neutral Line

Peak Scan:

Level (dBμV)

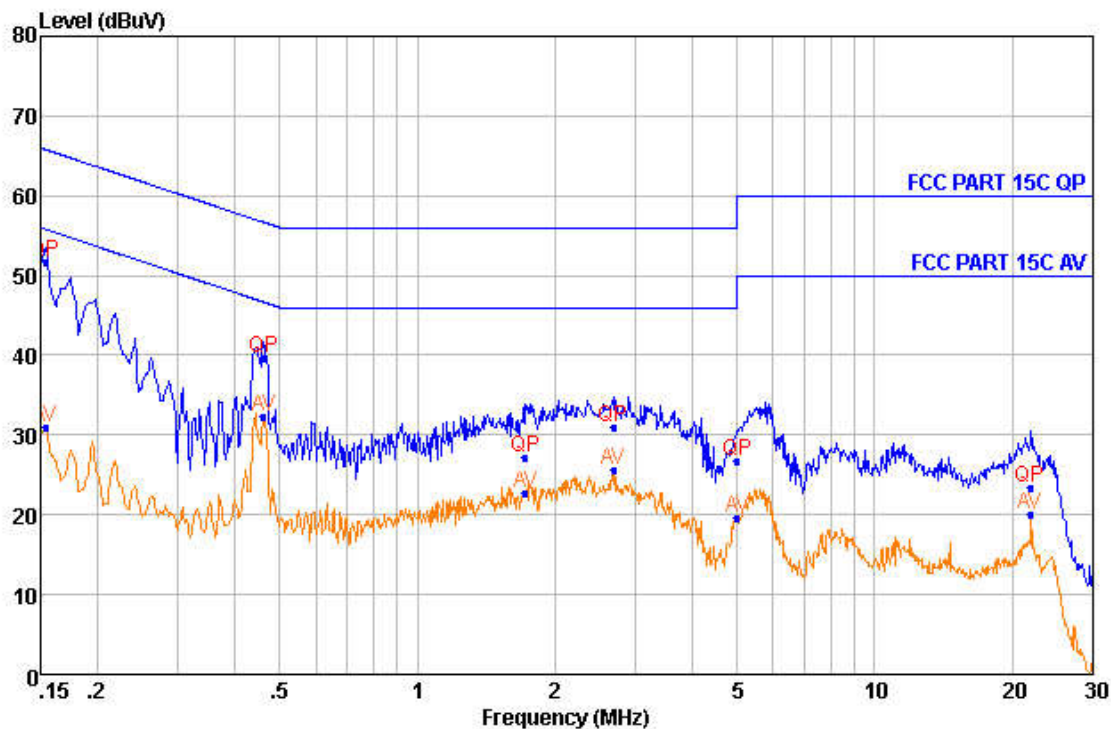

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.154	51.65	QP	9.38	0.20	65.78	-14.13
2	0.154	30.91	Average	9.38	0.20	55.78	-24.87
3	0.460	39.70	QP	9.36	0.26	56.69	-16.99
4	0.460	32.36	Average	9.36	0.26	46.69	-14.33
5	1.721	27.27	QP	9.39	0.34	56.00	-28.73
6	1.721	22.63	Average	9.39	0.34	46.00	-23.37
7	2.686	31.02	QP	9.40	0.36	56.00	-24.98
8	2.686	25.54	Average	9.40	0.36	46.00	-20.46
9	5.000	26.82	QP	9.43	0.40	56.00	-29.18
10	5.000	19.68	Average	9.43	0.40	46.00	-26.32
11	21.900	23.38	QP	9.86	0.48	60.00	-36.62
12	21.900	20.16	Average	9.86	0.48	50.00	-29.84

-- End of test report --