

GSM850_GPRS11_Right Cheek_128**DUT: EUT**

Communication System: GPRS 850-3solt; Frequency: 824.2 MHz; Duty Cycle: 1:2.67

Medium: H835 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.266 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.02 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.271 mW/g

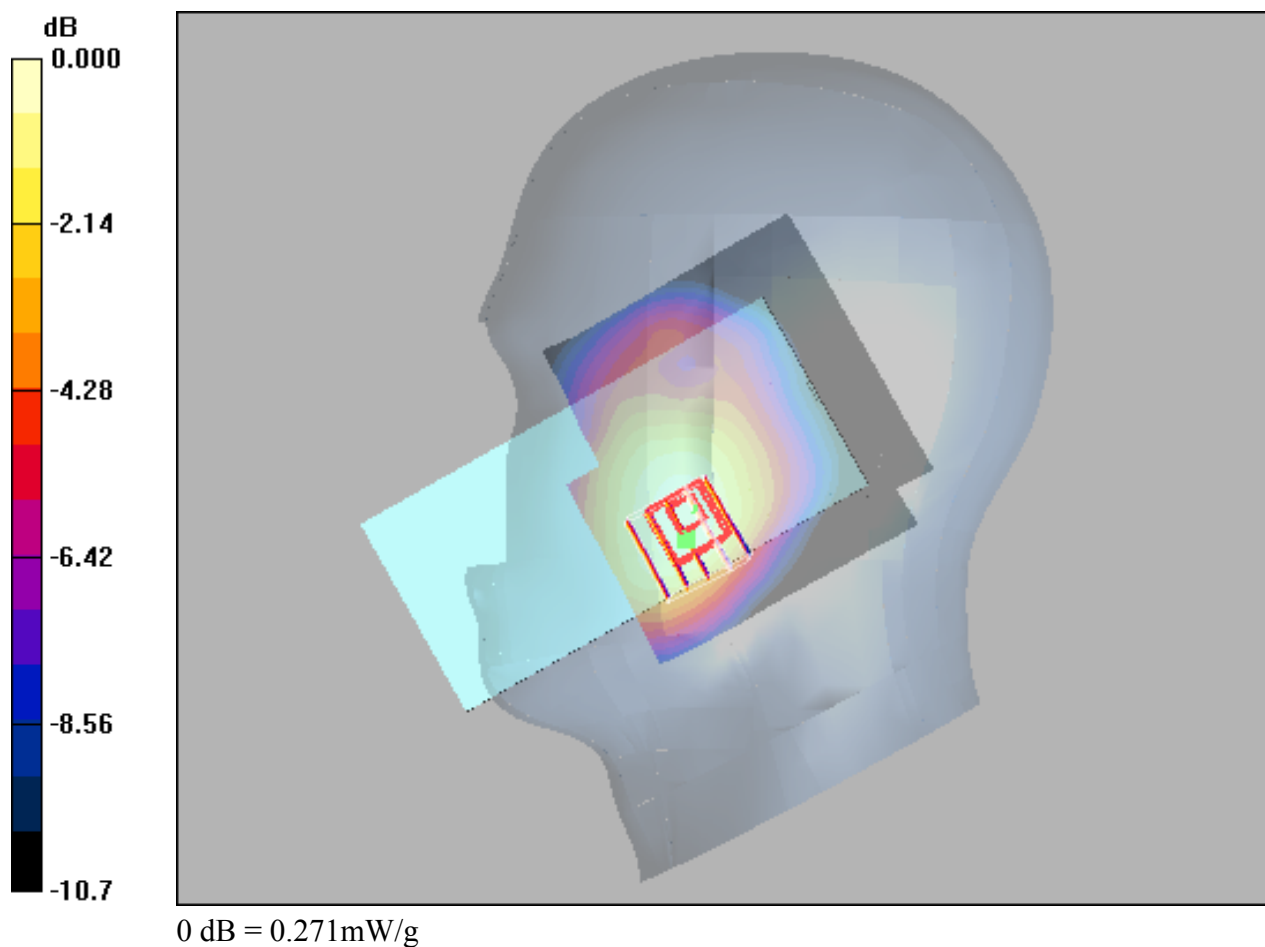

GSM1900_GPRS11_Left Cheek_810**DUT: EUT**


Communication System: GPRS1900-3slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67
Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.089 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.53 V/m; Power Drift = 0.028 dB
Peak SAR (extrapolated) = 0.106 W/kg
SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.044 mW/g
Maximum value of SAR (measured) = 0.081 mW/g

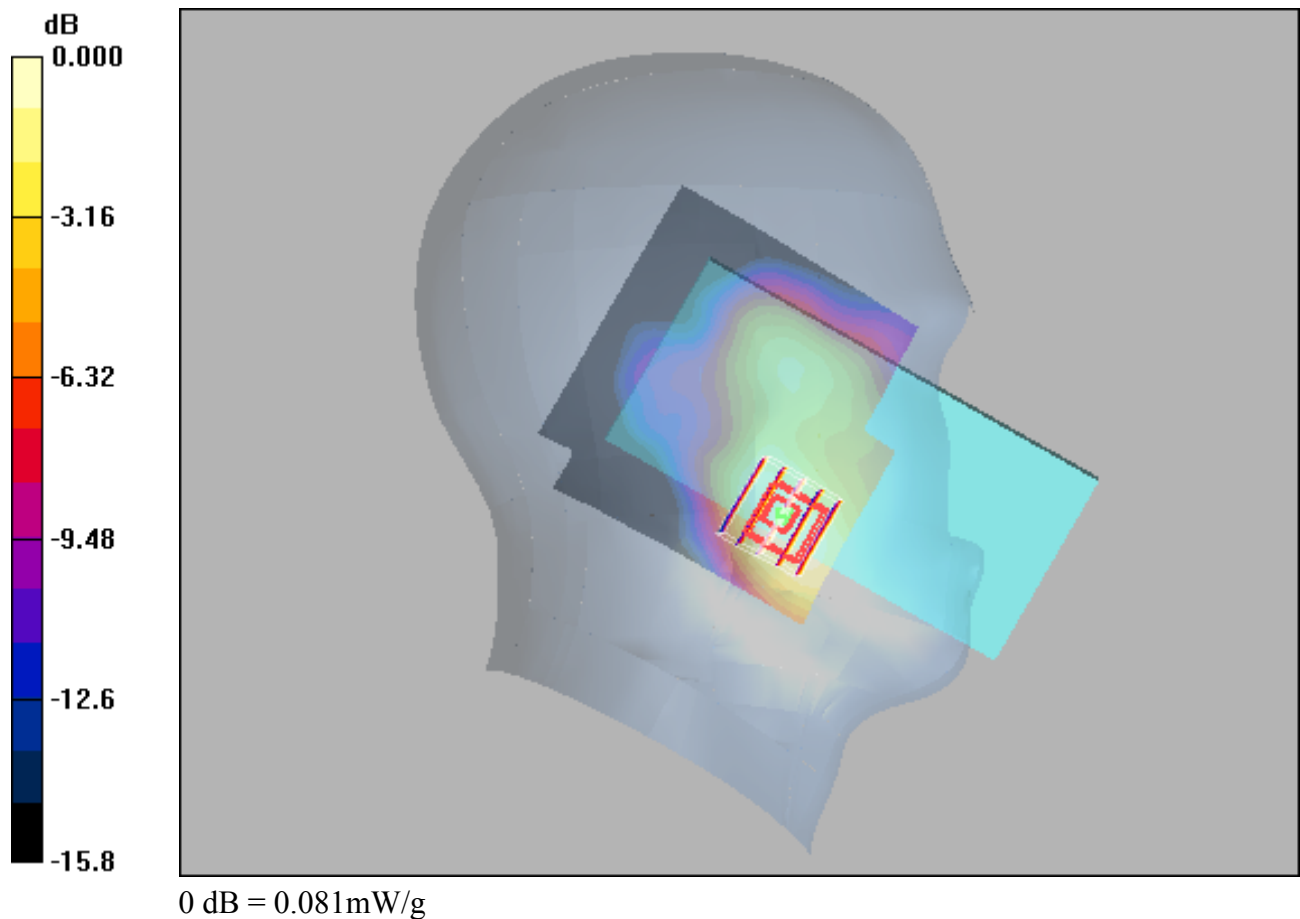

WCDMA II_RMC12.2K_Left Cheek_9400**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.149 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.49 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.140 mW/g

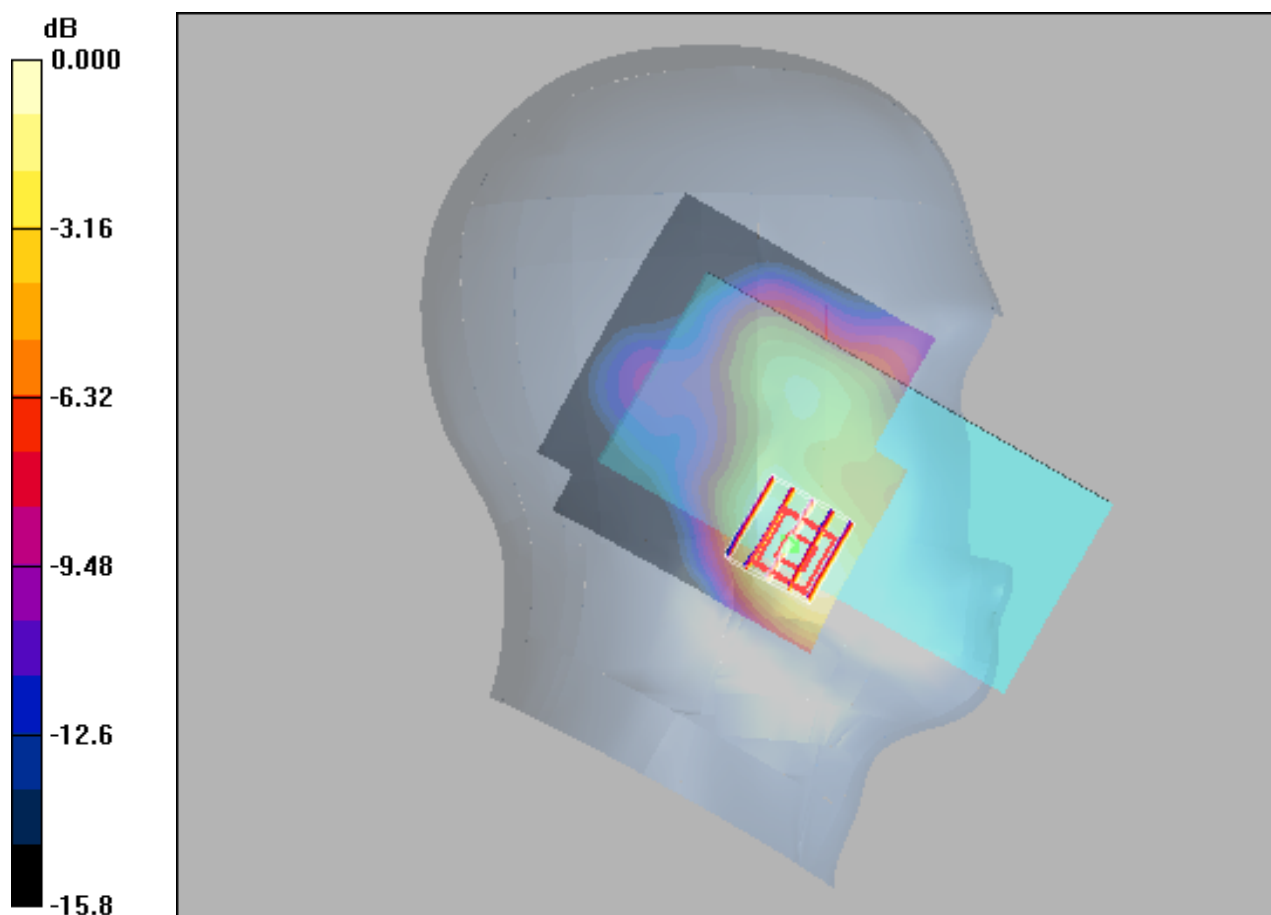

0 dB = 0.140mW/g

WCDMA V_RMC12.2K_Right Cheek_4182**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.167 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.88 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

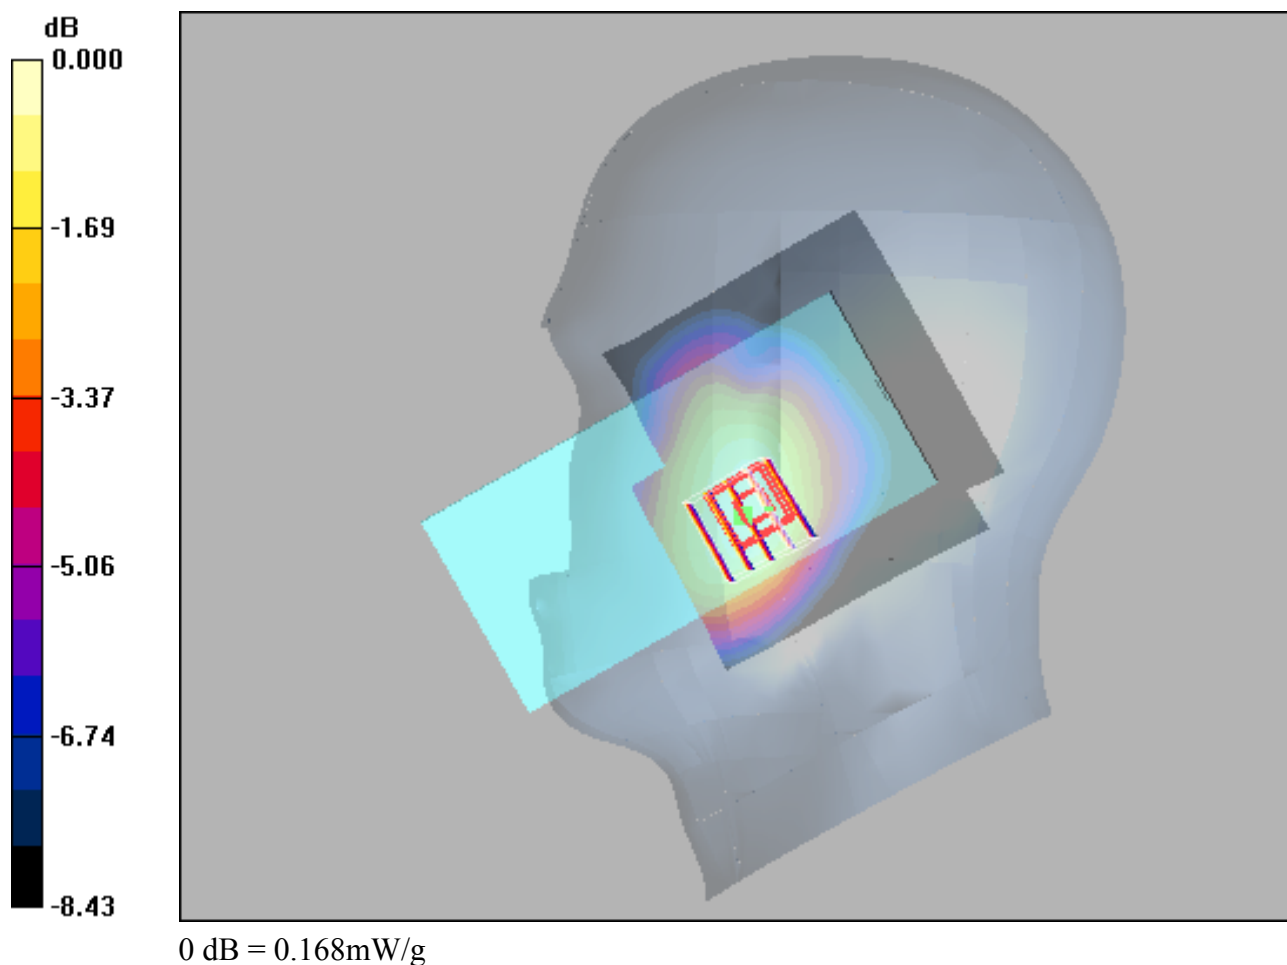

WIFI 2.4G_802.11b_Left Cheek_6**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.440 mW/g



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.72 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

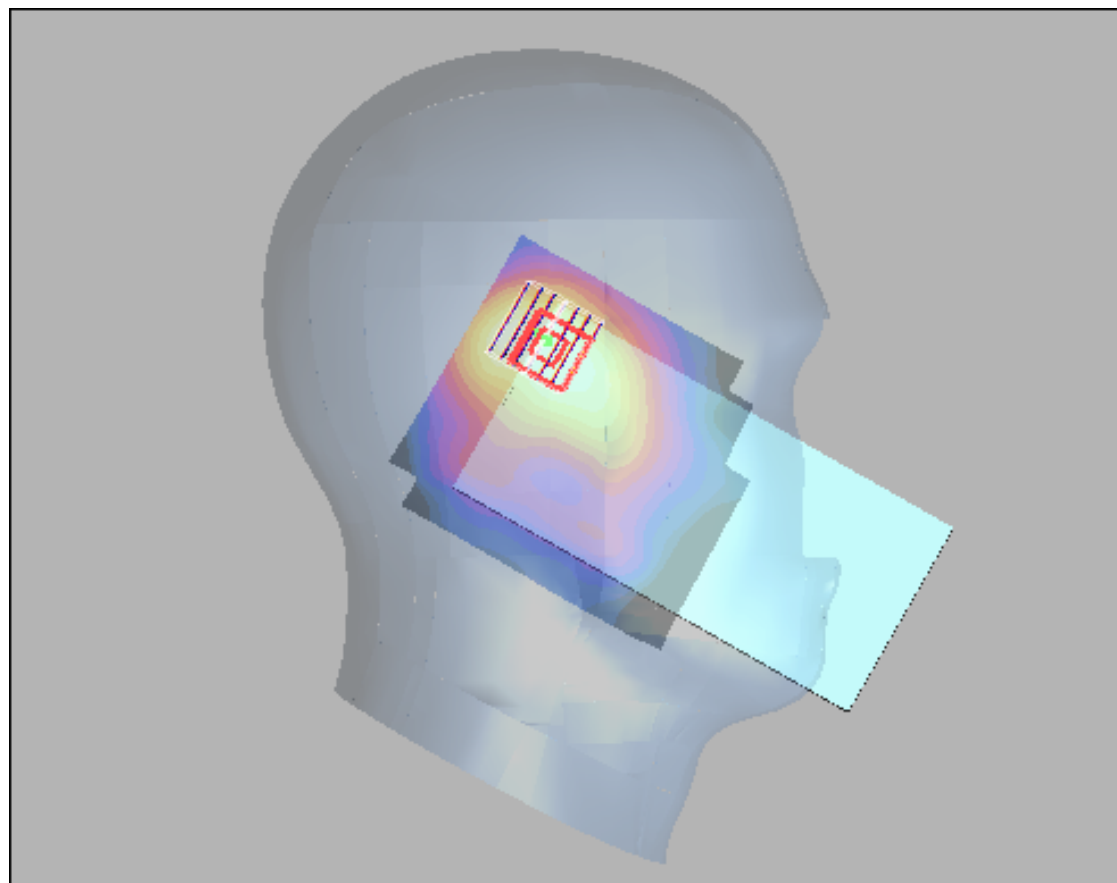

0 dB = 0.410mW/g

EDR_DH5_Left Cheek_39**DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.079 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.78 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.074 mW/g

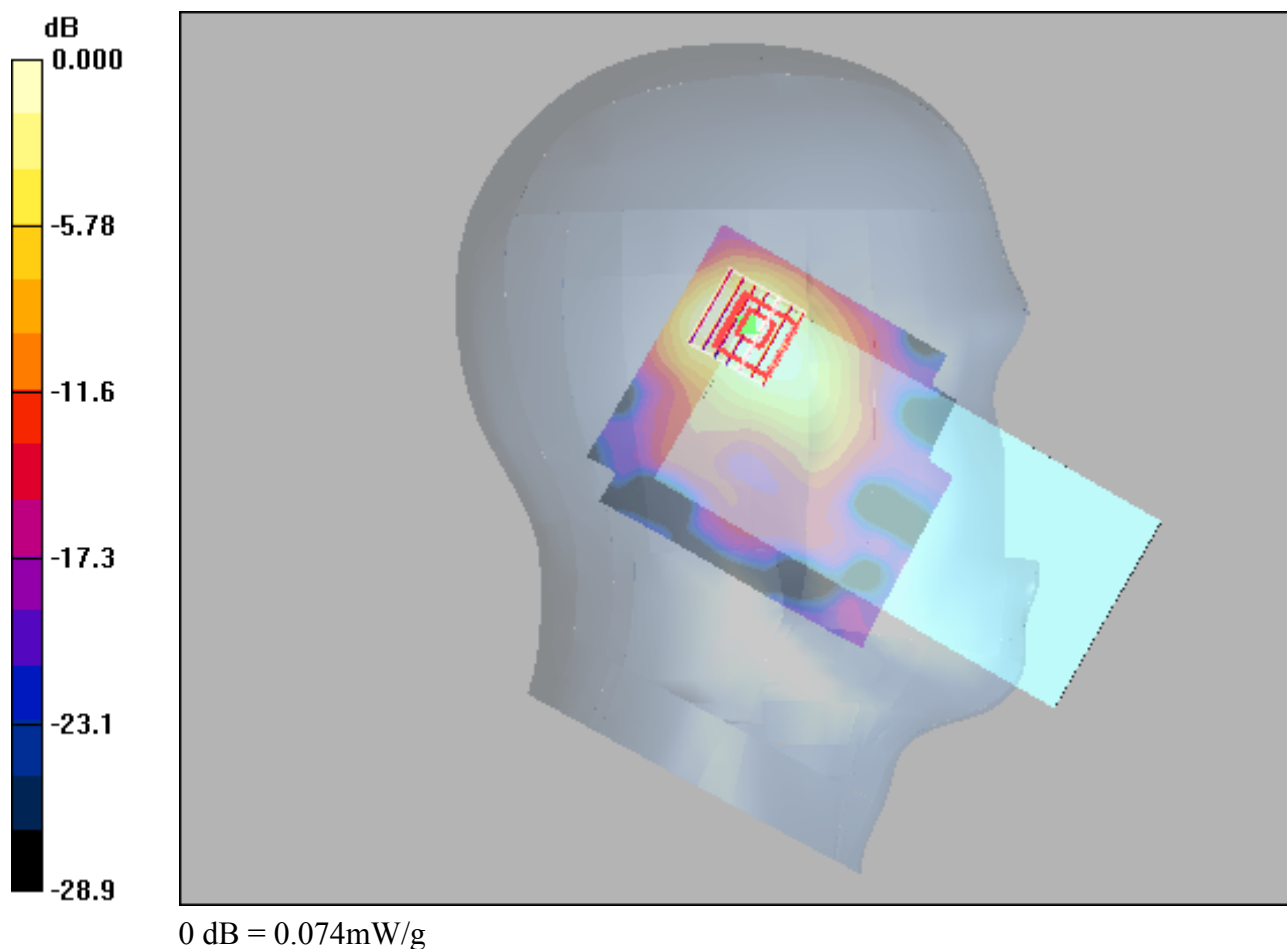

GSM850_GPRS11_Front Face_10MM_128**DUT: EUT**

Communication System: GPRS 850-3solt; Frequency: 824.2 MHz; Duty Cycle: 1:2.67
Medium: H835 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.203 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.218 mW/g

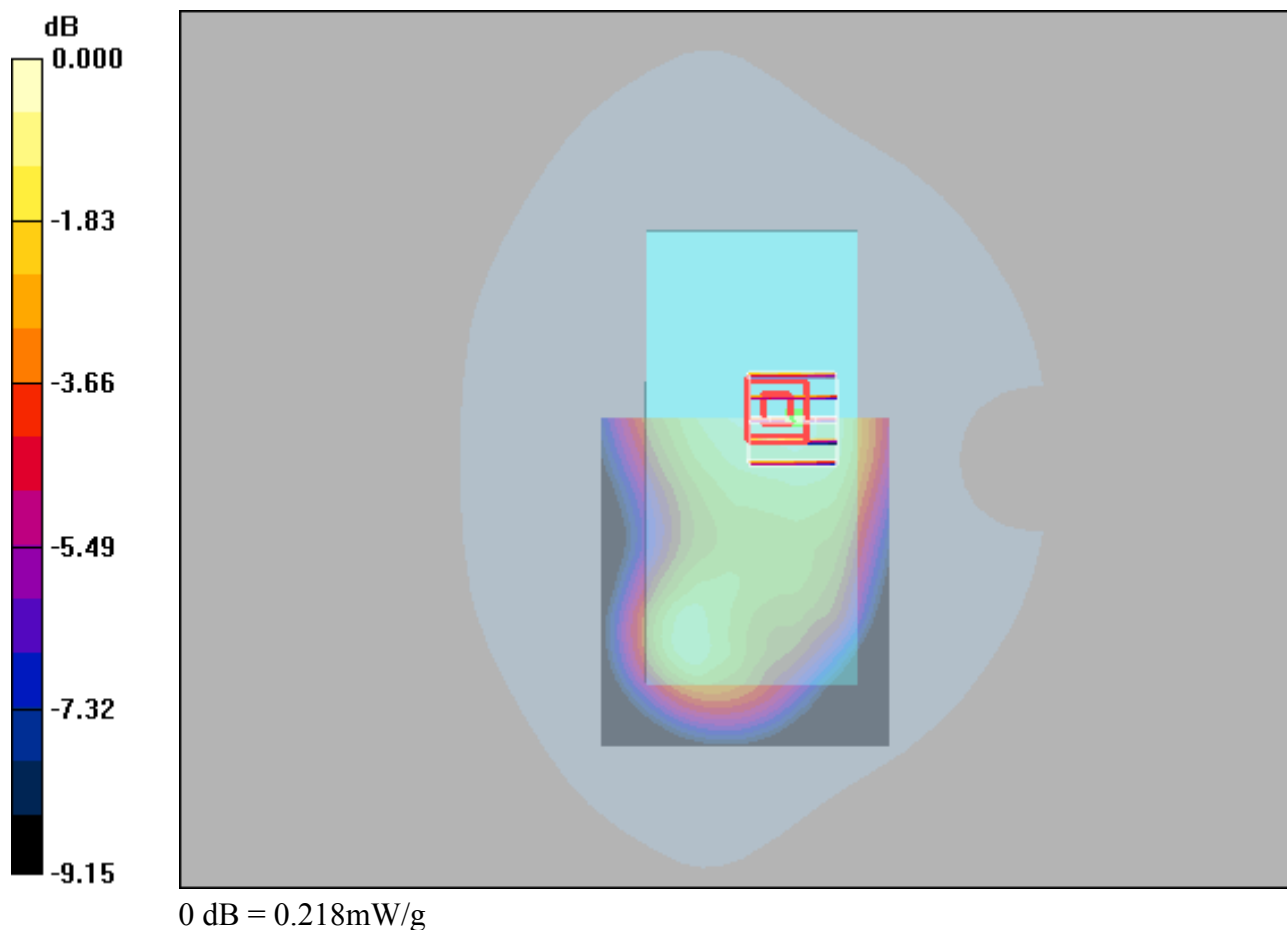

GSM1900_GPRS11_Rear Face_10MM_810**DUT: EUT**

Communication System: GPRS1900-3slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67
Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.268 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.00 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

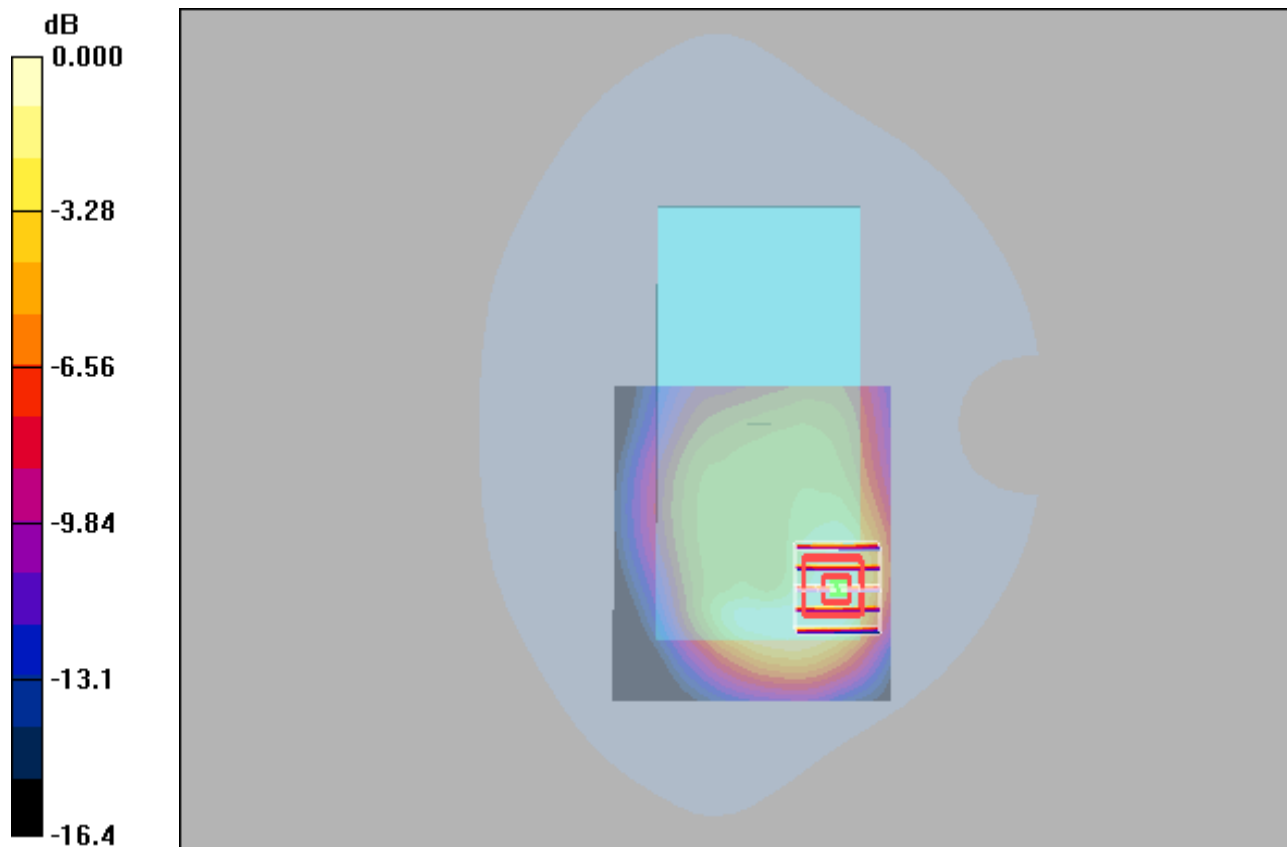

0 dB = 0.254mW/g

WCDMA II_RMC12.2K_Rear Face_10MM_9400**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.516 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.481 mW/g

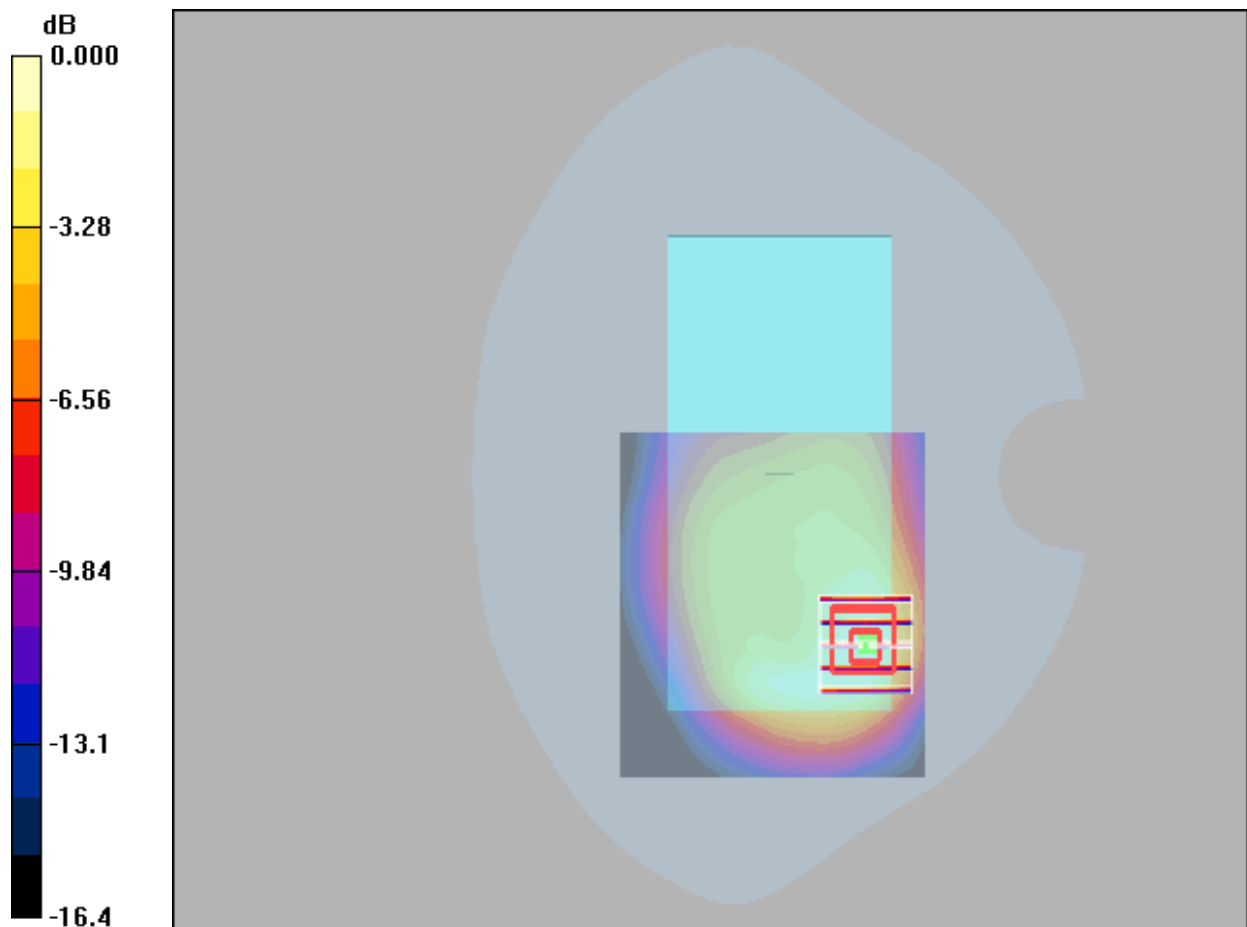

0 dB = 0.481mW/g

WCDMA V_RMC12.2K_Rear Face_10MM_4182**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.313 mW/g

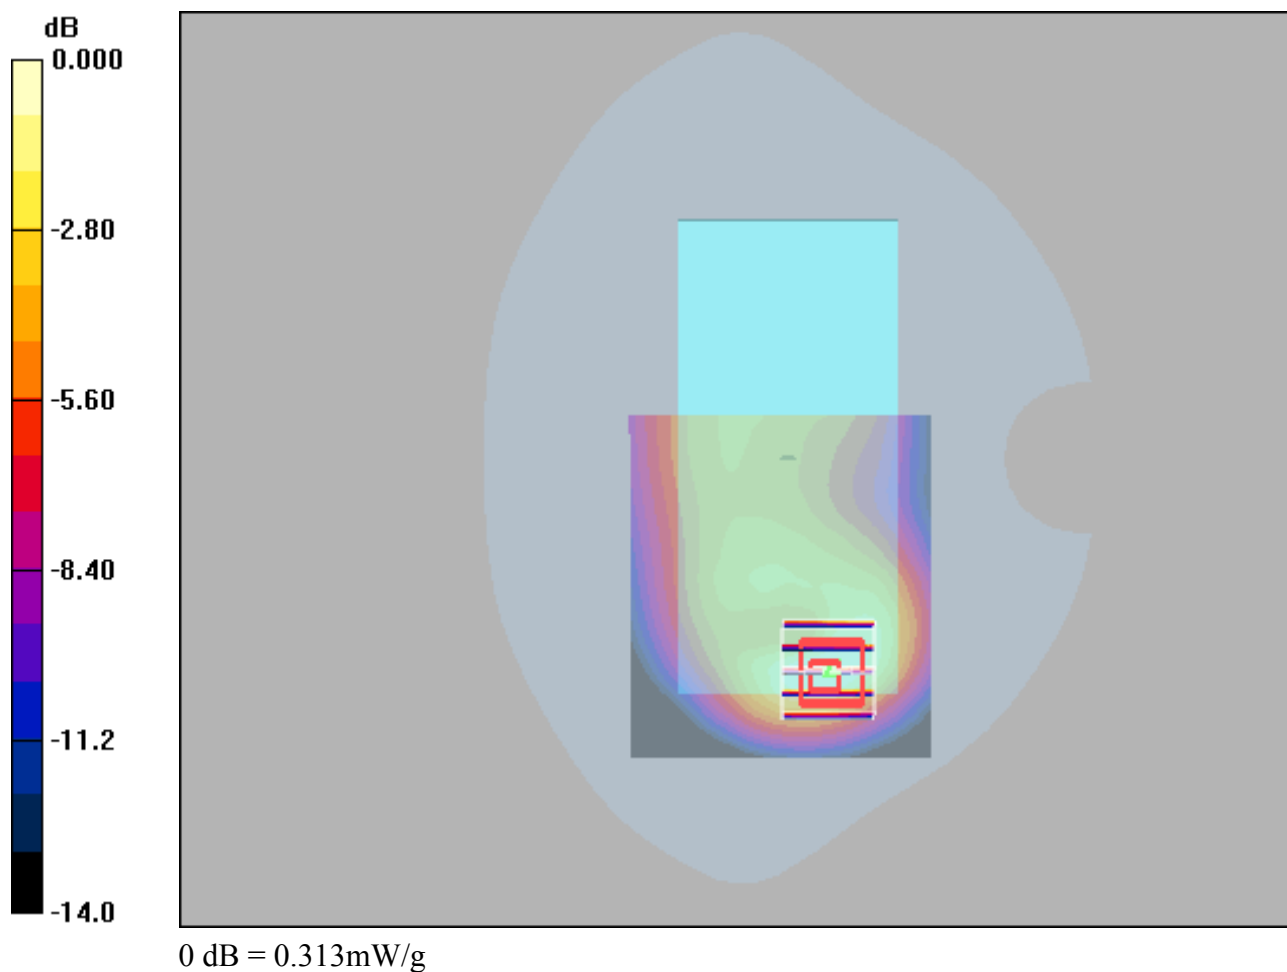

WIFI 2.4G_802.11b_Rear Face_10MM_6**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.160 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.81 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

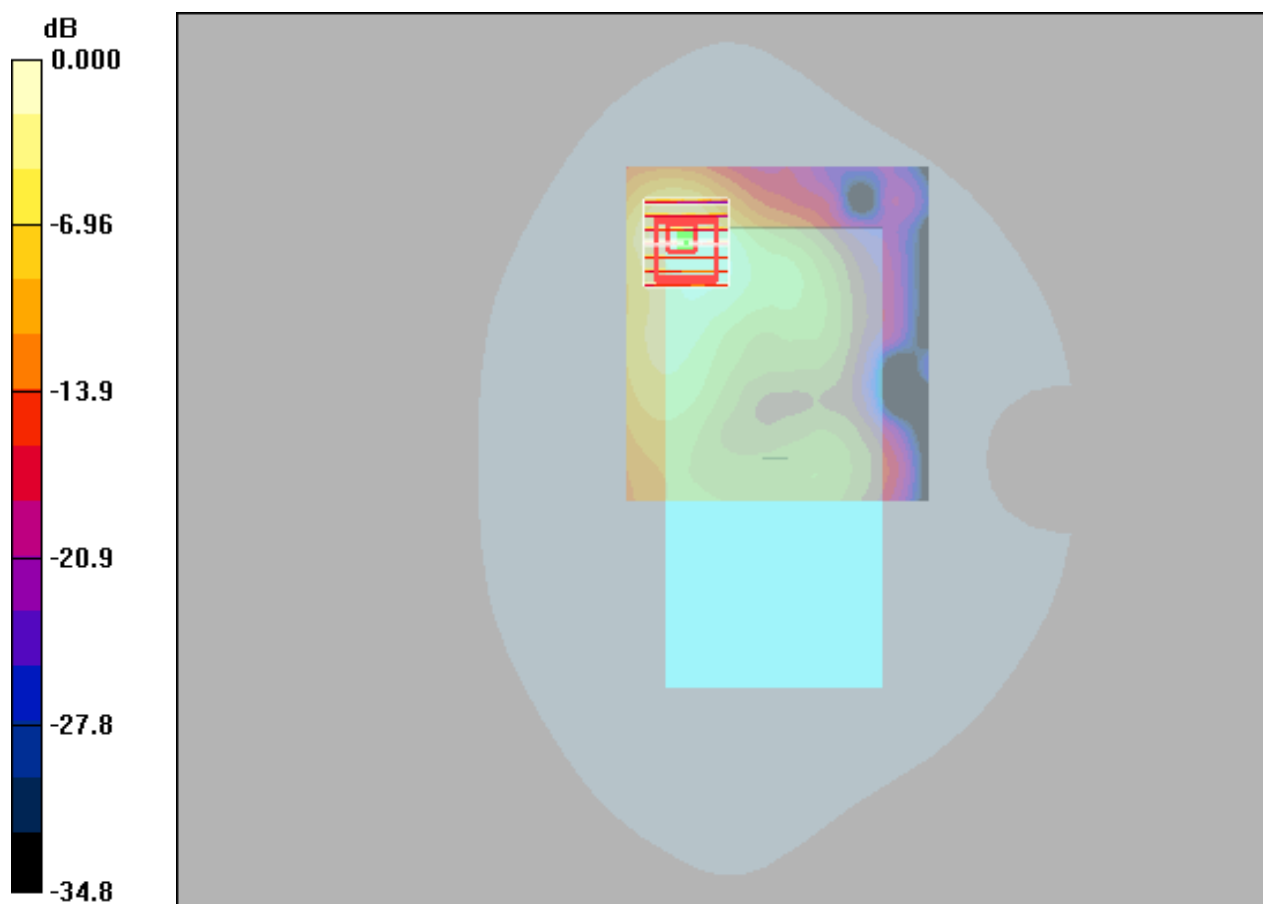

0 dB = 0.158mW/g

EDR_DH5_Rear Face_10MM_39**DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.024 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.973 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.042 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00731 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

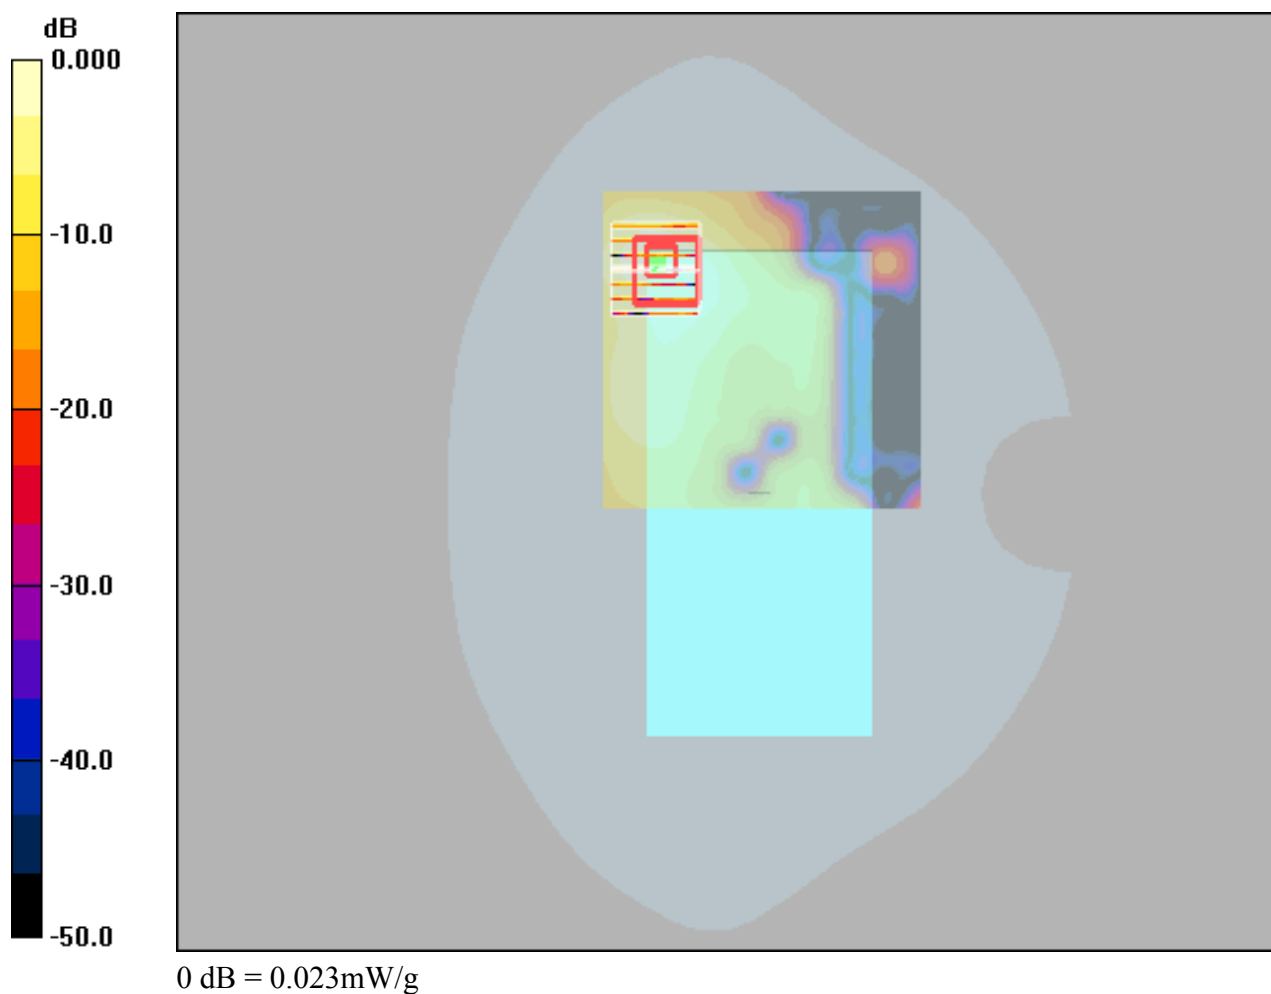

GSM850_GPRS11_Right Side_10MM_128**DUT: EUT**

Communication System: GPRS 850-3solt; Frequency: 824.2 MHz;Duty Cycle: 1:2.67


Medium: H835 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.340 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.9 V/m; Power Drift = 0.034 dB
Peak SAR (extrapolated) = 0.427 W/kg
SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.197 mW/g
Maximum value of SAR (measured) = 0.335 mW/g

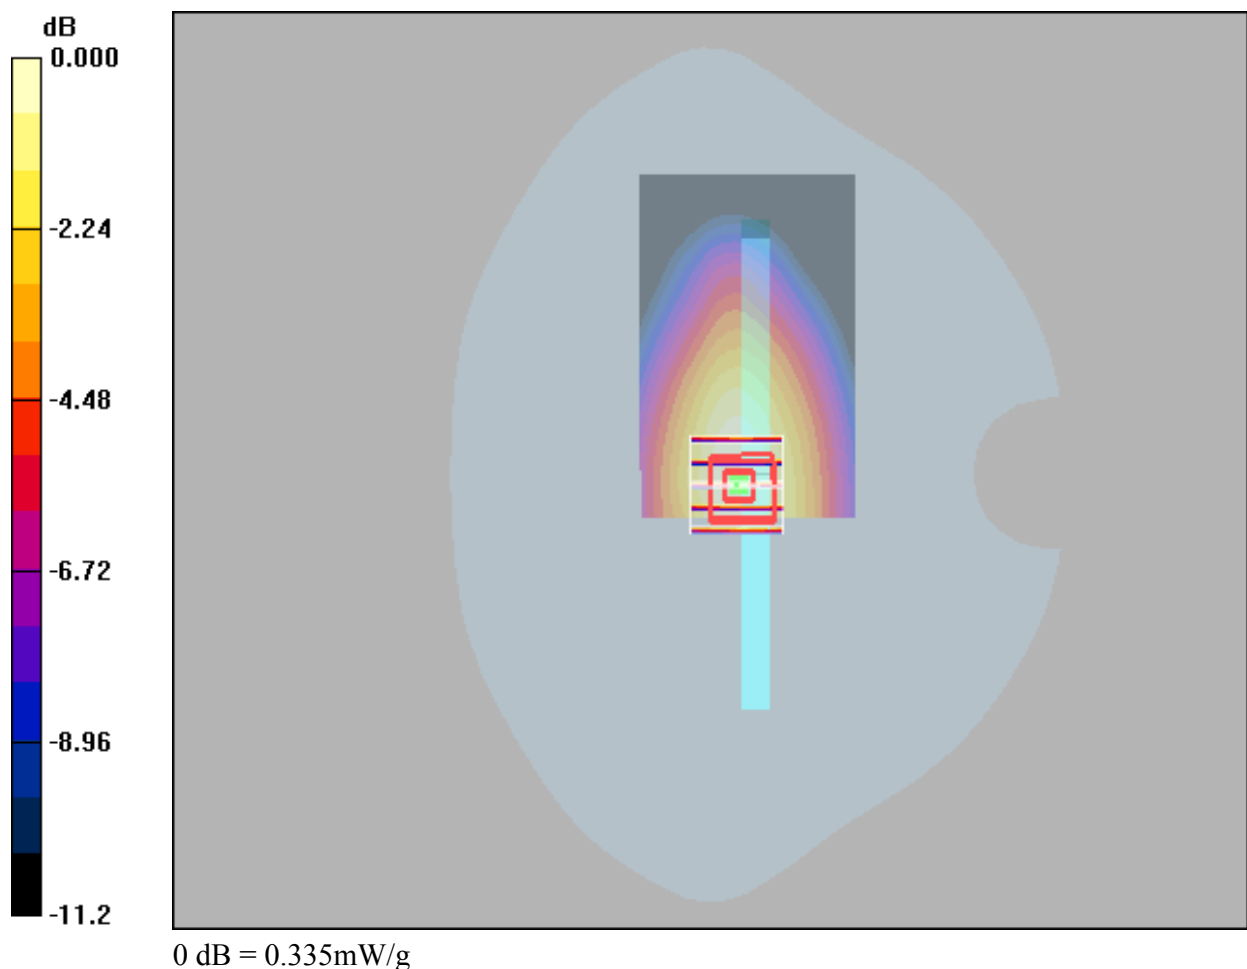

GSM1900_GPRS11_Bottom Side_10MM_810**DUT: EUT**

Communication System: GPRS1900-3slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.419 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.390 mW/g

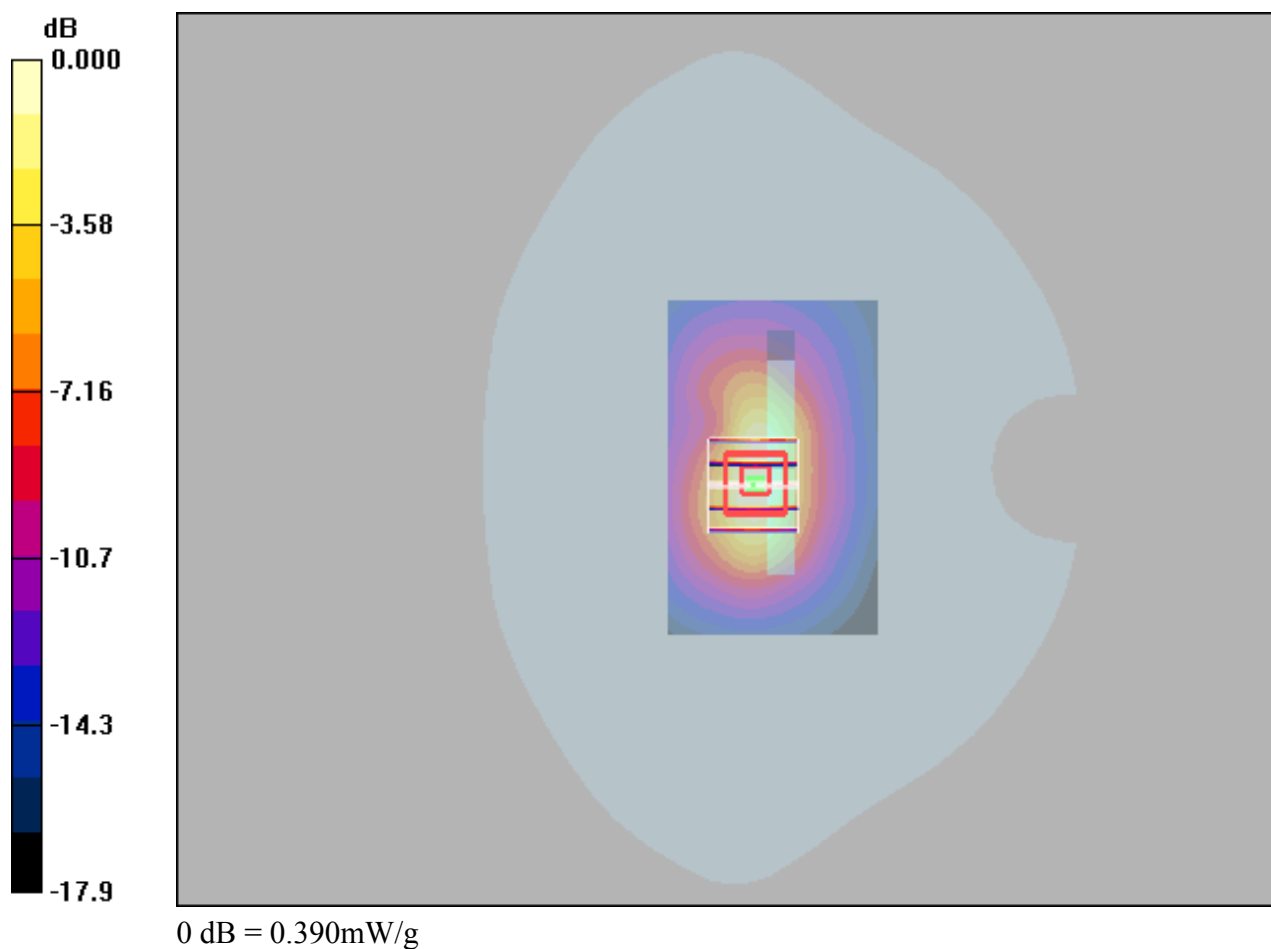

WCDMA II_RMC12.2K_Bottom Side_10MM_9400**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.765 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.749 mW/g

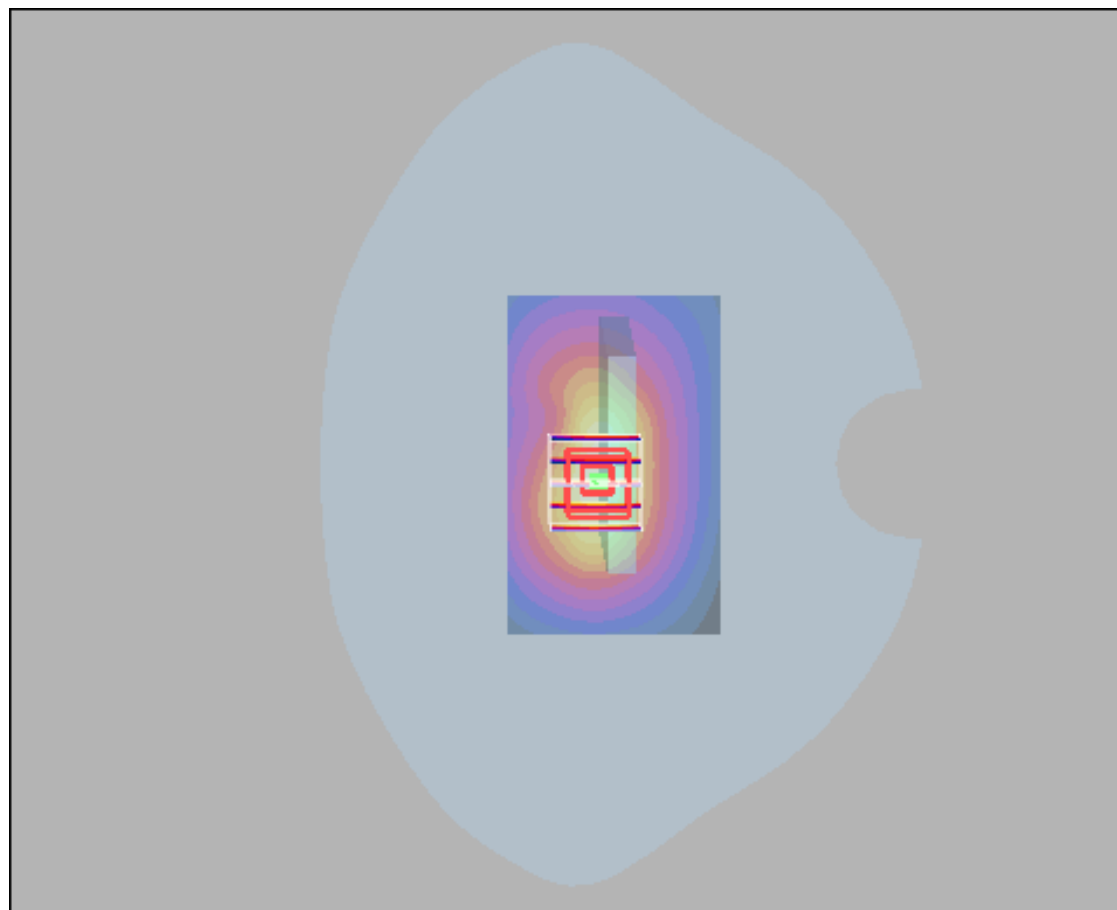

0 dB = 0.749mW/g