



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Vivint. Inc.
Applicant Address	4931 North 300 West Provo Utah 84604 United States
FCC ID	2AAAS-WR01
Manufacturer's company	CyberTAN Technology, Inc.
Manufacturer Address	No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan

Product Name	Wireless Router
Brand Name	Vivint
Model No.	WR01
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Aug. 21, 2014
Final Test Date	Sep. 24, 2014
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle	10
3.11. Test Configurations	11
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. 6dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement.....	26
4.4. Maximum Conducted Output Power Measurement.....	31
4.5. Power Spectral Density Measurement	35
4.6. Radiated Emissions Measurement	48
4.7. Band Edge Emissions Measurement	72
4.8. Frequency Stability Measurement	81
4.9. Antenna Requirements	83
5. LIST OF MEASURING EQUIPMENTS	84
6. MEASUREMENT UNCERTAINTY.....	86
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR483001AB	Rev. 01	Initial issue of report	Nov. 04, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Router
Brand Name : Vivint
Model No. : WR01
Applicant : Vivint. Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 21, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.94 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	0.97 dB
4.5	15.407(a)	Power Spectral Density	Complies	0.19 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.08 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.52 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: 802.11ac MCS0/Nss1 (VHT20): 27.68 MHz ; 802.11ac MCS0/Nss1 (VHT40): 46.72 MHz ; 802.11ac MCS0/Nss1 (VHT80): 74.88 MHz Band 4: 802.11ac MCS0/Nss1 (VHT20): 31.44 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.16 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.52 MHz
Maximum Conducted Output Power	Band 1: 802.11ac MCS0/Nss1 (VHT20): 27.00 dBm ; 802.11ac MCS0/Nss1 (VHT40): 26.95 dBm ; 802.11ac MCS0/Nss1 (VHT80): 21.14 dBm Band 4: 802.11ac MCS0/Nss1 (VHT20): 29.03 dBm ; 802.11ac MCS0/Nss1 (VHT40): 24.17 dBm ; 802.11ac MCS0/Nss1 (VHT80): 23.19 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9
Channel Band Width (99%)	Band 1: 22.88 MHz ; Band 4: 30.48 MHz
Maximum Conducted Output Power	Band 1: 26.73 dBm ; Band 4: 28.35 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
Beamforming Function	☐ With beamforming ☒ Without beamforming
Band 1 Information	☒ Point-to-multipoint ☐ Fixed point-to-point
	☒ Indoor
	☐ Outdoor

Antenna and Band width

Antenna	Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	AtechOEM	ADS0248-W 120150	Input: 100-240V ~ 50/60Hz 0.6A Output: 12V, 1.5A
Adapter 2	DVE	DSA-18PFG-12 FUS 120150	Input: 100-240V ~ 50/60Hz 0.6A Output: +12V, 1.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	GALTRONICS	02102140-05791-1	Dipole Antenna	I-PEX	4.44	4.37
2	GALTRONICS	02102140-05791-2	Dipole Antenna	I-PEX	5.13	5.37

Note: The EUT has two antennas (2TX, 2RX).

<For 2.4GHz>

For IEEE 802.11b/g/n mode:

Ant.1 and Ant.2 will transmit/receive the same signal simultaneously.


Ant.1 and Ant.2 can be used as transmitting/receiving antennas.

<For 5GHz>

For IEEE 802.11a/n/ac mode:

Ant.1 and Ant.2 will transmit/receive the same signal simultaneously.

Ant.1 and Ant.2 can be used as transmitting/receiving antennas.

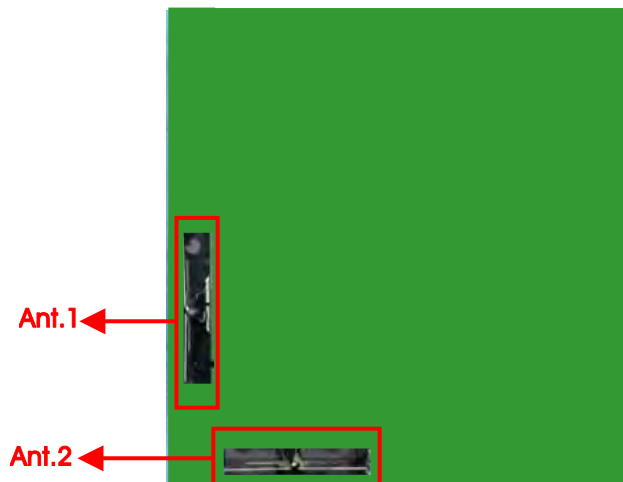

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
Power Spectral Density	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2

26dB&6dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
Band Edge Emission	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
Frequency Stability	Un-modulation		-	40	1+2

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link + Adapter 1

Mode 2. Normal Link + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Below 1G):

Mode 1. Normal Link + Adapter 1

Mode 2. Normal Link + Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Above 1G):

Mode 1. CTX

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Radiated Emission test (Below 1G):

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
NB	DELL	E6430	DoC
NB	DELL	M1330	DoC
Flash Disk3.0	TDK	TF30	DoC

For Test Site No: 03CH01-CB (Radiated Emission test (Above 1G):

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
Flash Disk3.0	TDK	TF30	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	MT7662 QA V1.0.3.2					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	18/17	1F/1F	1F/1E	13/13	23/23	13/13

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	MT7662 QA V1.0.3.2			
Frequency	5190 MHz	5230 MHz	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	13/13	1F/1F	0F/0F	13/13

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	MT7662 QA V1.0.3.2	
Frequency	5210 MHz	5775 MHz
MCS0/Nss1 VHT80	11/11	10/10

Power Parameters of IEEE 802.11a

Test Software Version	MT7662 QA V1.0.3.2					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	18/17	1E/1E	1D/1C	13/13	24/24	16/16

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1	1	100.00%	0.00	0.01
802.11ac MCS0/Nss1 VHT40	1	1	100.00%	0.00	0.01
802.11ac MCS0/Nss1 VHT80	1	1	100.00%	0.00	0.01
802.11a	1	1	100.00%	0.00	0.01

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

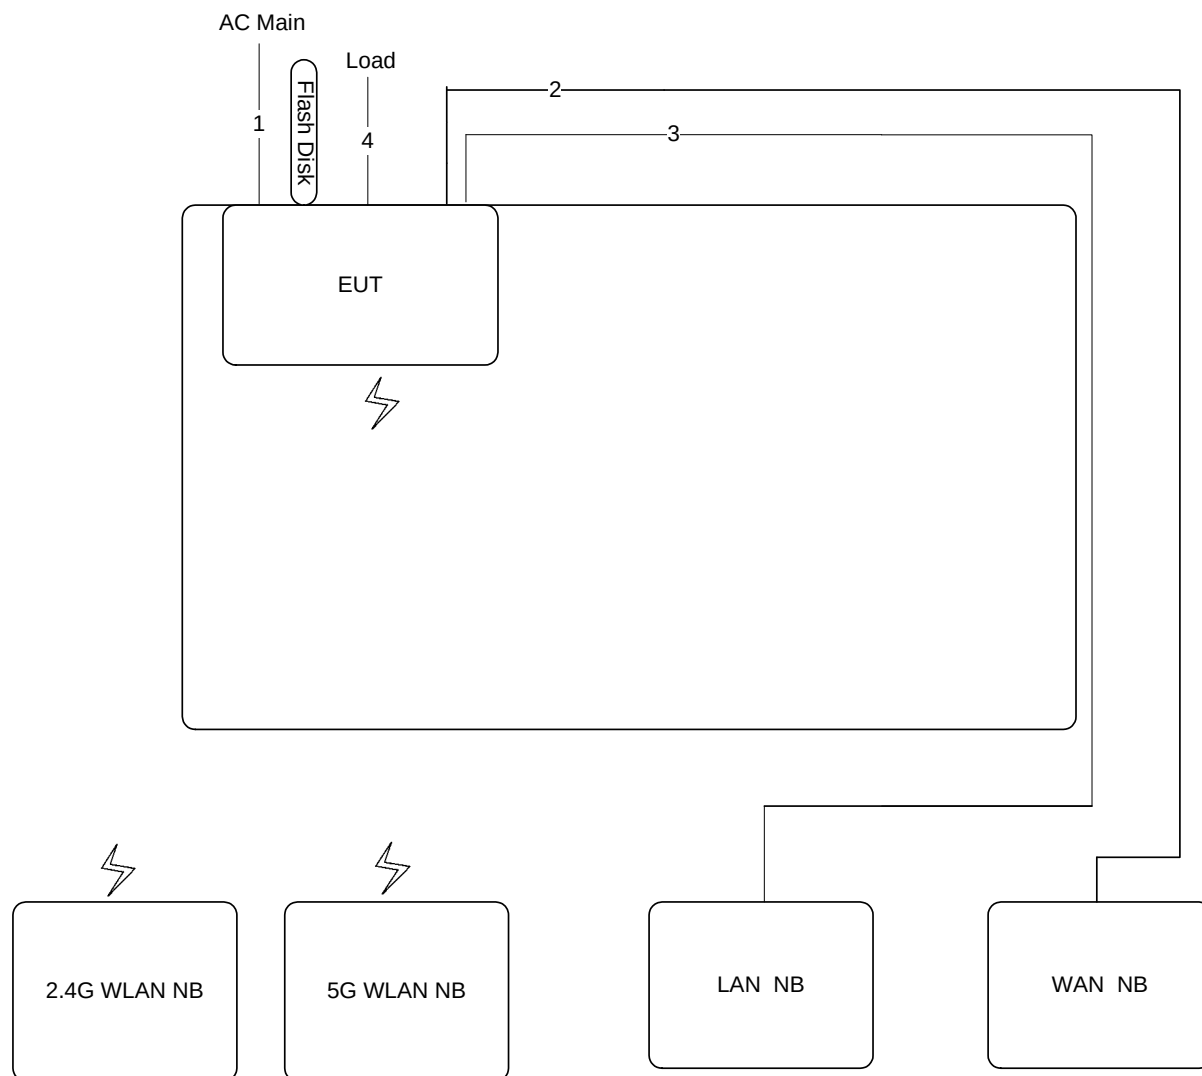

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.2m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable	No	1.5m	Load*3


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

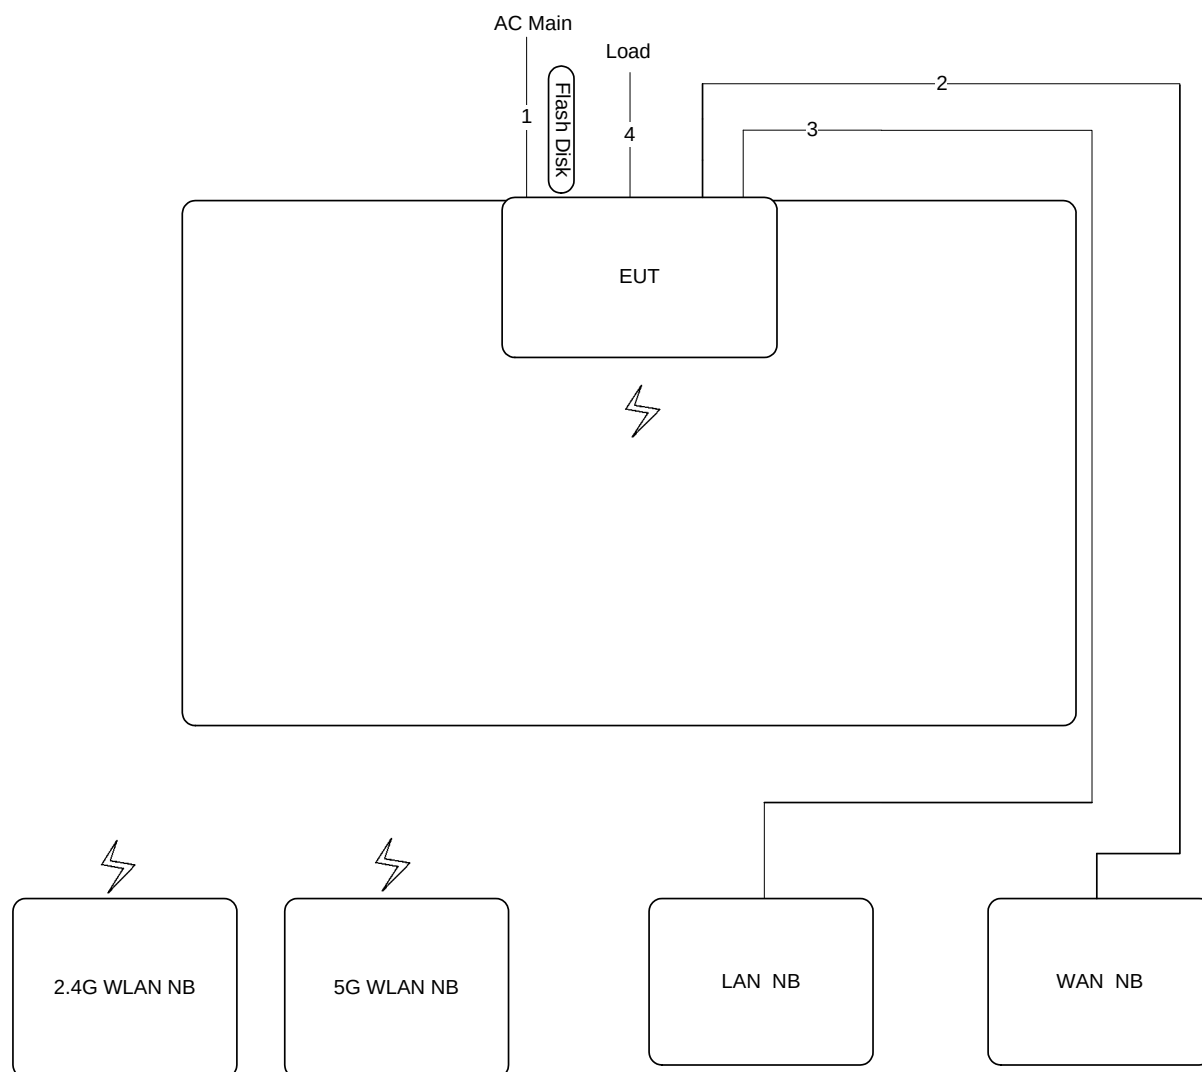

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable	No	1.5m	Load*3

Test Configuration: above 1GHz

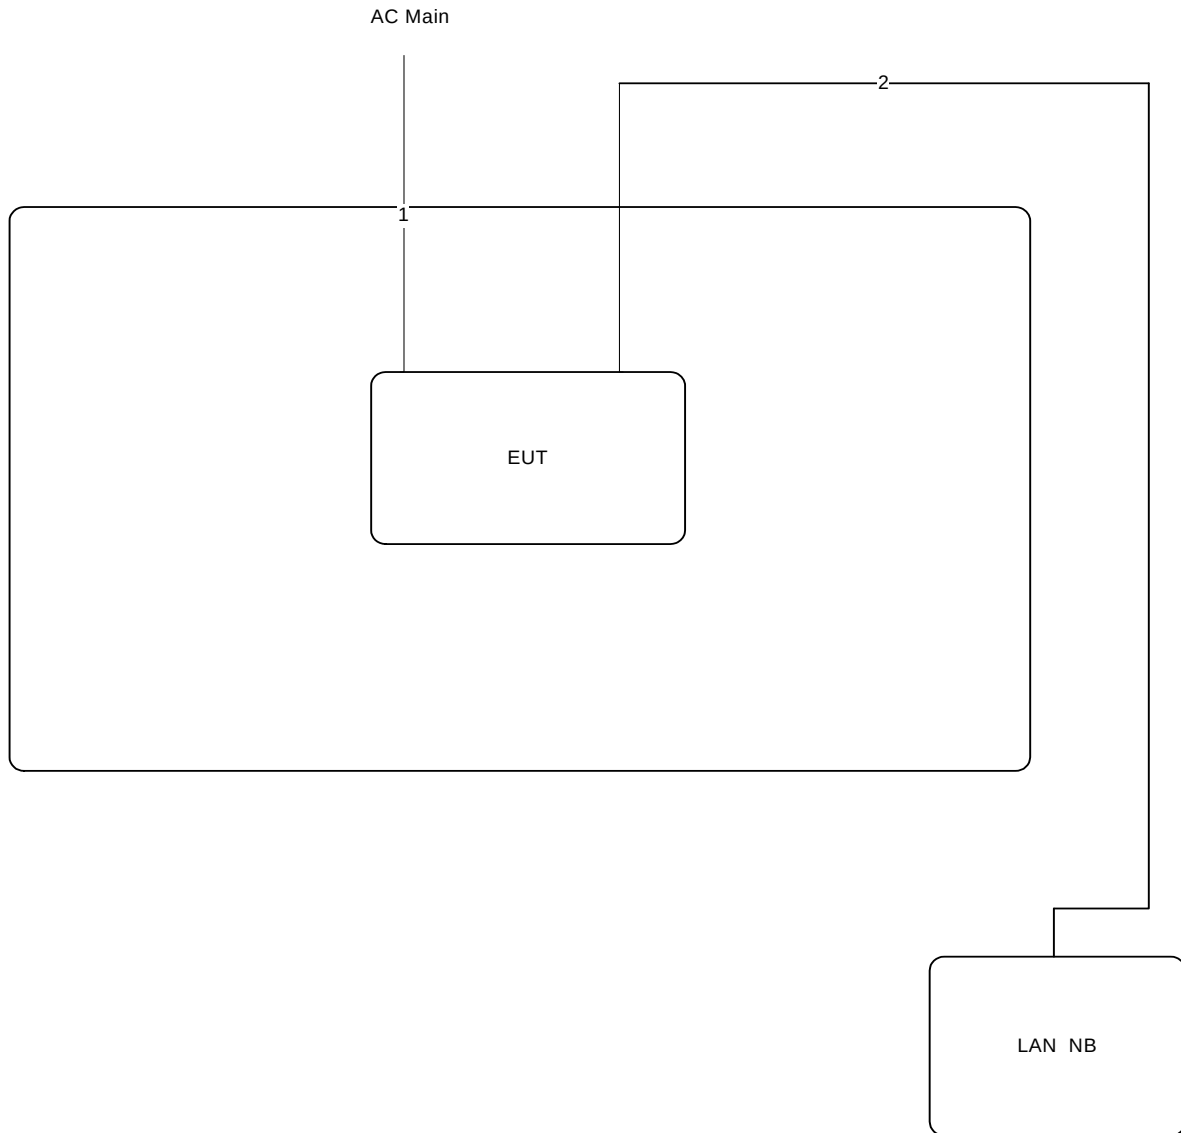

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

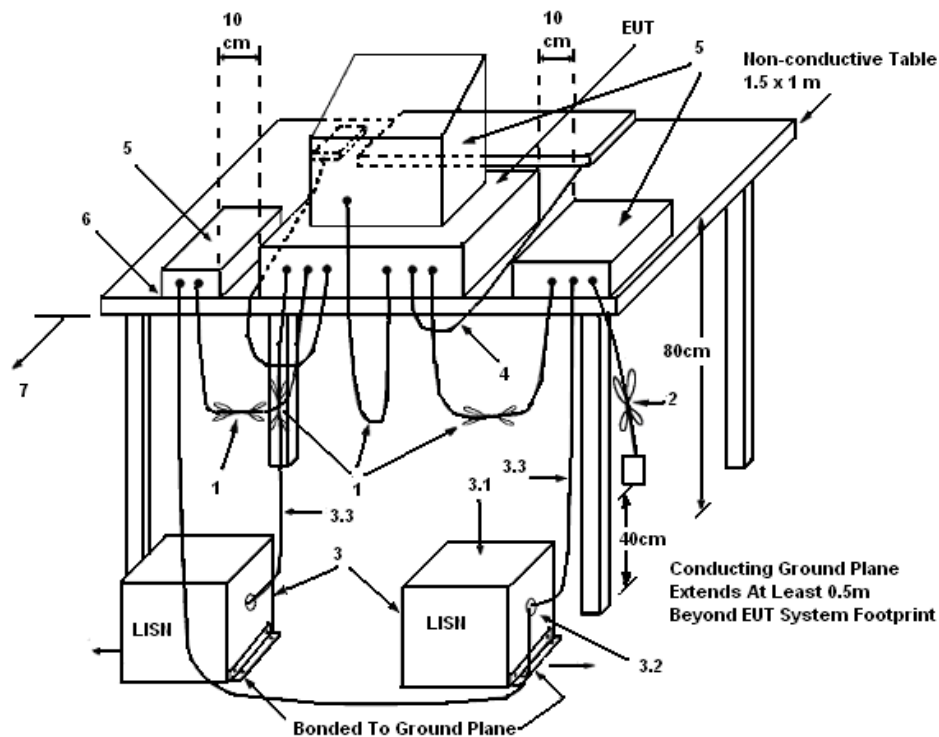

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

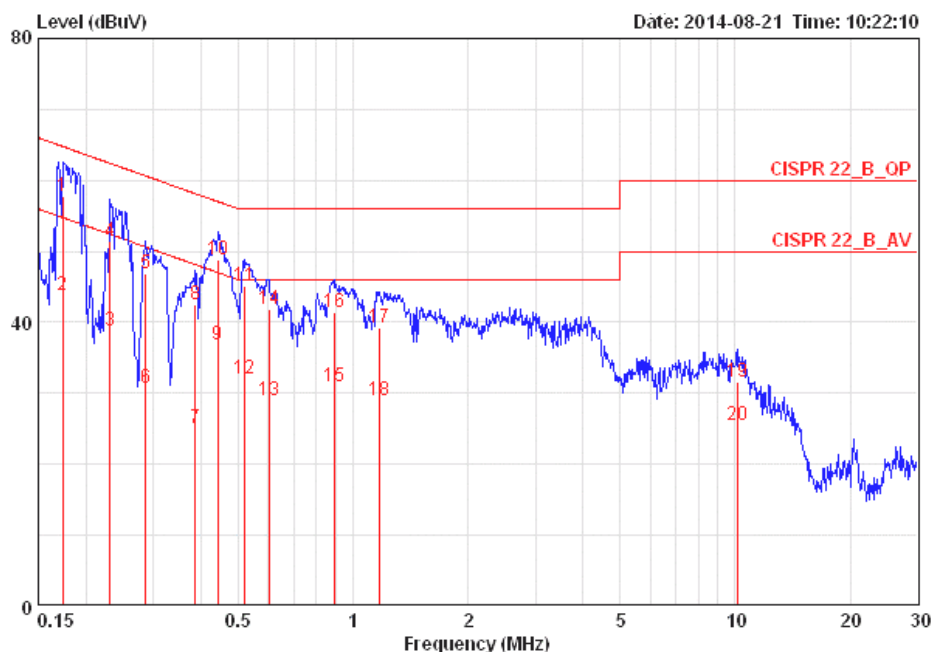

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.17399	57.83	-6.94	64.77	0.10	57.57	0.16	LINE	QP
2	0.17399	43.87	-10.90	54.77	0.10	43.61	0.16	LINE	AVERAGE
3	0.23162	38.88	-13.51	52.39	0.10	38.61	0.17	LINE	AVERAGE
4	0.23162	51.47	-10.92	62.39	0.10	51.20	0.17	LINE	QP
5	0.28630	46.85	-13.78	60.63	0.10	46.58	0.17	LINE	QP
6	0.28630	30.72	-19.91	50.63	0.10	30.45	0.17	LINE	AVERAGE
7	0.38724	25.16	-22.96	48.12	0.10	24.88	0.18	LINE	AVERAGE
8	0.38724	42.59	-15.53	58.12	0.10	42.31	0.18	LINE	QP
9	0.44208	36.76	-10.27	47.02	0.10	36.47	0.18	LINE	AVERAGE
10	0.44208	48.85	-8.18	57.02	0.10	48.56	0.18	LINE	QP
11	0.51824	45.06	-10.94	56.00	0.11	44.77	0.19	LINE	QP
12	0.51824	32.02	-13.98	46.00	0.11	31.73	0.19	LINE	AVERAGE
13	0.60112	29.08	-16.92	46.00	0.11	28.78	0.19	LINE	AVERAGE
14	0.60112	41.85	-14.15	56.00	0.11	41.55	0.19	LINE	QP
15	0.88969	30.98	-15.02	46.00	0.13	30.66	0.20	LINE	AVERAGE
16	0.88969	41.40	-14.60	56.00	0.13	41.08	0.20	LINE	QP
17	1.172	39.28	-16.72	56.00	0.14	38.93	0.21	LINE	QP
18	1.172	29.05	-16.95	46.00	0.14	28.70	0.21	LINE	AVERAGE
19	10.125	31.55	-28.45	60.00	0.34	30.82	0.38	LINE	QP
20	10.125	25.55	-24.45	50.00	0.34	24.82	0.38	LINE	AVERAGE

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

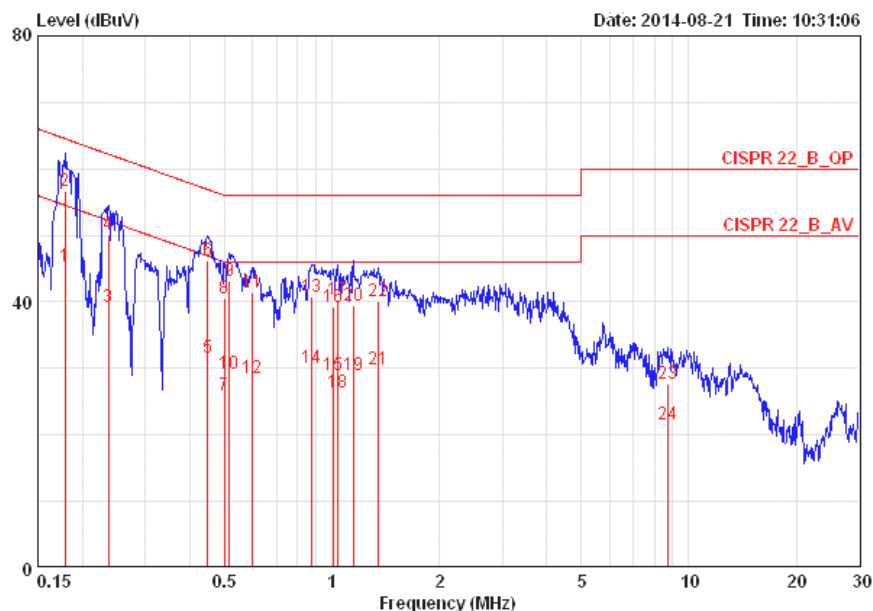

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1 @	0.17866	45.31	-9.24	54.55	0.09	45.06	0.16	NEUTRAL	AVERAGE
2 @	0.17866	56.67	-7.88	64.55	0.09	56.42	0.16	NEUTRAL	QP
3	0.23626	39.30	-12.93	52.23	0.09	39.04	0.17	NEUTRAL	AVERAGE
4	0.23626	50.03	-12.20	62.23	0.09	49.77	0.17	NEUTRAL	QP
5	0.44916	31.60	-15.29	46.89	0.09	31.32	0.18	NEUTRAL	AVERAGE
6	0.44916	46.14	-10.75	56.89	0.09	45.86	0.18	NEUTRAL	QP
7	0.49937	25.99	-20.02	46.01	0.10	25.71	0.18	NEUTRAL	AVERAGE
8	0.49937	40.49	-15.52	56.01	0.10	40.21	0.18	NEUTRAL	QP
9	0.51550	43.23	-12.77	56.00	0.10	42.95	0.19	NEUTRAL	QP
10	0.51550	29.12	-16.88	46.00	0.10	28.84	0.19	NEUTRAL	AVERAGE
11	0.59794	41.50	-14.50	56.00	0.10	41.21	0.19	NEUTRAL	QP
12	0.59794	28.50	-17.50	46.00	0.10	28.21	0.19	NEUTRAL	AVERAGE
13	0.88031	40.83	-15.17	56.00	0.12	40.52	0.20	NEUTRAL	QP
14	0.88031	30.18	-15.82	46.00	0.12	29.87	0.20	NEUTRAL	AVERAGE
15	1.010	28.95	-17.05	46.00	0.12	28.63	0.20	NEUTRAL	AVERAGE
16	1.010	39.20	-16.80	56.00	0.12	38.88	0.20	NEUTRAL	QP
17	1.037	40.33	-15.67	56.00	0.12	40.01	0.20	NEUTRAL	QP
18	1.037	26.27	-19.73	46.00	0.12	25.95	0.20	NEUTRAL	AVERAGE
19	1.147	28.94	-17.06	46.00	0.12	28.61	0.21	NEUTRAL	AVERAGE
20	1.147	39.43	-16.57	56.00	0.12	39.10	0.21	NEUTRAL	QP
21	1.352	29.79	-16.21	46.00	0.13	29.44	0.22	NEUTRAL	AVERAGE
22	1.352	40.05	-15.95	56.00	0.13	39.70	0.22	NEUTRAL	QP
23	8.729	27.78	-32.22	60.00	0.30	27.11	0.37	NEUTRAL	QP
24	8.729	21.58	-28.42	50.00	0.30	20.91	0.37	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.64	17.76
40	5200 MHz	41.28	25.44
48	5240 MHz	42.88	27.68

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	66.24	36.80
46	5230 MHz	75.52	46.72

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	81.28	74.88

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant.1 + Ant.2


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.52	17.12
40	5200 MHz	35.84	22.88
48	5240 MHz	34.24	21.76

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2 / 5180 MHz

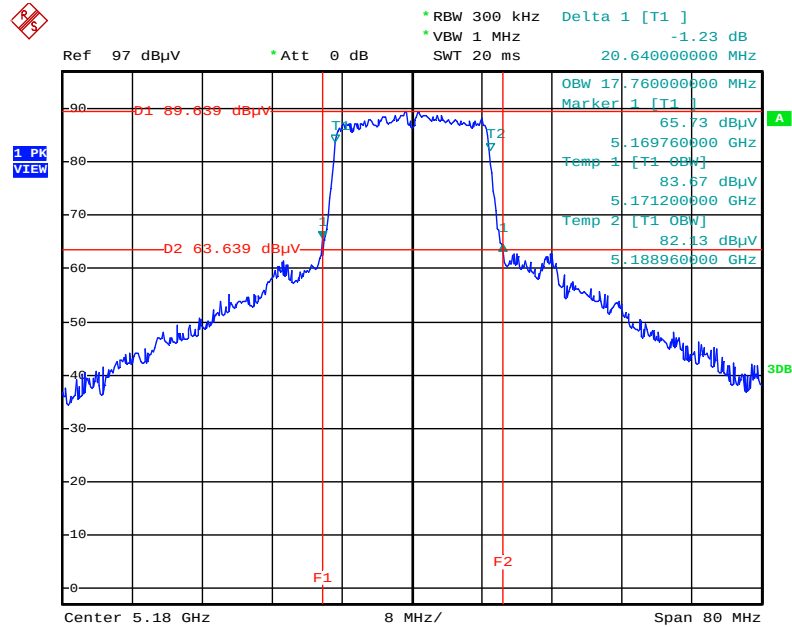


Date: 24.SEP.2014 22:19:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2 / 5200 MHz

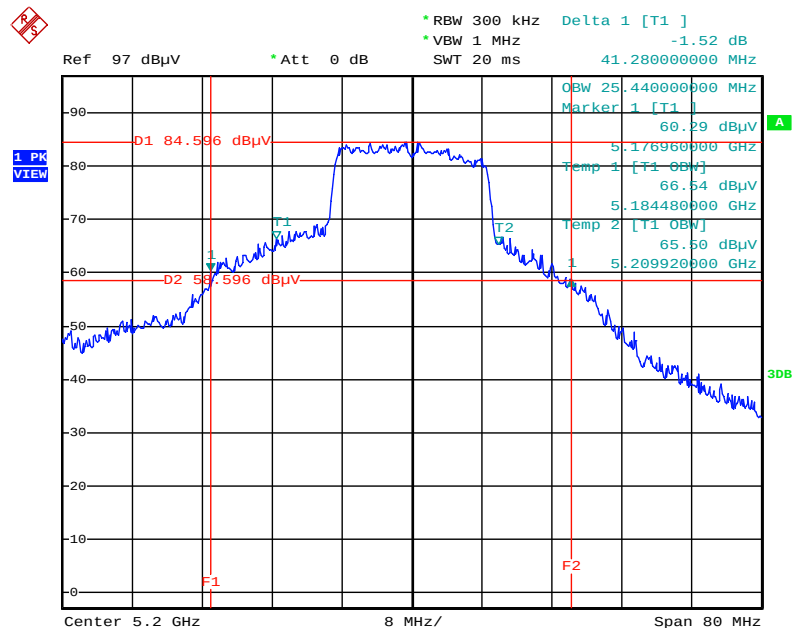


Date: 24.SEP.2014 22:21:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2 / 5240 MHz

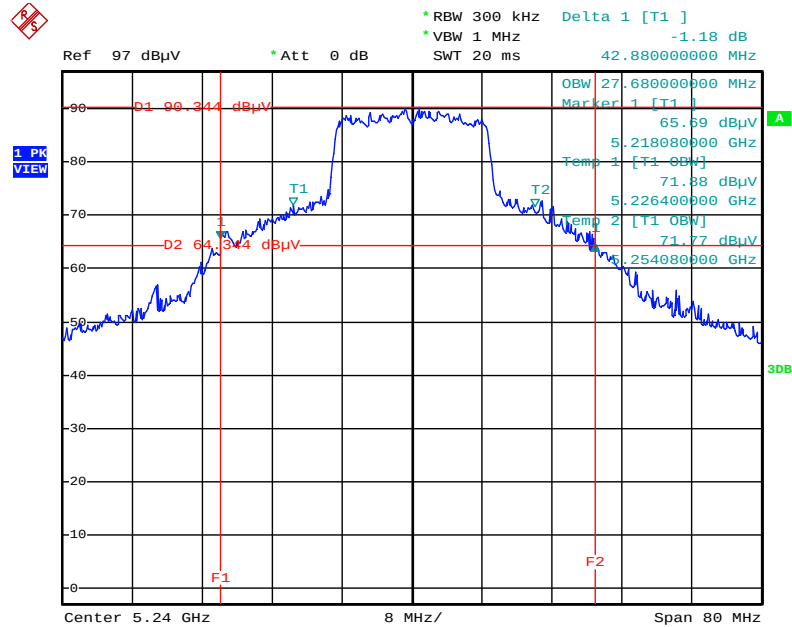


Date: 24.SEP.2014 22:23:23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2 / 5190 MHz

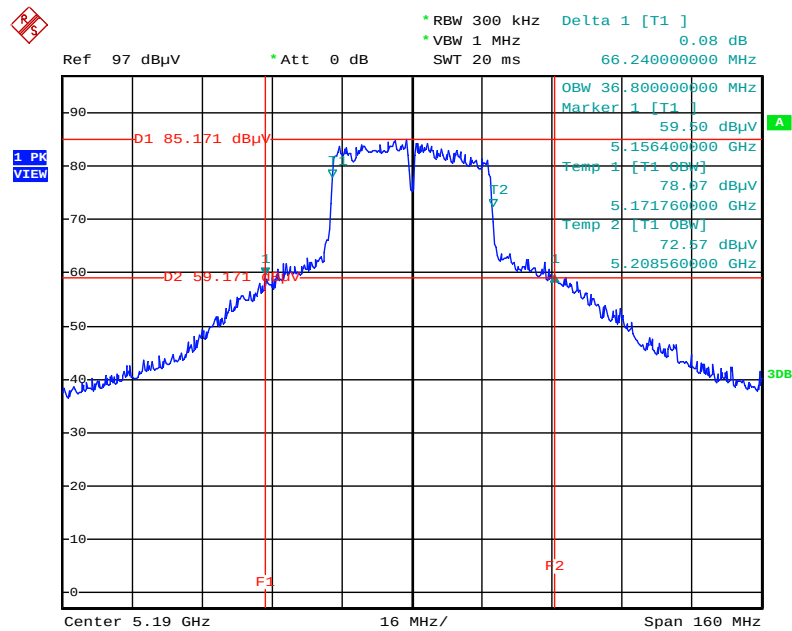


Date: 24.SEP.2014 22:27:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2 / 5230 MHz

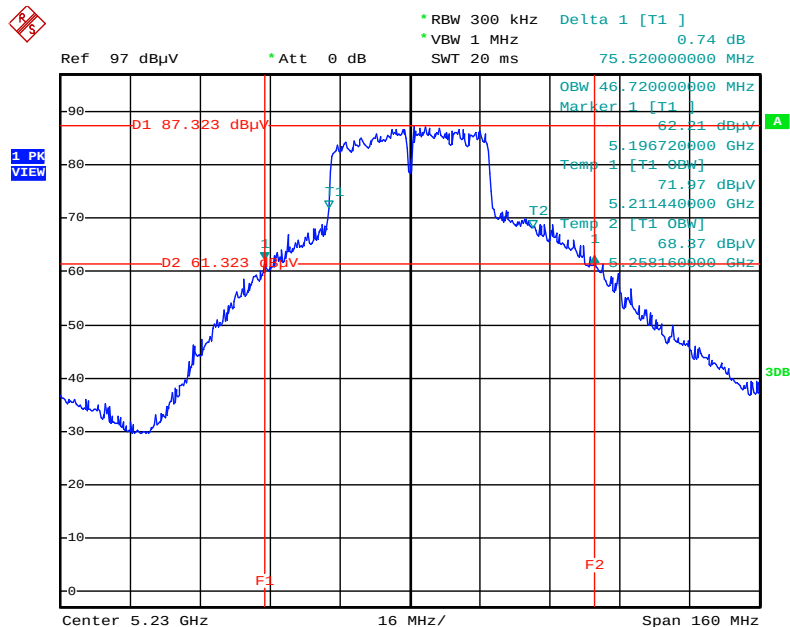


Date: 24.SEP.2014 22:29:48

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2 / 5210 MHz

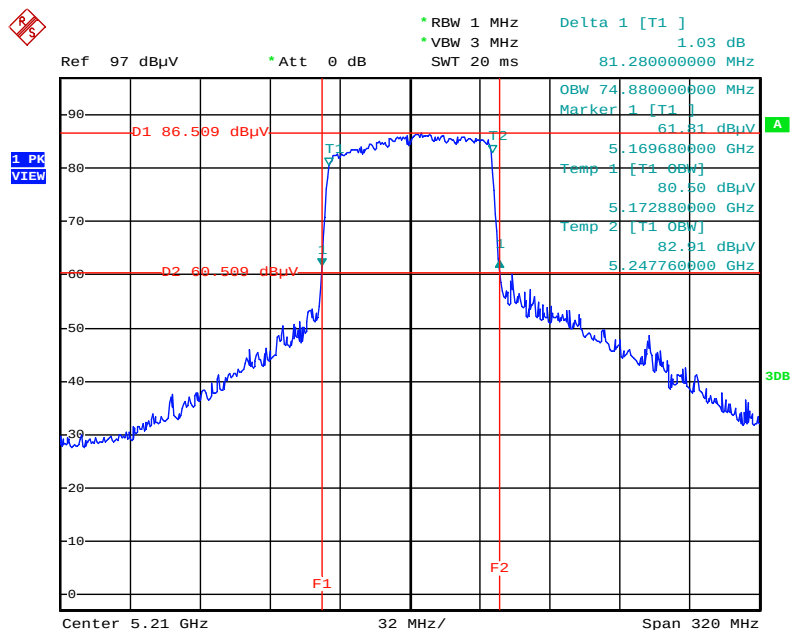


Date: 24.SEP.2014 22:13:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant.2 / 5180 MHz

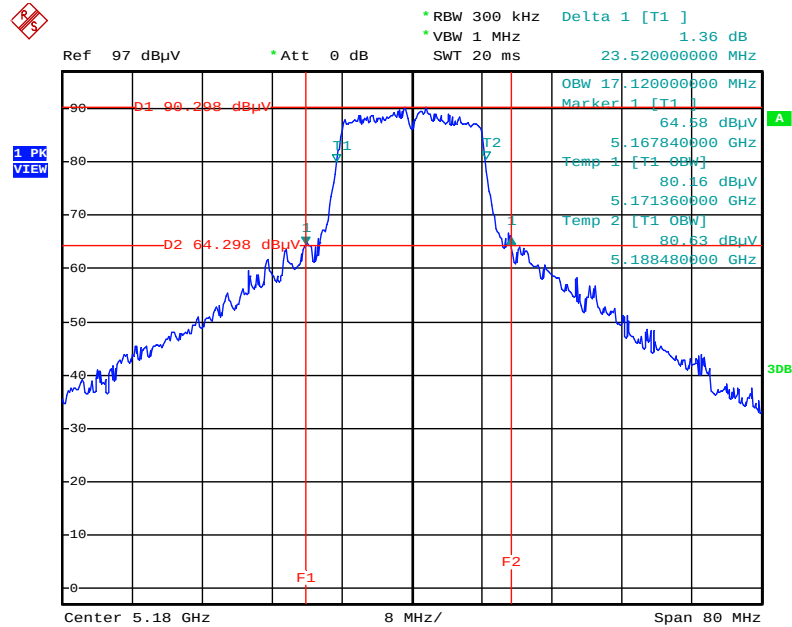


Date: 24.SEP.2014 22:15:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant.2 / 5200 MHz

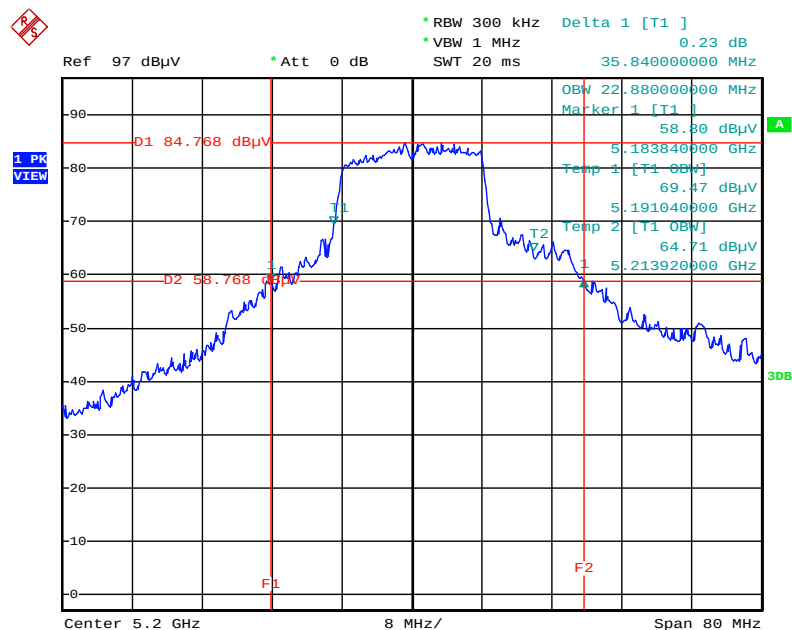

Date: 24.SEP.2014 22:15:55

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant.2 / 5240 MHz

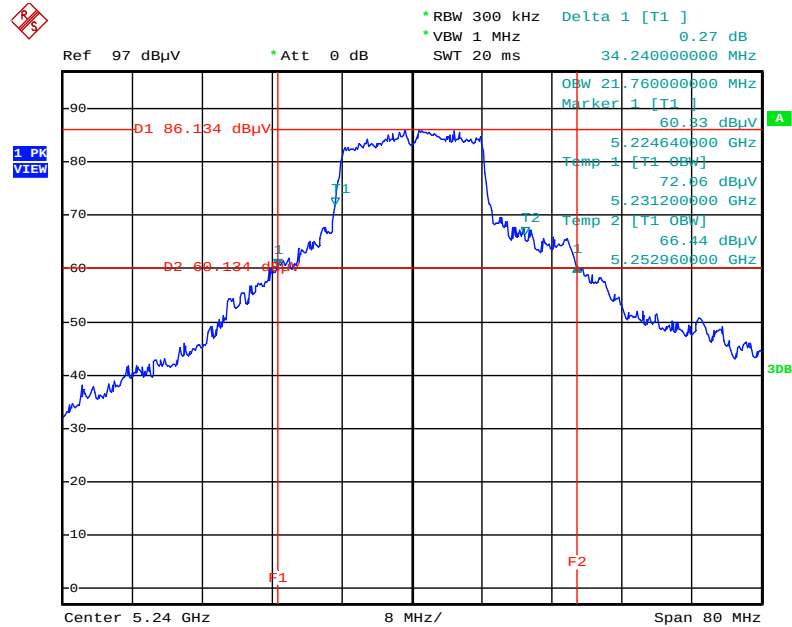

Date: 24.SEP.2014 22:16:39

4.3. 6dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n/ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.68	17.76	500	Complies
157	5785 MHz	17.68	31.44	500	Complies
165	5825 MHz	17.68	17.76	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.68	36.16	500	Complies
159	5795 MHz	36.16	36.16	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	74.56	75.52	500	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.64	16.64	500	Complies
157	5785 MHz	16.40	30.48	500	Complies
165	5825 MHz	16.40	18.24	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2 / 5785MHz

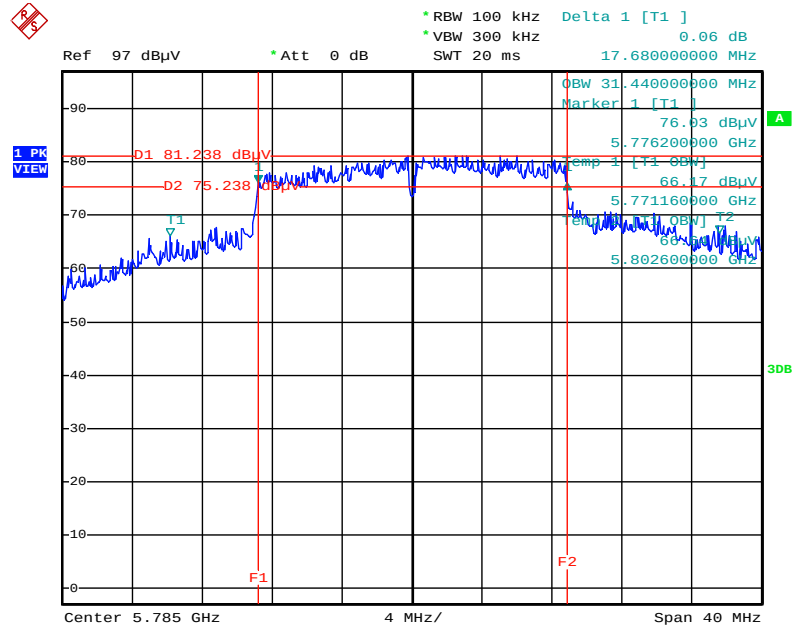


Date: 24.SEP.2014 22:07:22

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2 / 5755MHz

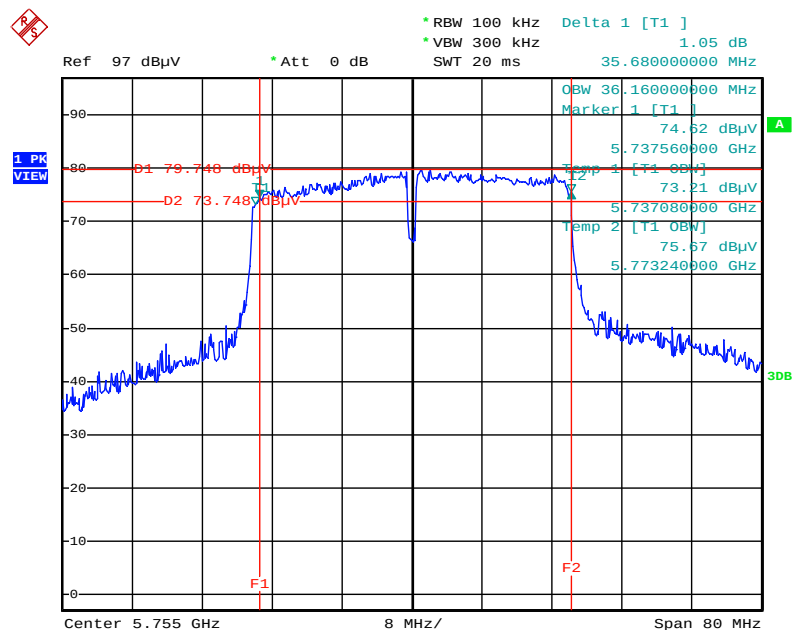


Date: 24.SEP.2014 22:09:53

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2 / 5775 MHz

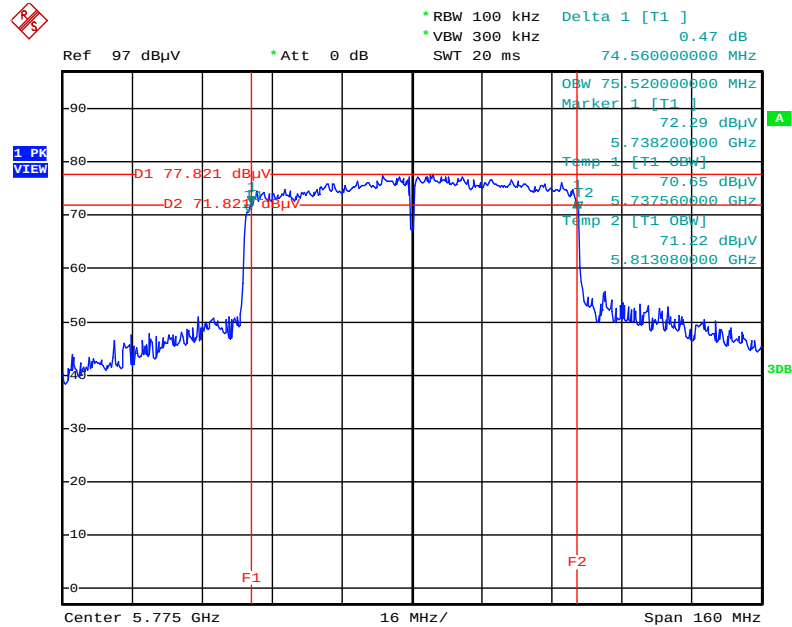

Date: 24.SEP.2014 22:12:15

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant.2 / 5785 MHz

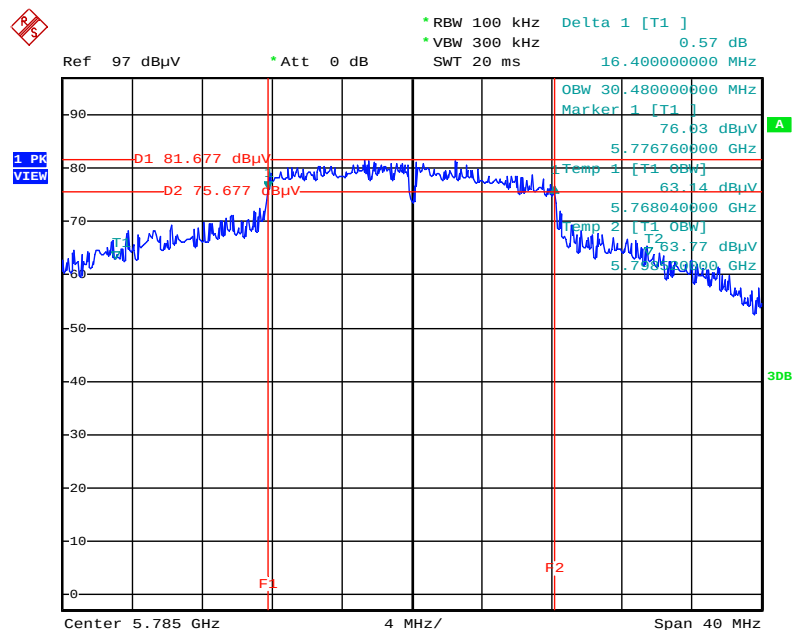

Date: 24.SEP.2014 22:04:10

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725~5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout

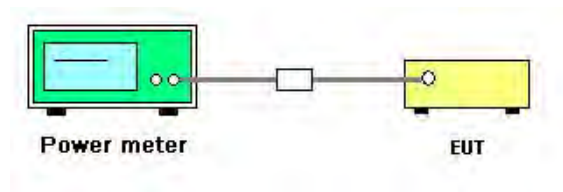

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Sep. 24, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
36	5180 MHz	20.32	20.47	23.41	30.00	Complies
40	5200 MHz	23.85	24.13	27.00	30.00	Complies
48	5240 MHz	23.78	23.99	26.90	30.00	Complies
149	5745 MHz	20.69	21.13	23.93	30.00	Complies
157	5785 MHz	25.83	26.21	29.03	30.00	Complies
165	5825 MHz	21.07	21.02	24.06	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
38	5190 MHz	23.38	18.16	24.52	30.00	Complies
46	5230 MHz	23.89	23.98	26.95	30.00	Complies
151	5755 MHz	18.74	19.21	21.99	30.00	Complies
159	5795 MHz	21.01	21.31	24.17	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
42	5210 MHz	17.96	18.29	21.14	30.00	Complies
155	5775 MHz	19.98	20.37	23.19	30.00	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a
Test Date	Sep. 24, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
36	5180 MHz	19.88	20.12	23.01	30.00	Complies
40	5200 MHz	23.62	23.82	26.73	30.00	Complies
48	5240 MHz	22.66	23.43	26.07	30.00	Complies
149	5745 MHz	21.16	21.03	24.11	30.00	Complies
157	5785 MHz	25.53	25.14	28.35	30.00	Complies
165	5825 MHz	22.76	22.42	25.60	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Range	Power Spectral Density limit
5.15~5.25 GHz	17 dBm/MHz
5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

For 5.15~5.25 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

For 5.725~5.85 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$RBW \geq 1/T$
VBW	$VBW \geq 3 RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

For 5.15~5.25 GHz


1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

For 5.725~5.85 GHz


1. Test procedures refer KDB662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The measured result of PSD level must add $10\log(500\text{kHz/RBW})$ and the final result should ≤ 30 dBm.

4.5.4. Test Setup Layout

For 5.15~5.25 GHz

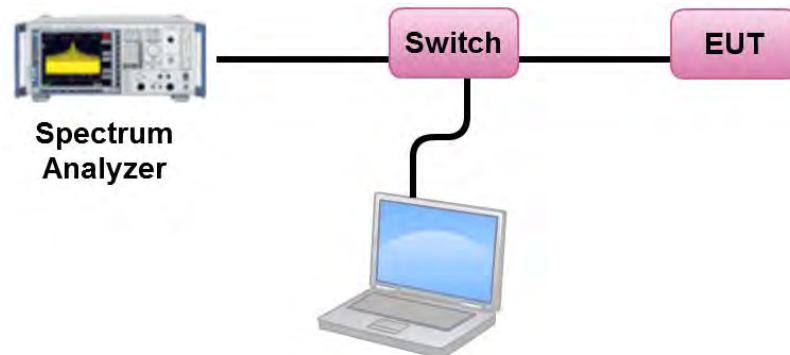

For 5.725~5.85 GHz

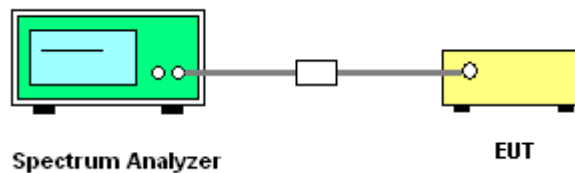

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Sep. 24, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.78	14.74	Complies
40	5200 MHz	14.50	14.74	Complies
48	5240 MHz	14.35	14.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Band2 Limit = 17-(8.26-6)=14.74dBm/MHz

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor 3kHz to 500kHz	Total Power Density	Power Density Limit	Result
		Ant.1	Ant.2	Total		dBm/500kHz		
149	5745 MHz	-7.74	-6.89	-4.28	22.22	17.94	27.74	Complies
157	5785 MHz	-2.32	-3.10	0.32	22.22	22.54	27.74	Complies
165	5825 MHz	-7.52	-6.80	-4.13	22.22	18.09	27.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Power Density Limit = 30-(8.26-6)=27.74dBm/500kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	9.18	14.74	Complies
46	5230 MHz	11.08	14.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Band2 Limit = 17-(8.26-6)=14.74dBm/MHz

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant.1	Ant.2	Total		3kHz to 500kHz	dBm/500kHz	
151	5755 MHz	-10.51	-10.99	-7.73	22.22	14.49	27.74	Complies
159	5795 MHz	-10.54	-7.80	-5.95	22.22	16.27	27.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Power Density Limit = 30-(8.26-6)=27.74dBm/500kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	2.55	14.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Band2 Limit = 17-(8.26-6)=14.74dBm/MHz

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant.1	Ant.2	Total	3kHz to 500kHz	dBm/500kHz		
155	5775 MHz	-12.32	-13.61	-9.91	22.22	12.31	27.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Power Density Limit = 30-(8.26-6)=27.74dBm/500kHz

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a
Test Date	Sep. 24, 2014		

Configuration IEEE 802.11a / Ant.1 + Ant.2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	9.75	14.74	Complies
40	5200 MHz	14.55	14.74	Complies
48	5240 MHz	14.39	14.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Band2 Limit = $17 - (8.26 - 6) = 14.74\text{dBm/MHz}$


Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant.1	Ant.2	Total	3kHz to 500kHz	dBm/500kHz		
149	5745 MHz	-7.50	-8.07	-4.77	22.22	17.45	27.74	Complies
157	5785 MHz	-3.35	-2.46	0.13	22.22	22.35	27.74	Complies
165	5825 MHz	-6.10	-6.44	-3.26	22.22	18.96	27.74	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.26\text{dBi} > 6\text{dBi}$, So Power Density Limit = $30 - (8.26 - 6) = 27.74\text{dBm/500kHz}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2 / 5200 MHz

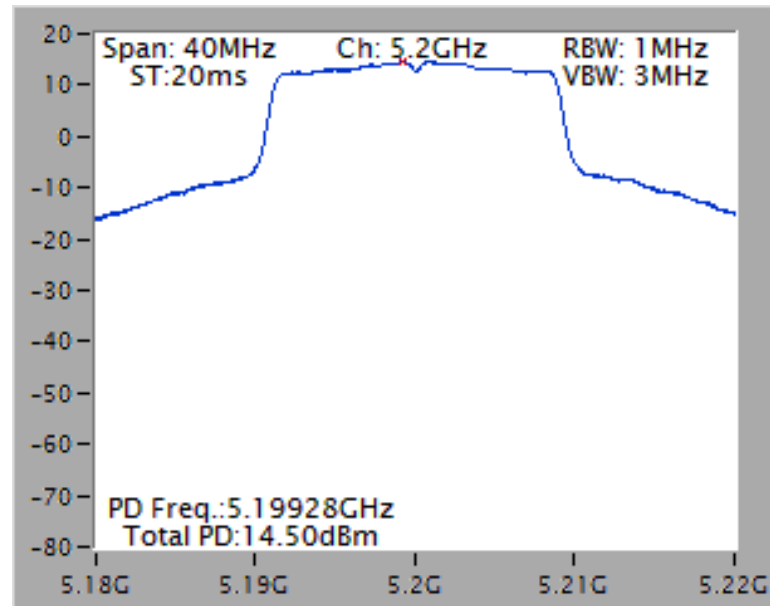


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 / 5785 MHz

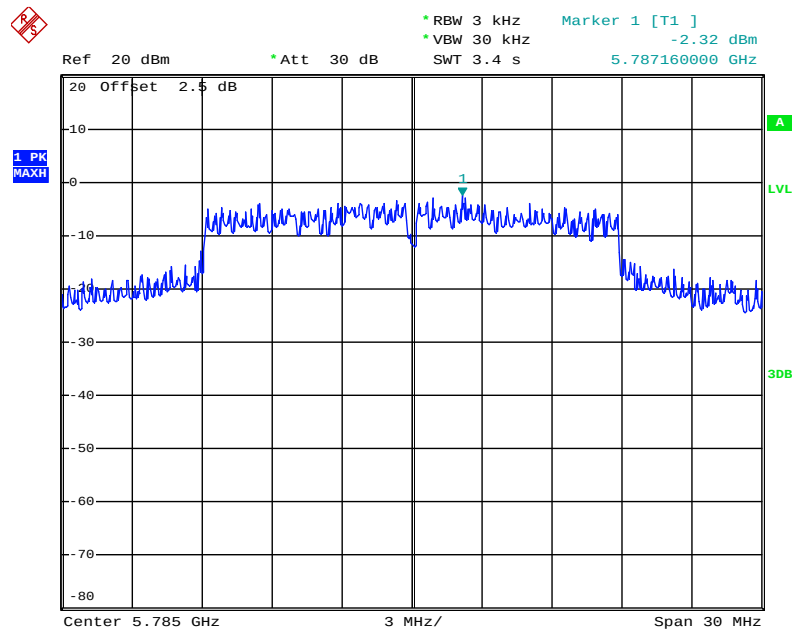


Date: 24.SEP.2014 21:38:20

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.2 / 5785 MHz

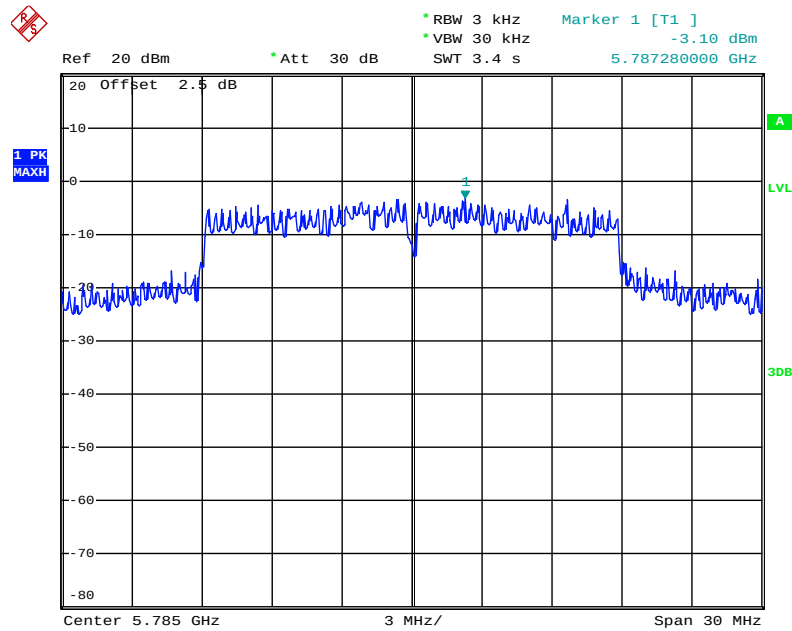


Date: 24.SEP.2014 21:39:03

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2 / 5230 MHz

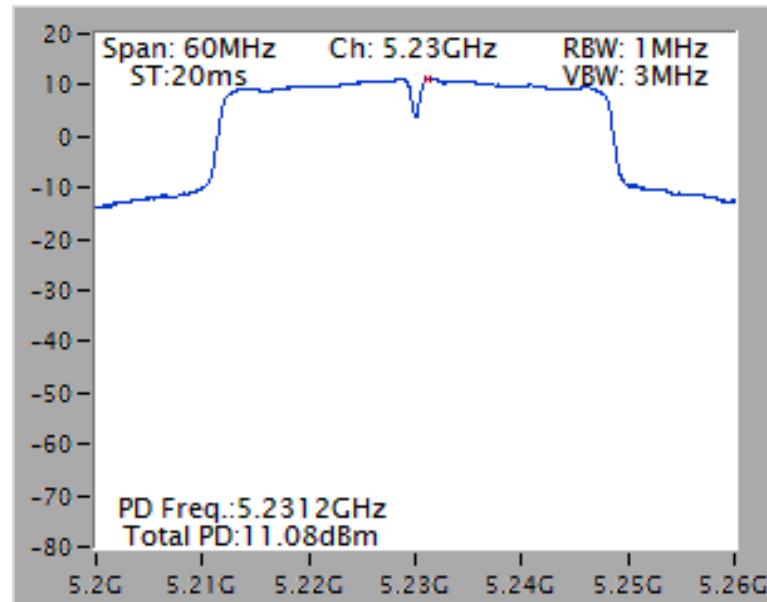


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 / 5795 MHz

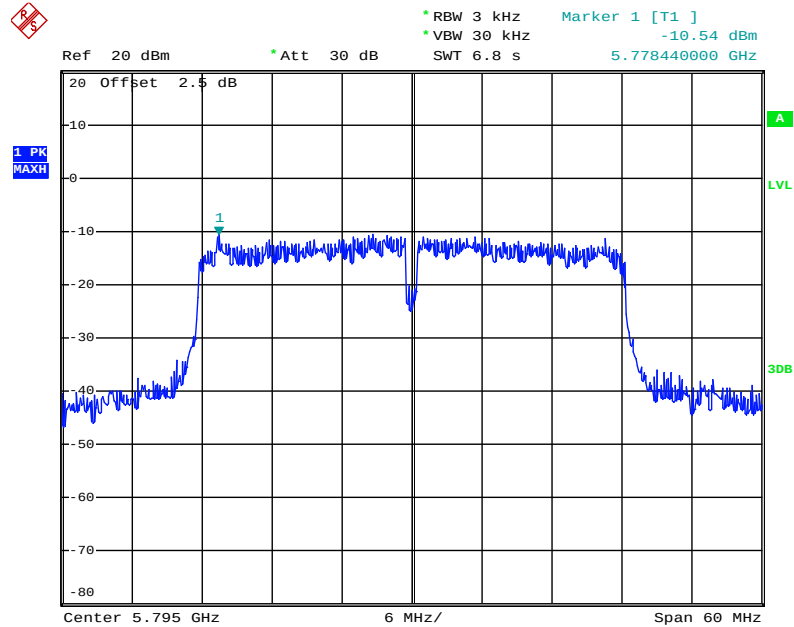


Date: 24.SEP.2014 21:45:18

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.2 / 5795 MHz

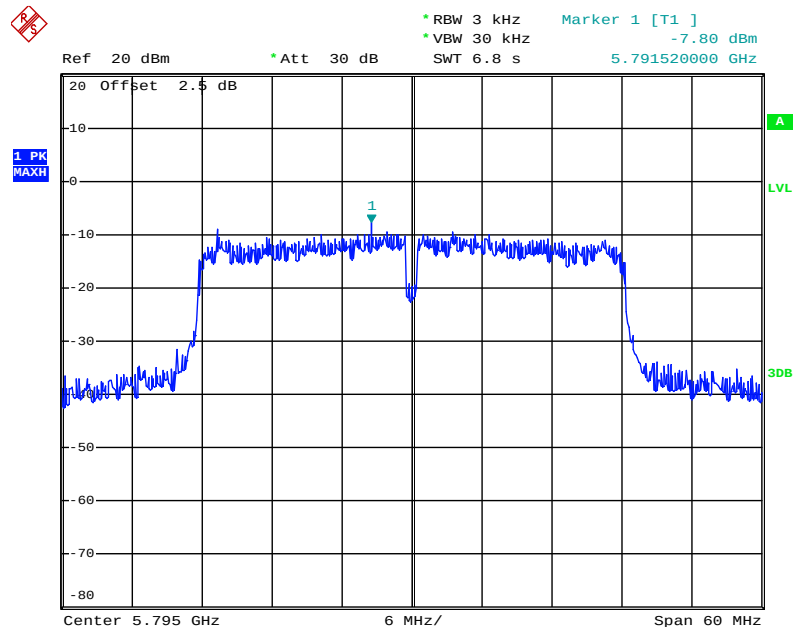


Date: 24.SEP.2014 21:44:32

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2 / 5210 MHz

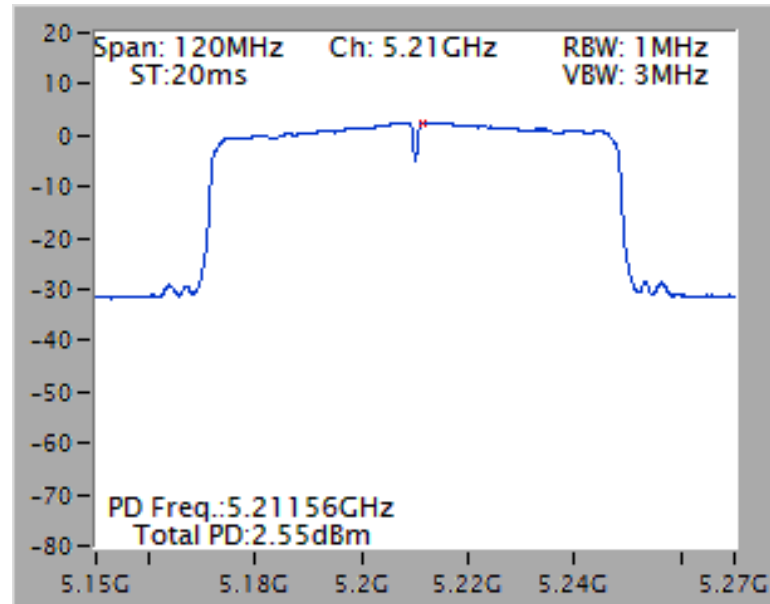


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 / 5775 MHz

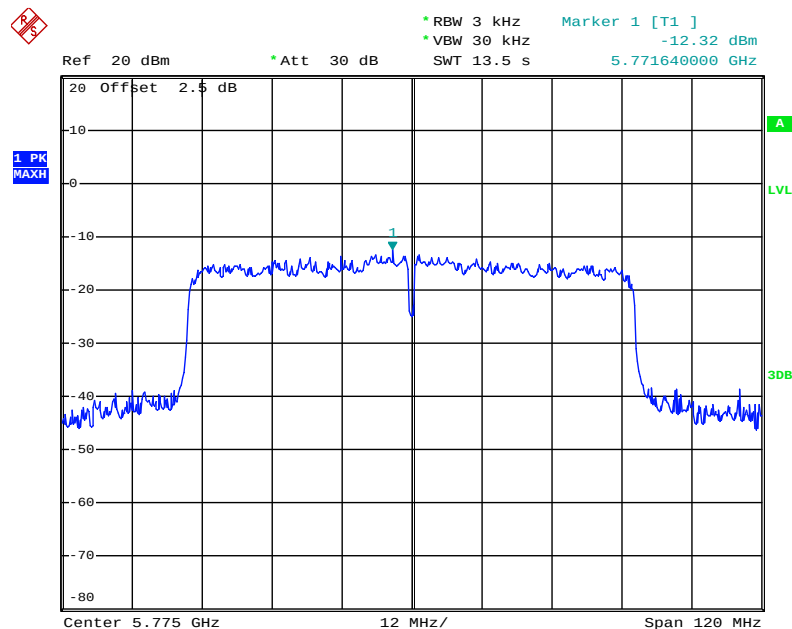


Date: 24.SEP.2014 21:47:23

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.2 / 5775 MHz

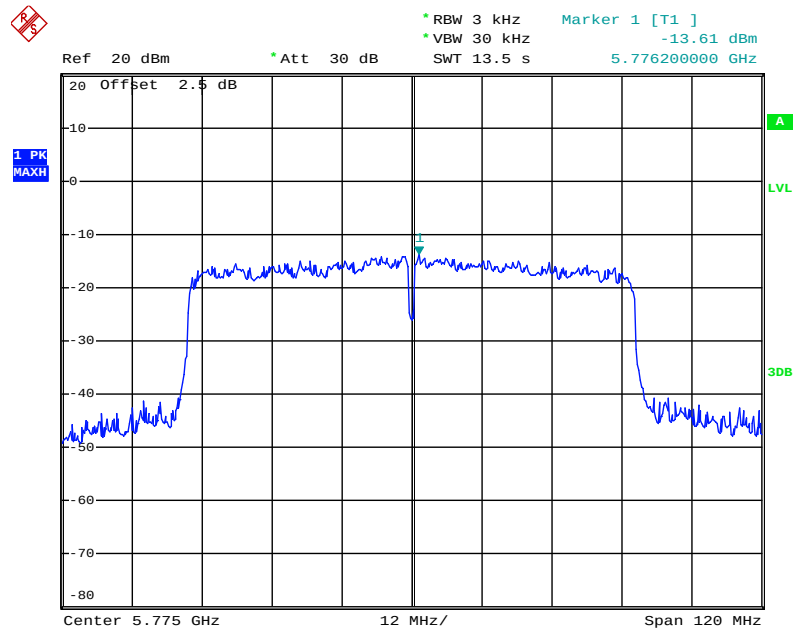


Date: 24.SEP.2014 21:48:16

Power Density Plot on Configuration IEEE 802.11a / Ant.1 + Ant.2 / 5200 MHz

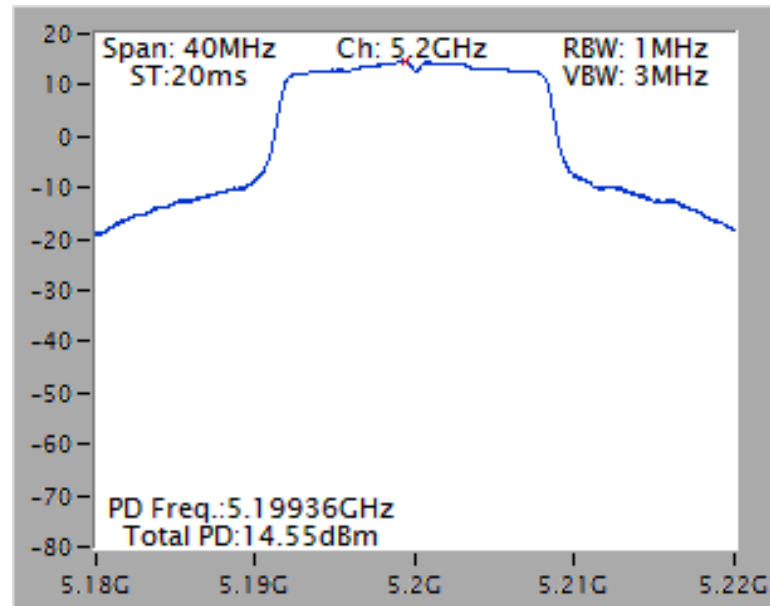


Power Density Plot on Configuration IEEE 802.11a / Ant.1 / 5785 MHz

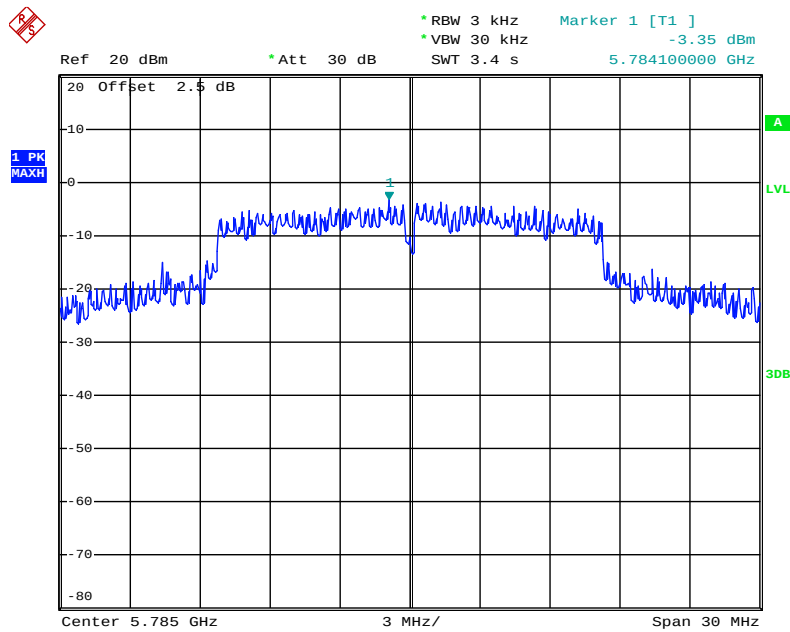

Date: 24.SEP.2014 21:32:55

Power Density Plot on Configuration IEEE 802.11a / Ant.2 / 5785 MHz

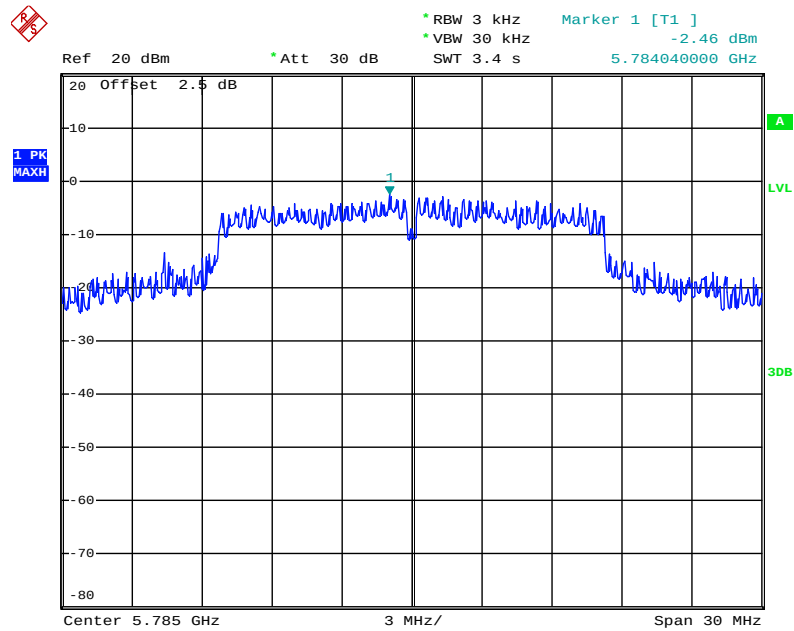

Date: 24.SEP.2014 21:32:03

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

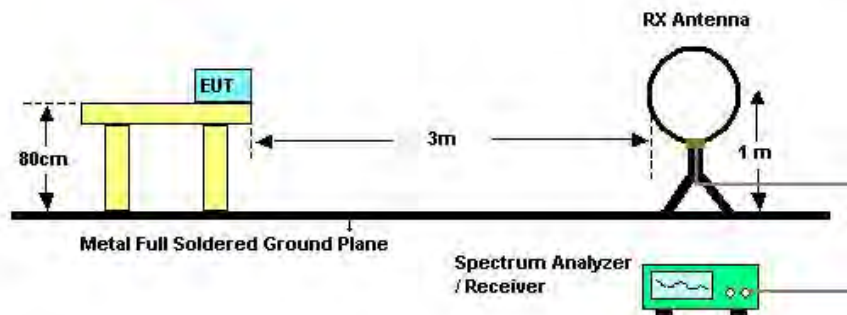

For Radiated Emissions: 30MHz~1GHz

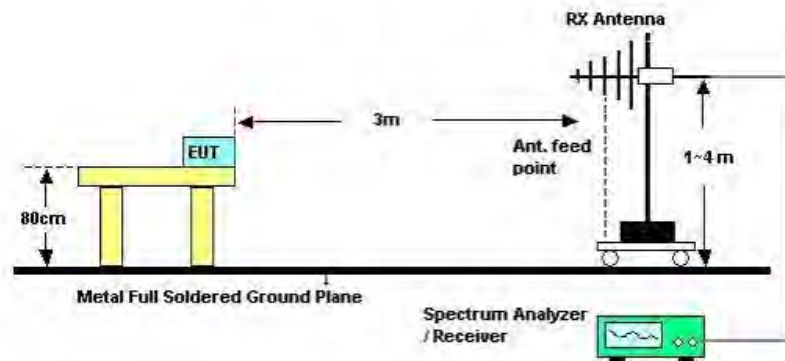

For Radiated Emissions: Above 1GHz

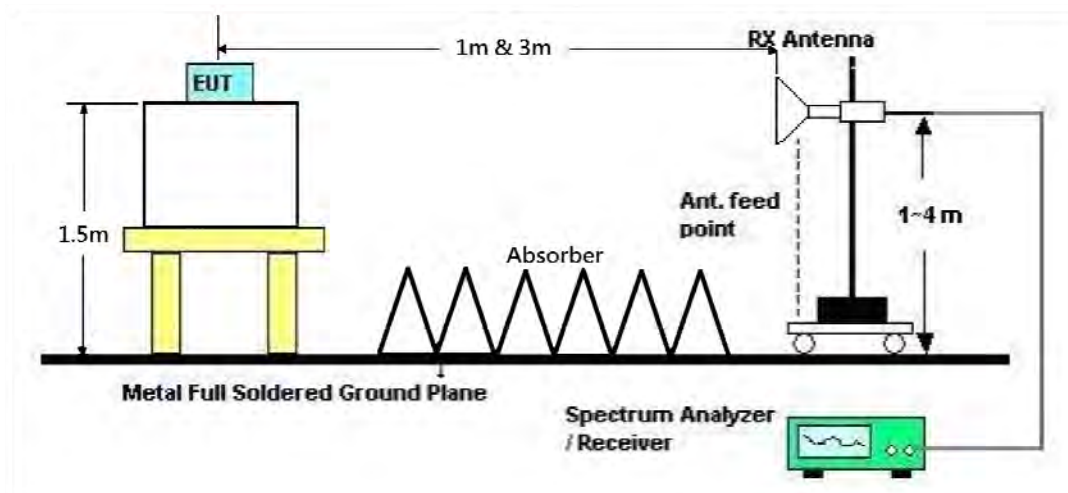

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	Normal Link
Test Date	Aug. 28, 2014	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

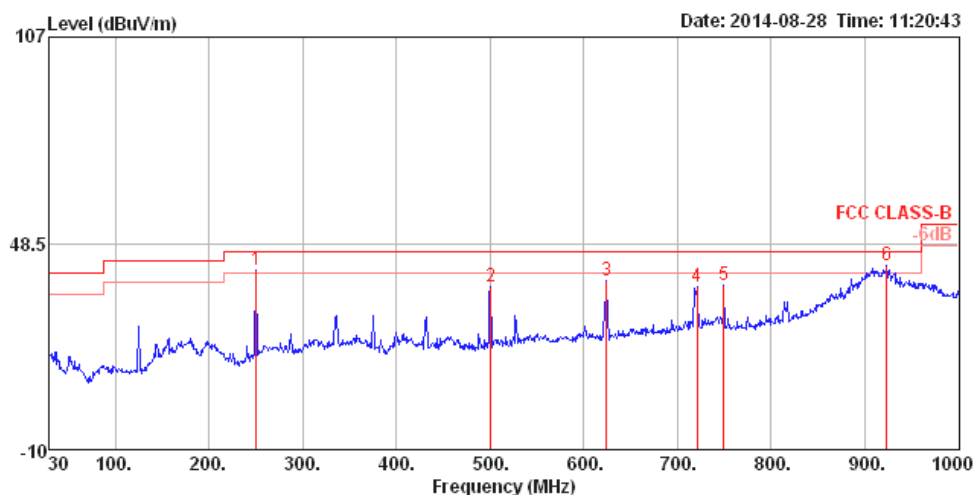

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	250.19	41.08	46.00	-4.92	58.76	1.90	11.91	31.49	150	105	HORIZONTAL Peak
2	500.45	36.21	46.00	-9.79	47.88	2.82	16.92	31.41	100	319	HORIZONTAL Peak
3	624.61	37.89	46.00	-8.11	47.50	3.18	18.61	31.40	125	242	HORIZONTAL Peak
4	720.64	36.27	46.00	-9.73	44.76	3.45	19.30	31.24	100	214	HORIZONTAL Peak
5	749.74	36.45	46.00	-9.55	44.60	3.53	19.69	31.37	150	36	HORIZONTAL Peak
6	923.37	42.25	46.00	-3.75	48.72	4.01	20.68	31.16	125	275	HORIZONTAL Peak

Vertical

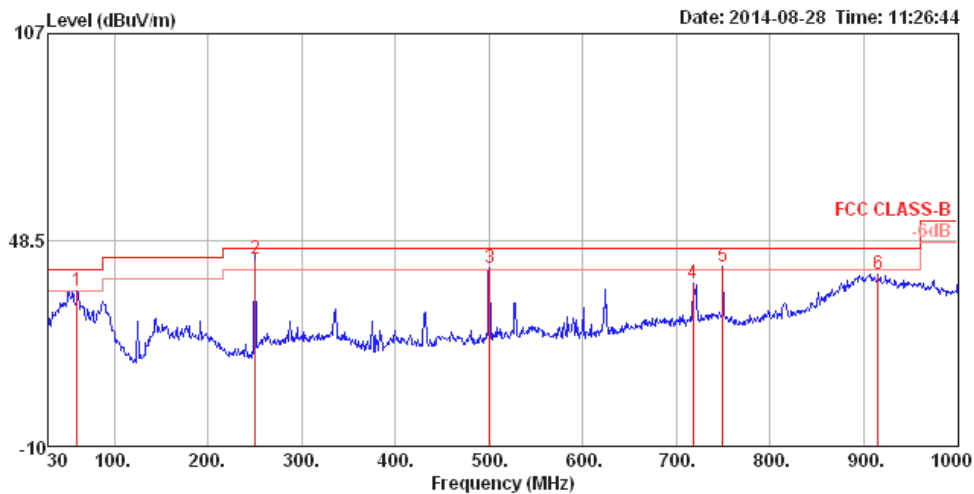

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	60.07	34.08	40.00	-5.92	60.05	0.89	4.92	31.78	100	159	VERTICAL	Peak
2	250.19	42.92	46.00	-3.08	60.60	1.90	11.91	31.49	100	30	VERTICAL	QP
3	500.45	40.35	46.00	-5.65	52.02	2.82	16.92	31.41	125	20	VERTICAL	Peak
4	717.73	36.27	46.00	-9.73	44.82	3.45	19.25	31.25	100	116	VERTICAL	Peak
5	749.74	40.98	46.00	-5.02	49.13	3.53	19.69	31.37	200	101	VERTICAL	Peak
6	915.61	38.91	46.00	-7.09	45.42	3.99	20.68	31.18	150	15	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15542.87	54.24	74.00	-19.76	42.44	7.85	38.67	34.72	Peak	99	100	HORIZONTAL
2	15544.84	41.59	54.00	-12.41	29.79	7.86	38.66	34.72	Average	99	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15536.12	42.53	54.00	-11.47	30.73	7.85	38.67	34.72	Average	4	100	VERTICAL
2	15540.91	56.23	74.00	-17.77	44.43	7.85	38.67	34.72	Peak	4	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15596.44	57.30	74.00	-16.70	45.57	7.88	38.62	34.77 Peak	162	100	HORIZONTAL
2	15604.71	45.42	54.00	-8.58	33.71	7.88	38.62	34.79 Average	162	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15595.74	62.43	74.00	-11.57	50.70	7.88	38.62	34.77 Peak	284	164	VERTICAL
2	15598.70	49.02	54.00	-4.98	37.29	7.88	38.62	34.77 Average	284	164	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15715.85	57.97	74.00	-16.03	46.41	7.92	38.52	34.88	Peak	296	100 HORIZONTAL
2	15724.05	44.55	54.00	-9.45	32.99	7.92	38.52	34.88	Average	296	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15715.96	63.90	74.00	-10.10	52.34	7.92	38.52	34.88	Peak	152	145 VERTICAL
2	15720.37	50.15	54.00	-3.85	38.59	7.92	38.52	34.88	Average	152	145 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11488.48	51.81	74.00	-22.19	41.43	6.74	38.30	34.66 Peak	140	100	HORIZONTAL
2	11493.70	39.48	54.00	-14.52	29.10	6.74	38.30	34.66 Average	140	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11486.44	52.29	74.00	-21.71	41.91	6.74	38.30	34.66 Peak	63	100	VERTICAL
2	11494.46	40.38	54.00	-13.62	30.00	6.74	38.30	34.66 Average	63	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11572.15	57.86	74.00	-16.14	47.45	6.77	38.33	34.69	Peak	258	100 HORIZONTAL
2	11572.44	46.98	54.00	-7.02	36.57	6.77	38.33	34.69	Average	258	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11568.88	61.96	74.00	-12.04	51.54	6.77	38.33	34.68	Peak	97	100 VERTICAL
2	11572.66	50.46	54.00	-3.54	40.05	6.77	38.33	34.69	Average	97	100 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11645.59	52.39	74.00	-21.61	41.94	6.80	38.36	34.71	Peak	205	100 HORIZONTAL
2	11651.15	39.33	54.00	-14.67	28.89	6.80	38.36	34.72	Average	205	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11646.44	51.93	74.00	-22.07	41.49	6.80	38.36	34.72	Peak	250	100 VERTICAL
2	11653.33	40.05	54.00	-13.95	29.61	6.80	38.36	34.72	Average	250	100 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	15565.77	42.46	54.00	-11.54	30.70	7.86	38.64	34.74	Average	228	100	HORIZONTAL
2	15569.60	54.00	74.00	-20.00	42.24	7.86	38.64	34.74	Peak	228	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	15565.14	45.63	54.00	-8.37	33.87	7.86	38.64	34.74	Average	288	100	VERTICAL
2	15572.23	57.44	74.00	-16.56	45.68	7.86	38.64	34.74	Peak	288	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15691.62	45.15	54.00	-8.85	33.55	7.90	38.55	34.85	Average	355	100 HORIZONTAL
2	15694.39	55.79	74.00	-18.21	44.19	7.90	38.55	34.85	Peak	355	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15687.77	60.16	74.00	-13.84	48.56	7.90	38.55	34.85	Peak	86	164 VERTICAL
2	15693.41	47.75	54.00	-6.25	36.15	7.90	38.55	34.85	Average	86	164 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11513.85	51.95	74.00	-22.05	41.56	6.75	38.30	34.66 Peak	75	100	HORIZONTAL
2	11513.86	39.42	54.00	-14.58	29.03	6.75	38.30	34.66 Average	75	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11509.44	39.53	54.00	-14.47	29.14	6.75	38.30	34.66 Average	143	138	VERTICAL
2	11509.62	52.05	74.00	-21.95	41.66	6.75	38.30	34.66 Peak	143	138	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11586.49	39.20	54.00	-14.80	28.78	6.78	38.33	34.69 Average	248	100	HORIZONTAL
2	11588.16	51.53	74.00	-22.47	41.11	6.78	38.33	34.69 Peak	248	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11591.06	52.10	74.00	-21.90	41.68	6.78	38.33	34.69 Peak	184	100	VERTICAL
2	11592.13	40.21	54.00	-13.79	29.79	6.78	38.33	34.69 Average	184	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11547.26	39.67	54.00	-14.33	29.28	6.76	38.31	34.68	Average	265	100 HORIZONTAL
2	11550.32	51.23	74.00	-22.77	40.82	6.77	38.32	34.68	Peak	265	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11549.42	39.70	54.00	-14.30	29.29	6.77	38.32	34.68	Average	335	100 VERTICAL
2	11551.36	51.42	74.00	-22.58	41.01	6.77	38.32	34.68	Peak	335	100 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15628.32	41.41	54.00	-12.59	29.74	7.88	38.60	34.81	Average	206	100 HORIZONTAL
2	15630.91	54.94	74.00	-19.06	43.27	7.89	38.59	34.81	Peak	206	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15628.83	54.65	74.00	-19.35	42.98	7.89	38.59	34.81	Peak	158	100 VERTICAL
2	15634.63	42.27	54.00	-11.73	30.60	7.89	38.59	34.81	Average	158	100 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11a CH 36 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15538.03	42.27	54.00	-11.73	30.47	7.85	38.67	34.72	Average	194	100	HORIZONTAL
2	15540.05	55.74	74.00	-18.26	43.94	7.85	38.67	34.72	Peak	194	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15538.08	42.53	54.00	-11.47	30.73	7.85	38.67	34.72	Average	133	100	VERTICAL
2	15543.97	55.59	74.00	-18.41	43.79	7.86	38.66	34.72	Peak	133	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11a CH 40 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15599.10	45.43	54.00	-8.57	33.72	7.88	38.62	34.79	Average	40	100	HORIZONTAL
2	15600.56	58.18	74.00	-15.82	46.47	7.88	38.62	34.79	Peak	40	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15599.15	46.14	54.00	-7.86	34.43	7.88	38.62	34.79	Average	283	100	VERTICAL
2	15600.56	59.57	74.00	-14.43	47.86	7.88	38.62	34.79	Peak	283	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11a CH 48 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15722.60	46.78	54.00	-7.22	35.22	7.92	38.52	34.88	Average	218	100	HORIZONTAL
2	15724.68	57.63	74.00	-16.37	46.07	7.92	38.52	34.88	Peak	218	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15719.47	50.77	54.00	-3.23	39.21	7.92	38.52	34.88	Average	152	145	VERTICAL
2	15724.26	63.98	74.00	-10.02	52.42	7.92	38.52	34.88	Peak	152	145	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Ted Chiu	Configurations	IEEE 802.11a CH 149 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	11491.38	53.39	74.00	-20.61	43.01	6.74	38.30	34.66	Peak	65	100	HORIZONTAL
2	11493.96	39.68	54.00	-14.32	29.30	6.74	38.30	34.66	Average	65	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	11487.16	52.65	74.00	-21.35	42.27	6.74	38.30	34.66	Peak	190	100	VERTICAL
2	11488.17	40.82	54.00	-13.18	30.44	6.74	38.30	34.66	Average	190	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Ted Chiu	Configurations	IEEE 802.11a CH 157 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11571.75	60.09	74.00	-13.91	49.68	6.77	38.33	34.69	Peak	200	100	HORIZONTAL
2	11571.94	46.35	54.00	-7.65	35.94	6.77	38.33	34.69	Average	200	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11570.21	50.55	54.00	-3.45	40.14	6.77	38.33	34.69	Average	143	121	VERTICAL
2	11571.94	65.30	74.00	-8.70	54.89	6.77	38.33	34.69	Peak	143	121	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11a CH 165 / Ant.1 + Ant.2
Test Date	Aug. 21, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11652.20	46.45	54.00	-7.55	36.88	5.16	39.49	35.08	Average	201	108	HORIZONTAL
2	11652.30	62.43	74.00	-11.57	52.86	5.16	39.49	35.08	Peak	201	108	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11646.40	47.80	54.00	-6.20	38.24	5.16	39.48	35.08	Average	159	97	VERTICAL
2	11651.10	63.66	74.00	-10.34	54.09	5.16	39.49	35.08	Peak	159	97	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5148.40	71.45	74.00	-2.55	68.50	4.34	33.14	34.53	298	195	VERTICAL
2	5150.00	53.01	54.00	-0.99	50.06	4.34	33.14	34.53	298	195	VERTICAL
3	5180.48	103.36			100.34	4.36	33.19	34.53	298	195	VERTICAL
4	5181.92	112.99			109.97	4.36	33.19	34.53	298	195	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5144.87	72.24	74.00	-1.76	69.29	4.34	33.14	34.53	288	198	VERTICAL
2	5150.00	53.46	54.00	-0.54	50.51	4.34	33.14	34.53	288	198	VERTICAL
3	5199.04	117.53			114.47	4.37	33.22	34.53	288	198	VERTICAL
4	5200.64	107.64			104.58	4.37	33.22	34.53	288	198	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5142.79	61.55	74.00	-12.45	58.60	4.34	33.14	34.53	82	199	VERTICAL
2	5150.00	46.42	54.00	-7.58	43.47	4.34	33.14	34.53	82	199	VERTICAL
3	5237.60	116.82			113.69	4.39	33.27	34.53	82	199	VERTICAL
4	5238.08	106.71			103.58	4.39	33.27	34.53	82	199	VERTICAL
5	5350.00	46.45	54.00	-7.55	43.05	4.47	33.46	34.53	82	199	VERTICAL
6	5359.62	61.16	74.00	-12.84	57.76	4.47	33.46	34.53	82	199	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Ant.1 + Ant.2
Test Date	Aug. 21, 2014		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5715.00	67.54	68.20	-0.66	64.20	3.60	34.68	34.94	Peak	175	344	VERTICAL
2	5725.00	74.54	78.20	-3.66	71.19	3.60	34.69	34.94	Peak	175	344	VERTICAL
3	5744.20	111.77			108.40	3.61	34.70	34.94	Peak	175	344	VERTICAL
4	5744.60	101.91			98.54	3.61	34.70	34.94	Average	175	344	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5713.40	67.63	68.20	-0.57	64.29	3.60	34.68	34.94	Peak	169	355	VERTICAL
2	5724.20	71.77	78.20	-6.43	68.42	3.60	34.69	34.94	Peak	169	355	VERTICAL
3	5785.40	107.54			104.14	3.63	34.71	34.94	Average	169	355	VERTICAL
4	5785.40	118.09			114.69	3.63	34.71	34.94	Peak	169	355	VERTICAL
5	5850.00	73.64	78.20	-4.56	70.21	3.64	34.74	34.95	Peak	169	355	VERTICAL
6	5868.40	67.17	68.20	-1.03	63.73	3.65	34.74	34.95	Peak	169	355	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5827.40	101.66			98.25	3.63	34.73	34.95	Average	178	337	VERTICAL
2	5827.40	112.24			108.83	3.63	34.73	34.95	Peak	178	337	VERTICAL
3	5850.00	73.59	78.20	-4.61	70.16	3.64	34.74	34.95	Peak	178	337	VERTICAL
4	5864.00	66.75	68.20	-1.45	63.31	3.65	34.74	34.95	Peak	178	337	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5142.31	67.54	74.00	-6.46	64.59	4.34	33.14	34.53	Peak	288	204	VERTICAL
2	5150.00	53.01	54.00	-0.99	50.06	4.34	33.14	34.53	Average	288	204	VERTICAL
3	5188.08	109.09			106.07	4.36	33.19	34.53	Peak	288	204	VERTICAL
4	5188.08	99.29			96.27	4.36	33.19	34.53	Average	288	204	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	5149.68	65.19	74.00	-8.81	62.24	4.34	33.14	34.53	Peak	69	192	VERTICAL
2	5150.00	52.95	54.00	-1.05	50.00	4.34	33.14	34.53	Average	69	192	VERTICAL
3	5231.60	102.09			98.96	4.39	33.27	34.53	Average	69	192	VERTICAL
4	5233.85	111.39			108.26	4.39	33.27	34.53	Peak	69	192	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Ant.1 + Ant.2
Test Date	Aug. 21, 2014		

Channel 151

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5701.80	67.68	68.20	-0.52	64.35	3.59	34.68	34.94	Peak	189	332	VERTICAL
2	5723.80	69.04	78.20	-9.16	65.69	3.60	34.69	34.94	Peak	189	332	VERTICAL
3	5753.00	108.01			104.64	3.61	34.70	34.94	Peak	189	332	VERTICAL
4	5756.60	98.22			94.84	3.62	34.70	34.94	Average	189	332	VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5793.00	108.01			104.60	3.63	34.72	34.94	Peak	190	334	VERTICAL
2	5793.40	97.91			94.50	3.63	34.72	34.94	Average	190	334	VERTICAL
3	5850.00	67.97	78.20	-10.23	64.54	3.64	34.74	34.95	Peak	190	334	VERTICAL
4	5860.80	65.62	68.20	-2.58	62.18	3.65	34.74	34.95	Peak	190	334	VERTICAL

Item 1, 2 are the fundamental frequency at 5795 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Ant.1 + Ant.2
Test Date	Aug. 21, 2014 ~ Sep. 15, 2014		

Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5148.40	53.48	54.00	-0.52	50.53	4.34	33.14	34.53	Average	285	189 VERTICAL
2	5150.00	67.05	74.00	-6.95	64.10	4.34	33.14	34.53	Peak	285	189 VERTICAL
3	5196.38	103.13			100.07	4.37	33.22	34.53	Peak	285	189 VERTICAL
4	5208.40	93.66			90.56	4.38	33.25	34.53	Average	285	189 VERTICAL
5	5354.81	42.49	54.00	-11.51	39.09	4.47	33.46	34.53	Average	285	189 VERTICAL
6	5358.81	53.71	74.00	-20.29	50.31	4.47	33.46	34.53	Peak	285	189 VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 155

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5715.00	67.45	68.20	-0.75	64.11	3.60	34.68	34.94	Peak	100	104	VERTICAL
2	5725.00	69.10	78.20	-9.10	65.75	3.60	34.69	34.94	Peak	100	104	VERTICAL
3	5769.00	104.23			100.84	3.62	34.71	34.94	Peak	100	104	VERTICAL
4	5771.00	94.16			90.77	3.62	34.71	34.94	Average	100	104	VERTICAL
5	5850.00	65.58	78.20	-12.62	62.15	3.64	34.74	34.95	Peak	100	104	VERTICAL
6	5866.00	67.15	68.20	-1.05	63.71	3.65	34.74	34.95	Peak	100	104	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant.1 + Ant.2
Test Date	Sep. 15, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	5150.00	70.75	74.00	-3.25	67.80	4.34	33.14	34.53	Peak	290	192	VERTICAL
2	5150.00	53.09	54.00	-0.91	50.14	4.34	33.14	34.53	Average	290	192	VERTICAL
3	5179.36	104.55			101.53	4.36	33.19	34.53	Average	290	192	VERTICAL
4	5182.56	113.84			110.82	4.36	33.19	34.53	Peak	290	192	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	5148.72	71.73	74.00	-2.27	68.78	4.34	33.14	34.53	Peak	291	190	VERTICAL
2	5150.00	53.17	54.00	-0.83	50.22	4.34	33.14	34.53	Average	291	190	VERTICAL
3	5197.76	115.06			112.00	4.37	33.22	34.53	Peak	291	190	VERTICAL
4	5199.36	107.77			104.71	4.37	33.22	34.53	Average	291	190	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	5146.64	62.71	74.00	-11.29	59.76	4.34	33.14	34.53	Peak	77	185	HORIZONTAL
2	5150.00	48.05	54.00	-5.95	45.10	4.34	33.14	34.53	Average	77	185	HORIZONTAL
3	5239.04	107.11			103.98	4.39	33.27	34.53	Average	77	185	HORIZONTAL
4	5239.52	114.87			111.74	4.39	33.27	34.53	Peak	77	185	HORIZONTAL
5	5350.00	45.35	54.00	-8.65	41.95	4.47	33.46	34.53	Average	77	185	HORIZONTAL
6	5353.85	58.49	74.00	-15.51	55.09	4.47	33.46	34.53	Peak	77	185	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11a CH 149, 157, 165 / Ant.1 + Ant.2
Test Date	Aug. 21, 2014		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5715.00	67.21	68.20	-0.99	63.87	3.60	34.68	34.94	Peak	194	334 VERTICAL
2	5725.00	77.27	78.20	-0.93	73.92	3.60	34.69	34.94	Peak	194	334 VERTICAL
3	5744.20	100.84			97.47	3.61	34.70	34.94	Average	194	334 VERTICAL
4	5744.20	110.35			106.98	3.61	34.70	34.94	Peak	194	334 VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5715.00	67.66	68.20	-0.54	64.32	3.60	34.68	34.94	Peak	182	334 VERTICAL
2	5725.00	70.50	78.20	-7.70	67.15	3.60	34.69	34.94	Peak	182	334 VERTICAL
3	5783.40	120.29			116.89	3.63	34.71	34.94	Peak	182	334 VERTICAL
4	5784.20	109.53			106.13	3.63	34.71	34.94	Average	182	334 VERTICAL
5	5850.40	71.90	78.20	-6.30	68.47	3.64	34.74	34.95	Peak	182	334 VERTICAL
6	5862.40	67.17	68.20	-1.03	63.73	3.65	34.74	34.95	Peak	182	334 VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5824.20	104.24			100.83	3.63	34.73	34.95	Average	157	339 VERTICAL
2	5827.00	114.09			110.68	3.63	34.73	34.95	Average	157	339 VERTICAL
3	5852.00	76.71	78.20	-1.49	73.28	3.64	34.74	34.95	Average	157	339 VERTICAL
4	5861.20	67.66	68.20	-0.54	64.22	3.65	34.74	34.95	Average	157	339 VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.8.4. Test Setup Layout

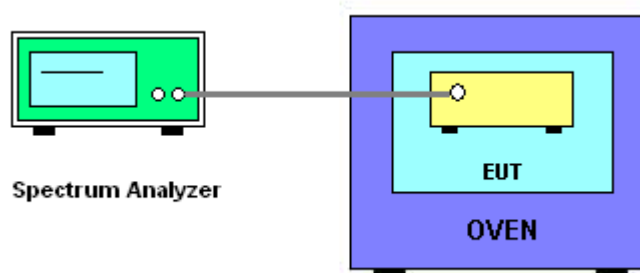

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Test Date	Sep. 24, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5200.0156
110.00	5200.0150
93.50	5200.0154
Max. Deviation (MHz)	0.015600
Max. Deviation (ppm)	3.00

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5200.0149
10	5200.0150
20	5200.0150
30	5200.0152
40	5200.0154
Max. Deviation (MHz)	0.015400
Max. Deviation (ppm)	2.96

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Dec. 02, 2013	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Dec. 02, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%