



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd
FCC ID QISATU-L21
Product Smart Phone
Model ATU-L21
Report No. R1802H0029-R1
Issue Date March 16, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR 47 Part 22H (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Jiangpeng Lan

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	9
4. Test Configuration	10
5. Test Case Results	12
5.1. RF Power Output	12
5.2. Effective Radiated Power	16
5.3. Occupied Bandwidth	20
5.4. Band Edge Compliance	29
5.5. Peak-to-Average Power Ratio (PAPR)	37
5.6. Frequency Stability	40
5.7. Spurious Emissions at Antenna Terminals	44
5.8. Radiates Spurious Emission	51
6. Main Test Instruments	63
ANNEX A: Product Change Description	64

Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: February 24, 2018 ~ March 8, 2018			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.

General Information

EUT Description			
Model	ATU-L21		
IMEI	SIM 1: 867267030032749 SIM 2: 867267030032756		
Hardware Version	HL1ATUM		
Software Version	ATU-L21 8.0.1.44(SP1C900)		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Test Mode(s)	GSM 850; WCDMA Band V; LTE Band 5;		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA)QPSK; (LTE)QPSK 16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
LTE Receiver	9		
Maximum E.R.P.	GSM 850:	25.06dBm	
	WCDMA Band V:	17.10dBm	
	LTE Band 5:	14.60dBm	
Rated Power Supply Voltage	3.82 V		
Extreme Voltage	Minimum: 3.6V Maximum: 4.4 V		
Extreme Temperature	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894



EUT Accessory	
Adapter 1- EU	Manufacturer: SHENZHEN HUNTKEY ELECTRIC CO., LTD Model: HW-050100E01
Adapter 2- EU	Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD. Model: HW-050100E01
Adapter 3- EU	Manufacturer: DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100E01
Adapter 4- UK	Manufacturer: SHENZHEN HUNTKEY ELECTRIC CO., LTD Model: HW-050100B01
Adapter 5- UK	Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD. Model: HW-050100B01
Adapter 6- UK	Manufacturer: DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100B01
Adapter 7- US	Manufacturer: SHENZHEN HUNTKEY ELECTRIC CO., LTD Model: HW-050100U01
Adapter 8- US	Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD. Model: HW-050100U01
Adapter 9- US	Manufacturer: DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100U01
Adapter 10- AU	Manufacturer: SHENZHEN HUNTKEY ELECTRIC CO., LTD Model: HW-050100A01
Adapter 11- AU	Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD. Model: HW-050100A01
Adapter 12- AU	Manufacturer: DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100A01
Battery 1	Manufacturer: SCUD(FUJIAN) Electronics Co.,Ltd Model: HB366481ECW-11
Battery 2	Manufacturer: Sunwoda Electronics Co.,Ltd Model: HB366481ECW-11
Battery 3	Manufacturer: Desay battery Co.,LTD Model: HB366481ECW-11
Earphone 1	Manufacturer: BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD Model: 1293-3283-3.5MM-300
Earphone 2	Manufacturer: GoerTek Inc Model: HA1-3W
Earphone 3	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co.,LTD Model: MEMD1532B528A00
Earphone 4	Manufacturer: BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD Model: 1293#+3283# 3.5MM-150
Earphone 5	Manufacturer: GoerTek Inc Model: HA1-3



Earphone 6	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co.,LTD Model: MEMD1532B528000
Earphone 7	Manufacturer: FOXCONN Model: EPAB542-2WH03-DH
USB Extend Cable	100cm Cable, Shielded
Note: 1.The information of the EUT is declared by the manufacturer. 2. There are more than one SIM card slot, Adapters, Batteries, Earphones; each one should be applied throughout the compliance test respectively, however, only the worst case (SIM 1, Adapter 5, Battery 1, Earphone 2) will be recorded in this report.	

ATU-L21 (R1802H0029-R1) is a variant model of ATU-L11 (R1802H0028-R1). Test items tested see the table below. The detailed product change description please refers to the ANNEX A.

Test items		Original ATU-L11	Variant ATU-L21
Conducted Test cases	RF power output	pass	Refer to the Original
	Occupied Bandwidth	pass	Refer to the Original
	Band Edge Compliance	pass	Refer to the Original
	Peak-to-Average Power Ratio	pass	Refer to the Original
	Frequency Stability	pass	Refer to the Original
	Spurious Emissions at Antenna Terminals	pass	Refer to the Original
Radiated Test cases	Effective Radiated Power	pass	Refer to the Original
	Radiates Spurious Emission	pass	pass



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2017)

FCC CFR 47 Part 22H (2017)

ANSI/TIA-603-E (2016)

KDB 971168 D01 Power Meas License Digital Systems v03

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSMWCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

	Test items	Modes/Modulation	
		GSM 850	WCDMA Band V
Conducted Test cases	RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
	Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
	Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
	Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
	Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
	Spurious Emissions at Antenna Terminals	GSM	RMC
Radiated Test cases	Effective Radiated Power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
	Radiates Spurious Emission	GSM	RMC



Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	-	-	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	-	-	O	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

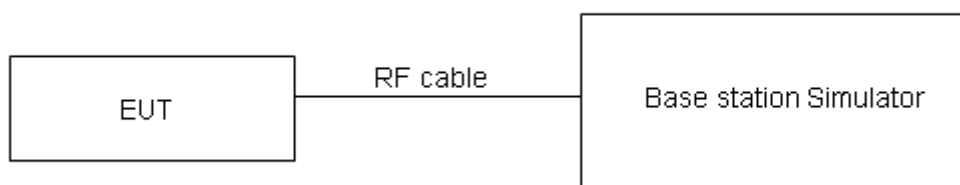

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	32.99	32.62	32.53
GPRS (GMSK)	1TXslot	32.78	32.81	32.78
	2TXslots	29.66	29.68	29.68
	3TXslots	27.85	27.82	27.95
	4TXslots	26.68	26.65	26.67
EGPRS (GMSK)	1TXslot	32.65	32.64	32.65
	2TXslots	29.57	29.66	29.62
	3TXslots	27.89	27.84	27.86
	4TXslots	26.61	26.68	26.64
EGPRS (8PSK)	1TXslot	25.19	24.89	24.55
	2TXslots	22.76	22.41	22.28
	3TXslots	20.82	20.33	20.14
	4TXslots	19.80	19.66	19.00

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC		23.86	23.78	23.85
HSDPA	Sub - Test 1	22.77	22.71	22.76
	Sub - Test 2	22.81	22.77	22.74
	Sub - Test 3	22.26	22.30	22.33
	Sub - Test 4	22.33	22.32	22.30
HSUPA	Sub - Test 1	22.76	22.80	22.82
	Sub - Test 2	22.41	22.30	22.31
	Sub - Test 3	22.87	22.78	22.84
	Sub - Test 4	22.87	22.81	22.78
	Sub - Test 5	22.81	22.80	22.81
DC-HSDPA	Sub - Test 1	22.74	22.69	22.76
	Sub - Test 2	22.77	22.68	22.75
	Sub - Test 3	22.75	22.65	22.72
	Sub - Test 4	22.76	22.64	22.74



LTE Band 5				Conducted Power(dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20407/824.7	20525/836.5	20643/848.3
1.4MHz	QPSK	1	0	23.28	23.47	23.43
		1	2	23.42	23.64	23.55
		1	5	23.37	23.44	23.55
		3	0	23.26	23.31	23.32
		3	2	23.19	23.33	23.35
		3	3	23.26	23.23	23.32
		6	0	22.29	22.37	22.47
	16QAM	1	0	21.96	21.85	21.99
		1	2	22.23	22.13	22.22
		1	5	22.09	22.07	22.12
		3	0	22.12	22.13	22.27
		3	2	22.24	22.25	22.28
		3	3	22.08	22.20	22.14
		6	0	21.20	21.48	21.36
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20415/825.5	20525/836.5	20635/847.5
3MHz	QPSK	1	0	23.30	23.51	23.46
		1	7	23.45	23.69	23.59
		1	14	23.40	23.49	23.59
		8	0	22.36	22.43	22.45
		8	4	22.31	22.43	22.47
		8	7	22.36	22.34	22.42
		15	0	22.32	22.41	22.50
	16QAM	1	0	21.99	21.87	22.02
		1	7	22.26	22.18	22.26
		1	14	22.11	22.11	22.15
		8	0	21.23	21.26	21.39
		8	4	21.35	21.38	21.40
		8	7	21.18	21.32	21.27
		15	0	21.23	21.52	21.39
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20425/826.5	20525/836.5	20625/846.5
5MHz	QPSK	1	0	23.27	23.49	23.42



		1	13	23.43	23.65	23.56	
		1	24	23.37	23.44	23.55	
		12	0	22.33	22.38	22.41	
		12	6	22.29	22.39	22.42	
		12	13	22.34	22.32	22.38	
		25	0	22.30	22.40	22.48	
		16QAM	1	0	21.96	21.83	21.99
			1	13	22.23	22.16	22.23
			1	24	22.08	22.09	22.11
			12	0	21.21	21.22	21.36
			12	6	21.32	21.33	21.36
			12	13	21.15	21.27	21.23
	25	0	21.21	21.48	21.34		
	BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
20450/829					20525/836.5	20600/844	
10MHz	QPSK	1	0	23.25	23.42	23.40	
		1	25	23.43	23.65	23.55	
		1	49	23.34	23.42	23.51	
		25	0	22.31	22.34	22.38	
		25	13	22.27	22.35	22.39	
		25	25	22.30	22.28	22.35	
		50	0	22.33	22.33	22.43	
	16QAM	1	0	21.91	21.80	21.94	
		1	25	22.20	22.15	22.20	
		1	49	22.06	22.04	22.09	
		25	0	21.18	21.21	21.34	
		25	13	21.28	21.30	21.32	
		25	25	21.13	21.23	21.20	
		50	0	21.19	21.44	21.31	

5.2. Effective Radiated Power

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-E (2016).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

Test setup

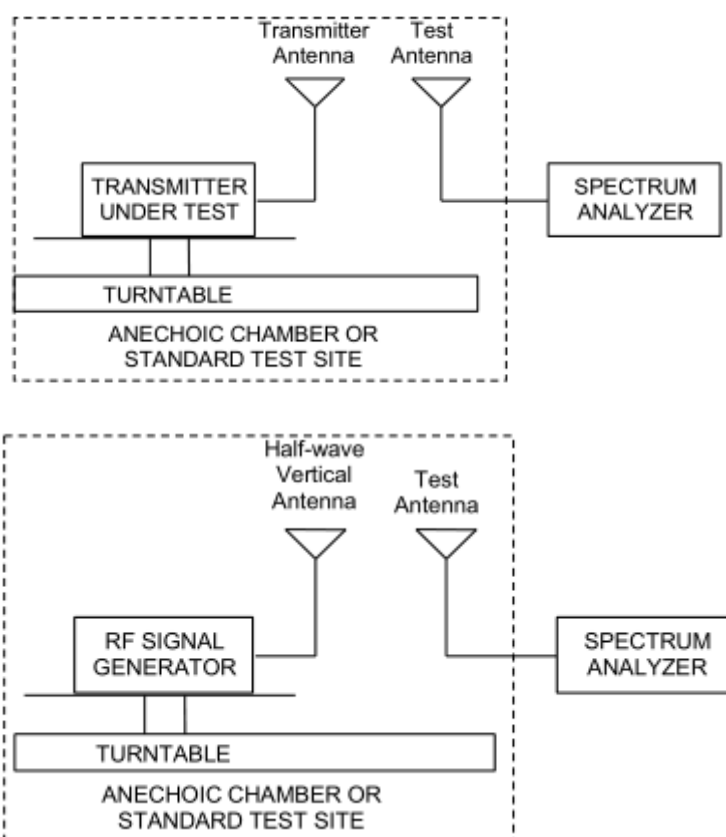

Limits

Rule Part 22.913(a) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	Output Power (dBm)	Losses (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
GSM 850	Low	824.2	Horizontal	-21.53	-45.53	1.06	25.06	38.45	Pass
	Mid	836.6	Horizontal	-22.56	-45.38	1.24	24.06	38.45	Pass
	High	848.8	Horizontal	-22.88	-45.37	1.38	23.87	38.45	Pass
GPRS 850	Low	824.2	Horizontal	-22.56	-45.53	1.06	24.03	38.45	Pass
	Mid	836.6	Horizontal	-22.92	-45.38	1.24	23.70	38.45	Pass
	High	848.8	Horizontal	-23.09	-45.37	1.38	23.66	38.45	Pass
EGPRS 850	Low	824.2	Horizontal	-25.48	-45.53	1.06	21.11	38.45	Pass
	Mid	836.6	Horizontal	-26.13	-45.38	1.24	20.49	38.45	Pass
	High	848.8	Horizontal	-26.53	-45.37	1.38	20.22	38.45	Pass
WCDMA Band V	Low	826.4	Horizontal	-29.47	-45.44	1.13	17.10	38.45	Pass
	Mid	836.6	Horizontal	-29.67	-45.38	1.24	16.95	38.45	Pass
	High	846.6	Horizontal	-30.20	-45.38	1.35	16.53	38.45	Pass



LTE Band 5									
bandwidth	Channel	Frequency (MHz)	Polarization	Output Power (dBm)	Losses (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	824.7	Horizontal	-31.92	-47.61	1.06	16.75	38.45	Pass
	Mid	836.5	Horizontal	-32.65	-47.75	1.24	16.34	38.45	Pass
	High	848.3	Horizontal	-33.63	-48.23	1.38	15.98	38.45	Pass
3 MHz (QPSK)	Low	825.5	Horizontal	-32.07	-47.59	1.06	16.59	38.45	Pass
	Mid	836.5	Horizontal	-32.57	-47.75	1.24	16.42	38.45	Pass
	High	847.5	Horizontal	-33.54	-48.18	1.38	16.02	38.45	Pass
5 MHz (QPSK)	Low	826.5	Horizontal	-31.67	-47.24	1.13	16.70	38.45	Pass
	Mid	836.5	Horizontal	-32.17	-47.15	1.24	16.22	38.45	Pass
	High	846.5	Horizontal	-32.76	-47.40	1.38	16.02	38.45	Pass
10 MHz (QPSK)	Low	829	Horizontal	-32.02	-47.61	1.13	16.72	38.45	Pass
	Mid	836.5	Horizontal	-32.59	-47.75	1.24	16.40	38.45	Pass
	High	844	Horizontal	-32.95	-48.01	1.33	16.38	38.45	Pass
1.4 MHz (16QAM)	Low	824.7	Horizontal	-32.10	-47.61	1.06	16.57	38.45	Pass
	Mid	836.5	Horizontal	-32.83	-47.75	1.24	16.16	38.45	Pass
	High	848.3	Horizontal	-34.02	-48.23	1.38	15.59	38.45	Pass
3 MHz (16QAM)	Low	825.5	Horizontal	-32.46	-47.59	1.06	16.20	38.45	Pass
	Mid	836.5	Horizontal	-32.91	-47.75	1.24	16.08	38.45	Pass
	High	847.5	Horizontal	-33.88	-48.18	1.38	15.68	38.45	Pass
5 MHz (16QAM)	Low	826.5	Horizontal	-32.01	-47.24	1.13	16.36	38.45	Pass
	Mid	836.5	Horizontal	-32.51	-47.15	1.24	15.88	38.45	Pass
	High	846.5	Horizontal	-32.89	-47.40	1.38	15.89	38.45	Pass
10 MHz (16QAM)	Low	829	Horizontal	-32.15	-47.61	1.13	16.59	38.45	Pass
	Mid	836.5	Horizontal	-32.72	-47.75	1.24	16.27	38.45	Pass
	High	844	Horizontal	-33.08	-48.01	1.33	16.25	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,


RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (1.4MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (3MHz/5MHz),

RBW is set to 300 kHz, VBW is set to 1 MHz for LTE Band 5 (10MHz),

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

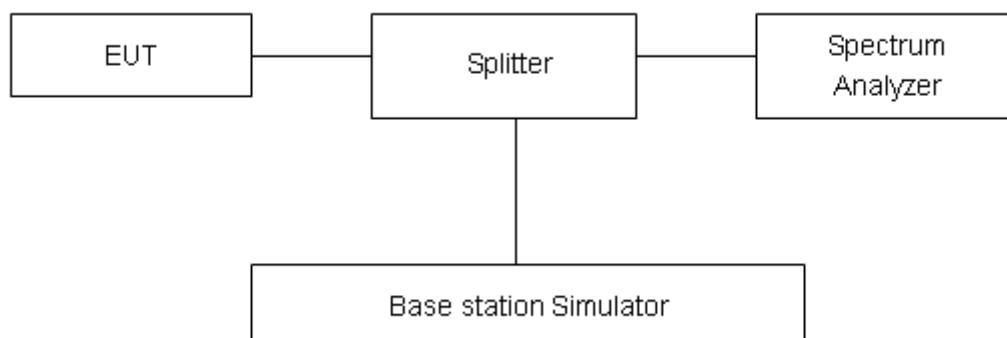

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result


Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GSM)	128	824.2	0.24515	0.3106
	190	836.6	0.24528	0.3143
	251	848.8	0.24533	0.3170
GPRS 850 (GMSK)	128	824.2	0.24597	0.3119
	190	836.6	0.24598	0.3142
	251	848.8	0.24548	0.3111
EGPRS 850 (8-PSK)	128	824.2	0.24369	0.3013
	190	836.6	0.24392	0.3086
	251	848.8	0.2408	0.3093
WCDMA Band V (RMC)	4132	826.4	4.1271	4.679
	4183	836.6	4.1262	4.692
	4233	846.6	4.1230	4.697




LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.1223	1.349
			20525	836.5	1.1200	1.359
			20643	848.3	1.1348	1.333
		3	20415	825.5	2.7453	3.059
			20525	836.5	2.7484	3.058
			20635	847.5	2.7414	3.065
		5	20425	826.5	4.5320	5.031
			20525	836.5	4.5116	5.043
			20625	846.5	4.5066	4.998
		10	20450	829	9.0356	10.12
			20525	836.5	9.0123	10.08
			20600	844	9.0407	10.10
	16QAM	1.4	20407	824.7	1.1286	1.330
			20525	836.5	1.1151	1.319
			20643	848.3	1.1175	1.342
		3	20415	825.5	2.7554	3.079
			20525	836.5	2.7366	3.062
			20635	847.5	2.7380	3.062
		5	20425	826.5	4.5127	5.008
			20525	836.5	4.5306	5.020
			20625	846.5	4.5281	5.059
		10	20450	829	9.0415	10.02
			20525	836.5	9.0140	10.07
			20600	844	9.0310	10.07




GSM 850 CH-Low

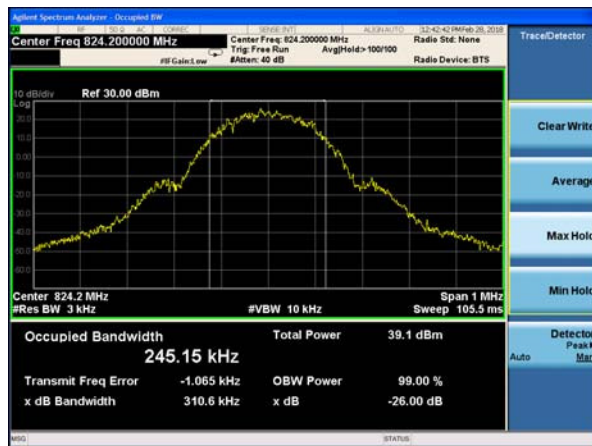


GSM 850 GPRS CH-Low

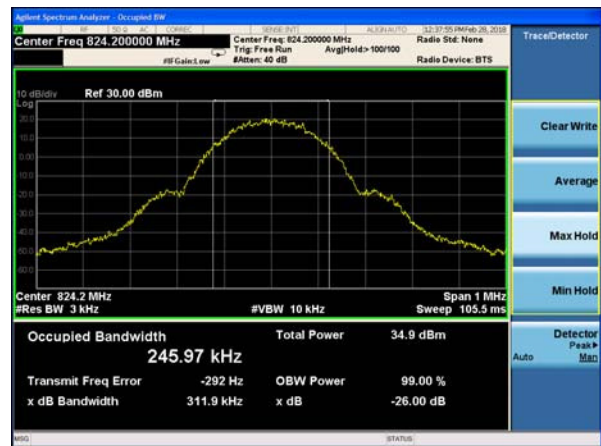

GSM 850 CH-Middle

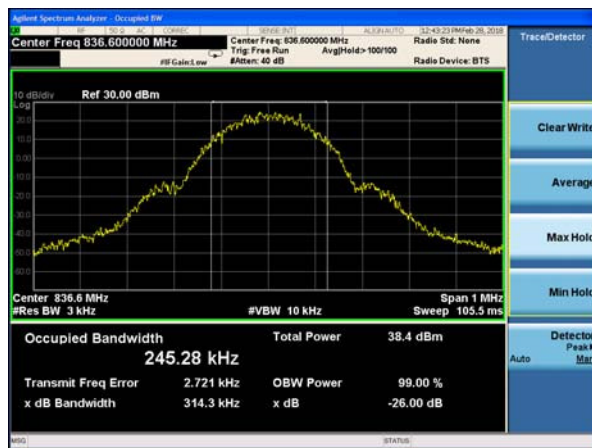


GSM 850 GPRS CH-Middle

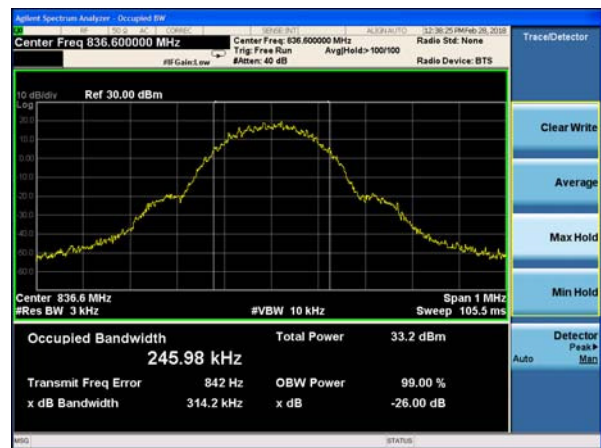

GSM 850 CH-High




GSM 850 GPRS CH-High

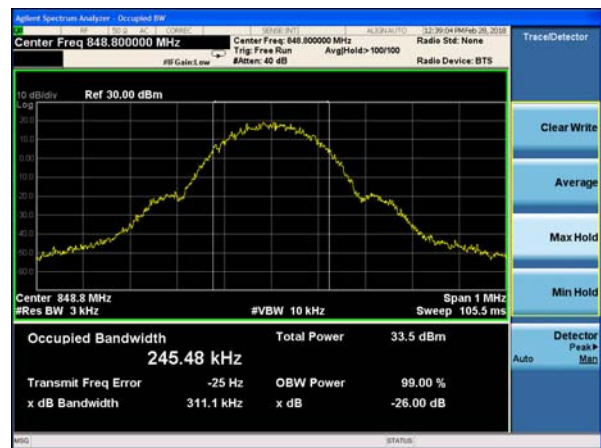





GSM 850 EGPRS CH-Low

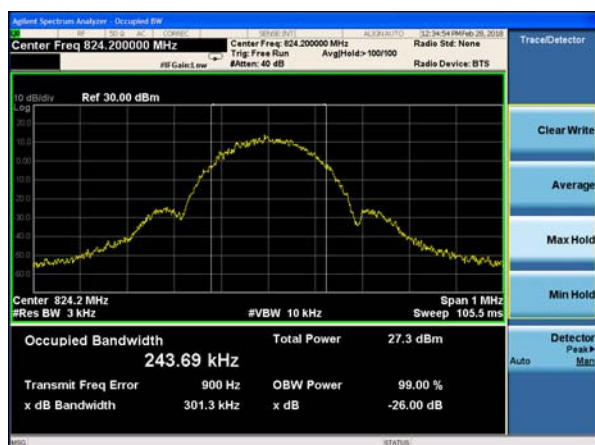


WCDMA Band V CH-Low

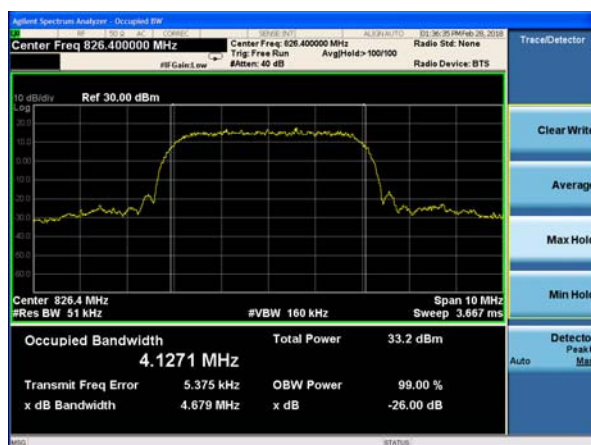

GSM 850 EGPRS CH-Middle

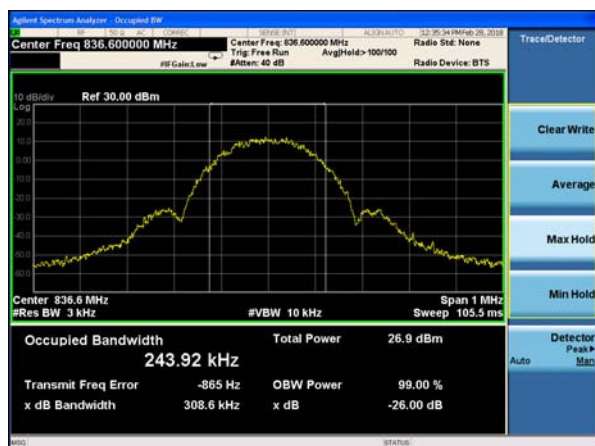


WCDMA Band V CH-Middle

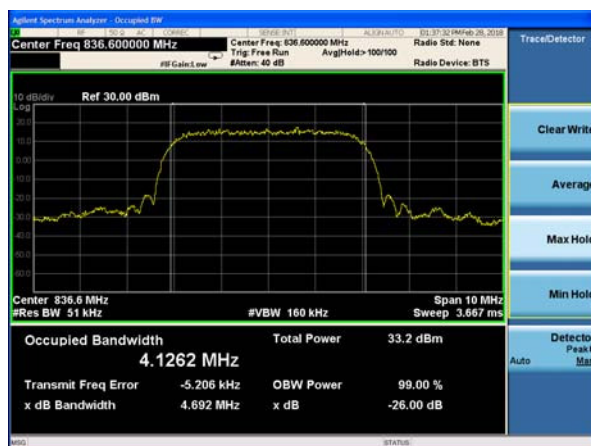

GSM 850 EGPRS CH-High




WCDMA Band V CH-High

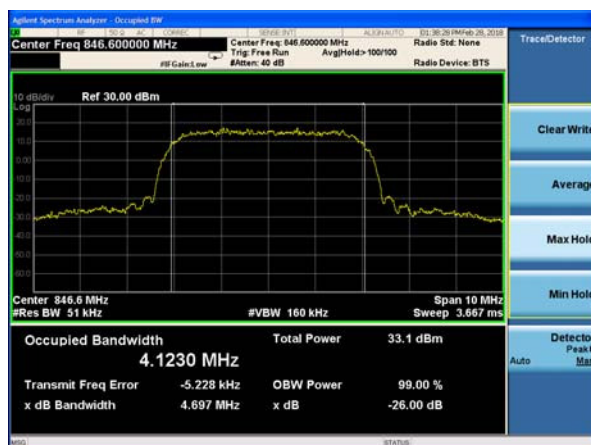





LTE Band 5 QPSK 1.4MHz CH-Low

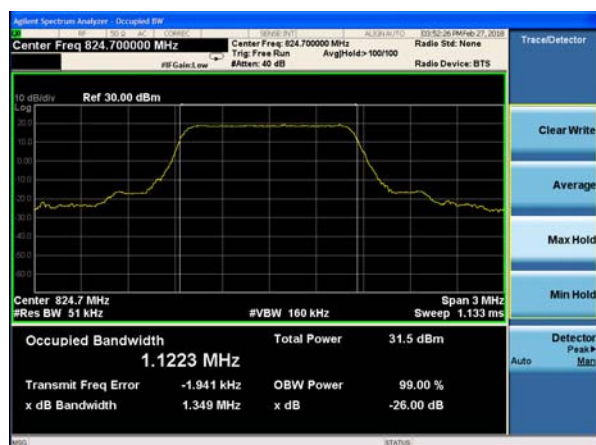


LTE Band 5 QPSK 3MHz CH-Low

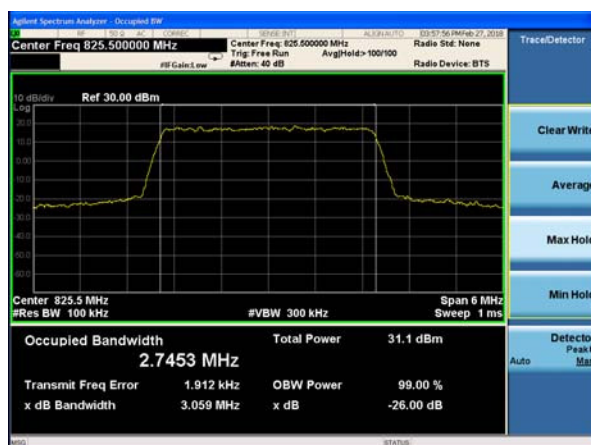

LTE Band 5 QPSK 1.4MHz CH-Middle

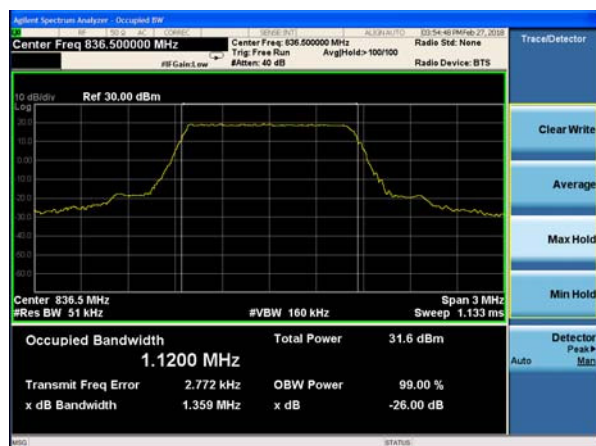


LTE Band 5 QPSK 3MHz CH-Middle

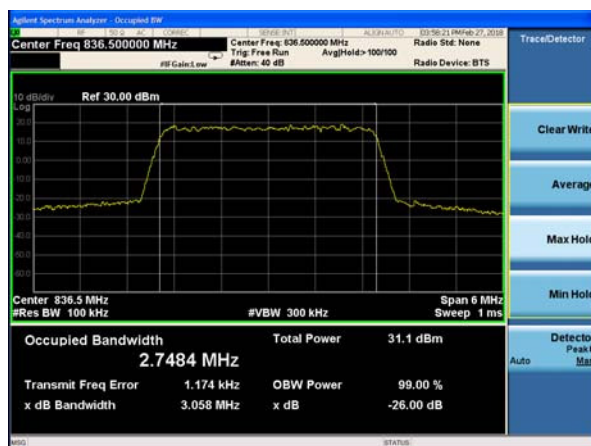

LTE Band 5 QPSK 1.4MHz CH-High



LTE Band 5 QPSK 3MHz CH-High

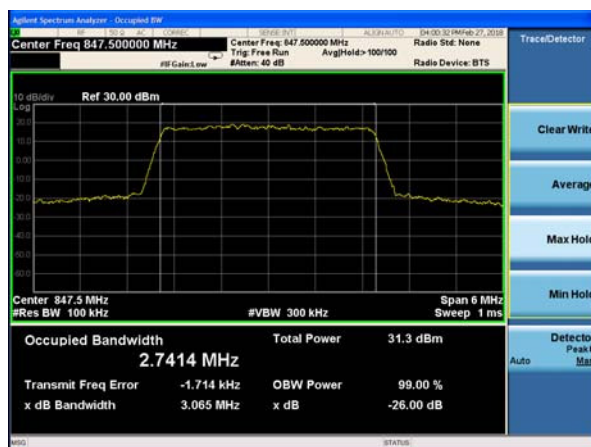




LTE Band 5 QPSK 5MHz CH-Low




LTE Band 5 QPSK 10MHz CH-Low




LTE Band 5 QPSK 5MHz CH-Middle

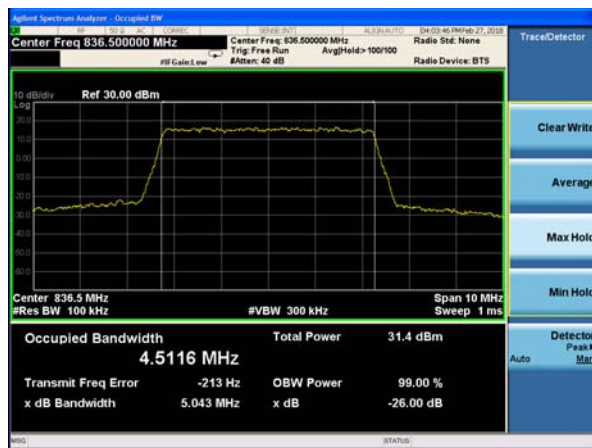


LTE Band 5 QPSK 10MHz CH-Middle

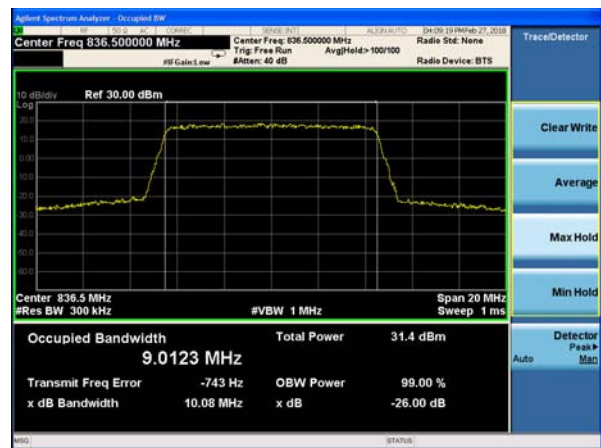

LTE Band 5 QPSK 5MHz CH-High

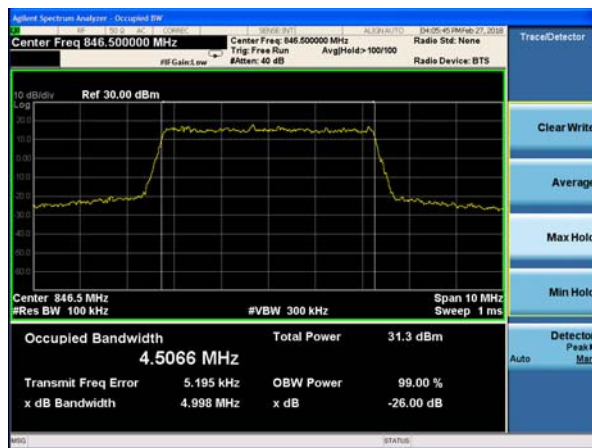


LTE Band 5 QPSK 10MHz CH-High

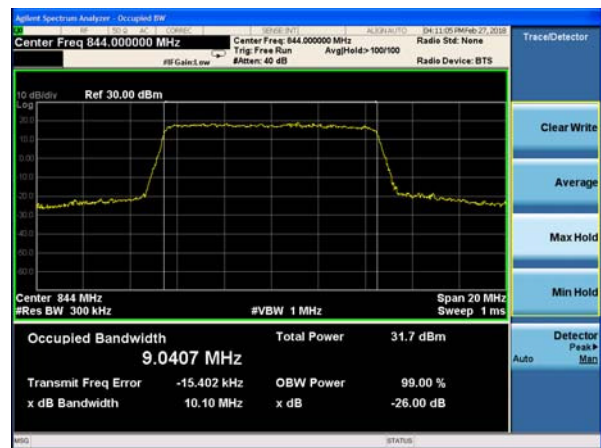





LTE Band 5 16QAM 1.4MHz CH-Low

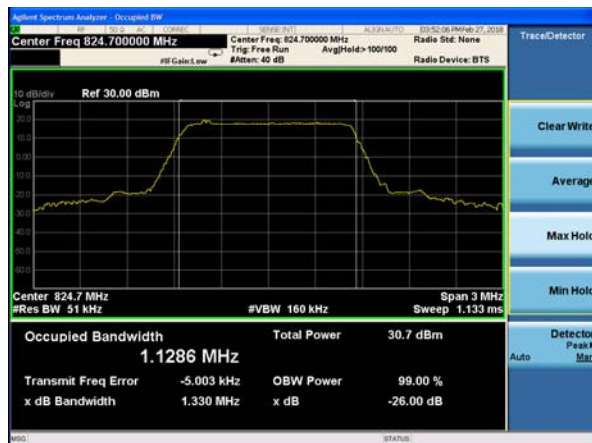


LTE Band 5 16QAM 3MHz CH-Low

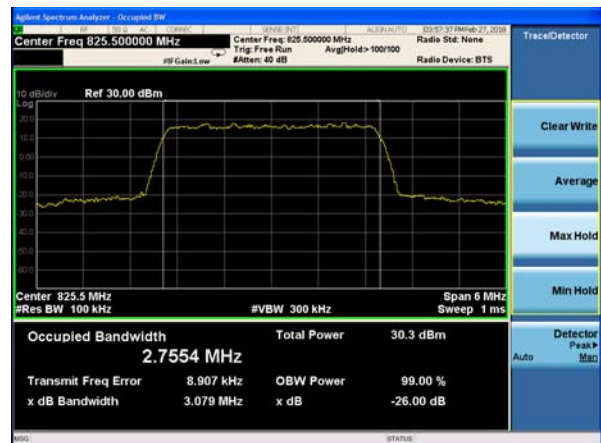


LTE Band 5 16QAM 1.4MHz CH-Middle

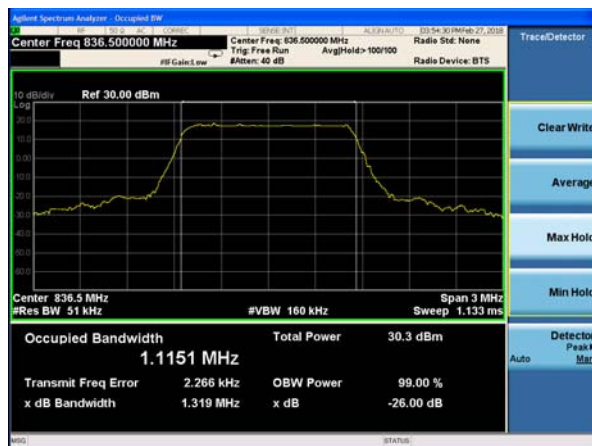

LTE Band 5 16QAM 3MHz CH-Middle

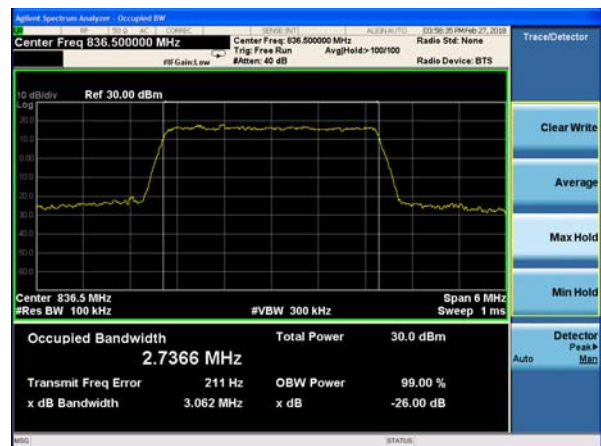

LTE Band 5 16QAM 1.4MHz CH-High

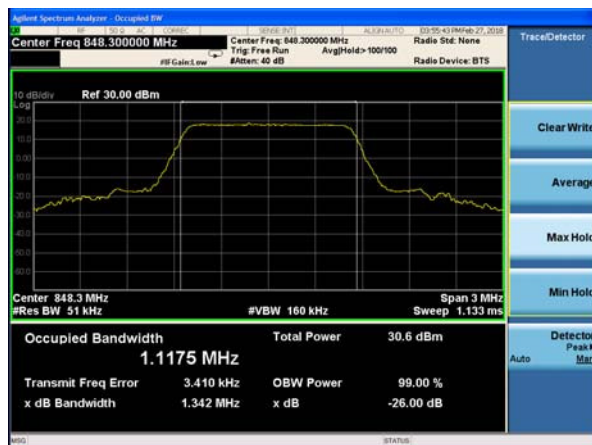


LTE Band 5 16QAM 3MHz CH-High







LTE Band 5 16QAM 5MHz CH-Low

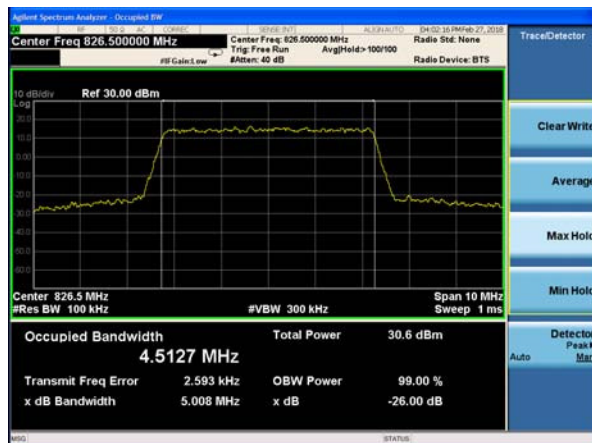


LTE Band 5 16QAM 10MHz CH-Low

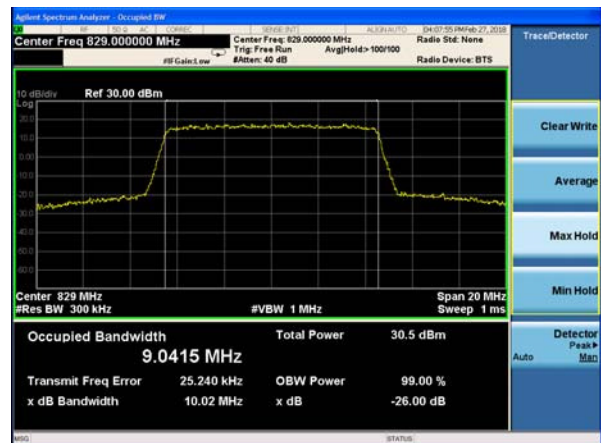


LTE Band 5 16QAM 5MHz CH-Middle

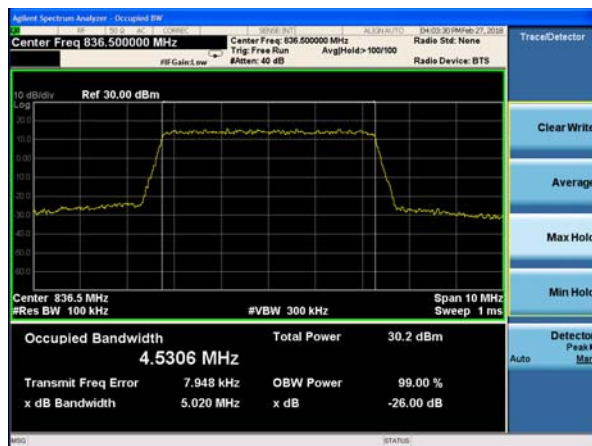


LTE Band 5 16QAM 10MHz CH-Middle

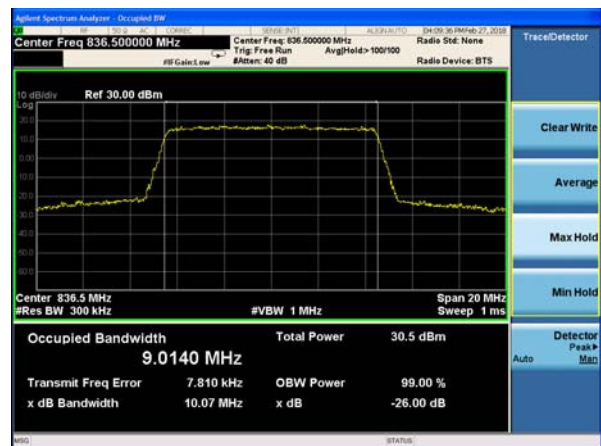

LTE Band 5 16QAM 5MHz CH-High

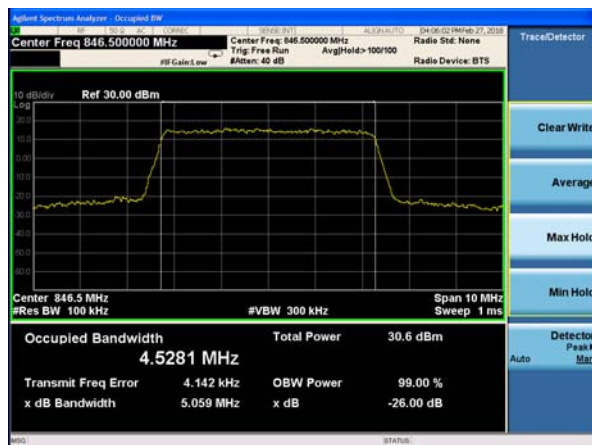

LTE Band 5 16QAM 10MHz CH-High

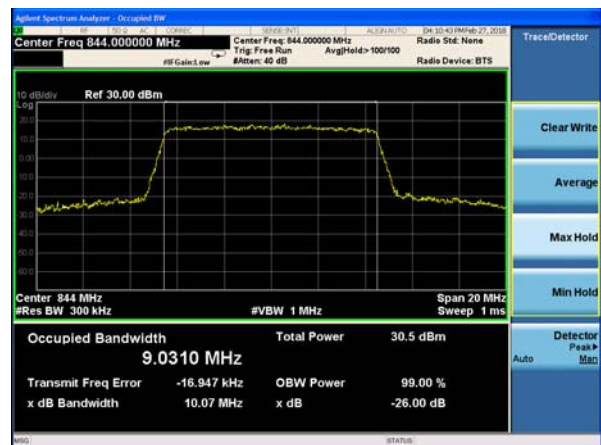

5.4. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V,

RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 5 (1.4MHz),


RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 5 (3MHz),

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (5MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (10MHz),

Spectrum analyzer plots are included on the following pages.

Test Setup

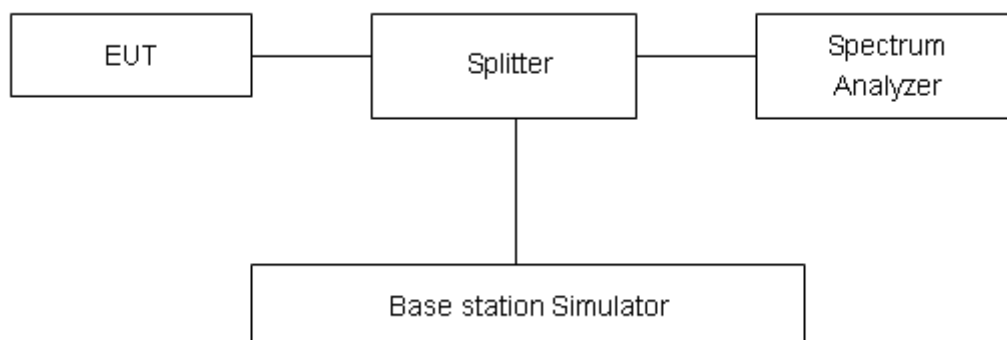

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM 850 CH-Low



GSM 850 CH-High




GSM 850 GPRS CH-Low



GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low

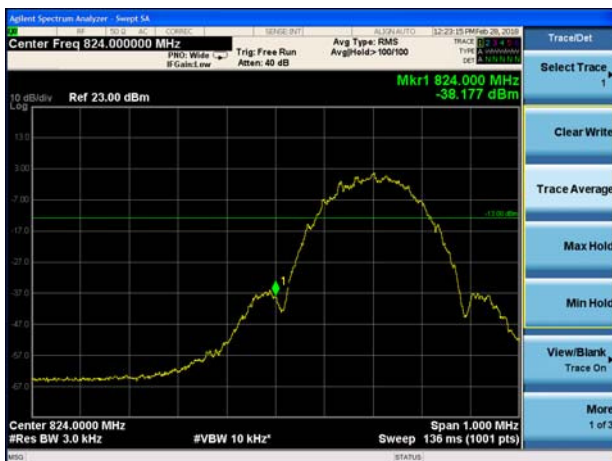

GSM 850 EGPRS CH-High




WCDMA Band V CH-Low




WCDMA Band V CH-High




LTE Band 5 QPSK 1.4MHz CH-Low 1RB

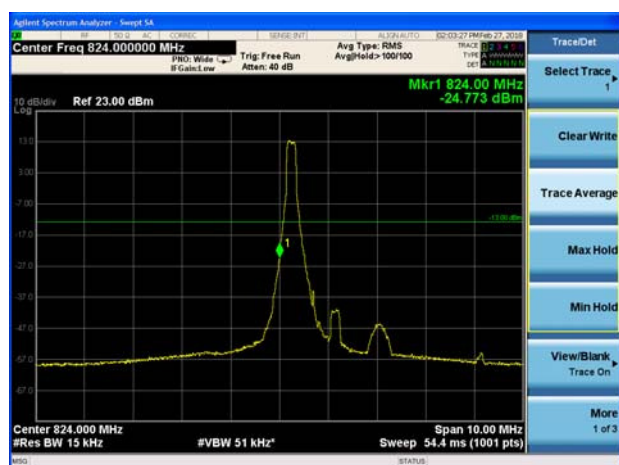


LTE Band 5 QPSK 1.4MHz CH-High 1RB

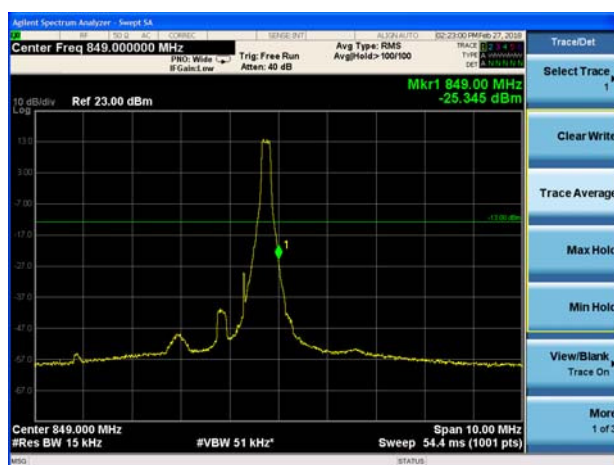

LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

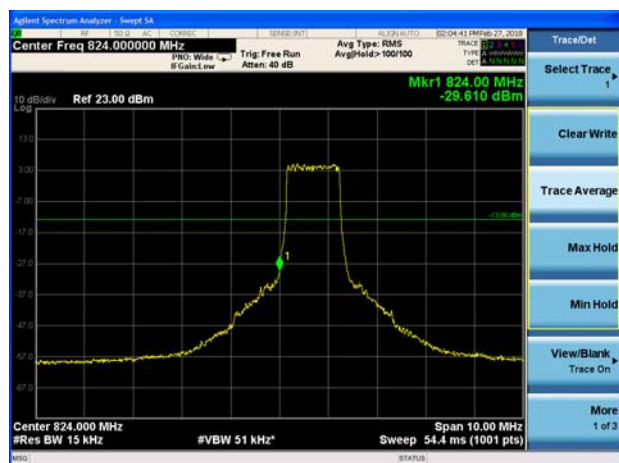


LTE Band 5 QPSK 1.4MHz CH-High 100%RB

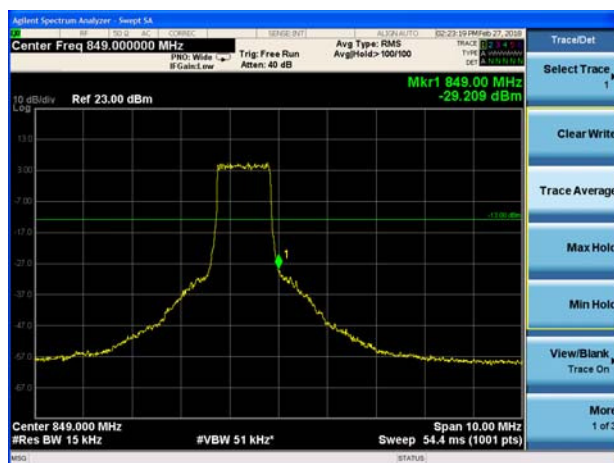





LTE Band 5 QPSK 3MHz CH-Low 1RB

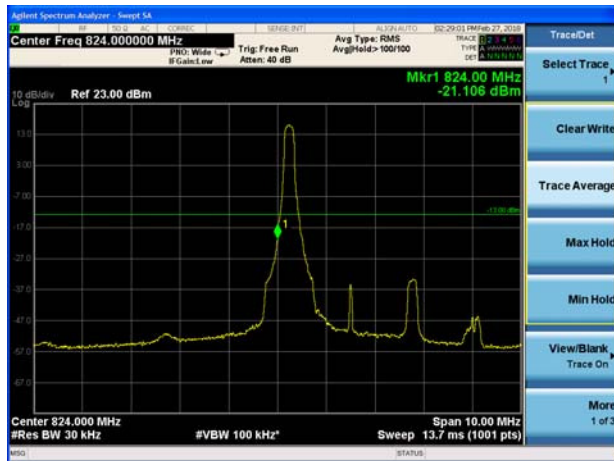

LTE Band 5 QPSK 3MHz CH-High 1RB

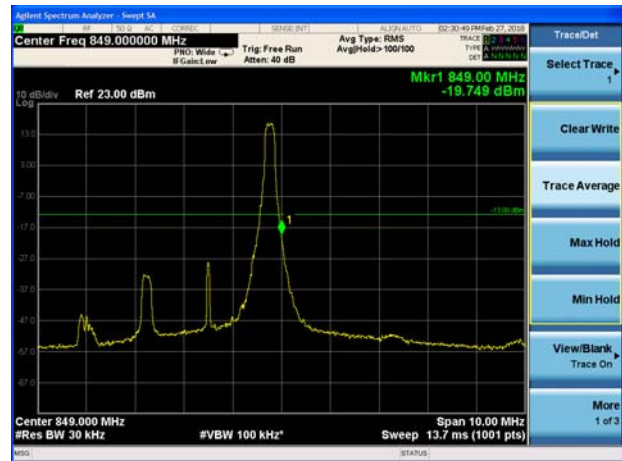


LTE Band 5 QPSK 3MHz CH-Low 100%RB

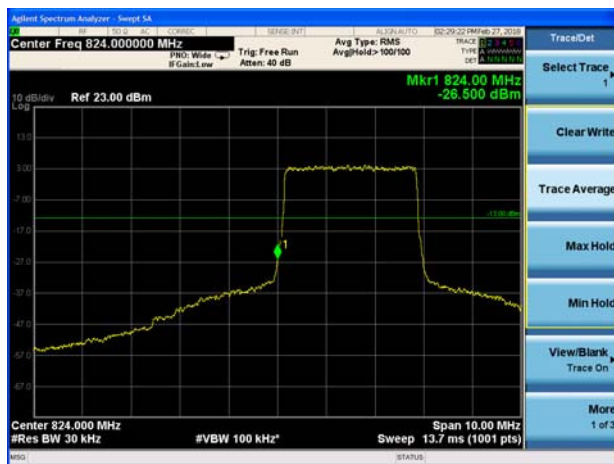


LTE Band 5 QPSK 3MHz CH-High 100%RB



LTE Band 5 QPSK 5MHz CH-Low 1RB

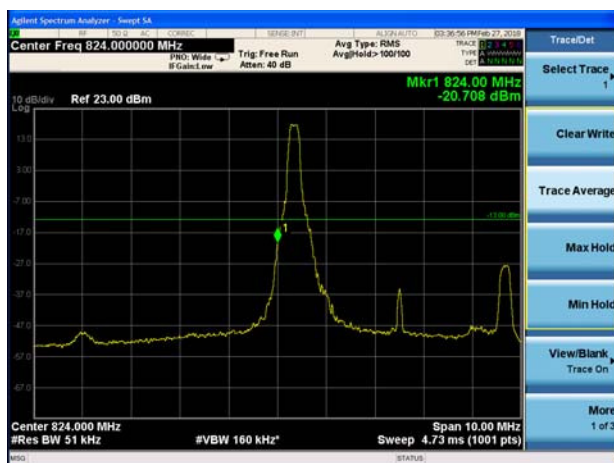

LTE Band 5 QPSK 5MHz CH-High 1RB

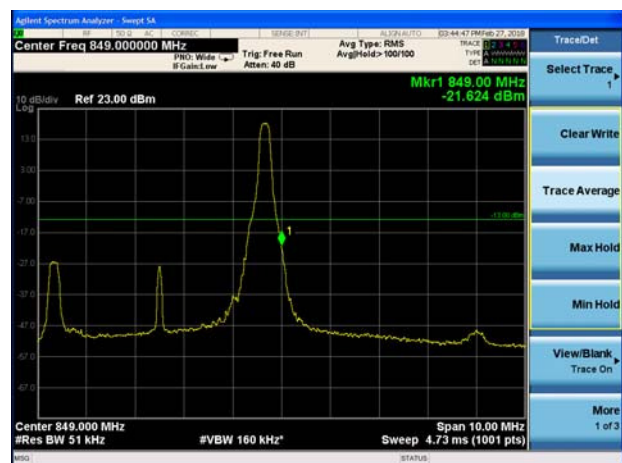




LTE Band 5 QPSK 5MHz CH-Low 100%RB




LTE Band 5 QPSK 5MHz CH-High 100%RB




LTE Band 5 QPSK 10MHz CH-Low 1RB

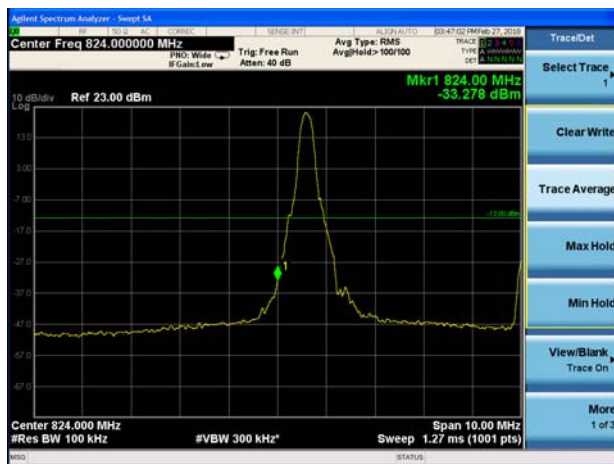


LTE Band 5 QPSK 10MHz CH-High 1RB

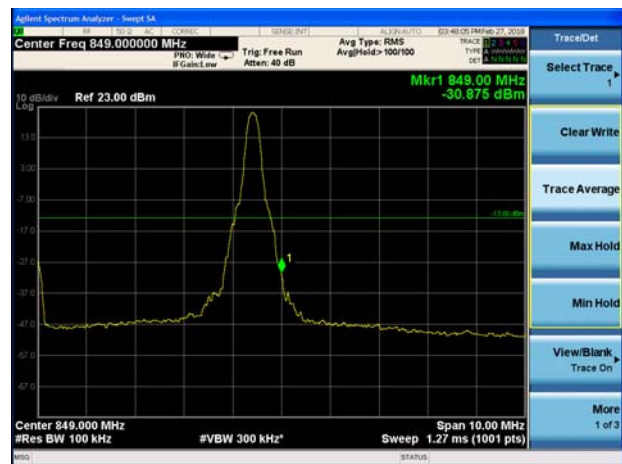

LTE Band 5 QPSK 10MHz CH-Low 100%RB

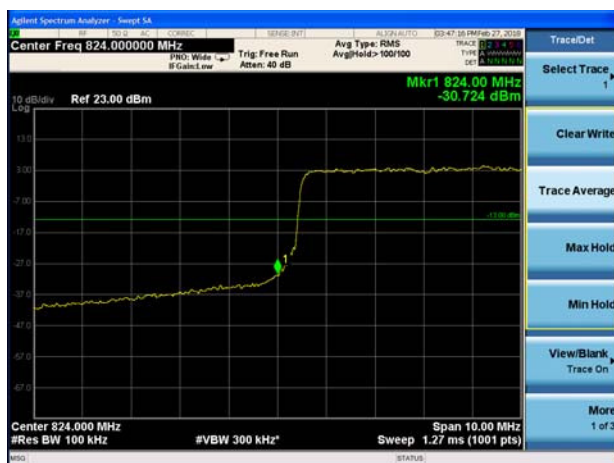


LTE Band 5 QPSK 10MHz CH-High 100%RB

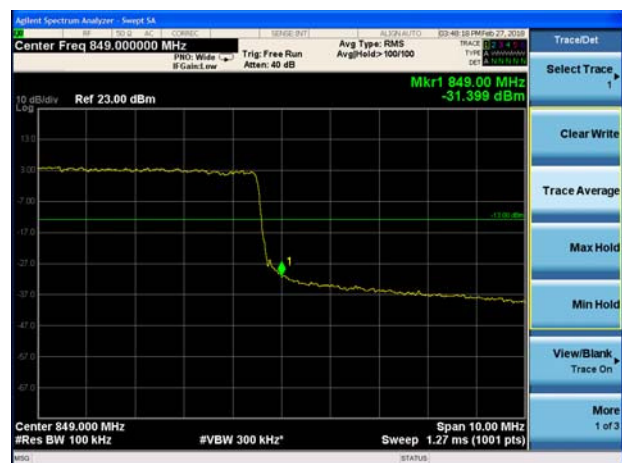





LTE Band 5 16QAM 1.4MHz CH-Low 1RB

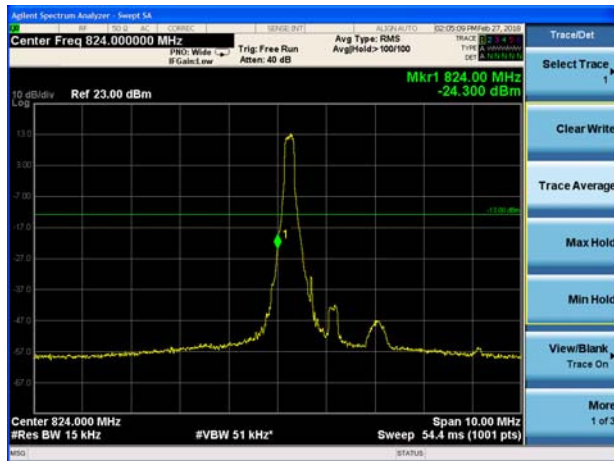


LTE Band 5 16QAM 1.4MHz CH-High 1RB

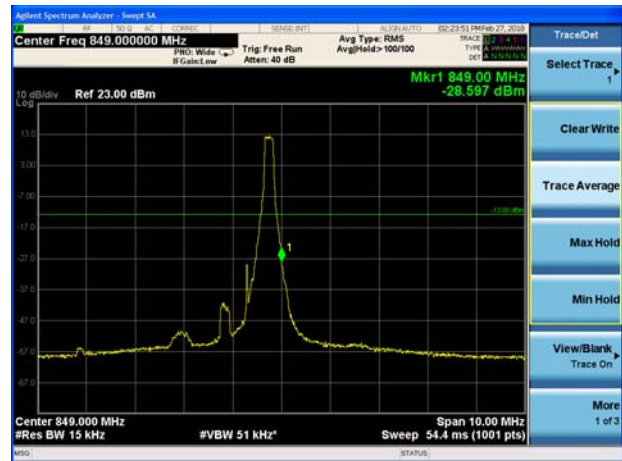


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

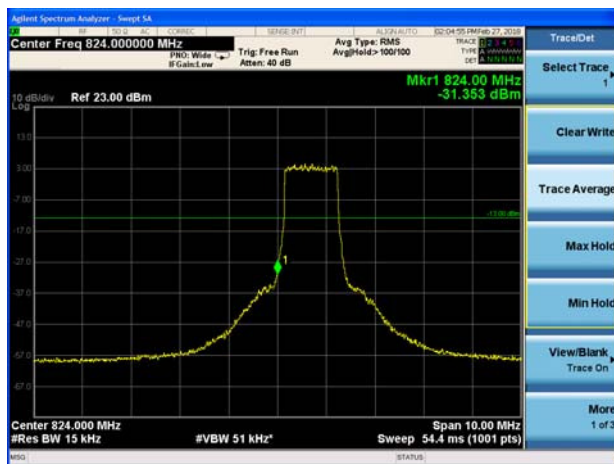


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

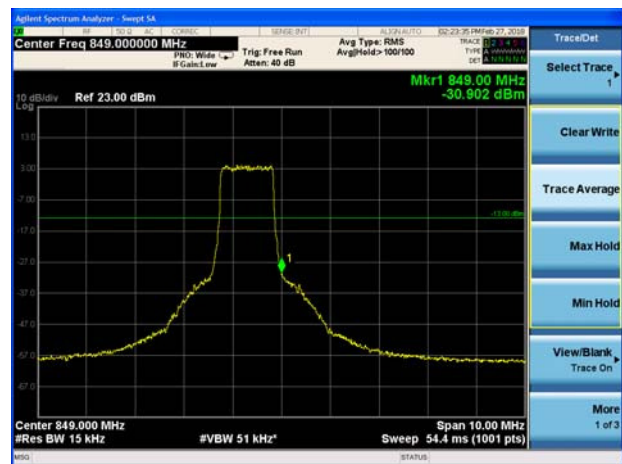

LTE Band 5 16QAM 3MHz CH-Low 1RB

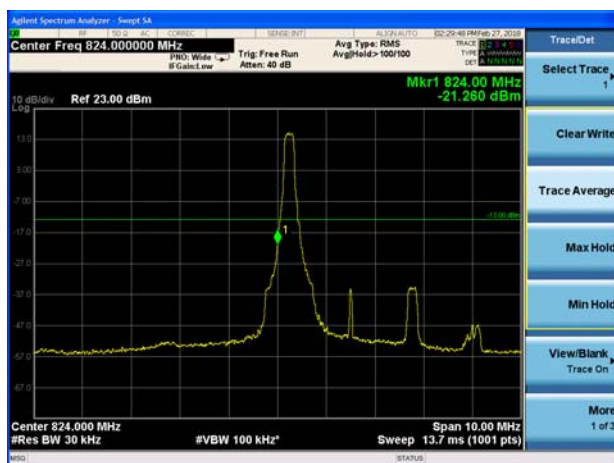

LTE Band 5 16QAM 3MHz CH-High 1RB

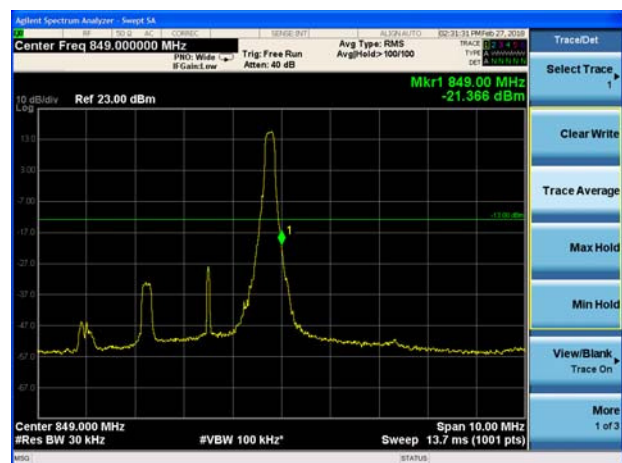




LTE Band 5 16QAM 3MHz CH-Low 100%RB




LTE Band 5 16QAM 3MHz CH-High 100%RB



LTE Band 5 16QAM 5MHz CH-Low 1RB

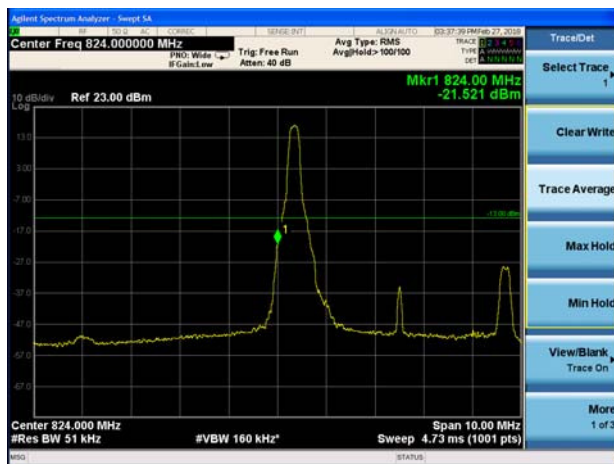

LTE Band 5 16QAM 5MHz CH-High 1RB

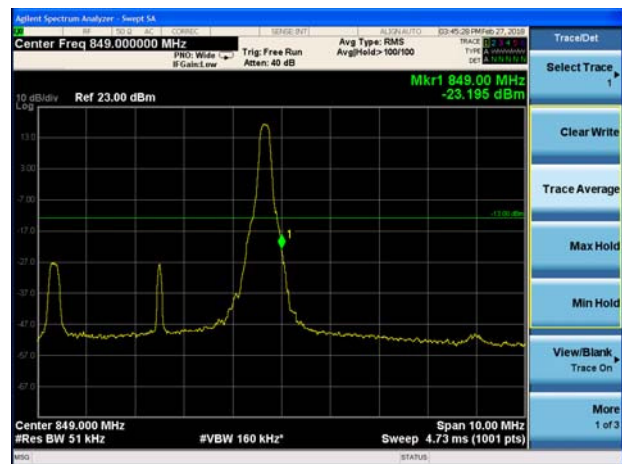

LTE Band 5 16QAM 5MHz CH-Low 100%RB




LTE Band 5 16QAM 5MHz CH-High 100%RB






LTE Band 5 16QAM 10MHz CH-Low 1RB

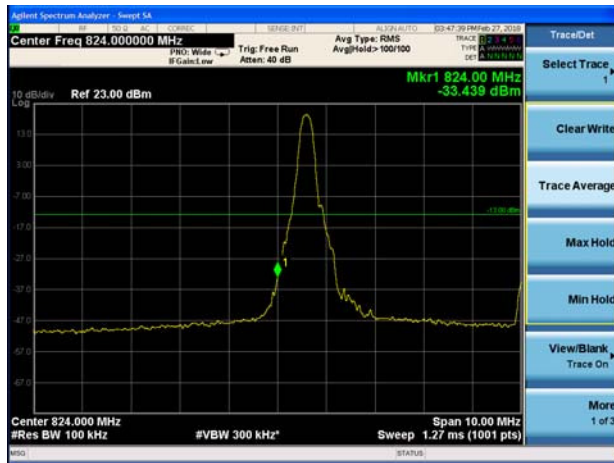

LTE Band 5 16QAM 10MHz CH-High 1RB

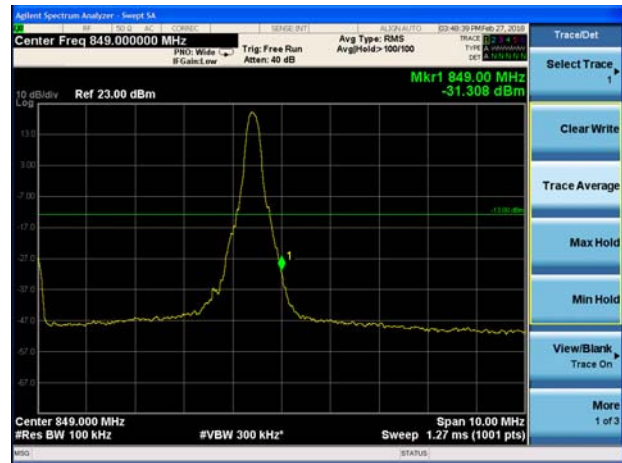

LTE Band 5 16QAM 10MHz CH-Low 100%RB



LTE Band 5 16QAM 10MHz CH-High 100%RB



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

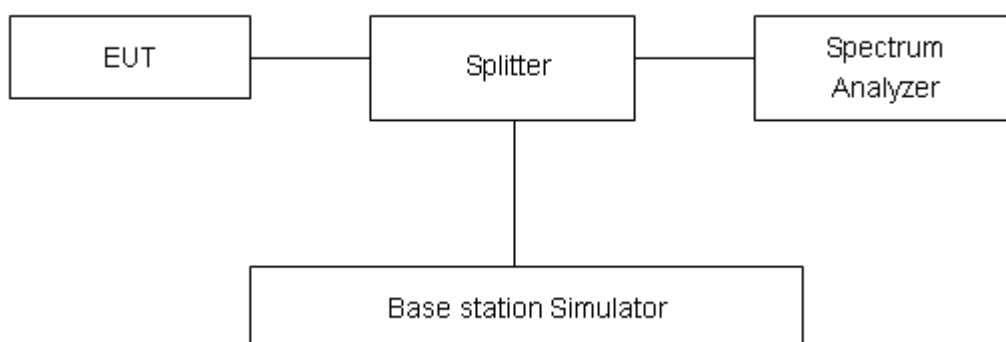

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GSM)	128	824.2	34.20	32.99	1.21	≤13	PASS
	190	836.6	33.80	32.62	1.18	≤13	PASS
	251	848.8	33.76	32.53	1.23	≤13	PASS
GPRS 850 (GMSK)	128	824.2	28.00	26.68	1.32	≤13	PASS
	190	836.6	27.92	26.65	1.27	≤13	PASS
	251	848.8	27.91	26.67	1.24	≤13	PASS
EGPRS 850 (8-PSK)	128	824.2	21.14	19.80	1.34	≤13	PASS
	190	836.6	20.99	19.66	1.33	≤13	PASS
	251	848.8	20.39	19.00	1.39	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	26.88	23.86	3.02	≤13	PASS
	4183	836.6	26.77	23.78	2.99	≤13	PASS
	4233	846.6	26.77	23.85	2.92	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	27.35	22.29	5.06	≤13	PASS
		20525	836.5	27.43	22.37	5.06	≤13	PASS
		20643	848.3	27.48	22.47	5.01	≤13	PASS
	3	20415	825.5	27.51	22.32	5.19	≤13	PASS
		20525	836.5	27.57	22.41	5.16	≤13	PASS
		20635	847.5	27.58	22.50	5.08	≤13	PASS
	5	20425	826.5	27.53	22.30	5.23	≤13	PASS
		20525	836.5	28.39	22.40	5.99	≤13	PASS
		20625	846.5	27.56	22.48	5.08	≤13	PASS
	10	20450	829	27.50	22.33	5.17	≤13	PASS
		20525	836.5	27.49	22.33	5.16	≤13	PASS
		20600	844	27.44	22.43	5.01	≤13	PASS
16QAM	1.4	20407	824.7	27.11	21.20	5.91	≤13	PASS
		20525	836.5	27.49	21.48	6.01	≤13	PASS
		20643	848.3	27.24	21.36	5.88	≤13	PASS
	3	20415	825.5	27.27	21.23	6.04	≤13	PASS
		20525	836.5	27.59	21.52	6.07	≤13	PASS
		20635	847.5	27.32	21.39	5.93	≤13	PASS
	5	20425	826.5	27.26	21.21	6.05	≤13	PASS
		20525	836.5	26.65	21.48	5.17	≤13	PASS
		20625	846.5	27.21	21.34	5.87	≤13	PASS
	10	20450	829	27.23	21.19	6.04	≤13	PASS
		20525	836.5	27.42	21.44	5.98	≤13	PASS
		20600	844	27.16	21.31	5.85	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.82V.

Test setup

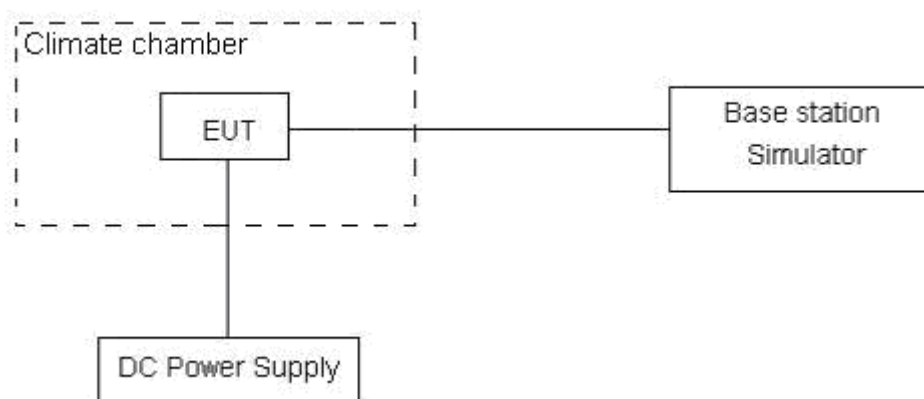

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Result

Mode	Test status	Test Results (ppm)			Limit (ppm)	Conclusion
		GSM (GMSK)	GPRS (GMSK)	EGPRS (8PSK)		
GSM 850 Middle Channel	-30°C/Normal Voltage	0.04020	0.03774	0.03451	2.5	PASS
	-20°C/Normal Voltage	-0.02101	-0.00455	-0.01063	2.5	PASS
	-10°C/Normal Voltage	0.01629	0.01552	0.02356	2.5	PASS
	0°C/Normal Voltage	0.03459	0.04578	0.04084	2.5	PASS
	10°C/Normal Voltage	-0.01721	-0.02119	-0.00763	2.5	PASS
	20°C/Normal Voltage	0.01464	0.01292	0.01846	2.5	PASS
	30°C/Normal Voltage	0.02453	0.03971	0.02650	2.5	PASS
	40°C/Normal Voltage	-0.01897	-0.01279	-0.02598	2.5	PASS
	50°C/Normal Voltage	0.01863	0.03097	0.02337	2.5	PASS
	55°C/Normal Voltage	0.02996	0.04161	-0.00261	2.5	PASS
	20°C/Minimum Voltage	-0.01405	-0.00596	0.03321	2.5	PASS
	20°C/Maximum Voltage	0.01937	0.02583	-0.02562	2.5	PASS
/	/	RMC			/	/
WCDMA Band V Middle Channel	-30°C/Normal Voltage	0.02464			2.5	PASS
	-20°C/Normal Voltage	0.02152			2.5	PASS
	-10°C/Normal Voltage	0.02220			2.5	PASS
	0°C/Normal Voltage	0.02333			2.5	PASS
	10°C/Normal Voltage	0.02449			2.5	PASS
	20°C/Normal Voltage	-0.00080			2.5	PASS
	30°C/Normal Voltage	-0.00052			2.5	PASS
	40°C/Normal Voltage	0.04388			2.5	PASS
	50°C/Normal Voltage	0.04382			2.5	PASS
	55°C/Normal Voltage	0.04708			2.5	PASS
	20°C/Minimum Voltage	0.04424			2.5	PASS
	20°C/Maximum Voltage	0.04437			2.5	PASS



Bandwidth	Test status	LTE Band 5 Middle Channel Test Results (ppm)			
		QPSK	16QAM	Limit (ppm)	Conclusion
1.4MHz	-30°C/Normal Voltage	0.00098	0.00595	2.5	PASS
	-20°C/Normal Voltage	0.00349	0.00456	2.5	PASS
	-10°C/Normal Voltage	-0.00008	0.00670	2.5	PASS
	0°C/Normal Voltage	0.00461	0.00202	2.5	PASS
	10°C/Normal Voltage	0.00313	0.00449	2.5	PASS
	20°C/Normal Voltage	0.00202	0.00401	2.5	PASS
	30°C/Normal Voltage	0.00252	0.00178	2.5	PASS
	40°C/Normal Voltage	0.00162	0.00102	2.5	PASS
	50°C/Normal Voltage	0.00186	0.00147	2.5	PASS
	55°C/Normal Voltage	0.00263	0.00235	2.5	PASS
	20°C/Minimum Voltage	0.00383	0.00147	2.5	PASS
	20°C/Maximum Voltage	-0.00036	0.00248	2.5	PASS
3MHz	-30°C/Normal Voltage	0.00547	0.00608	2.5	PASS
	-20°C/Normal Voltage	0.00232	0.00281	2.5	PASS
	-10°C/Normal Voltage	0.00070	0.00496	2.5	PASS
	0°C/Normal Voltage	0.00261	0.00554	2.5	PASS
	10°C/Normal Voltage	0.00011	0.00211	2.5	PASS
	20°C/Normal Voltage	0.00035	0.00256	2.5	PASS
	30°C/Normal Voltage	0.00403	0.00119	2.5	PASS
	40°C/Normal Voltage	0.00381	-0.00012	2.5	PASS
	50°C/Normal Voltage	0.00416	0.00051	2.5	PASS
	55°C/Normal Voltage	0.00635	0.00421	2.5	PASS
	20°C/Minimum Voltage	0.00649	0.00585	2.5	PASS
	20°C/Maximum Voltage	0.00265	0.00391	2.5	PASS
5MHz	-30°C/Normal Voltage	0.00384	0.00432	2.5	PASS
	-20°C/Normal Voltage	0.00393	0.00223	2.5	PASS
	-10°C/Normal Voltage	-0.00023	0.00382	2.5	PASS
	0°C/Normal Voltage	0.00291	0.00112	2.5	PASS
	10°C/Normal Voltage	-0.00052	0.00342	2.5	PASS
	20°C/Normal Voltage	0.00191	0.00279	2.5	PASS
	30°C/Normal Voltage	0.00173	0.00114	2.5	PASS
	40°C/Normal Voltage	0.00394	0.00519	2.5	PASS
	50°C/Normal Voltage	0.00381	0.00346	2.5	PASS
	55°C/Normal Voltage	0.00487	0.00158	2.5	PASS
	20°C/Minimum Voltage	0.00304	0.00183	2.5	PASS
	20°C/Maximum Voltage	0.00046	0.00278	2.5	PASS
10MHz	-30°C/Normal Voltage	0.00505	0.00172	2.5	PASS



	-20°C/Normal Voltage	0.00429	0.00225	2.5	PASS
	-10°C/Normal Voltage	0.00312	0.00251	2.5	PASS
	0°C/Normal Voltage	0.00425	-0.00119	2.5	PASS
	10°C/Normal Voltage	-0.00028	0.00334	2.5	PASS
	20°C/Normal Voltage	0.00179	0.00425	2.5	PASS
	30°C/Normal Voltage	0.00297	0.00143	2.5	PASS
	40°C/Normal Voltage	0.00268	0.00847	2.5	PASS
	50°C/Normal Voltage	-0.00023	0.00297	2.5	PASS
	55°C/Normal Voltage	0.00077	0.00092	2.5	PASS
	20°C/Minimum Voltage	-0.00131	0.00101	2.5	PASS
	20°C/Maximum Voltage	0.00499	0.00112	2.5	PASS

5.7. Spurious Emissions at Antenna Terminals


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

Test setup

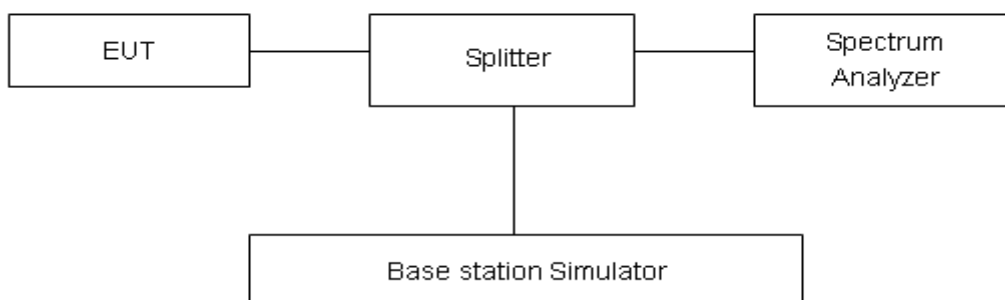

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-18GHz	1.407 dB


Test Result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

The signal beyond the limit is carrier.


GSM 850 CH-Low 30MHz ~ 1GHz

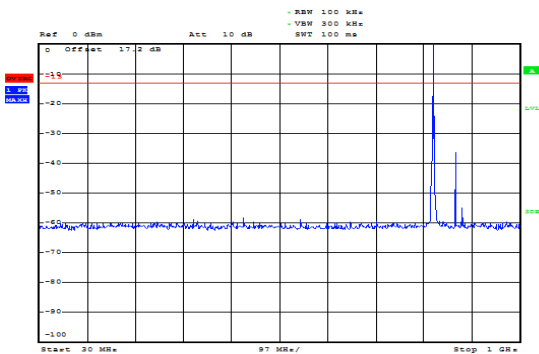


WCDMA Band V CH-Low 1GHz ~ 9GHz

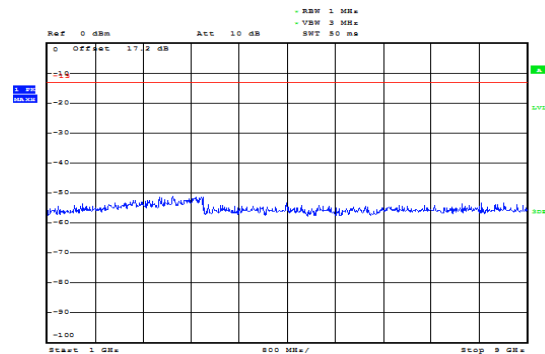


GSM 850 CH-Middle 30MHz ~ 1GHz

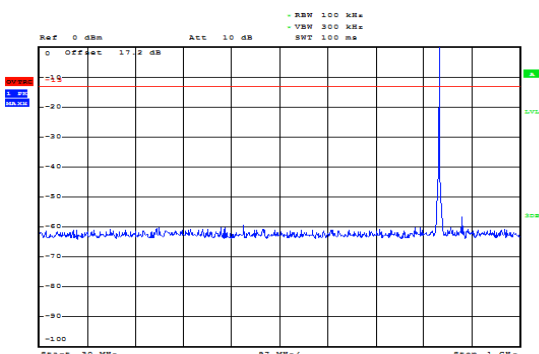


WCDMA Band V CH-Middle 1GHz ~ 9GHz

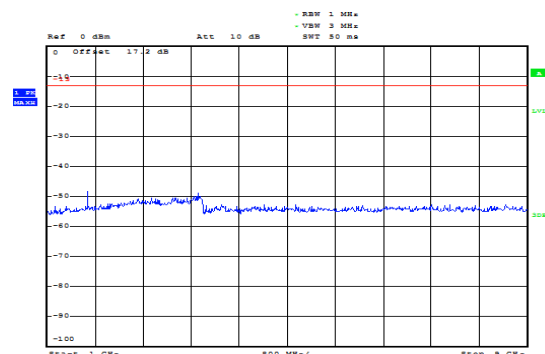

GSM 850 CH-High 30MHz ~ 1GHz

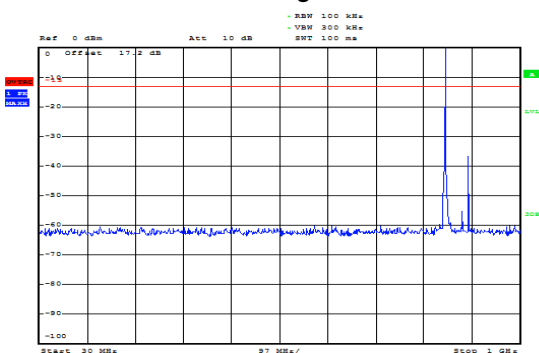


WCDMA Band V CH-High 1GHz ~ 9GHz

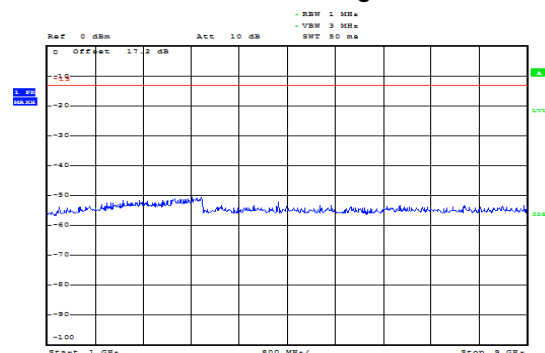





LTE Band 5 1.4MHz CH-Low 30MHz~1GHz

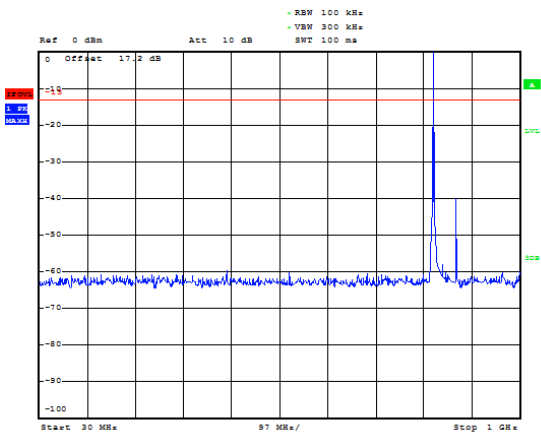


LTE Band 5 1.4MHz CH-Low 1GHz~9GHz

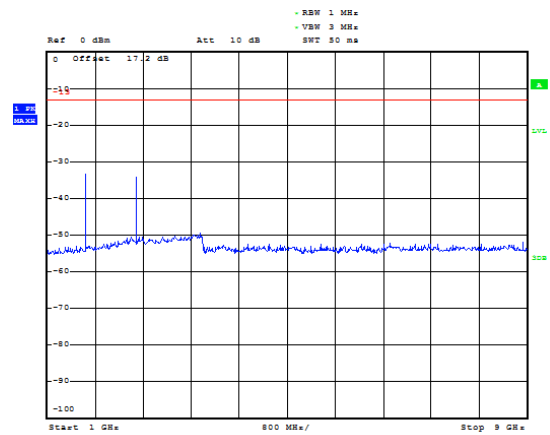


LTE Band 5 1.4MHz CH-Middle 30MHz~1GHz

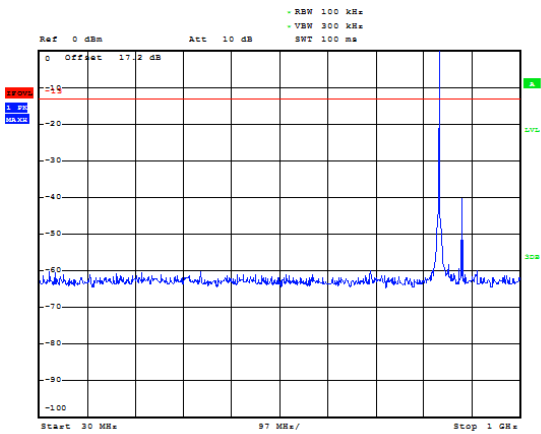


LTE Band 5 1.4MHz CH-Middle 1GHz~9GHz

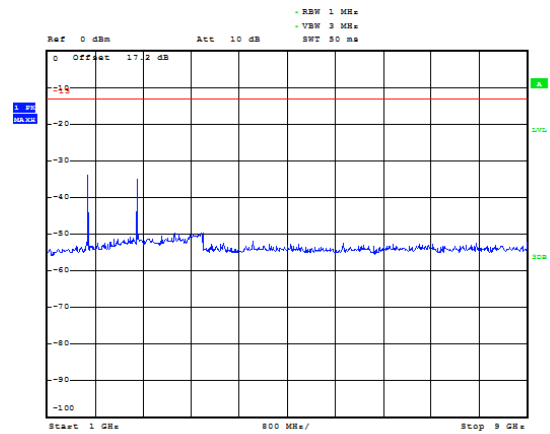

LTE Band 5 1.4MHz CH-High 30MHz~1GHz

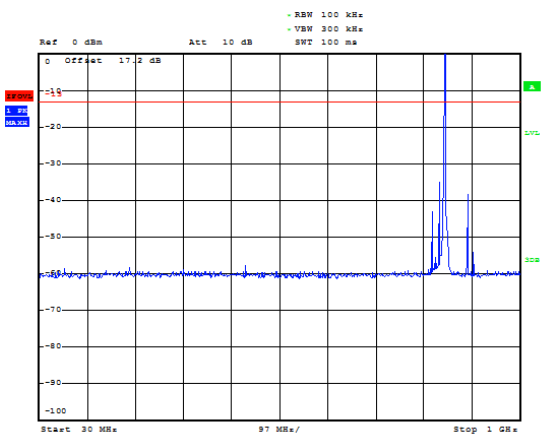


LTE Band 5 1.4MHz CH-High 1GHz~9GHz

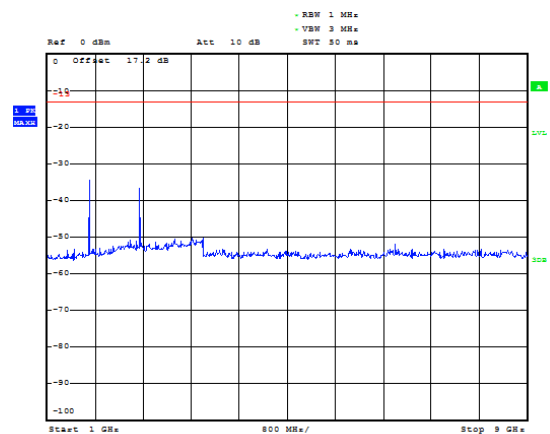





LTE Band 5 3MHz CH-Low 30MHz~1GHz

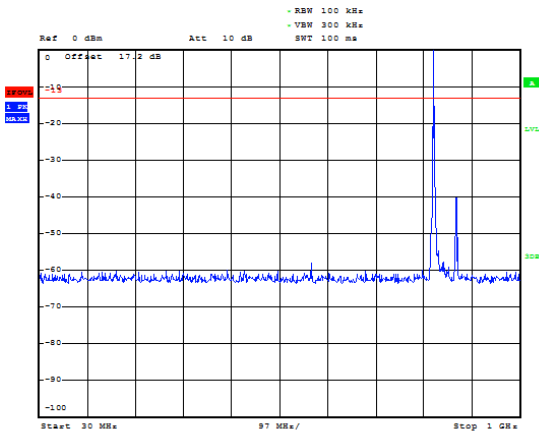


LTE Band 5 3MHz CH-Low 1GHz~9GHz

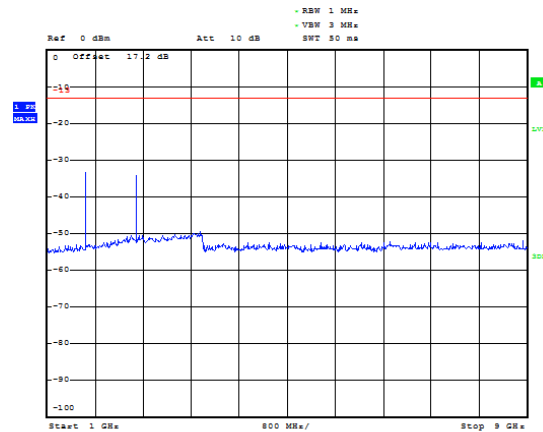


LTE Band 5 3MHz CH-Middle 30MHz~1GHz

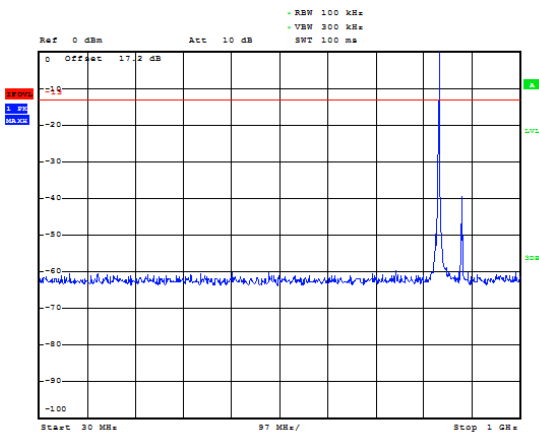


LTE Band 5 3MHz CH-Middle 1GHz~9GHz

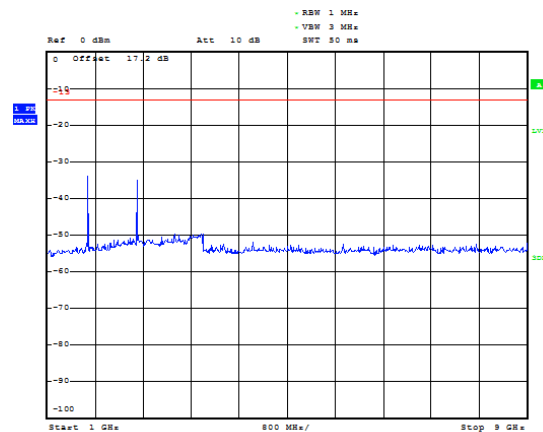

LTE Band 5 3MHz CH-High 30MHz~1GHz

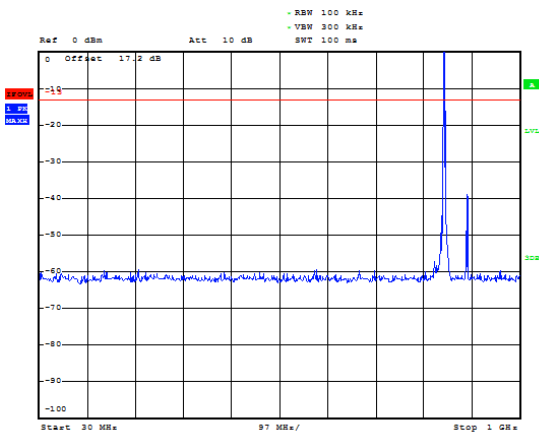


LTE Band 5 3MHz CH-High 1GHz~9GHz

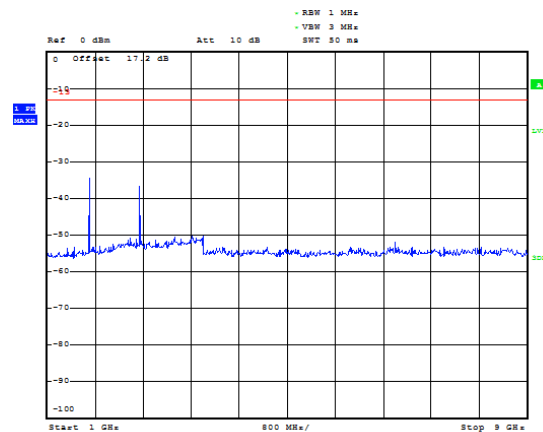





LTE Band 5 5MHz CH-Low 30MHz~1GHz

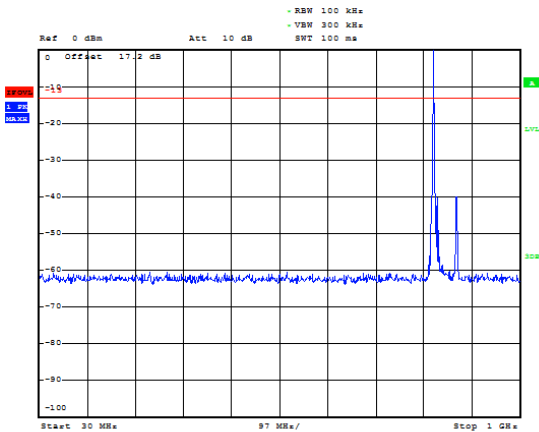


LTE Band 5 5MHz CH-Low 1GHz~9GHz

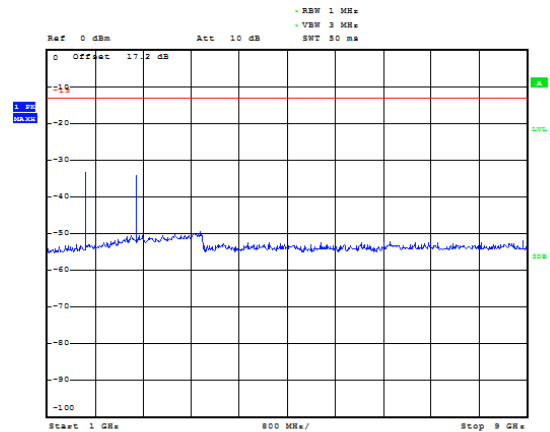


LTE Band 5 5MHz CH-Middle 30MHz~1GHz

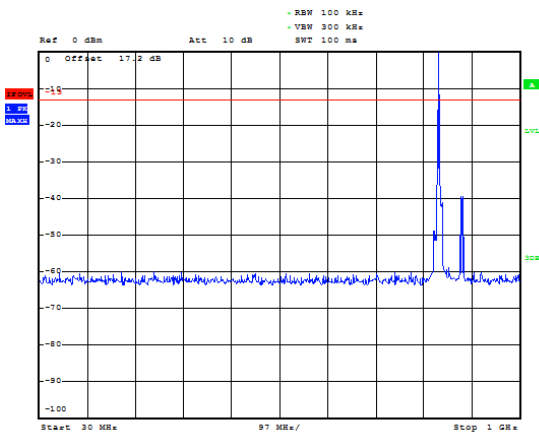


LTE Band 5 5MHz CH-Middle 1GHz~9GHz

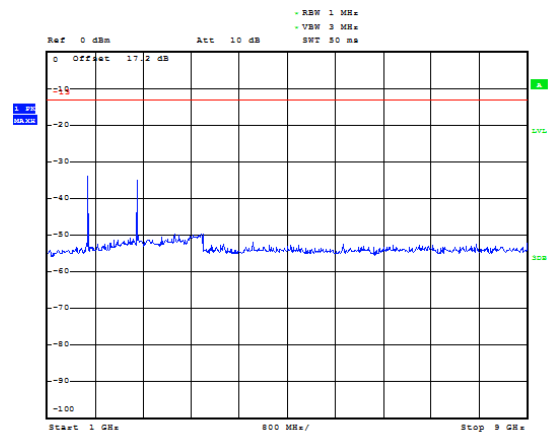

LTE Band 5 5MHz CH-High 30MHz~1GHz

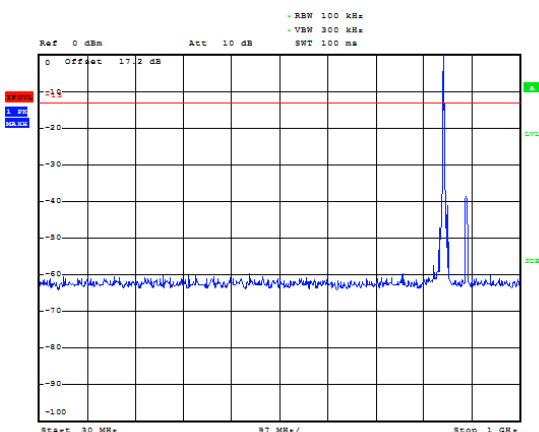


LTE Band 5 5MHz CH-High 1GHz~9GHz

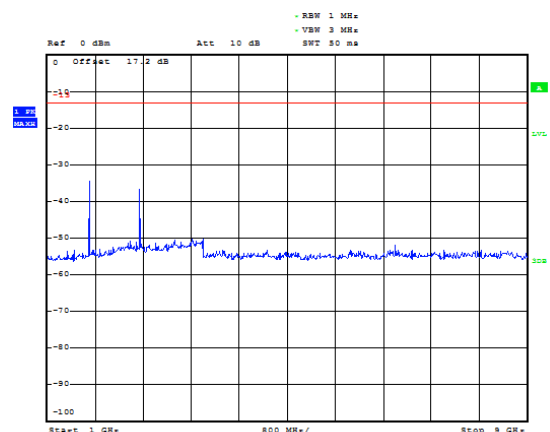





LTE Band 5 10MHz CH-Low 30MHz~1GHz

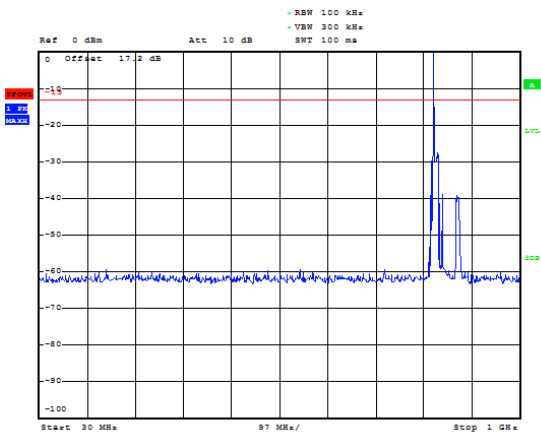


LTE Band 5 10MHz CH-Low 1GHz~9GHz

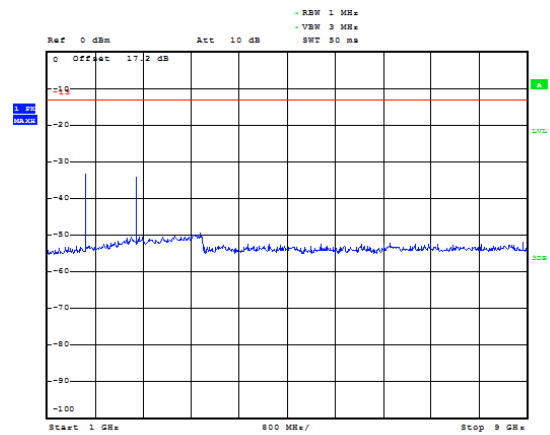


LTE Band 5 10MHz CH-Middle 30MHz~1GHz

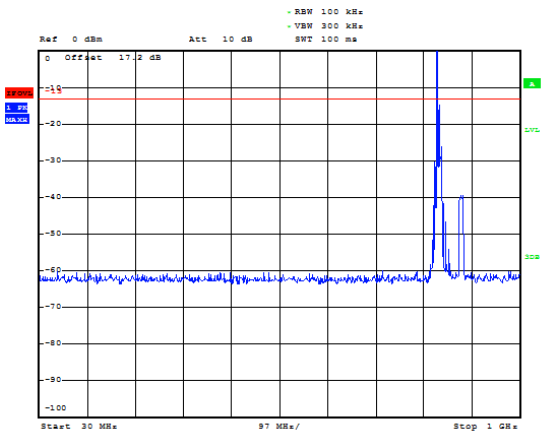


LTE Band 5 10MHz CH-Middle 1GHz~9GHz

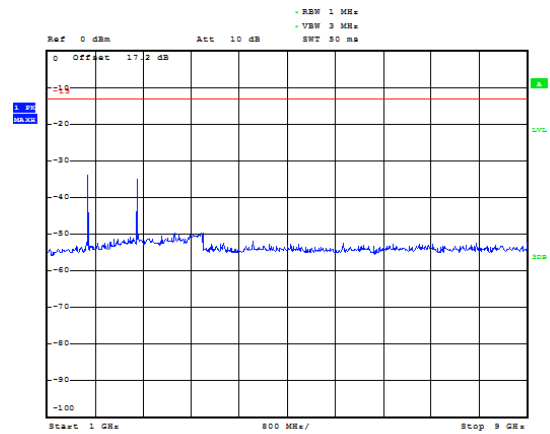

LTE Band 5 10MHz CH-High 30MHz~1GHz

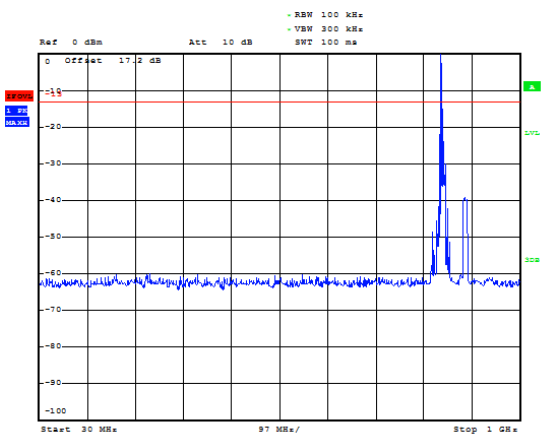

LTE Band 5 10MHz CH-High 1GHz~9GHz

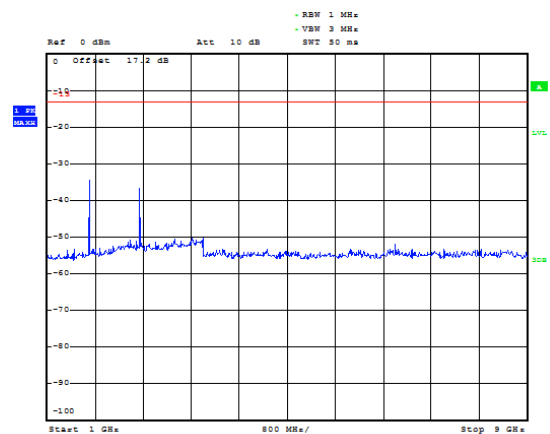

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

Mode	Frequency	Peak (dBm)	Limit (dBm)	Margin (dB)
B5_CHLOW_1.4M_RB1_1-9GHz	1650.6	-32.378	-13	19.378
B5_CHMID_1.4M_RB1_1-9GHz	1674.8	-32.773	-13	19.773
B5_CHLOW_3M_RB1_1-9GHz	1645.9	-32.351	-13	19.351
B5_CHMID_3M_RB1_1-9GHz	1664.5	-32.685	-13	19.685
B5_CHLOW_5M_RB1_1-9GHz	1652.4	-32.248	-13	19.248
B5_CHMID_5M_RB1_1-9GHz	1683.0	-32.668	-13	19.668
B5_CHLOW_10M_RB1_1-9GHz	1656.1	-32.255	-13	19.255
B5_CHMID_10M_RB1_1-9GHz	1622.5	-32.633	-13	19.633

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

1. The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-E (2016).
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

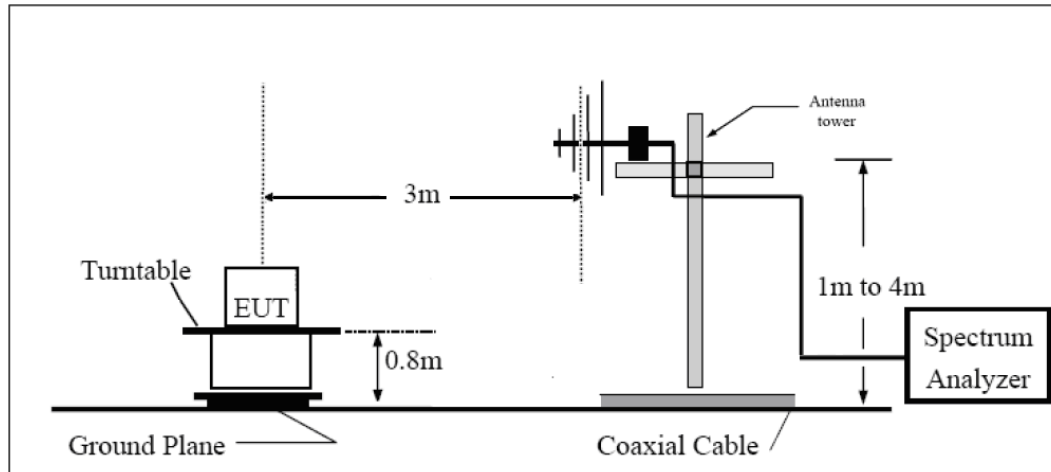

Above 1GHz

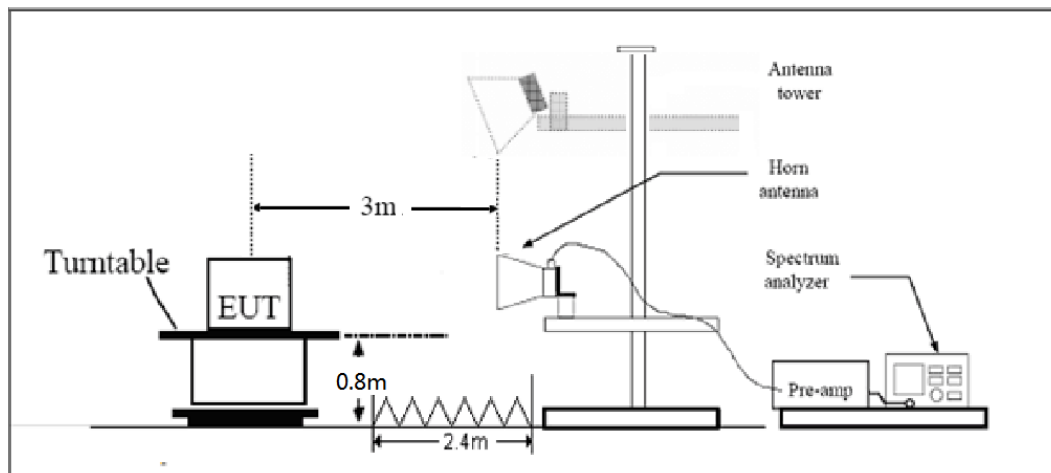

Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

GSM 850 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1648.4	-52.98	2	10.15	Horizontal	-46.98	-13.0	33.98	270
3	2472.6	-55.27	2.51	11.35	Horizontal	-48.58	-13.0	35.58	135
4	3296.8	-56.46	4.2	10.85	Horizontal	-51.96	-13.0	38.96	315
5	4121.0	-51.98	5.2	11.35	Horizontal	-47.98	-13.0	34.98	315
6	4945.2	-49.70	5.5	11.95	Horizontal	-45.40	-13.0	32.40	270
7	5769.4	-51.80	5.7	13.55	Horizontal	-46.10	-13.0	33.10	45
8	6593.6	-49.50	6.3	13.75	Horizontal	-44.20	-13.0	31.20	315
9	7417.8	-46.40	6.8	13.85	Horizontal	-41.50	-13.0	28.50	90
10	8242.0	-48.00	6.9	14.25	Horizontal	-42.80	-13.0	29.80	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-51.79	2	10.75	Horizontal	-45.19	-13.0	32.19	270
3	2509.8	-54.49	2.51	11.05	Horizontal	-48.10	-13.0	35.10	315
4	3346.4	-56.88	4.2	11.15	Horizontal	-52.08	-13.0	39.08	180
5	4183.0	-53.64	5.2	11.15	Horizontal	-49.84	-13.0	36.84	45
6	5019.6	-50.40	5.5	11.95	Horizontal	-46.10	-13.0	33.10	315
7	5856.2	-52.64	5.7	13.55	Horizontal	-46.94	-13.0	33.94	270
8	6692.8	-49.82	6.3	13.75	Horizontal	-44.52	-13.0	31.52	135
9	7529.4	-46.76	6.8	13.85	Horizontal	-41.86	-13.0	28.86	270
10	8366.0	-47.44	6.9	14.25	Horizontal	-42.24	-13.0	29.24	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



GSM 850 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1697.6	-52.72	2	10.15	Horizontal	-46.72	-13.0	33.72	135
3	2546.4	-55.15	2.51	11.05	Horizontal	-48.76	-13.0	35.76	270
4	3395.2	-56.17	4.2	11.15	Horizontal	-51.37	-13.0	38.37	225
5	4244.0	-52.85	5.2	11.15	Horizontal	-49.05	-13.0	36.05	180
6	5092.8	-50.60	5.5	11.95	Horizontal	-46.30	-13.0	33.30	45
7	5941.6	-51.50	5.7	13.55	Horizontal	-45.80	-13.0	32.80	225
8	6790.4	-50.20	6.3	13.75	Horizontal	-44.90	-13.0	31.90	180
9	7639.2	-46.40	6.8	13.85	Horizontal	-41.50	-13.0	28.50	45
10	8488.0	-47.90	6.9	14.25	Horizontal	-42.70	-13.0	29.70	315
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									



WCDMA Band V CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1652.8	-58.03	2	10.15	Horizontal	-52.03	-13.00	39.03	45
3	2479.2	-57.27	2.51	11.35	Horizontal	-50.58	-13.00	37.58	225
4	3305.6	-54.31	4.2	10.85	Horizontal	-49.81	-13.00	36.81	270
5	4132.0	-50.90	5.2	11.35	Horizontal	-46.90	-13.00	33.90	90
6	4958.4	-50.50	5.5	11.95	Horizontal	-46.20	-13.00	33.20	225
7	5784.8	-50.70	5.7	13.55	Horizontal	-45.00	-13.00	32.00	45
8	6611.2	-50.00	6.3	13.75	Horizontal	-44.70	-13.00	31.70	180
9	7437.6	-48.00	6.8	13.85	Horizontal	-43.10	-13.00	30.10	270
10	8264.0	-48.00	6.9	14.25	Horizontal	-42.80	-13.00	29.80	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-58.96	2	10.75	Horizontal	-52.36	-13.00	39.36	180
3	2509.8	-57.07	2.51	11.05	Horizontal	-50.68	-13.00	37.68	90
4	3346.4	-56.45	4.2	11.15	Horizontal	-51.65	-13.00	38.65	225
5	4183.0	-53.06	5.2	11.15	Horizontal	-49.26	-13.00	36.26	270
6	5019.6	-51.89	5.5	11.95	Horizontal	-47.59	-13.00	34.59	135
7	5856.2	-52.60	5.7	13.55	Horizontal	-46.90	-13.00	33.90	180
8	6692.8	-48.90	6.3	13.75	Horizontal	-43.60	-13.00	30.60	315
9	7529.4	-46.14	6.8	13.85	Horizontal	-41.24	-13.00	28.24	225
10	8366.0	-49.07	6.9	14.25	Horizontal	-43.87	-13.00	30.87	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1693.2	-58.76	2	10.15	Horizontal	-52.76	-13.00	39.76	270
3	2539.8	-56.62	2.51	11.05	Horizontal	-50.23	-13.00	37.23	90
4	3386.4	-56.12	4.2	11.15	Horizontal	-51.32	-13.00	38.32	270
5	4233.0	-53.51	5.2	11.15	Horizontal	-49.71	-13.00	36.71	180
6	5079.6	-51.50	5.5	11.95	Horizontal	-47.20	-13.00	34.20	90
7	5926.2	-52.20	5.7	13.55	Horizontal	-46.50	-13.00	33.50	135
8	6772.8	-49.20	6.3	13.75	Horizontal	-43.90	-13.00	30.90	90
9	7619.4	-46.00	6.8	13.85	Horizontal	-41.10	-13.00	28.10	45
10	8466.0	-48.80	6.9	14.25	Horizontal	-43.60	-13.00	30.60	180
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

LTE Band 5 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1649.4	-59.41	2.00	10.75	Horizontal	-52.81	-13.00	39.81	225
3	2474.1	-55.92	2.51	11.05	Horizontal	-49.53	-13.00	36.53	45
4	3298.8	-56.57	4.20	11.15	Horizontal	-51.77	-13.00	38.77	135
5	4123.5	-53.75	5.20	11.15	Horizontal	-49.95	-13.00	36.95	45
6	4948.2	-51.33	5.50	11.95	Horizontal	-47.03	-13.00	34.03	270
7	5772.9	-53.42	5.70	13.55	Horizontal	-47.72	-13.00	34.72	180
8	6597.6	-51.00	6.30	13.75	Horizontal	-45.70	-13.00	32.70	270
9	7422.3	-47.52	6.80	13.85	Horizontal	-42.62	-13.00	29.62	135
10	8247.0	-48.51	6.90	14.25	Horizontal	-43.31	-13.00	30.31	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-59.89	2.00	10.75	Horizontal	-53.29	-13.00	40.29	180
3	2509.5	-56.12	2.51	11.05	Horizontal	-49.73	-13.00	36.73	270
4	3346.0	-56.45	4.20	11.15	Horizontal	-51.65	-13.00	38.65	180
5	4182.5	-54.12	5.20	11.15	Horizontal	-50.32	-13.00	37.32	45
6	5019.0	-51.35	5.50	11.95	Horizontal	-47.05	-13.00	34.05	180
7	5855.5	-54.11	5.70	13.55	Horizontal	-48.41	-13.00	35.41	270
8	6692.0	-50.67	6.30	13.75	Horizontal	-45.37	-13.00	32.37	135
9	7528.5	-47.44	6.80	13.85	Horizontal	-42.54	-13.00	29.54	45
10	8365.0	-47.36	6.90	14.25	Horizontal	-42.16	-13.00	29.16	270
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

LTE Band 5 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1696.6	-55.55	2.00	10.75	Horizontal	-48.95	-13.00	35.95	135
3	2544.9	-56.94	2.51	11.05	Horizontal	-50.55	-13.00	37.55	270
4	3393.2	-56.72	4.20	11.15	Horizontal	-51.92	-13.00	38.92	180
5	4241.5	-53.82	5.20	11.15	Horizontal	-50.02	-13.00	37.02	270
6	5089.8	-51.43	5.50	11.95	Horizontal	-47.13	-13.00	34.13	135
7	5938.1	-52.01	5.70	13.55	Horizontal	-46.31	-13.00	33.31	270
8	6786.4	-49.47	6.30	13.75	Horizontal	-44.17	-13.00	31.17	225
9	7634.7	-47.65	6.80	13.85	Horizontal	-42.75	-13.00	29.75	180
10	8483.0	-48.80	6.90	14.25	Horizontal	-43.60	-13.00	30.60	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									



LTE Band 5 3MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1651.0	-60.73	2.00	10.75	Horizontal	-54.13	-13.00	41.13	135
3	2474.2	-56.33	2.51	11.05	Horizontal	-49.94	-13.00	36.94	45
4	3373.9	-55.94	4.20	11.15	Horizontal	-51.14	-13.00	38.14	315
5	4105.1	-53.37	5.20	11.15	Horizontal	-49.57	-13.00	36.57	270
6	5008.1	-52.02	5.50	11.95	Horizontal	-47.72	-13.00	34.72	135
7	5935.5	-52.89	5.70	13.55	Horizontal	-47.19	-13.00	34.19	270
8	6739.5	-49.66	6.30	13.75	Horizontal	-44.36	-13.00	31.36	315
9	7543.5	-47.26	6.80	13.85	Horizontal	-42.36	-13.00	29.36	135
10	8347.5	-47.74	6.90	14.25	Horizontal	-42.54	-13.00	29.54	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 3MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-60.13	2.00	10.75	Horizontal	-53.53	-13.00	40.53	270
3	2509.5	-57.15	2.51	11.05	Horizontal	-50.76	-13.00	37.76	180
4	3403.5	-56.76	4.20	11.15	Horizontal	-51.96	-13.00	38.96	315
5	4107.8	-53.62	5.20	11.15	Horizontal	-49.82	-13.00	36.82	90
6	4983.4	-52.45	5.50	11.95	Horizontal	-48.15	-13.00	35.15	225
7	5911.9	-53.55	5.70	13.55	Horizontal	-47.85	-13.00	34.85	225
8	6840.4	-51.18	6.30	13.75	Horizontal	-45.88	-13.00	32.88	180
9	7768.9	-47.88	6.80	13.85	Horizontal	-42.98	-13.00	29.98	45
10	8697.4	-48.14	6.90	14.25	Horizontal	-42.94	-13.00	29.94	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 3MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1711.3	-59.76	2.00	10.75	Horizontal	-53.16	-13.00	40.16	270
3	2545.6	-57.65	2.51	11.05	Horizontal	-51.26	-13.00	38.26	135
4	3351.8	-56.36	4.20	11.15	Horizontal	-51.56	-13.00	38.56	270
5	4082.6	-52.73	5.20	11.15	Horizontal	-48.93	-13.00	35.93	135
6	5001.8	-52.35	5.50	11.95	Horizontal	-48.05	-13.00	35.05	270
7	5967.8	-52.23	5.70	13.55	Horizontal	-46.53	-13.00	33.53	315
8	6792.8	-49.69	6.30	13.75	Horizontal	-44.39	-13.00	31.39	135
9	7669.5	-47.32	6.80	13.85	Horizontal	-42.42	-13.00	29.42	270
10	8546.2	-47.83	6.90	14.25	Horizontal	-42.63	-13.00	29.63	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1653.0	-59.67	2.00	10.75	Horizontal	-53.07	-13.00	40.07	180
3	2479.5	-56.39	2.51	11.05	Horizontal	-50.00	-13.00	37.00	270
4	3356.3	-56.93	4.20	11.15	Horizontal	-52.13	-13.00	39.13	315
5	4007.6	-53.89	5.20	11.15	Horizontal	-50.09	-13.00	37.09	270
6	4994.3	-52.77	5.50	11.95	Horizontal	-48.47	-13.00	35.47	270
7	5961.8	-52.69	5.70	13.55	Horizontal	-46.99	-13.00	33.99	45
8	6796.8	-51.10	6.30	13.75	Horizontal	-45.80	-13.00	32.80	315
9	7631.8	-47.87	6.80	13.85	Horizontal	-42.97	-13.00	29.97	90
10	8466.8	-49.12	6.90	14.25	Horizontal	-43.92	-13.00	30.92	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.2	-58.77	2.00	10.75	Horizontal	-52.17	-13.00	39.17	270
3	2509.5	-57.43	2.51	11.05	Horizontal	-51.04	-13.00	38.04	180
4	3466.2	-56.75	4.20	11.15	Horizontal	-51.95	-13.00	38.95	180
5	4215.9	-54.17	5.20	11.15	Horizontal	-50.37	-13.00	37.37	45
6	5165.6	-53.25	5.50	11.95	Horizontal	-48.95	-13.00	35.95	315
7	5815.3	-53.61	5.70	13.55	Horizontal	-47.91	-13.00	34.91	270
8	6765.0	-50.25	6.30	13.75	Horizontal	-44.95	-13.00	31.95	135
9	7614.7	-47.76	6.80	13.85	Horizontal	-42.86	-13.00	29.86	270
10	8464.4	-47.55	6.90	14.25	Horizontal	-42.35	-13.00	29.35	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1693.0	-59.30	2.00	10.75	Horizontal	-52.70	-13.00	39.70	270
3	2539.5	-56.68	2.51	11.05	Horizontal	-50.29	-13.00	37.29	135
4	3386.0	-56.64	4.20	11.15	Horizontal	-51.84	-13.00	38.84	315
5	4232.5	-54.83	5.20	11.15	Horizontal	-51.03	-13.00	38.03	270
6	5079.0	-50.93	5.50	11.95	Horizontal	-46.63	-13.00	33.63	45
7	5925.5	-52.35	5.70	13.55	Horizontal	-46.65	-13.00	33.65	315
8	6772.0	-50.87	6.30	13.75	Horizontal	-45.57	-13.00	32.57	90
9	7618.5	-48.05	6.80	13.85	Horizontal	-43.15	-13.00	30.15	225
10	8465.0	-47.34	6.90	14.25	Horizontal	-42.14	-13.00	29.14	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1658.0	-58.73	2.00	10.75	Horizontal	-52.13	-13.00	39.13	180
3	2487.0	-57.17	2.51	11.05	Horizontal	-50.78	-13.00	37.78	270
4	3316.0	-56.26	4.20	11.15	Horizontal	-51.46	-13.00	38.46	45
5	4145.0	-53.24	5.20	11.15	Horizontal	-49.44	-13.00	36.44	315
6	4974.0	-52.63	5.50	11.95	Horizontal	-48.33	-13.00	35.33	270
7	5803.0	-52.84	5.70	13.55	Horizontal	-47.14	-13.00	34.14	135
8	6632.0	-49.56	6.30	13.75	Horizontal	-44.26	-13.00	31.26	270
9	7461.0	-47.77	6.80	13.85	Horizontal	-42.87	-13.00	29.87	315
10	8290.0	-49.00	6.90	14.25	Horizontal	-43.80	-13.00	30.80	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-58.76	2.00	10.75	Horizontal	-52.16	-13.00	39.16	135
3	2509.5	-56.61	2.51	11.05	Horizontal	-50.22	-13.00	37.22	45
4	3346.0	-56.45	4.20	11.15	Horizontal	-51.65	-13.00	38.65	180
5	4182.5	-54.64	5.20	11.15	Horizontal	-50.84	-13.00	37.84	45
6	5019.0	-52.82	5.50	11.95	Horizontal	-48.52	-13.00	35.52	225
7	5855.5	-54.11	5.70	13.55	Horizontal	-48.41	-13.00	35.41	180
8	6692.0	-50.78	6.30	13.75	Horizontal	-45.48	-13.00	32.48	45
9	7528.5	-47.10	6.80	13.85	Horizontal	-42.20	-13.00	29.20	315
10	8365.0	-48.07	6.90	14.25	Horizontal	-42.87	-13.00	29.87	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1688.0	-58.94	2.00	10.75	Horizontal	-52.34	-13.00	39.34	270
3	2532.0	-56.29	2.51	11.05	Horizontal	-49.90	-13.00	36.90	270
4	3376.0	-57.36	4.20	11.15	Horizontal	-52.56	-13.00	39.56	270
5	4220.0	-52.31	5.20	11.15	Horizontal	-48.51	-13.00	35.51	45
6	5064.0	-51.77	5.50	11.95	Horizontal	-47.47	-13.00	34.47	315
7	5908.0	-52.49	5.70	13.55	Horizontal	-46.79	-13.00	33.79	90
8	6752.0	-49.66	6.30	13.75	Horizontal	-44.36	-13.00	31.36	225
9	7596.0	-48.38	6.80	13.85	Horizontal	-43.48	-13.00	30.48	180
10	8440.0	-49.42	6.90	14.25	Horizontal	-44.22	-13.00	31.22	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2017-05-14	2018-05-13
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	2017-05-14	2018-05-13
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2017-05-20	2018-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
Signal generator	R&S	SMB 100A	102594	2017-05-14	2018-05-13
Signal generator	R&S	SMR27	100365	2017-05-14	2018-05-13
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2020-01-29
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
RF Cable	Agilent	SMA 15cm	0001	2018-02-03	2018-08-02
Preamplifier	R&S	SCU18	102327	2017-06-18	2018-06-17
Software	R&S	EMC32	V 8.52.0	NA	NA

*****END OF REPORT *****

ANNEX A: Product Change Description

Huawei Technologies Co.,Ltd.

Difference Declaration Letter

Article 1: Difference description:

The difference between model ATU-L21 and ATU-L11 is show in the below table:

		Model: ATU-L21	Model: ATU-L11
Licensed Frequency	LTE BAND	B5/B7	B5/B7
	UMTS BAND	B2/B5	B2/B5
	GSM	B2/B5	B2/B5
	Antenna	Same	Same
Unlicensed Frequency	Bluetooth	4.2	4.2
	2.4G Wi-Fi	Same	Same
	NFC	Not support	Support
	Antenna	Same	Same
Hardware	Ram / Rom	Same	Same
	PCB	Same	Same
	USB Port	Same	Same
Appearance	Dimension	152.4*73*7.8	152.4*73*8.05
Accessory	Battery	Same	Same
	ExternalCharger	Same	Same
	USB label	Same	Same
	Earphone	Same	Same
others	fingerprint	Not support	Not support
	Camera	Same	Same