

Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Wireless Earbuds
Trade Mark: LOGIC, UNONU, ISWAG
Test Model: LOGIC TW18
FCC ID: O55T183823

Environmental Conditions


Temperature:	25.5°C
Relative Humidity:	55%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A

Appendix A: 20dB Emission Bandwidth**Test Result**


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.011	2401.463	2402.474	---	---
		2441	1.020	2440.466	2441.486	---	---
		2480	1.032	2479.454	2480.486	---	---
2DH5	Ant1	2402	1.305	2401.316	2402.621	---	---
		2441	1.326	2440.310	2441.636	---	---
		2480	1.317	2479.319	2480.636	---	---

Test Graphs


DH5_Ant1_2402

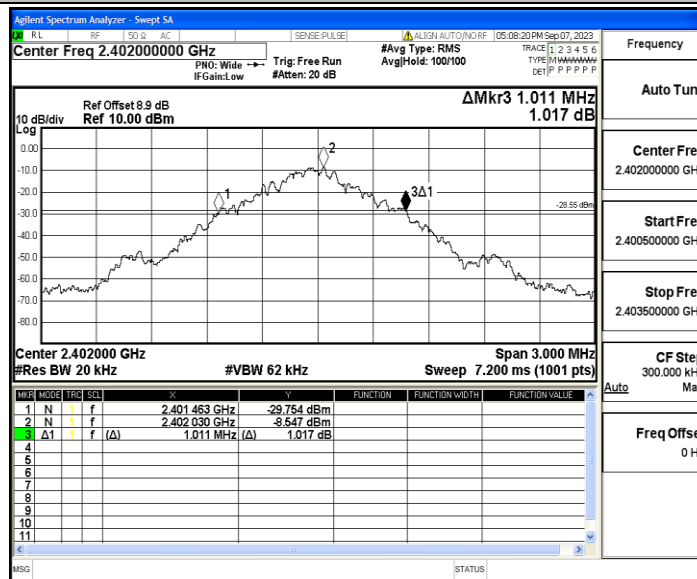


DH5_Ant1_2441

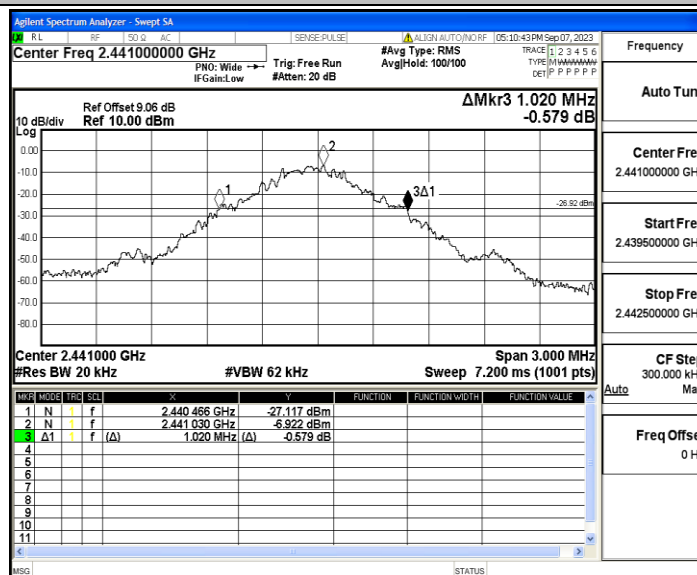


DH5_Ant1_2480

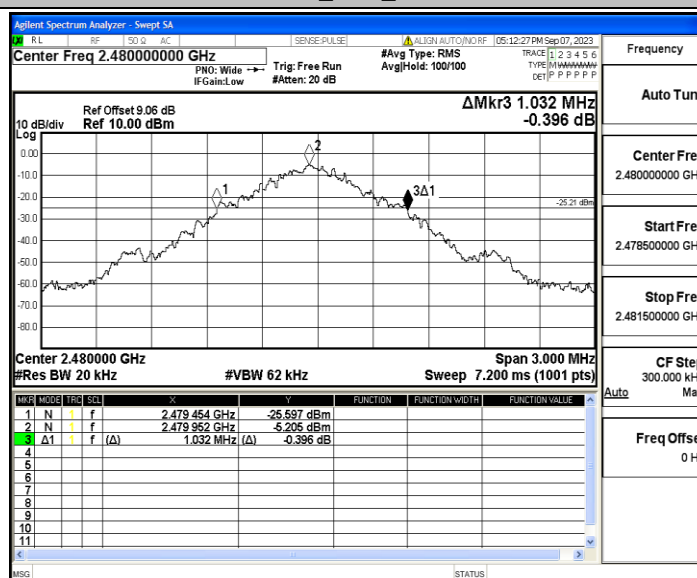


2DH5_Ant1_2402

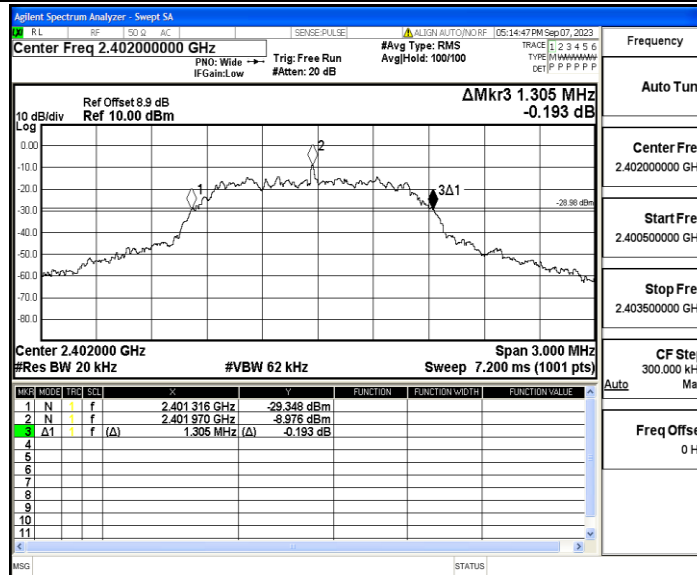

2DH5_Ant1_2441

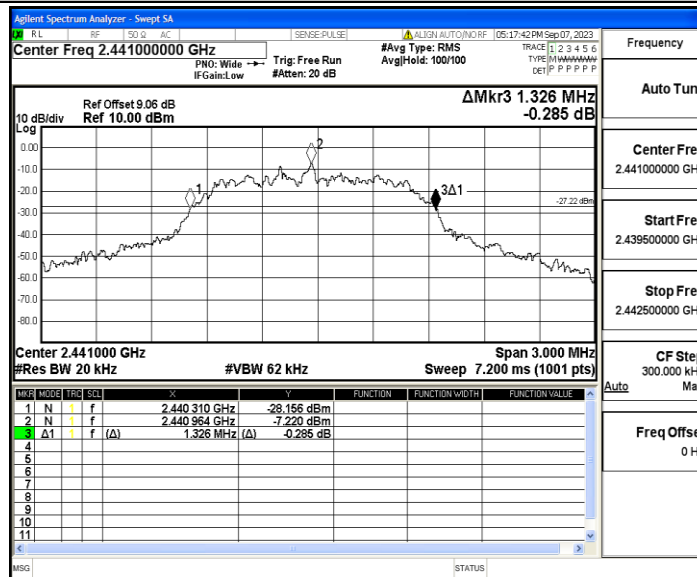

2DH5_Ant1_2480

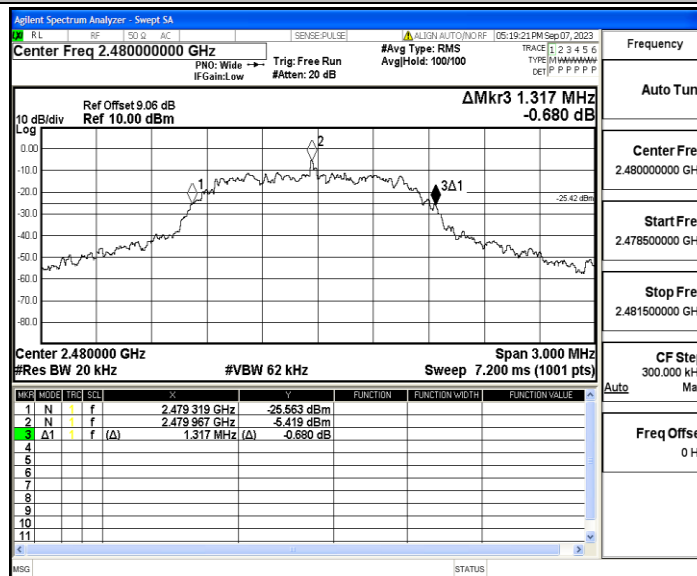


Appendix B: Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.90250	2401.5160	2402.4185	---	---
		2441	0.93919	2440.4954	2441.4346	---	---
		2480	0.92838	2479.5013	2480.4297	---	---
2DH5	Ant1	2402	1.1934	2401.3749	2402.5683	---	---
		2441	1.2063	2440.3718	2441.5781	---	---
		2480	1.2040	2479.3717	2480.5757	---	---

Test Graphs


DH5_Ant1_2402

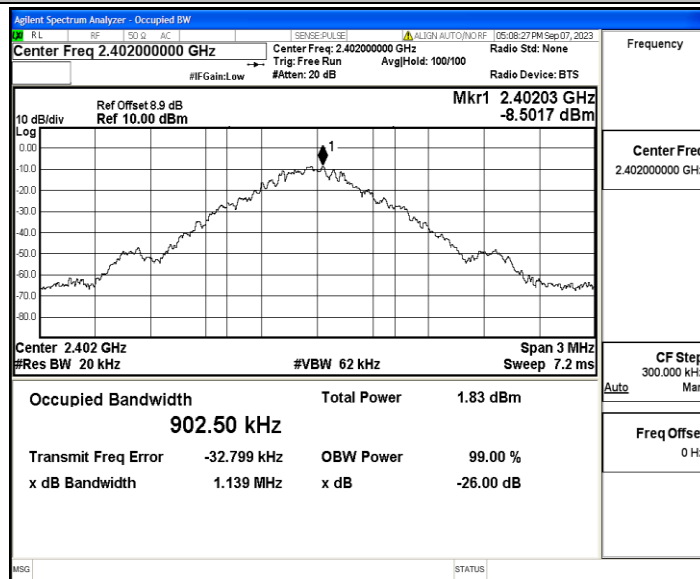


DH5_Ant1_2441

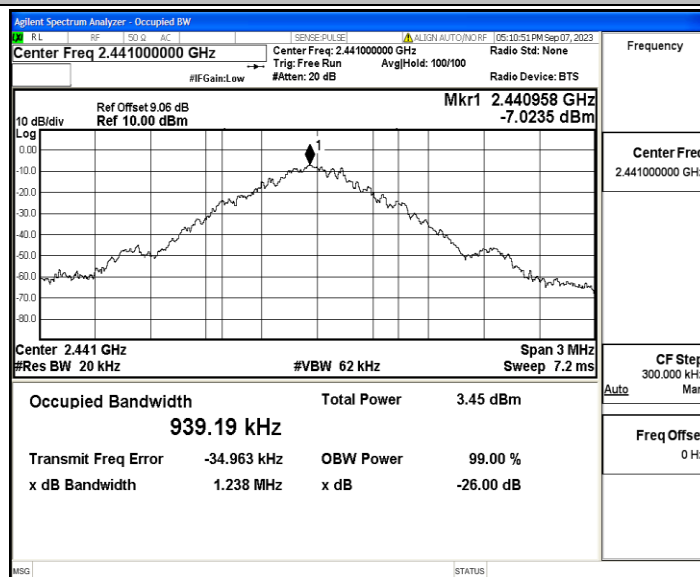

DH5_Ant1_2480

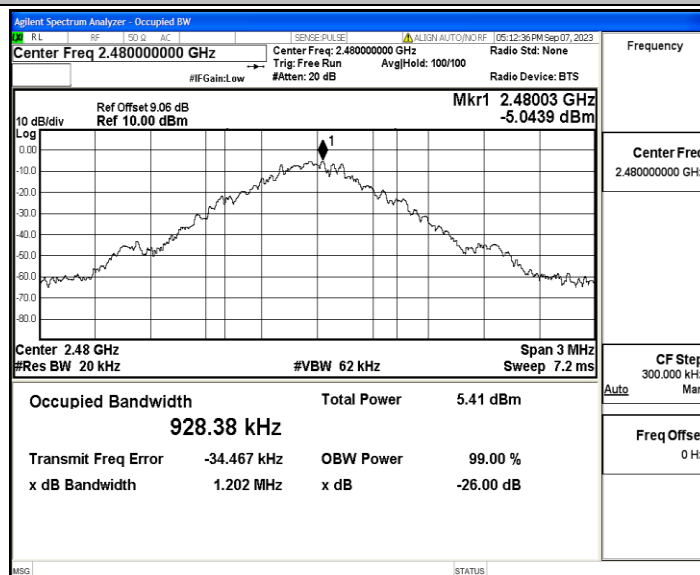

2DH5_Ant1_2402

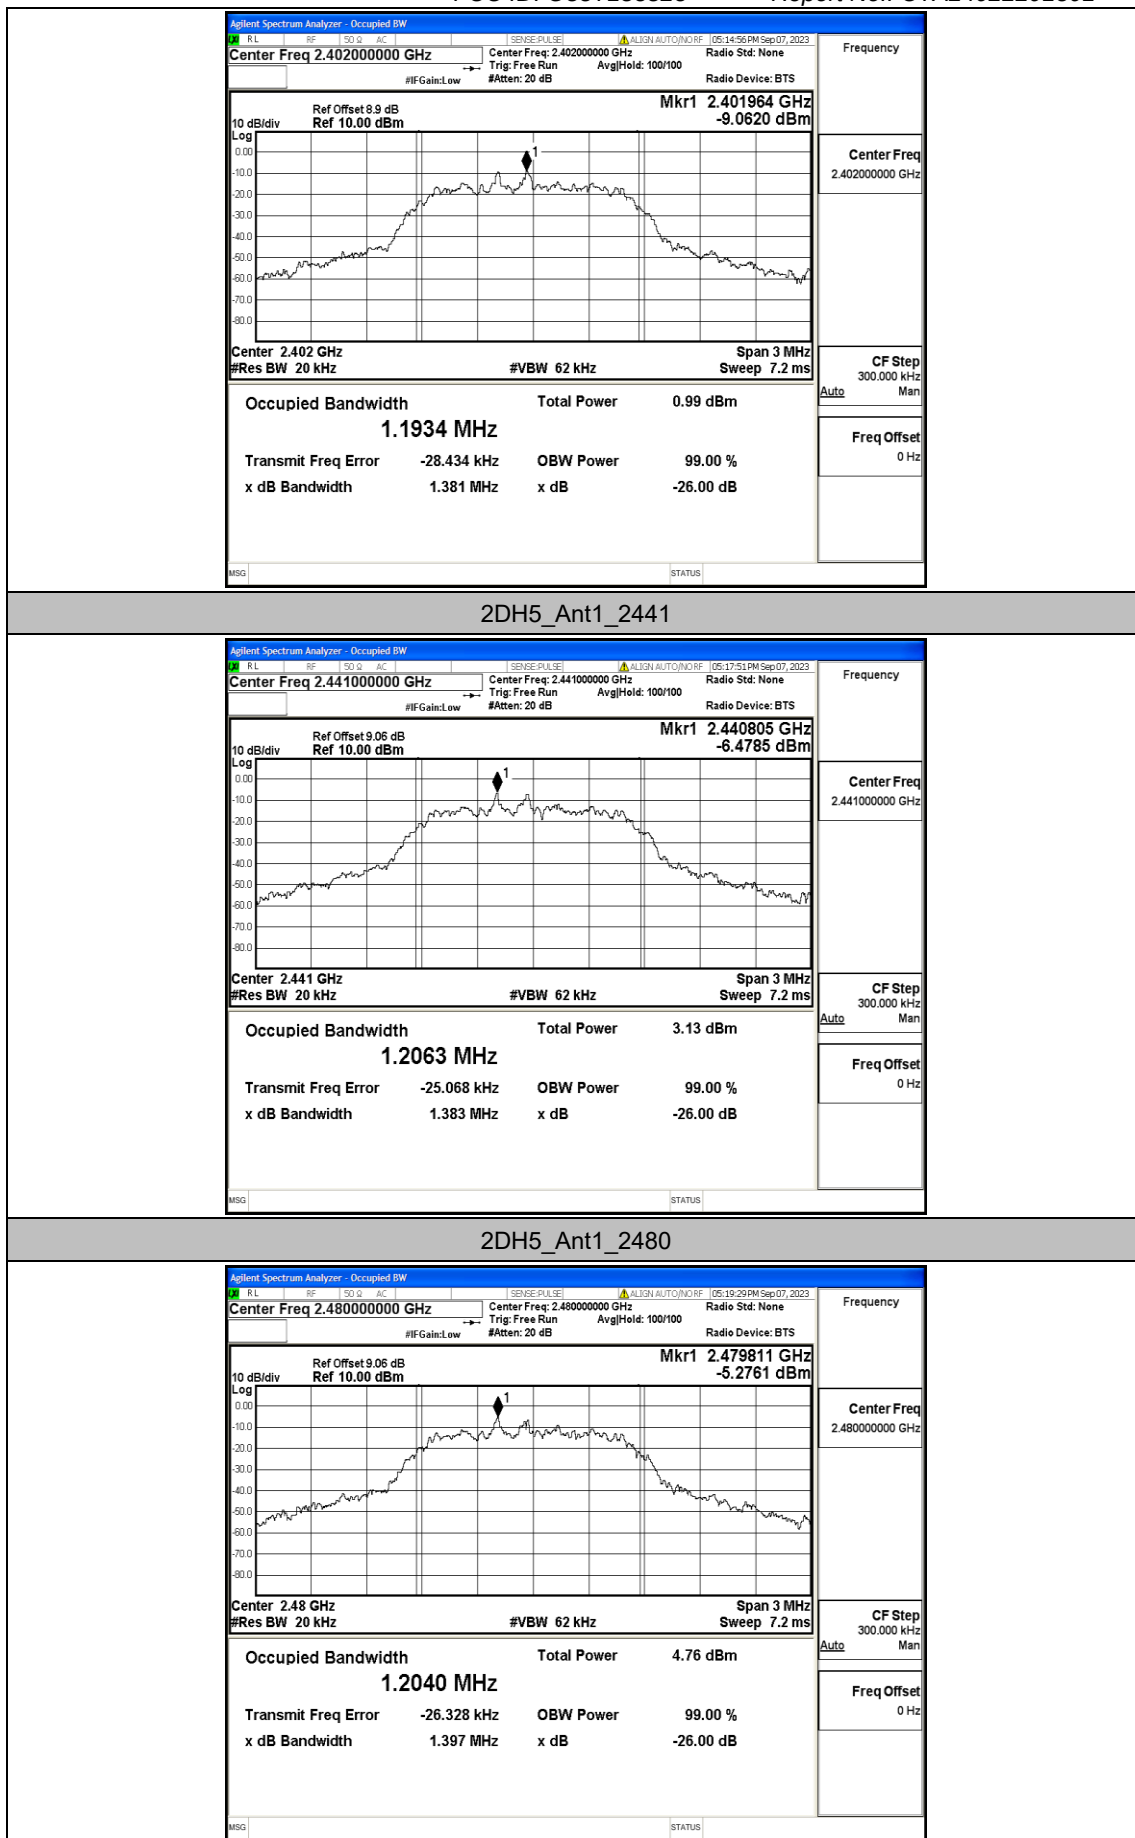


Appendix C: Maximum Peak conducted output power

Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-4.89	≤30	PASS
		2441	-2.77	≤30	PASS
		2480	-1.23	≤30	PASS
2DH5	Ant1	2402	-4.04	≤20.97	PASS
		2441	-1.97	≤20.97	PASS
		2480	-0.32	≤20.97	PASS

Test Graphs


DH5_Ant1_2402

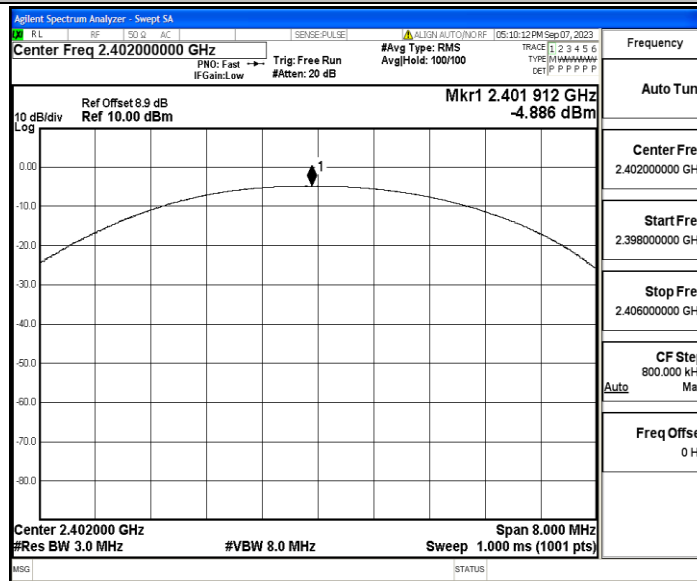


DH5_Ant1_2441

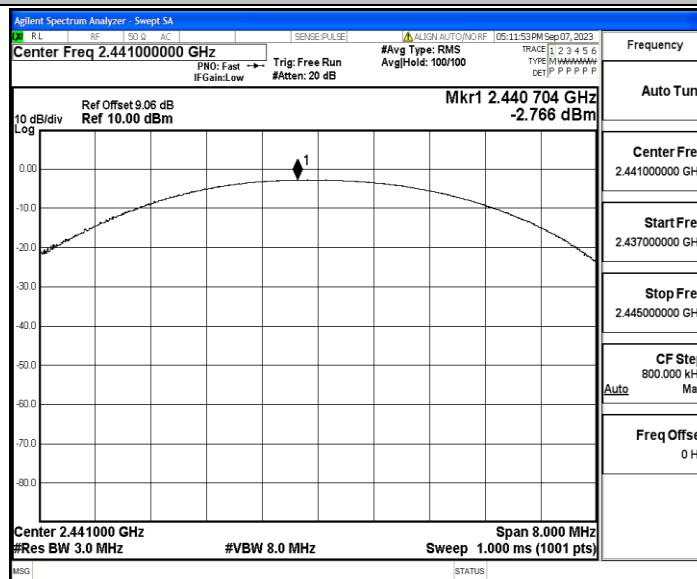


DH5_Ant1_2480

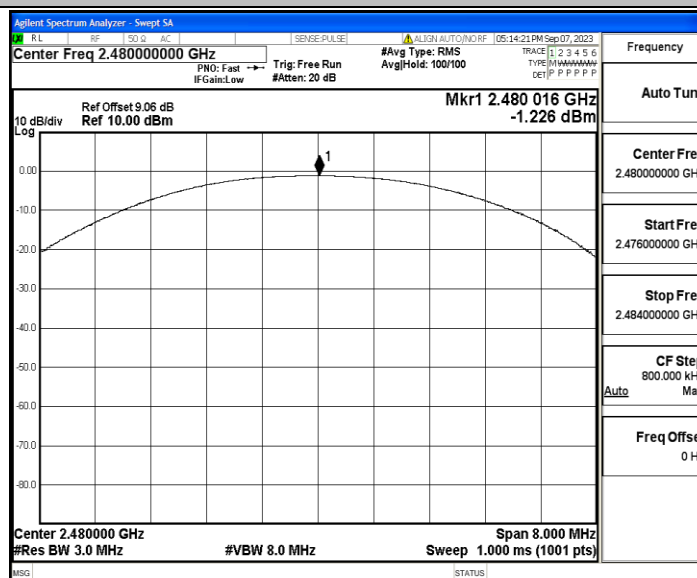


2DH5_Ant1_2402

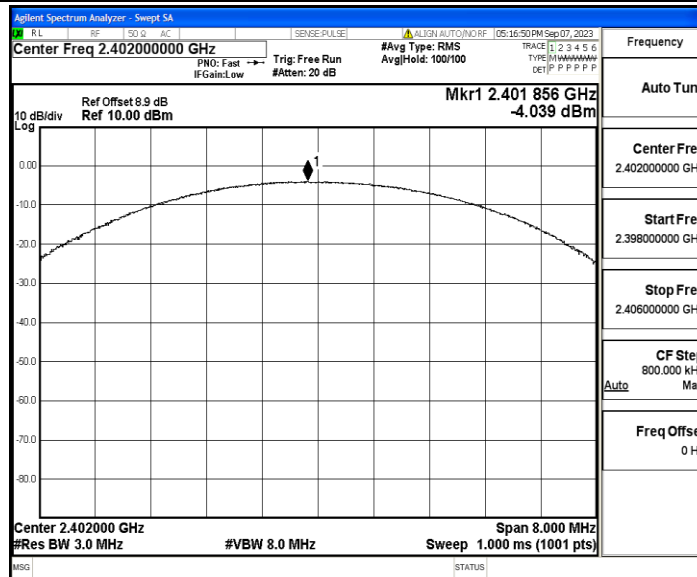

2DH5_Ant1_2441

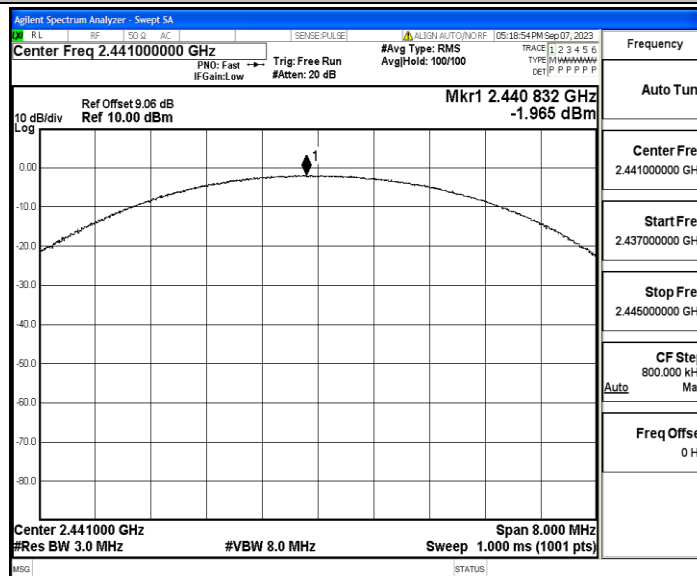

2DH5_Ant1_2480

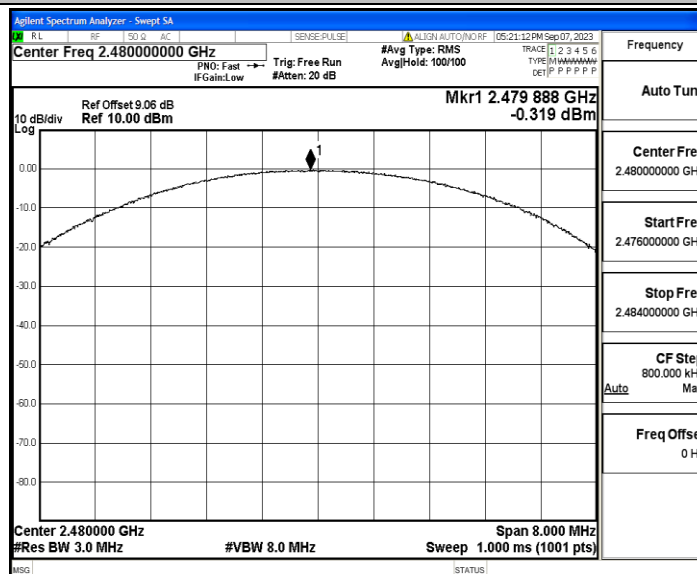


Appendix D: Carrier frequency separation

Test Result


TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.006	≥ 0.688	PASS
2DH5	Ant1	Hop	1.004	≥ 0.884	PASS

Test Graphs

DH5_Ant1_Hop

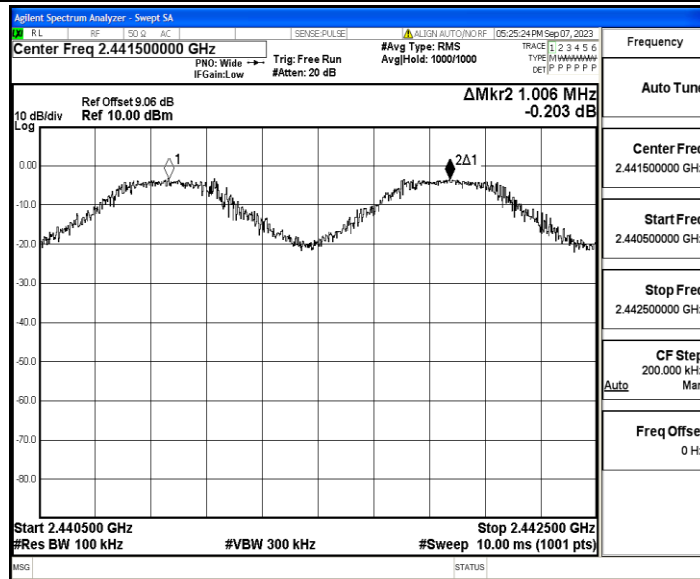

2DH5_Ant1_Hop

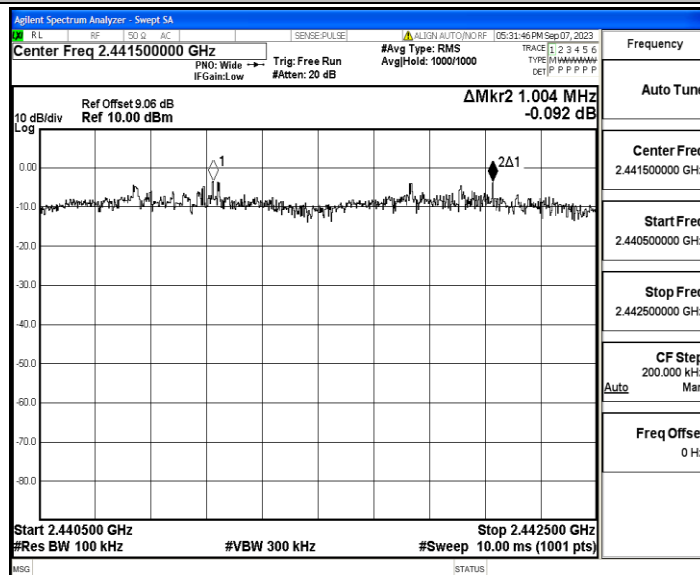



Appendix E: Time of occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.884	120	0.346	≤0.4	PASS
2DH5	Ant1	Hop	2.889	120	0.347	≤0.4	PASS

Test Graphs

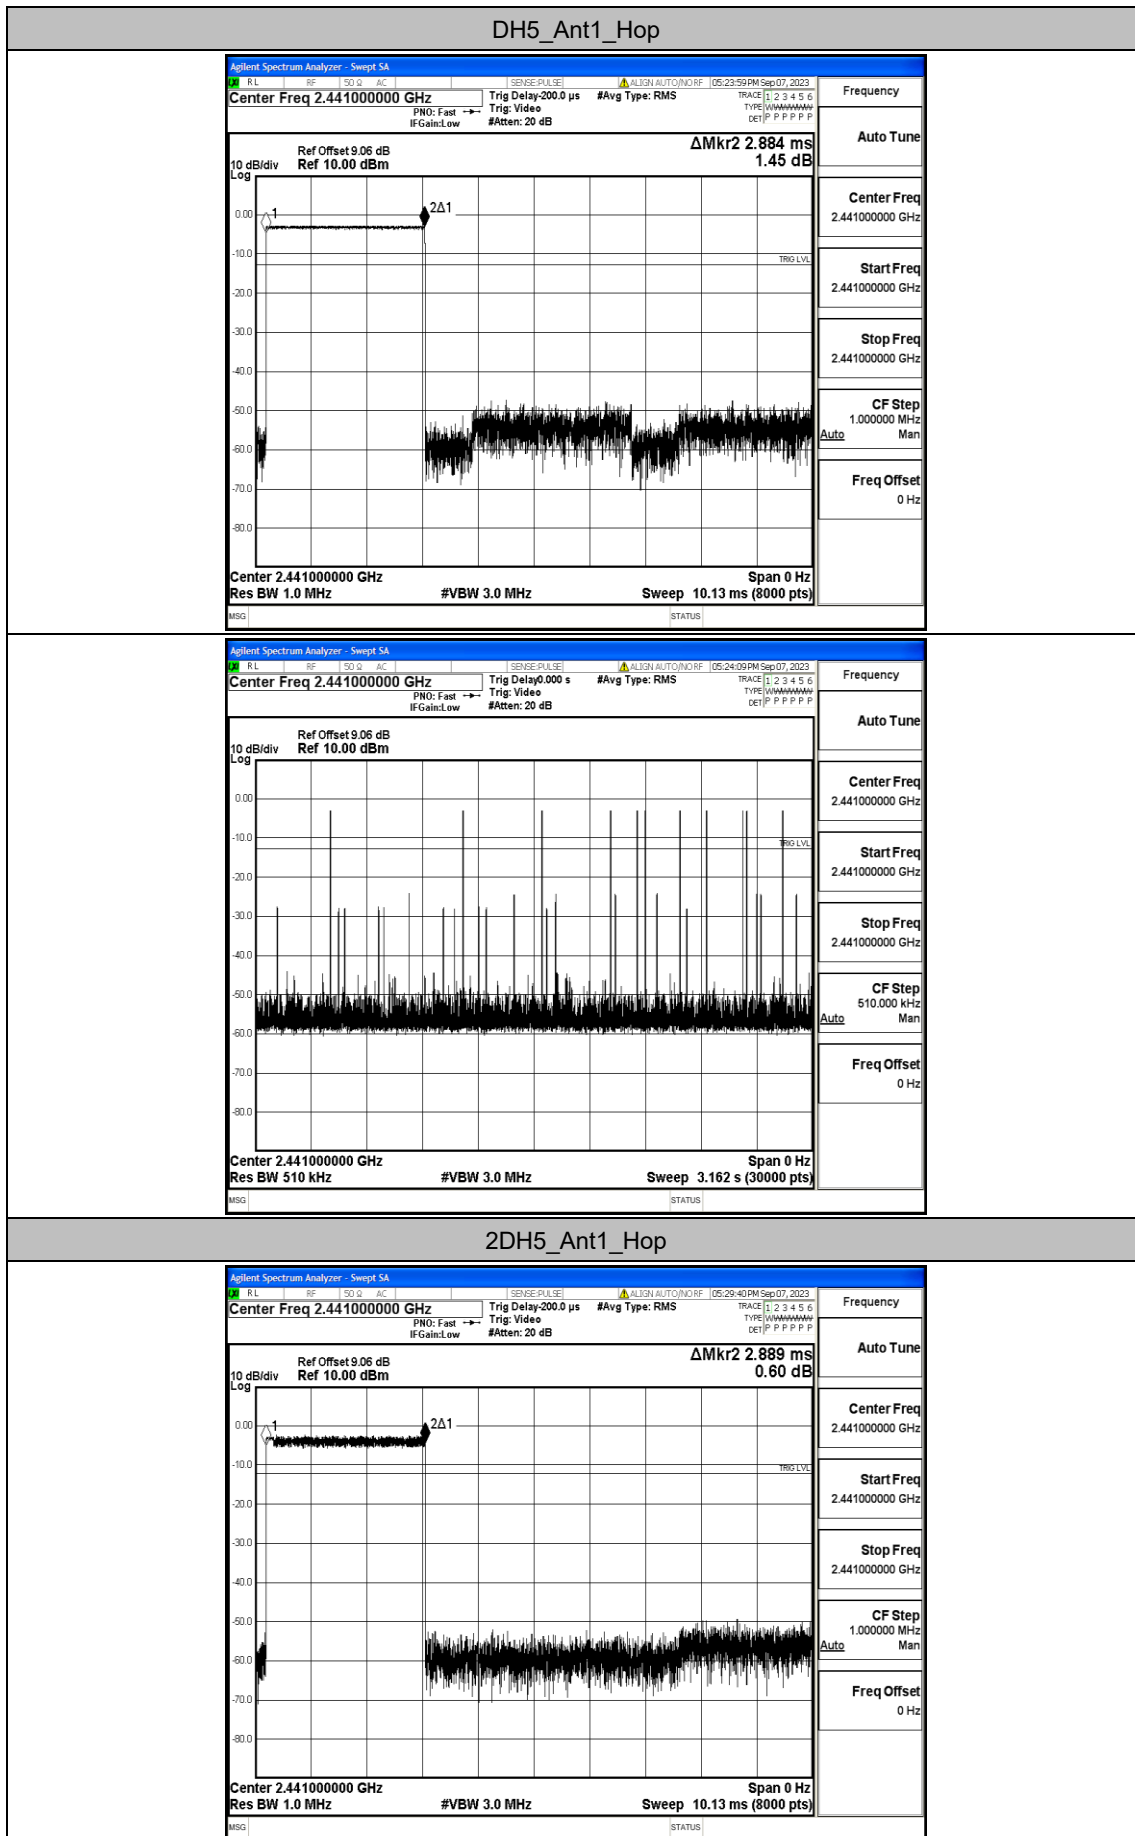

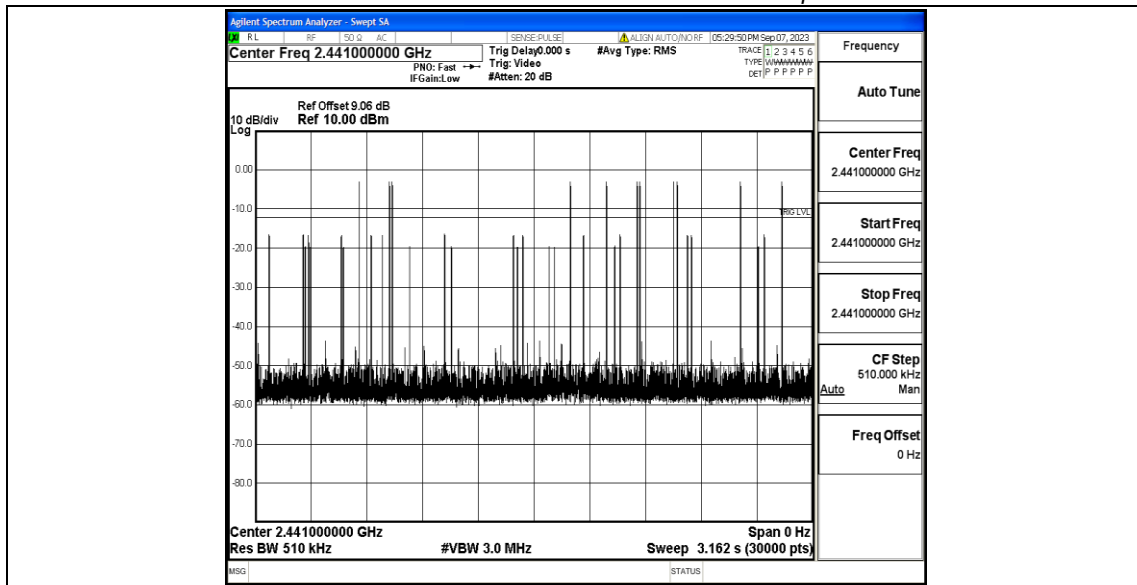


Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

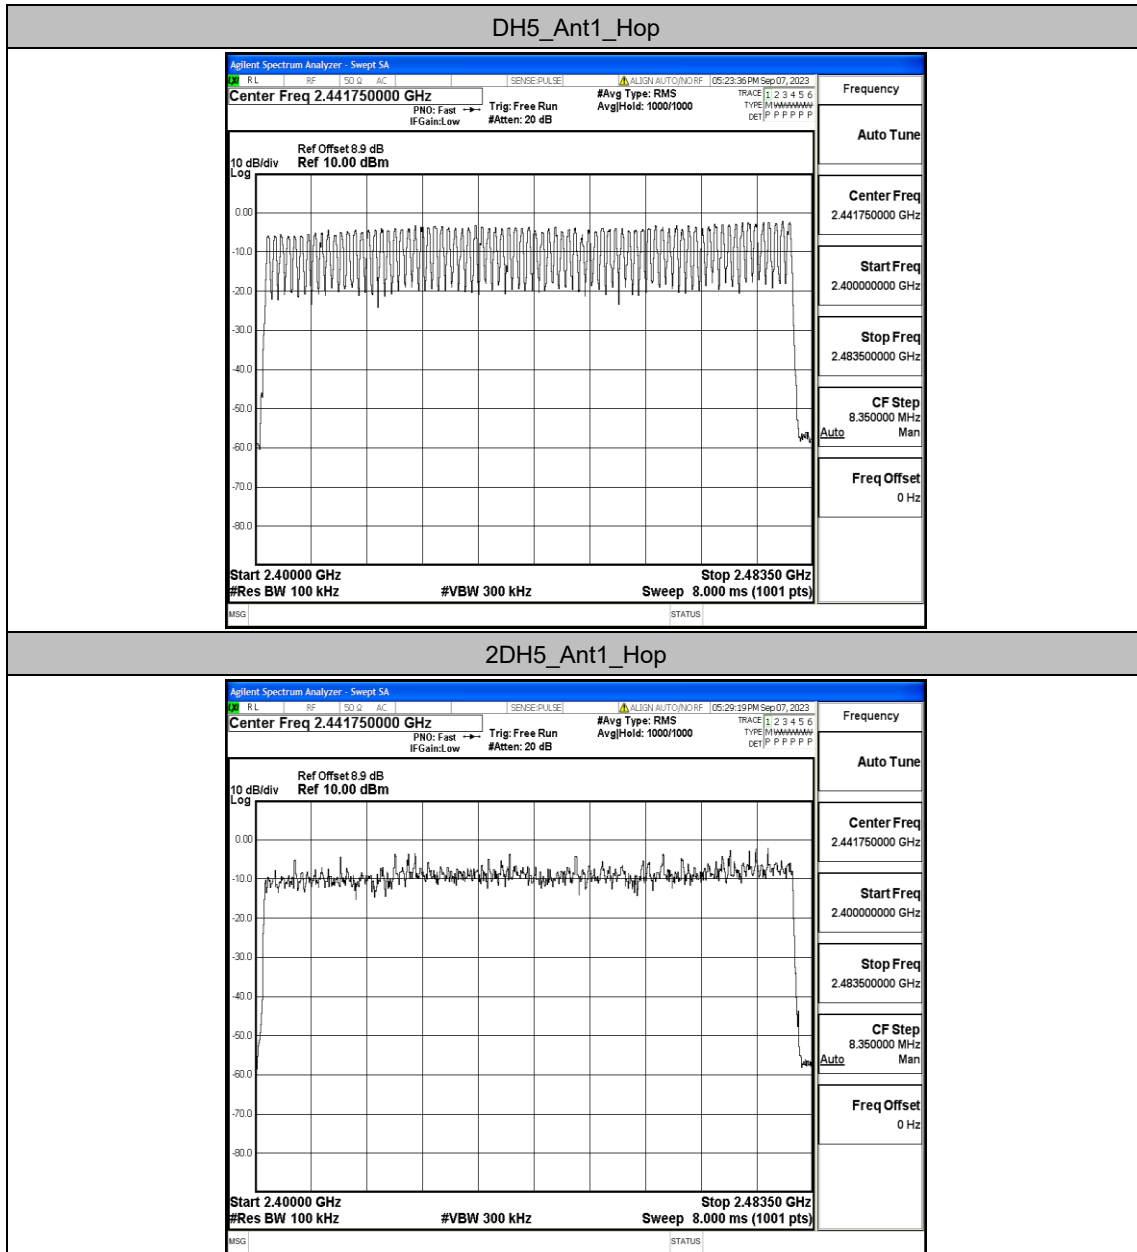


Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-5.15	-56.2	≤ -25.15	PASS
		High	2480	-1.54	-54.66	≤ -21.54	PASS
		Low	Hop_2402	-5.78	-57.25	≤ -25.78	PASS
		High	Hop_2480	-2.44	-58.11	≤ -22.44	PASS
2DH5	Ant1	Low	2402	-5.26	-56.24	≤ -25.26	PASS
		High	2480	-1.71	-55.23	≤ -21.71	PASS
		Low	Hop_2402	-9.74	-58.12	≤ -29.74	PASS
		High	Hop_2480	-5.60	-57.64	≤ -25.6	PASS

Test Graphs


DH5_Ant1_Low_2402

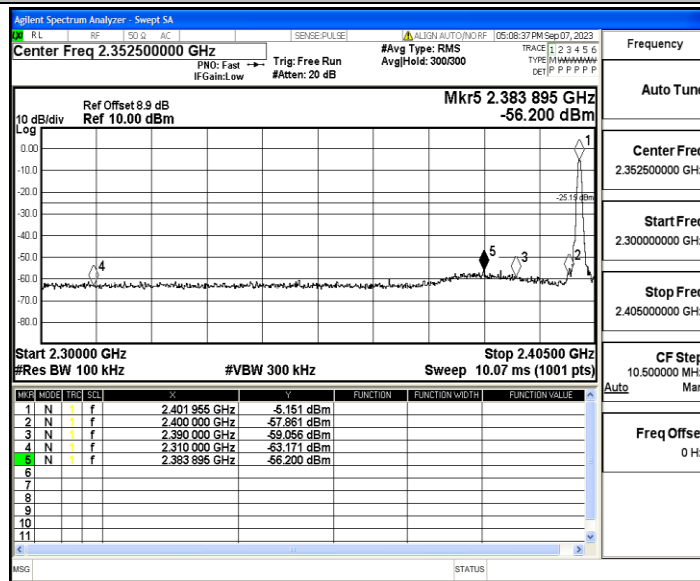


DH5_Ant1_High_2480

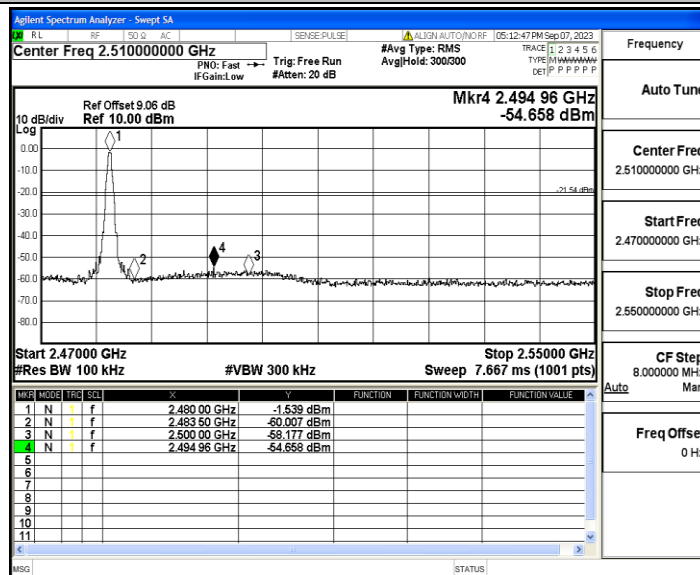


DH5_Ant1_Low_Hop_2402

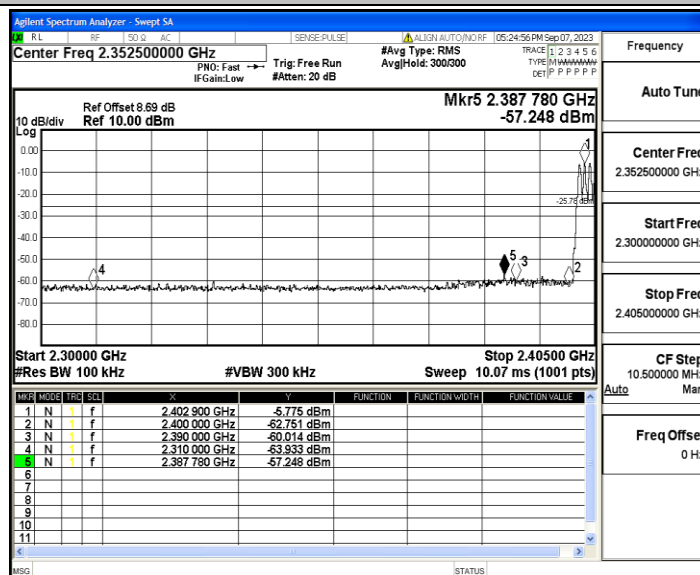


DH5_Ant1_High_Hop_2480

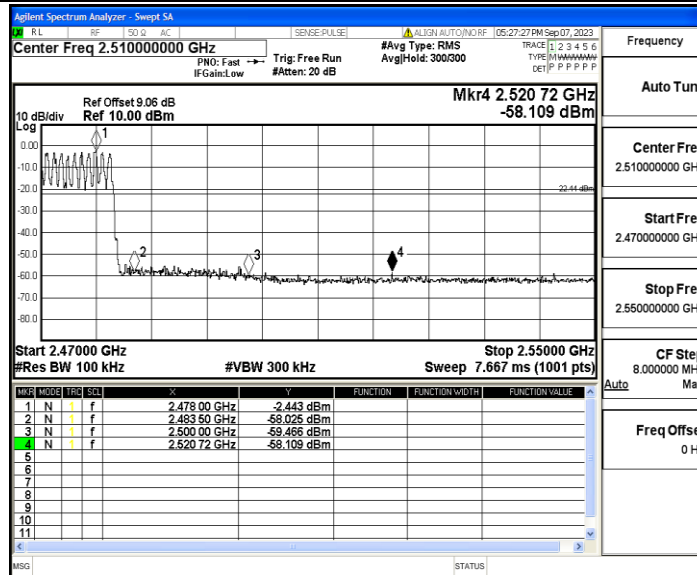


2DH5_Ant1_Low_2402

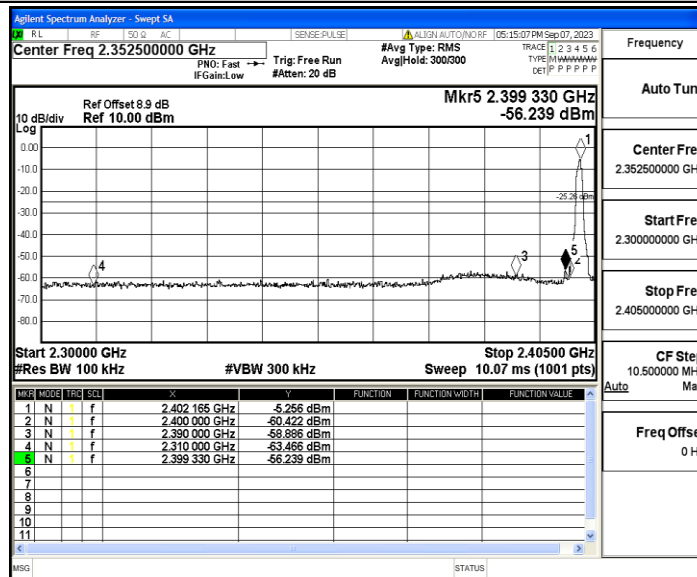


2DH5_Ant1_High_2480

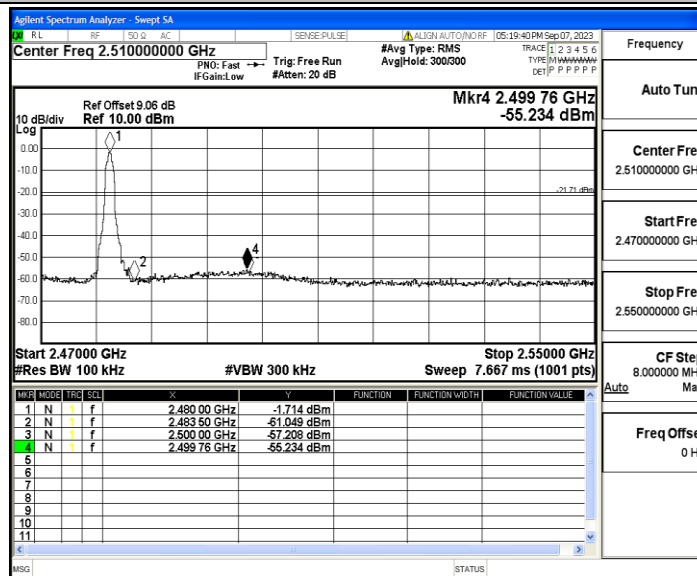

2DH5_Ant1_Low_Hop_2402

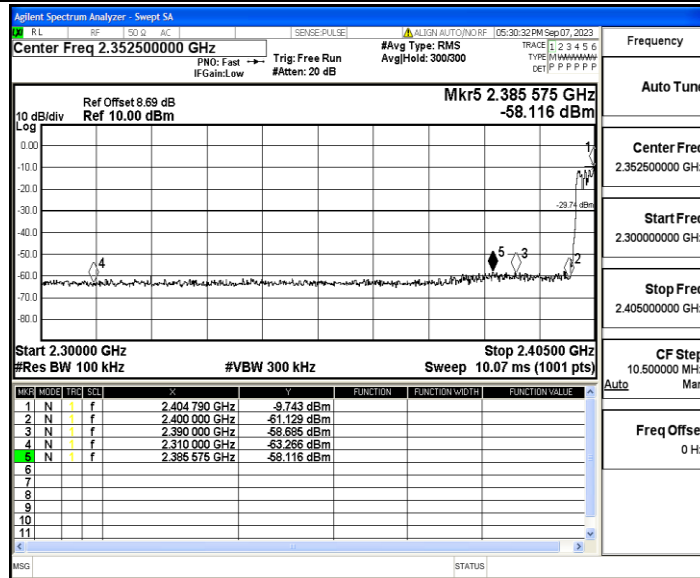

2DH5_Ant1_High_Hop_2480

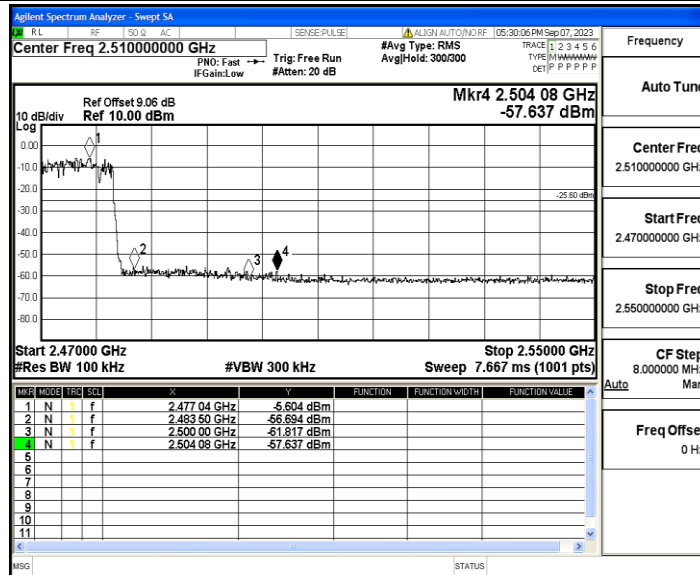


Appendix H: Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-5.91	-5.91	---	PASS
			30~1000	-5.91	-51.31	≤-25.91	PASS
			1000~26500	-5.91	-50.68	≤-25.91	PASS
		2441	Reference	-3.75	-3.75	---	PASS
			30~1000	-3.75	-51.97	≤-23.75	PASS
			1000~26500	-3.75	-50.51	≤-23.75	PASS
		2480	Reference	-2.00	-2.00	---	PASS
			30~1000	-2.00	-52.23	≤-22	PASS
			1000~26500	-2.00	-50.36	≤-22	PASS
2DH5	Ant1	2402	Reference	-5.76	-5.76	---	PASS
			30~1000	-5.76	-52.34	≤-25.76	PASS
			1000~26500	-5.76	-50.84	≤-25.76	PASS
		2441	Reference	-4.39	-4.39	---	PASS
			30~1000	-4.39	-52.76	≤-24.39	PASS
			1000~26500	-4.39	-50.69	≤-24.39	PASS
		2480	Reference	-5.09	-5.09	---	PASS
			30~1000	-5.09	-51.35	≤-25.09	PASS
			1000~26500	-5.09	-49.03	≤-25.09	PASS

Test Graphs


DH5_Ant1_2402_0~Reference

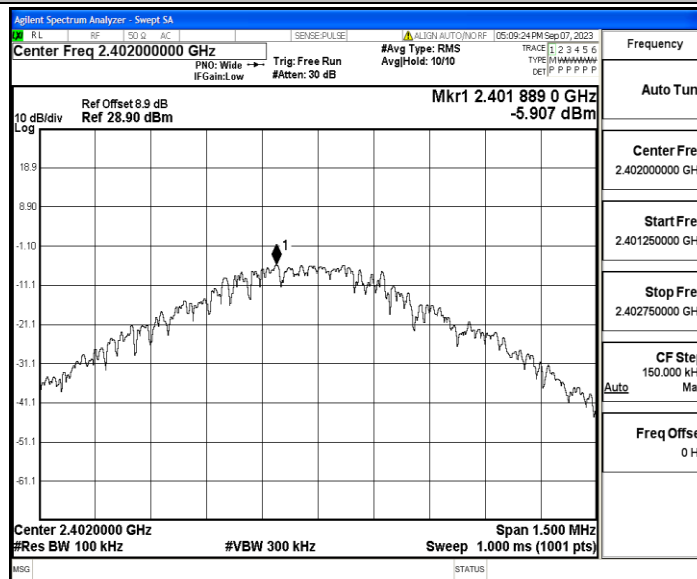


DH5_Ant1_2402_30~1000

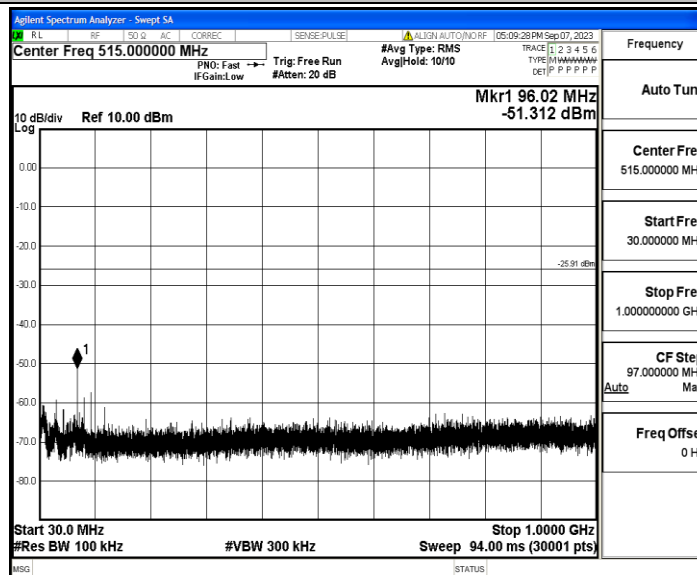


DH5_Ant1_2402_1000~26500

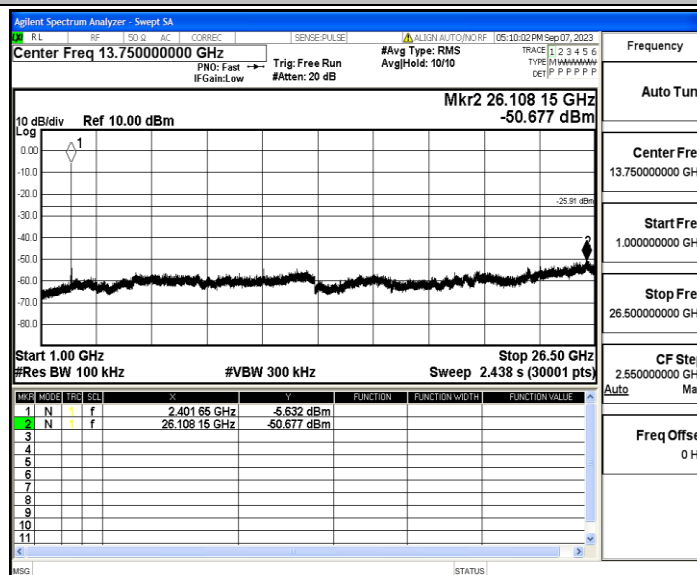


DH5_Ant1_2441_0~Reference

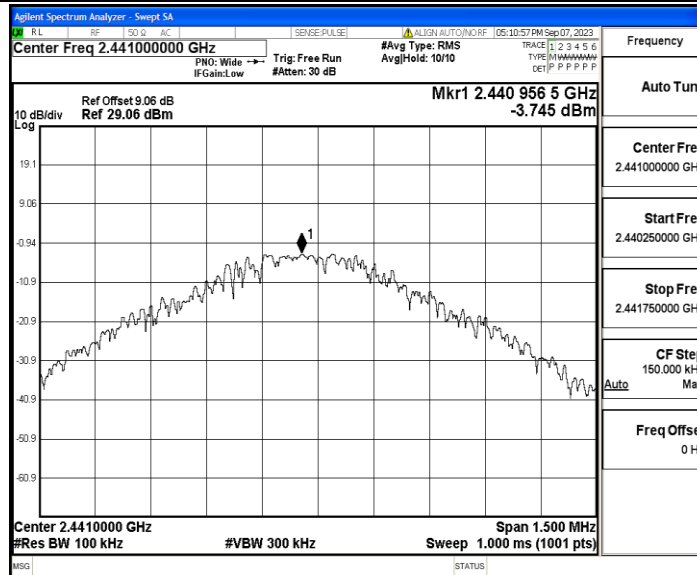


DH5_Ant1_2441_30~1000

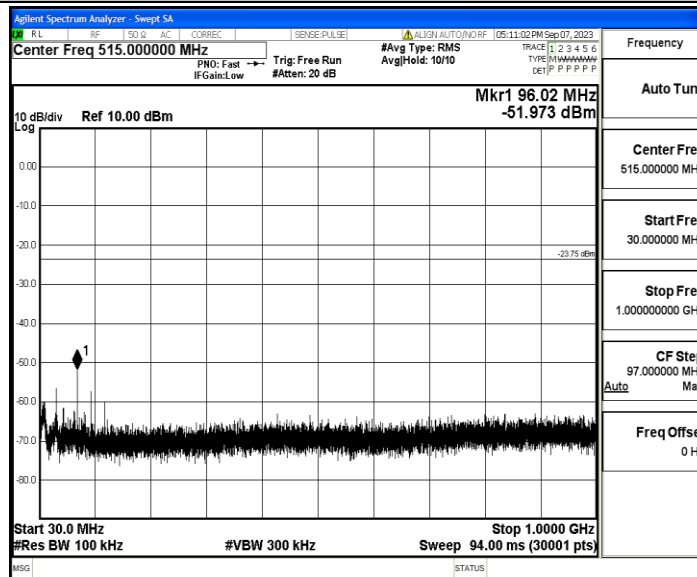


DH5_Ant1_2441_1000~26500

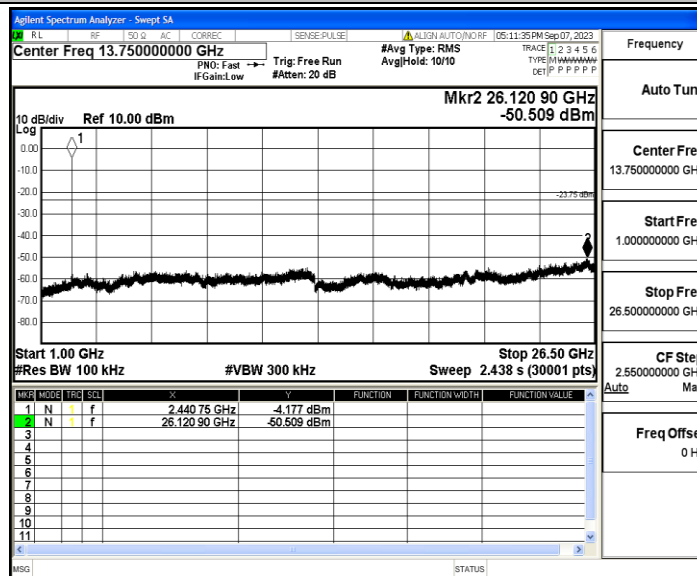


DH5_Ant1_2480_0~Reference

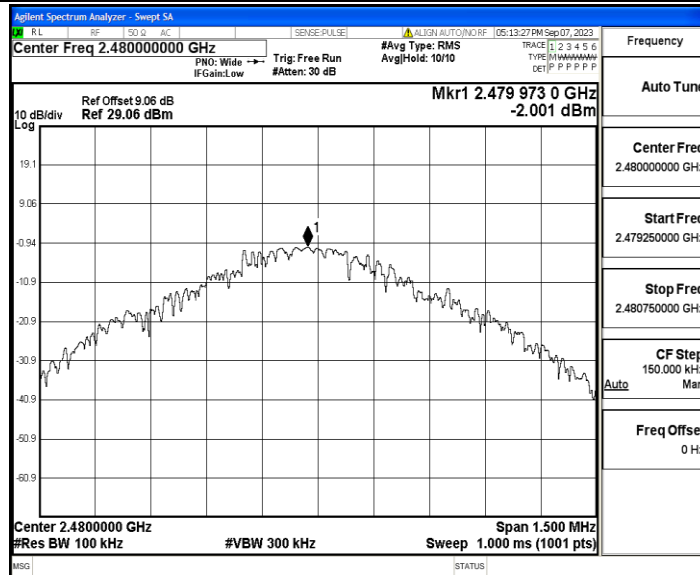


DH5_Ant1_2480_30~1000

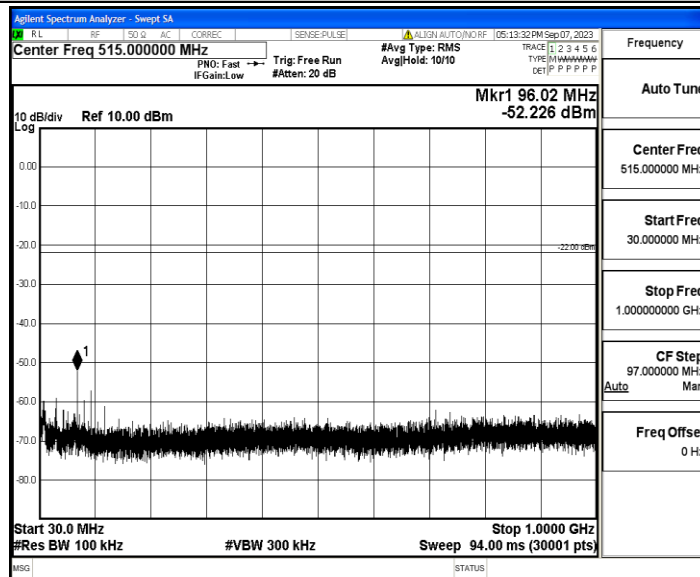


DH5_Ant1_2480_1000~26500

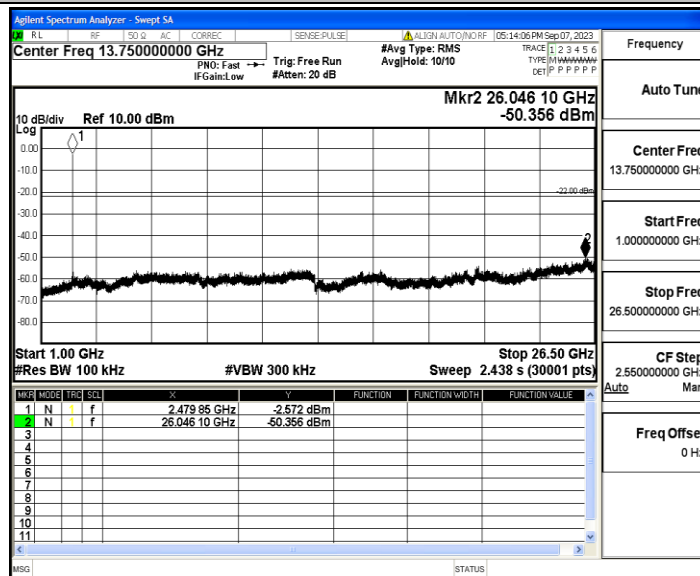


2DH5_Ant1_2402_0~Reference

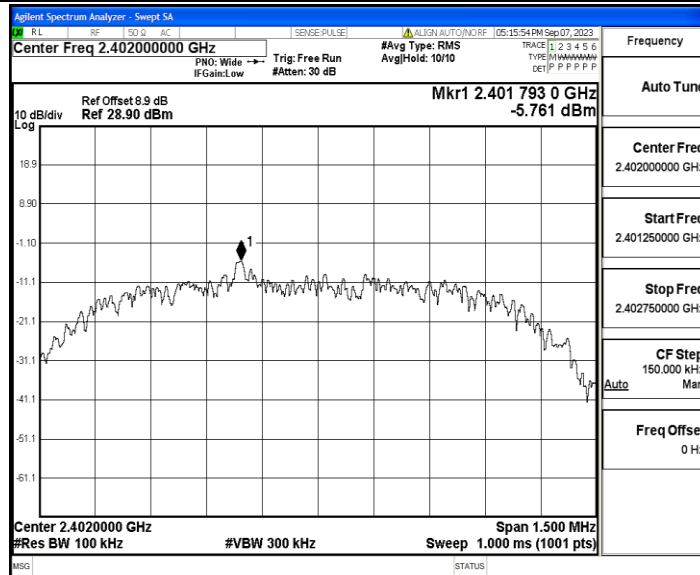


2DH5_Ant1_2402_30~1000

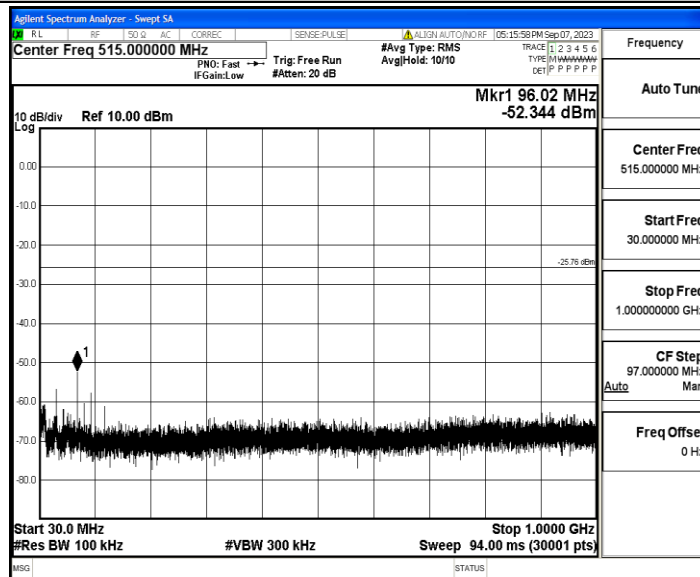


2DH5_Ant1_2402_1000~26500

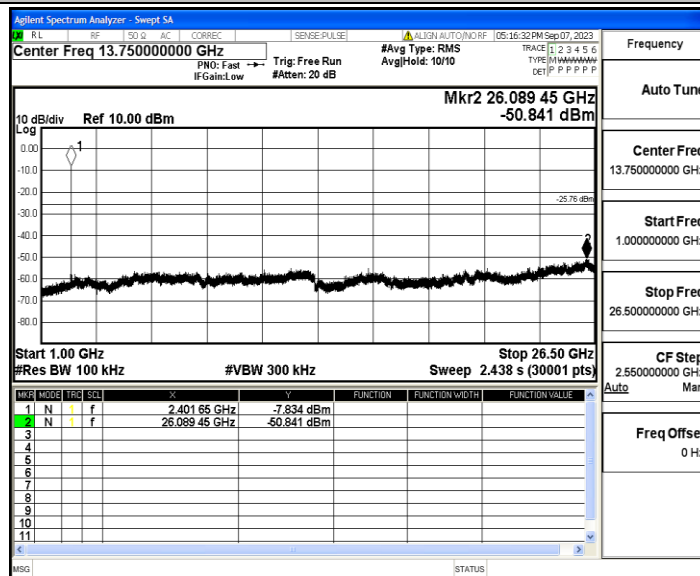


2DH5_Ant1_2441_0~Reference

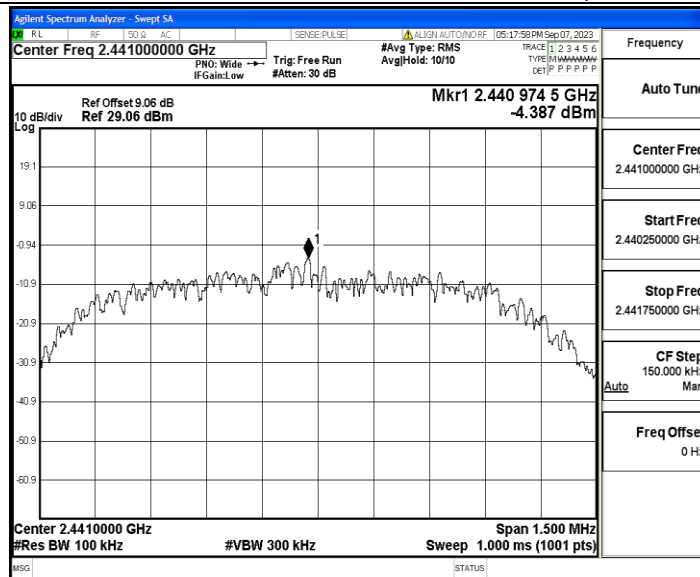


2DH5_Ant1_2441_30~1000

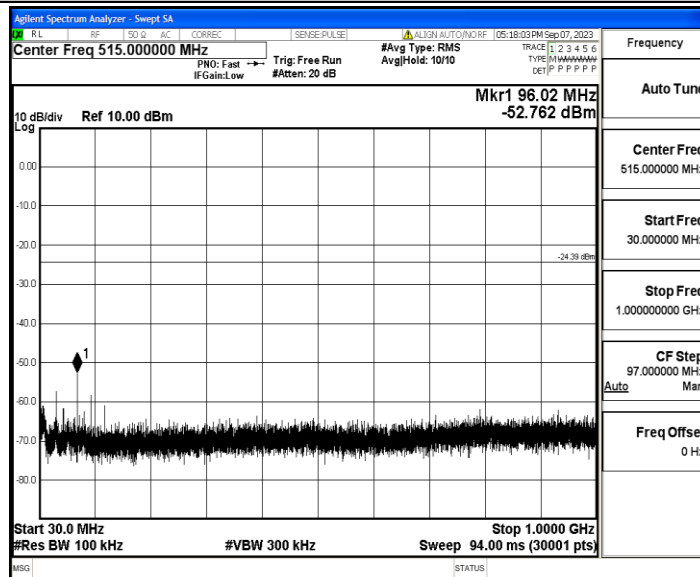


2DH5_Ant1_2441_1000~26500

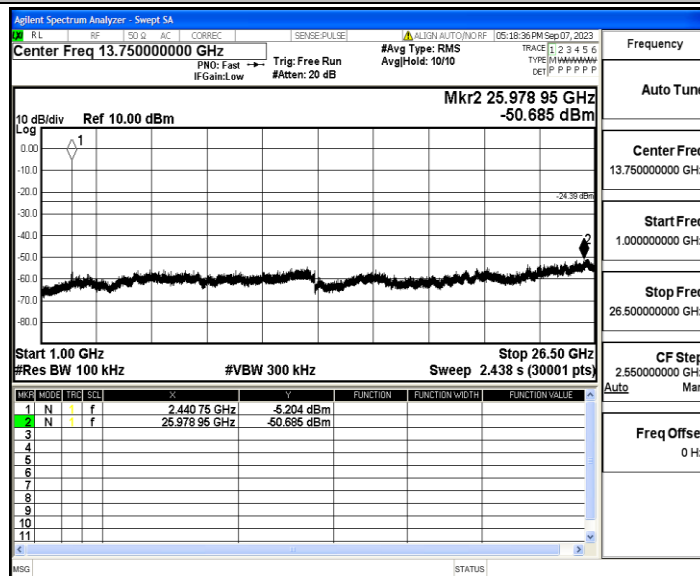


2DH5_Ant1_2480_0~Reference

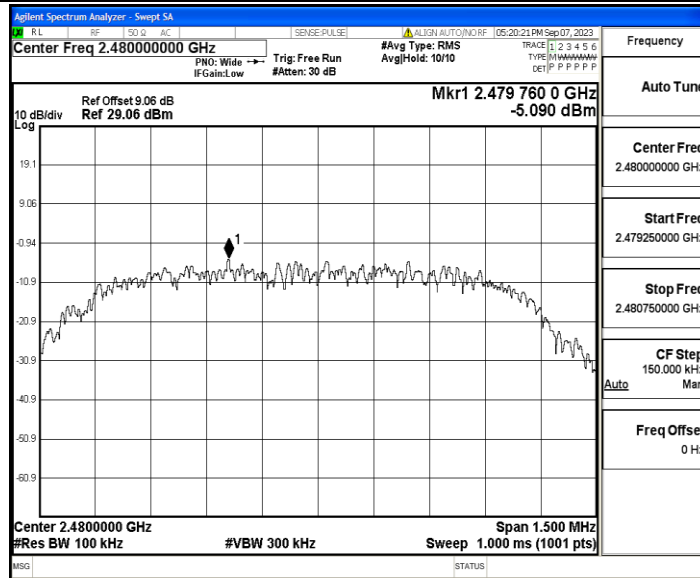

2DH5_Ant1_2480_30~1000

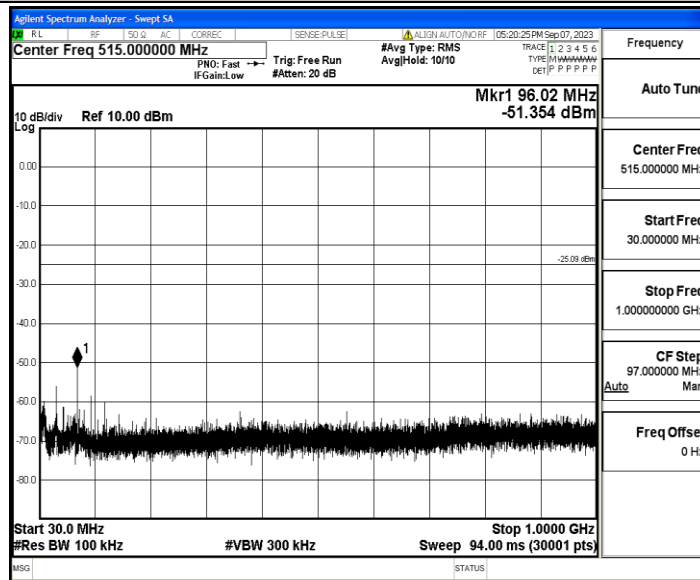

2DH5_Ant1_2480_1000~26500

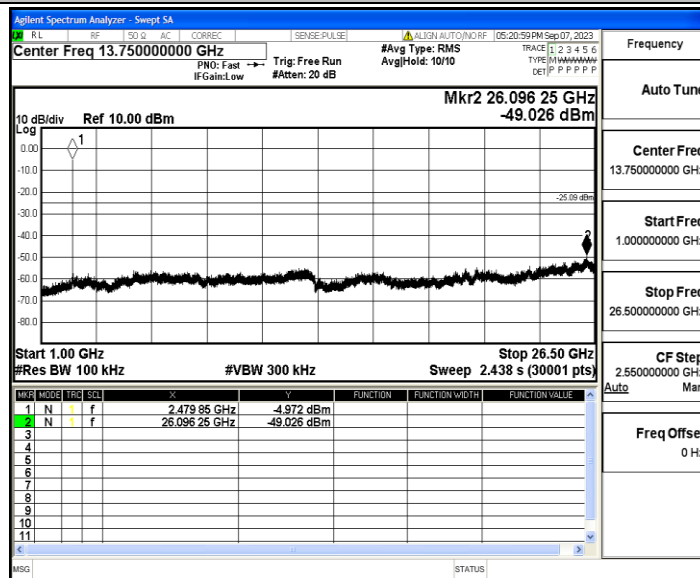


Appendix I: Duty Cycle

Test Result


TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T[kHz]
DH5	Ant1	2402	2.88	3.75	76.80	0.35
		2441	2.88	3.75	76.80	0.35
		2480	2.89	3.75	77.07	0.35
2DH5	Ant1	2402	2.89	3.75	77.07	0.35
		2441	2.89	3.75	77.07	0.35
		2480	2.89	3.75	77.07	0.35

Test Graphs


DH5_Ant1_2402

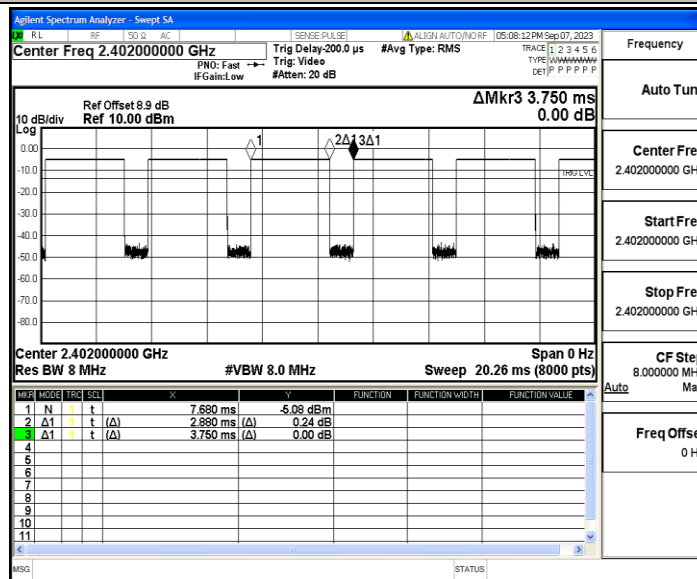


DH5_Ant1_2441

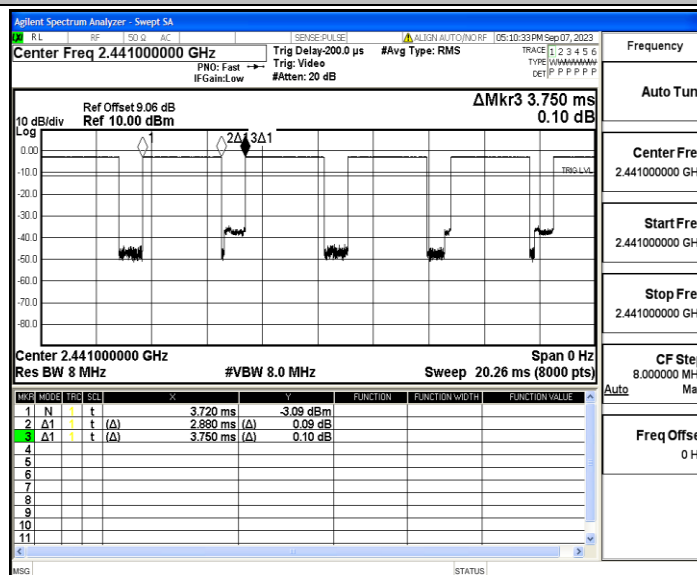


DH5_Ant1_2480

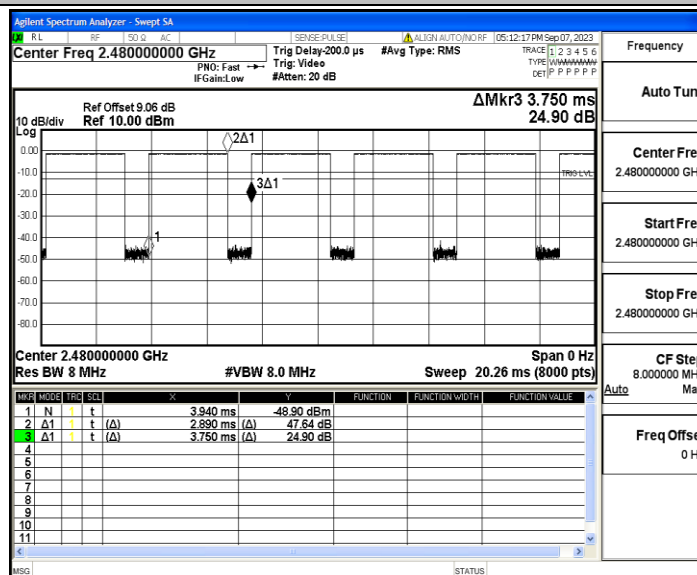


2DH5_Ant1_2402

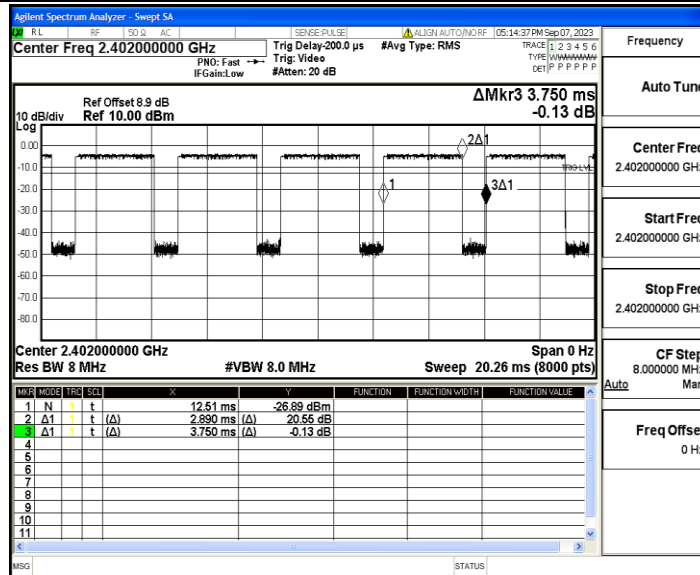

2DH5_Ant1_2441

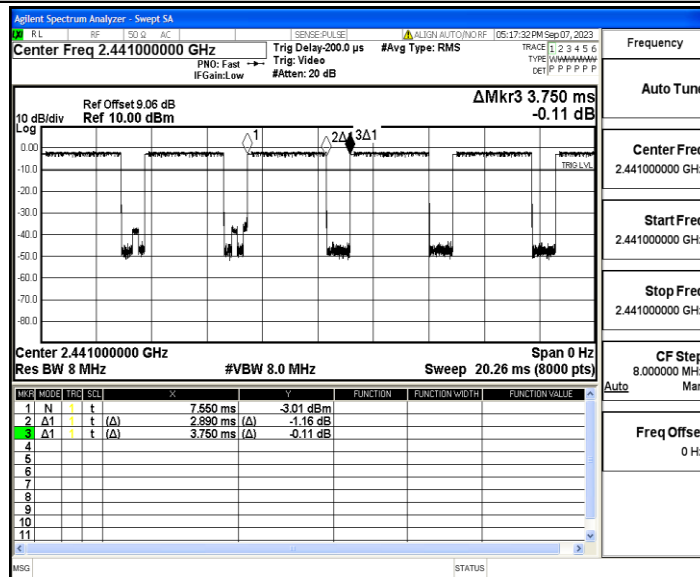

2DH5_Ant1_2480

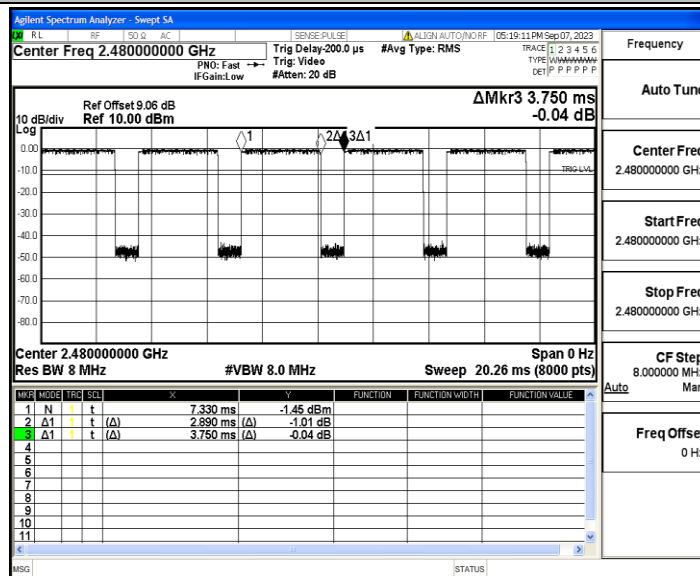

Appendix J: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Channel	Detector	Freq(MHz)	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-59.61	≤-41.20	PASS
				AV	2382.530	-54.59	≤-41.20	PASS
				AV	2390.000	-55.81	≤-41.20	PASS
				Peak	2310.000	-51.49	≤-21.20	PASS
				Peak	2382.530	-44.57	≤-21.20	PASS
				Peak	2390.000	-47.94	≤-21.20	PASS
		High	2480	AV	2483.500	-55.81	≤-41.20	PASS
				AV	2499.760	-53.37	≤-41.20	PASS
				AV	2500.000	-53.35	≤-41.20	PASS
				Peak	2483.500	-49.98	≤-21.20	PASS
				Peak	2484.160	-43.58	≤-21.20	PASS
				Peak	2500.000	-45.21	≤-21.20	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-59.59	≤-41.20	PASS
				AV	2383.370	-54.59	≤-41.20	PASS
				AV	2390.000	-55.83	≤-41.20	PASS
				Peak	2310.000	-52.6	≤-21.20	PASS
				Peak	2386.520	-46.11	≤-21.20	PASS
				Peak	2390.000	-47.8	≤-21.20	PASS
		High	2480	AV	2483.500	-55.02	≤-41.20	PASS
				AV	2498.800	-53.24	≤-41.20	PASS
				AV	2500.000	-53.38	≤-41.20	PASS
				Peak	2483.500	-49.84	≤-21.20	PASS
				Peak	2496.880	-44.29	≤-21.20	PASS
				Peak	2500.000	-46.96	≤-21.20	PASS

Note:


1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


DH5_Ant1_Low_2402_AV

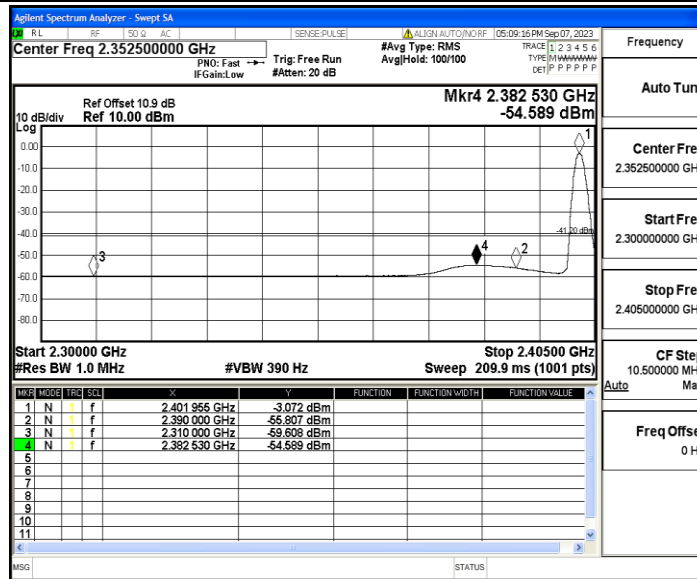


DH5_Ant1_Low_2402_Peak

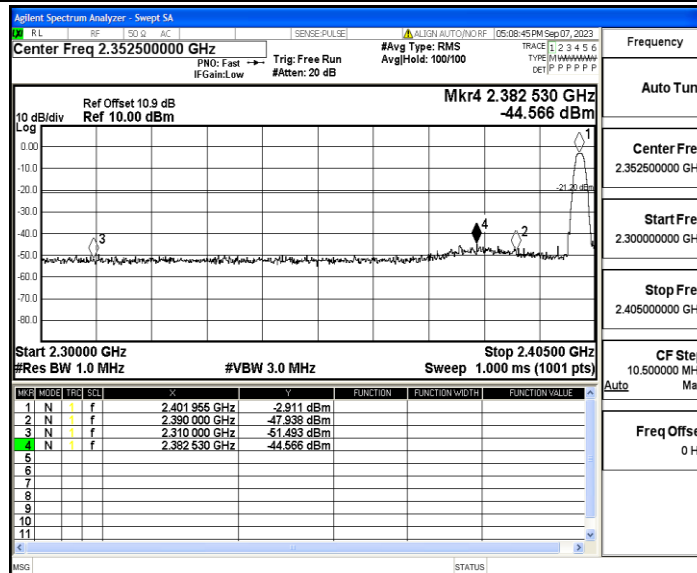


DH5_Ant1_High_2480_AV

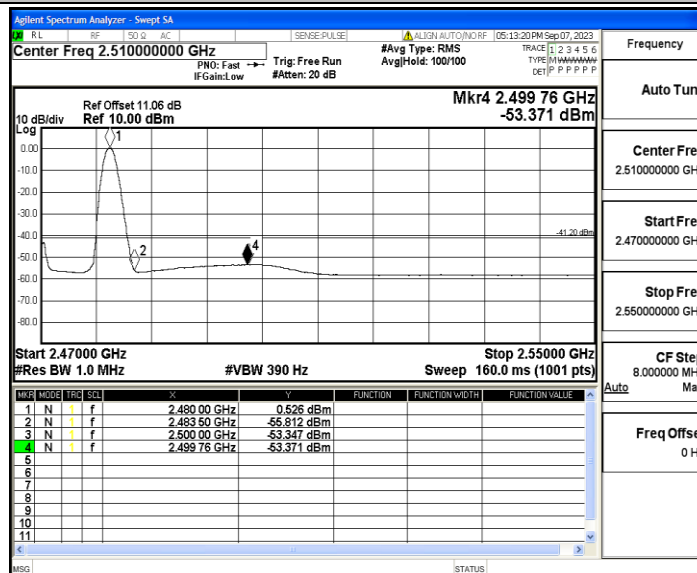


DH5_Ant1_High_2480_Peak

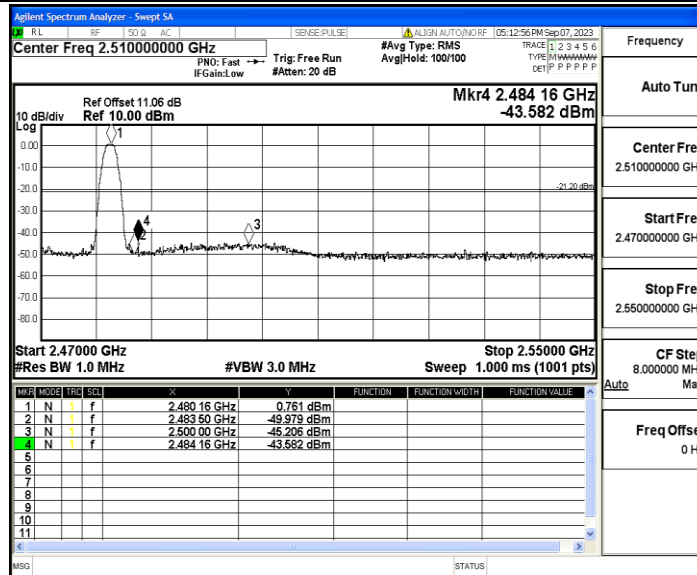


2DH5_Ant1_Low_2402_AV

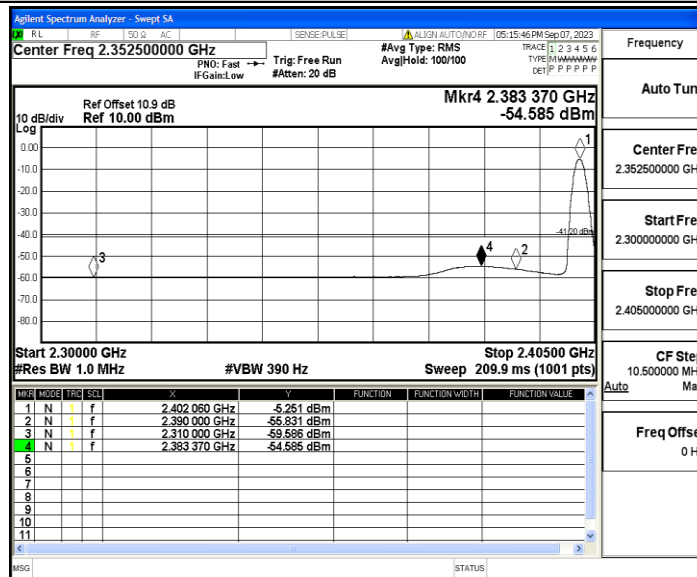

2DH5_Ant1_Low_2402_Peak

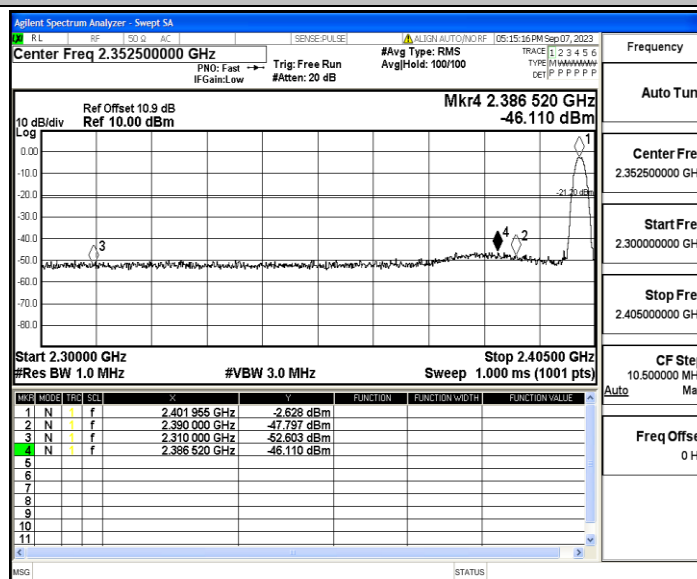

2DH5_Ant1_High_2480_AV

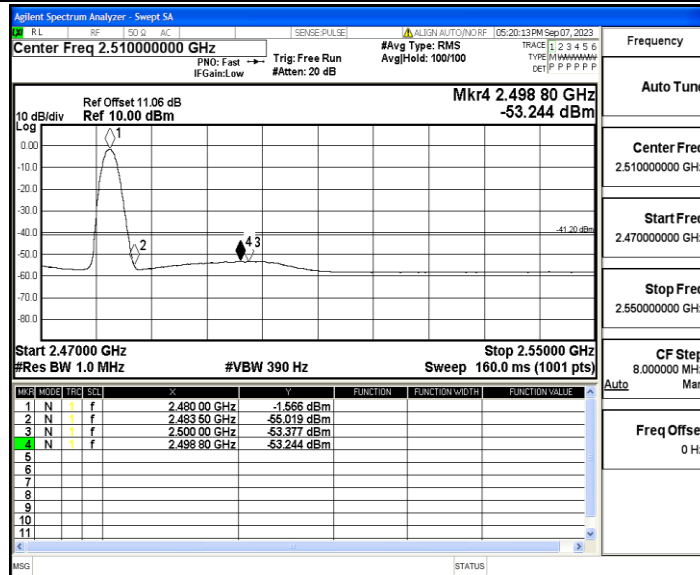

2DH5_Ant1_High_2480_Peak

