



# FCC RADIO TEST REPORT

**FCC ID** : Q87-03566  
**Equipment** : Linksys Tri-Band Wireless-AC Router  
**Brand Name** : Linksys  
**Model Name** : EA8300 V1.1  
**Applicant** : Linksys LLC  
121 Theory Drive Irvine, CA 92617, United States  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Mar. 06, 2020, and testing was started from Mar. 06, 2020 and completed on Apr. 07, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Information.....	5
1.2 Applicable Standards .....	8
1.3 Testing Location Information .....	8
1.4 Measurement Uncertainty .....	8
<b>2 Test Configuration of EUT .....</b>	<b>9</b>
2.1 Test Channel Mode .....	9
2.2 The Worst Case Measurement Configuration.....	10
2.3 EUT Operation during Test .....	12
2.4 Accessories .....	12
2.5 Support Equipment.....	13
2.6 Test Setup Diagram .....	14
<b>3 Transmitter Test Result .....</b>	<b>18</b>
3.1 AC Power-line Conducted Emissions .....	18
3.2 DTS Bandwidth .....	20
3.3 Maximum Conducted Output Power .....	21
3.4 Power Spectral Density .....	24
3.5 Emissions in Non-restricted Frequency Bands .....	26
3.6 Emissions in Restricted Frequency Bands.....	27
<b>4 Test Equipment and Calibration Data .....</b>	<b>31</b>
<b>Appendix A. Test Results of AC Power-line Conducted Emissions</b>	
<b>Appendix B. Test Results of DTS Bandwidth</b>	
<b>Appendix C. Test Results of Maximum Conducted Output Power</b>	
<b>Appendix D. Test Results of Power Spectral Density</b>	
<b>Appendix E. Test Results of Emissions in Non-restricted Frequency Bands</b>	
<b>Appendix F. Test Results of Emissions in Restricted Frequency Bands</b>	
<b>Appendix G. Test Results of Radiated Emission Co-location</b>	
<b>Appendix H. Test Photos</b>	
<b>Photographs of EUT v01</b>	



## History of this test report

TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A10\_10 Ver1.1

Page Number : 3 of 32  
Issued Date : Jun. 12, 2020  
Report Version : 01



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Note: Reference to Sporton Project No.: 710901-06

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Viola Huang**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20	2412-2462	1-11 [11]
2400-2483.5	n (HT40), VHT40	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	2
2.4-2.4835GHz	802.11g	20	2
2.4-2.4835GHz	802.11g-BF	20	2
2.4-2.4835GHz	802.11n HT20	20	2
2.4-2.4835GHz	802.11n HT20-BF	20	2
2.4-2.4835GHz	VHT20	20	2
2.4-2.4835GHz	VHT20-BF	20	2
2.4-2.4835GHz	802.11n HT40	40	2
2.4-2.4835GHz	802.11n HT40-BF	40	2
2.4-2.4835GHz	VHT40	40	2
2.4-2.4835GHz	VHT40-BF	40	2

**Note:**

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	1	FIT	ANEP5M2-CCG05-EH	Dipole Antenna	I-PEX	Note1
2	2	FIT	ANEP5M2-CCG06-EH	Dipole Antenna	I-PEX	
3	1	FIT	ANEP5M2-CCG07-EH	Dipole Antenna	I-PEX	
4	2	FIT	ANEP5M2-CCG08-EH	Dipole Antenna	I-PEX	

Note 1:

Ant.	Port	Gain (dBi)				
		WLAN 2.4GHz	WLAN 5GHz Band 1	WLAN 5GHz Band 2	WLAN 5GHz Band 3	WLAN 5GHz Band 4
1	1	2.81	2.54	2.87	-	-
2	2	2.35	2.75	2.41	-	-
3	1	-	-	-	3.15	2.89
4	2	-	-	-	3.35	2.97

Note 2: The above information was declared by manufacturer.

Note 3:

**For 2.4GHz function:****For IEEE 802.11b/g/n/ac (2TX/2RX):**

Ant. 1 (Port 1) and Ant. 2 (Port 2) can be used as transmitting/receiving antenna.

Ant. 1 (Port 1) and Ant. 2 (Port 2) could transmit/receive simultaneously.

**For 5GHz function:****For IEEE 802.11a/n/ac (2TX/2RX):****Band 1~Band 2**

Ant. 1 (Port 1) and Ant. 2 (Port 2) can be used as transmitting/receiving antenna.

Ant. 1 (Port 1) and Ant. 2 (Port 2) could transmit/receive simultaneously.

**Band 3~Band 4**

Ant. 3 (Port 1) and Ant. 4 (Port 2) can be used as transmitting/receiving antenna.

Ant. 3 (Port 1) and Ant. 4 (Port 2) could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.992	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11g-BF	0.964	0.16	2.085m	1k
VHT20-BF	0.976	0.11	1.759m	1k
VHT40-BF	0.915	0.39	1.693m	1k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

<b>EUT Power Type</b>	From Power Adapter			
<b>Beamforming Function</b>	<input checked="" type="checkbox"/>	With beamforming	<input type="checkbox"/>	Without beamforming
	The product has beamforming function for 11g/11n/VHT in 2.4GHz and 11a/11n/11ac in 5GHz.			
<b>Function</b>	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
<b>Test Software Version</b>	QCA Tool version 3.0.187.0			

Note: The above information was declared by manufacturer.

**1.1.5 Table for EUT support function**

Software Versions	Equip Adapter	Support Function
WLAN: 2.0.0.200811	Adapter 1~3	Master (AP Router, Repeater, bridge)

Note: Only AP Router mode has been selected to test and recorded in the test report from manufacturer requirement.



## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH02-CB	Jay Luo	20.9~22.3°C / 47~48%	Mar. 19, 2020 ~ Mar. 27, 2020
Radiated below 1GHz	03CH05-CB	Cola Fan	21.3~23.2°C / 46~49%	Mar. 13, 2020 ~ Apr. 07, 2020
Radiated above 1GHz	03CH06-CB	Cola Fan	21~22.2°C / 45~49%	Mar. 06, 2020 ~ Apr. 07, 2020
AC Conduction	CO01-CB	Peter Wu	23~24°C / 55~58%	Mar. 14, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	2.4 dB	Confidence levels of 95%
Bandwidth Measurement	2%	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Mode	Power Setting
802.11b_Nss1,(1Mbps)_2TX	-
2412MHz	23.5
2437MHz	25
2462MHz	24.5
802.11g-BF_Nss1,(6Mbps)_2TX	-
2412MHz	19
2417MHz	20.5
2437MHz	24.5
2457MHz	21.5
2462MHz	19
VHT20-BF_Nss1,(MCS0)_2TX	-
2412MHz	18.5
2417MHz	20.5
2437MHz	25
2457MHz	21
2462MHz	19
VHT40-BF_Nss1,(MCS0)_2TX	-
2422MHz	17
2437MHz	19.5
2452MHz	18.5

**Note:**

- ♦ VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- ♦ There are two modes of EUT for 802.11g/n/VHT in 2.4GHz and 11a/n/ac in 5GHz. One is beamforming mode, and the other is non-beamforming mode, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral
<b>Operating Mode</b>	Normal Link
1	AP Router mode: EUT + Adapter 1
2	AP Router mode: EUT + Adapter 2 + US plug
3	AP Router mode: EUT + Adapter 3
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains



<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	CTX
WLAN 2.4GHz: The EUT was performed at Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration. WLAN 5GHz: The EUT was performed at Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.	
1	WLAN 2.4GHz: EUT in Y axis + Adapter 1
2	WLAN 2.4GHz: EUT in Y axis + Adapter 2 + US plug
3	WLAN 2.4GHz: EUT in Y axis + Adapter 3
4	WLAN 5GHz: EUT in Z axis + Adapter 1
Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.	
For operating mode 1 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	CTX
The EUT was performed at Y axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.	
1	EUT in Y axis

<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Radiated Emission Co-location
<b>Test Condition</b>	Radiated measurement
<b>Operating Mode</b>	Normal Link
The EUT was performed at Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.	
1	EUT in Y axis - WLAN 2.4GHz + WLAN 5GHz Band 1~2
Refer to Appendix G for Radiated Emission Co-location.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz Band 1~2 + WLAN 5GHz Band 3~4
Refer to Sporton Test Report No.: FA710901-07 for Co-location RF Exposure Evaluation.	

## 2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under Telnet.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by RX Device and transmit duty cycle no less than 98%.

For Normal Link:

During the test, the EUT operation to normal function.

## 2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1 (Fixed plug)	Ktec	KSA-24W-120200HU	Input: 100-240V, 50/60Hz, 0.6A Output: 12V, 2.0A
Adapter 2 (Interchangeable plug)	Ktec	KSA-24W-120200D5	Input: 100-240V, 50/60Hz, 0.6A Output: 12V, 2.0A
Adapter 3 (Fixed plug)	APD	WB-24J12FU	Input: 100-240V, 50-60Hz, 0.7A Max. Output: 12V, 2A
Others			
US plug*1 (for adapter 2 use only)			
RJ-45 cable*1, Non-shielded, 0.9m			



## 2.5 Support Equipment

**For AC Conduction:**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN1 NB	DELL	E6430	N/A
B	WAN NB	DELL	E6430	N/A
C	2.4G NB	DELL	E6430	N/A
D	5G-1 NB	Apple	A1278	N/A
E	5G-2 NB	DELL	E6430	N/A
F	Flash disk3.0	Transcend	JetFlash-700	N/A

**For Radiated (below 1GHz) and Radiated (above 1GHz) / Non-beamforming mode:**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	M4800	N/A


**For Radiated (above 1GHz) / Beamforming mode:**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	M4800	N/A
B	Linksys Tri-Band Wireless-AC Router (RX Device)	Linksys	MR8300 V2	N/A
C	NB	DELL	E4300	N/A

**For RF Conducted:**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

## 2.6 Test Setup Diagram

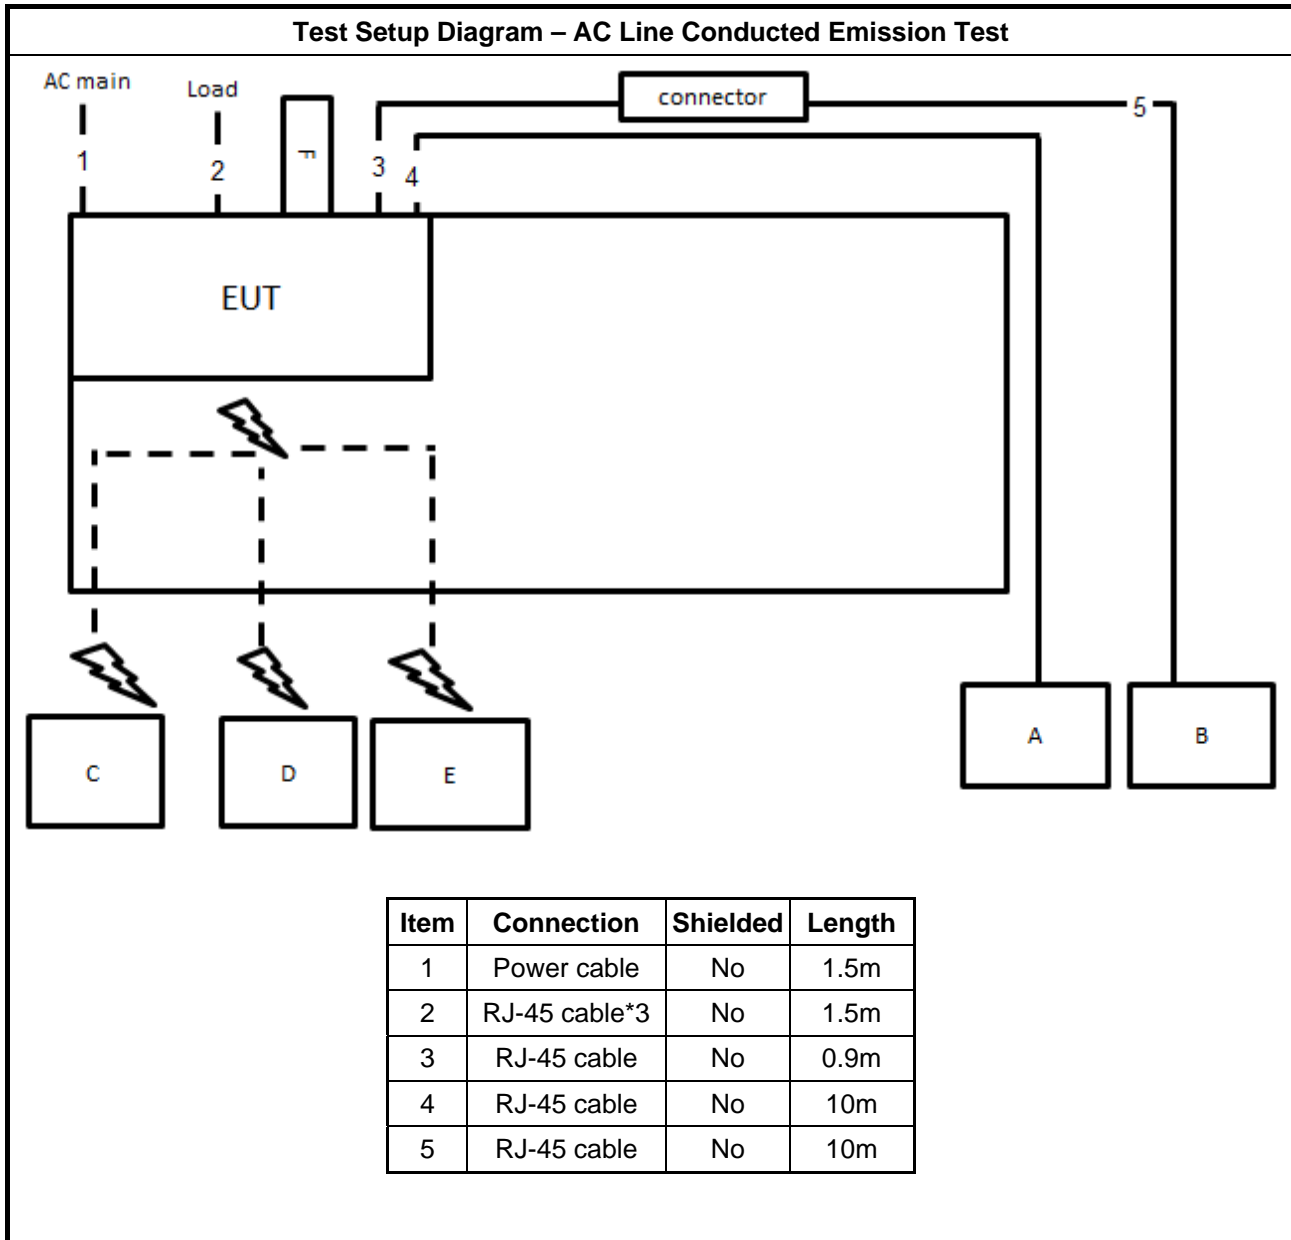





**Test Setup Diagram - Radiated Test < 1GHz**

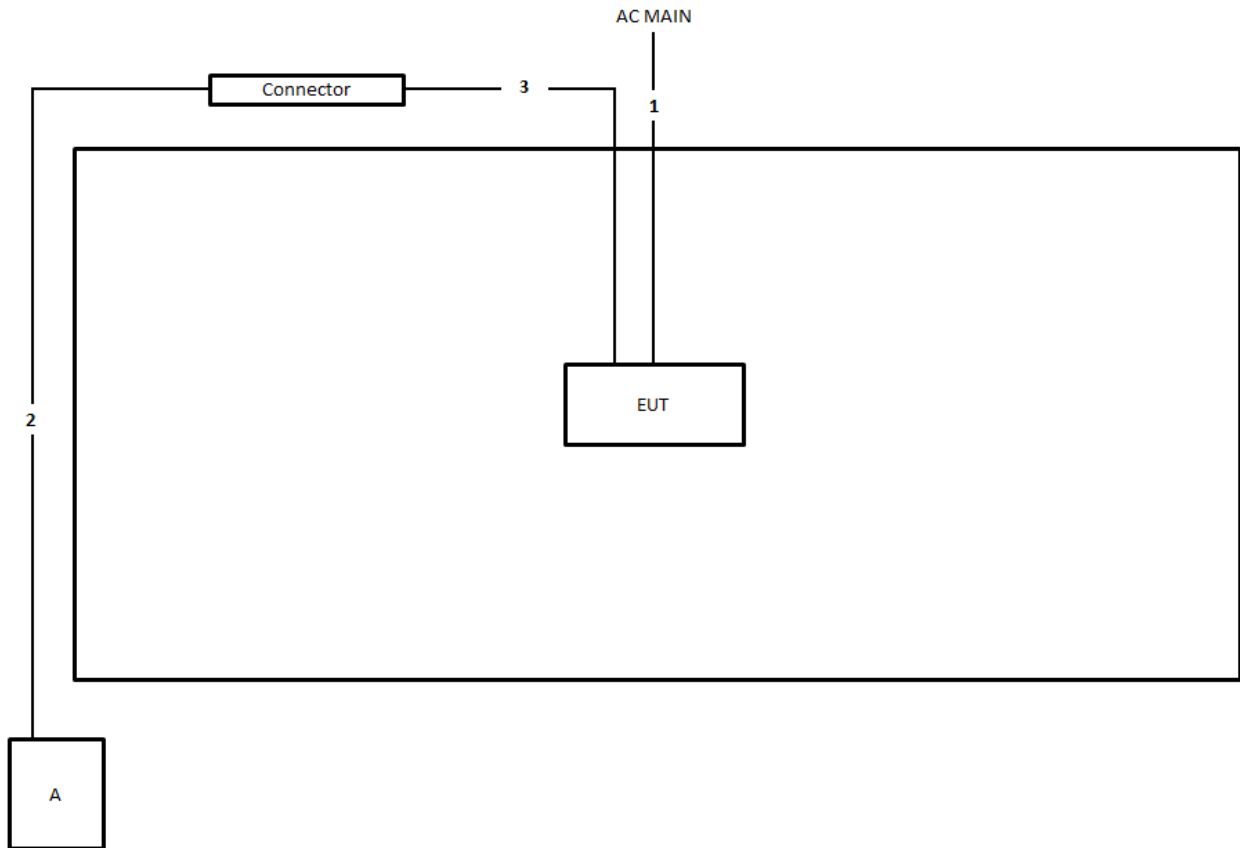

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	0.9m

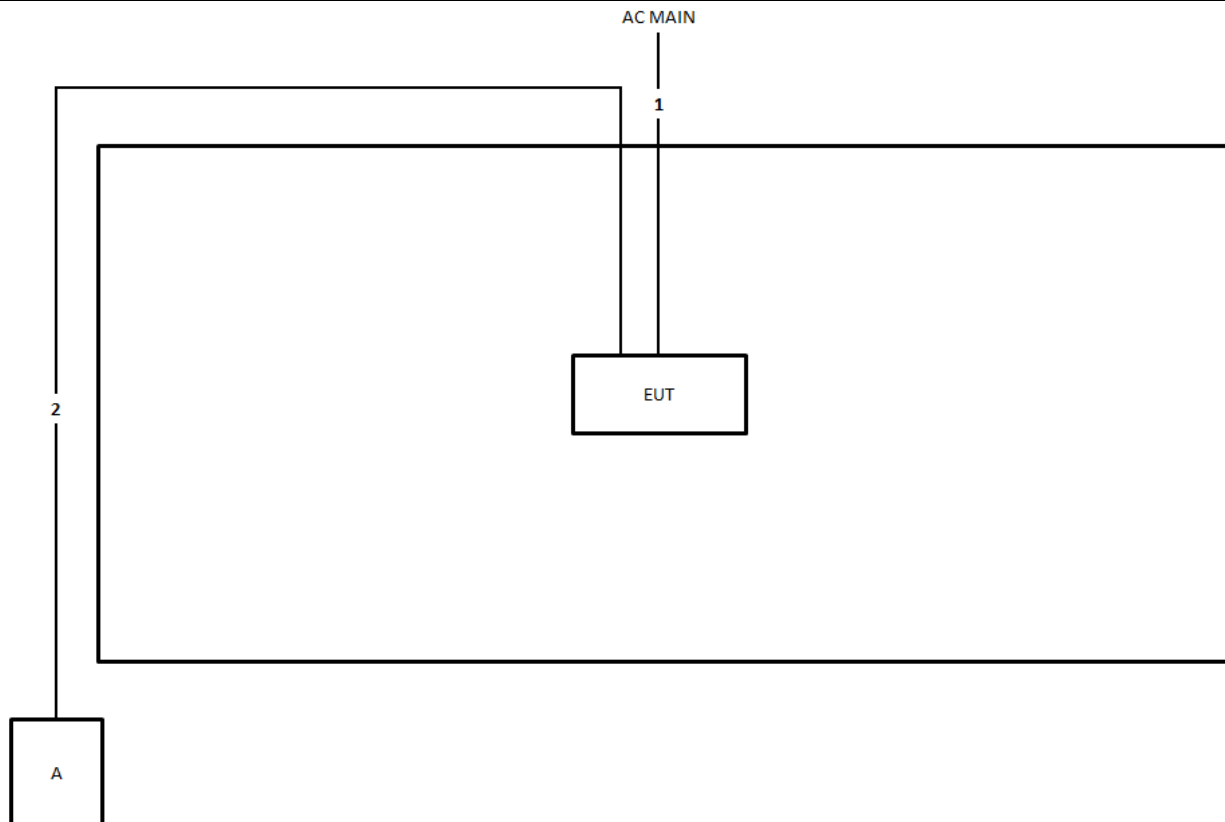**Test Setup Diagram - Radiated Test > 1GHz / Non beamforming mode**


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

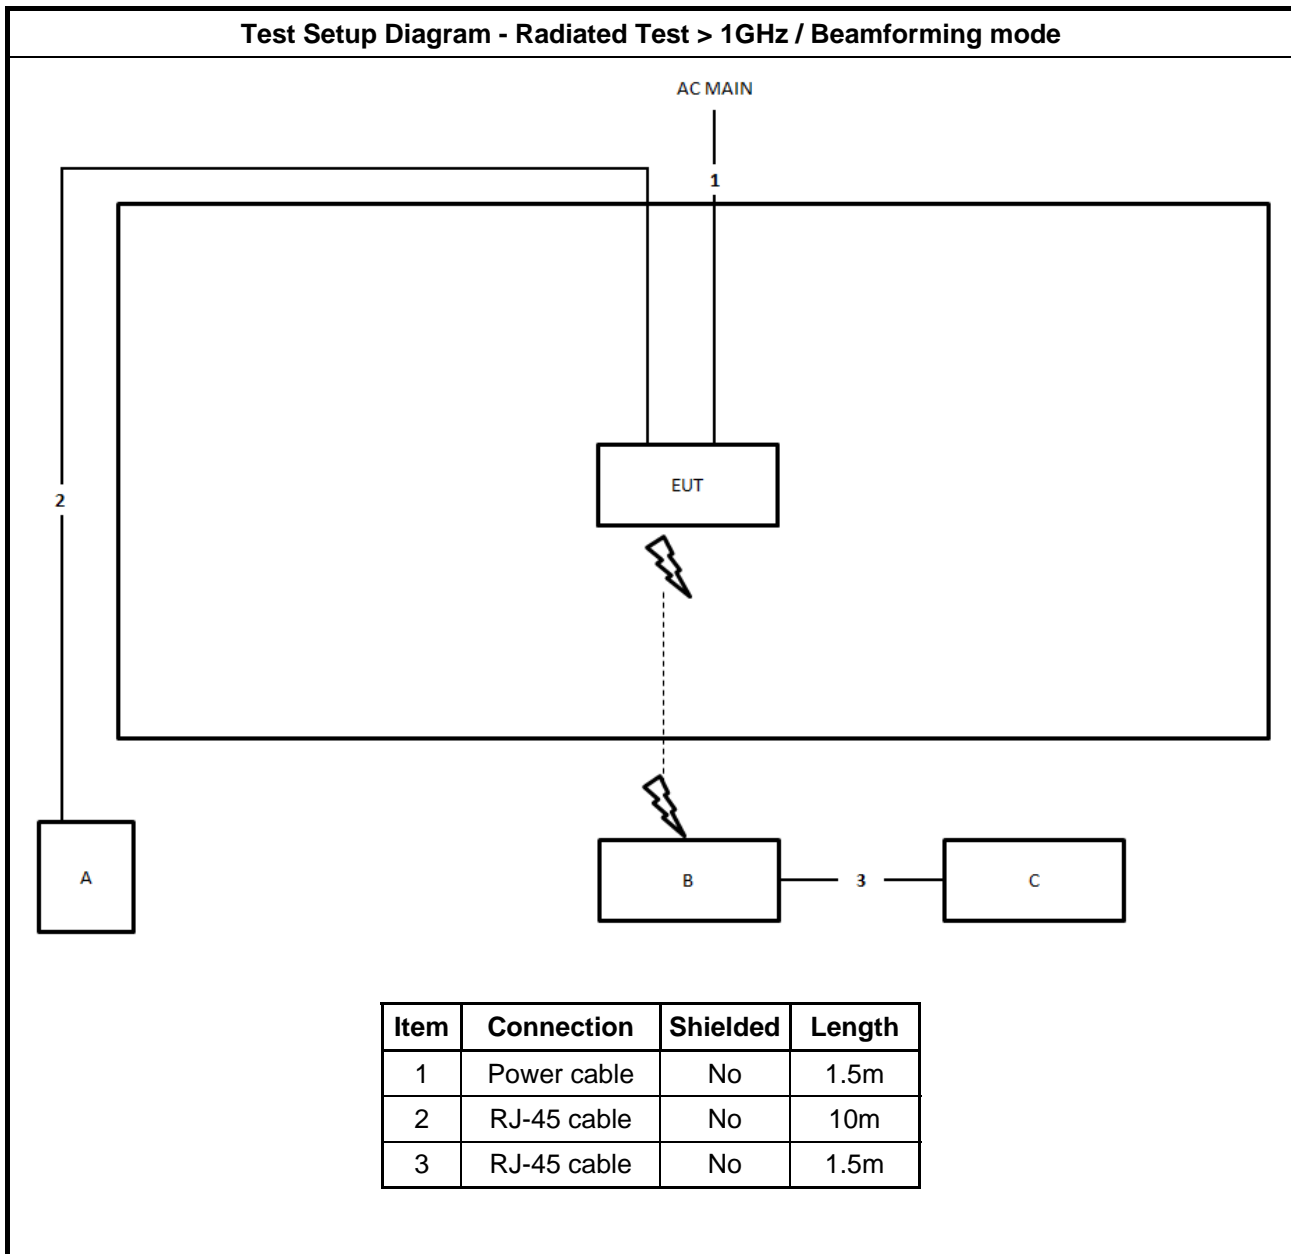**Test Setup Diagram - Radiated Test > 1GHz / Beamforming mode**




### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

### 3.1.4 Test Setup

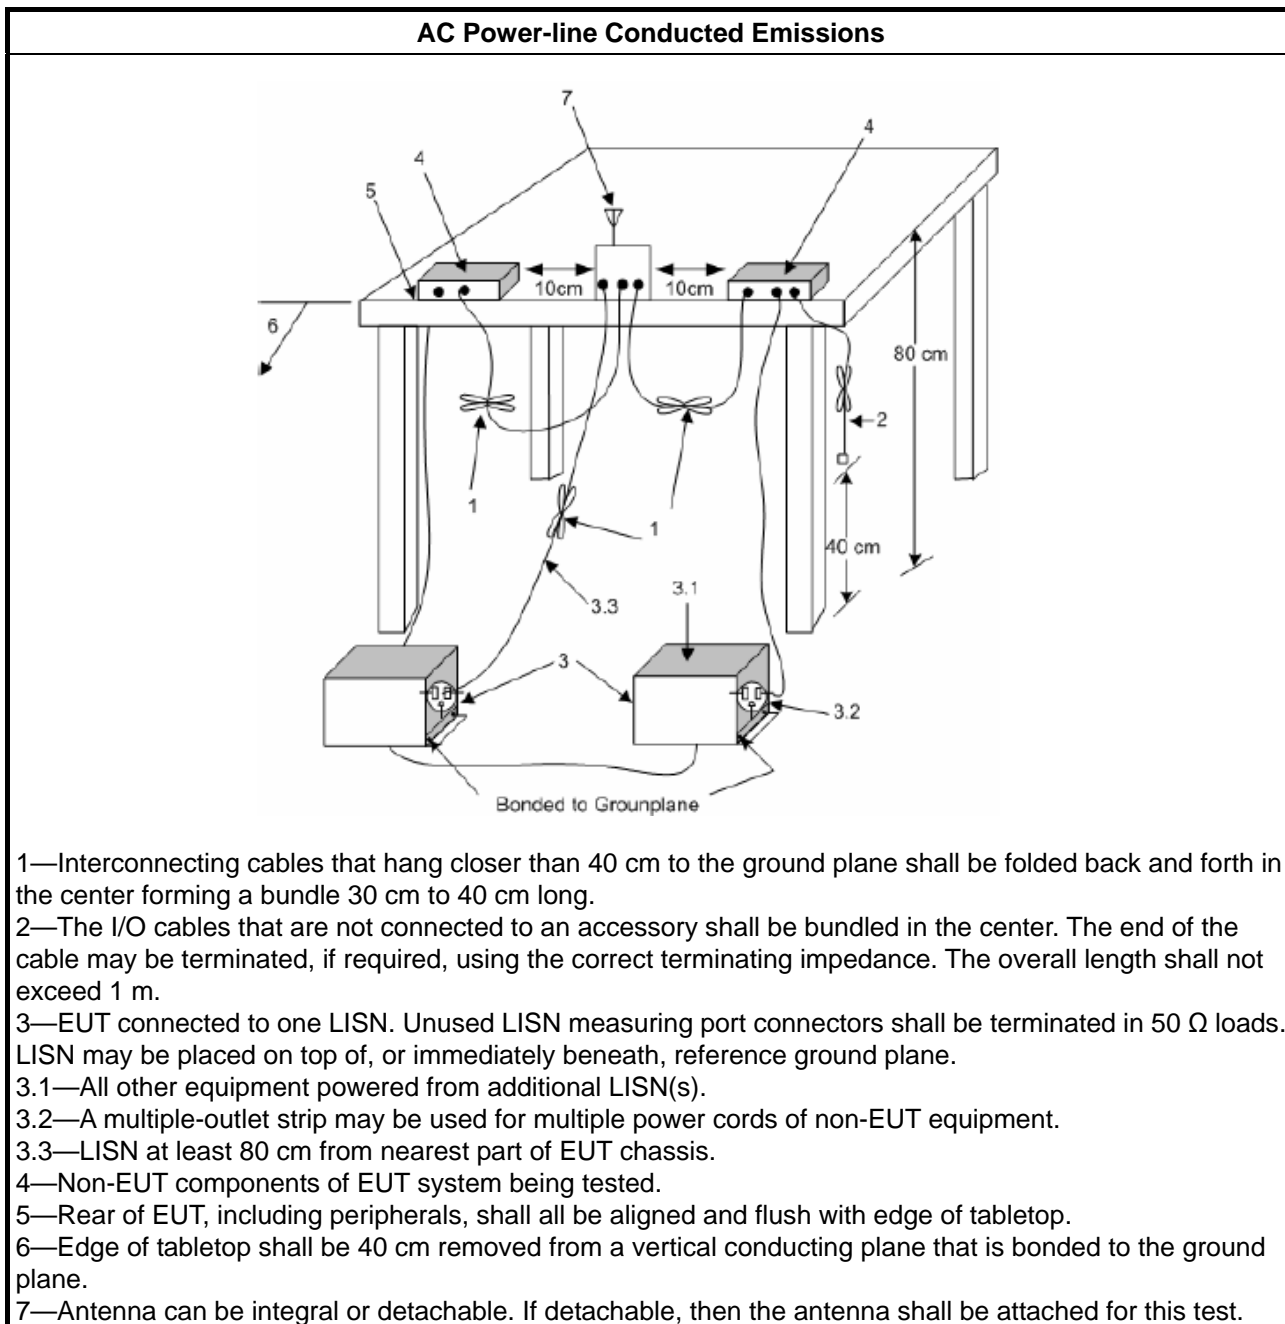

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

$$\text{Corrected Reading (dBuV)} = \text{LISN Factor} + \text{Cable Loss} + \text{Read Level} = \text{Level}$$

$$\text{Margin} = - \text{Limit} + (\text{Read Level} + \text{LISN Factor} + \text{Cable Loss})$$

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

## 3.2 DTS Bandwidth

### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
<b>Systems using digital modulation techniques:</b>	
▪	6 dB bandwidth $\geq$ 500 kHz.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

### 3.2.4 Test Setup

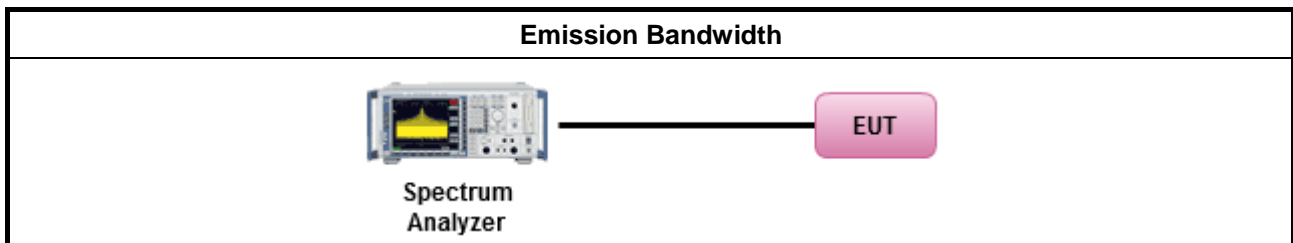

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:  <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])  <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

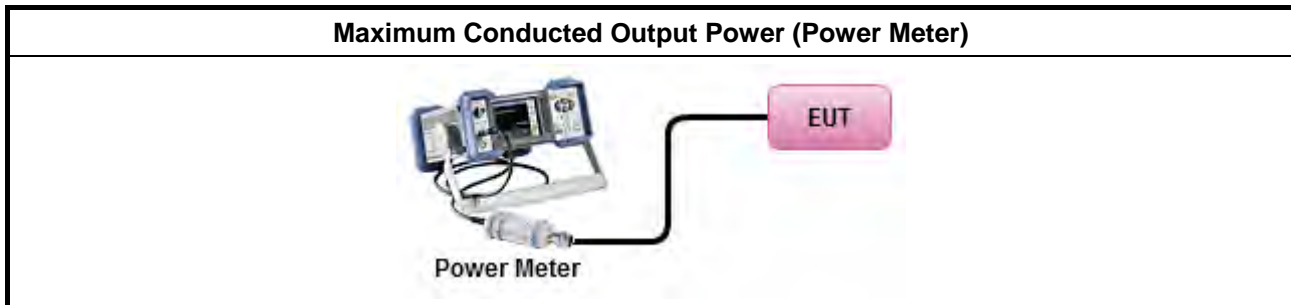

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) $\leq 8$ dBm/3kHz


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

### 3.4.4 Test Setup

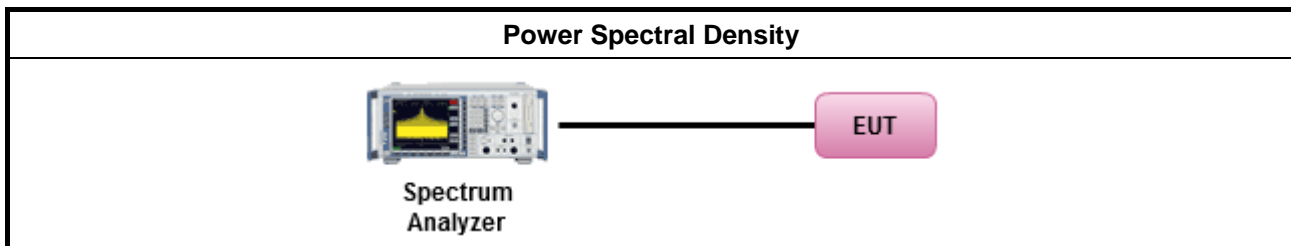

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
<p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p>	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

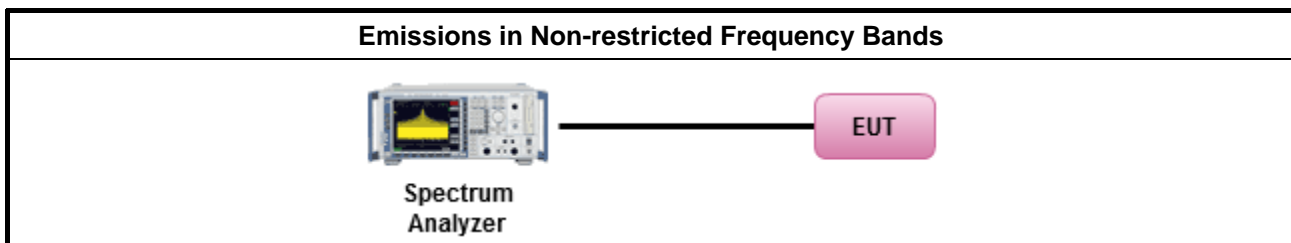

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




### 3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle $\geq 98$ or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$ ).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$ ).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

### 3.6.4 Test Setup

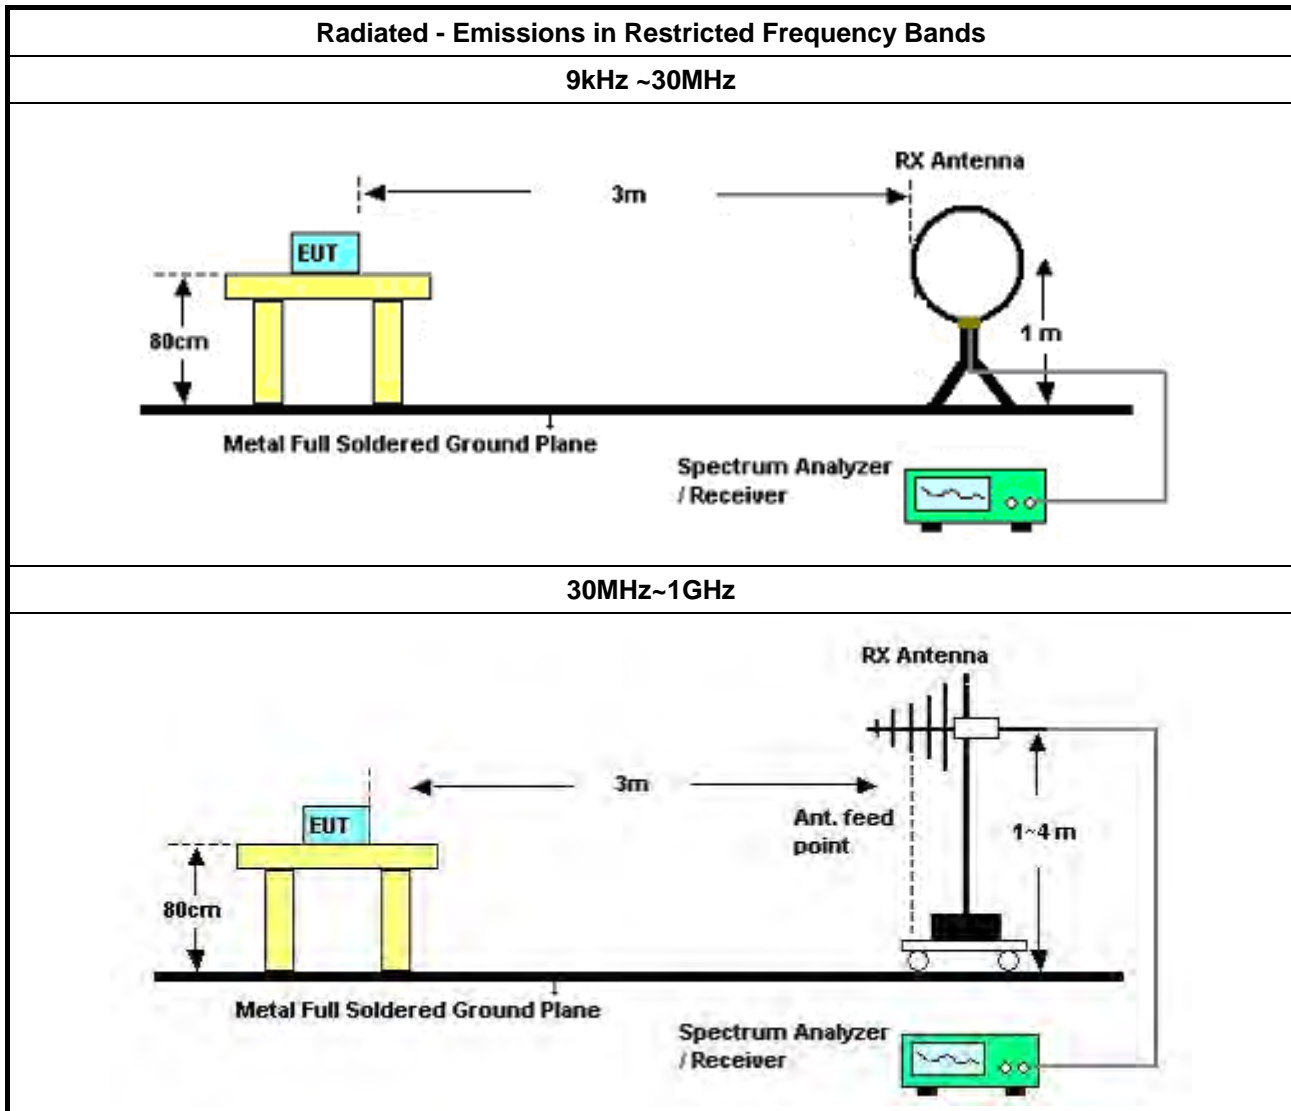

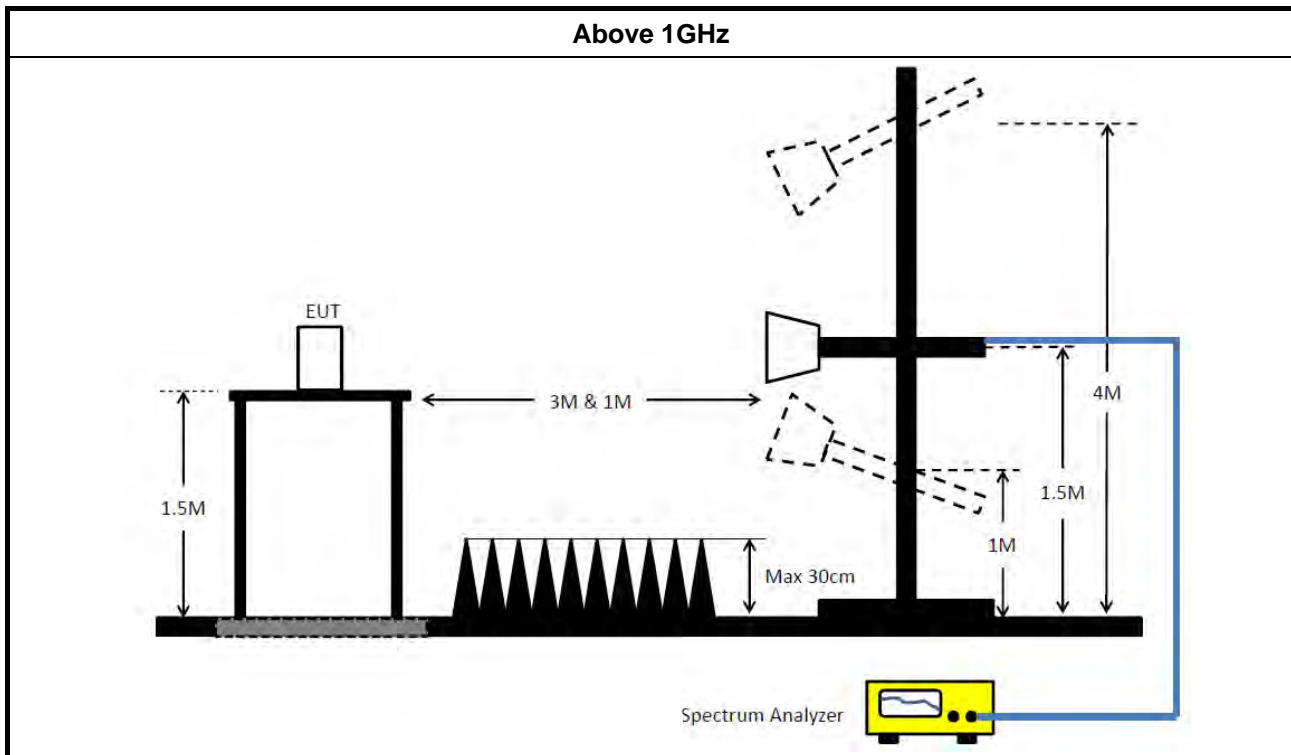

### 3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor (if applicable) = Level.

### 3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

### 3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 25, 2019	Dec. 24, 2020	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
Impedance Stabilization Network	Teseq	ISN T800	24557	150kHz ~ 230MHz	Nov. 25, 2019	Nov. 24, 2020	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 21, 2019	May 20, 2020	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112 & N-6-06	2888 & AT-N0611	30MHz ~ 1GHz	Oct. 12, 2019	Oct. 11, 2020	Radiation (03CH05-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 29, 2019	Mar. 28, 2020	Radiation (03CH05-CB)
Loop Antenna	Teseq	HLA 6120	31244	9kHz - 30 MHz	Mar. 16, 2020	Mar. 15, 2021	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 01, 2019	Apr. 30, 2020	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Aug. 15, 2019	Aug. 14, 2020	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 15, 2019	May 14, 2020	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	LOW Cable-04+23	30MHz~1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1292	1GHz~18GHz	Jul. 17, 2019	Jul. 16, 2020	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 12, 2019	Jun. 11, 2020	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	May 08, 2019	May 07, 2020	Radiation (03CH06-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 21, 2019	Oct. 20, 2020	Radiation (03CH06-CB)
RF Cable-high	HUBER+SUHNER	RG402	High Cable-05	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)
RF Cable-high	HUBER+SUHNER	RG402	High Cable-05+24	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 02, 2019	Jul. 01, 2020	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 11, 2019	Sep. 10, 2020	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 11, 2019	Sep. 10, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-3	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.





## AC Power Port Conducted Emission Result

Appendix A

### Summary



Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition
Mode 3	Pass	AV	303k	38.60	50.17	-11.57	10.23	Line

### Mode 3

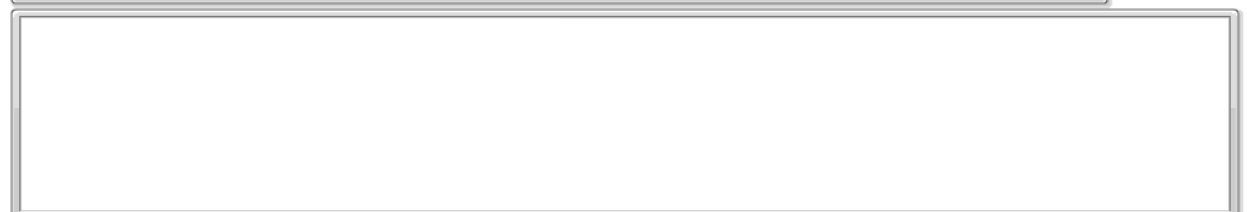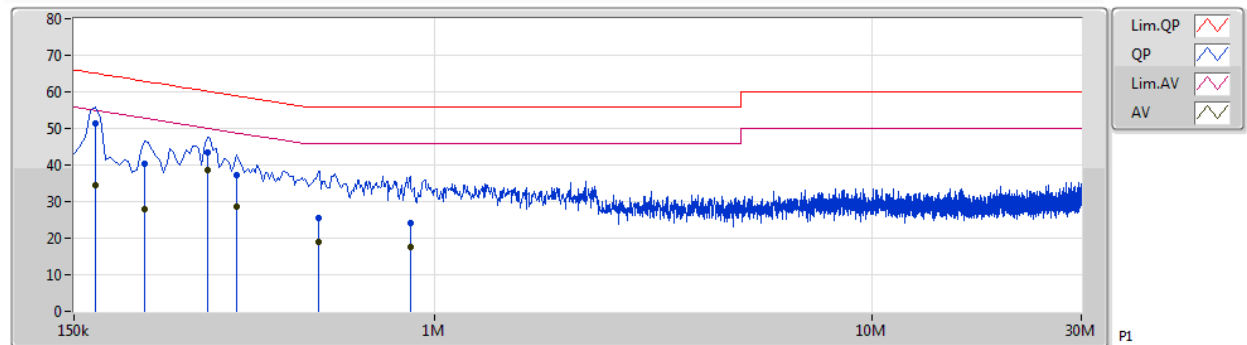

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	168k	51.35	65.06	-13.71	10.21	Line	-	41.14	0.05	0.06	10.10			
AV	168k	34.37	55.06	-20.69	10.21	Line	-	24.16	0.05	0.06	10.10			
QP	217.5k	40.32	62.92	-22.60	10.22	Line	-	30.10	0.05	0.07	10.10			
AV	217.5k	27.87	52.92	-25.05	10.22	Line	-	17.65	0.05	0.07	10.10			
QP	303k	43.52	60.17	-16.65	10.23	Line	-	33.29	0.05	0.08	10.10			
AV	303k	38.60	50.17	-11.57	10.23	Line	"Worst"	28.37	0.05	0.08	10.10			
QP	352.5k	37.19	58.91	-21.72	10.23	Line	-	26.96	0.05	0.08	10.10			
AV	352.5k	28.52	48.91	-20.39	10.23	Line	-	18.29	0.05	0.08	10.10			
QP	541.5k	25.56	56.00	-30.44	10.24	Line	-	15.32	0.05	0.09	10.10			
AV	541.5k	18.93	46.00	-27.07	10.24	Line	-	8.69	0.05	0.09	10.10			
QP	879k	24.28	56.00	-31.72	10.27	Line	-	14.01	0.06	0.11	10.10			
AV	879k	17.61	46.00	-28.39	10.27	Line	-	7.34	0.06	0.11	10.10			

### Mode 3

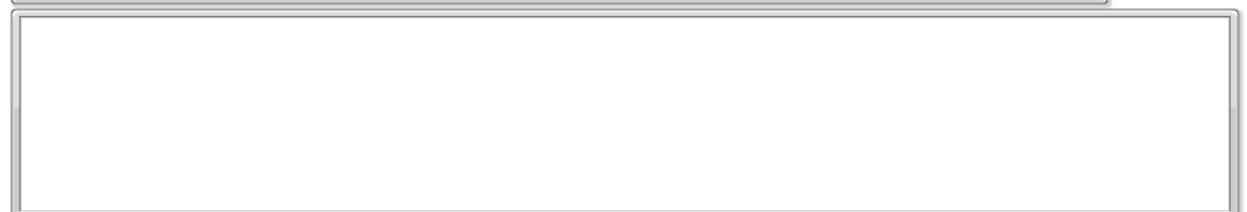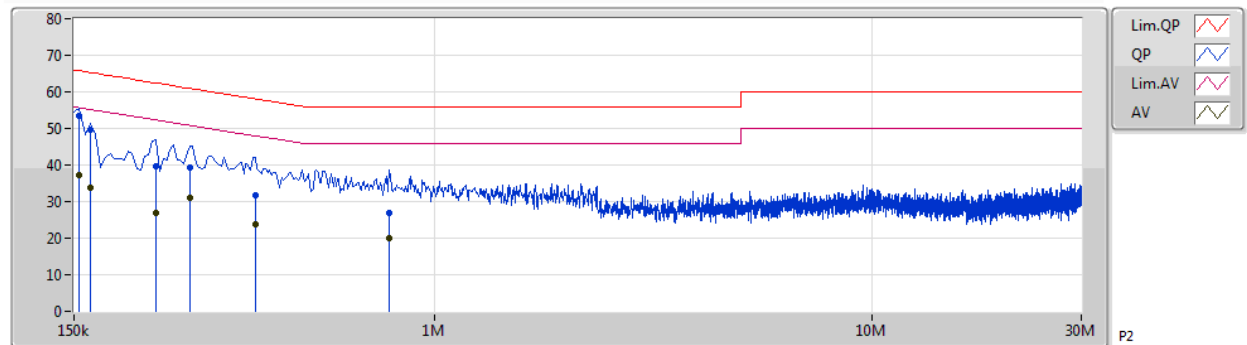

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	154.5k	53.55	65.75	-12.20	10.21	Neutral	"Worst"	43.34	0.05	0.06	10.10			
AV	154.5k	37.37	55.75	-18.38	10.21	Neutral	-	27.16	0.05	0.06	10.10			
QP	163.5k	49.80	65.27	-15.47	10.21	Neutral	-	39.59	0.05	0.06	10.10			
AV	163.5k	33.69	55.27	-21.58	10.21	Neutral	-	23.48	0.05	0.06	10.10			
QP	231k	39.82	62.41	-22.59	10.22	Neutral	-	29.60	0.05	0.07	10.10			
AV	231k	26.81	52.41	-25.60	10.22	Neutral	-	16.59	0.05	0.07	10.10			
QP	276k	39.38	60.93	-21.55	10.22	Neutral	-	29.16	0.05	0.07	10.10			
AV	276k	31.20	50.93	-19.73	10.22	Neutral	-	20.98	0.05	0.07	10.10			
QP	388.5k	31.73	58.10	-26.37	10.23	Neutral	-	21.50	0.05	0.08	10.10			
AV	388.5k	23.63	48.10	-24.47	10.23	Neutral	-	13.40	0.05	0.08	10.10			
QP	789k	26.79	56.00	-29.21	10.27	Neutral	-	16.52	0.06	0.11	10.10			
AV	789k	19.86	46.00	-26.14	10.27	Neutral	-	9.59	0.06	0.11	10.10			

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	9.05M	13.393M	13M4G1D	7.575M	12.969M
802.11g-BF_Nss1,(6Mbps)_2TX	16.35M	17.016M	17M0D1D	16.3M	16.367M
VHT20-BF_Nss1,(MCS0)_2TX	17.55M	19.265M	19M3D1D	16.275M	17.541M
VHT40-BF_Nss1,(MCS0)_2TX	32.55M	35.882M	35M9D1D	28.8M	35.632M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	8.15M	13.043M	7.575M	12.969M
2437MHz	Pass	500k	8.525M	13.393M	9.05M	13.343M
2462MHz	Pass	500k	8.525M	13.193M	9.05M	13.243M
802.11g-BF_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.3M	16.392M	16.325M	16.367M
2437MHz	Pass	500k	16.325M	16.842M	16.3M	17.016M
2462MHz	Pass	500k	16.3M	16.367M	16.35M	16.392M
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.325M	17.666M	16.275M	17.541M
2437MHz	Pass	500k	17.3M	18.416M	16.725M	19.265M
2462MHz	Pass	500k	17.55M	17.666M	17.525M	17.566M
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	32.55M	35.732M	31.3M	35.882M
2437MHz	Pass	500k	28.8M	35.782M	31.35M	35.832M
2452MHz	Pass	500k	31.25M	35.832M	31.3M	35.632M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

# 802.11b\_Nss1,(1Mbps)\_2TX

**EBW**
**2412MHz**


23/03/2020

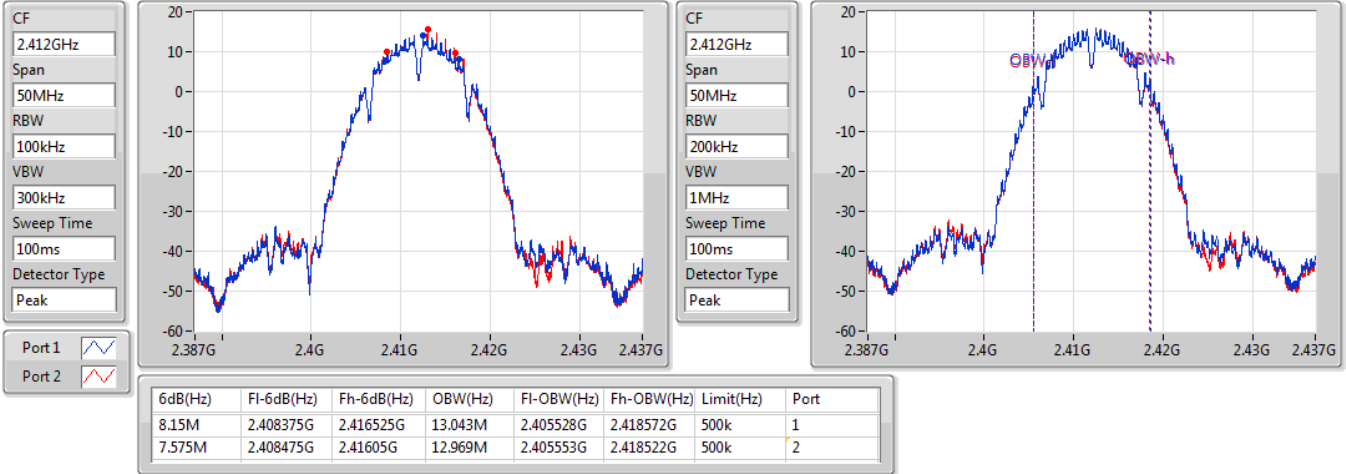

# 802.11b\_Nss1,(1Mbps)\_2TX

**EBW**
**2437MHz**


23/03/2020

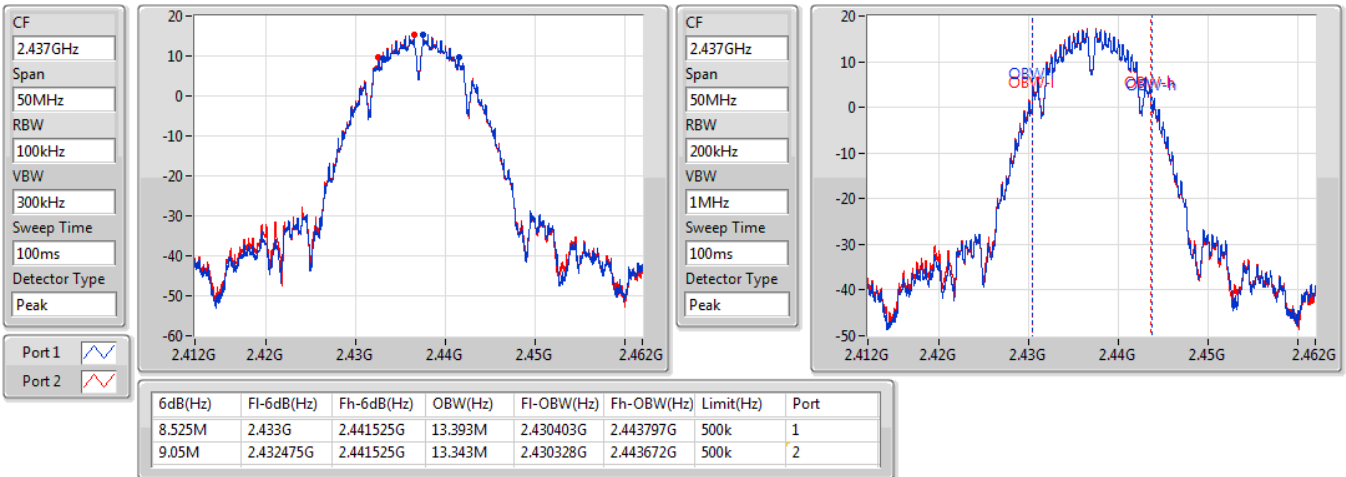

## 802.11b\_Nss1,(1Mbps)\_2TX

2462MHz


23/03/2020

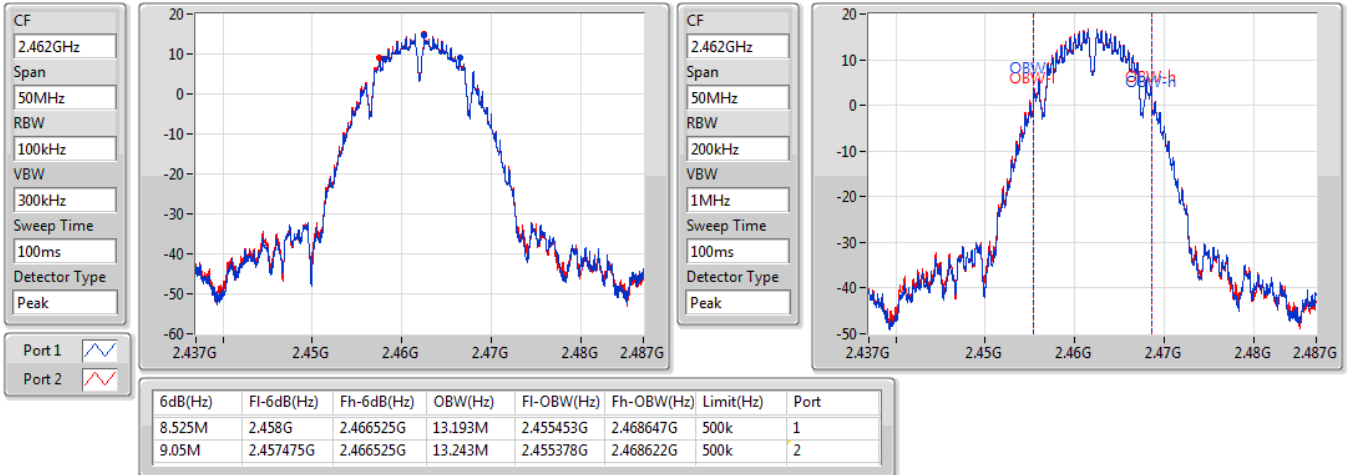

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

2412MHz


23/03/2020

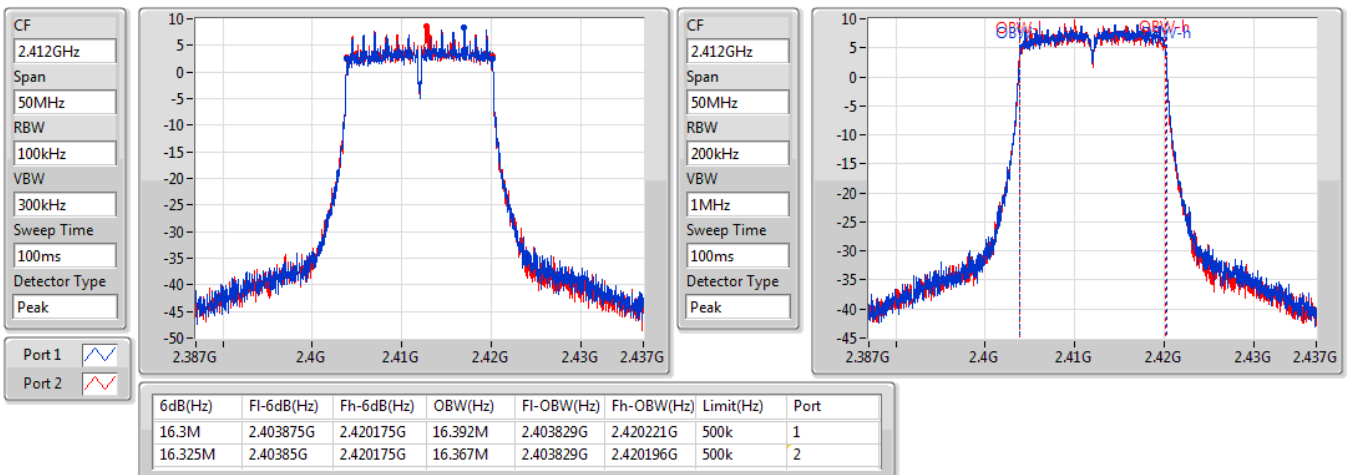

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

2437MHz


23/03/2020

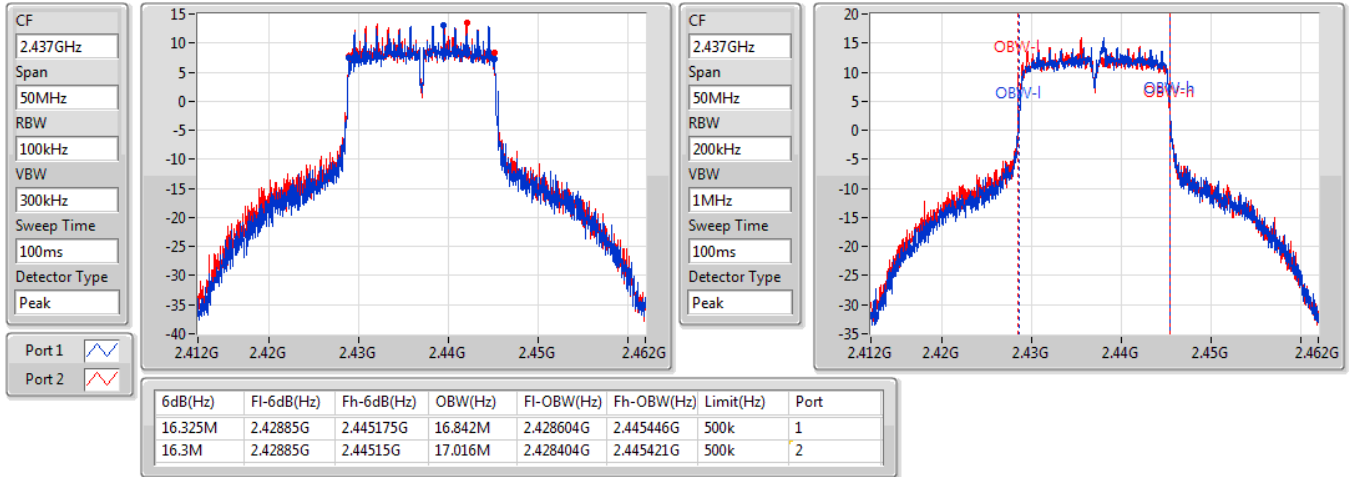

## 802.11g-BF\_Nss1,(6Mbps)\_2TX


2462MHz

23/03/2020

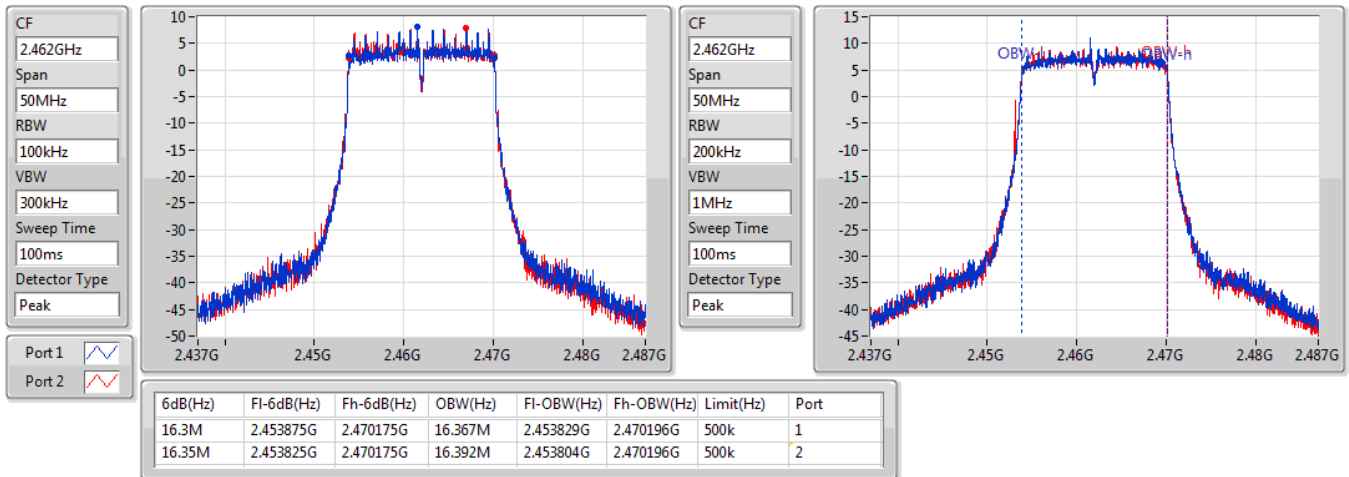


**VHT20-BF\_Nss1,(MCS0)\_2TX**
**2412MHz**

23/03/2020

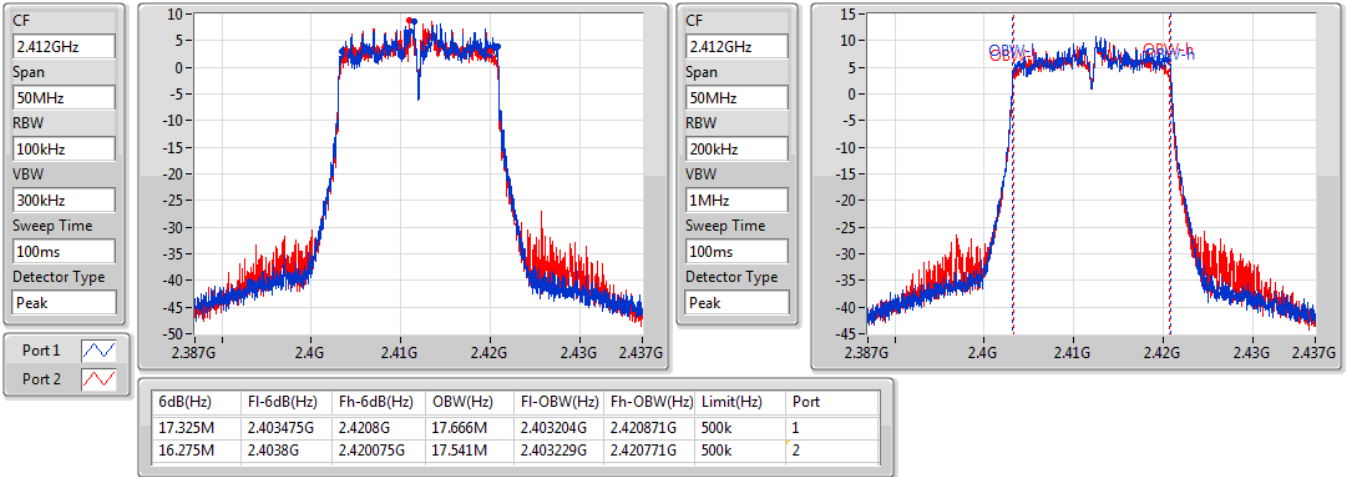

**VHT20-BF\_Nss1,(MCS0)\_2TX**
**2437MHz**

23/03/2020

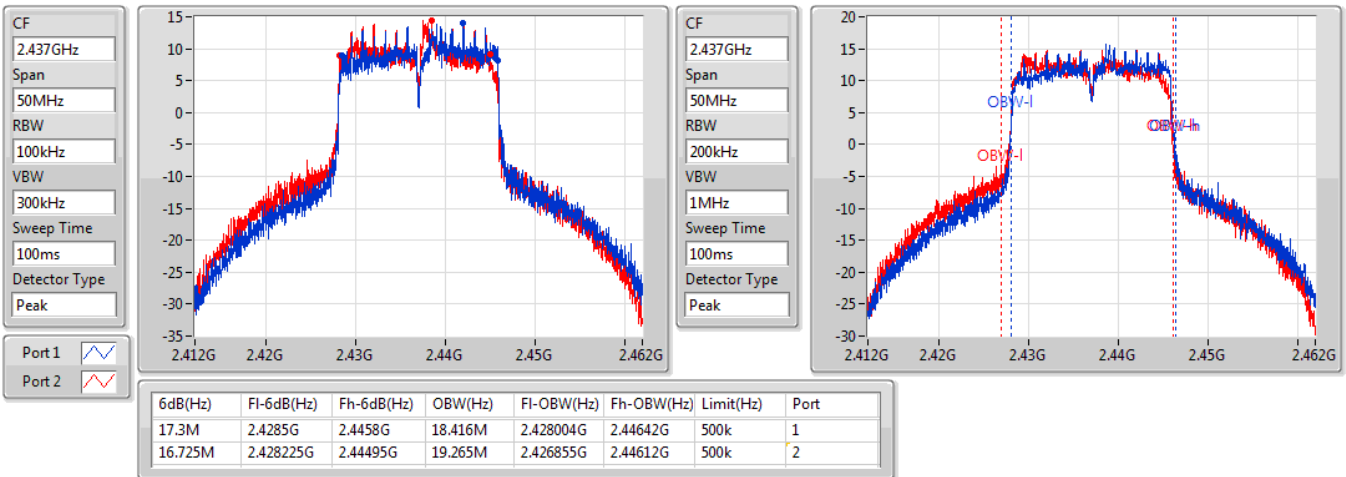


**VHT20-BF\_Nss1,(MCS0)\_2TX**
**EBW**
**2462MHz**

23/03/2020

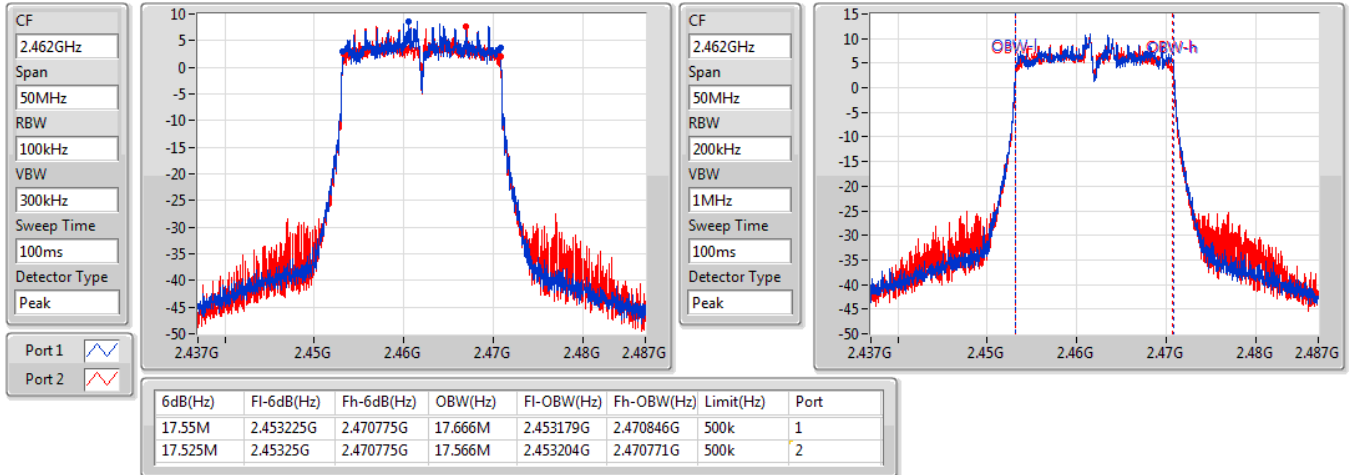

**VHT40-BF\_Nss1,(MCS0)\_2TX**
**EBW**
**2422MHz**

23/03/2020

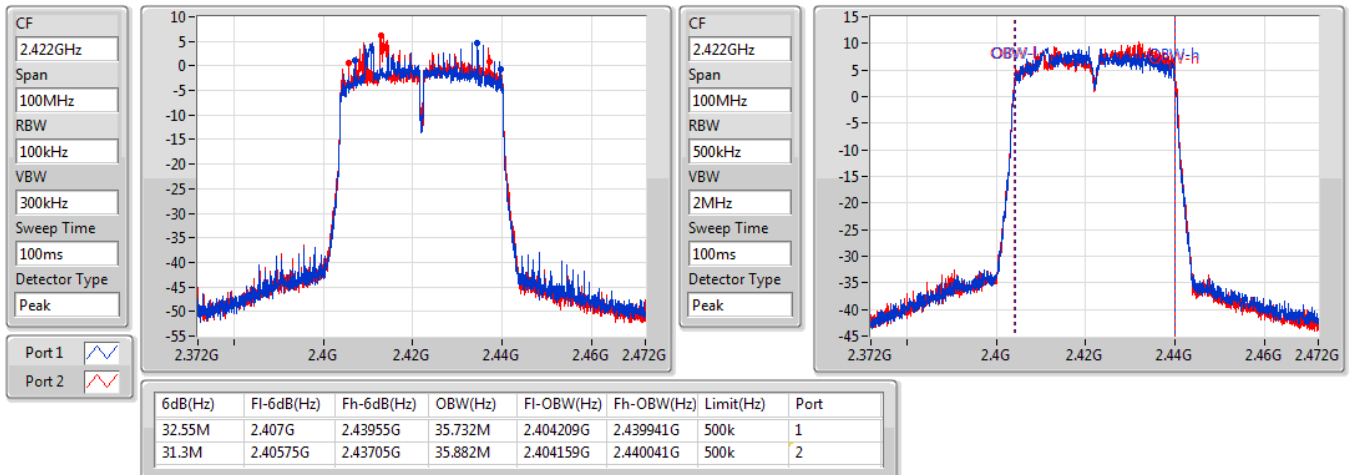


**VHT40-BF\_Nss1,(MCS0)\_2TX**
**2437MHz**

23/03/2020

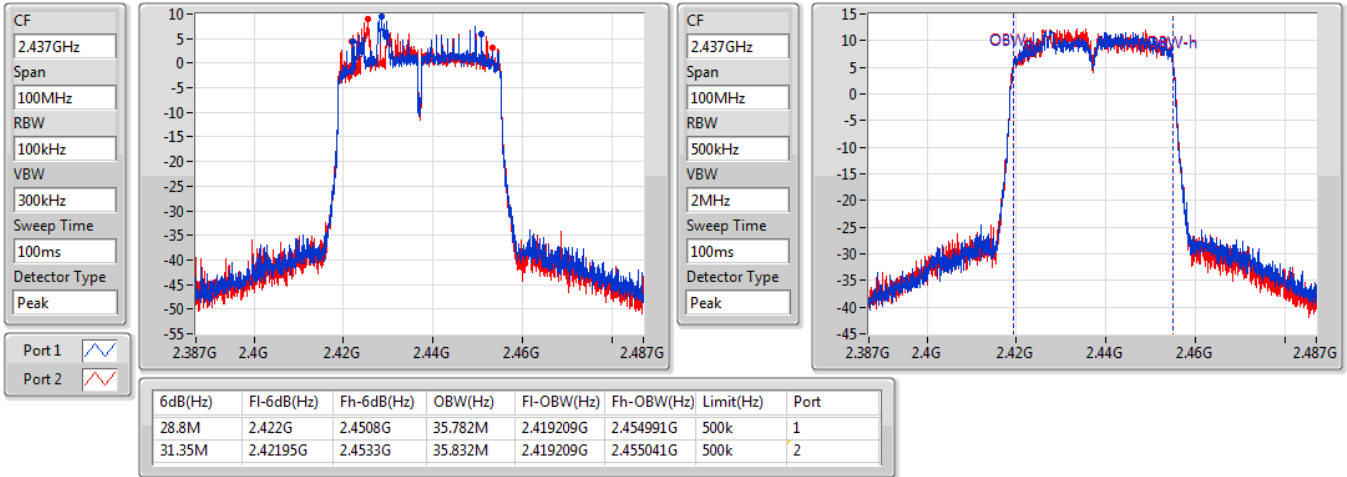
**VHT40-BF\_Nss1,(MCS0)\_2TX**
**2452MHz**

23/03/2020

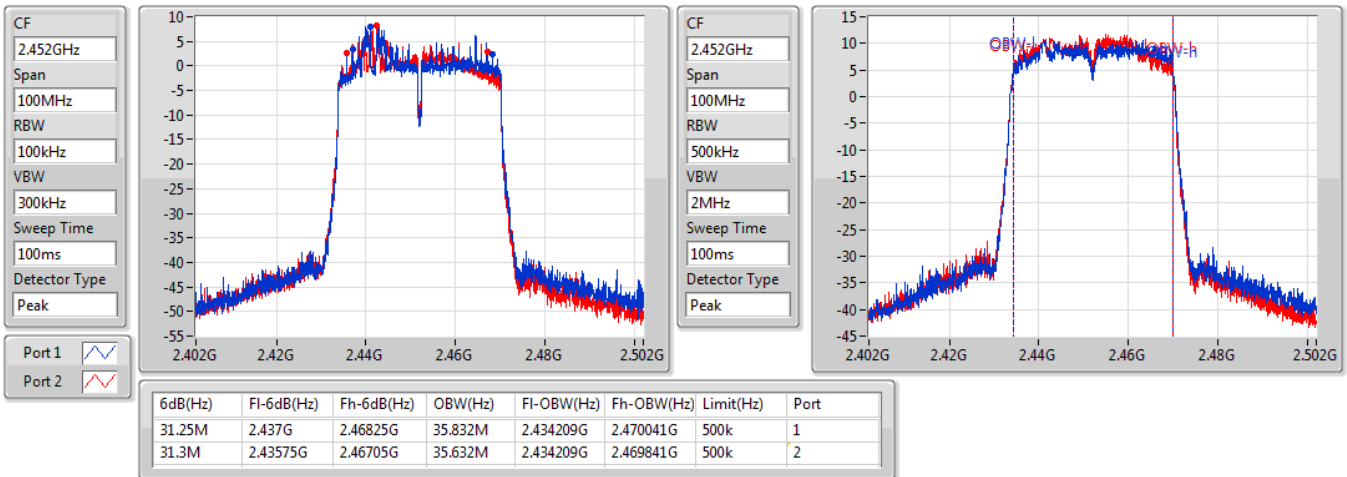



## Average Power

## Appendix C

### Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	28.25	0.66834
802.11g-BF_Nss1,(6Mbps)_2TX	27.19	0.52360
VHT20-BF_Nss1,(MCS0)_2TX	27.55	0.56885
VHT40-BF_Nss1,(MCS0)_2TX	22.53	0.17906



**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	2.81	23.83	23.76	26.81	30.00
2437MHz	Pass	2.81	25.09	25.38	28.25	30.00
2462MHz	Pass	2.81	24.58	24.84	27.72	30.00
802.11g-BF_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.59	19.32	19.38	22.36	30.00
2417MHz	Pass	5.59	20.51	20.62	23.58	30.00
2437MHz	Pass	5.59	24.09	24.27	27.19	30.00
2457MHz	Pass	5.59	21.57	21.75	24.67	30.00
2462MHz	Pass	5.59	19.03	19.31	22.18	30.00
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.59	18.69	18.84	21.78	30.00
2417MHz	Pass	5.59	20.67	20.83	23.76	30.00
2437MHz	Pass	5.59	24.28	24.78	27.55	30.00
2457MHz	Pass	5.59	20.94	21.26	24.11	30.00
2462MHz	Pass	5.59	19.23	19.34	22.30	30.00
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.59	16.85	17.14	20.01	30.00
2437MHz	Pass	5.59	19.33	19.71	22.53	30.00
2452MHz	Pass	5.59	18.67	18.82	21.76	30.00

**DG** = Directional Gain; **Port X** = Port X output power

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	1.64
802.11g-BF_Nss1,(6Mbps)_2TX	-0.34
VHT20-BF_Nss1,(MCS0)_2TX	1.36
VHT40-BF_Nss1,(MCS0)_2TX	-7.85

**RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.59	-3.37	-0.02	0.33	8.00
2437MHz	Pass	5.59	-1.57	-1.17	1.64	8.00
2462MHz	Pass	5.59	-0.24	-1.28	1.09	8.00
802.11g-BF_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.59	-4.43	-6.60	-3.21	8.00
2437MHz	Pass	5.59	-1.73	-1.20	-0.34	8.00
2462MHz	Pass	5.59	-5.74	-6.58	-3.72	8.00
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.59	-5.34	-6.98	-4.48	8.00
2437MHz	Pass	5.59	0.05	-0.60	1.36	8.00
2462MHz	Pass	5.59	-6.29	-7.29	-4.15	8.00
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.59	-12.30	-10.32	-9.52	8.00
2437MHz	Pass	5.59	-9.11	-8.78	-7.85	8.00
2452MHz	Pass	5.59	-9.78	-8.99	-8.06	8.00

**DG** = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2412MHz

23/03/2020

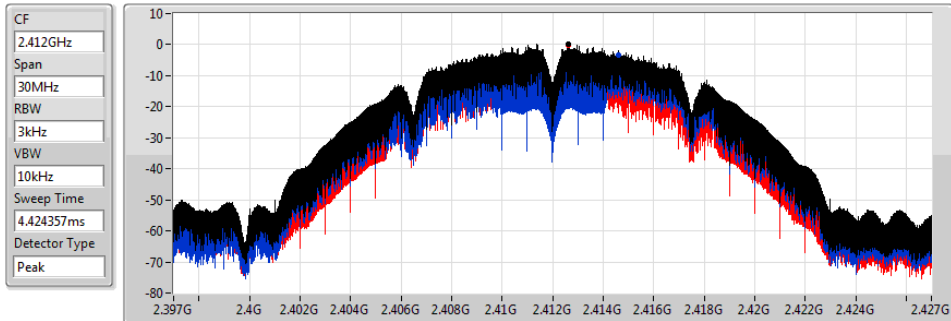


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.33	0.33	-3.37	-0.02

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2437MHz

23/03/2020

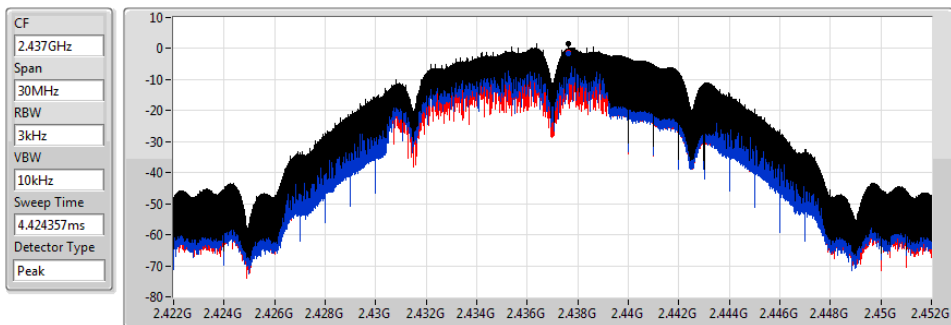


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.64	1.64	-1.57	-1.17

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2462MHz

23/03/2020

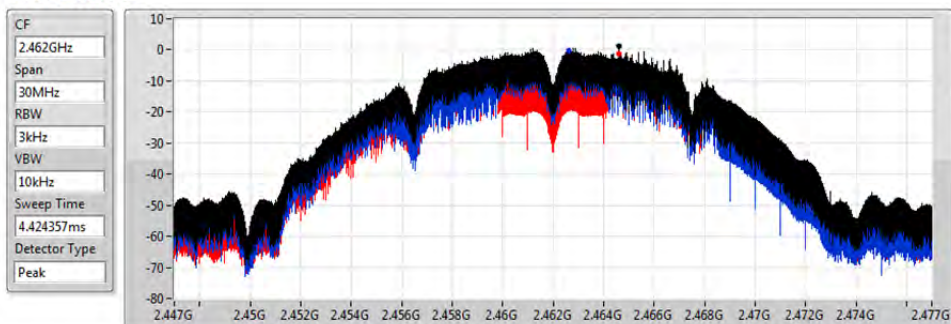


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.09	1.09	-0.24	-1.28

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

PSD

2412MHz

23/03/2020

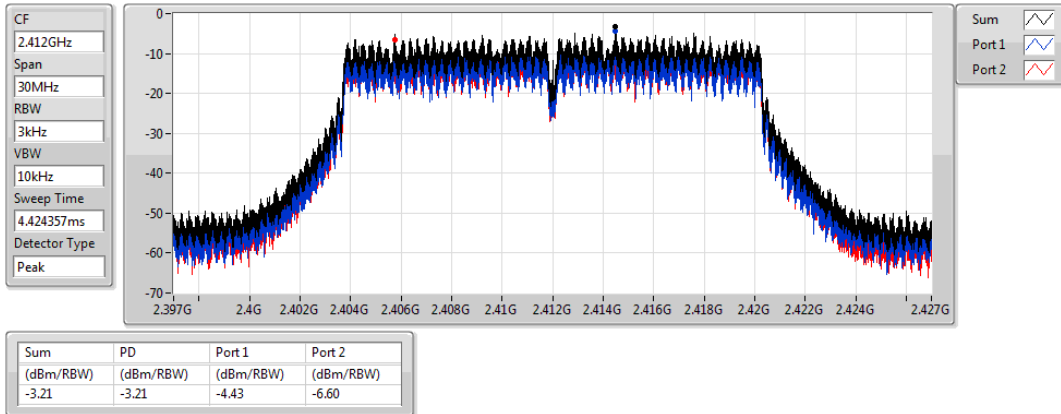


## 802.11g-BF\_Nss1,(6Mbps)\_2TX

PSD

2437MHz

23/03/2020

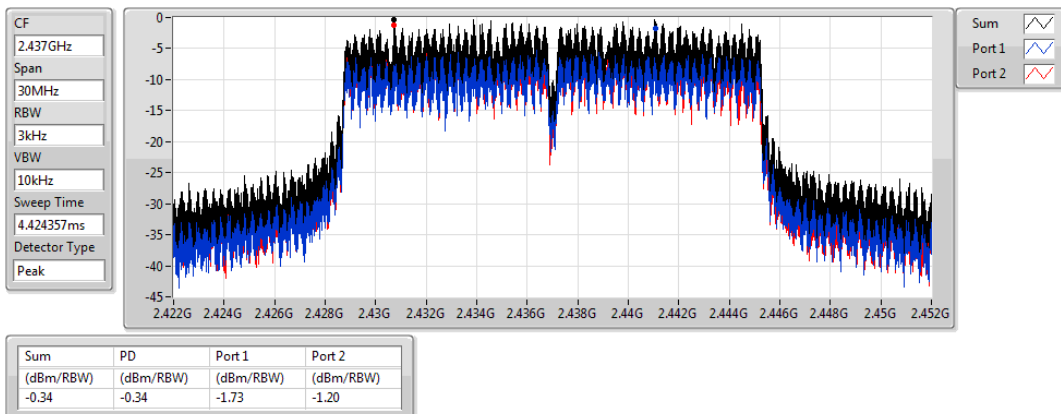


## 802.11g-BF\_Nss1,(6Mbps)\_2TX

PSD

2462MHz

23/03/2020

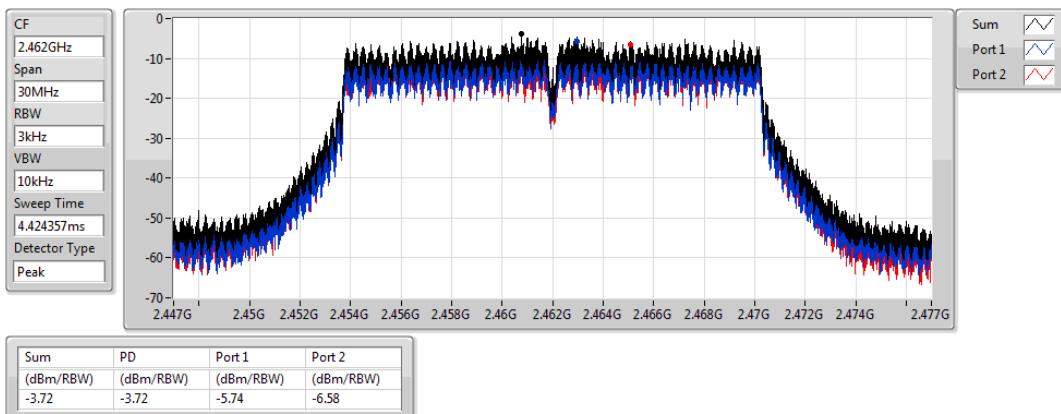


### VHT20-BF\_Nss1,(MCS0)\_2TX

PSD

2412MHz

23/03/2020

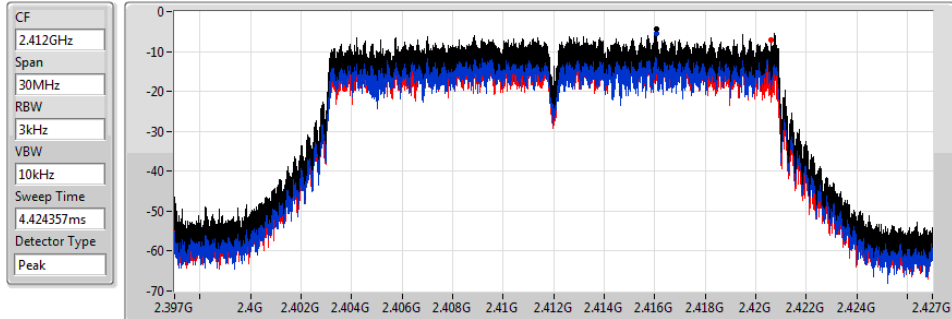


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.48	-4.48	-5.34	-6.98

### VHT20-BF\_Nss1,(MCS0)\_2TX

PSD

2437MHz

23/03/2020

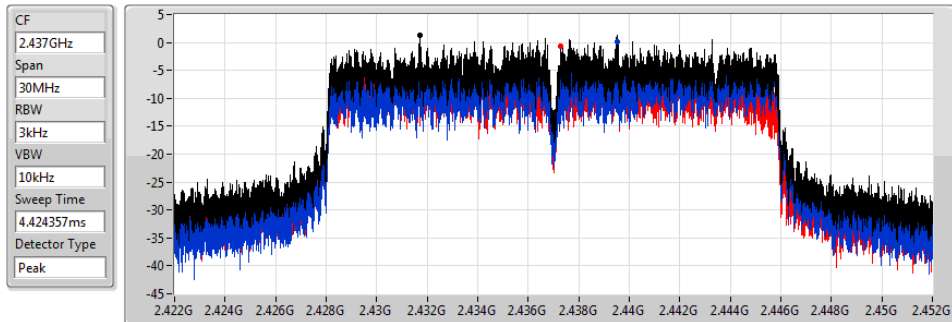


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.36	1.36	0.05	-0.60

### VHT20-BF\_Nss1,(MCS0)\_2TX

PSD

2462MHz

23/03/2020

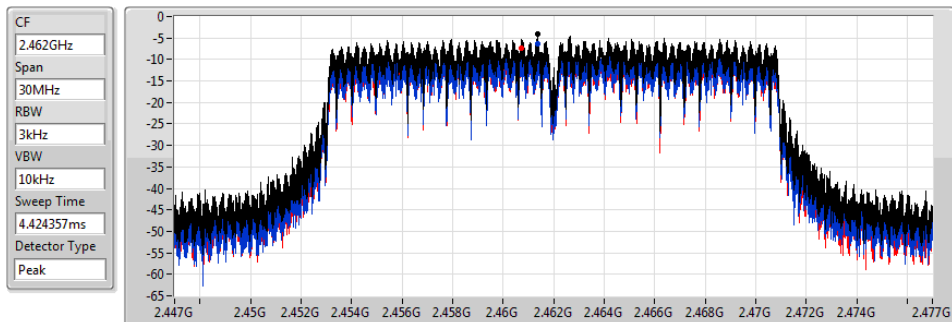


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.15	-4.15	-6.29	-7.29

### VHT40-BF\_Nss1,(MCS0)\_2TX

PSD

2422MHz

23/03/2020

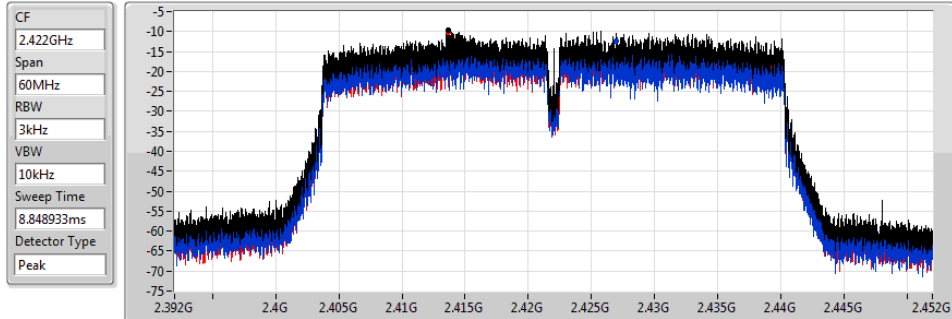


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.52	-9.52	-12.30	-10.32

### VHT40-BF\_Nss1,(MCS0)\_2TX

PSD

2437MHz

23/03/2020

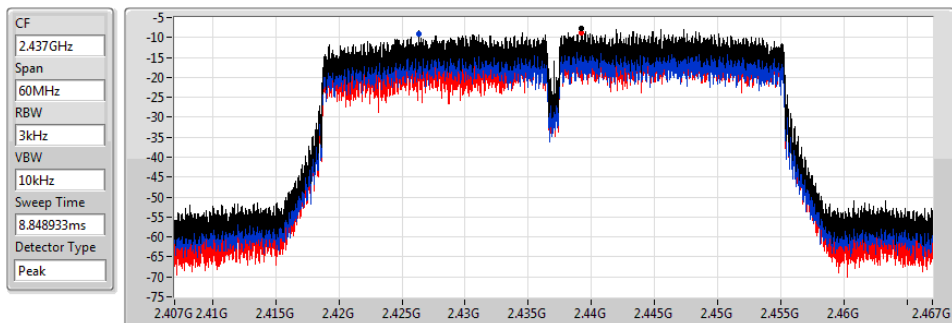


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.85	-7.85	-9.11	-8.78

### VHT40-BF\_Nss1,(MCS0)\_2TX

PSD

2452MHz

23/03/2020

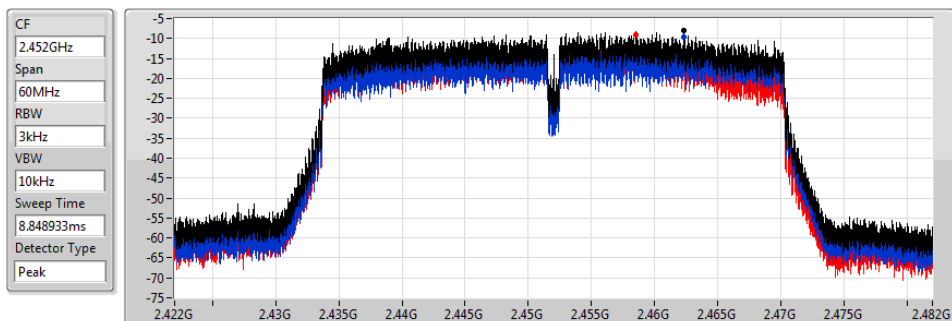

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.06	-8.06	-9.78	-8.99

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43649G	15.42	-14.58	940.16M	-48.62	2.39748G	-35.25	2.4G	-41.48	2.4888G	-46.79	16.51512G	-36.02	2
802.11g-BF_Nss1,(6Mbps)_2TX	Pass	2.43753G	15.39	-14.61	1.71576G	-47.30	2.4G	-33.29	2.4G	-34.89	2.49602G	-45.94	16.50107G	-37.70	1
VHT20-BF_Nss1,(MCS0)_2TX	Pass	2.442G	14.21	-15.79	2.11739G	-47.71	2.39988G	-30.80	2.4G	-38.30	2.5118G	-46.53	24.27513G	-36.36	2
VHT40-BF_Nss1,(MCS0)_2TX	Pass	2.42797G	11.34	-18.66	2.16285G	-48.01	2.39576G	-37.67	2.4G	-42.60	2.56002G	-43.49	24.07449G	-37.58	1

**Result**



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43649G	15.42	-14.58	899.09M	-48.60	2.39902G	-36.19	2.4G	-42.68	2.49584G	-46.47	16.55446G	-37.14	1
2412MHz	Pass	2.43649G	15.42	-14.58	940.16M	-48.62	2.39748G	-35.25	2.4G	-41.48	2.4888G	-46.79	16.51512G	-36.02	2
2437MHz	Pass	2.43649G	15.42	-14.58	863.56M	-47.37	2.4G	-46.16	2.4G	-47.07	2.4875G	-46.31	16.87475G	-35.72	1
2437MHz	Pass	2.43649G	15.42	-14.58	855.11M	-47.29	2.39942G	-46.77	2.4G	-46.91	2.4941G	-45.21	17.16132G	-37.11	2
2462MHz	Pass	2.43649G	15.42	-14.58	776.77M	-48.27	2.39742G	-48.13	2.4835G	-43.08	2.4875G	-41.77	15.20306G	-37.09	1
2462MHz	Pass	2.43649G	15.42	-14.58	525.42M	-48.38	2.4G	-48.08	2.4835G	-40.13	2.48352G	-42.10	24.10375G	-37.37	2
802.11g-BF_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43753G	15.39	-14.61	1.71576G	-47.30	2.4G	-33.29	2.4G	-34.89	2.49602G	-45.94	16.50107G	-37.70	1
2412MHz	Pass	2.43753G	15.39	-14.61	730.17M	-48.87	2.39918G	-34.35	2.4G	-35.33	2.49608G	-47.29	24.39032G	-37.94	2
2437MHz	Pass	2.43753G	15.39	-14.61	794.82M	-48.81	2.39926G	-39.46	2.4G	-41.89	2.484G	-45.56	24.41842G	-36.98	1
2437MHz	Pass	2.43753G	15.39	-14.61	688.23M	-48.50	2.3998G	-37.91	2.4G	-38.60	2.48382G	-42.13	17.50409G	-37.73	2
2462MHz	Pass	2.43753G	15.39	-14.61	654.44M	-47.96	2.39482G	-47.46	2.4835G	-43.54	2.4836G	-41.08	24.11499G	-37.42	1
2462MHz	Pass	2.43753G	15.39	-14.61	950.35M	-48.79	2.39954G	-47.53	2.4835G	-44.95	2.48386G	-42.12	17.63614G	-36.85	2
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.442G	14.21	-15.79	865.6M	-48.63	2.39704G	-35.25	2.4G	-36.21	2.4959G	-46.26	16.87755G	-37.67	1
2412MHz	Pass	2.442G	14.21	-15.79	2.11739G	-47.71	2.39988G	-30.80	2.4G	-38.30	2.5118G	-46.53	24.27513G	-36.36	2
2437MHz	Pass	2.442G	14.21	-15.79	632.31M	-48.19	2.3981G	-38.43	2.4G	-40.63	2.4845G	-41.23	24.0897G	-36.90	1
2437MHz	Pass	2.442G	14.21	-15.79	848.41M	-48.65	2.39952G	-36.91	2.4G	-38.79	2.48574G	-39.89	24.39032G	-36.39	2
2462MHz	Pass	2.442G	14.21	-15.79	827.44M	-48.71	2.3967G	-47.88	2.4835G	-44.42	2.4841G	-41.91	16.84946G	-37.20	1
2462MHz	Pass	2.442G	14.21	-15.79	1.99856G	-47.62	2.3902G	-47.14	2.4835G	-43.95	2.48434G	-39.33	17.12199G	-37.23	2
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42797G	11.34	-18.66	2.16285G	-48.01	2.39576G	-37.67	2.4G	-42.60	2.56002G	-43.49	24.07449G	-37.58	1
2422MHz	Pass	2.42797G	11.34	-18.66	762.8M	-48.88	2.39948G	-37.71	2.4G	-42.08	2.4961G	-46.56	16.8836G	-38.03	2
2437MHz	Pass	2.42797G	11.34	-18.66	704.12M	-48.39	2.39952G	-41.05	2.4G	-42.89	2.48574G	-41.67	16.77141G	-37.28	1
2437MHz	Pass	2.42797G	11.34	-18.66	891.04M	-48.49	2.39952G	-38.26	2.4835G	-44.81	2.4901G	-43.43	16.97334G	-37.50	2
2452MHz	Pass	2.42797G	11.34	-18.66	775.11M	-48.67	2.39992G	-44.67	2.4835G	-43.65	2.48698G	-40.70	17.66046G	-37.72	1
2452MHz	Pass	2.42797G	11.34	-18.66	904.78M	-47.92	2.39916G	-45.90	2.4835G	-45.30	2.48478G	-42.75	16.83872G	-37.70	2

## 802.11b\_Nss1,(1Mbps)\_2TX

CSE NdB

2412MHz

23/03/2020

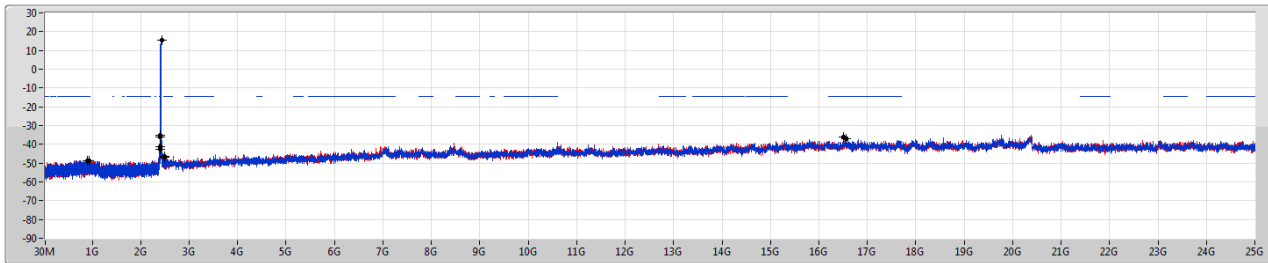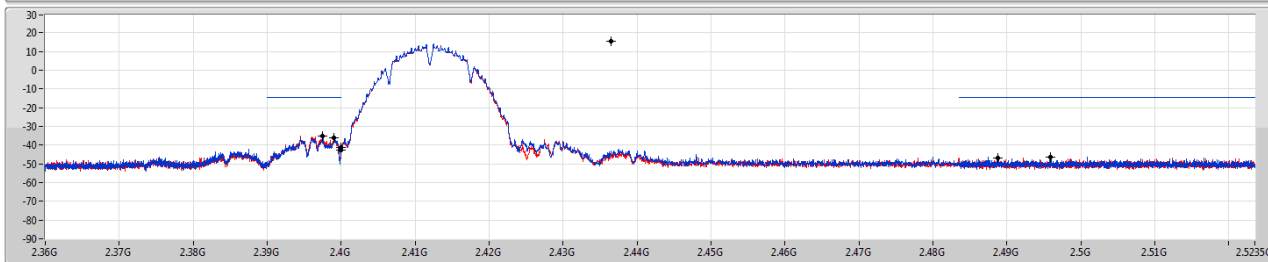Port 1  
Port 2RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43649G	15.42	-14.58	899.09M	-48.60	2.39902G	-36.19	2.4G	-42.68	2.49584G	-46.47	16.55446G	-37.14	1
2.43649G	15.42	-14.58	940.16M	-48.62	2.39748G	-35.25	2.4G	-41.48	2.4888G	-46.79	16.51512G	-36.02	2

## 802.11b\_Nss1,(1Mbps)\_2TX

CSE NdB

2437MHz

23/03/2020

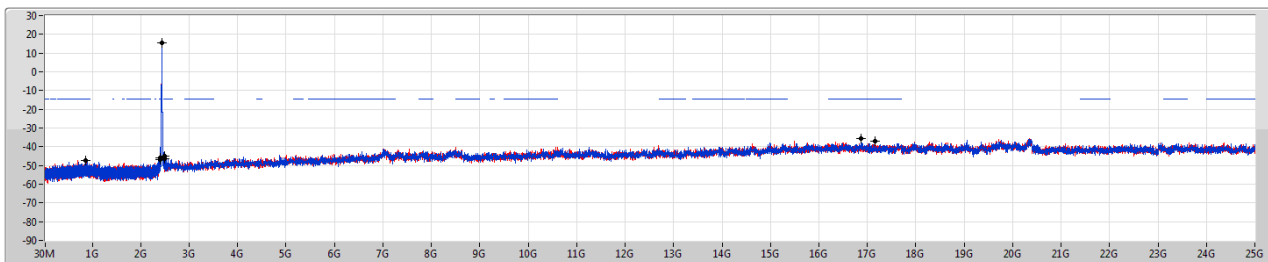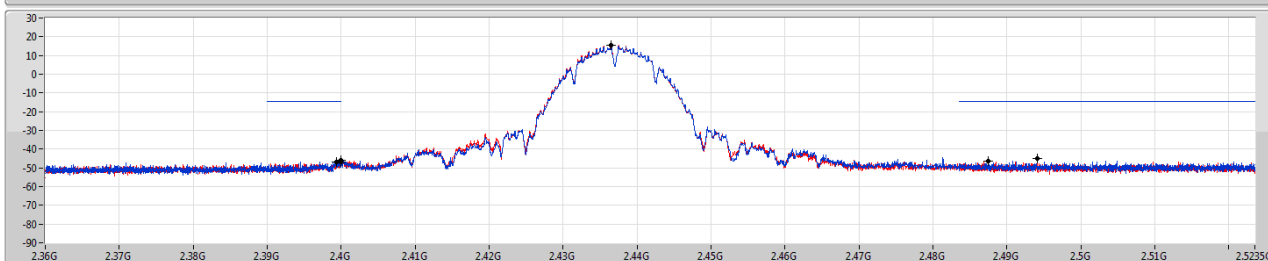
Port 1  
Port 2RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43649G	15.42	-14.58	863.56M	-47.37	2.4G	-46.16	2.4G	-47.07	2.4875G	-46.31	16.87475G	-35.72	1
2.43649G	15.42	-14.58	855.11M	-47.29	2.39942G	-46.77	2.4G	-46.91	2.4941G	-45.21	17.16132G	-37.11	2

## 802.11b\_Nss1,(1Mbps)\_2TX

2462MHz


CSE NdB

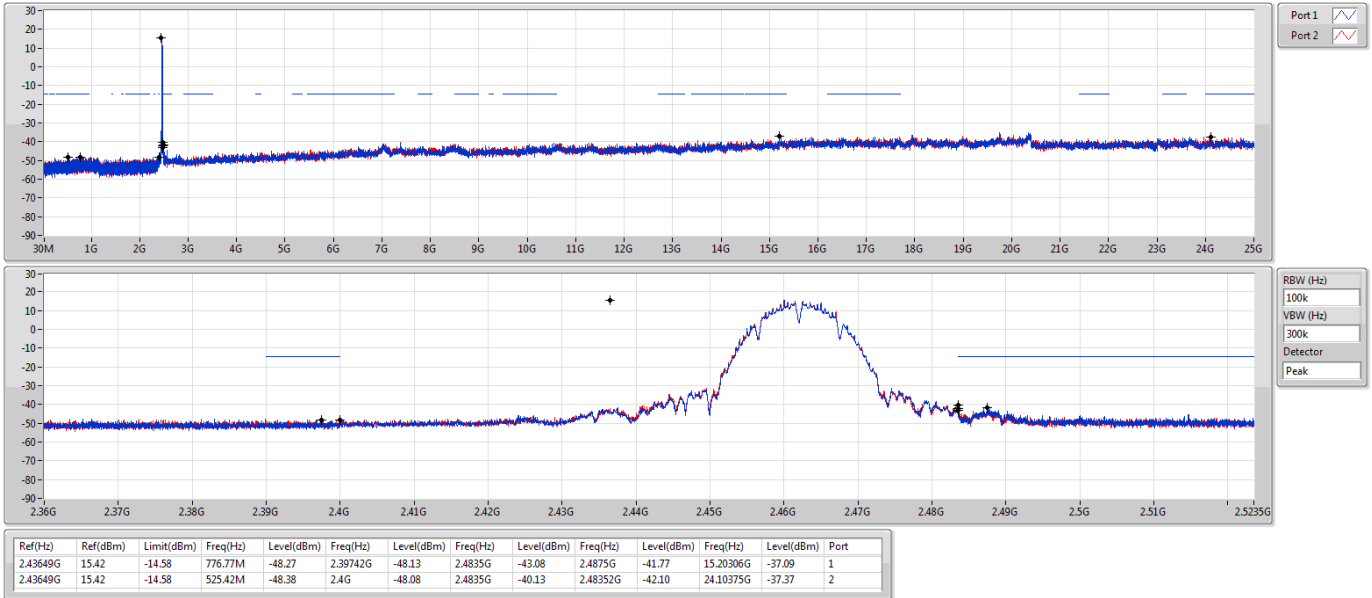

## 802.11g\_BF\_Nss1,(6Mbps)\_2TX

2412MHz


CSE NdB

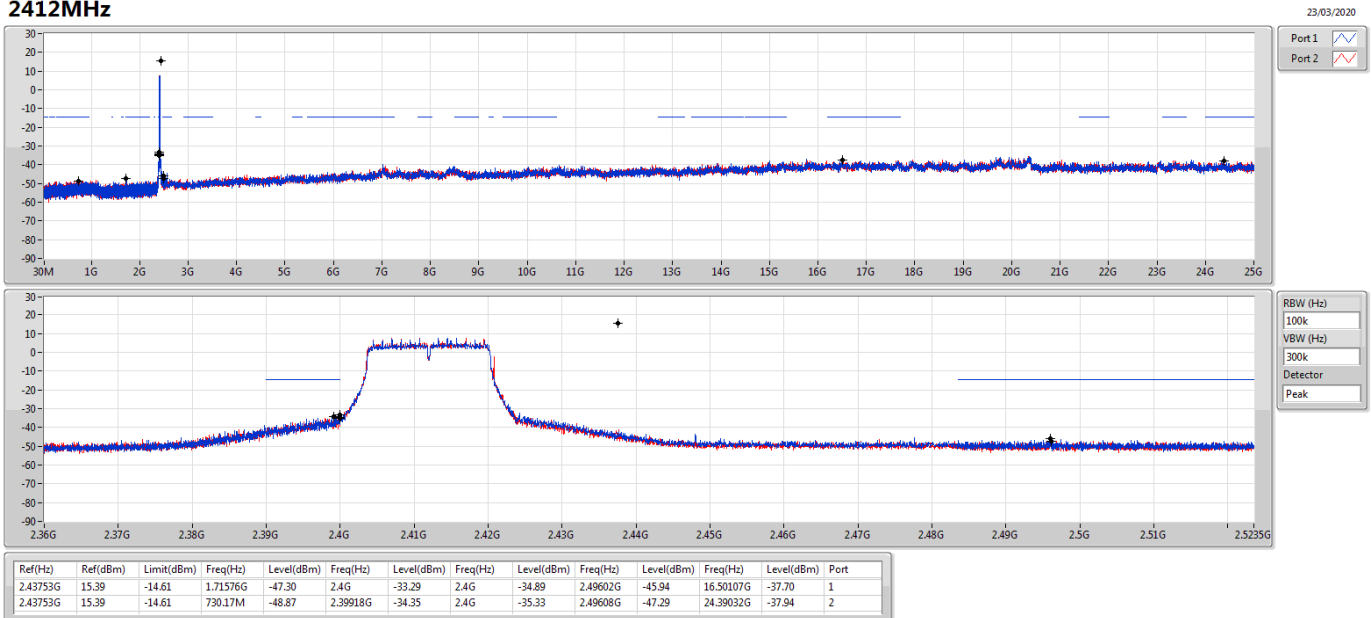

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

CSE NdB


2437MHz

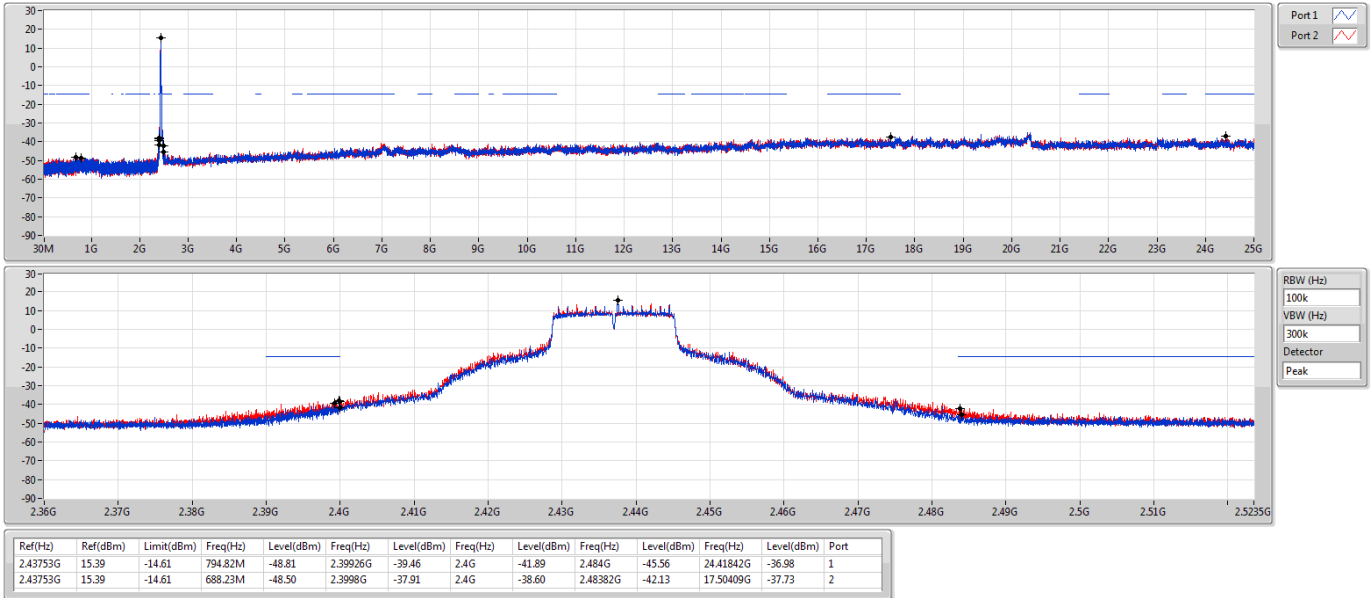

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

CSE NdB

2462MHz

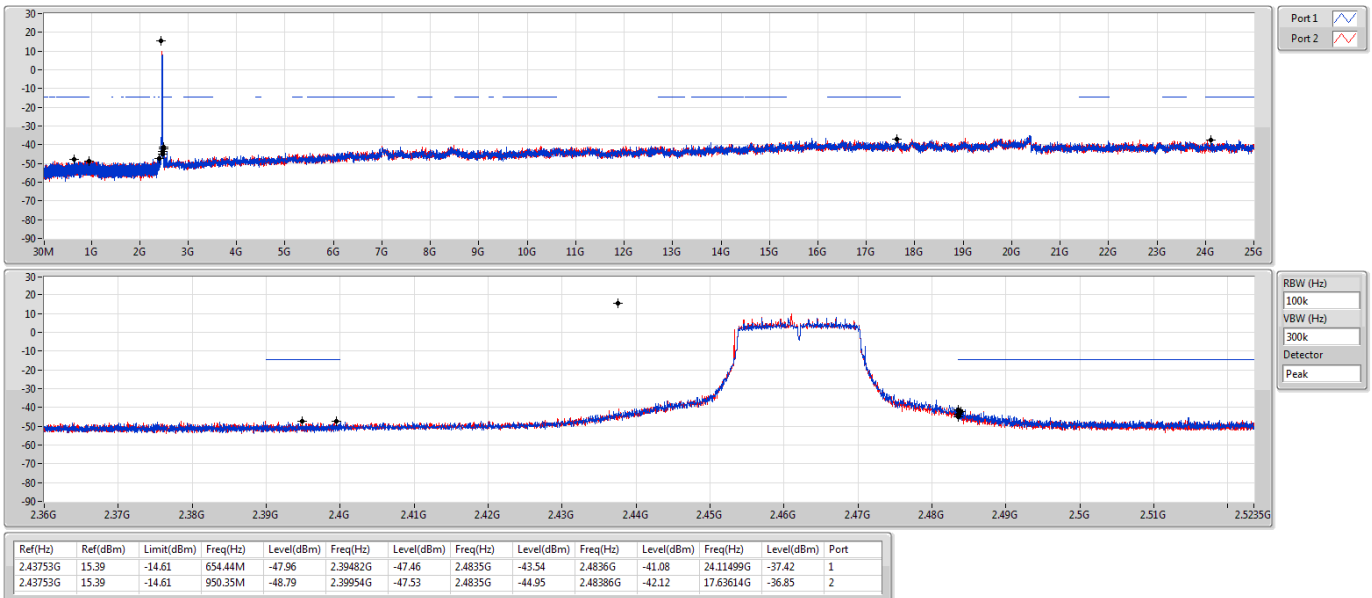


## VHT20-BF\_Nss1,(MCS0)\_2TX

2412MHz

CSE NdB

23/03/2020

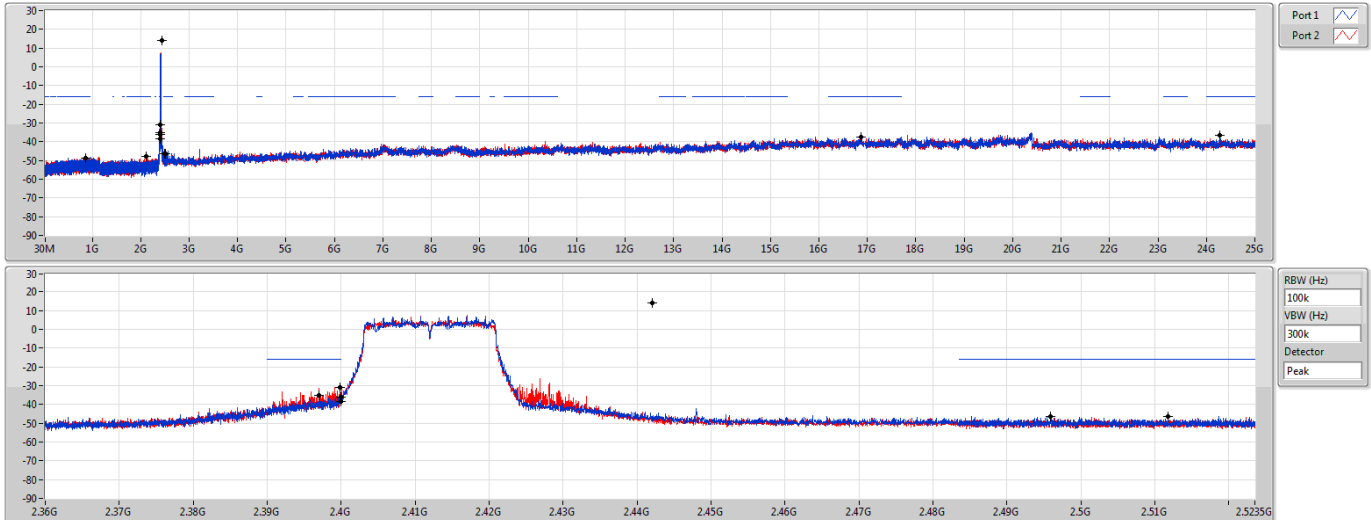


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.442G	14.21	-15.79	865.6M	-48.63	2.39704G	-35.25	2.4G	-36.21	2.4959G	-46.26	16.87755G	-37.67	1
2.442G	14.21	-15.79	2.11739G	-47.71	2.39988G	-30.80	2.4G	-38.30	2.5118G	-46.53	24.27513G	-36.36	2

## VHT20-BF\_Nss1,(MCS0)\_2TX

2437MHz

CSE NdB

23/03/2020

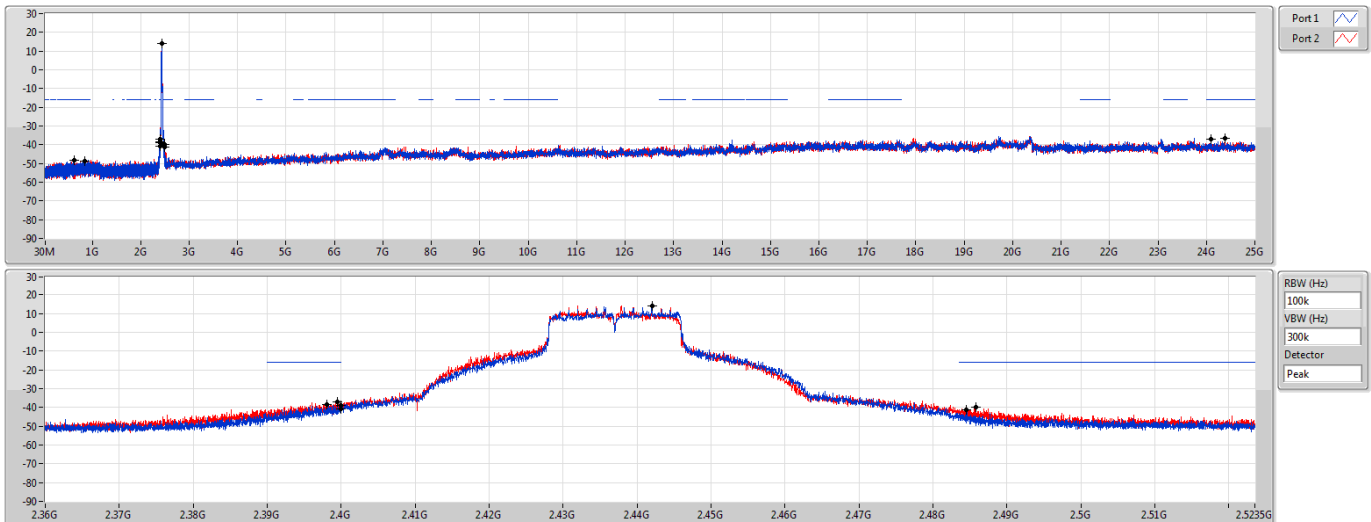


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.442G	14.21	-15.79	632.31M	-48.19	2.3981G	-38.43	2.4G	-40.63	2.4845G	-41.23	24.0897G	-36.90	1
2.442G	14.21	-15.79	848.41M	-48.65	2.39952G	-36.91	2.4G	-38.79	2.48574G	-39.89	24.39032G	-36.39	2

## VHT20-BF\_Nss1,(MCS0)\_2TX

2462MHz


CSE NdB

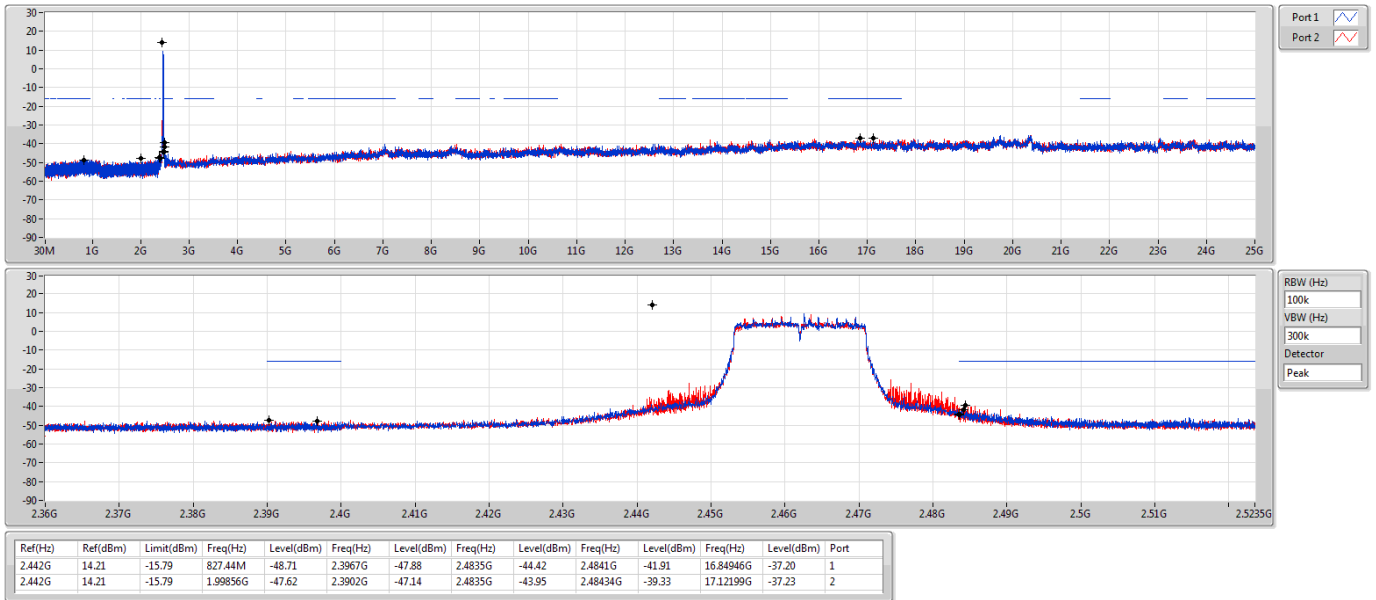

## VHT40-BF\_Nss1,(MCS0)\_2TX

2422MHz


CSE NdB

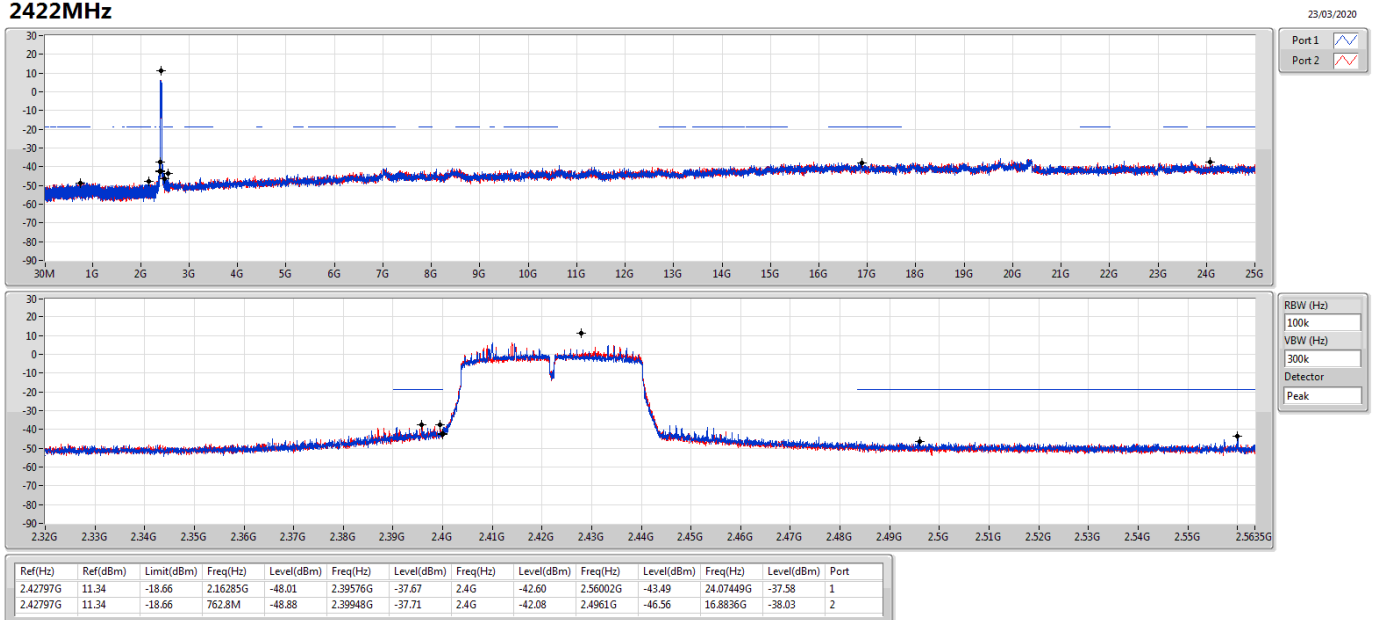

VHT40-BF\_Nss1,(MCS0)\_2TX

2437MHz


CSE NdB

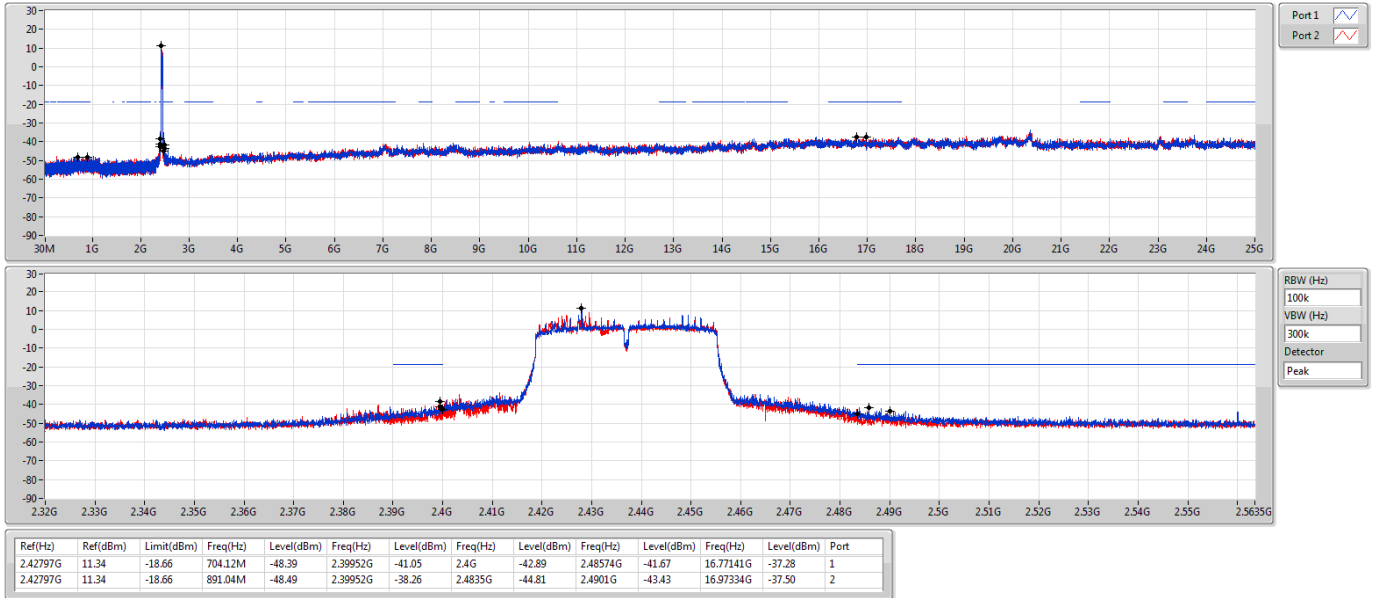



VHT40-BF\_Nss1,(MCS0)\_2TX

2452MHz

CSE NdB

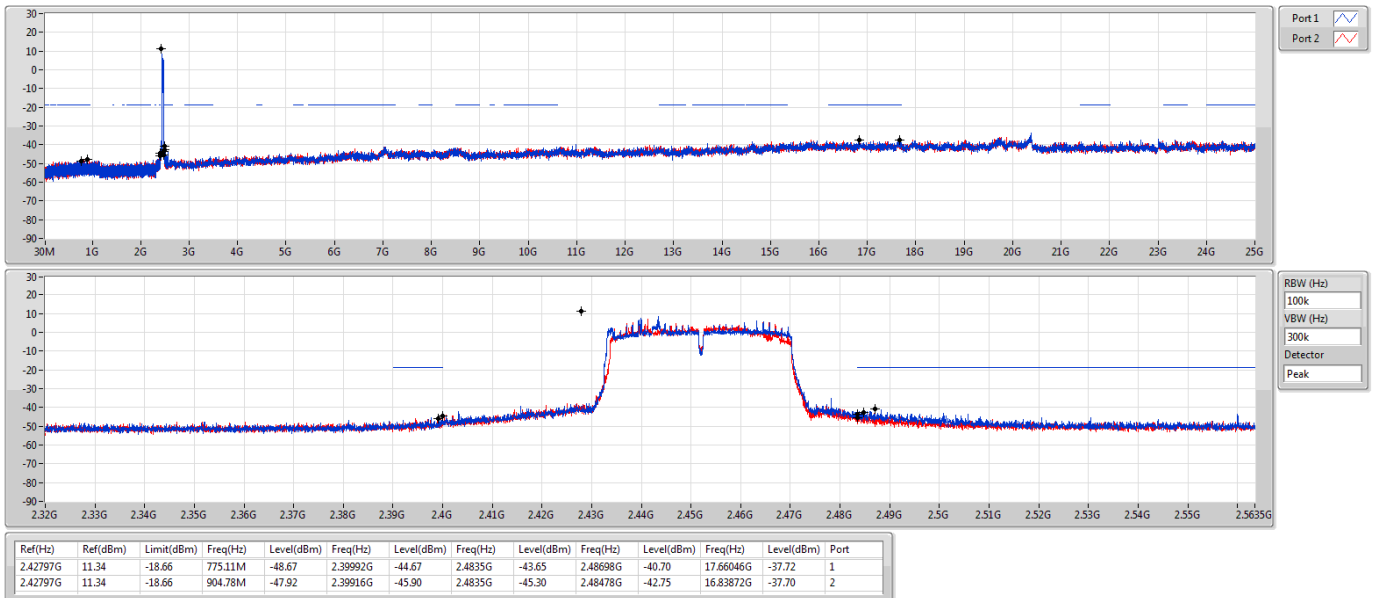

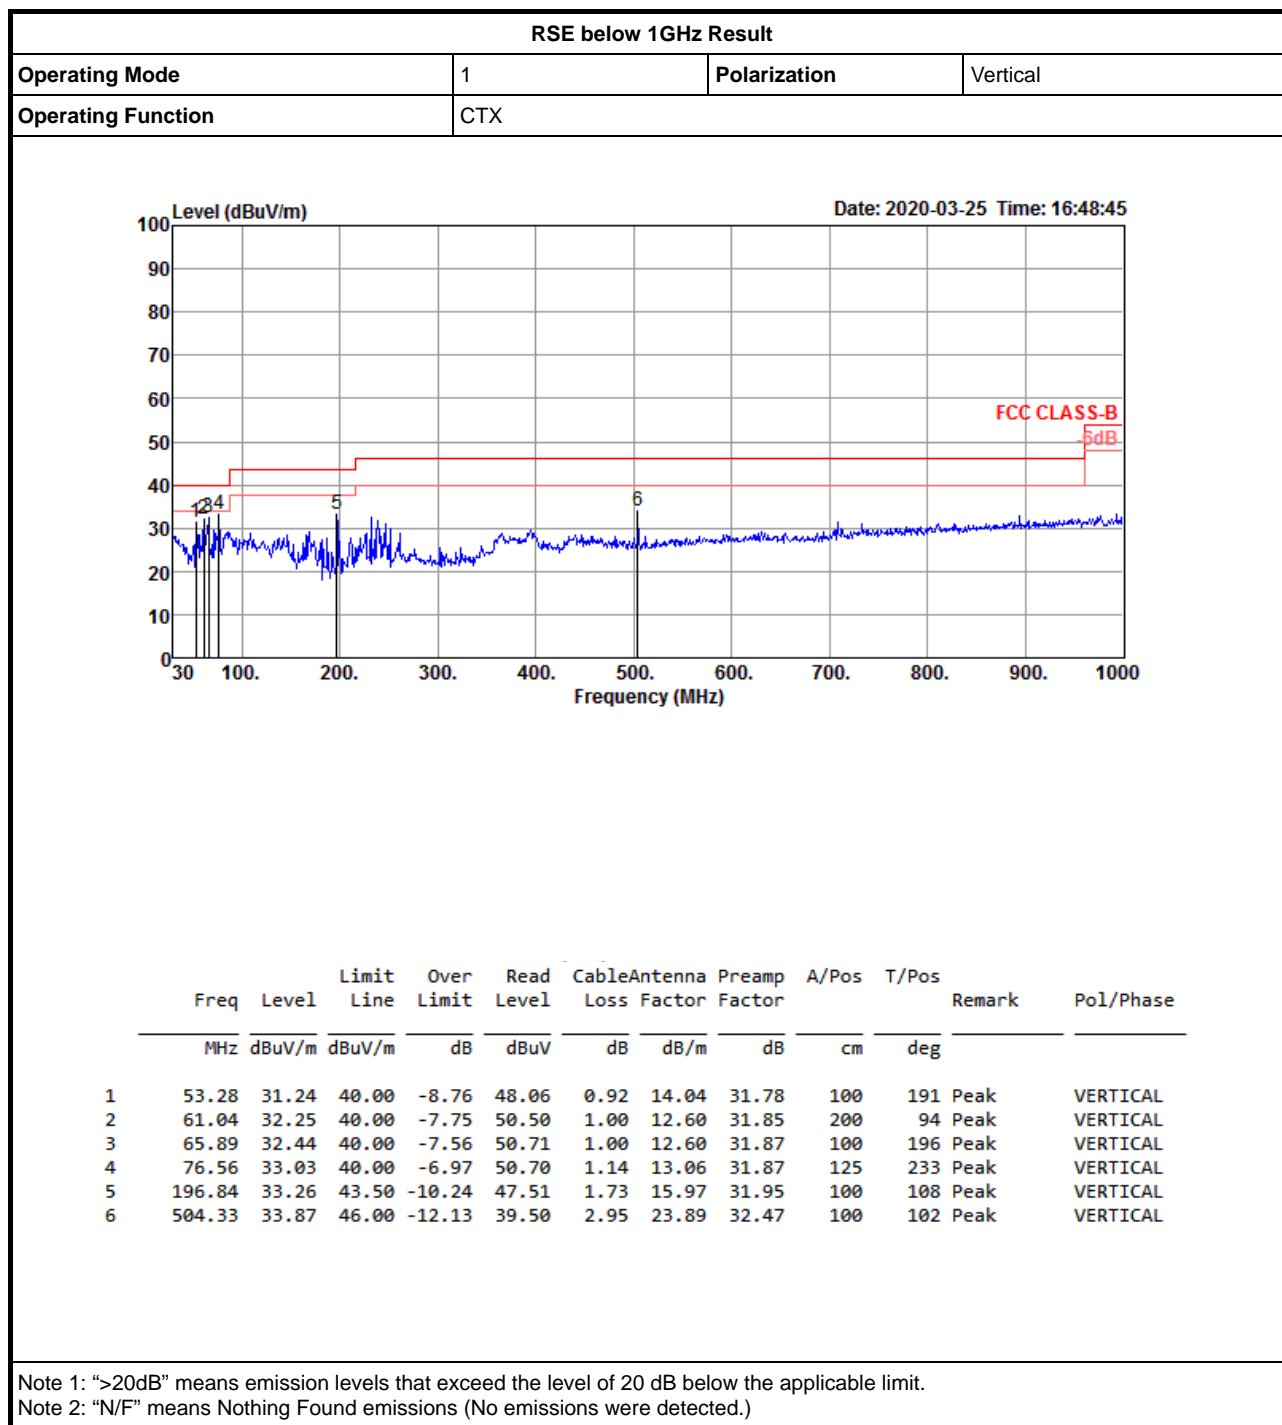

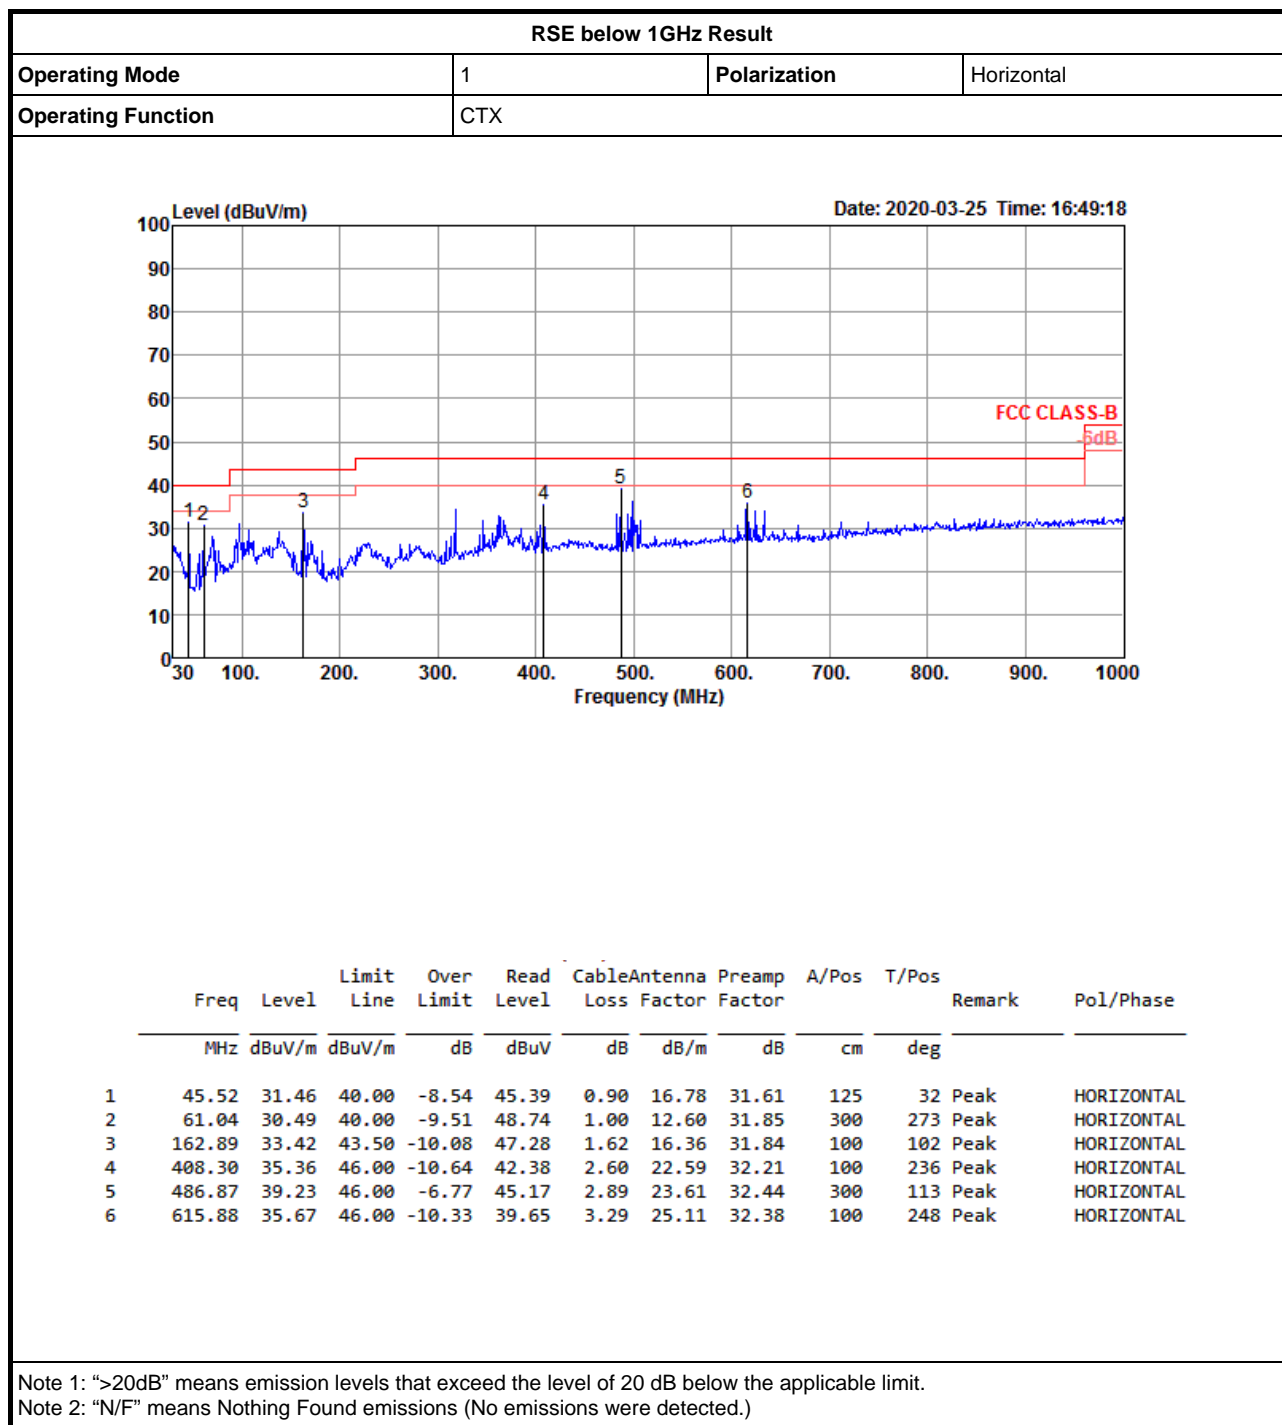




**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
VHT20-BF_Nss1,(MCS0)_2TX	Pass	AV	2.4835G	52.98	54.00	-1.02	3	Vertical	217	1.99	-

# 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2412MHz\_TX

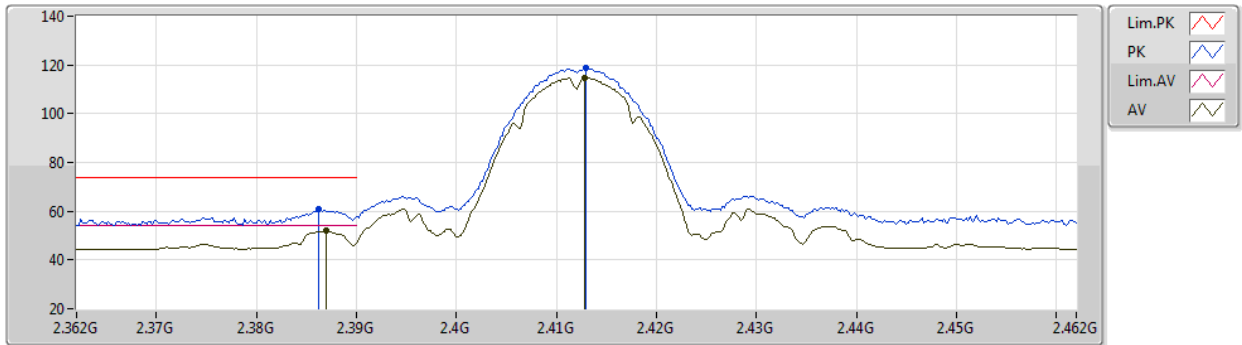


EUT Y\_2TX  
Setting 23.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3862G	60.64	74.00	-13.36	29.01	3	Vertical	214	2.05	-	27.64	3.99	-
AV	2.387G	51.86	54.00	-2.14	20.23	3	Vertical	214	2.05	-	27.64	3.99	-
PK	2.413G	118.83	Inf	-Inf	87.26	3	Vertical	214	2.05	-	27.56	4.01	-
AV	2.4128G	114.79	Inf	-Inf	83.22	3	Vertical	214	2.05	-	27.56	4.01	-

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

### 2412MHz\_TX

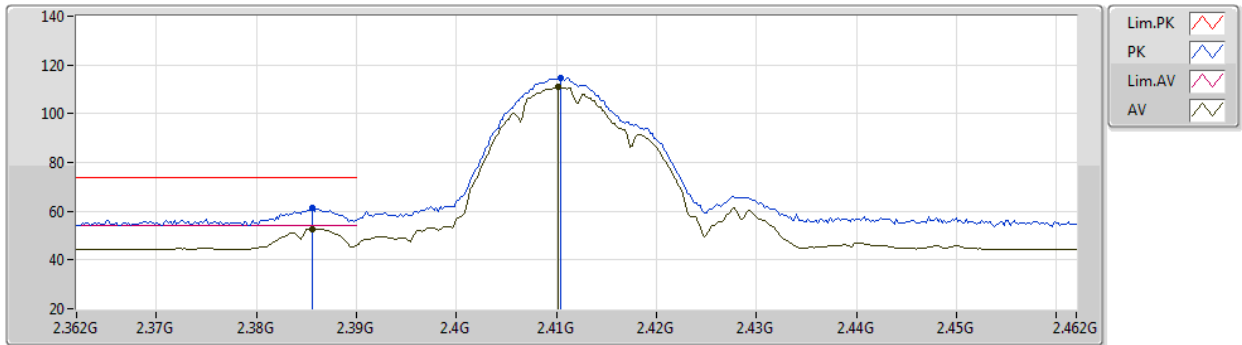


EUT Y\_2TX  
Setting 23.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3856G	61.30	74.00	-12.70	29.67	3	Horizontal	355	1.80	-	27.64	3.99	-
AV	2.3856G	52.82	54.00	-1.18	21.19	3	Horizontal	355	1.80	-	27.64	3.99	-
PK	2.4104G	114.51	Inf	-Inf	82.93	3	Horizontal	355	1.80	-	27.57	4.01	-
AV	2.4102G	110.87	Inf	-Inf	79.29	3	Horizontal	355	1.80	-	27.57	4.01	-

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

### 2412MHz\_TX

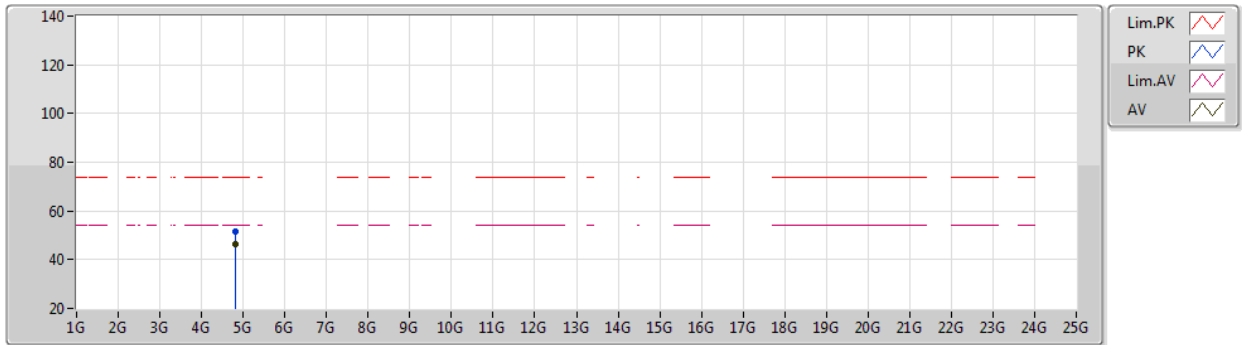


EUT Y\_2TX  
Setting 23.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82398G	51.63	74.00	-22.37	46.95	3	Vertical	8	1.66	-	31.02	5.33	31.67
AV	4.82398G	46.47	54.00	-7.53	41.79	3	Vertical	8	1.66	-	31.02	5.33	31.67

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

### 2412MHz\_TX

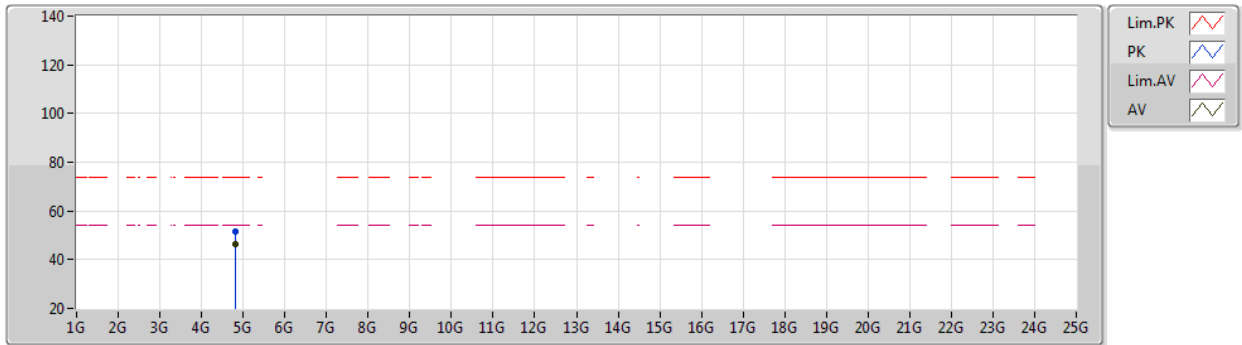


EUT Y\_2TX  
Setting 23.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82396G	51.46	74.00	-22.54	46.78	3	Horizontal	330	1.82	-	31.02	5.33	31.67
AV	4.82399G	46.57	54.00	-7.43	41.89	3	Horizontal	330	1.82	-	31.02	5.33	31.67

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2437MHz\_TX

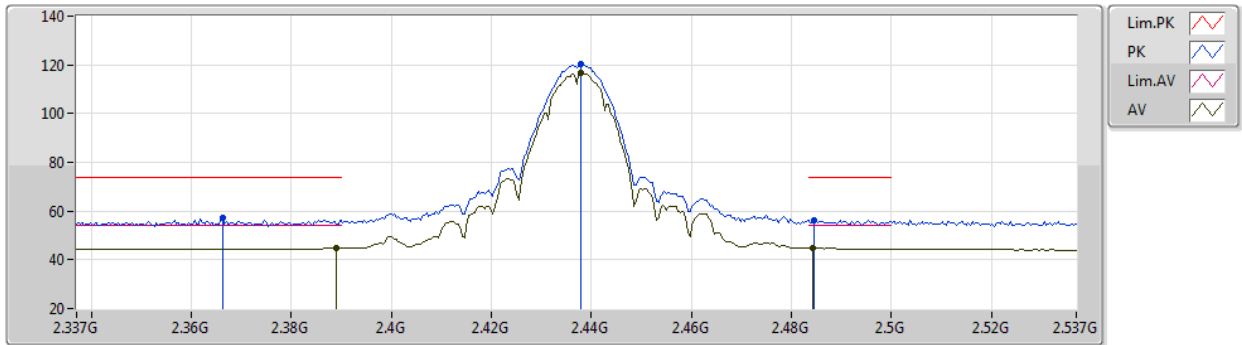


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3662G	57.09	74.00	-16.91	25.41	3	Vertical	222	2.16	-	27.70	3.98	-
AV	2.389G	44.71	54.00	-9.29	13.09	3	Vertical	222	2.16	-	27.63	3.99	-
PK	2.4378G	120.44	Inf	-Inf	88.93	3	Vertical	222	2.16	-	27.49	4.02	-
AV	2.4378G	116.47	Inf	-Inf	84.96	3	Vertical	222	2.16	-	27.49	4.02	-
PK	2.4846G	56.36	74.00	-17.64	24.97	3	Vertical	222	2.16	-	27.35	4.04	-
AV	2.4842G	45.08	54.00	-8.92	13.69	3	Vertical	222	2.16	-	27.35	4.04	-

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2437MHz\_TX

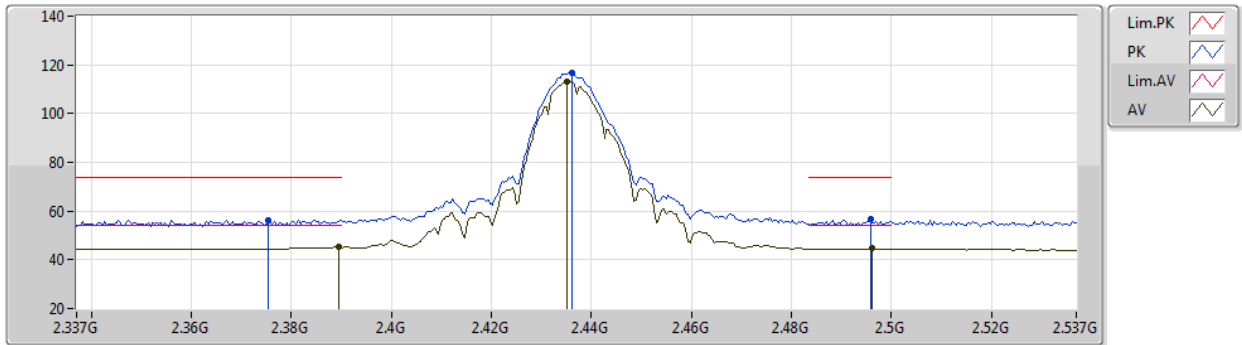


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3754G	56.36	74.00	-17.64	24.70	3	Horizontal	360	2.14	-	27.67	3.99	-
AV	2.3894G	45.16	54.00	-8.84	13.54	3	Horizontal	360	2.14	-	27.63	3.99	-
PK	2.4362G	116.82	Inf	-Inf	85.31	3	Horizontal	360	2.14	-	27.49	4.02	-
AV	2.435G	113.04	Inf	-Inf	81.52	3	Horizontal	360	2.14	-	27.50	4.02	-
PK	2.4958G	56.52	74.00	-17.48	25.16	3	Horizontal	360	2.14	-	27.31	4.05	-
AV	2.4962G	44.97	54.00	-9.03	13.61	3	Horizontal	360	2.14	-	27.31	4.05	-

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2437MHz\_TX

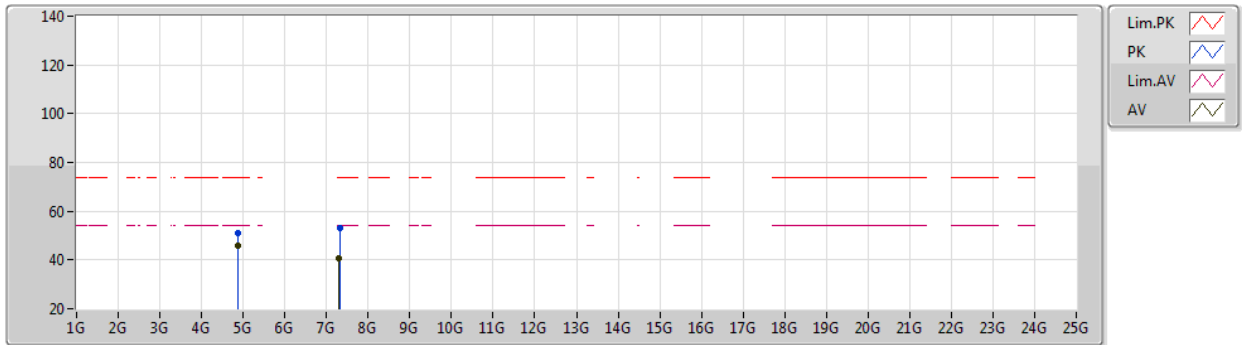


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87399G	51.13	74.00	-22.87	46.30	3	Vertical	28	1.75	-	31.07	5.40	31.64
AV	4.87401G	46.12	54.00	-7.88	41.29	3	Vertical	28	1.75	-	31.07	5.40	31.64
PK	7.3107G	53.24	74.00	-20.76	42.80	3	Vertical	142	1.94	-	36.40	6.96	32.92
AV	7.3102G	40.88	54.00	-13.12	30.44	3	Vertical	142	1.94	-	36.40	6.96	32.92

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2437MHz\_TX

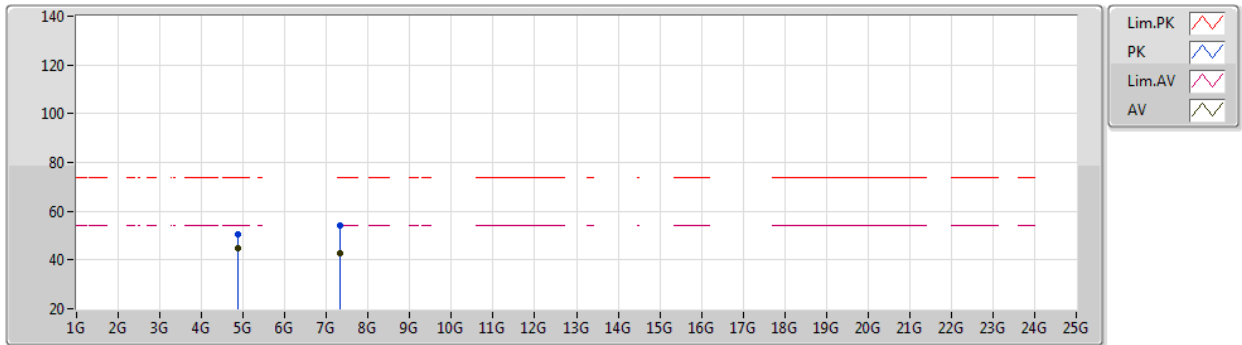


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87385G	50.39	74.00	-23.61	45.56	3	Horizontal	241	1.80	-	31.07	5.40	31.64
AV	4.87398G	45.03	54.00	-8.97	40.20	3	Horizontal	241	1.80	-	31.07	5.40	31.64
PK	7.3125G	54.13	74.00	-19.87	43.69	3	Horizontal	321	2.39	-	36.40	6.96	32.92
AV	7.3121G	42.86	54.00	-11.14	32.42	3	Horizontal	321	2.39	-	36.40	6.96	32.92

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2462MHz\_TX

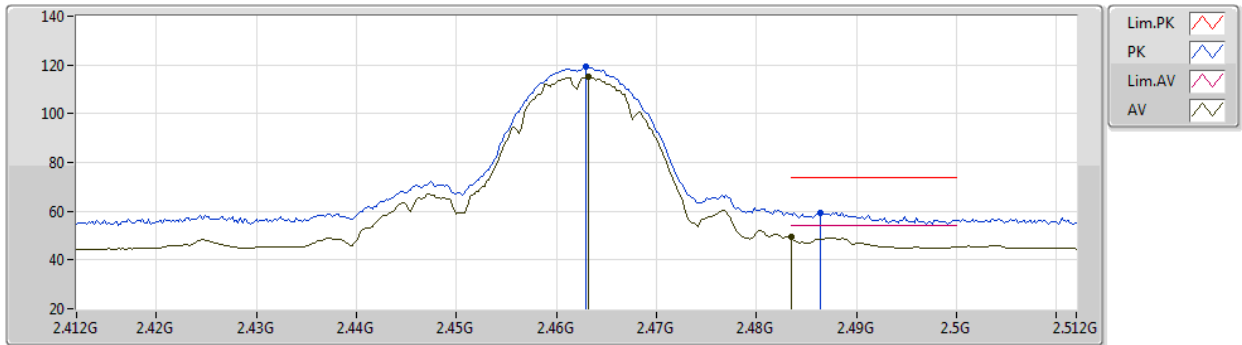


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.463G	119.20	Inf	-Inf	87.76	3	Vertical	214	2.05	-	27.41	4.03	-
AV	2.4632G	115.04	Inf	-Inf	83.60	3	Vertical	214	2.05	-	27.41	4.03	-
PK	2.4864G	59.33	74.00	-14.67	27.95	3	Vertical	214	2.05	-	27.34	4.04	-
AV	2.4835G	49.39	54.00	-4.61	18.00	3	Vertical	214	2.05	-	27.35	4.04	-

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2462MHz\_TX

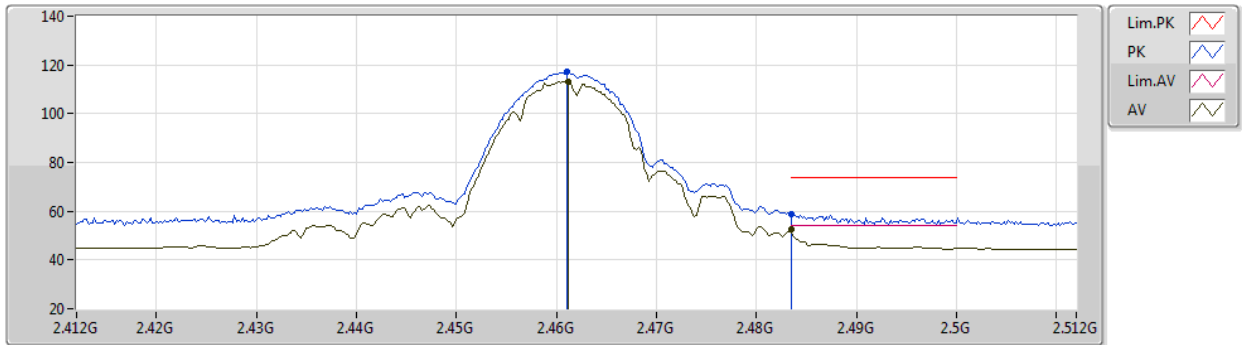


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2461G	117.10	Inf	-Inf	85.65	3	Horizontal	351	1.47	-	27.42	4.03	-
AV	24612G	113.16	Inf	-Inf	81.71	3	Horizontal	351	1.47	-	27.42	4.03	-
PK	24835G	59.04	74.00	-14.96	27.65	3	Horizontal	351	1.47	-	27.35	4.04	-
AV	24835G	52.77	54.00	-1.23	21.38	3	Horizontal	351	1.47	-	27.35	4.04	-

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

## 2462MHz\_TX

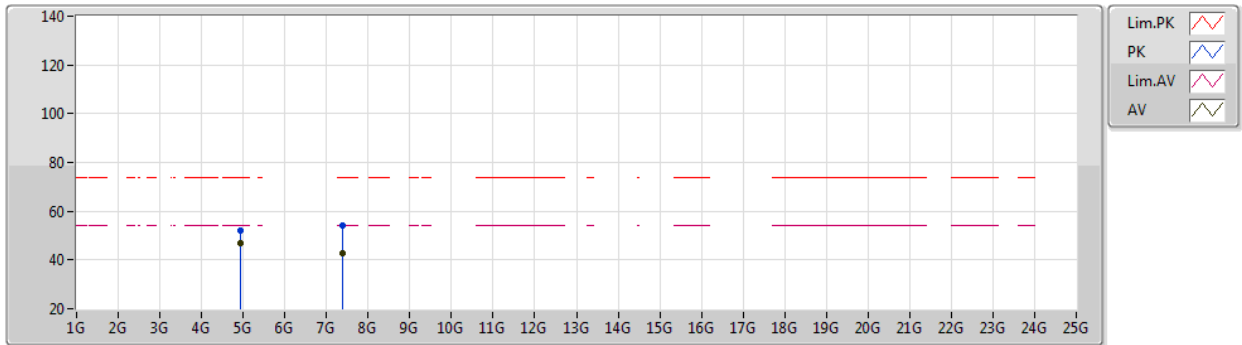


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92404G	51.92	74.00	-22.08	46.85	3	Vertical	218	1.04	-	31.20	5.48	31.61
AV	4.924G	46.87	54.00	-7.13	41.80	3	Vertical	218	1.04	-	31.20	5.48	31.61
PK	7.38424G	54.16	74.00	-19.84	43.73	3	Vertical	181	1.89	-	36.40	6.99	32.96
AV	7.38488G	42.93	54.00	-11.07	32.50	3	Vertical	181	1.89	-	36.40	6.99	32.96

## 802.11b\_Nss1,(1Mbps)\_2TX

13/03/2020

### 2462MHz\_TX

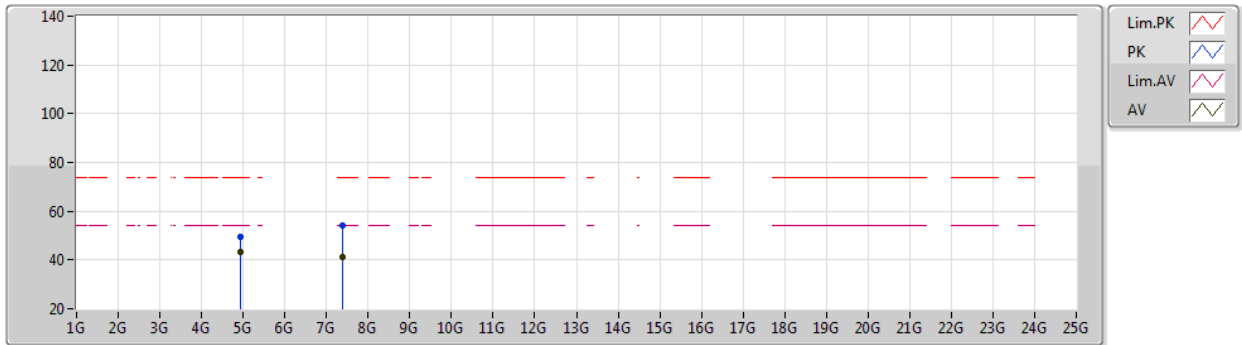


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92391G	49.63	74.00	-24.37	44.56	3	Horizontal	51	1.03	-	31.20	5.48	31.61
AV	4.92399G	43.25	54.00	-10.75	38.18	3	Horizontal	51	1.03	-	31.20	5.48	31.61
PK	7.38762G	53.94	74.00	-20.06	43.51	3	Horizontal	40	1.95	-	36.40	6.99	32.96
AV	7.38754G	41.10	54.00	-12.90	30.67	3	Horizontal	40	1.95	-	36.40	6.99	32.96

# 802.11g-BF\_Nss1,(6Mbps)\_2TX

19/03/2020

## 2412MHz\_TX

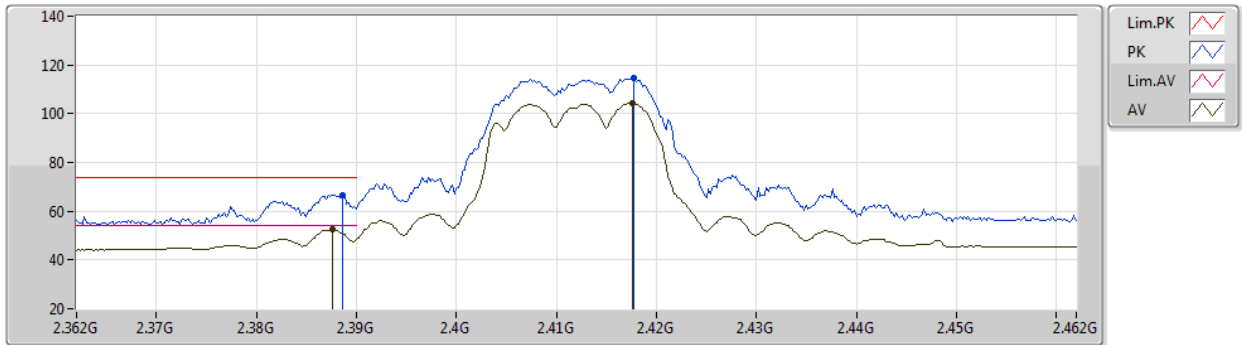


EUT Y\_2TX  
Setting 19  
03-A-A-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3886G	66.70	74.00	-7.30	34.69	3	Vertical	209	2.11	-	28.28	3.73	-
AV	2.3876G	52.75	54.00	-1.25	20.74	3	Vertical	209	2.11	-	28.28	3.73	-
PK	2.4178G	114.60	Inf	-Inf	82.50	3	Vertical	209	2.11	-	28.35	3.75	-
AV	2.4176G	104.43	Inf	-Inf	72.33	3	Vertical	209	2.11	-	28.35	3.75	-

# 802.11g-BF\_Nss1,(6Mbps)\_2TX

19/03/2020

## 2412MHz\_TX

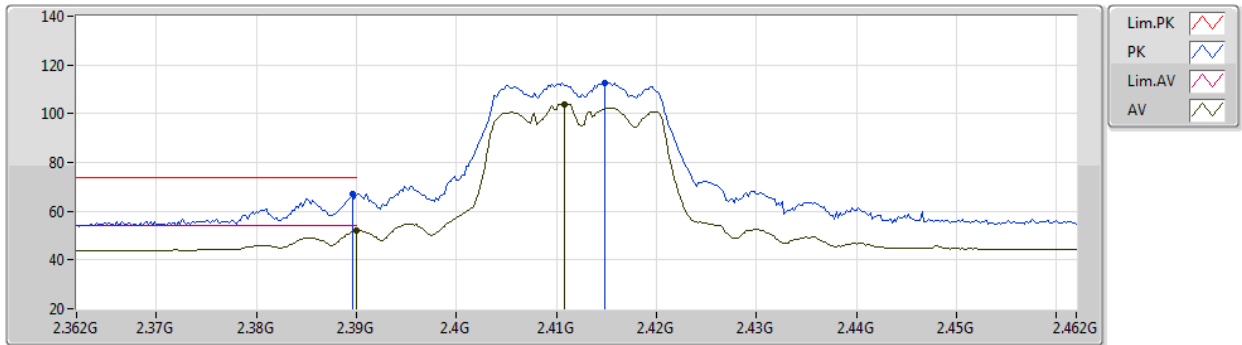


EUT Y\_2TX  
Setting 19  
03-A-A-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	66.96	74.00	-7.04	34.95	3	Horizontal	356	1.80	-	28.28	3.73	-
AV	2.39G	52.07	54.00	-1.93	20.06	3	Horizontal	356	1.80	-	28.28	3.73	-
PK	2.4148G	112.73	Inf	-Inf	80.64	3	Horizontal	356	1.80	-	28.34	3.75	-
AV	2.4108G	103.84	Inf	-Inf	71.76	3	Horizontal	356	1.80	-	28.33	3.75	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

19/03/2020

### 2412MHz\_TX

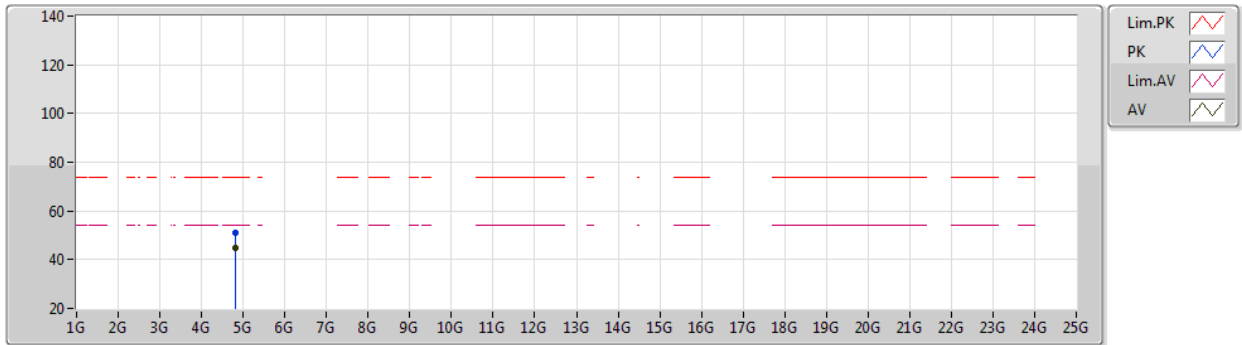


EUT Y\_2TX  
Setting 19  
03-A-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82394G	51.25	74.00	-22.75	45.95	3	Vertical	10	2.53	-	33.55	6.57	34.82
AV	4.82406G	44.57	54.00	-9.43	39.27	3	Vertical	10	2.53	-	33.55	6.57	34.82

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

19/03/2020

### 2412MHz\_TX

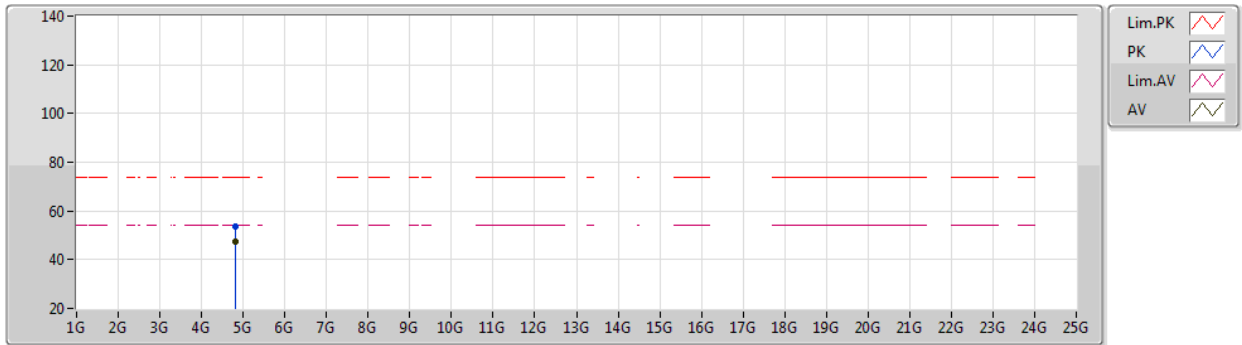


EUT Y\_2TX  
Setting 19  
03-A-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82412G	53.49	74.00	-20.51	48.19	3	Horizontal	327	2.21	-	33.55	6.57	34.82
AV	4.82402G	47.19	54.00	-6.81	41.89	3	Horizontal	327	2.21	-	33.55	6.57	34.82

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

### 2417MHz\_TX

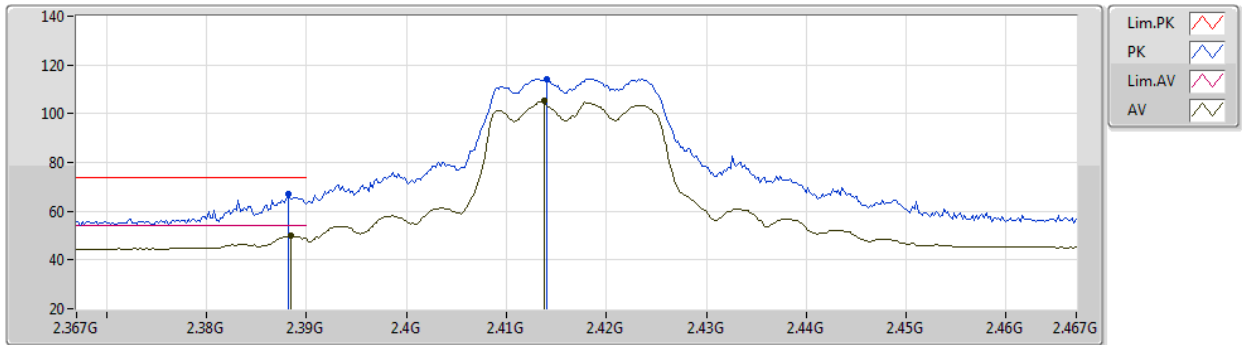


EUT Y\_2TX  
Setting 20.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3882G	67.03	74.00	-6.97	35.40	3	Vertical	255	1.87	-	27.64	3.99	-
AV	2.3884G	49.76	54.00	-4.24	18.14	3	Vertical	255	1.87	-	27.63	3.99	-
PK	2.414G	114.38	Inf	-Inf	82.81	3	Vertical	255	1.87	-	27.56	4.01	-
AV	2.4138G	105.58	Inf	-Inf	74.01	3	Vertical	255	1.87	-	27.56	4.01	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

### 2417MHz\_TX

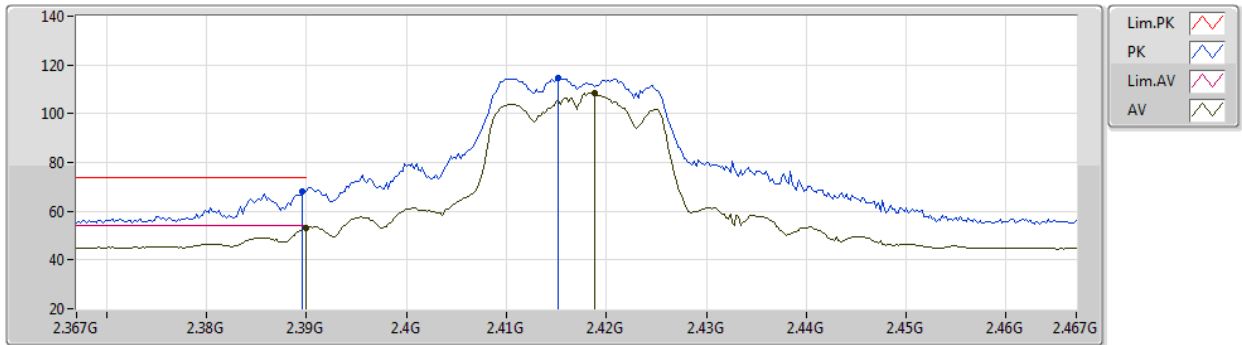


EUT Y\_2TX  
Setting 20.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	68.09	74.00	-5.91	36.47	3	Horizontal	359	2.33	-	27.63	3.99	-
AV	2.39G	52.88	54.00	-1.12	21.25	3	Horizontal	359	2.33	-	27.63	4.00	-
PK	2.4152G	114.66	Inf	-Inf	83.10	3	Horizontal	359	2.33	-	27.55	4.01	-
AV	2.4188G	108.39	Inf	-Inf	76.84	3	Horizontal	359	2.33	-	27.54	4.01	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

## 2437MHz\_TX

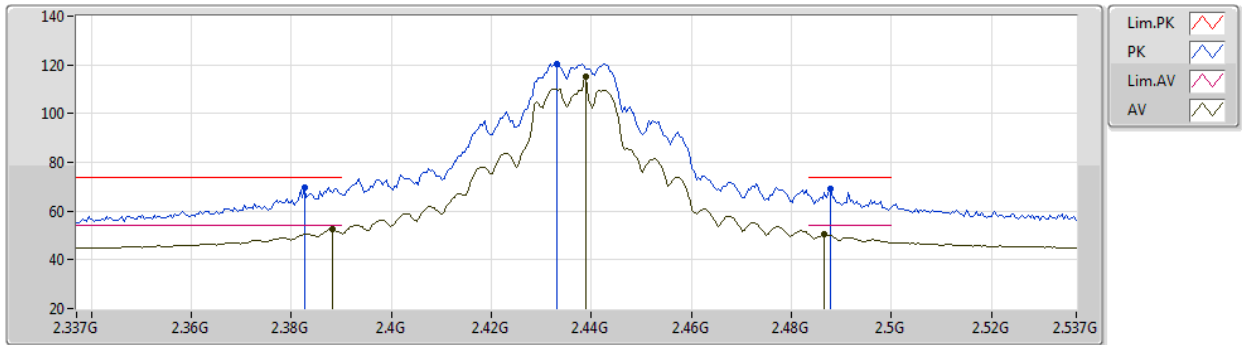


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3826G	69.80	74.00	-4.20	38.16	3	Vertical	210	2.47	-	27.65	3.99	-
AV	2.3882G	52.82	54.00	-1.18	21.19	3	Vertical	210	2.47	-	27.64	3.99	-
PK	2.433G	120.47	Inf	-Inf	88.95	3	Vertical	210	2.47	-	27.50	4.02	-
AV	2.439G	115.37	Inf	-Inf	83.87	3	Vertical	210	2.47	-	27.48	4.02	-
PK	2.4878G	69.38	74.00	-4.62	38.00	3	Vertical	210	2.47	-	27.34	4.04	-
AV	2.4866G	50.55	54.00	-3.45	19.17	3	Vertical	210	2.47	-	27.34	4.04	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

## 2437MHz\_TX

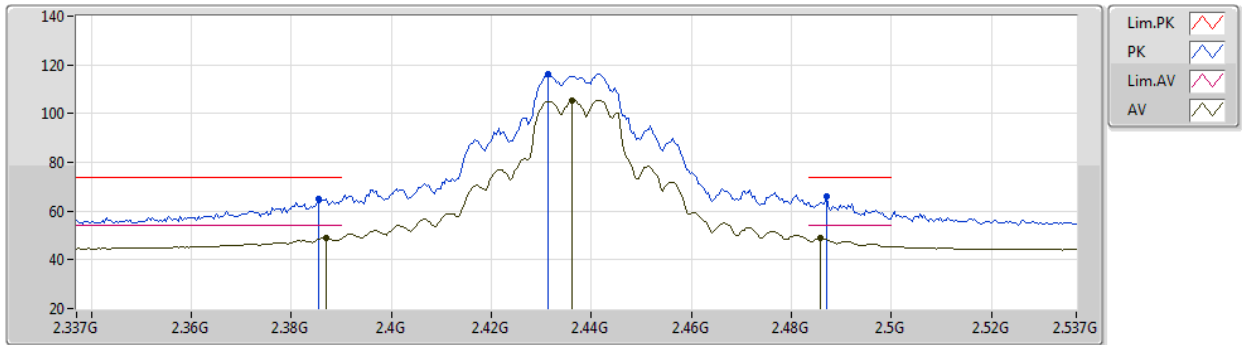


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3854G	65.18	74.00	-8.82	33.55	3	Horizontal	342	1.43	-	27.64	3.99	-
AV	2.387G	48.75	54.00	-5.25	17.12	3	Horizontal	342	1.43	-	27.64	3.99	-
PK	2.4314G	116.45	Inf	-Inf	84.92	3	Horizontal	342	1.43	-	27.51	4.02	-
AV	2.4362G	105.45	Inf	-Inf	73.94	3	Horizontal	342	1.43	-	27.49	4.02	-
PK	2.487G	66.07	74.00	-7.93	34.69	3	Horizontal	342	1.43	-	27.34	4.04	-
AV	2.4858G	48.73	54.00	-5.27	17.35	3	Horizontal	342	1.43	-	27.34	4.04	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

### 2437MHz\_TX

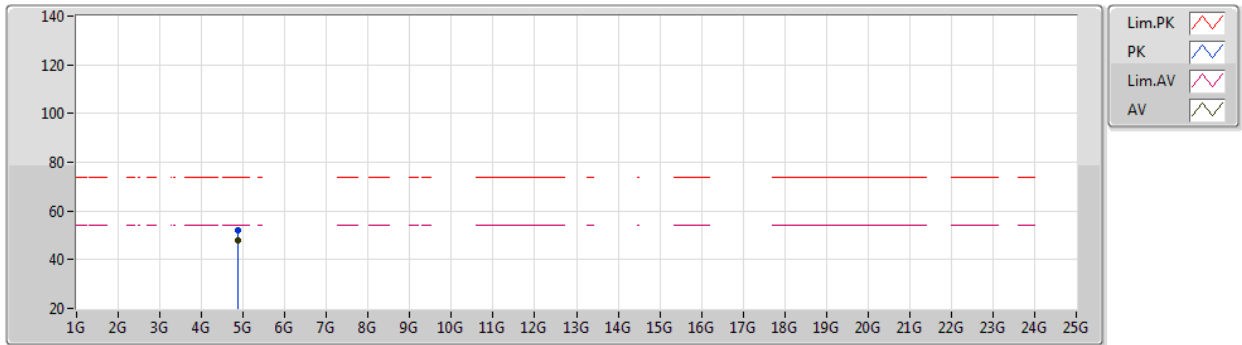


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8739G	52.16	74.00	-21.84	47.33	3	Vertical	21	2.18	-	31.07	5.40	31.64
AV	4.87403G	47.87	54.00	-6.13	43.04	3	Vertical	21	2.18	-	31.07	5.40	31.64

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

### 2437MHz\_TX

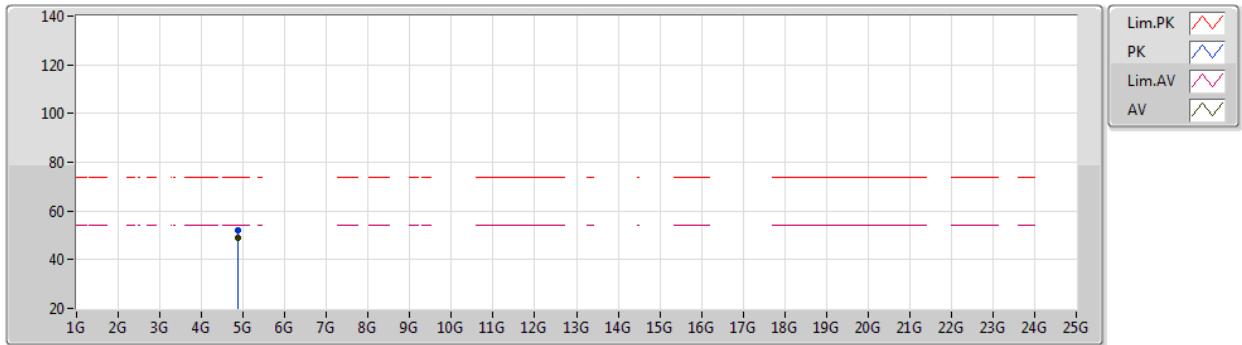


EUT Y\_2TX  
Setting 24.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87399G	52.31	74.00	-21.69	47.48	3	Horizontal	335	2.07	-	31.07	5.40	31.64
AV	4.87404G	48.76	54.00	-5.24	43.93	3	Horizontal	335	2.07	-	31.07	5.40	31.64

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

## 2457MHz\_TX

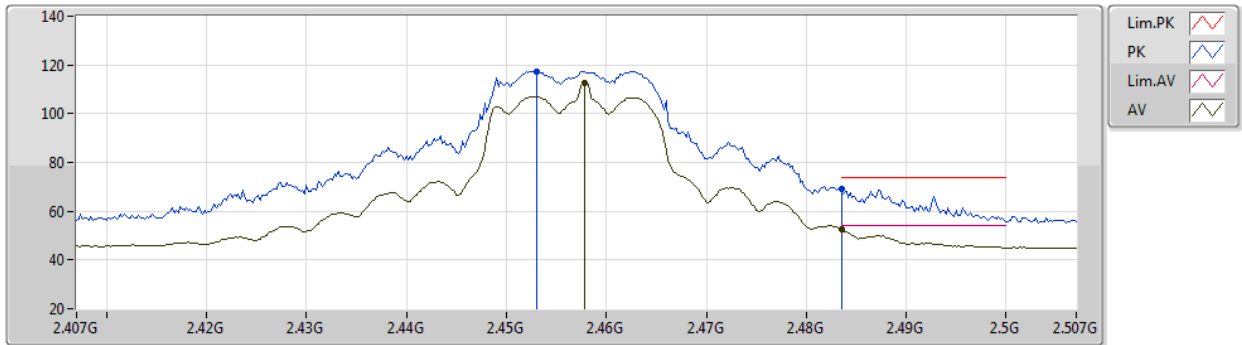


EUT Y\_2TX  
Setting 21.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.453G	117.48	Inf	-Inf	86.01	3	Vertical	220	2.44	-	27.44	4.03	-
AV	2.4578G	112.44	Inf	-Inf	80.98	3	Vertical	220	2.44	-	27.43	4.03	-
PK	2.4835G	69.36	74.00	-4.64	37.97	3	Vertical	220	2.44	-	27.35	4.04	-
AV	2.4835G	52.57	54.00	-1.43	21.18	3	Vertical	220	2.44	-	27.35	4.04	-

# 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

## 2457MHz\_TX

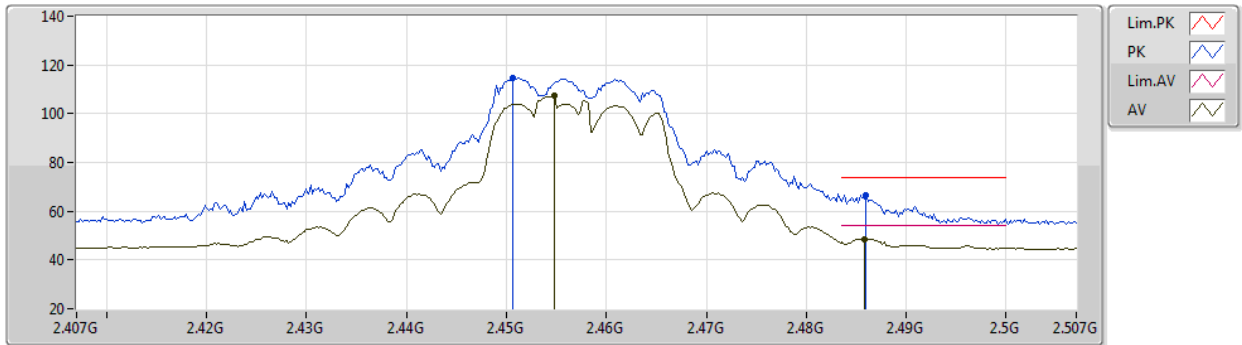


EUT Y\_2TX  
Setting 21.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4506G	114.58	Inf	-Inf	83.10	3	Horizontal	360	2.68	-	27.45	4.03	-
AV	2.4548G	107.40	Inf	-Inf	75.93	3	Horizontal	360	2.68	-	27.44	4.03	-
PK	2.486G	66.56	74.00	-7.44	35.18	3	Horizontal	360	2.68	-	27.34	4.04	-
AV	2.4858G	48.48	54.00	-5.52	17.10	3	Horizontal	360	2.68	-	27.34	4.04	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

## 2462MHz\_TX

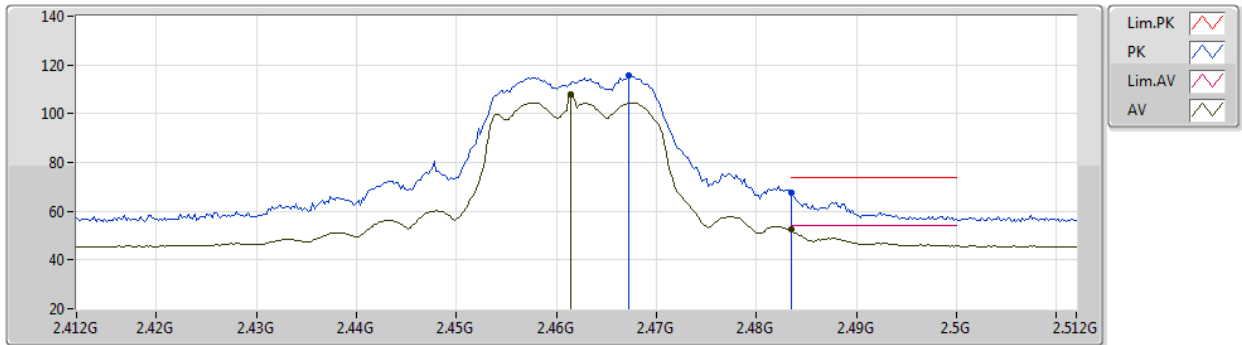


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4672G	115.44	Inf	-Inf	84.01	3	Vertical	207	2.28	-	27.40	4.03	-
AV	2.4614G	108.10	Inf	-Inf	76.65	3	Vertical	207	2.28	-	27.42	4.03	-
PK	2.4835G	67.50	74.00	-6.50	36.11	3	Vertical	207	2.28	-	27.35	4.04	-
AV	2.4835G	52.68	54.00	-1.32	21.29	3	Vertical	207	2.28	-	27.35	4.04	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

## 2462MHz\_TX

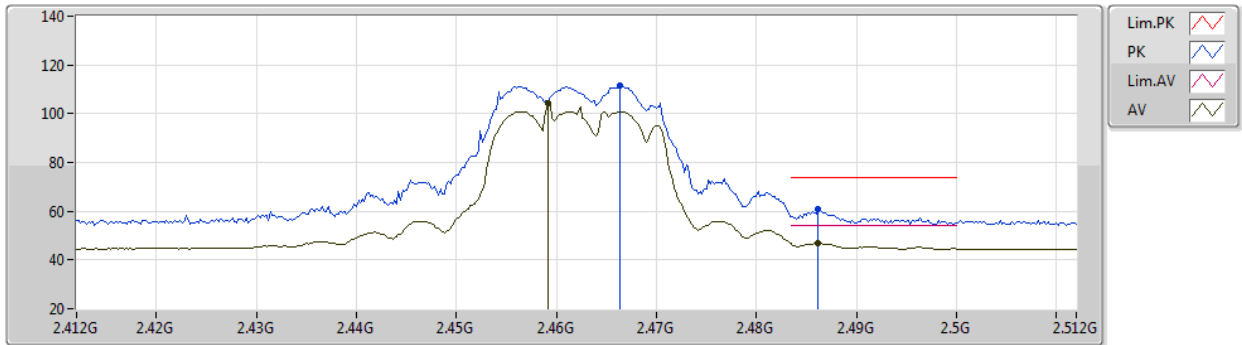


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4664G	111.40	Inf	-Inf	79.97	3	Horizontal	353	2.60	-	27.40	4.03	-
AV	2.4592G	104.07	Inf	-Inf	72.62	3	Horizontal	353	2.60	-	27.42	4.03	-
PK	2.4862G	60.78	74.00	-13.22	29.40	3	Horizontal	353	2.60	-	27.34	4.04	-
AV	2.4862G	46.75	54.00	-7.25	15.37	3	Horizontal	353	2.60	-	27.34	4.04	-

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

### 2462MHz\_TX

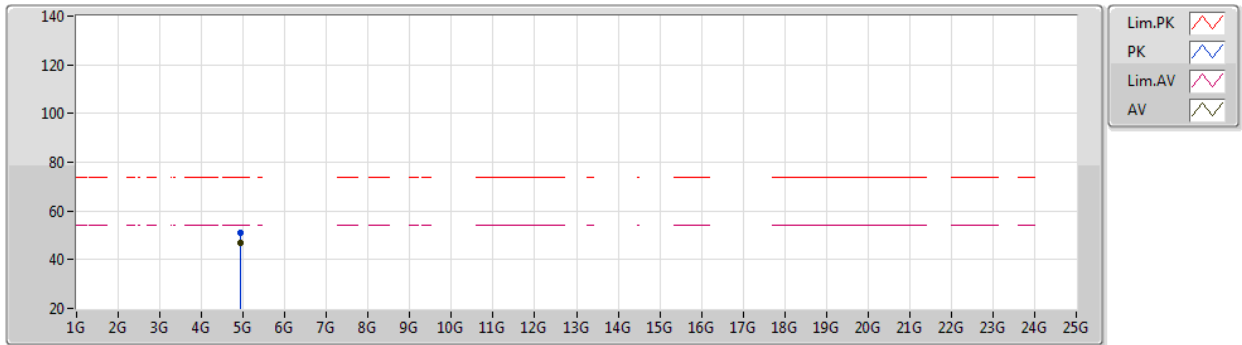


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92405G	51.06	74.00	-22.94	45.99	3	Vertical	21	2.31	-	31.20	5.48	31.61
AV	4.92401G	46.98	54.00	-7.02	41.91	3	Vertical	21	2.31	-	31.20	5.48	31.61

## 802.11g-BF\_Nss1,(6Mbps)\_2TX

13/03/2020

### 2462MHz\_TX

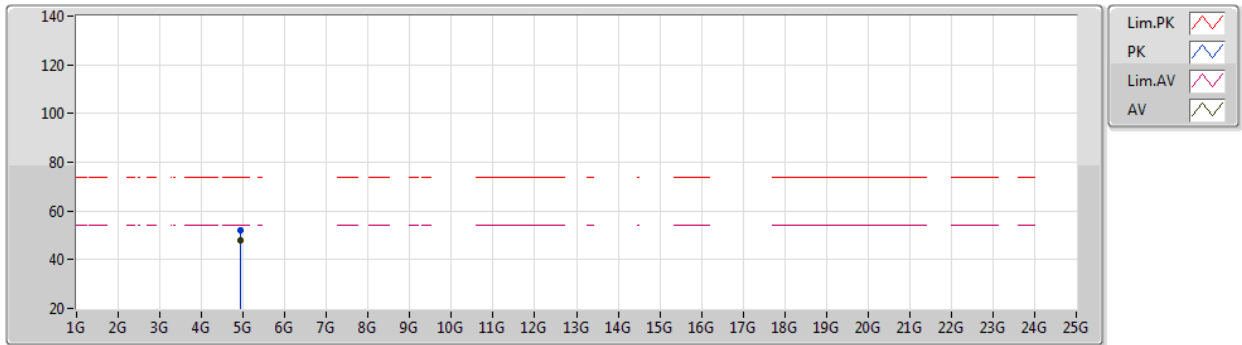


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92402G	52.16	74.00	-21.84	47.09	3	Horizontal	339	2.27	-	31.20	5.48	31.61
AV	4.92401G	48.03	54.00	-5.97	42.96	3	Horizontal	339	2.27	-	31.20	5.48	31.61

# VHT20-BF\_Nss1,(MCS0)\_2TX

19/03/2020

## 2412MHz\_TX

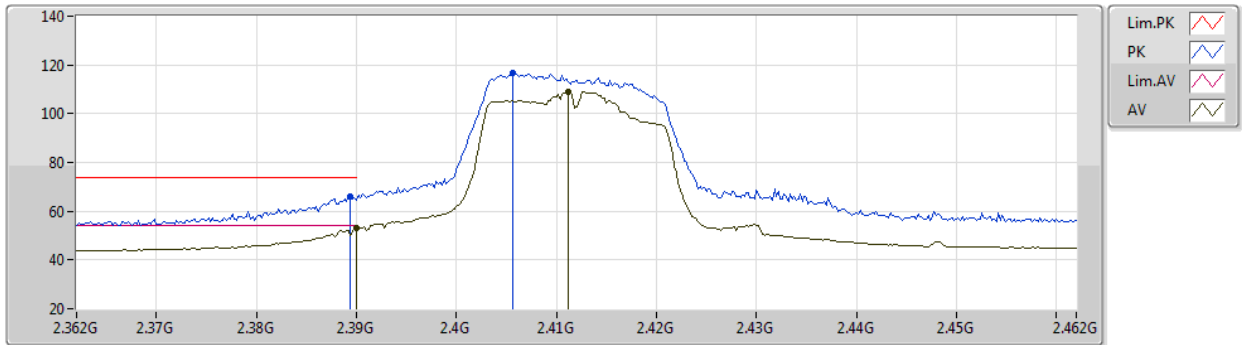


EUT Y\_2TX  
Setting 18.5  
03-A-A-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	66.08	74.00	-7.92	34.07	3	Vertical	214	1.98	-	28.28	3.73	-
AV	2.39G	52.96	54.00	-1.04	20.95	3	Vertical	214	1.98	-	28.28	3.73	-
PK	2.4056G	116.48	Inf	-Inf	84.42	3	Vertical	214	1.98	-	28.32	3.74	-
AV	2.4112G	108.99	Inf	-Inf	76.91	3	Vertical	214	1.98	-	28.33	3.75	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

19/03/2020

## 2412MHz\_TX

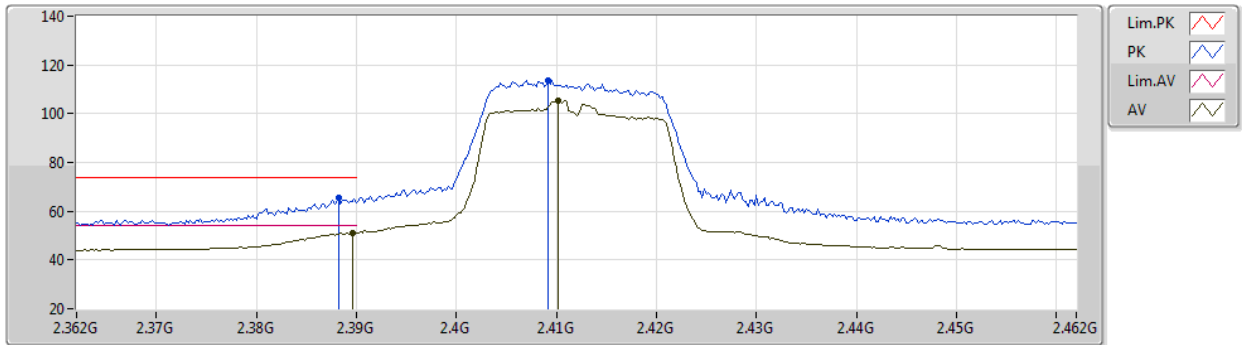


EUT Y\_2TX  
Setting 18.5  
03-A-A-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3882G	65.57	74.00	-8.43	33.56	3	Horizontal	346	2.39	-	28.28	3.73	-
AV	2.3896G	51.19	54.00	-2.81	19.18	3	Horizontal	346	2.39	-	28.28	3.73	-
PK	2.4092G	113.48	Inf	-Inf	81.40	3	Horizontal	346	2.39	-	28.33	3.75	-
AV	2.4102G	105.47	Inf	-Inf	73.39	3	Horizontal	346	2.39	-	28.33	3.75	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

19/03/2020

## 2412MHz\_TX

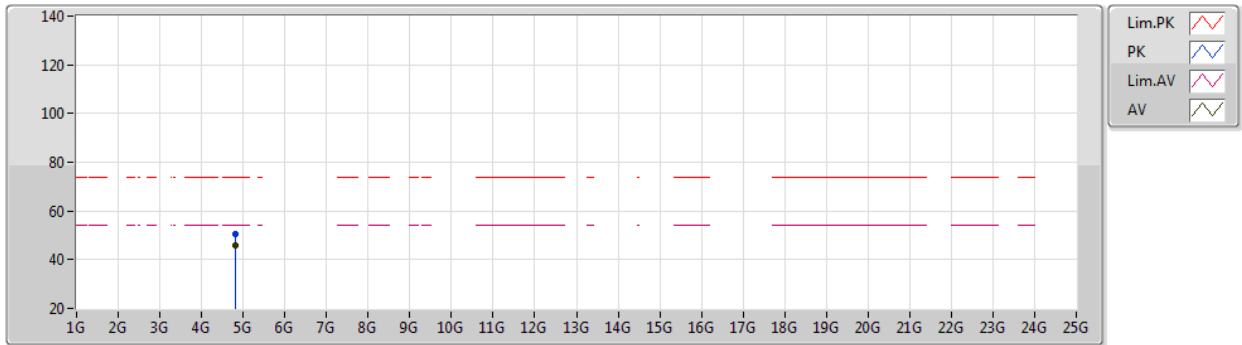


EUT Y\_2TX  
Setting 18.5  
03-A-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82402G	50.68	74.00	-23.32	45.38	3	Vertical	7	2.38	-	33.55	6.57	34.82
AV	4.82404G	45.82	54.00	-8.18	40.52	3	Vertical	7	2.38	-	33.55	6.57	34.82

# VHT20-BF\_Nss1,(MCS0)\_2TX

19/03/2020

## 2412MHz\_TX

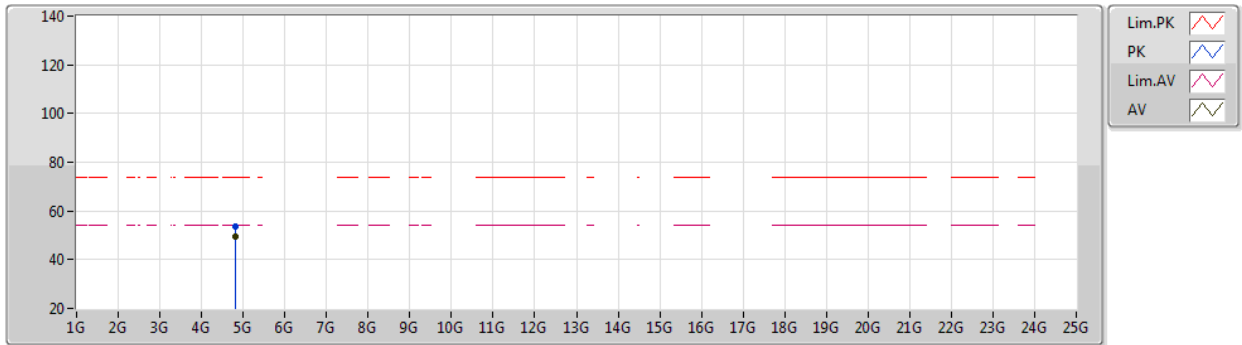


EUT Y\_2TX  
Setting 18.5  
03-A-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82382G	53.50	74.00	-20.50	48.20	3	Horizontal	323	2.03	-	33.55	6.57	34.82
AV	4.82396G	49.36	54.00	-4.64	44.06	3	Horizontal	323	2.03	-	33.55	6.57	34.82

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2417MHz\_TX

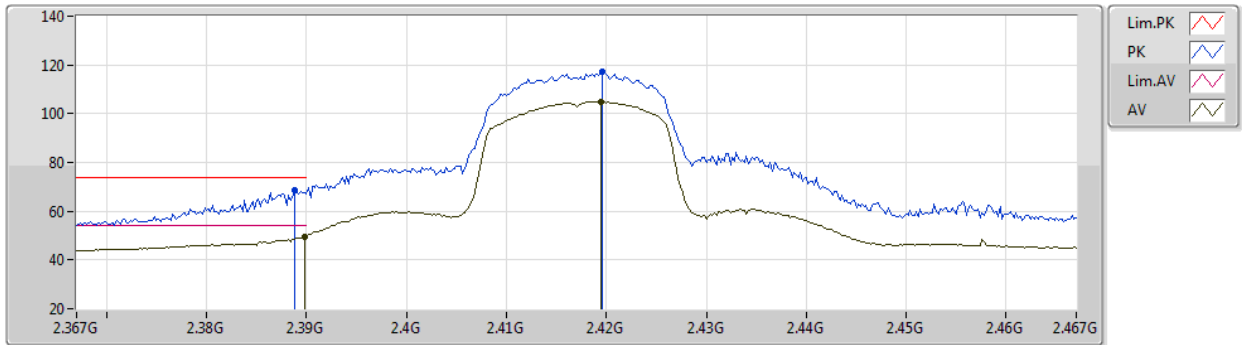


EUT Y\_2TX  
Setting 20.5  
03-A-A-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3888G	68.81	74.00	-5.19	36.80	3	Vertical	218	2.07	-	28.28	3.73	-
AV	2.3898G	49.73	54.00	-4.27	17.72	3	Vertical	218	2.07	-	28.28	3.73	-
PK	2.4196G	117.15	Inf	-Inf	85.04	3	Vertical	218	2.07	-	28.36	3.75	-
AV	2.4194G	104.90	Inf	-Inf	72.79	3	Vertical	218	2.07	-	28.36	3.75	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2417MHz\_TX

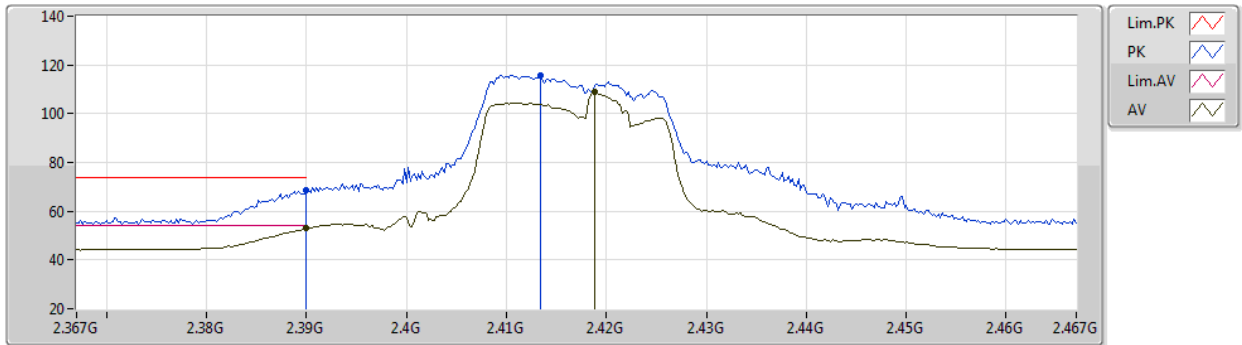


EUT Y\_2TX  
Setting 20.5  
03-A-A-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	68.49	74.00	-5.51	36.48	3	Horizontal	354	2.40	-	28.28	3.73	-
AV	2.39G	52.88	54.00	-1.12	20.87	3	Horizontal	354	2.40	-	28.28	3.73	-
PK	2.4134G	115.90	Inf	-Inf	83.81	3	Horizontal	354	2.40	-	28.34	3.75	-
AV	2.4188G	108.78	Inf	-Inf	76.67	3	Horizontal	354	2.40	-	28.36	3.75	-

## VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

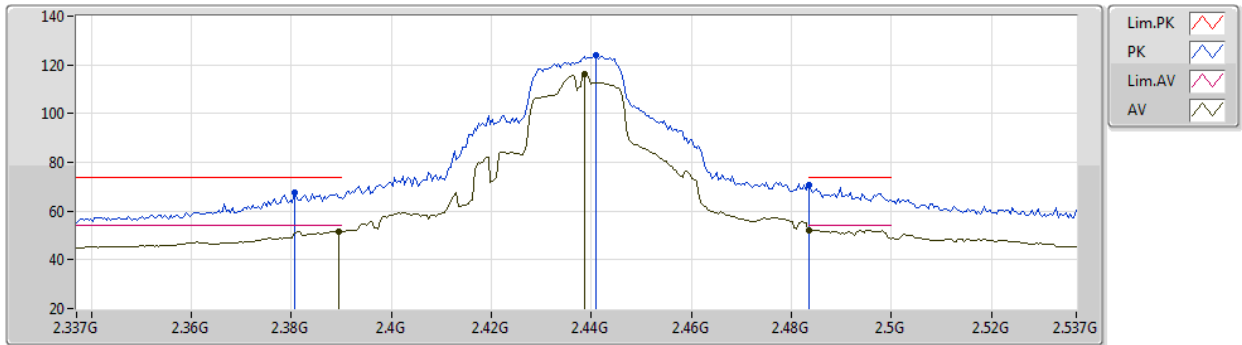


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3806G	67.68	74.00	-6.32	36.03	3	Vertical	213	2.11	-	27.66	3.99	-
AV	2.3894G	51.59	54.00	-2.41	19.97	3	Vertical	213	2.11	-	27.63	3.99	-
PK	2.441G	123.97	Inf	-Inf	92.47	3	Vertical	213	2.11	-	27.48	4.02	-
AV	2.4386G	116.11	Inf	-Inf	84.61	3	Vertical	213	2.11	-	27.48	4.02	-
PK	2.4835G	70.58	74.00	-3.42	39.19	3	Vertical	213	2.11	-	27.35	4.04	-
AV	2.4835G	52.26	54.00	-1.74	20.87	3	Vertical	213	2.11	-	27.35	4.04	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

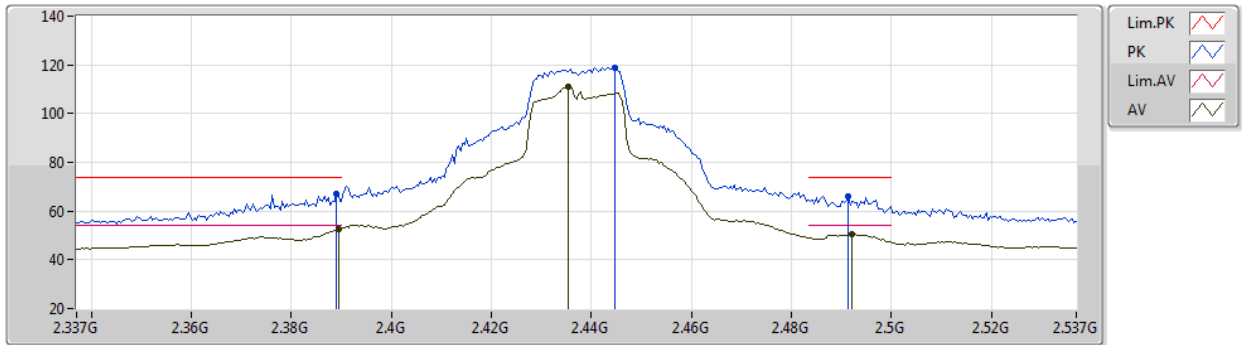


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	66.84	74.00	-7.16	35.22	3	Horizontal	357	1.80	-	27.63	3.99	-
AV	2.3894G	52.78	54.00	-1.22	21.16	3	Horizontal	357	1.80	-	27.63	3.99	-
PK	2.4446G	118.98	Inf	-Inf	87.49	3	Horizontal	357	1.80	-	27.47	4.02	-
AV	2.4354G	110.85	Inf	-Inf	79.34	3	Horizontal	357	1.80	-	27.49	4.02	-
PK	2.4914G	66.06	74.00	-7.94	34.68	3	Horizontal	357	1.80	-	27.33	4.05	-
AV	2.4922G	50.43	54.00	-3.57	19.06	3	Horizontal	357	1.80	-	27.32	4.05	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

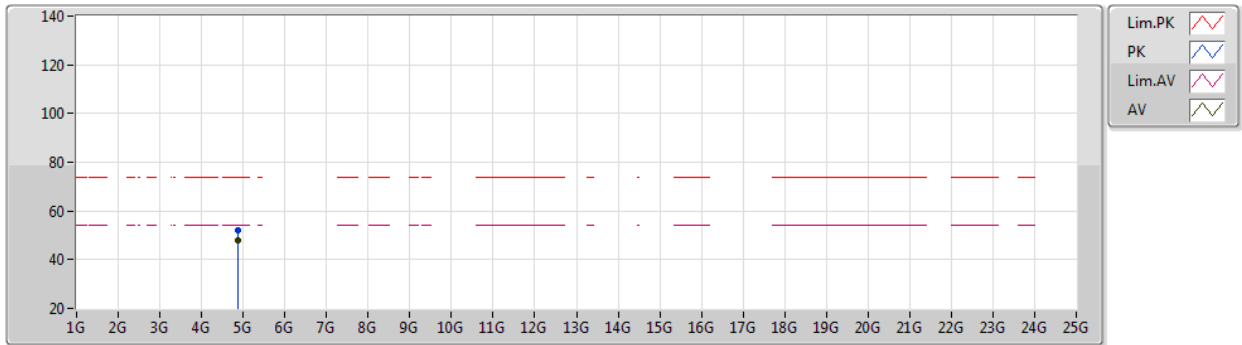


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87401G	52.26	74.00	-21.74	47.43	3	Vertical	12	1.85	-	31.07	5.40	31.64
AV	4.874G	47.96	54.00	-6.04	43.13	3	Vertical	12	1.85	-	31.07	5.40	31.64

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

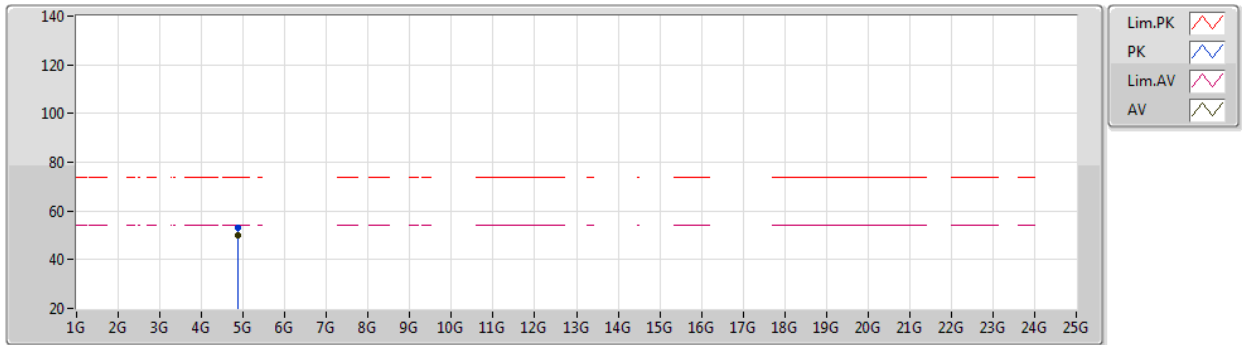


EUT Y\_2TX  
Setting 25  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87403G	53.32	74.00	-20.68	48.49	3	Horizontal	333	2.16	-	31.07	5.40	31.64
AV	4.87396G	49.79	54.00	-4.21	44.96	3	Horizontal	333	2.16	-	31.07	5.40	31.64

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2457MHz\_TX

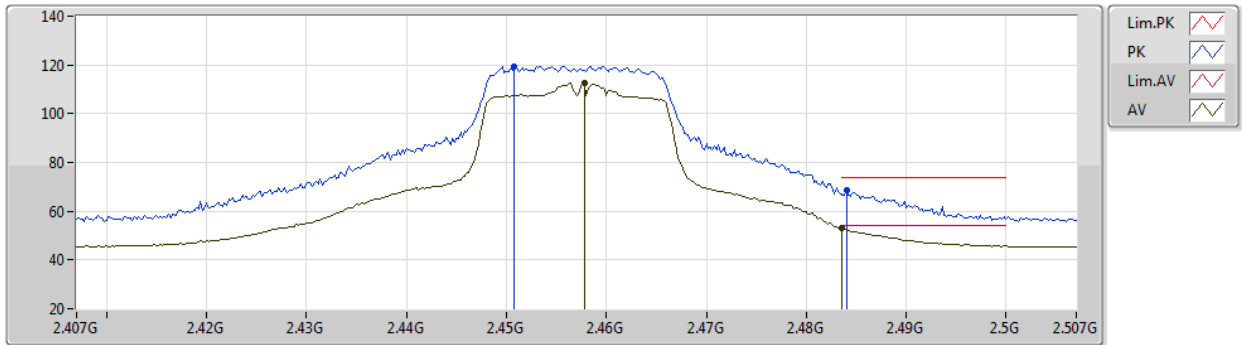


EUT Y\_2TX  
Setting 21  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4508G	119.51	Inf	-Inf	88.03	3	Vertical	213	2.13	-	27.45	4.03	-
AV	2.4578G	112.84	Inf	-Inf	81.38	3	Vertical	213	2.13	-	27.43	4.03	-
PK	2.484G	68.77	74.00	-5.23	37.38	3	Vertical	213	2.13	-	27.35	4.04	-
AV	2.4835G	52.85	54.00	-1.15	21.46	3	Vertical	213	2.13	-	27.35	4.04	-

## VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2457MHz\_TX

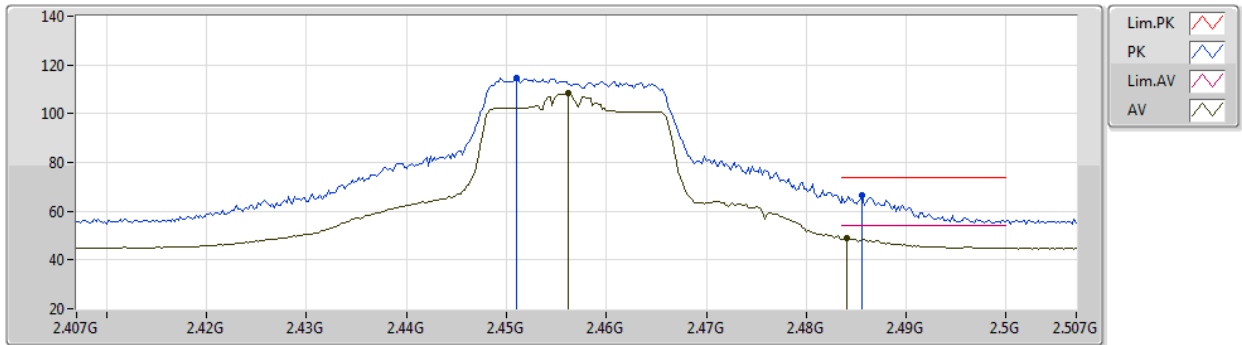


EUT Y\_2TX  
Setting 21  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.451G	114.54	Inf	-Inf	83.06	3	Horizontal	353	1.86	-	27.45	4.03	-
AV	2.4562G	108.47	Inf	-Inf	77.01	3	Horizontal	353	1.86	-	27.43	4.03	-
PK	2.4856G	66.79	74.00	-7.21	35.41	3	Horizontal	353	1.86	-	27.34	4.04	-
AV	2.484G	48.77	54.00	-5.23	17.38	3	Horizontal	353	1.86	-	27.35	4.04	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2462MHz\_TX

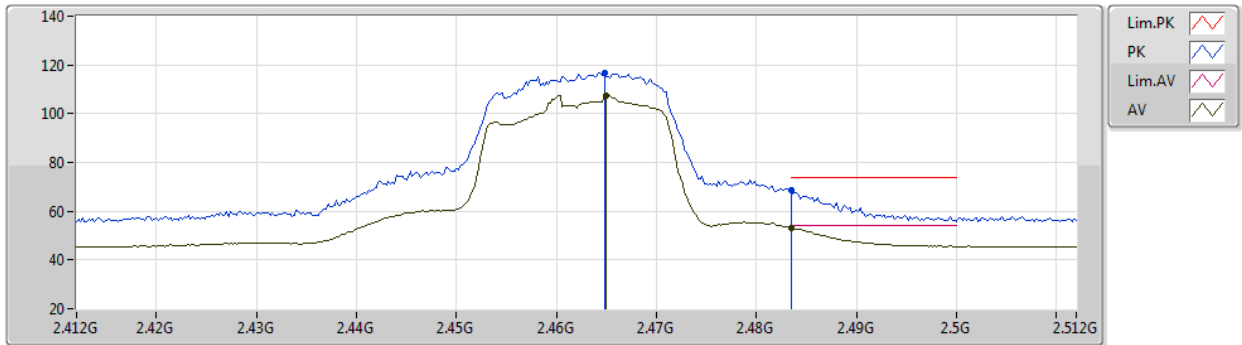


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4648G	116.83	Inf	-Inf	85.39	3	Vertical	217	1.99	-	27.41	4.03	-
AV	2.465G	107.65	Inf	-Inf	76.21	3	Vertical	217	1.99	-	27.41	4.03	-
PK	2.4835G	68.57	74.00	-5.43	37.18	3	Vertical	217	1.99	-	27.35	4.04	-
AV	2.4835G	52.98	54.00	-1.02	21.59	3	Vertical	217	1.99	-	27.35	4.04	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2462MHz\_TX

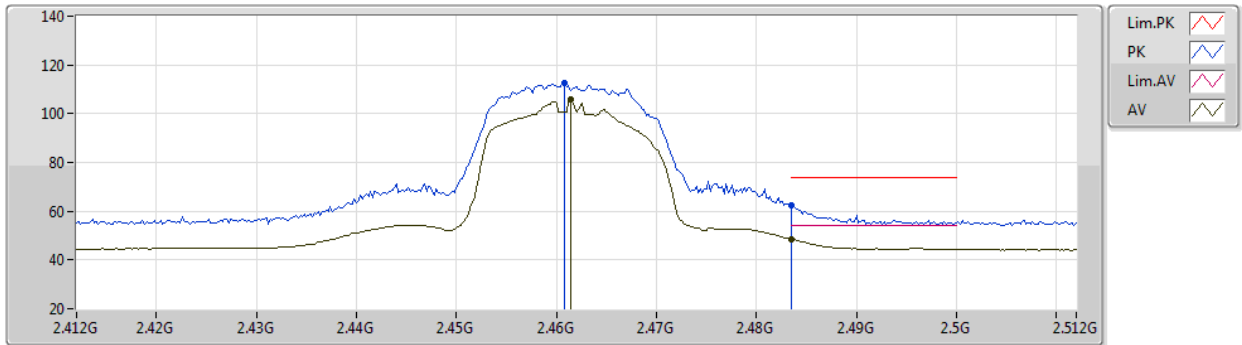


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4608G	112.45	Inf	-Inf	81.00	3	Horizontal	344	2.55	-	27.42	4.03	-
AV	2.4614G	105.61	Inf	-Inf	74.16	3	Horizontal	344	2.55	-	27.42	4.03	-
PK	2.4835G	62.19	74.00	-11.81	30.80	3	Horizontal	344	2.55	-	27.35	4.04	-
AV	2.4835G	48.59	54.00	-5.41	17.20	3	Horizontal	344	2.55	-	27.35	4.04	-

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2462MHz\_TX

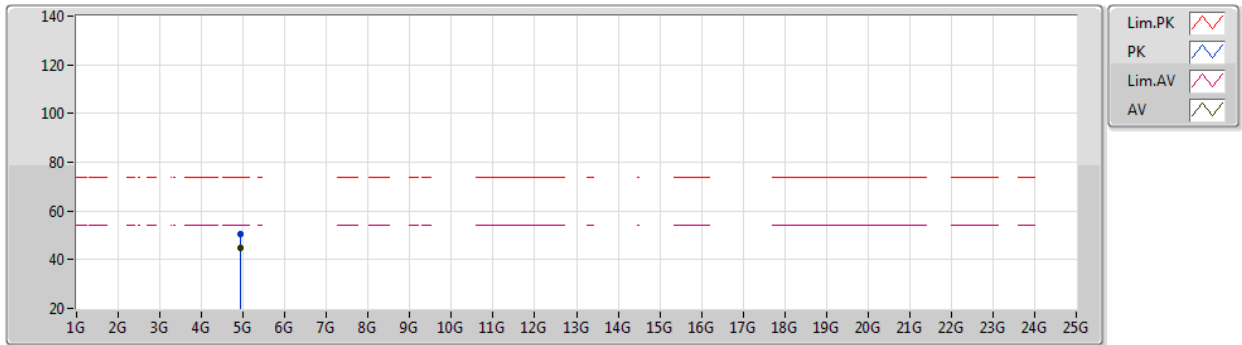


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92412G	50.39	74.00	-23.61	45.32	3	Vertical	20	2.43	-	31.20	5.48	31.61
AV	4.92401G	44.66	54.00	-9.34	39.59	3	Vertical	20	2.43	-	31.20	5.48	31.61

# VHT20-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2462MHz\_TX

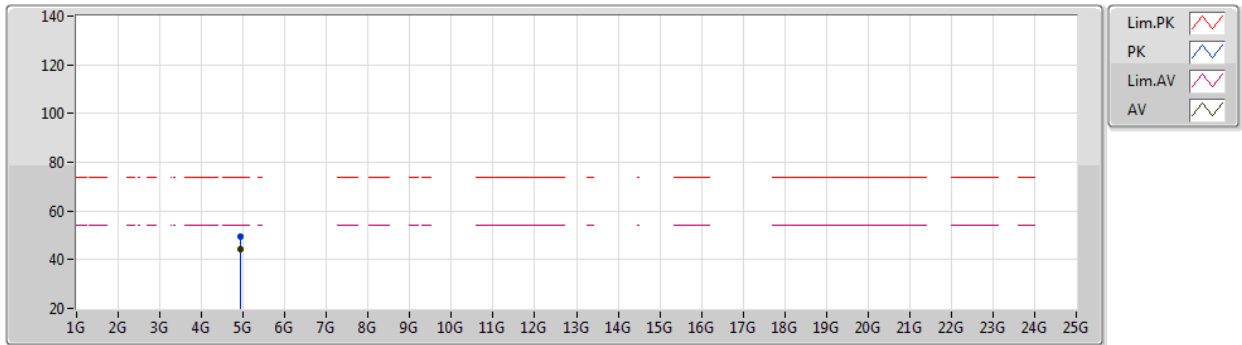


EUT Y\_2TX  
Setting 19  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92394G	49.70	74.00	-24.30	44.63	3	Horizontal	323	1.00	-	31.20	5.48	31.61
AV	4.92404G	44.08	54.00	-9.92	39.01	3	Horizontal	323	1.00	-	31.20	5.48	31.61

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2422MHz\_TX

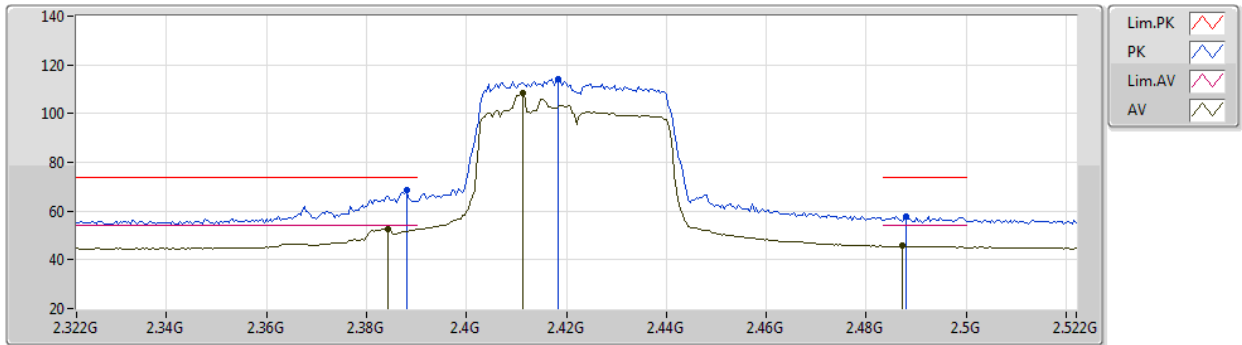


EUT Y\_2TX  
Setting 17  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.388G	68.61	74.00	-5.39	36.98	3	Vertical	213	2.21	-	27.64	3.99	-
AV	2.3844G	52.75	54.00	-1.25	21.11	3	Vertical	213	2.21	-	27.65	3.99	-
PK	2.4184G	114.39	Inf	-Inf	82.84	3	Vertical	213	2.21	-	27.54	4.01	-
AV	2.4112G	108.62	Inf	-Inf	77.04	3	Vertical	213	2.21	-	27.57	4.01	-
PK	2.488G	57.77	74.00	-16.23	26.39	3	Vertical	213	2.21	-	27.34	4.04	-
AV	2.4872G	45.66	54.00	-8.34	14.28	3	Vertical	213	2.21	-	27.34	4.04	-

## VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2422MHz\_TX

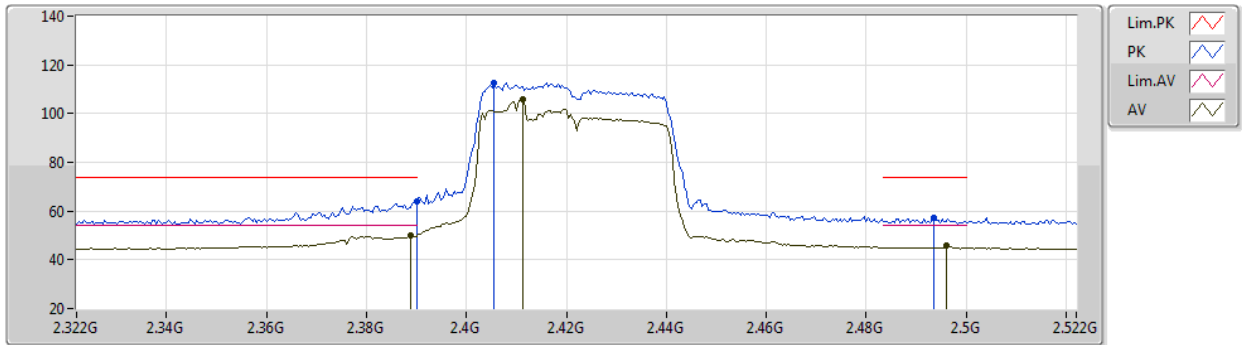


EUT Y\_2TX  
Setting 17  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	63.99	74.00	-10.01	32.36	3	Horizontal	350	1.70	-	27.63	4.00	-
AV	2.3888G	49.97	54.00	-4.03	18.35	3	Horizontal	350	1.70	-	27.63	3.99	-
PK	2.4056G	112.78	Inf	-Inf	81.20	3	Horizontal	350	1.70	-	27.58	4.00	-
AV	2.4112G	106.00	Inf	-Inf	74.42	3	Horizontal	350	1.70	-	27.57	4.01	-
PK	2.4936G	57.17	74.00	-16.83	25.80	3	Horizontal	350	1.70	-	27.32	4.05	-
AV	2.496G	45.66	54.00	-8.34	14.30	3	Horizontal	350	1.70	-	27.31	4.05	-

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2422MHz\_TX

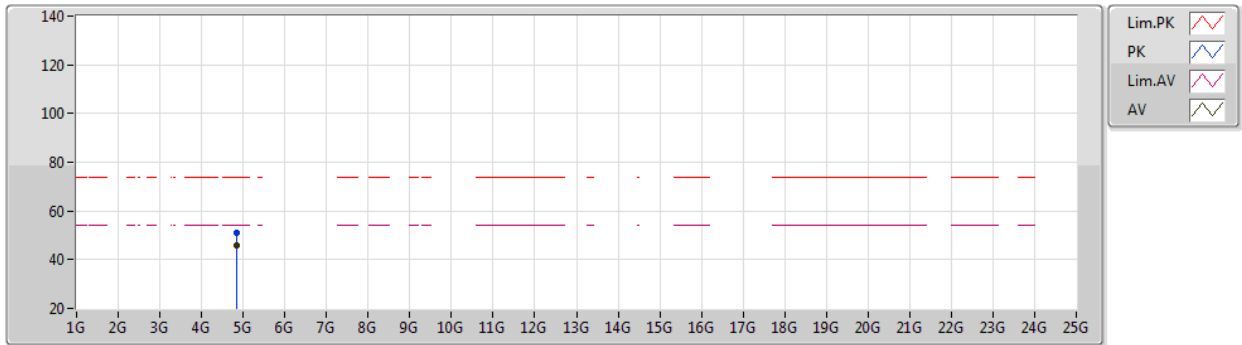


EUT Y\_2TX  
Setting 17  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84393G	51.16	74.00	-22.84	46.41	3	Vertical	13	2.52	-	31.04	5.36	31.65
AV	4.84401G	45.92	54.00	-8.08	41.17	3	Vertical	13	2.52	-	31.04	5.36	31.65

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2422MHz\_TX

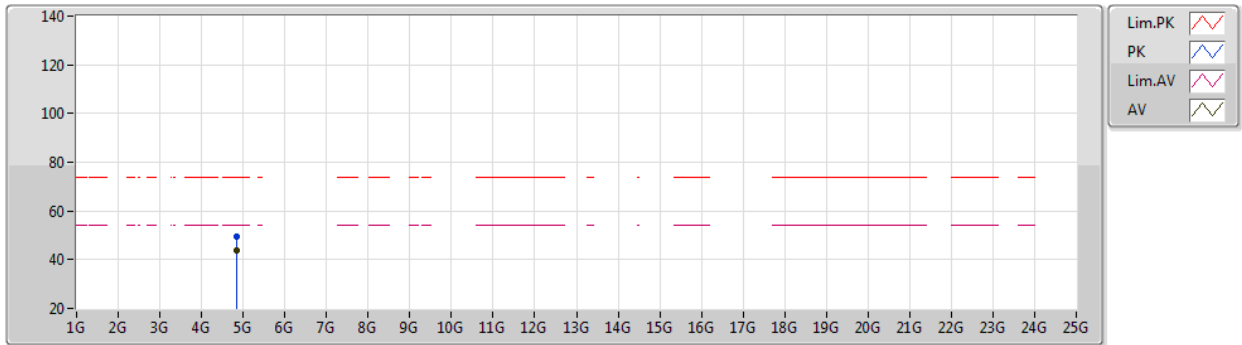


EUT Y\_2TX  
Setting 17  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84398G	49.63	74.00	-24.37	44.88	3	Horizontal	301	2.20	-	31.04	5.36	31.65
AV	4.84399G	43.75	54.00	-10.25	39.00	3	Horizontal	301	2.20	-	31.04	5.36	31.65

## VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

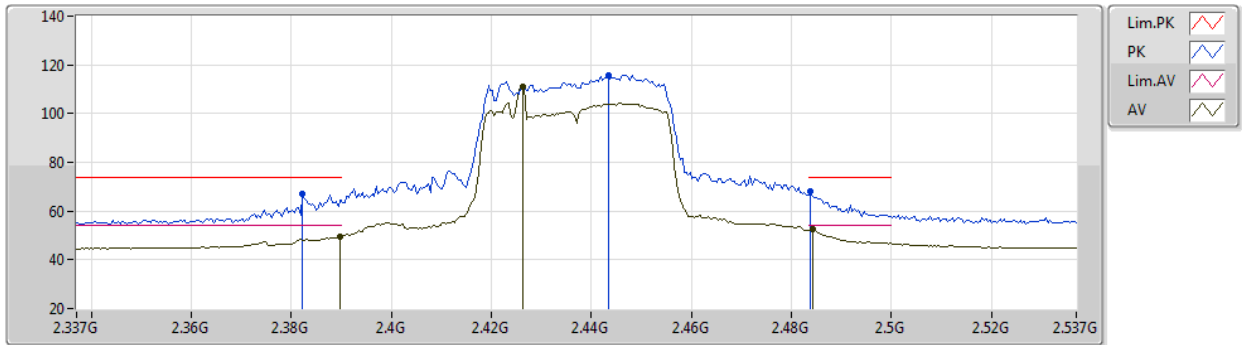


EUT Y\_2TX  
Setting 19.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3822G	67.07	74.00	-6.93	35.43	3	Vertical	207	2.18	-	27.65	3.99	-
AV	2.3898G	49.51	54.00	-4.49	17.89	3	Vertical	207	2.18	-	27.63	3.99	-
PK	2.4434G	115.61	Inf	-Inf	84.12	3	Vertical	207	2.18	-	27.47	4.02	-
AV	2.4262G	111.20	Inf	-Inf	79.67	3	Vertical	207	2.18	-	27.52	4.01	-
PK	2.4838G	67.98	74.00	-6.02	36.59	3	Vertical	207	2.18	-	27.35	4.04	-
AV	2.4842G	52.79	54.00	-1.21	21.40	3	Vertical	207	2.18	-	27.35	4.04	-

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

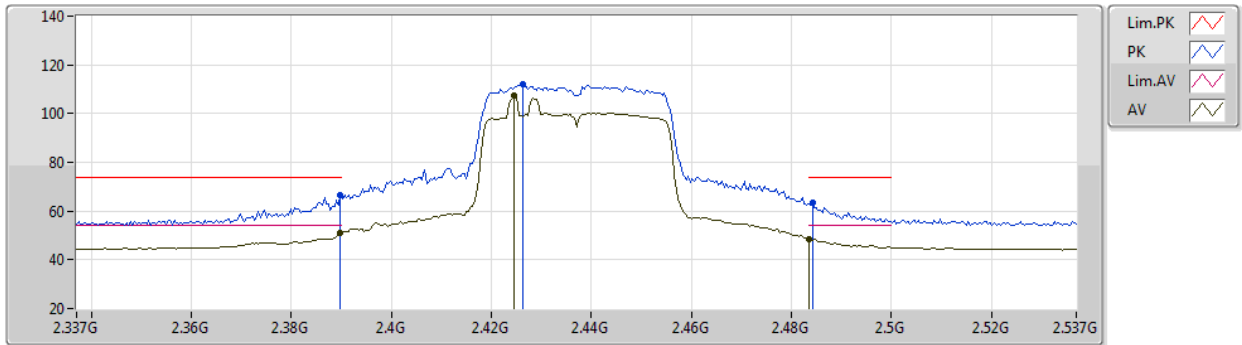


EUT Y\_2TX  
Setting 19.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	66.50	74.00	-7.50	34.88	3	Horizontal	345	2.09	-	27.63	3.99	-
AV	2.3898G	50.81	54.00	-3.19	19.19	3	Horizontal	345	2.09	-	27.63	3.99	-
PK	2.4262G	111.90	Inf	-Inf	80.37	3	Horizontal	345	2.09	-	27.52	4.01	-
AV	2.4262G	107.19	Inf	-Inf	75.65	3	Horizontal	345	2.09	-	27.53	4.01	-
PK	2.4842G	63.31	74.00	-10.69	31.92	3	Horizontal	345	2.09	-	27.35	4.04	-
AV	2.4835G	48.46	54.00	-5.54	17.07	3	Horizontal	345	2.09	-	27.35	4.04	-

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

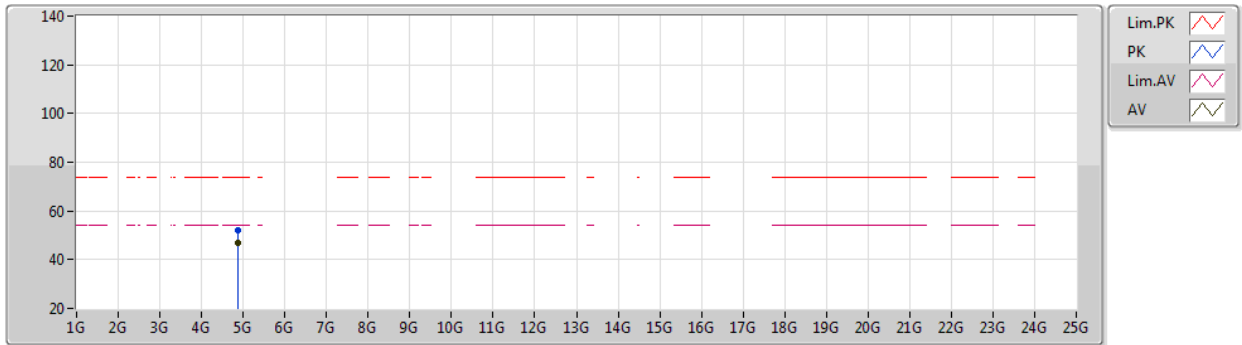


EUT Y\_2TX  
Setting 19.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87398G	51.96	74.00	-22.04	47.13	3	Vertical	14	2.35	-	31.07	5.40	31.64
AV	4.87401G	46.85	54.00	-7.15	42.02	3	Vertical	14	2.35	-	31.07	5.40	31.64

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2437MHz\_TX

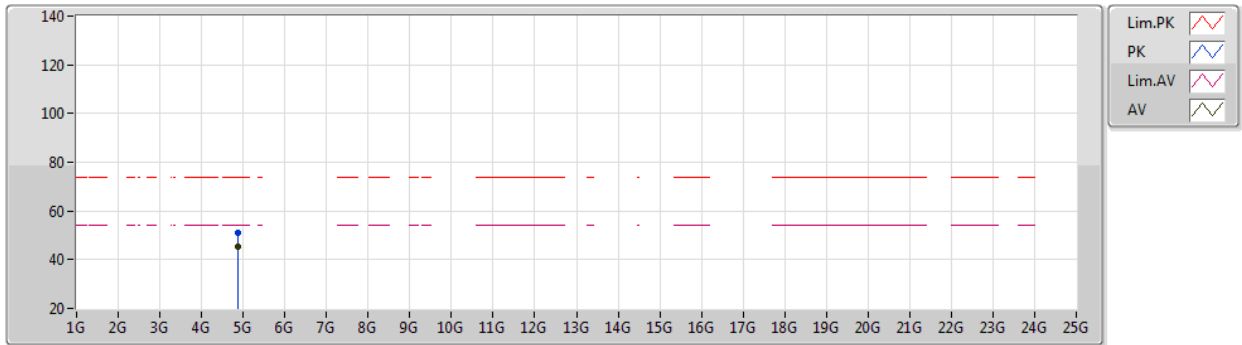


EUT Y\_2TX  
Setting 19.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87403G	51.17	74.00	-22.83	46.34	3	Horizontal	301	2.17	-	31.07	5.40	31.64
AV	4.87402G	45.38	54.00	-8.62	40.55	3	Horizontal	301	2.17	-	31.07	5.40	31.64

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2452MHz\_TX

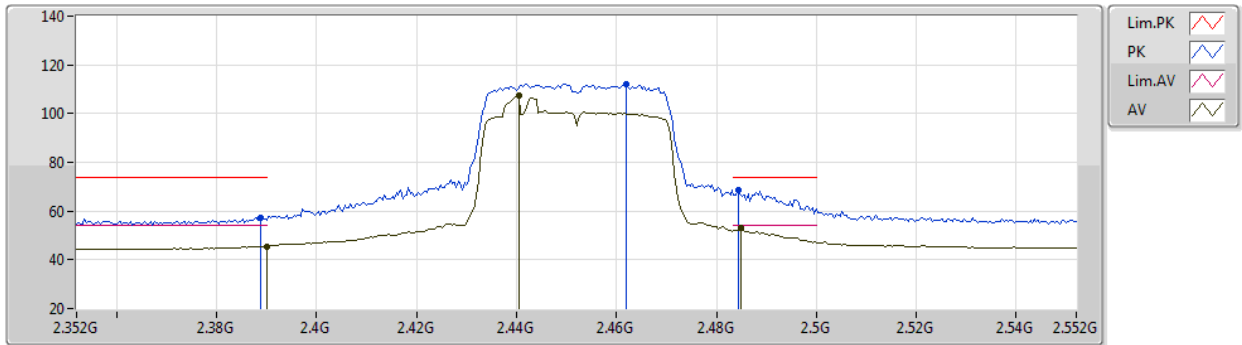


EUT Y\_2TX  
Setting 18.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3888G	57.13	74.00	-16.87	25.51	3	Vertical	242	1.83	-	27.63	3.99	-
AV	2.39G	45.54	54.00	-8.46	13.91	3	Vertical	242	1.83	-	27.63	4.00	-
PK	2.462G	112.30	Inf	-Inf	80.86	3	Vertical	242	1.83	-	27.41	4.03	-
AV	2.4404G	107.24	Inf	-Inf	75.74	3	Vertical	242	1.83	-	27.48	4.02	-
PK	2.4844G	68.48	74.00	-5.52	37.09	3	Vertical	242	1.83	-	27.35	4.04	-
AV	2.4848G	52.86	54.00	-1.14	21.47	3	Vertical	242	1.83	-	27.35	4.04	-

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2452MHz\_TX

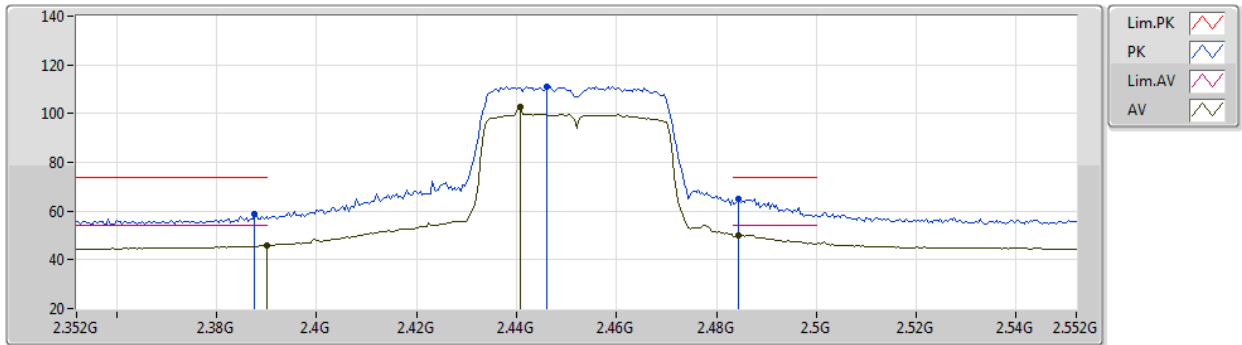


EUT Y\_2TX  
Setting 18.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3876G	58.54	74.00	-15.46	26.91	3	Horizontal	359	1.80	-	27.64	3.99	-
AV	2.39G	45.88	54.00	-8.12	14.25	3	Horizontal	359	1.80	-	27.63	4.00	-
PK	2.446G	111.25	Inf	-Inf	79.77	3	Horizontal	359	1.80	-	27.46	4.02	-
AV	2.4408G	102.86	Inf	-Inf	71.36	3	Horizontal	359	1.80	-	27.48	4.02	-
PK	2.4844G	65.07	74.00	-8.93	33.68	3	Horizontal	359	1.80	-	27.35	4.04	-
AV	2.4844G	49.97	54.00	-4.03	18.58	3	Horizontal	359	1.80	-	27.35	4.04	-

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2452MHz\_TX

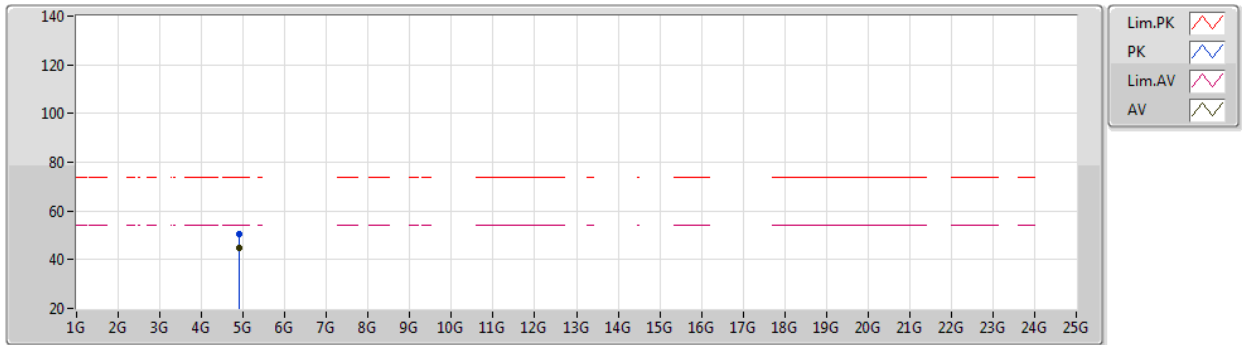


EUT Y\_2TX  
Setting 18.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90404G	50.46	74.00	-23.54	45.51	3	Vertical	14	2.45	-	31.12	5.45	31.62
AV	4.90401G	44.66	54.00	-9.34	39.71	3	Vertical	14	2.45	-	31.12	5.45	31.62

# VHT40-BF\_Nss1,(MCS0)\_2TX

13/03/2020

## 2452MHz\_TX

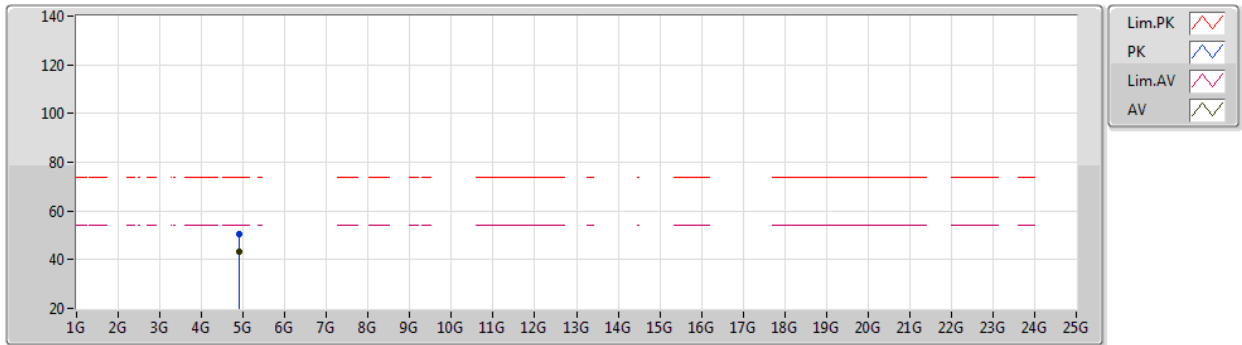

EUT Y\_2TX  
Setting 18.5  
06-F-C-5  
XA07 2nd confirm

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90397G	50.26	74.00	-23.74	45.31	3	Horizontal	300	1.00	-	31.12	5.45	31.62
AV	4.90399G	43.23	54.00	-10.77	38.28	3	Horizontal	300	1.00	-	31.12	5.45	31.62

