

APPENDIX A: SAR TEST DATA

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0724M

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 40.126$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/11/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 820.1 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA, BC10, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.39 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.174 W/kg

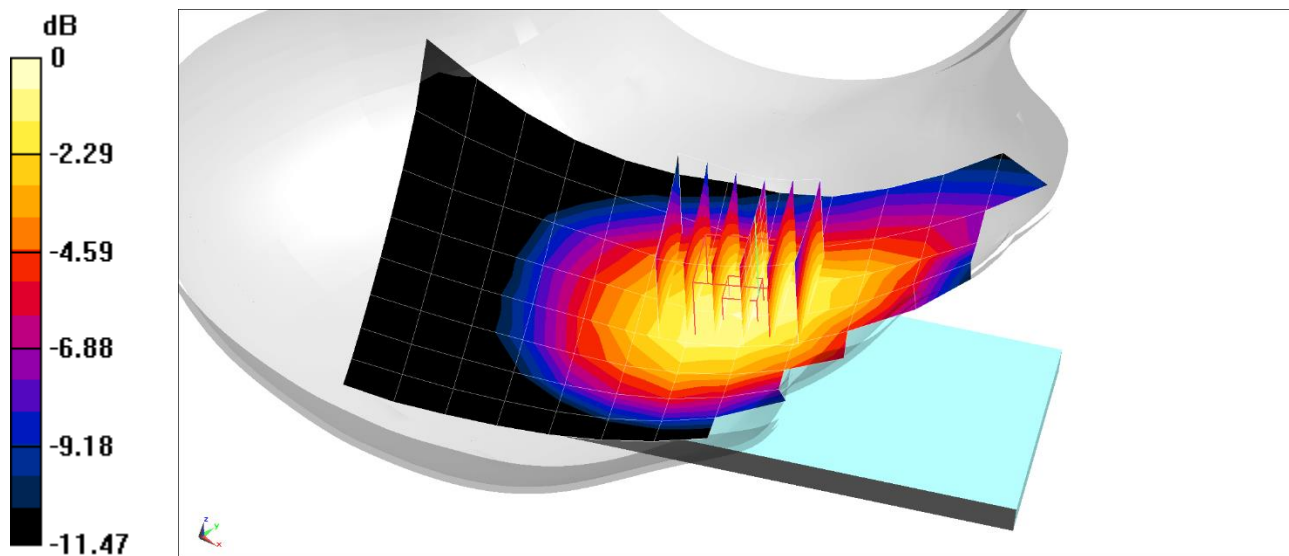

0 dB = 0.203 W/kg = -6.93 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0724M

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 39.925$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11/11/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 836.52 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA, BC0, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.28 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.179 W/kg

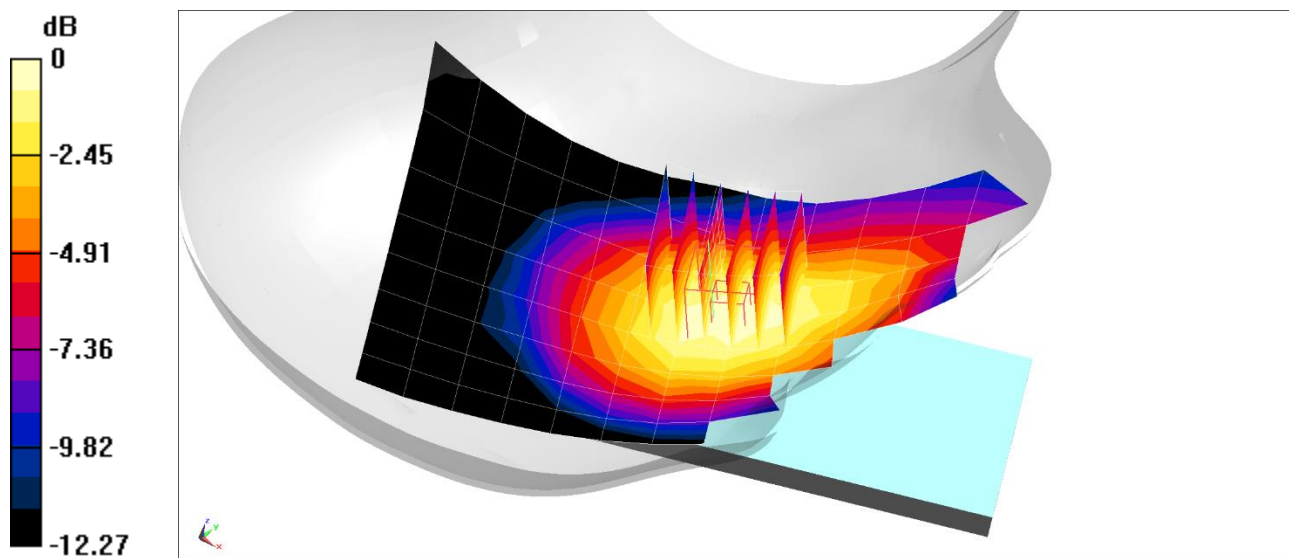

0 dB = 0.210 W/kg = -6.78 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10/21/2020; Ambient Temp: 24.6°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1880 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev.A, Left Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.773 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.077 W/kg

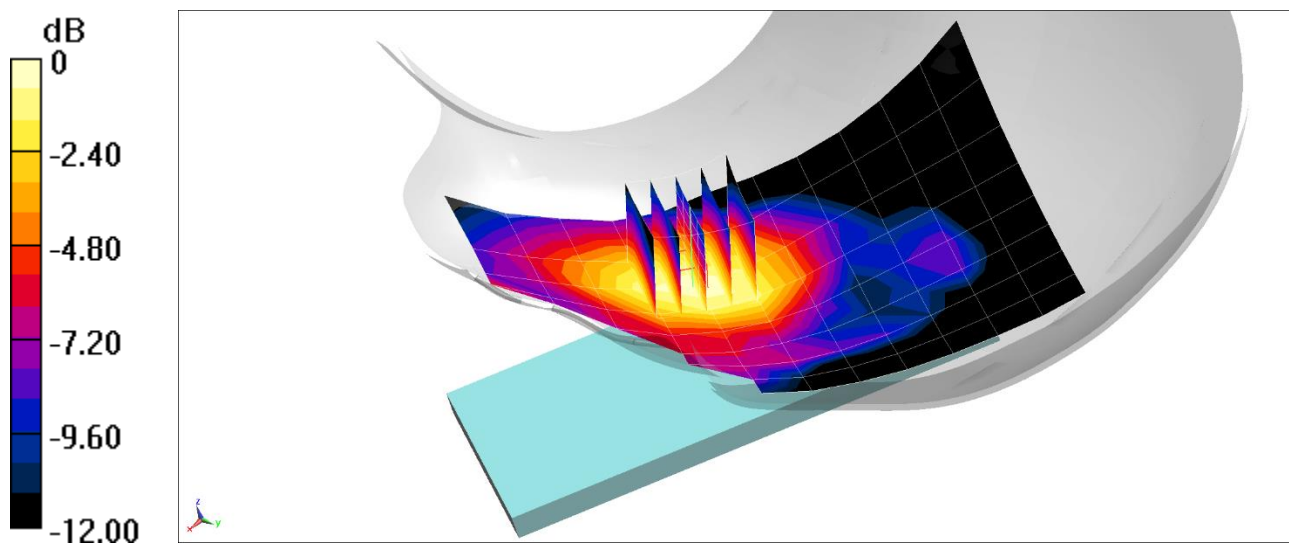

0 dB = 0.101 W/kg = -9.96 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.093$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11/08/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(8.58, 8.58, 8.58) @ 836.6 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.480 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.086 W/kg

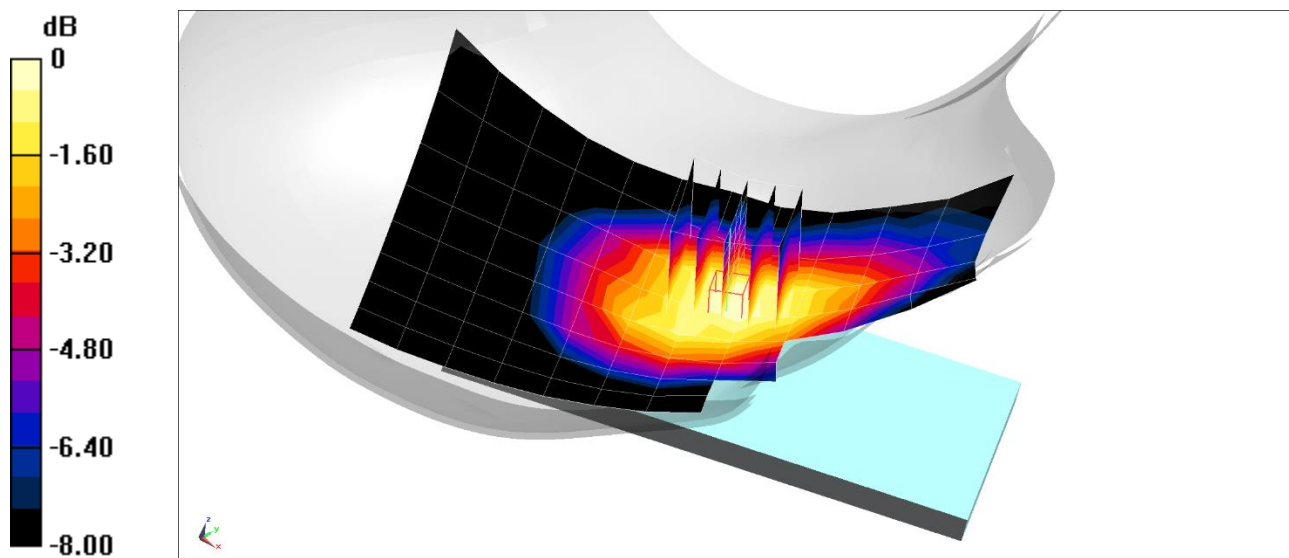

0 dB = 0.107 W/kg = -9.71 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0691M

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10/21/2020; Ambient Temp: 24.6°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1880 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.585 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.027 W/kg

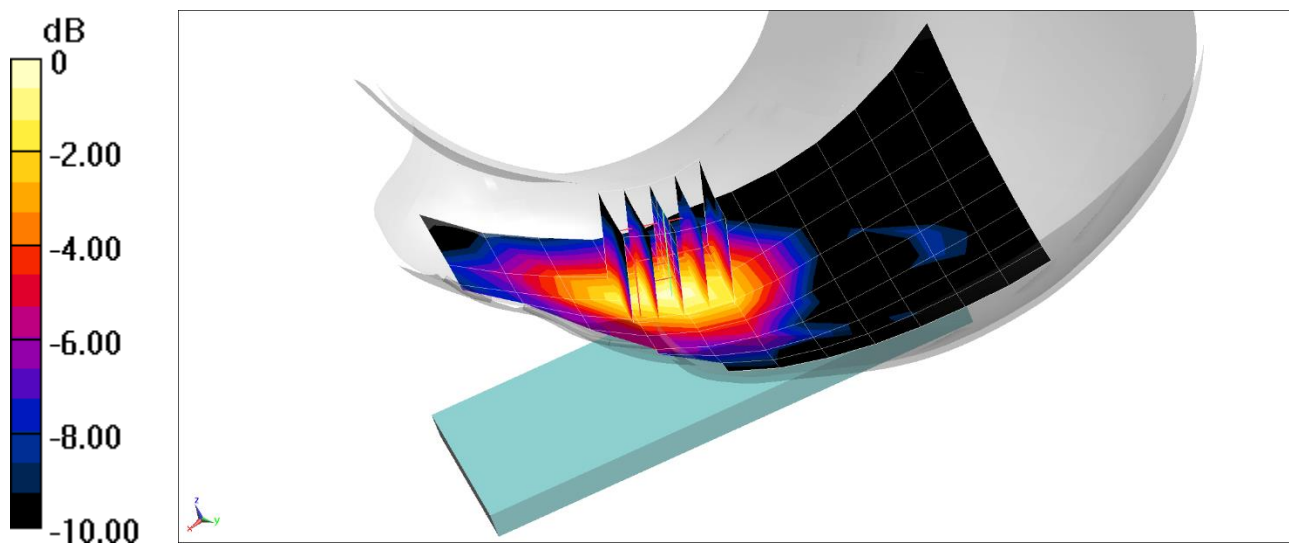

0 dB = 0.0363 W/kg = -14.40 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0724M

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 39.924$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/11/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 836.6 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.38 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.174 W/kg

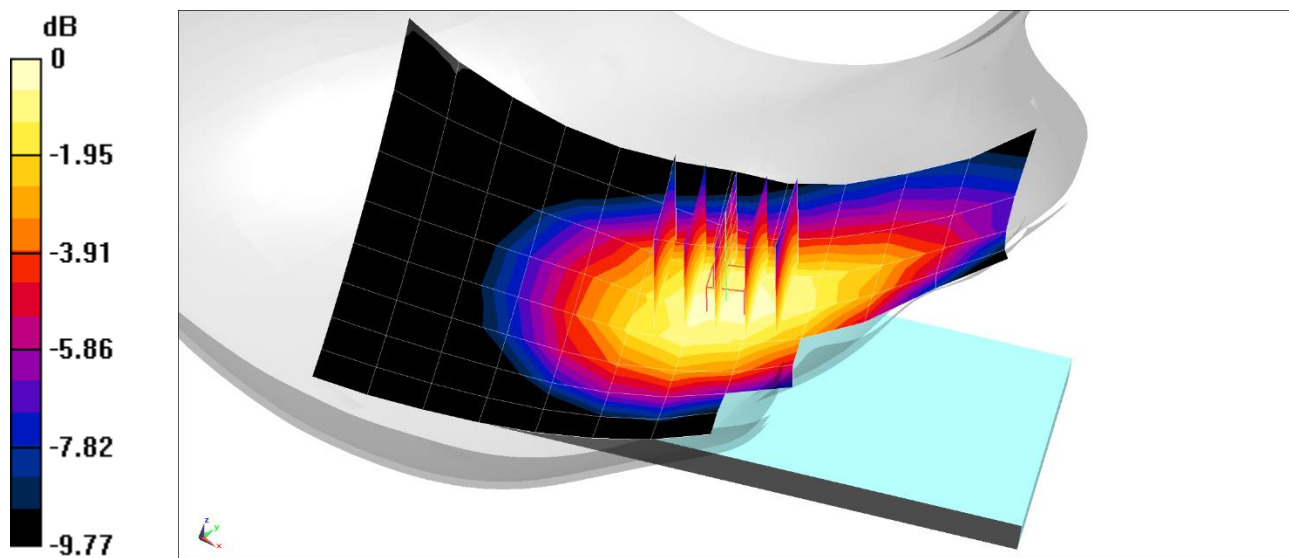

0 dB = 0.207 W/kg = -6.84 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.745$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 11/15/2020; Ambient Temp: 21.3°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7539; ConvF(8.52, 8.52, 8.52) @ 1732.4 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.42 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.139 W/kg

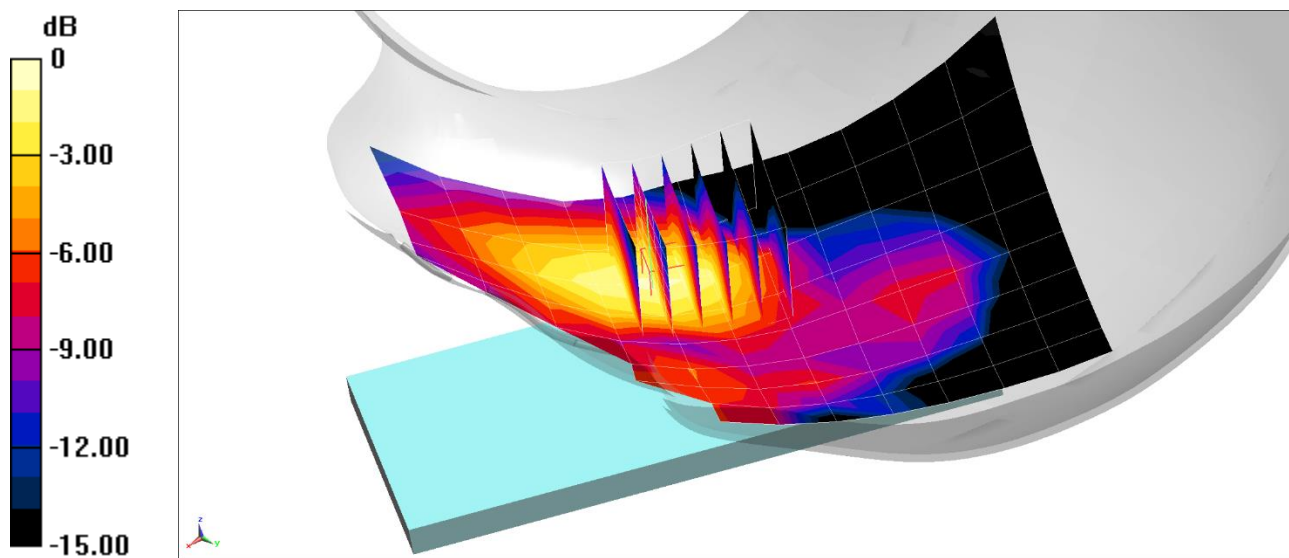

0 dB = 0.179 W/kg = -7.47 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10/21/2020; Ambient Temp: 24.6°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1880 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.903 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.080 W/kg

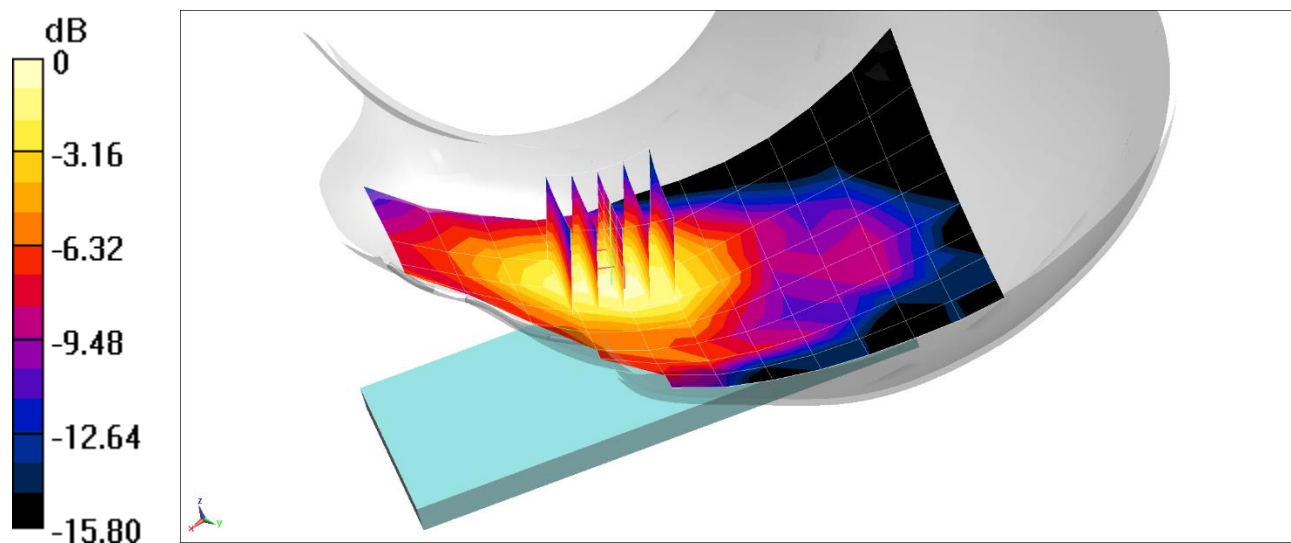

0 dB = 0.107 W/kg = -9.71 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 680.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 40.641$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11/17/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3589; ConvF(8.7, 8.7, 8.7) @ 680.5 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Right Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.70 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.133 W/kg

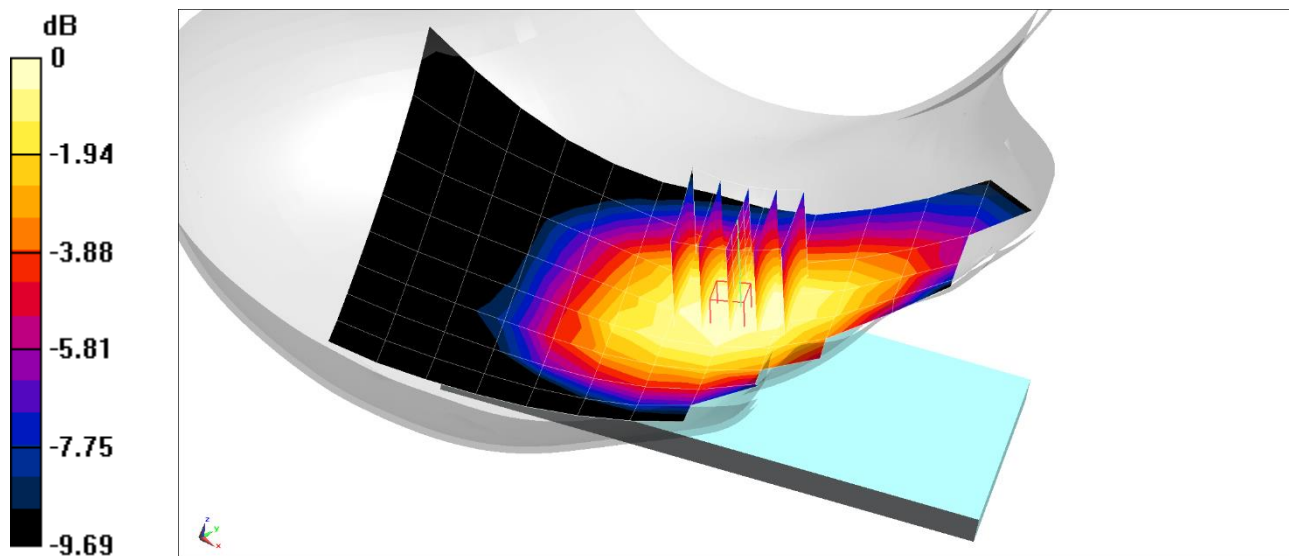

0 dB = 0.156 W/kg = -8.07 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0715M

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 43.183$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 10/07/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7488; ConvF(10.64, 10.64, 10.64) @ 707.5 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.52 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.151 W/kg

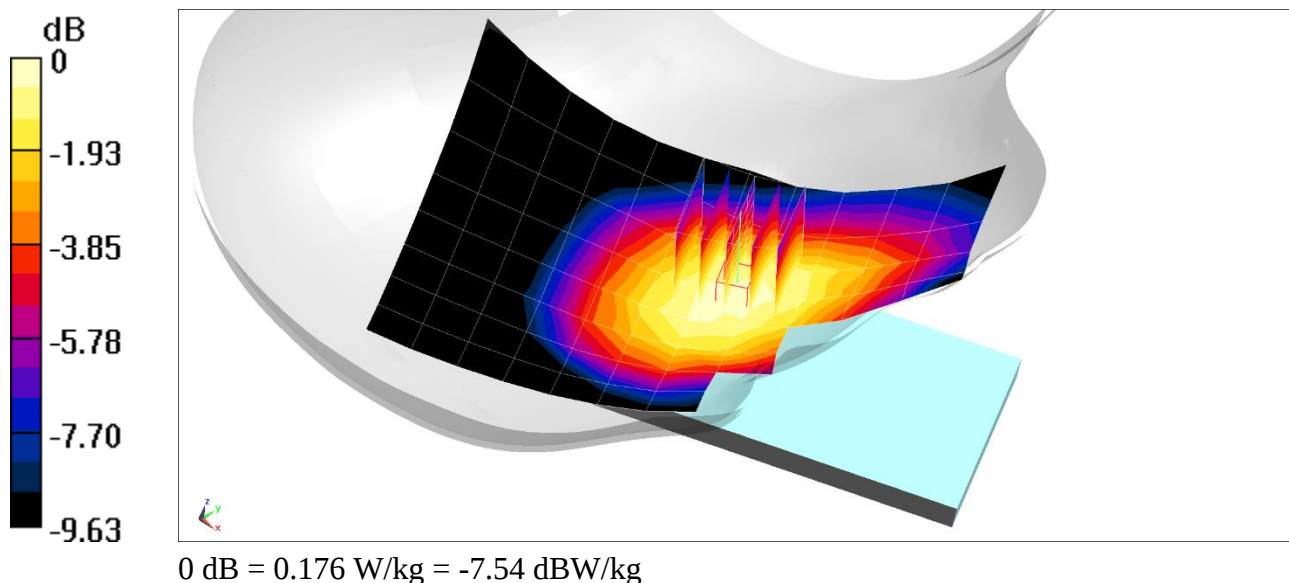

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0715M

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 42.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 10/07/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7488; ConvF(10.64, 10.64, 10.64) @ 782 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.60 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.175 W/kg

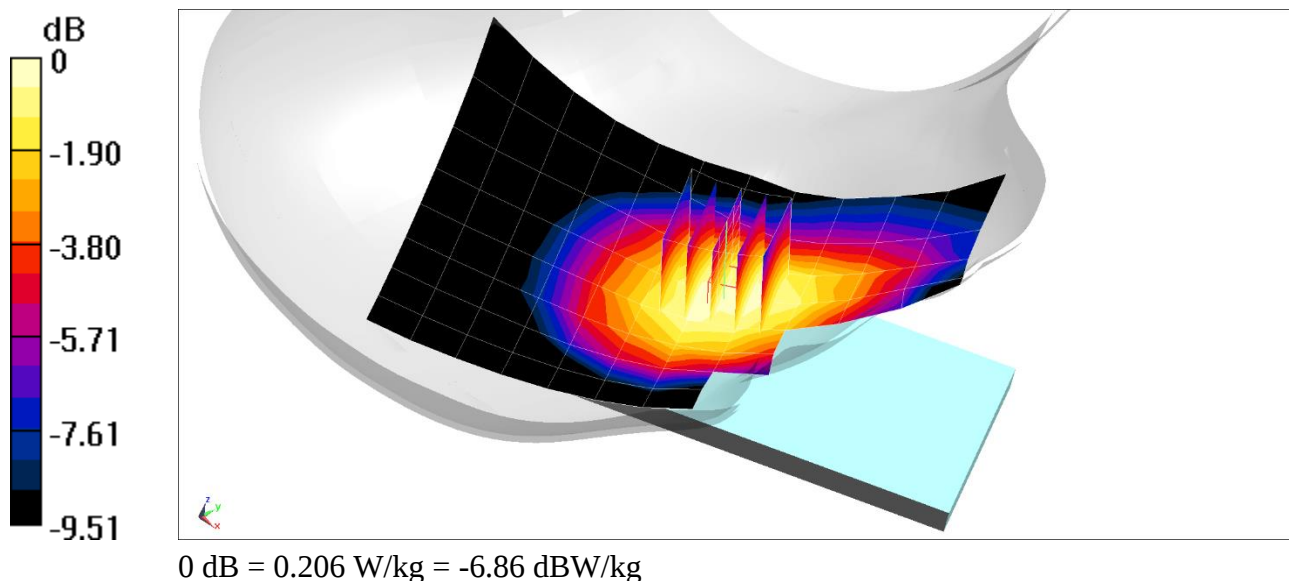

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0715M

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.93$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 10/07/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7488; ConvF(10.64, 10.64, 10.64) @ 793 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 14, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.22 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.168 W/kg

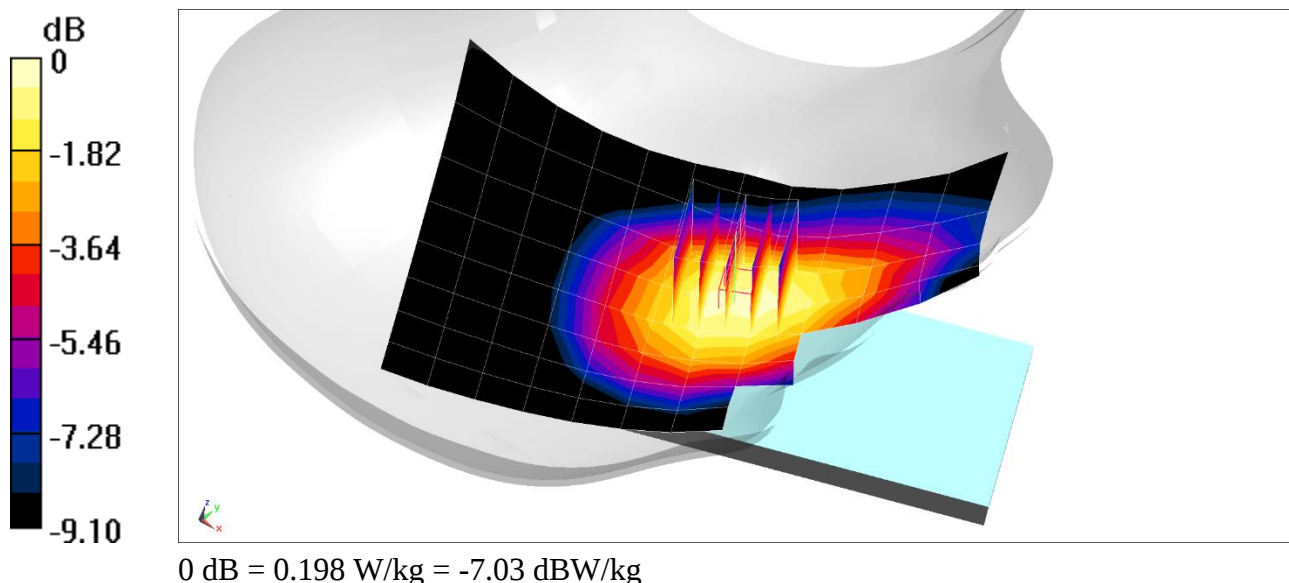

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.853$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11/16/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 831.5 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.32 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.166 W/kg

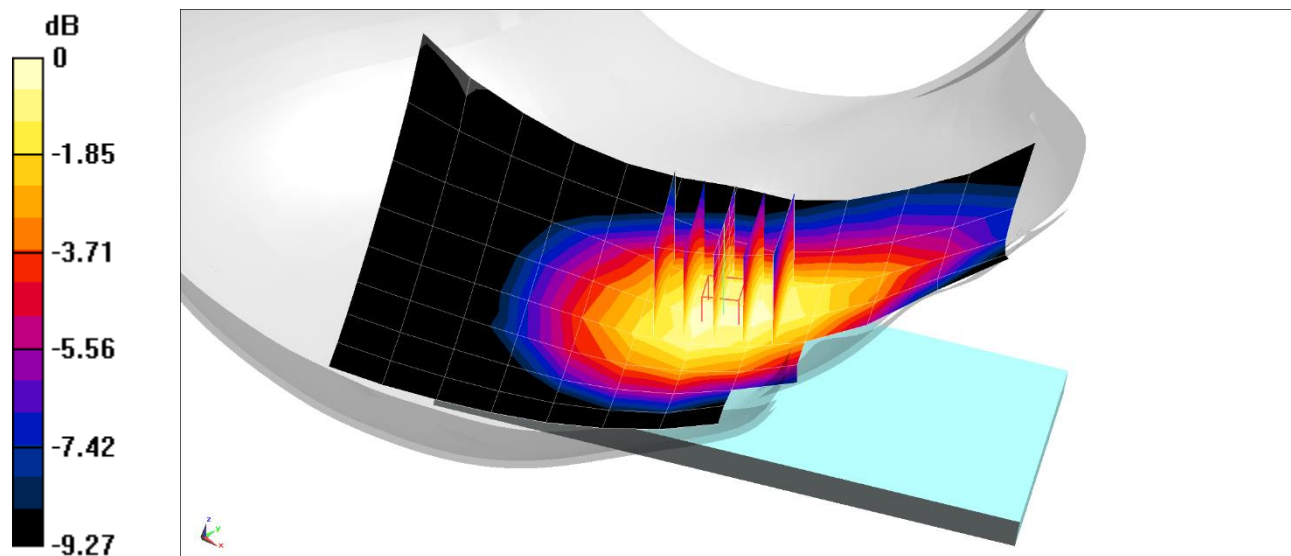

0 dB = 0.196 W/kg = -7.08 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0714M

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 41.785$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/16/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 836.5 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 5 (Cell.) ULCA, Right Head, Cheek,

PCC: Ch. 20525, 10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset

SCC: Ch. 20597, 5 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.98 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.182 W/kg

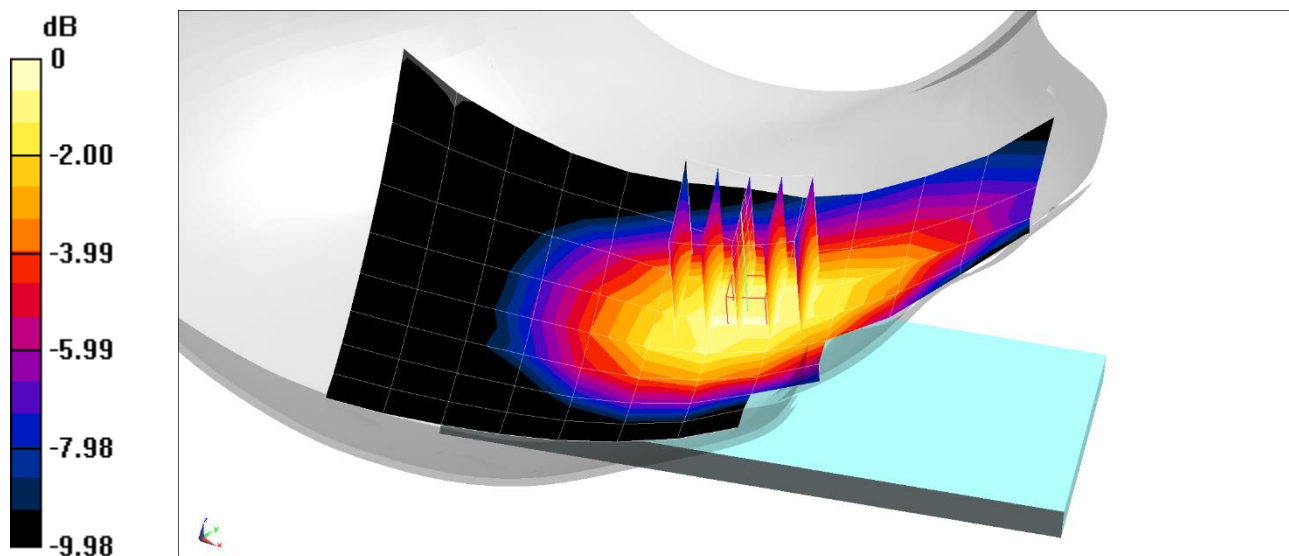

0 dB = 0.217 W/kg = -6.64 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0683M

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1720 \text{ MHz}$; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 40.082$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11/17/2020; Ambient Temp: 24.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7539; ConvF(8.52, 8.52, 8.52) @ 1720 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS) CA_66C ULCA, Left Head, Cheek,
PCC: Ch. 132072, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
SCC: Ch. 132270, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.34 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.147 W/kg

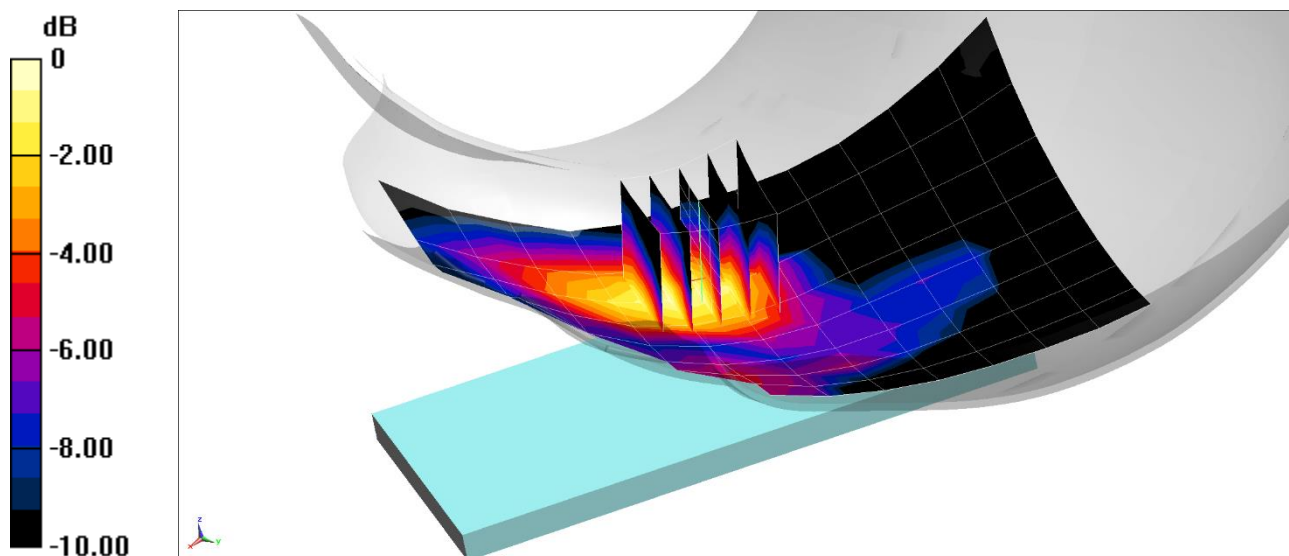

0 dB = 0.192 W/kg = -7.17 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0709M

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 41.625$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10/26/2020; Ambient Temp: 20.6°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1860 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.79 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.135 W/kg

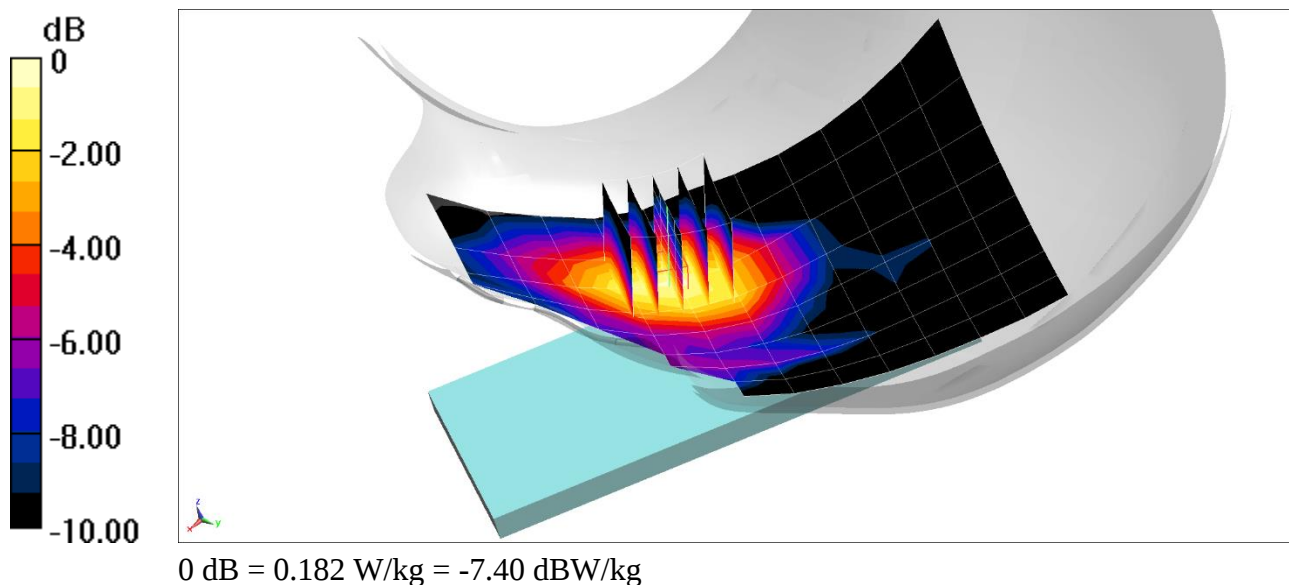

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0721M

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Head; Medium parameters used:

$f = 2310$ MHz; $\sigma = 1.736$ S/m; $\epsilon_r = 38.075$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 10/25/2020; Ambient Temp: 23.2°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN3589; ConvF(7.11, 7.11, 7.11) @ 2310 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Right Head, Tilt, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.675 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.036 W/kg

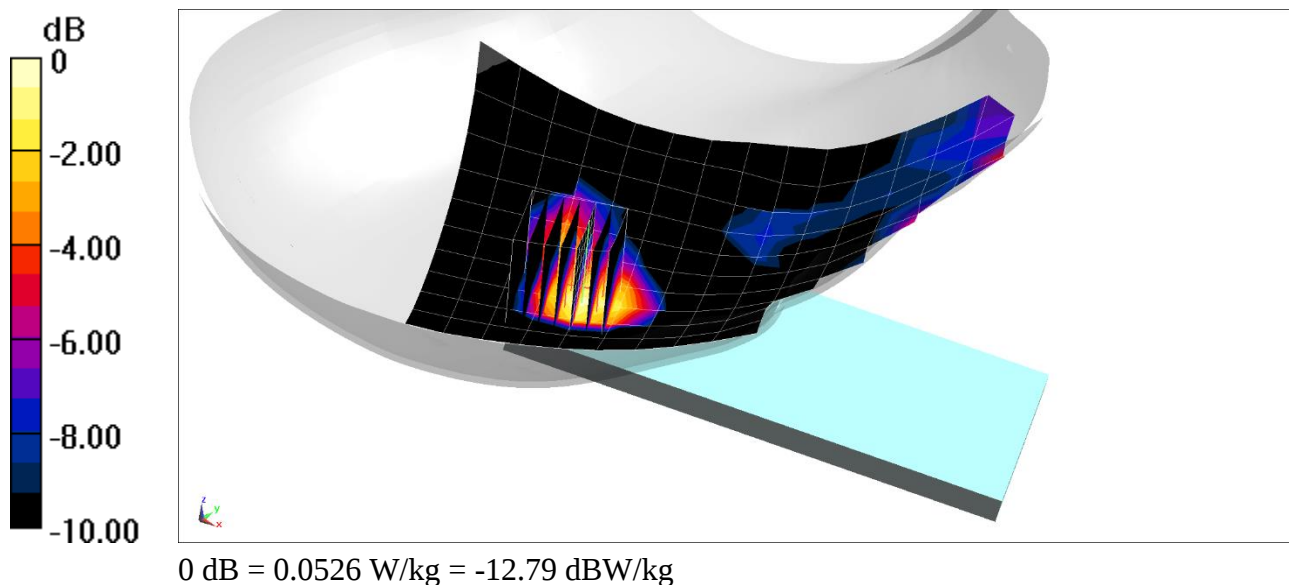

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0721M

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2600 Head; Medium parameters used:

$f = 2560$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 38.443$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 10/18/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2560 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK,1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.682 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.091 W/kg

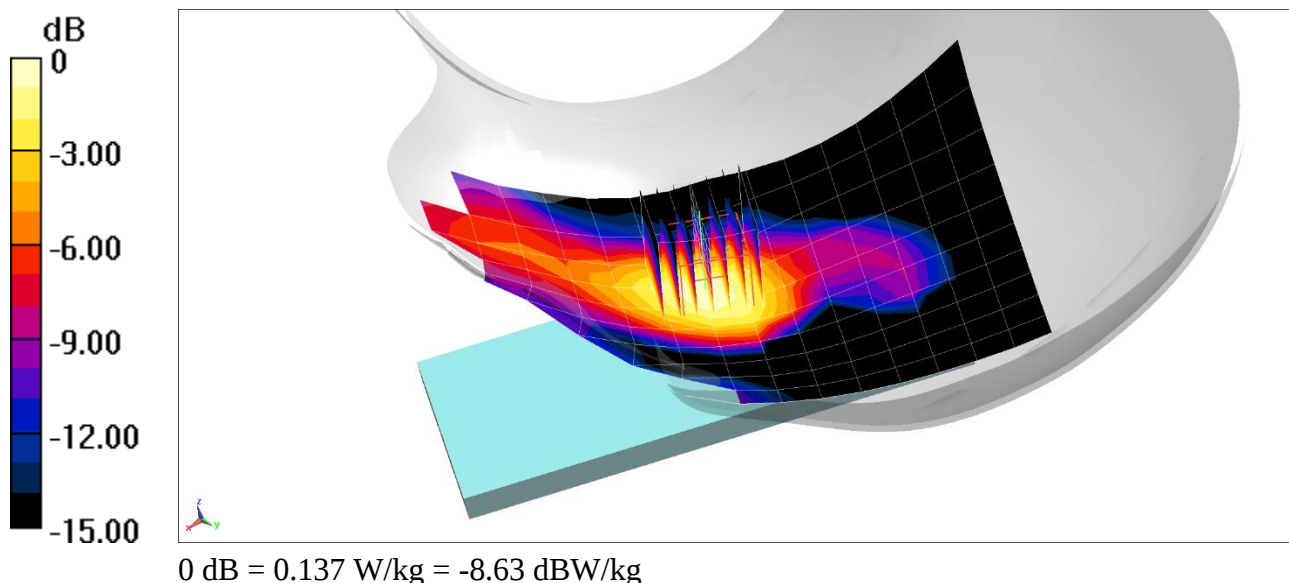

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 3921S

Communication System: UID 0, LTE Band 48; Frequency: 3560 MHz; Duty Cycle: 1:1.58

Medium: 3600 Head; Medium parameters used:

$f = 3560 \text{ MHz}$; $\sigma = 2.881 \text{ S/m}$; $\epsilon_r = 36.831$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/23/2020; Ambient Temp: 21.4°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7539; ConvF(6.76, 6.76, 6.76) @ 3560 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0 (20); Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48 ULCA, Right Head, Cheek,

PCC: Ch. 55340, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

SCC: Ch. 55538, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 13.50 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.436 W/kg

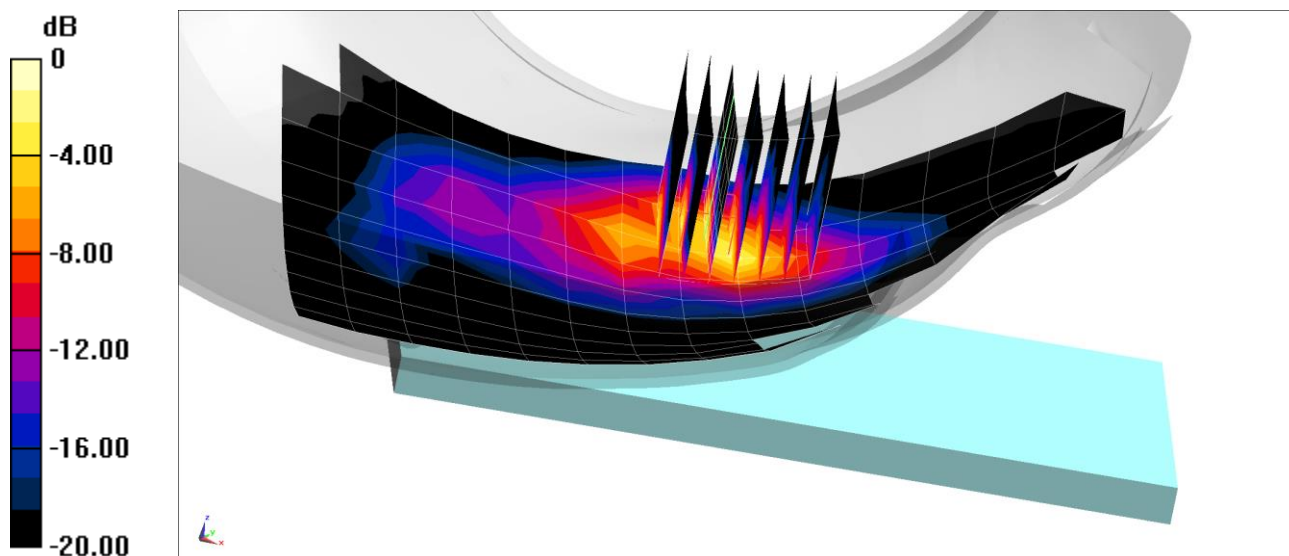

0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0704M

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2680 MHz; Duty Cycle: 1:2.31

Medium: 2600 Head; Medium parameters used:

$f = 2680$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 38.223$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 10/18/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2680 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41, PC2, Right Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.481 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.055 W/kg

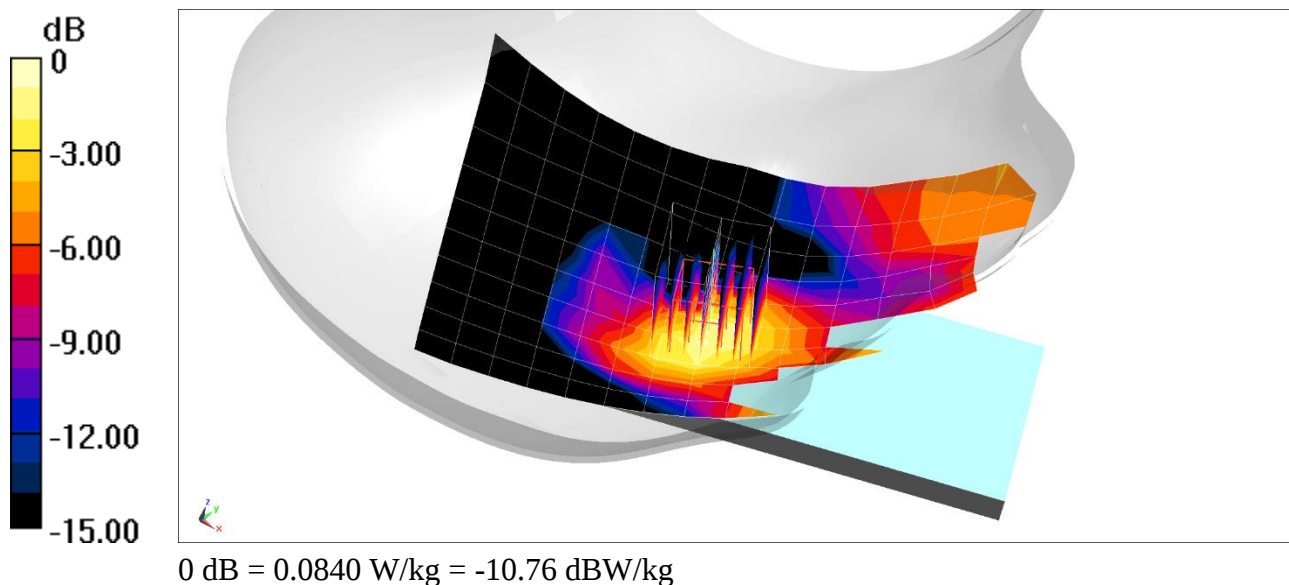

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0728M

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 40.641$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/17/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3589; ConvF(8.7, 8.7, 8.7) @ 680.5 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n71, Right Head, Cheek, 20 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 136100, 50 RB, 28 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.133 W/kg

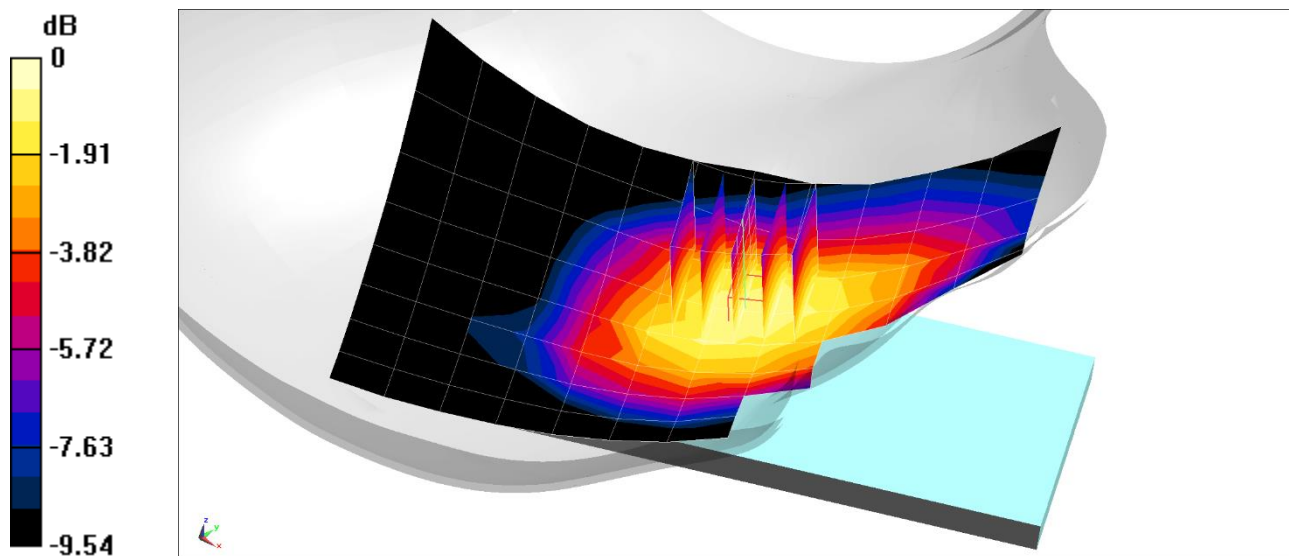

0 dB = 0.161 W/kg = -7.93 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0728M

Communication System: UID 0, NR Band n12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.872 \text{ S/m}$; $\epsilon_r = 42.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 12/14/2020; Ambient Temp: 22.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7308; ConvF(10.63, 10.63, 10.63) @ 707.5 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n12, Right Head, Cheek, 15 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 141500, 36 RB, 22 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.02 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.137 W/kg

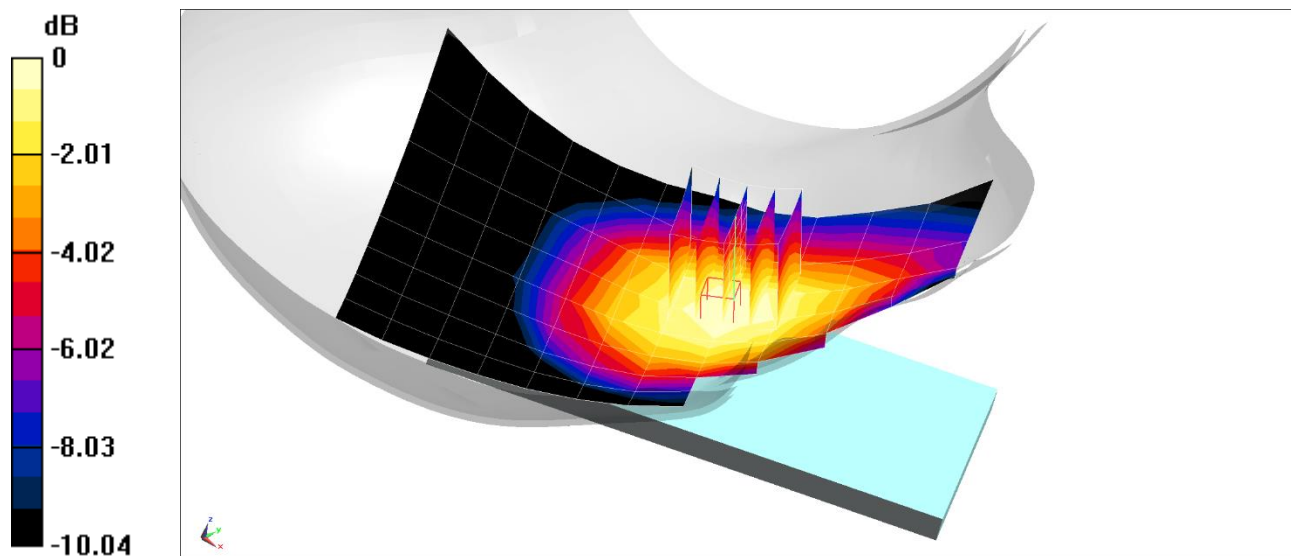

0 dB = 0.161 W/kg = -7.93 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0679M

Communication System: UID 0, NR Band n5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.785$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11/16/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 836.5 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n5, Right Head, Cheek, 20 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 167300, 1 RB, 104 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.192 W/kg

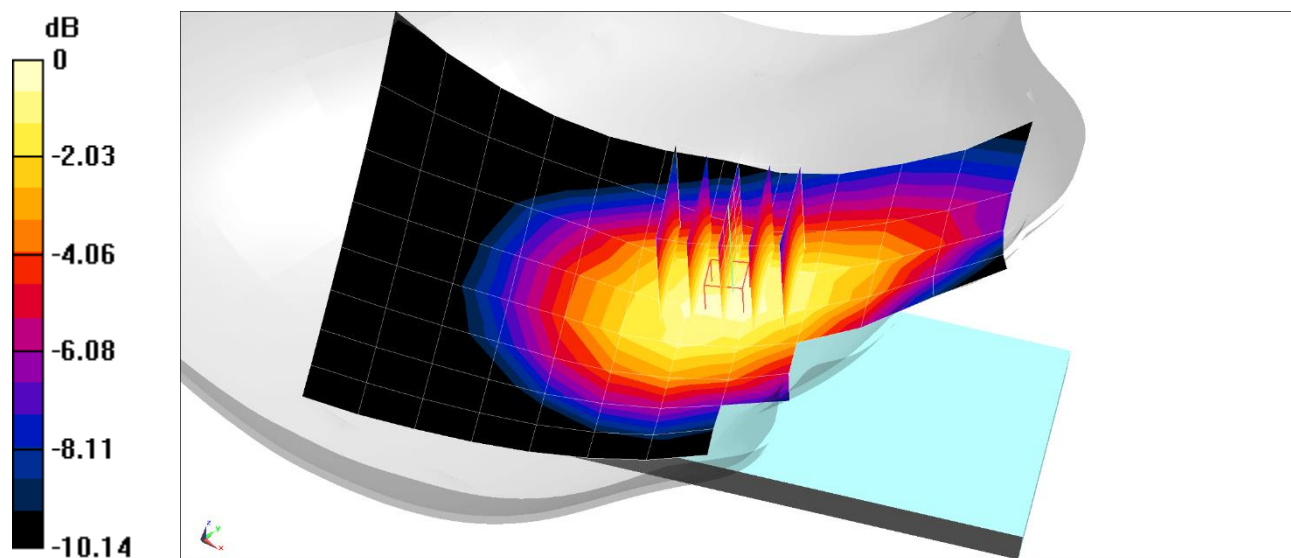

0 dB = 0.229 W/kg = -6.40 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0762M

Communication System: UID 0, NR Band n66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.364 \text{ S/m}$; $\epsilon_r = 38.176$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/10/2020; Ambient Temp: 23.0°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN3589; ConvF(7.55, 7.55, 7.55) @ 1745 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Antenna E, Right Head, Cheek, 40 MHz Bandwidth,
CP-OFDM QPSK, Ch. 349000, 1 RB, 1 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.588 W/kg

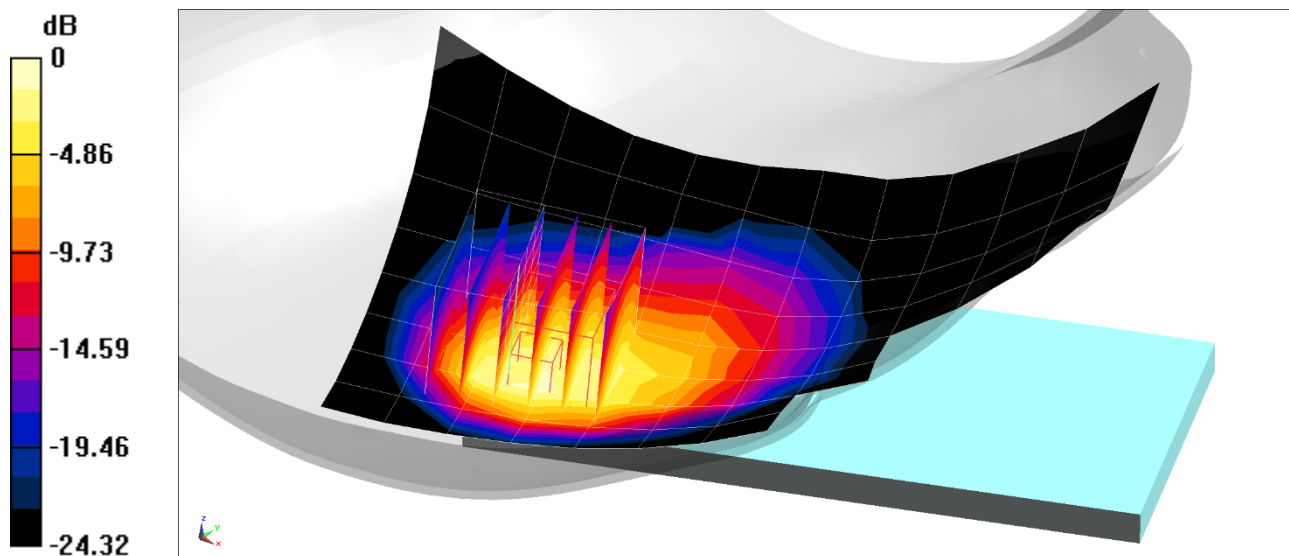

0 dB = 0.828 W/kg = -0.82 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0758M

Communication System: UID 0, NR Band n25; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.38 \text{ S/m}$; $\epsilon_r = 40.344$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 10/21/2020; Ambient Temp: 24.6°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1882.5 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n25, Antenna E, Right Head, Cheek, 40 MHz Bandwidth,
CP-OFDM QPSK, Ch. 376500, 1 RB, 1 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.84 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.431 W/kg

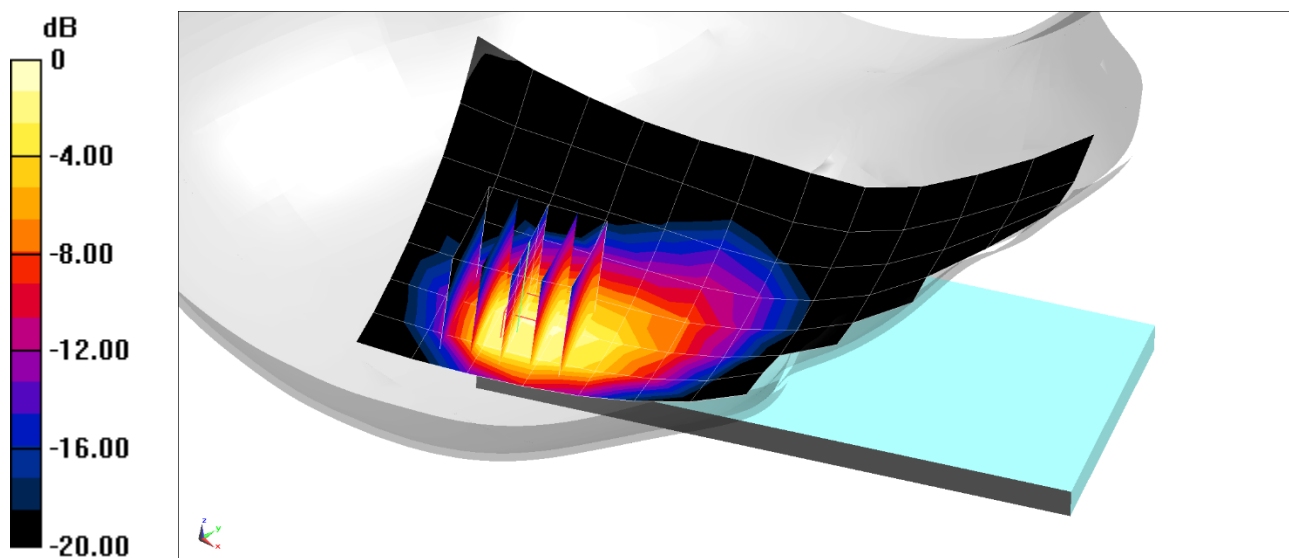

0 dB = 0.640 W/kg = -1.94 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0692M

Communication System: UID 0, NR Band n30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Head; Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.736 \text{ S/m}$; $\epsilon_r = 38.075$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10/25/2020; Ambient Temp: 23.2°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN3589; ConvF(7.11, 7.11, 7.11) @ 2310 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n30, Left Head, Cheek, 10 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 462000, 25 RB, 14 RB Offset**


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.972 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.055 W/kg

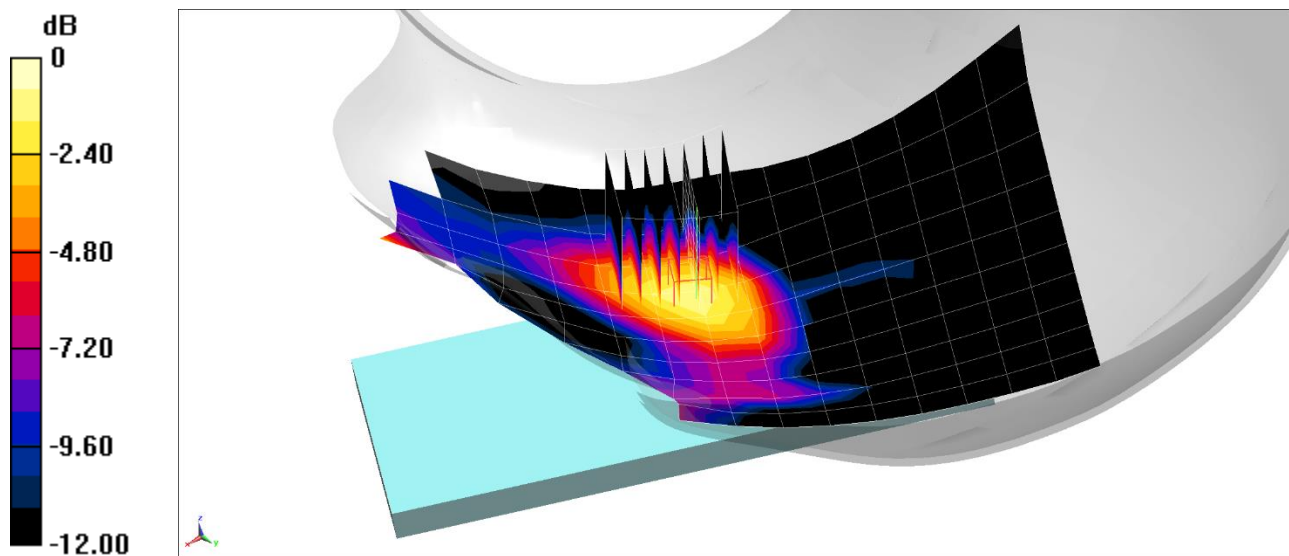

0 dB = 0.0814 W/kg = -10.89 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0702M

Communication System: UID 0, NR Band n41 Full DC; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: 2600 Head; Medium parameters used (interpolated):

$f = 2592.99$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 37.326$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11/11/2020; Ambient Temp: 22.7°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2592.99 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n41, Antenna E, Right Head, Tilt, 100 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 518598, 135 RB, 0 RB Offset**


Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.05 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.345 W/kg

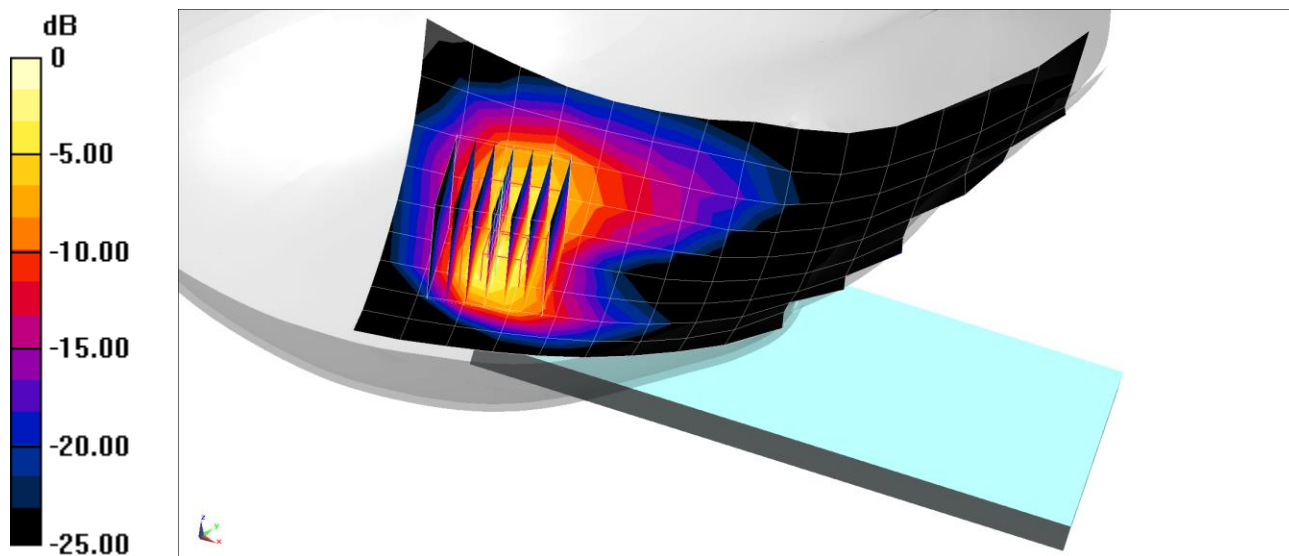

0 dB = 0.681 W/kg = -1.67 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 3921S

Communication System: UID 0, NR Band n77; Frequency: 3930 MHz; Duty Cycle: 1:1

Medium: 3600 Head; Medium parameters used:

$f = 3930 \text{ MHz}$; $\sigma = 3.232 \text{ S/m}$; $\epsilon_r = 36.149$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11/23/2020; Ambient Temp: 21.4°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7539; ConvF(6.23, 6.23, 6.23) @ 3930 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0 (20); Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n77, Right Head, Cheek, Ch. 662000, 100 MHz Bandwidth,
CP-OFDM QPSK, 1 RB, 1 RB Offset**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x8x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 10.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.281 W/kg

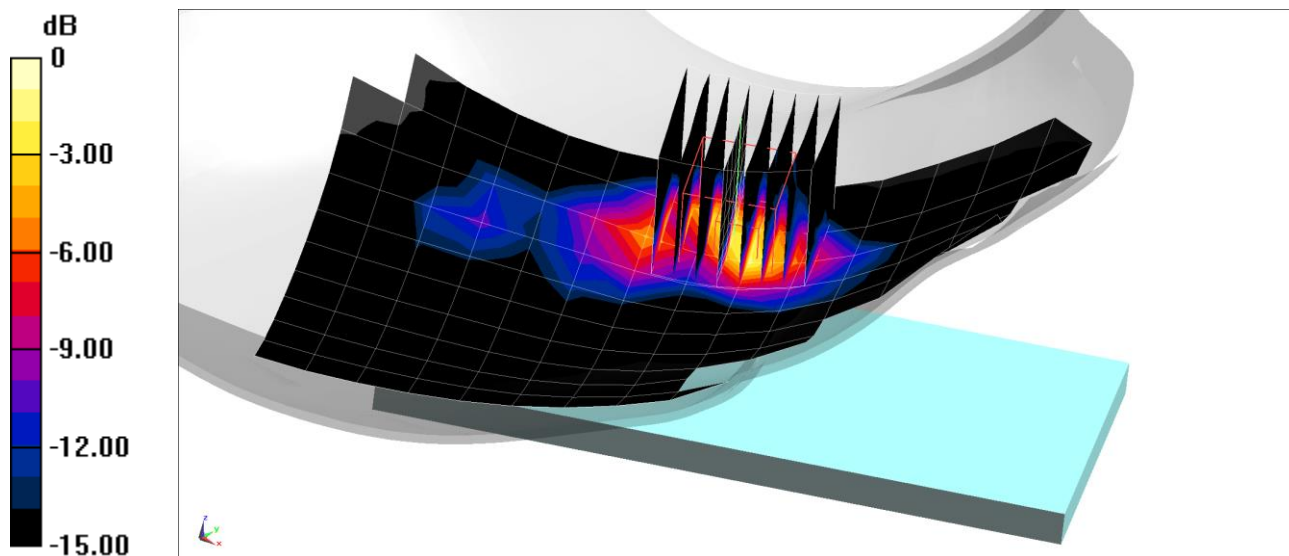

0 dB = 0.557 W/kg = -2.54 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0061M

Communication System: UID 0, IEEE 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.838 \text{ S/m}$; $\epsilon_r = 39.843$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11/23/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2462 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11n, MIMO, 20 MHz Bandwidth, Left Head, Cheek, Ch 11, 13 Mbps


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.431 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.889 W/kg

SAR(1 g) = 0.331 W/kg

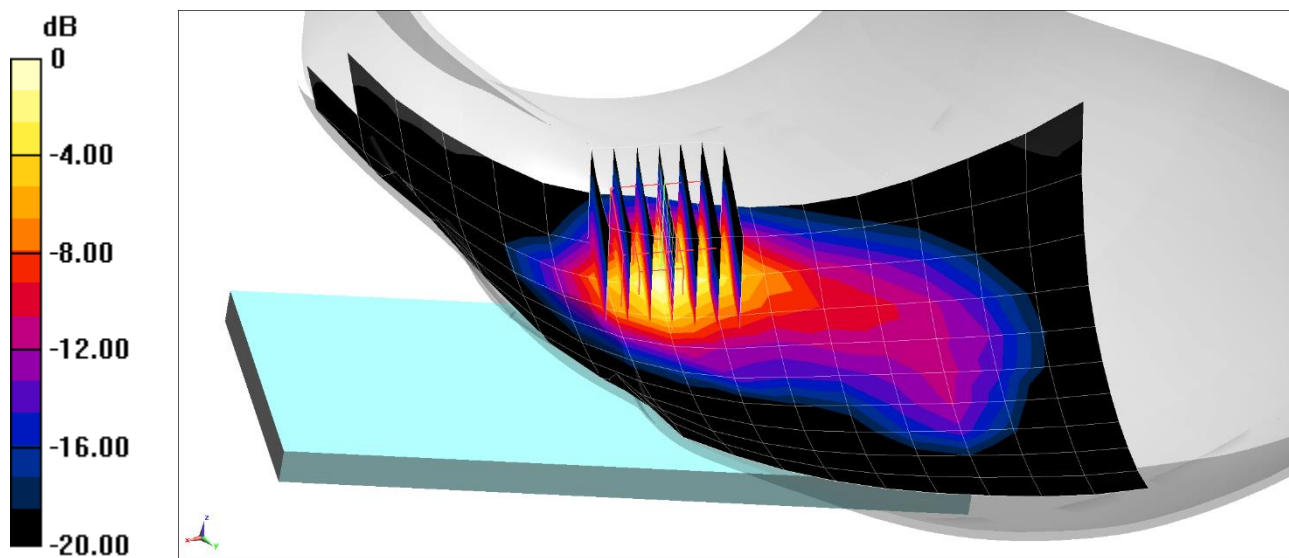

0 dB = 0.619 W/kg = -2.08 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0080M

Communication System: UID 0, IEEE 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head; Medium parameters used:

$f = 5290$ MHz; $\sigma = 4.641$ S/m; $\epsilon_r = 35.278$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 10/26/2020; Ambient Temp: 23.4°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7357; ConvF(5.5, 5.5, 5.5) @ 5290 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11ac, MIMO, U-NII-2A, 80 MHz Bandwidth,
Left Head, Cheek, Ch 58, 58.5 Mbps**


Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 1.425 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.111 W/kg

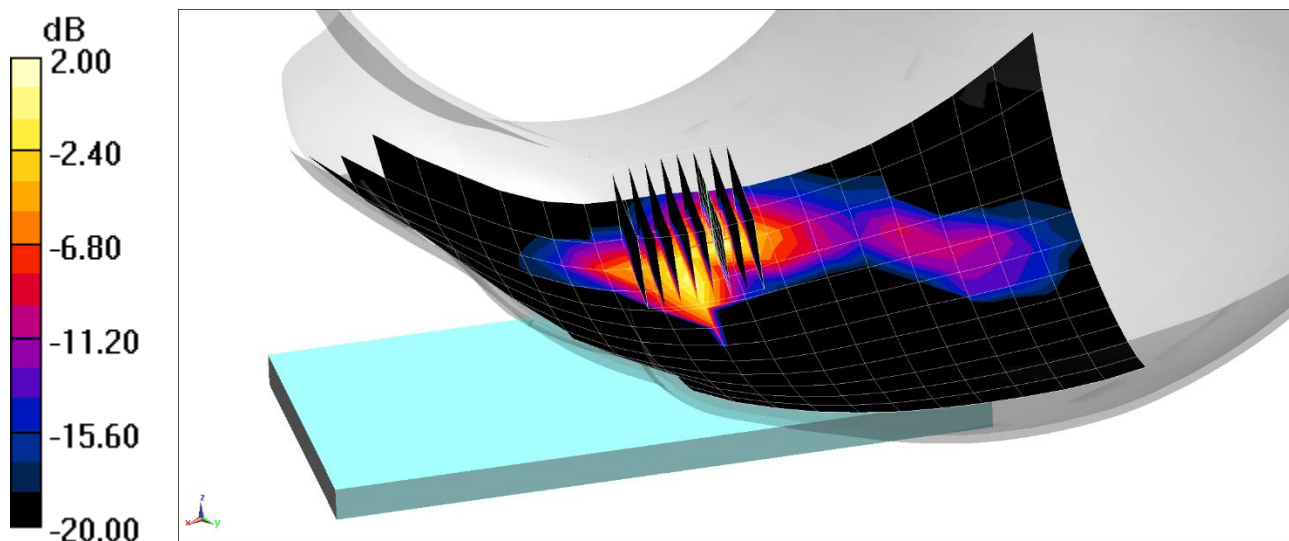

0 dB = 0.321 W/kg = -4.93 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0080M

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.847 \text{ S/m}$; $\epsilon_r = 37.394$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11/05/2020; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2441 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Antenna 2, Left Head, Cheek, Ch 39, 1 Mbps


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.190 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.085 W/kg

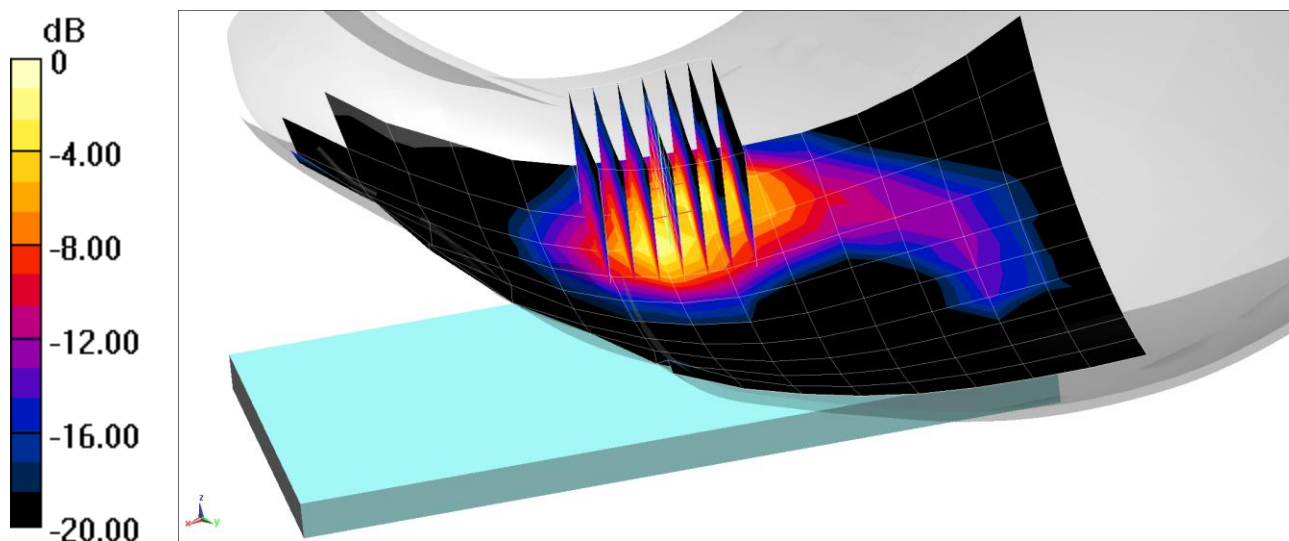

0 dB = 0.156 W/kg = -8.07 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 54.261$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/21/2020; Ambient Temp: 23.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 820.1 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.77 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.244 W/kg

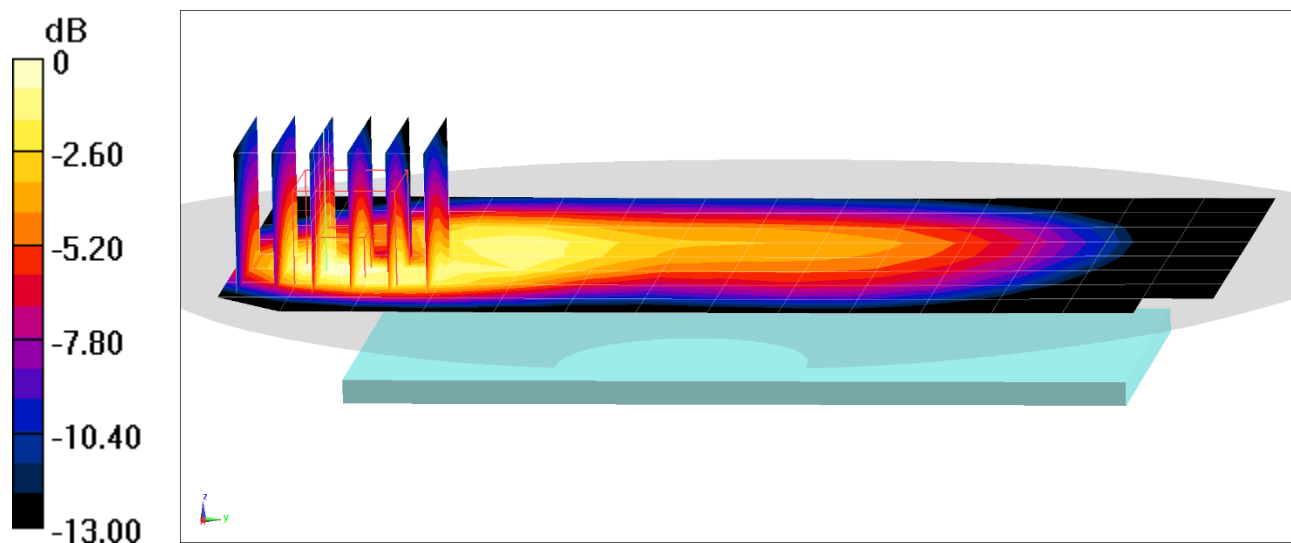

0 dB = 0.331 W/kg = -4.80 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 54.261$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/21/2020; Ambient Temp: 23.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 820.1 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. EVDO Rev. 0, BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.04 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.506 W/kg

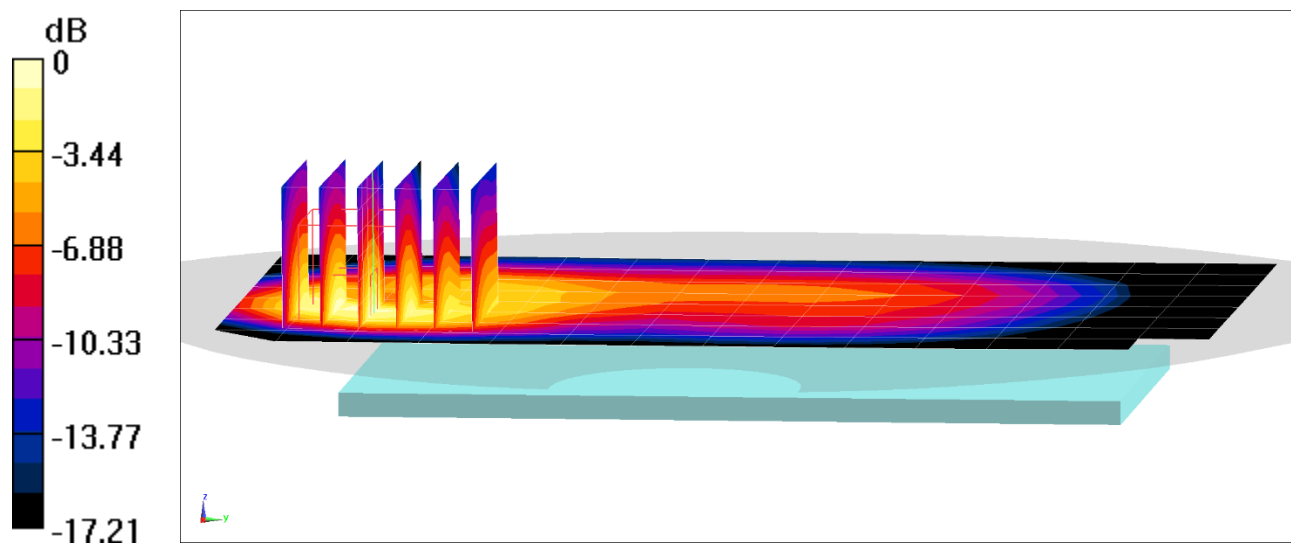

0 dB = 0.725 W/kg = -1.40 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 54.112$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/21/2020; Ambient Temp: 23.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.52 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA, BC0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.90 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.252 W/kg

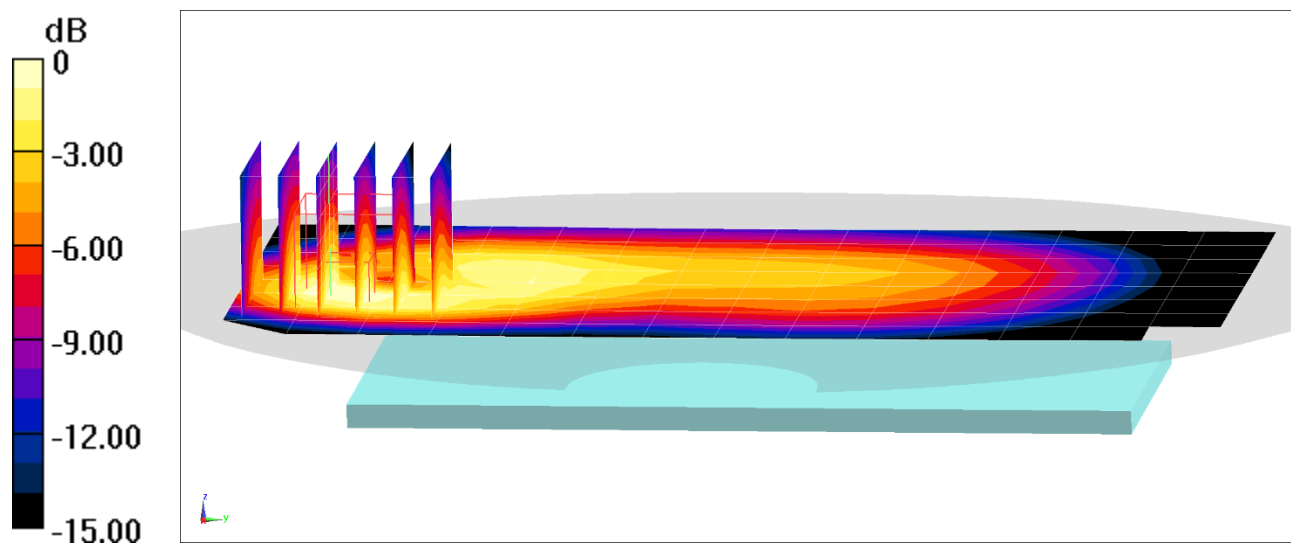

0 dB = 0.342 W/kg = -4.66 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 848.31$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 53.991$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/21/2020; Ambient Temp: 23.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 848.31 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. EVDO Rev.0, BC0, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.20 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.560 W/kg

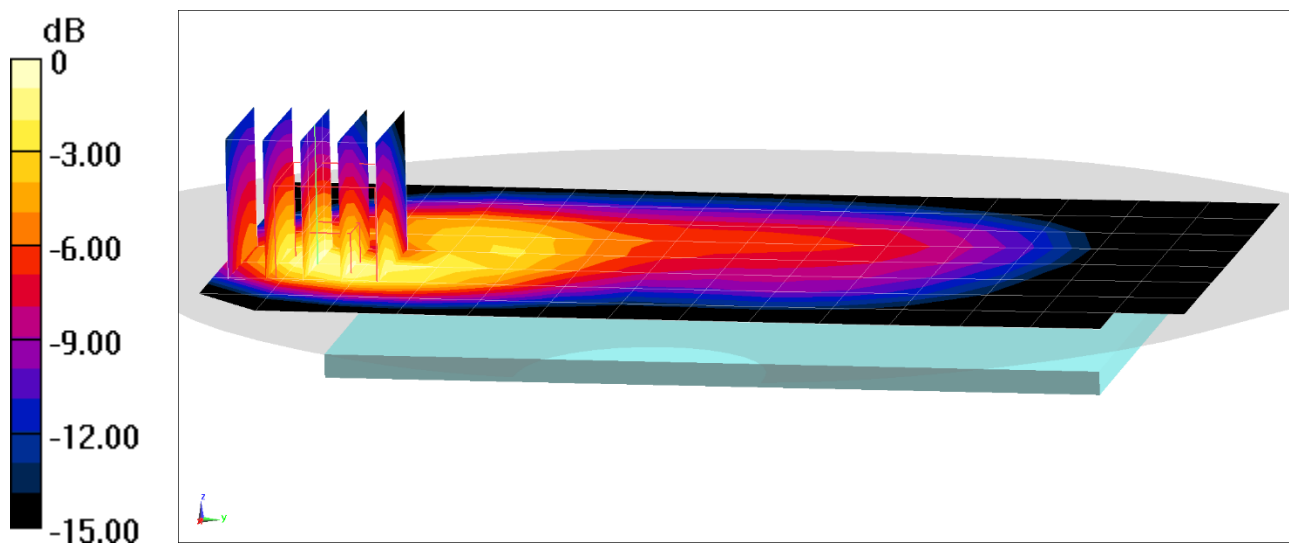

0 dB = 0.804 W/kg = -0.95 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0691M

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ S/m}$; $\epsilon_r = 52.876$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/18/2020; Ambient Temp: 23.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.86 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.413 W/kg

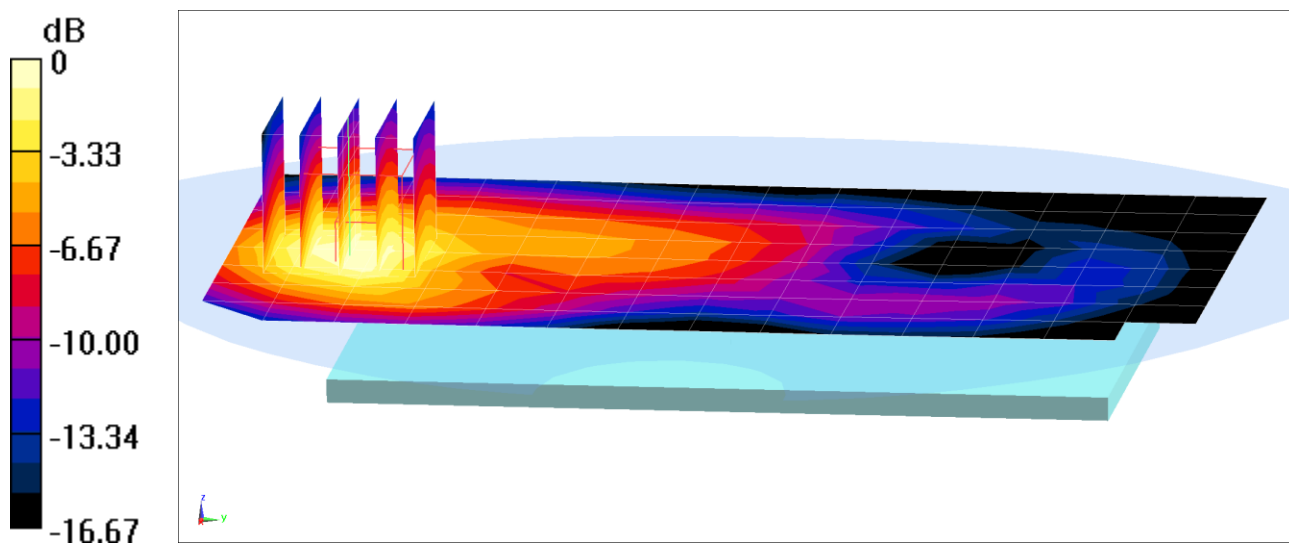

0 dB = 0.561 W/kg = -2.51 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0691M

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75$ MHz; $\sigma = 1.571$ S/m; $\epsilon_r = 52.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/18/2020; Ambient Temp: 23.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1908.75 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev.0, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.53 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.977 W/kg

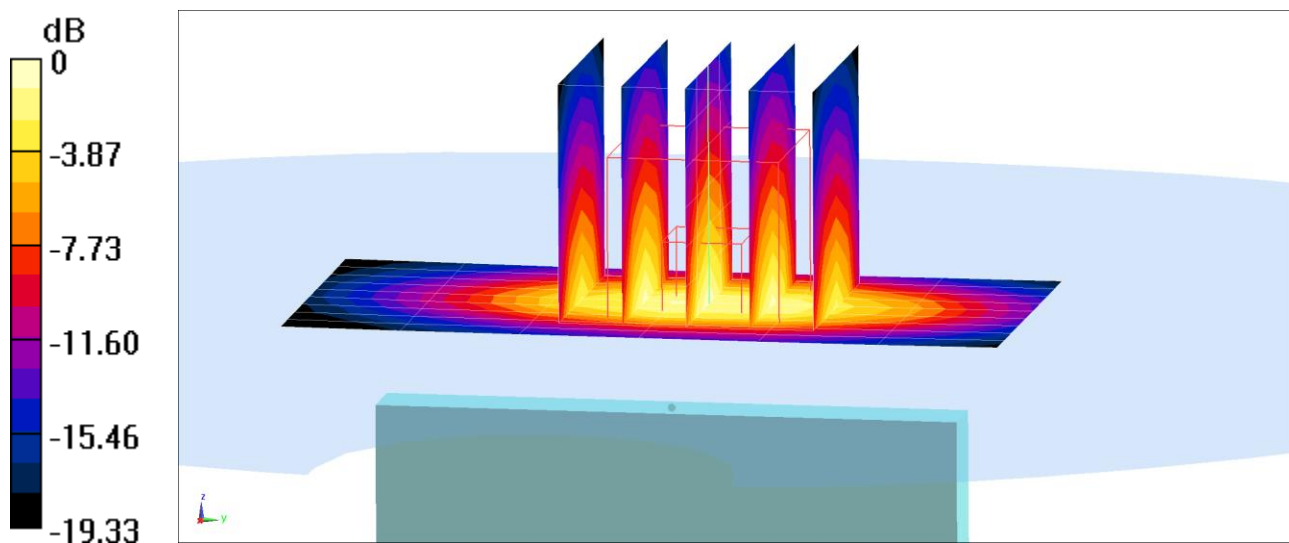

0 dB = 1.51 W/kg = 1.79 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0724M

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 54.706$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11/09/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 836.6 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.131 W/kg

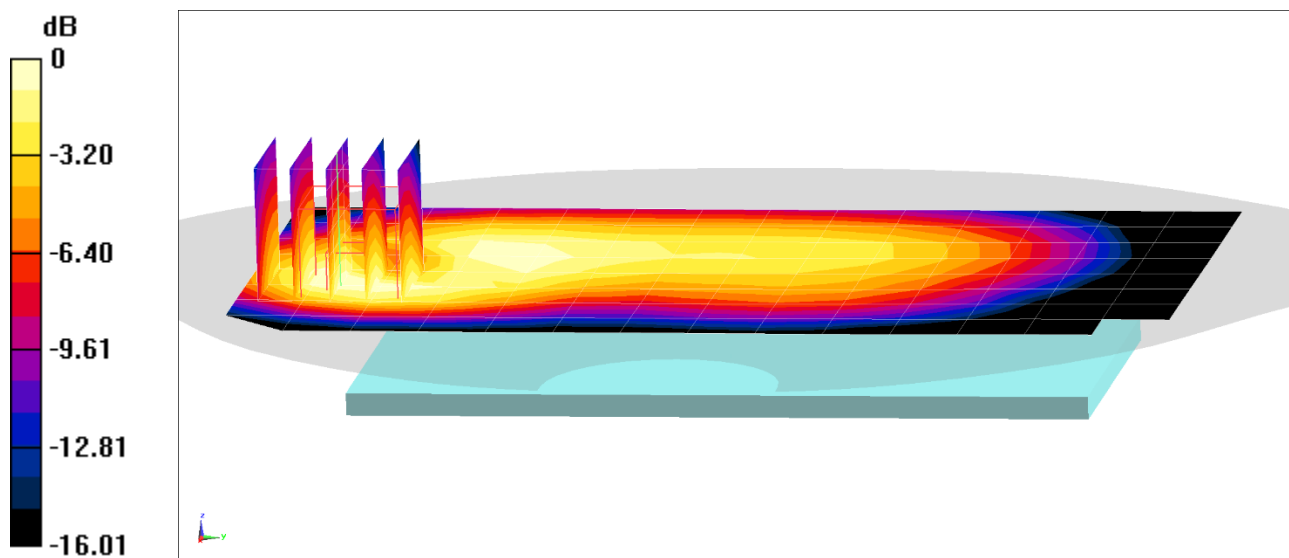

0 dB = 0.181 W/kg = -7.42 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0724M

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 54.706$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/09/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 836.6 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.61 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.426 W/kg

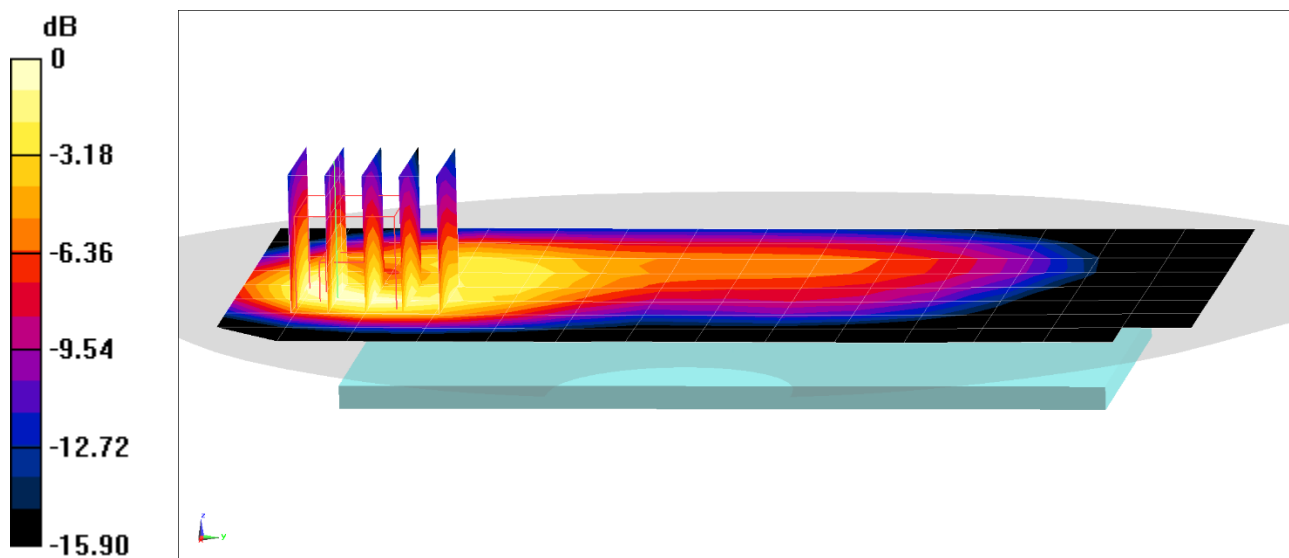

0 dB = 0.604 W/kg = -2.19 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.554 \text{ S/m}$; $\epsilon_r = 51.733$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/05/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7357; ConvF(7.8, 7.8, 7.8) @ 1880 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.26 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.220 W/kg

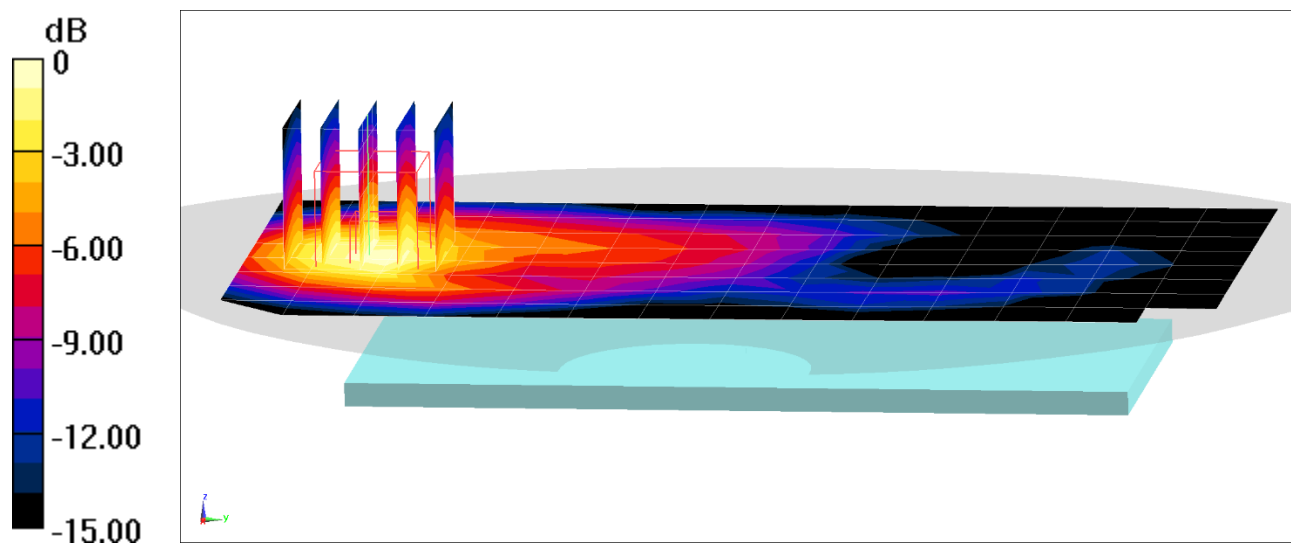

0 dB = 0.300 W/kg = -5.23 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1850.2$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 51.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/08/2020; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7357; ConvF(7.8, 7.8, 7.8) @ 1850.2 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 1900, Body SAR, Bottom Edge, Low.ch, 4 Tx Slots


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.723 W/kg

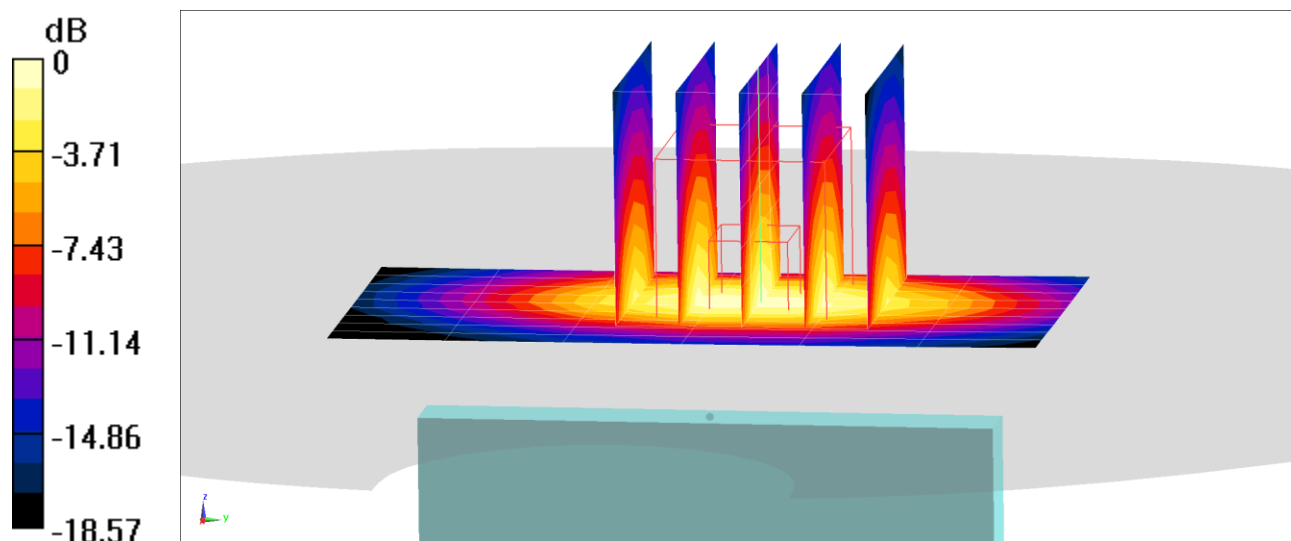

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.944 \text{ S/m}$; $\epsilon_r = 52.646$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/14/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.42 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.241 W/kg

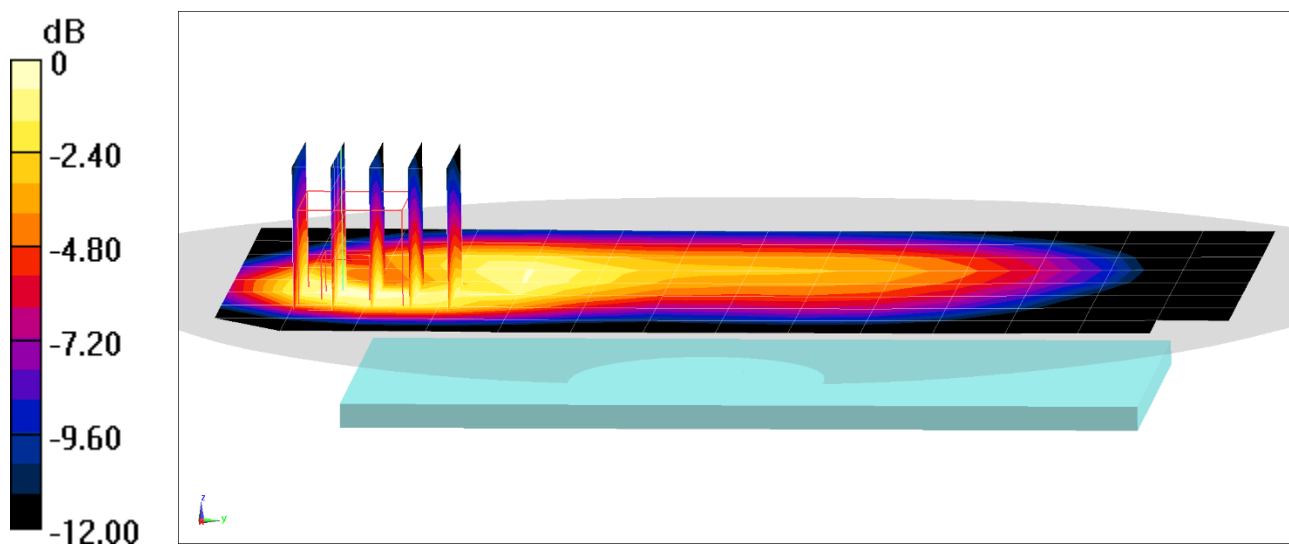

0 dB = 0.323 W/kg = -4.91 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0735M

Communication System: UID 0, UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 846.6 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 52.539$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/14/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 846.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.26 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.591 W/kg

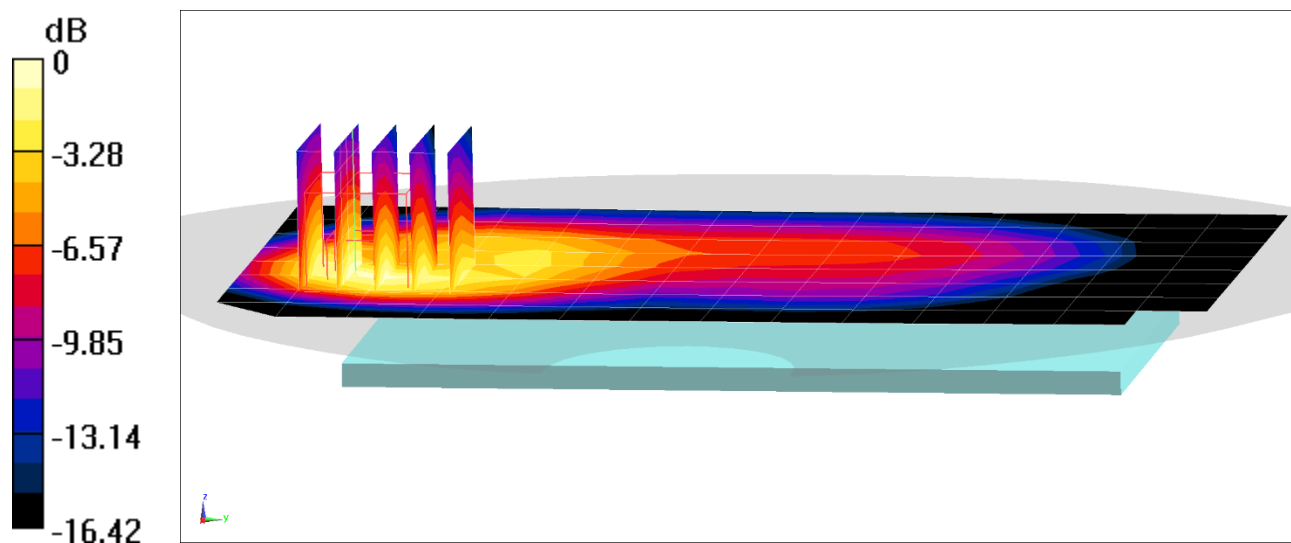

0 dB = 0.835 W/kg = -0.78 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1752.6$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.418$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/29/2020; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7538; ConvF(8.38, 8.38, 8.38) @ 1752.6 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.55 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.653 W/kg

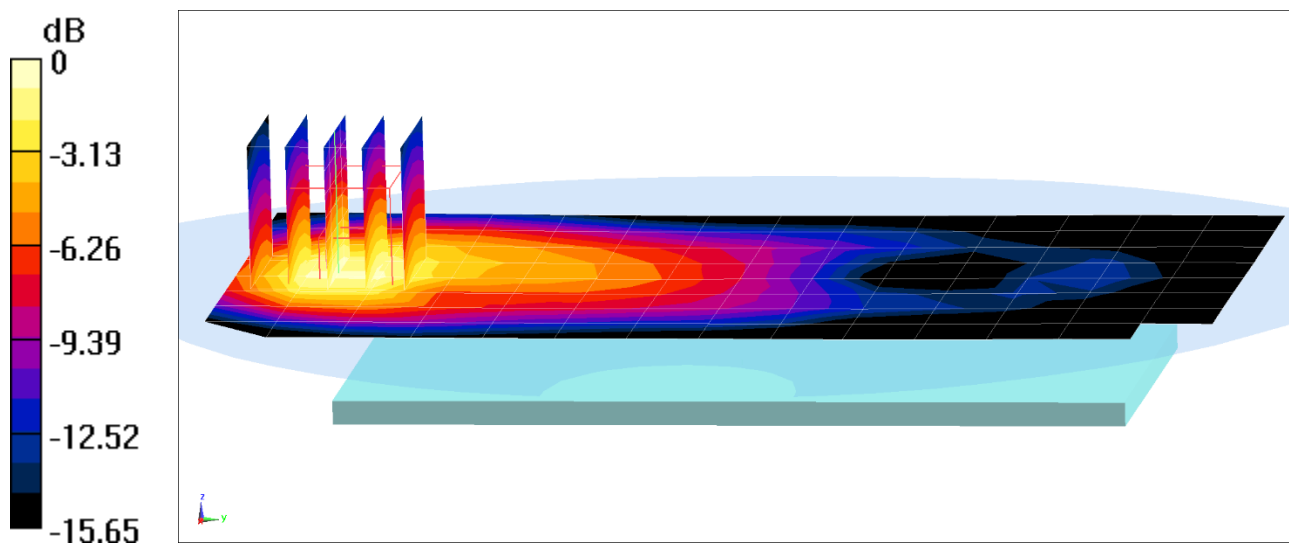

0 dB = 0.912 W/kg = -0.40 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0737M

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1752.6$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 52.391$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/02/2020; Ambient Temp: 22.1°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7538; ConvF(8.38, 8.38, 8.38) @ 1752.6 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.896 W/kg

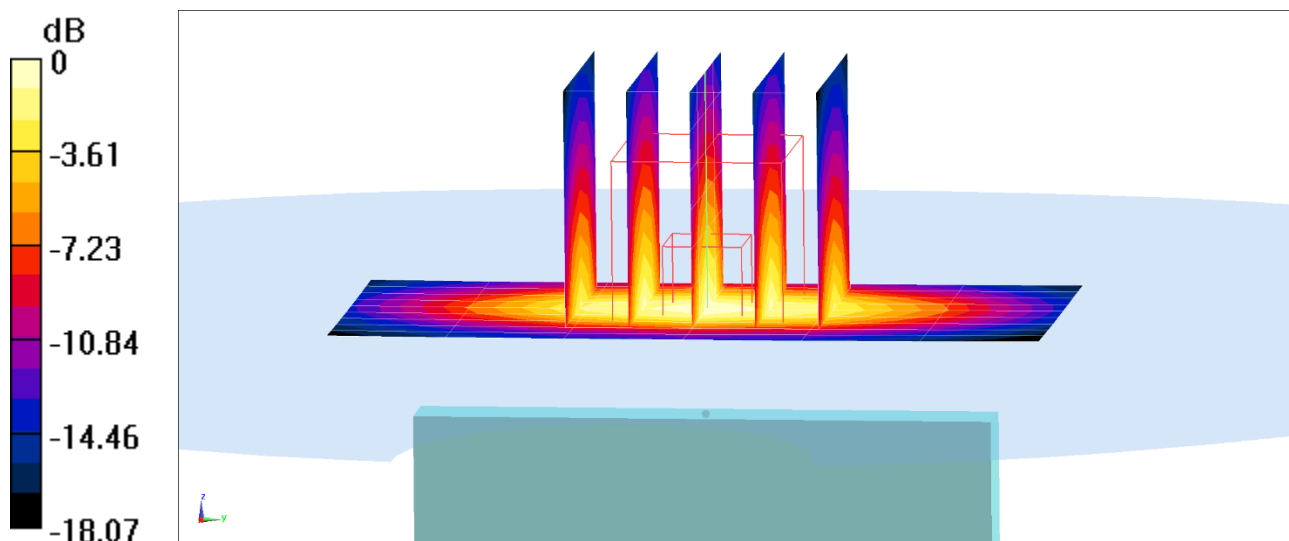

0 dB = 1.35 W/kg = 1.30 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0691M

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.518 \text{ S/m}$; $\epsilon_r = 53.82$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/11/2020; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.18 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.415 W/kg

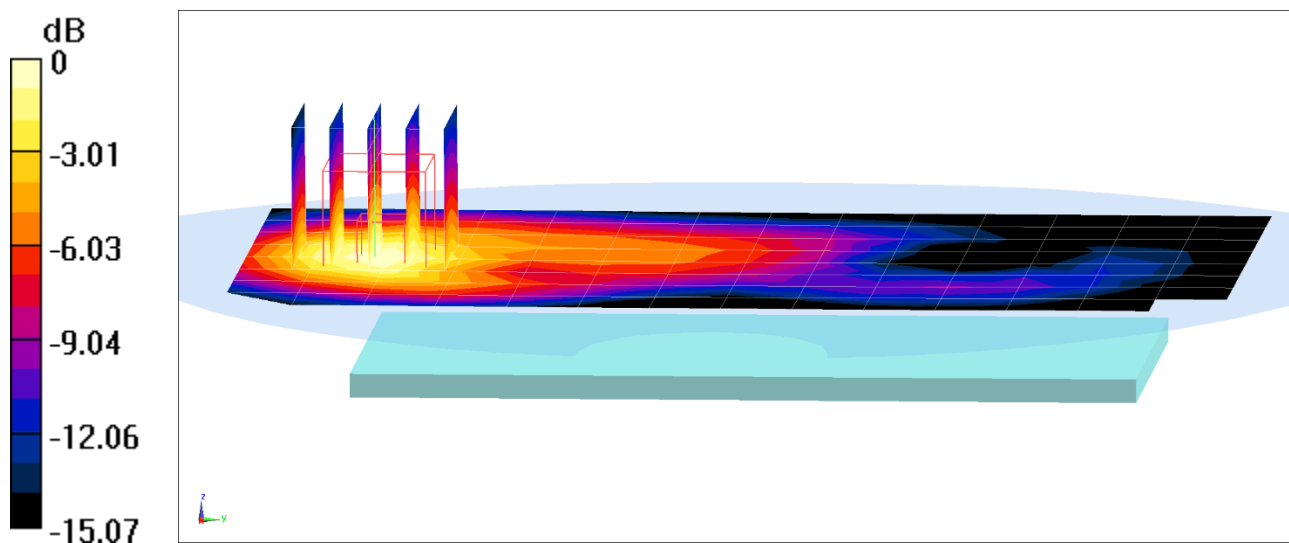

0 dB = 0.572 W/kg = -2.43 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0691M

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1907.6$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 53.726$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/11/2020; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1907.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.35 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.952 W/kg

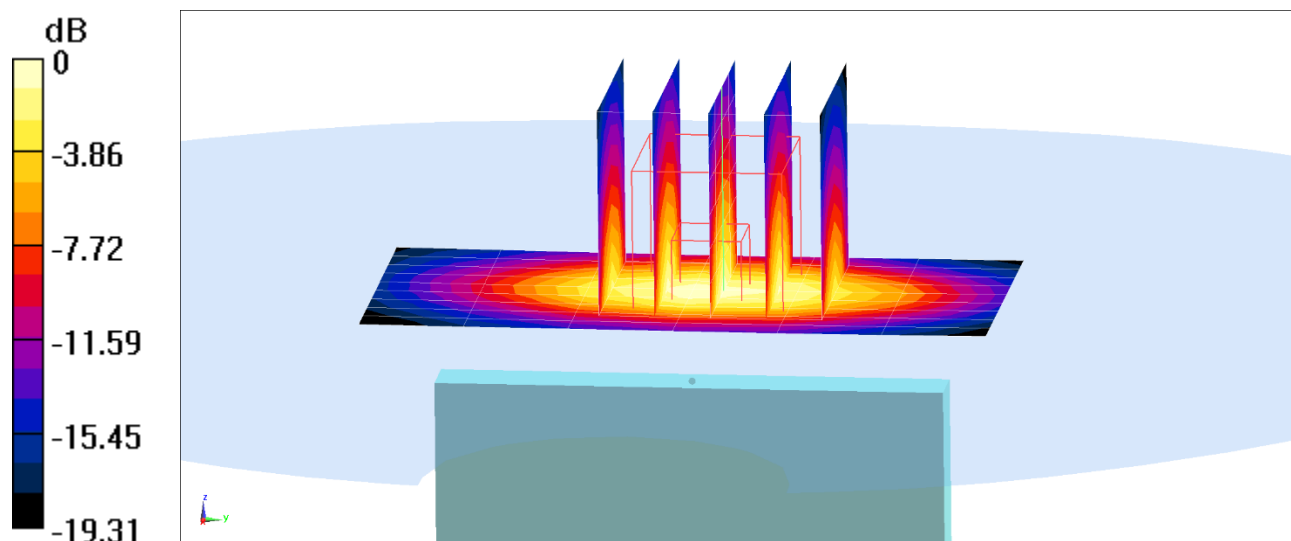

0 dB = 1.45 W/kg = 1.61 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 53.485$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/10/2020; Ambient Temp: 22.8°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 680.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.55 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.214 W/kg

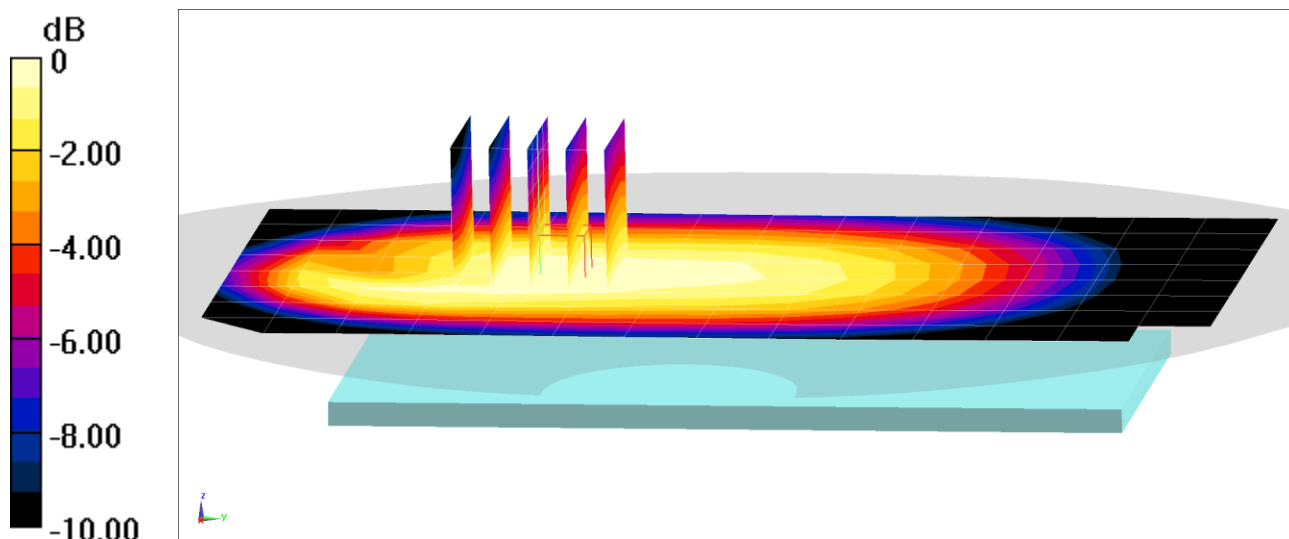

0 dB = 0.260 W/kg = -5.85 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 53.485$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/10/2020; Ambient Temp: 22.8°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 680.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.23 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.330 W/kg

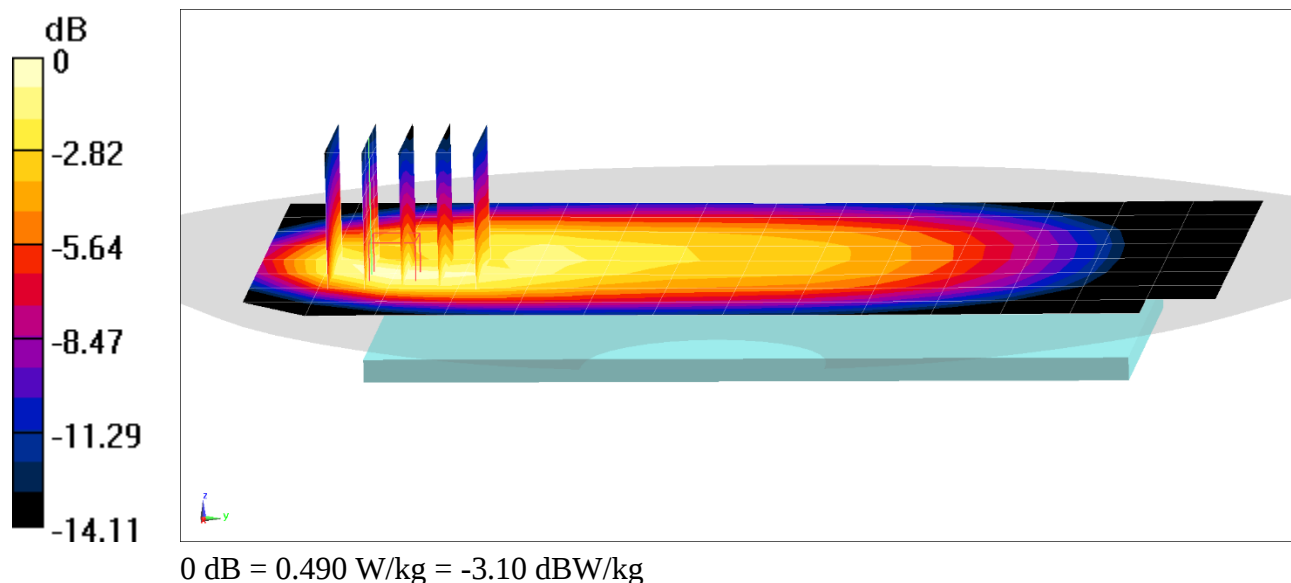

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.952 \text{ S/m}$; $\epsilon_r = 53.881$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/08/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 707.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.19 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.212 W/kg

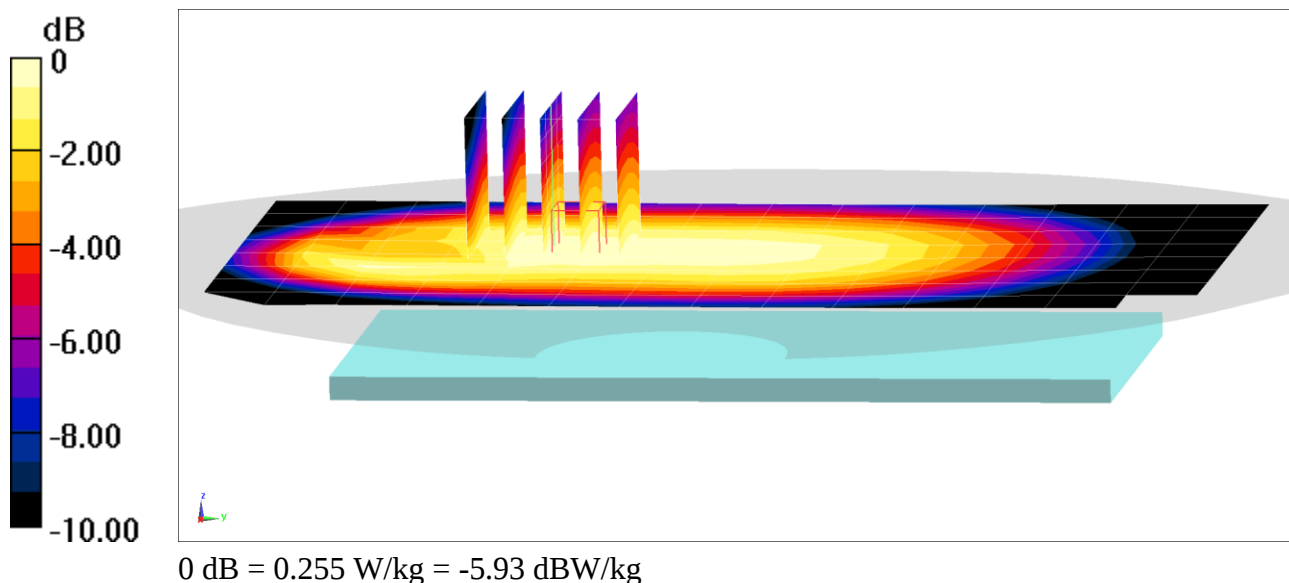

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 53.881$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/08/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 707.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.11 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.361 W/kg

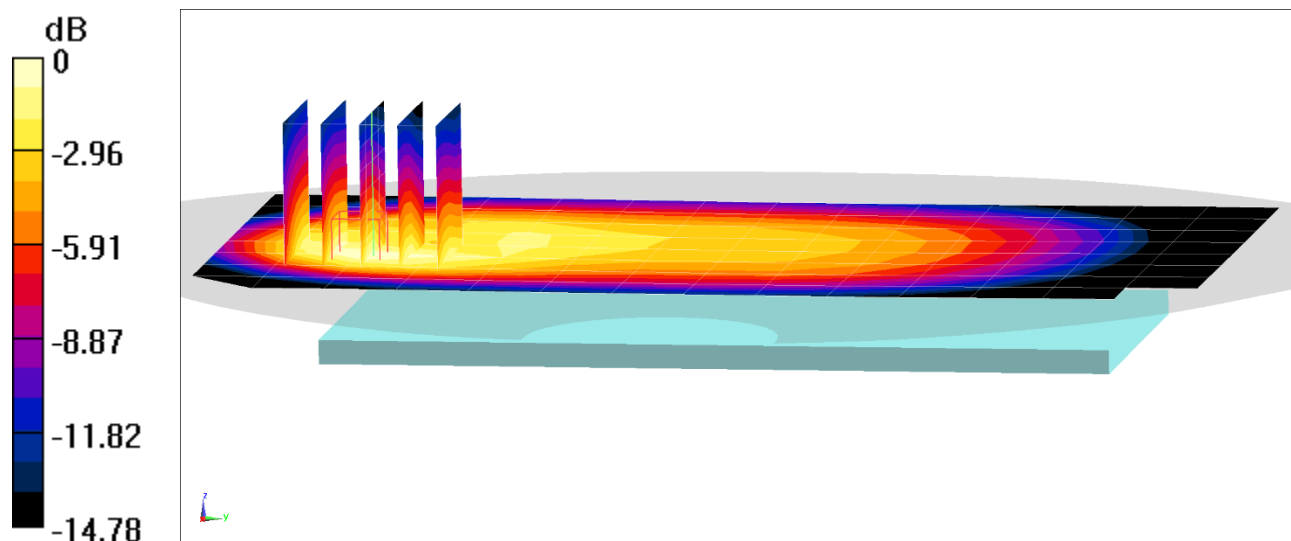

0 dB = 0.534 W/kg = -2.72 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 53.713$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/08/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 782 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.68 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.225 W/kg

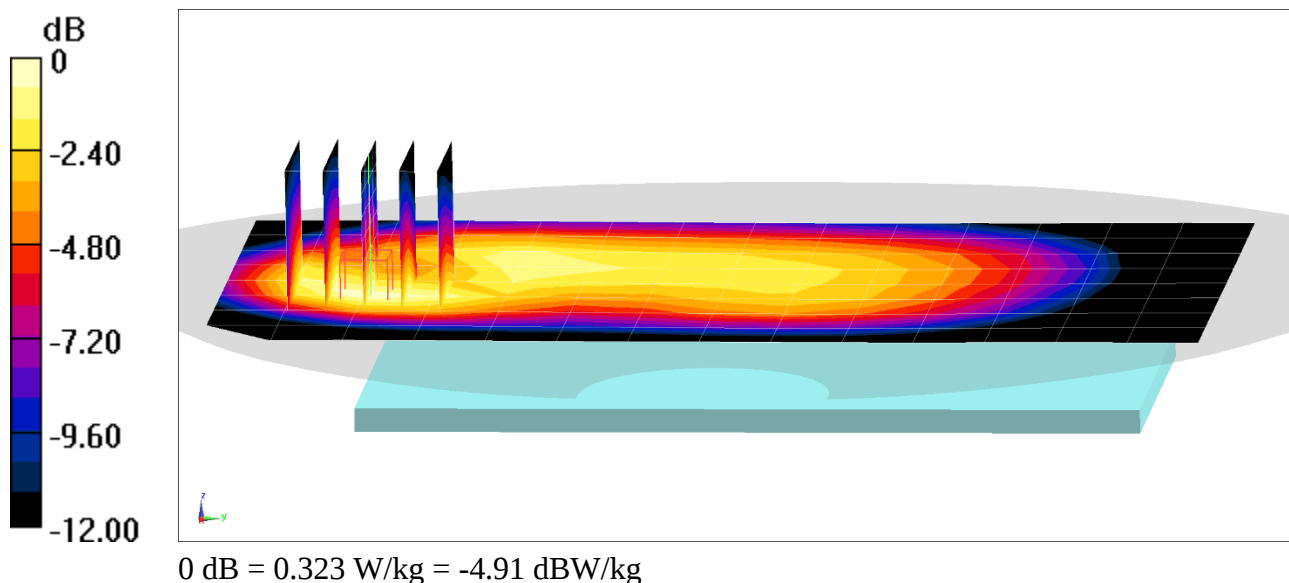

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 53.713$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/08/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 782 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.99 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.473 W/kg

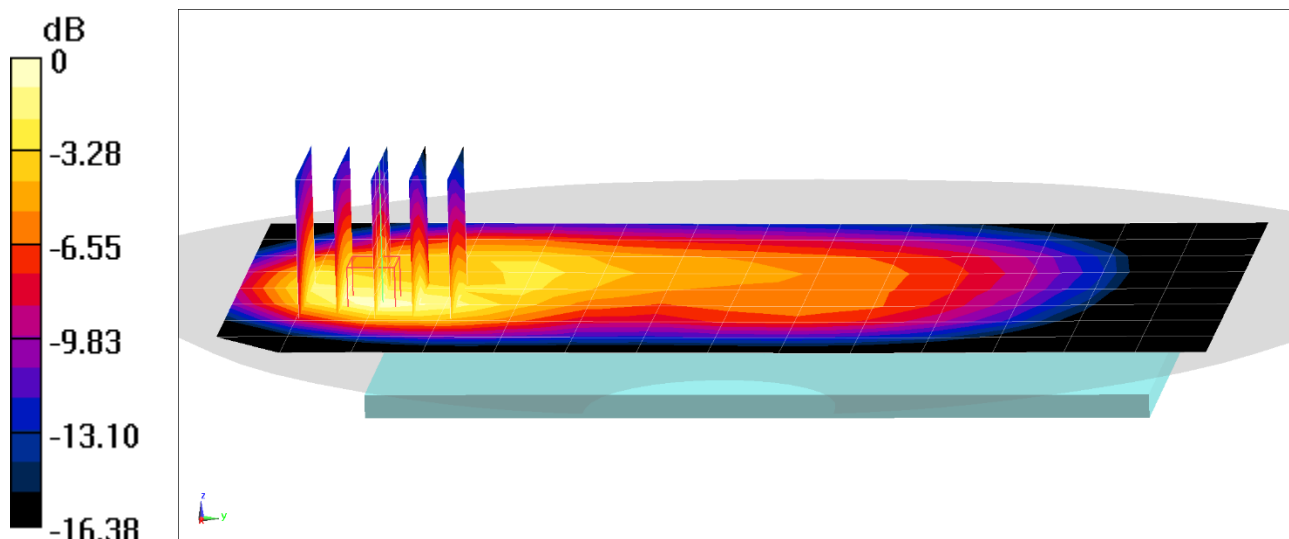

0 dB = 0.708 W/kg = -1.50 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 53.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 793 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 14, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.40 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.252 W/kg

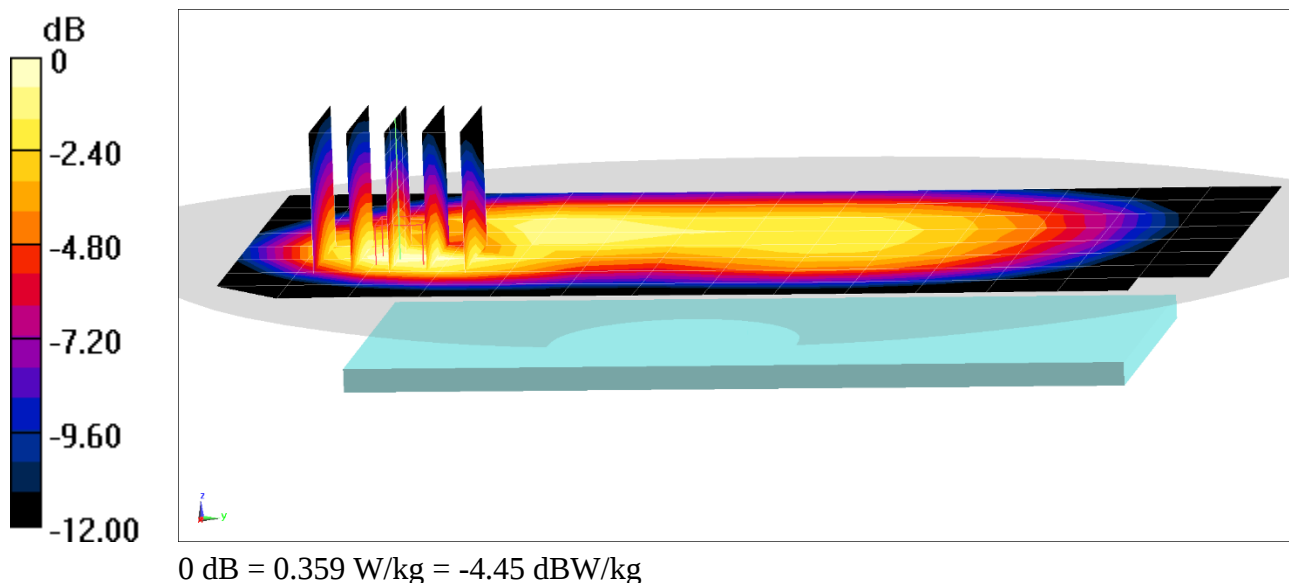

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0693M

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 53.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 793 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 14, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.39 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.986 W/kg

SAR(1 g) = 0.553 W/kg

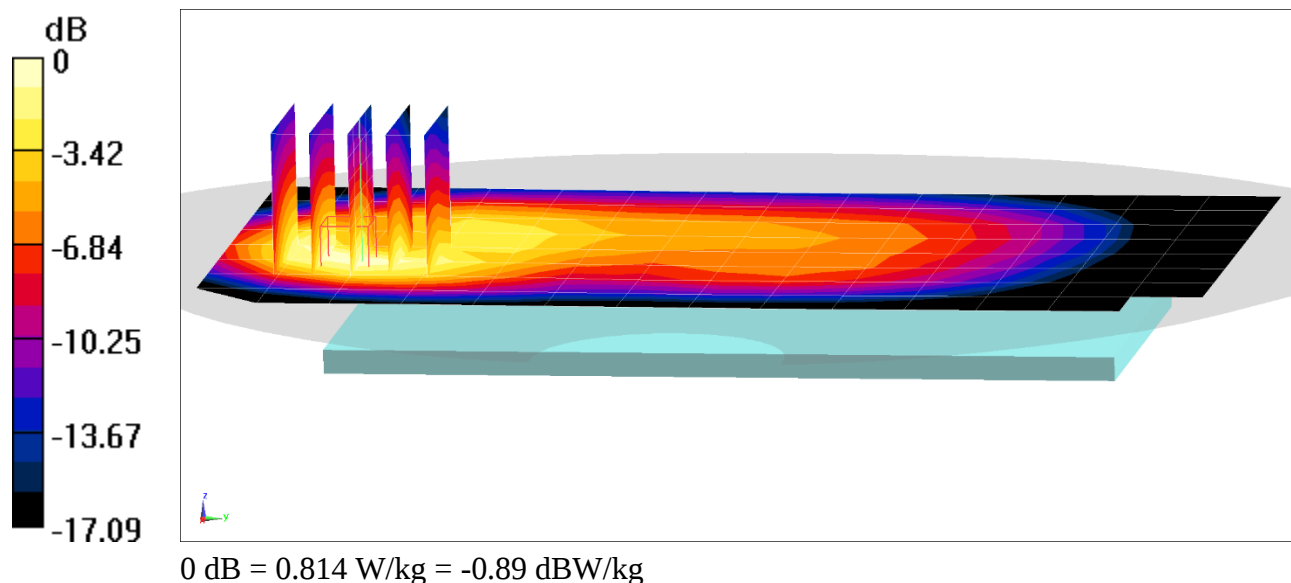

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0715M

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 54.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/19/2020; Ambient Temp: 21.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 831.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.86 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.228 W/kg

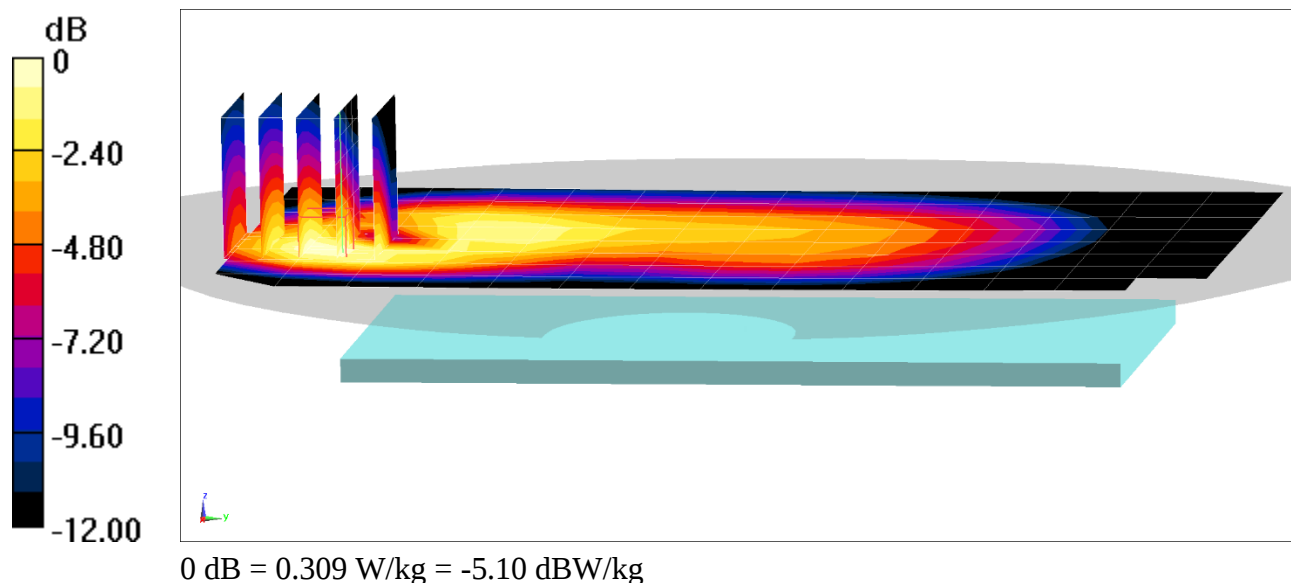

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0715M

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 54.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/19/2020; Ambient Temp: 21.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 831.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.49 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.474 W/kg

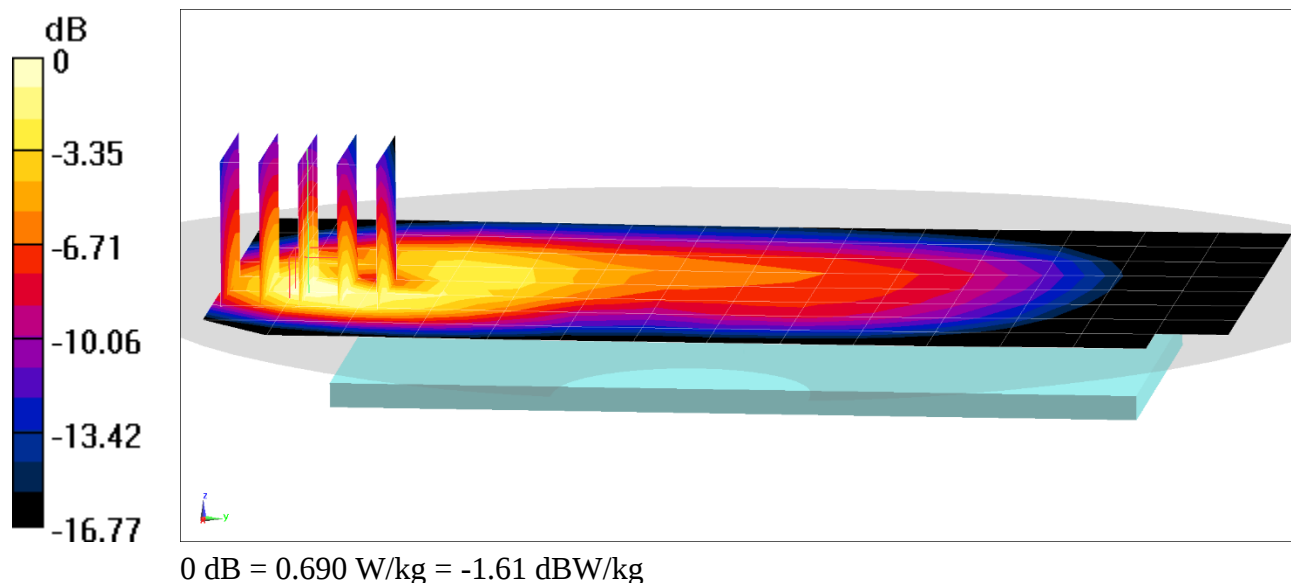

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0714M

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 54.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/21/2020; Ambient Temp: 23.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 5 (Cell.), ULCA, Body SAR, Back side,

PCC: Ch. 20525, 10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset

SCC: Ch. 20597, 5 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.27 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.274 W/kg

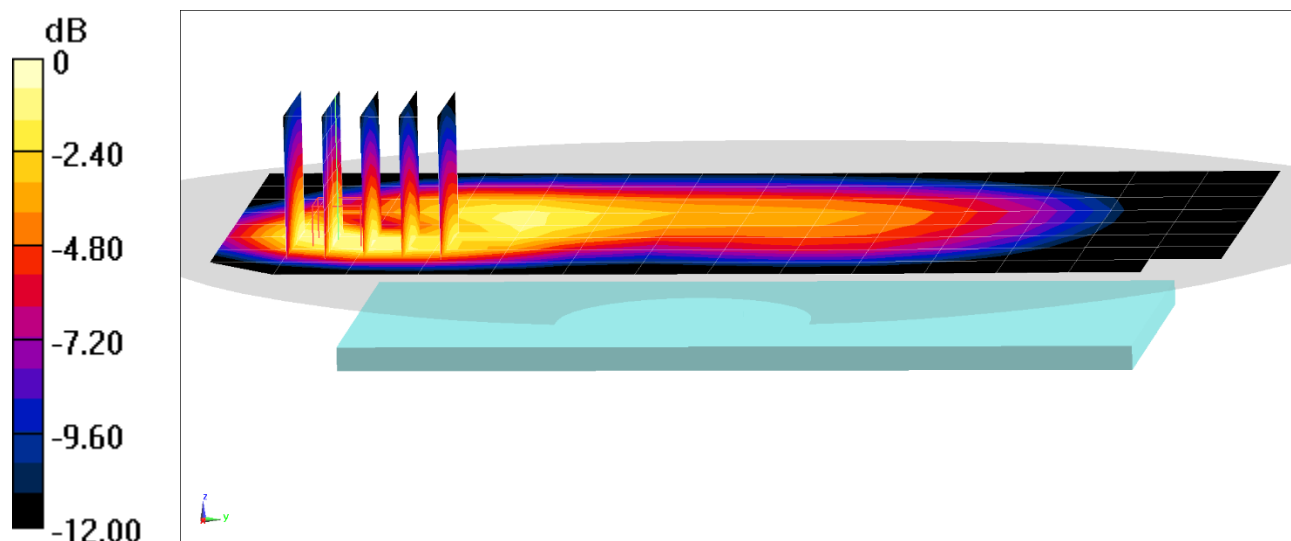

0 dB = 0.375 W/kg = -4.26 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0714M

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 54.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/21/2020; Ambient Temp: 23.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 5 (Cell.), ULCA, Body SAR, Back side,

PCC: Ch. 20525, 10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset

SCC: Ch. 20597, 5 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.38 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.603 W/kg

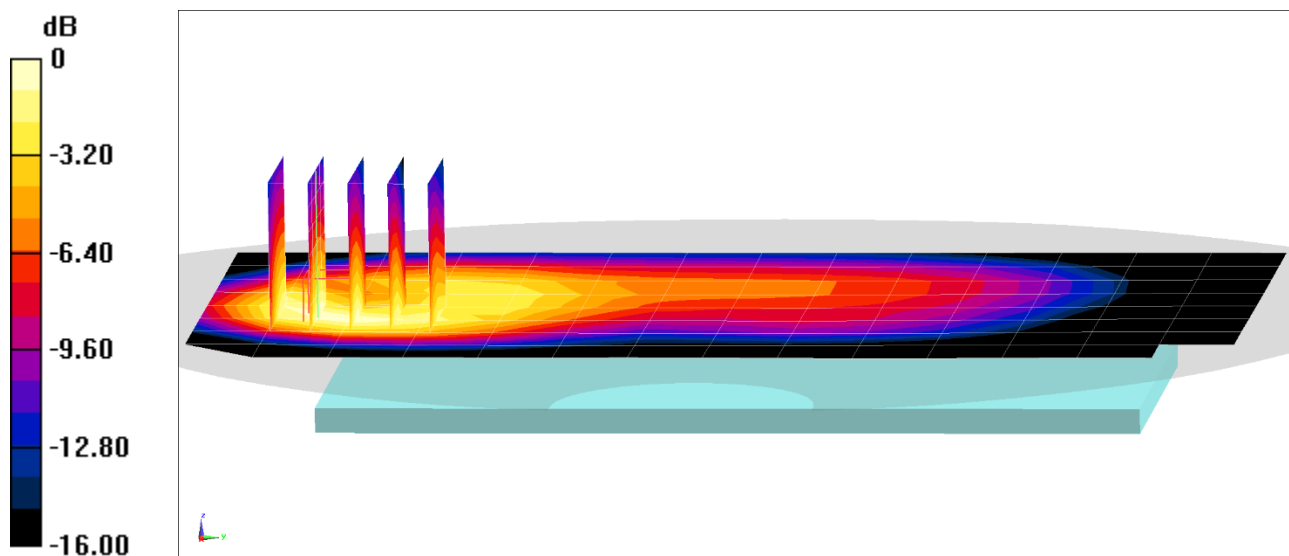

0 dB = 0.828 W/kg = -0.82 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0683M

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.545 \text{ S/m}$; $\epsilon_r = 52.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/07/2020; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7538; ConvF(8.38, 8.38, 8.38) @ 1770 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), CA_66C ULCA, Body SAR, Back side,

PCC: Ch. 132572, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch. 132374, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.09 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.765 W/kg

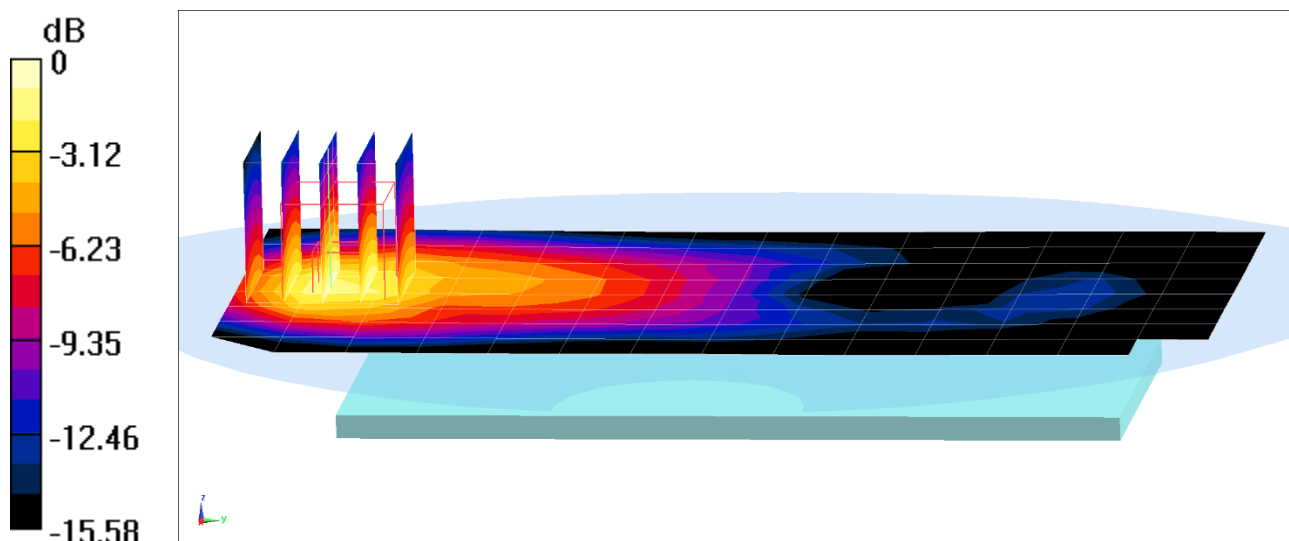

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0683M

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.545 \text{ S/m}$; $\epsilon_r = 52.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/07/2020; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7538; ConvF(8.38, 8.38, 8.38) @ 1770 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), CA_66C ULCA, Body SAR, Bottom Edge,

PCC: Ch. 132572, 20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset

SCC: Ch. 132374, 20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset


Area Scan (11x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.10 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.07 W/kg

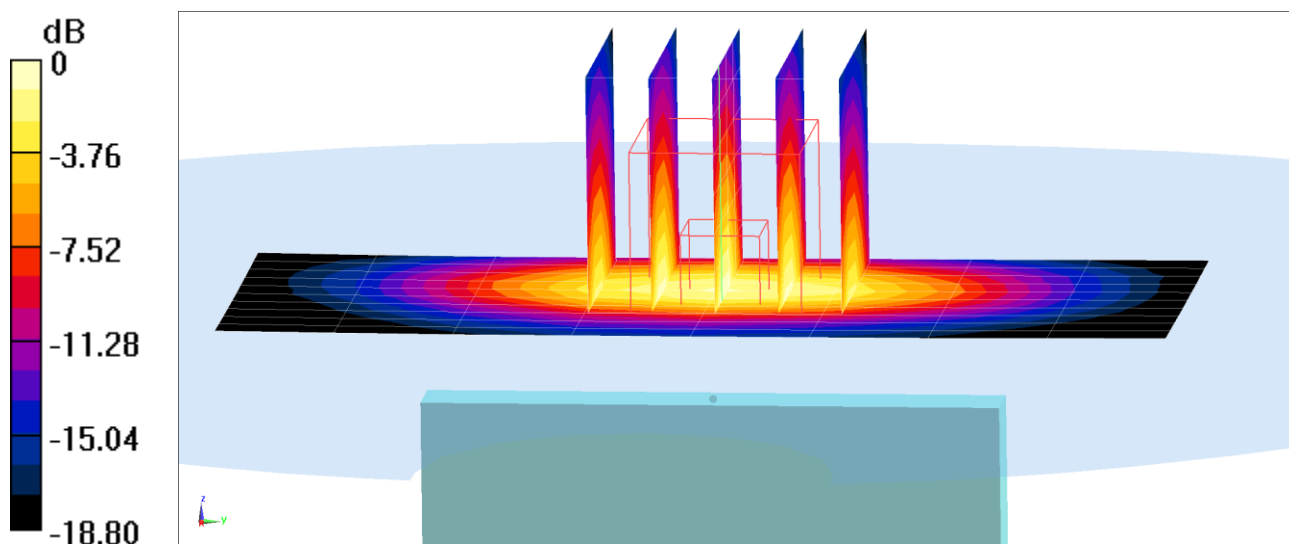

0 dB = 1.47 W/kg = 1.67 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0709M

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.52 \text{ S/m}$; $\epsilon_r = 52.689$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11/02/2020; Ambient Temp: 23.9°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1860 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.35 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.581 W/kg

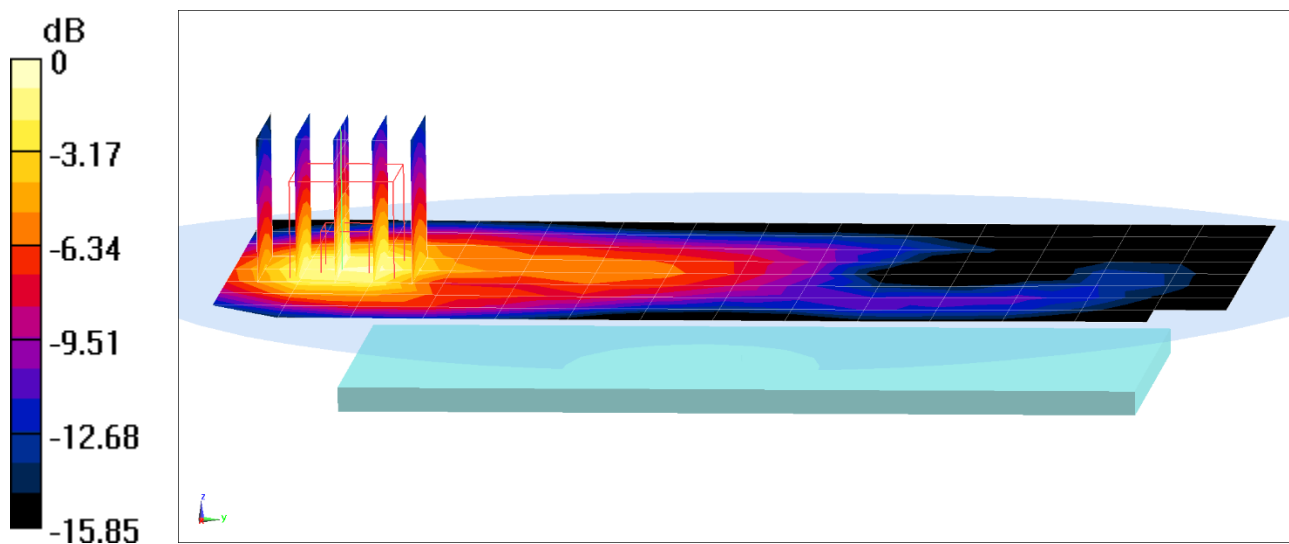

0 dB = 0.814 W/kg = -0.89 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0709M

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 52.621$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/02/2020; Ambient Temp: 23.9°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1882.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**


Area Scan (11x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.09 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.01 W/kg

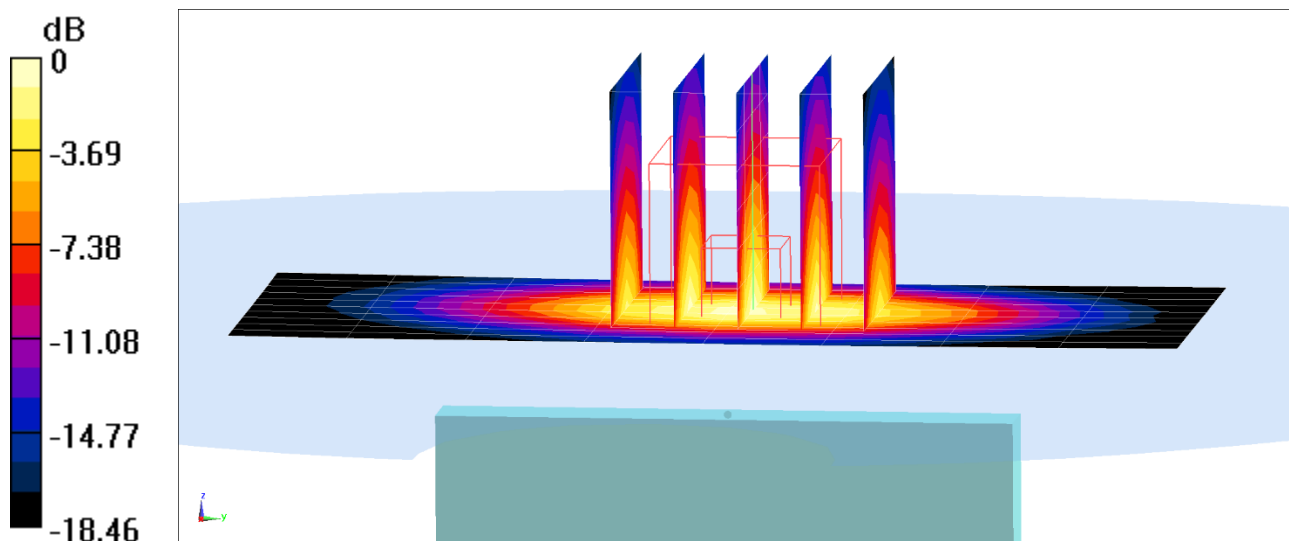

0 dB = 1.53 W/kg = 1.85 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0721M

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body; Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.88 \text{ S/m}$; $\epsilon_r = 52.911$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/26/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7409; ConvF(7.5, 7.5, 7.5) @ 2310 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.20 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.387 W/kg

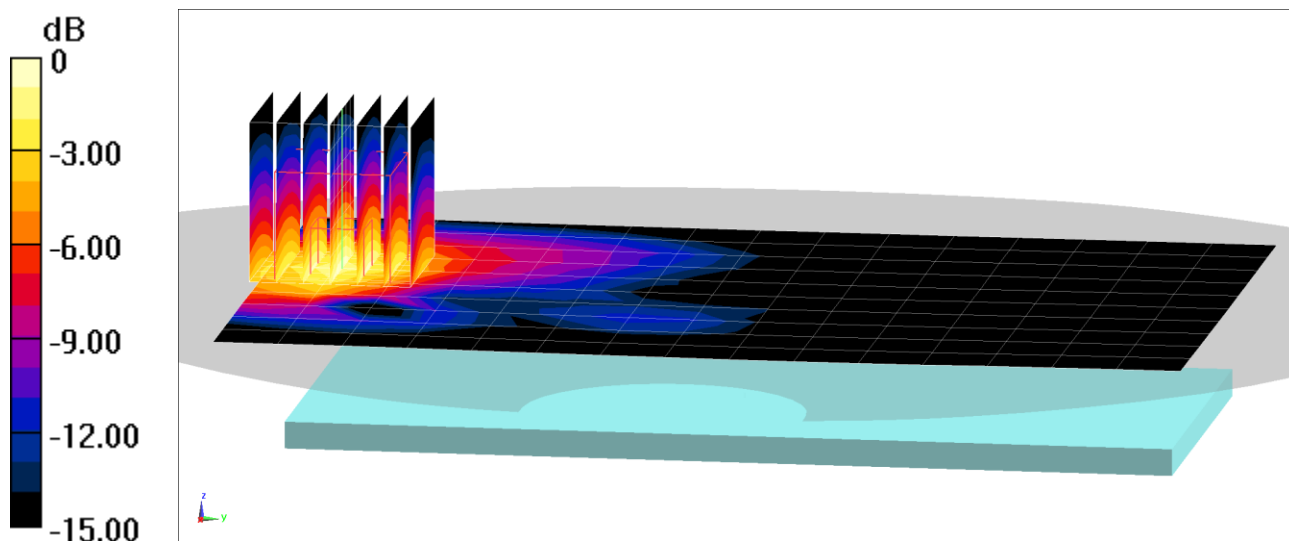

0 dB = 0.585 W/kg = -2.33 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0721M

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body; Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.88 \text{ S/m}$; $\epsilon_r = 52.911$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/26/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7409; ConvF(7.5, 7.5, 7.5) @ 2310 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Body SAR, Bottom Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


Area Scan (11x11x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.23 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.886 W/kg

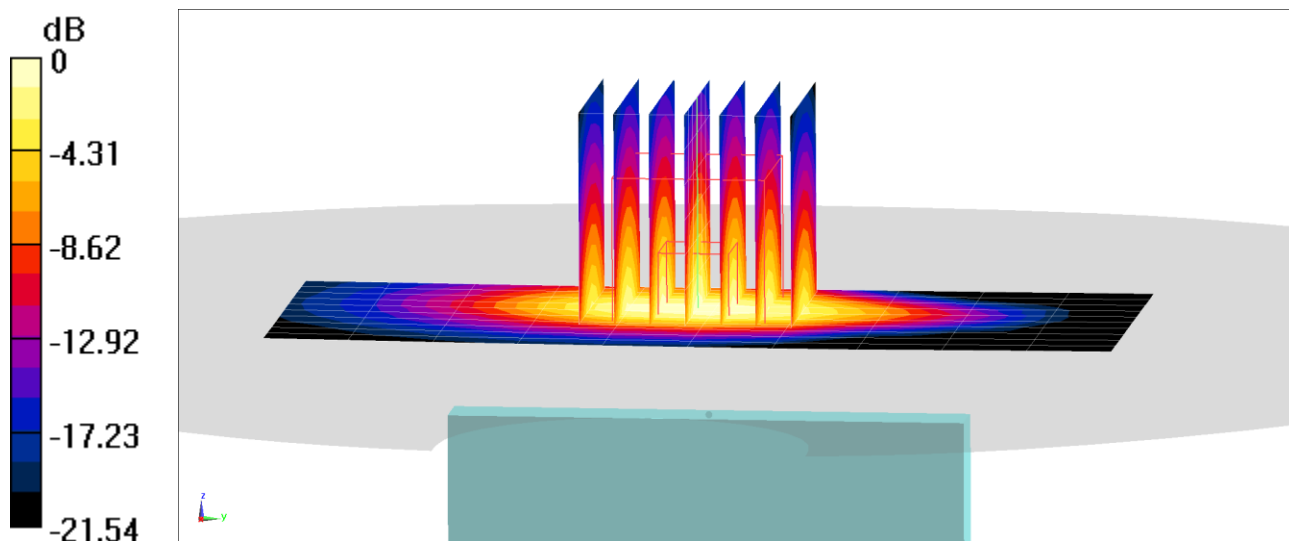

0 dB = 1.44 W/kg = 1.58 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0721M

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2600 Body; Medium parameters used:

$f = 2560$ MHz; $\sigma = 2.173$ S/m; $\epsilon_r = 51.362$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11/08/2020; Ambient Temp: 22.2°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2560 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.02 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.288 W/kg

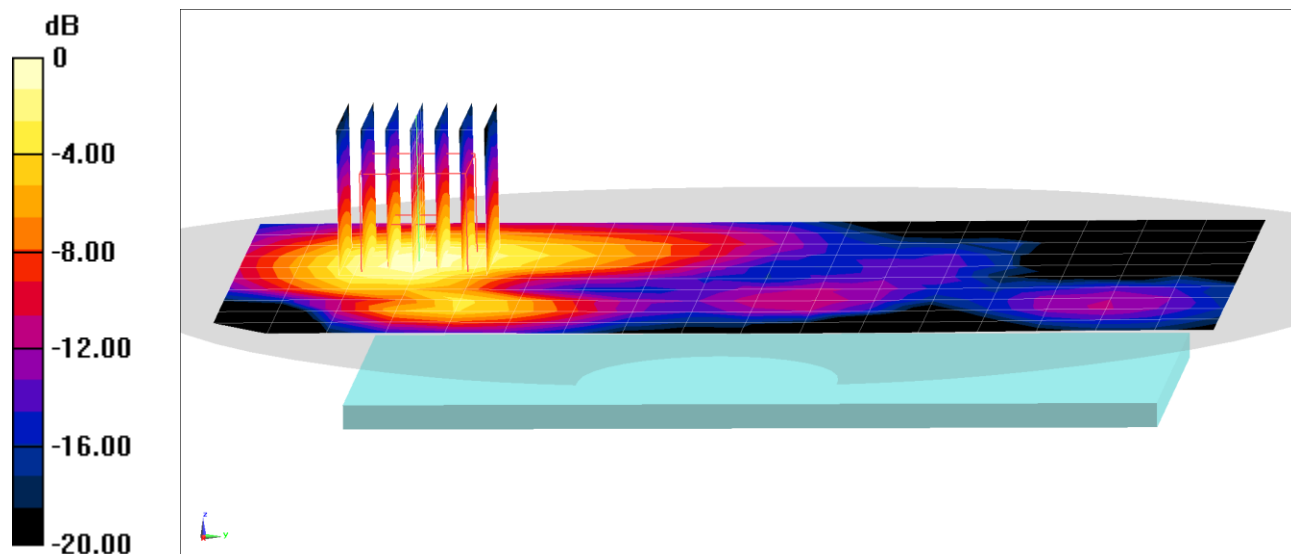

0 dB = 0.453 W/kg = -3.44 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0721M

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2600 Body; Medium parameters used:

$f = 2560 \text{ MHz}$; $\sigma = 2.173 \text{ S/m}$; $\epsilon_r = 51.362$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/08/2020; Ambient Temp: 22.2°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2560 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Body SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (15x11x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.66 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.673 W/kg

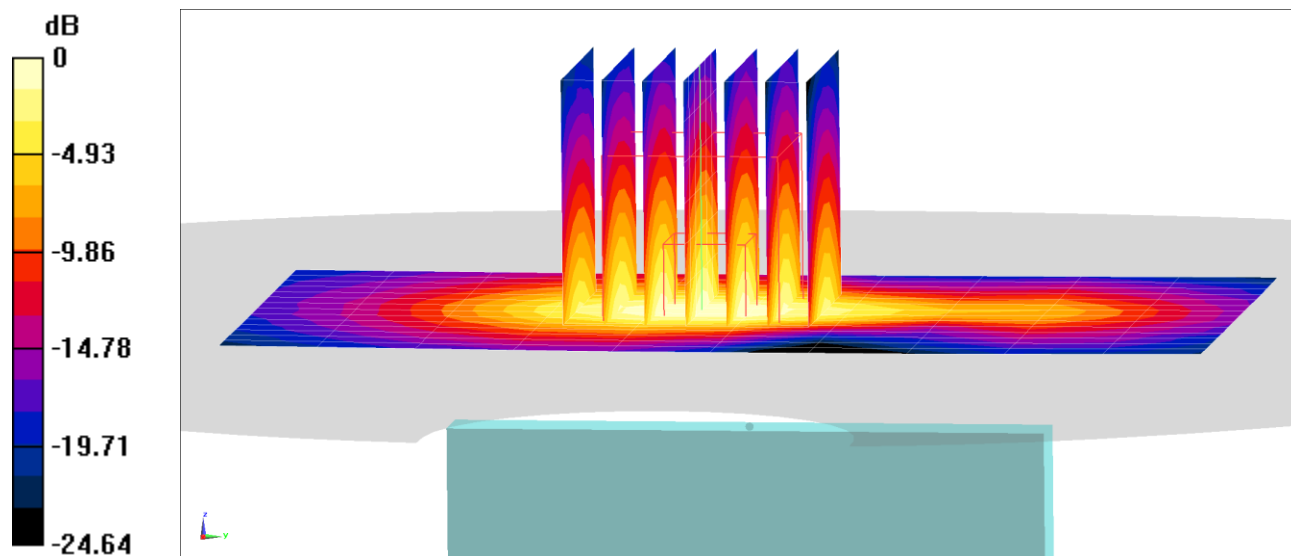

0 dB = 1.12 W/kg = 0.49 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0184M

Communication System: UID 0, LTE Band 48; Frequency: 3603.3 MHz; Duty Cycle: 1:1.58

Medium: 3600 Body; Medium parameters used (interpolated):

$f = 3603.3$ MHz; $\sigma = 3.498$ S/m; $\epsilon_r = 49.436$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/19/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7488; ConvF(6.85, 6.85, 6.85) @ 3603.3 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (20); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, ULCA, Body SAR, Back side,

PCC: Ch: 55773, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch: 55575, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 7.726 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.188 W/kg

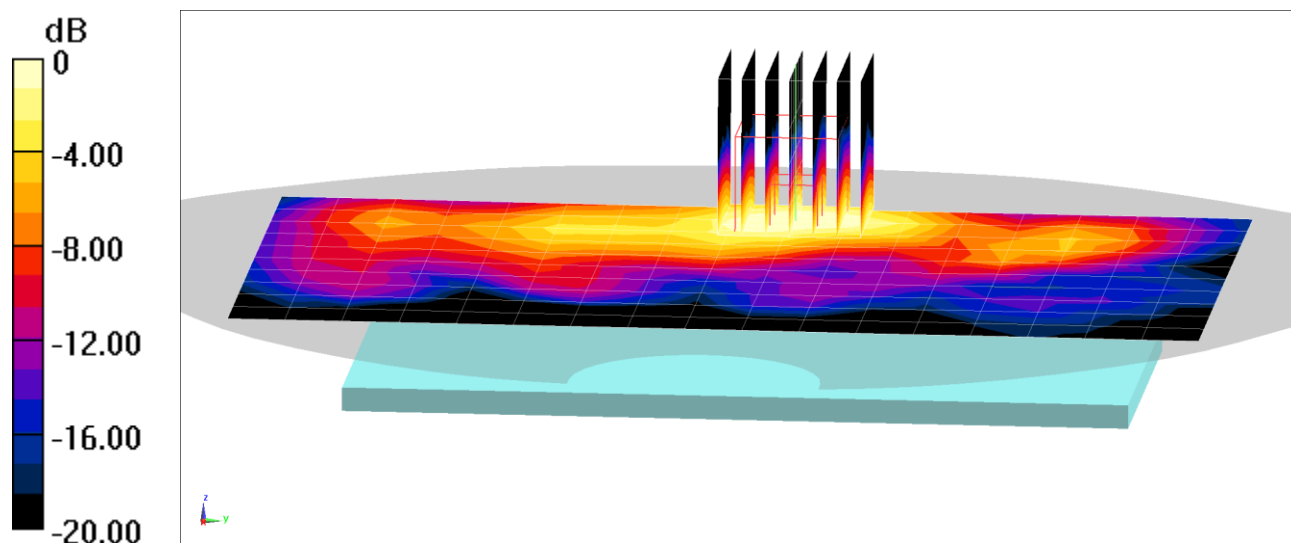

0 dB = 0.334 W/kg = -4.76 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 3921S

Communication System: UID 0, LTE Band 48; Frequency: 3560 MHz; Duty Cycle: 1:1.58

Medium: 3600 Body; Medium parameters used:

$f = 3560 \text{ MHz}$; $\sigma = 3.389 \text{ S/m}$; $\epsilon_r = 51.749$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/18/2020; Ambient Temp: 22.1°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7539; ConvF(6.5, 6.5, 6.5) @ 3560 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0 (left 20); Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, ULCA, Body SAR, Right Edge,

PCC: Ch: 55340, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

SCC: Ch: 55538, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (10x17x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 13.93 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.564 W/kg

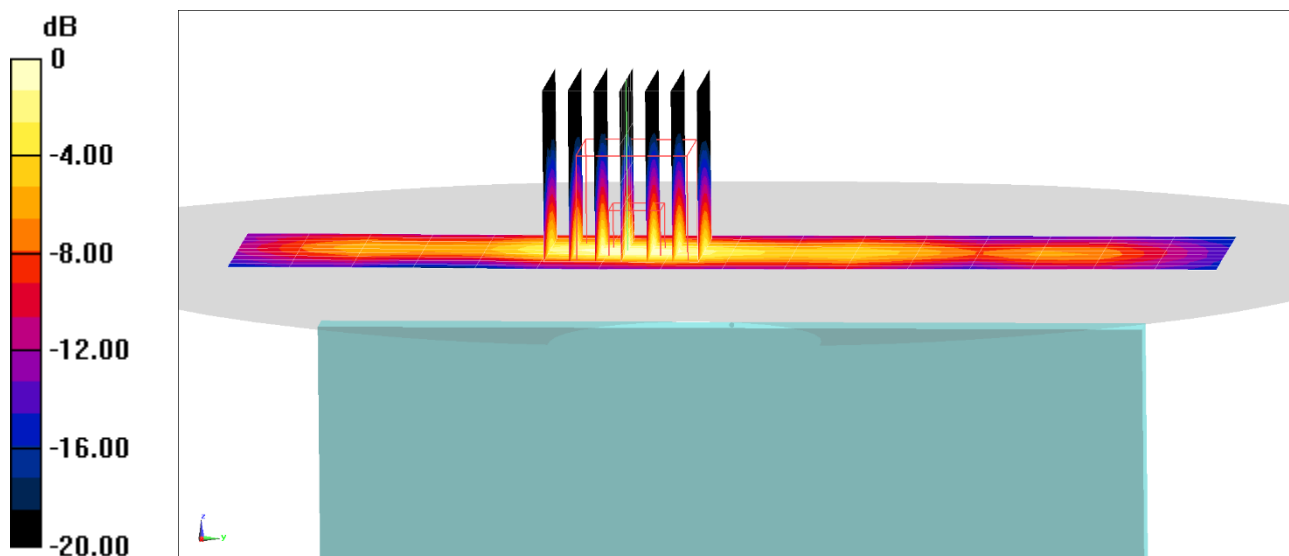

0 dB = 1.07 W/kg = 0.29 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0704M

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2680 MHz; Duty Cycle: 1:2.31

Medium: 2600 Body; Medium parameters used:

$f = 2680$ MHz; $\sigma = 2.317$ S/m; $\epsilon_r = 50.471$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11/12/2020; Ambient Temp: 22.2°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2680 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 PC2, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.53 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.395 W/kg

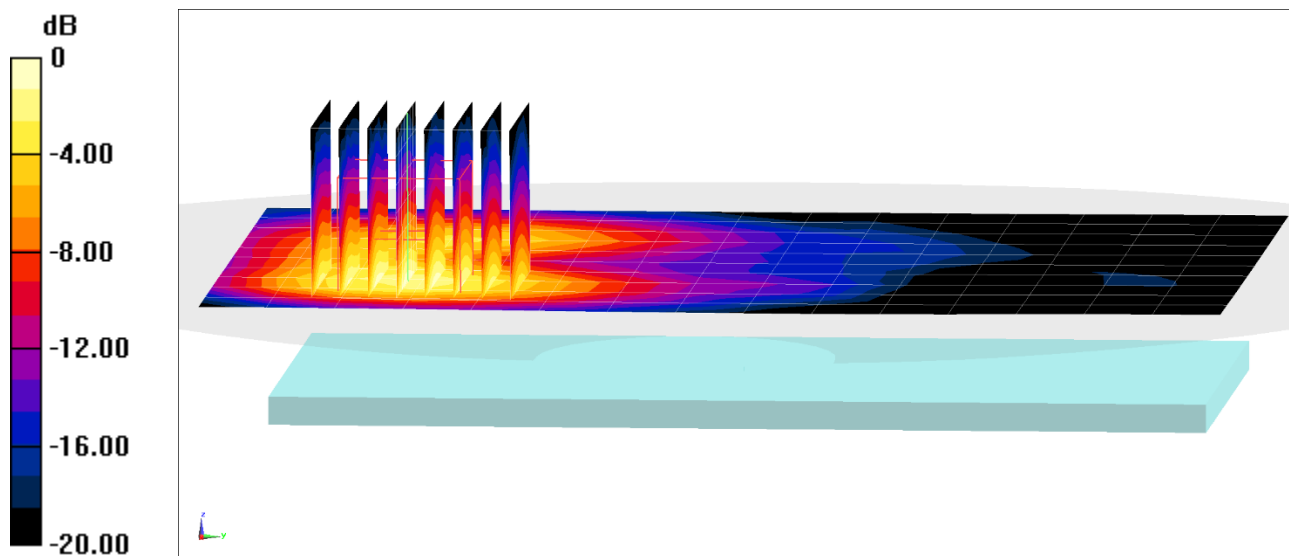

0 dB = 0.640 W/kg = -1.94 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0704M

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body; Medium parameters used:

$f = 2550 \text{ MHz}$; $\sigma = 2.16 \text{ S/m}$; $\epsilon_r = 50.85$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/12/2020; Ambient Temp: 22.2°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2549.5 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 PC3, Body SAR, Bottom Edge, Low-Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x10x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.20 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.972 W/kg

SAR(1 g) = 0.465 W/kg

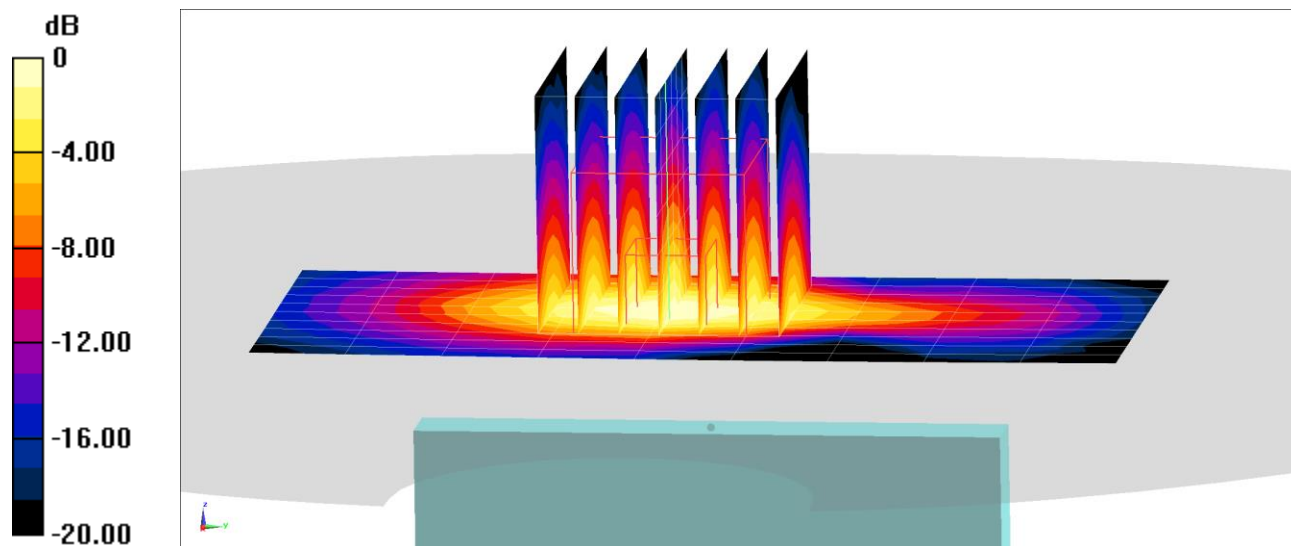

0 dB = 0.756 W/kg = -1.21 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0728M

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 53.785$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11/09/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 680.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n71, Body SAR, Back Side, 20 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 136100, 50 RB, 28 RB Offset**


Area Scan (9x16x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.33 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.226 W/kg

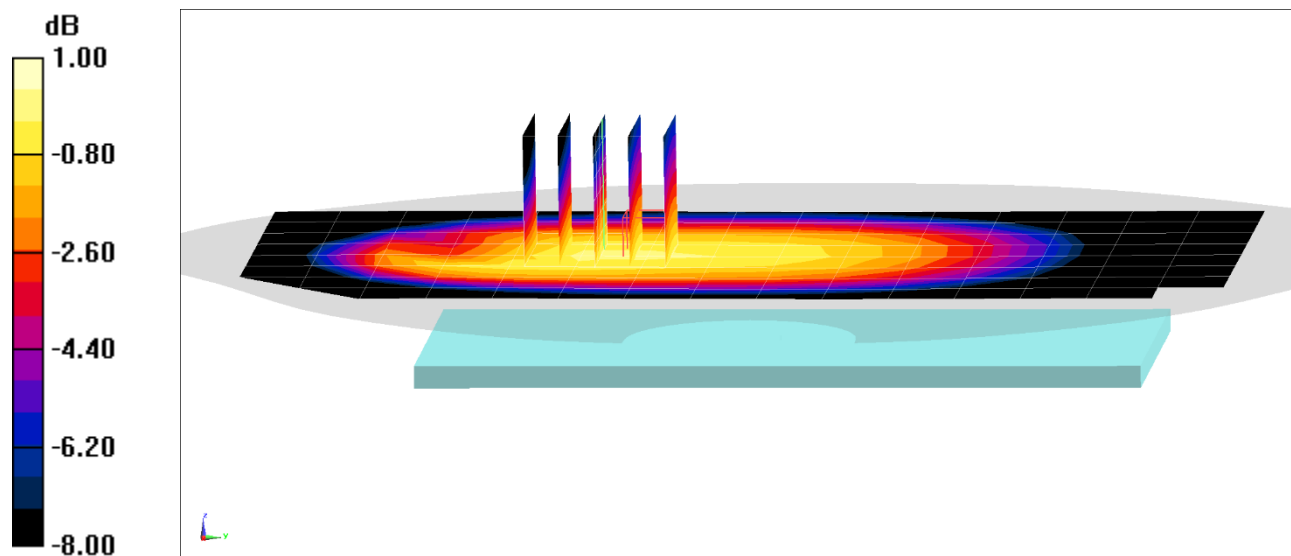

0 dB = 0.269 W/kg = -5.70 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0728M

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.963 \text{ S/m}$; $\epsilon_r = 53.785$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/09/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 680.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n71, Body SAR, Back Side, 20 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 136100, 50 RB, 28 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.54 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.353 W/kg

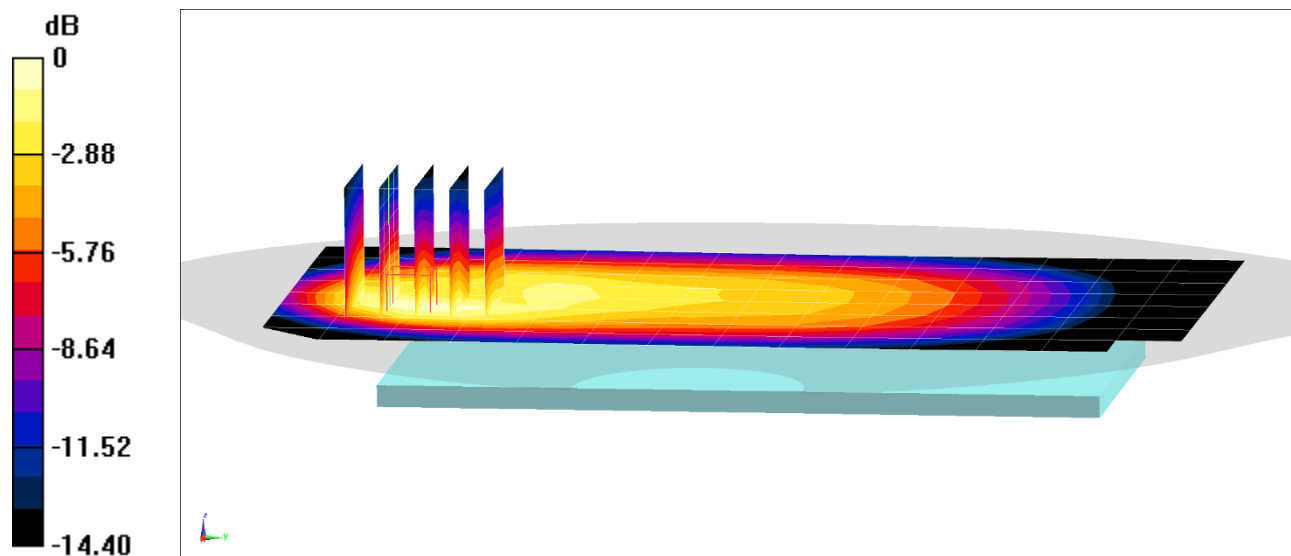

0 dB = 0.527 W/kg = -2.78 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0728M

Communication System: UID 0, NR Band n12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.968 \text{ S/m}$; $\epsilon_r = 53.558$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 707.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n12, Body SAR, Back Side, 15 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 141500, 1 RB, 40 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.72 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.231 W/kg

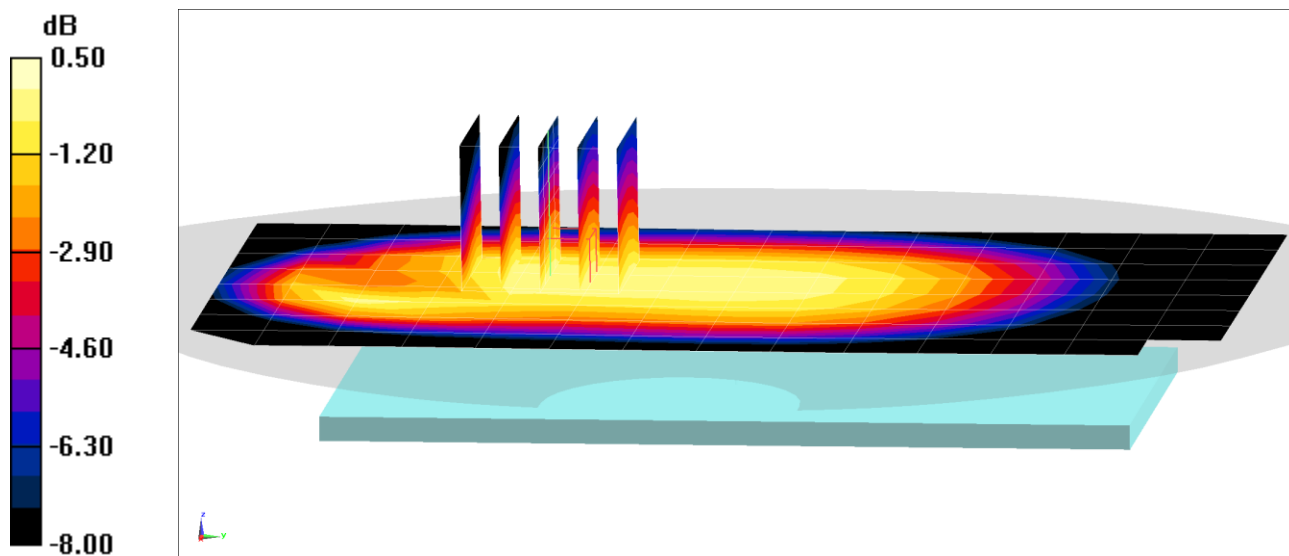

0 dB = 0.280 W/kg = -5.53 dBW/kg

PCTEST

DUT: A3LSMG998U; Type: Portable Handset; Serial: 0728M

Communication System: UID 0, NR Band n12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.968$ S/m; $\epsilon_r = 53.558$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7547; ConvF(9.98, 9.98, 9.98) @ 707.5 MHz; Calibrated: 8/19/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/12/2020

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n12, Body SAR, Back Side, 15 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 141500, 1 RB, 40 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.35 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.385 W/kg

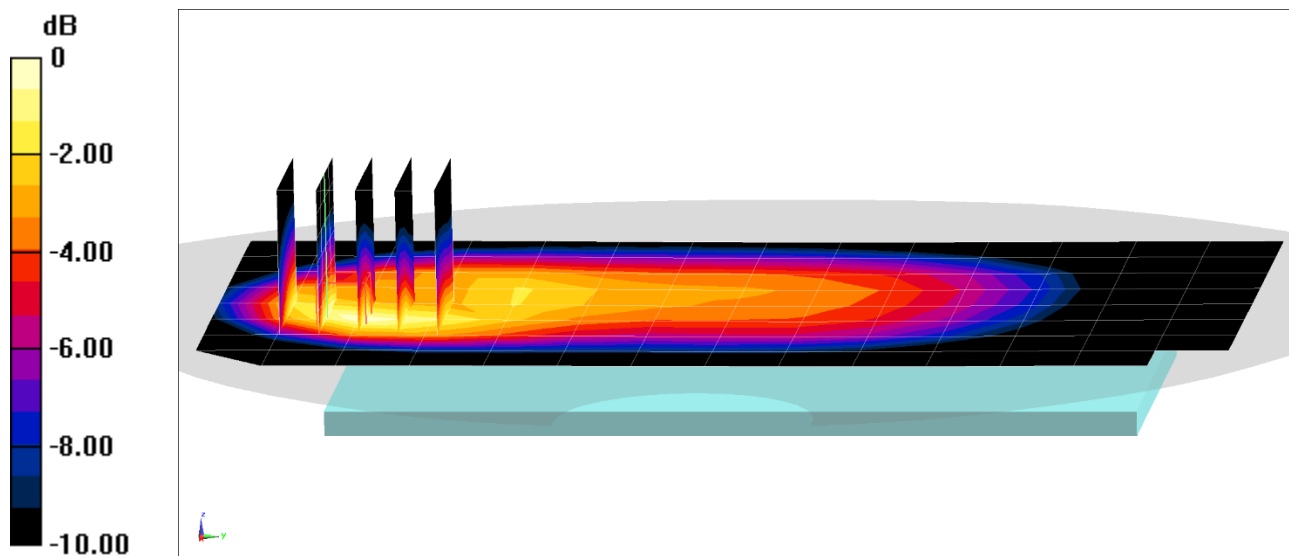

0 dB = 0.577 W/kg = -2.39 dBW/kg