



SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

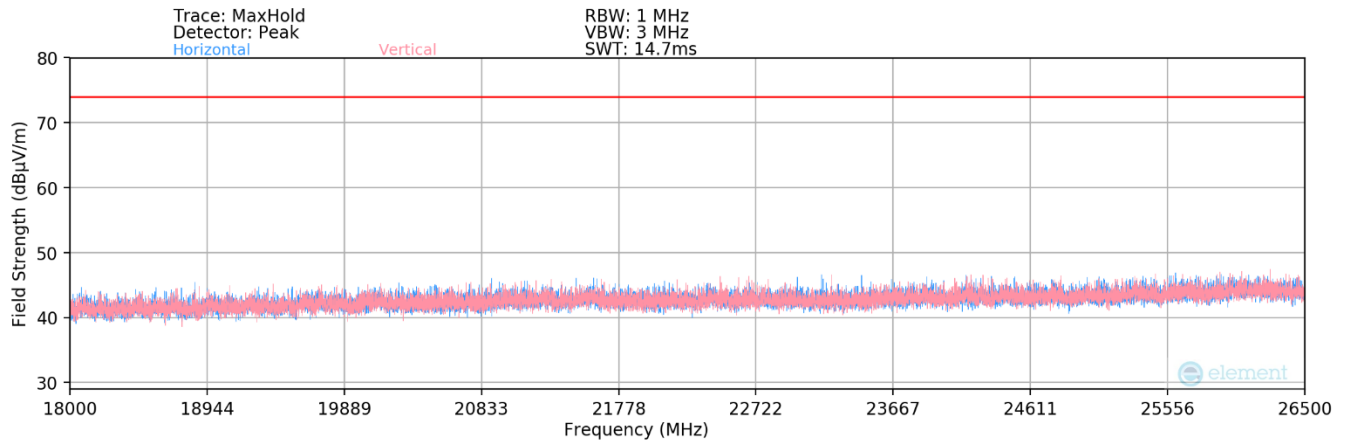

Plot 7-91. Radiated Spurious Plot above 18GHz SISO ANT2 (802.11ax OFDMA – 26 Tones)

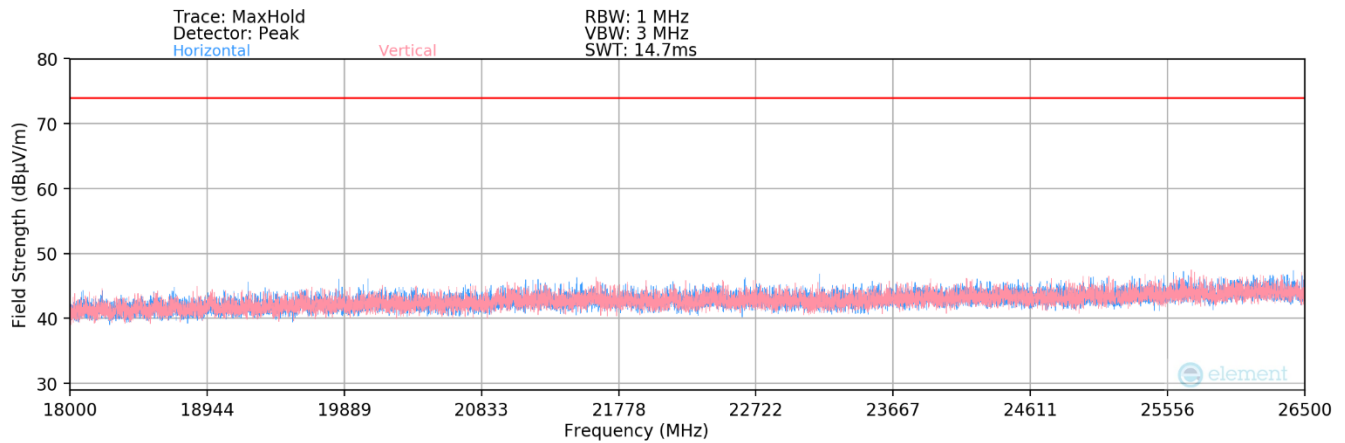

Plot 7-92. Radiated Spurious Plot above 18GHz SISO ANT2 (802.11ax OFDMA – 242 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 79 of 95

V9.0 02/01/2019

SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-84.25	7.78	30.53	53.98	-23.45
4824.00	Peak	V	-	-	-75.00	7.78	39.78	73.98	-34.20
12060.00	Avg	V	-	-	-86.13	18.26	39.13	53.98	-14.85
12060.00	Peak	V	-	-	-76.60	18.26	48.66	73.98	-25.32

Table 7-16. Radiated Measurements SISO ANT2 (26 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-84.17	7.53	30.36	53.98	-23.62
4874.00	Peak	V	-	-	-74.68	7.53	39.85	73.98	-34.13
7311.00	Avg	V	-	-	-85.29	12.43	34.14	53.98	-19.84
7311.00	Peak	V	-	-	-75.95	12.43	43.48	73.98	-30.50
12185.00	Avg	V	-	-	-86.74	19.08	39.34	53.98	-14.64
12185.00	Peak	V	-	-	-76.01	19.08	50.07	73.98	-23.91

Table 7-17. Radiated Measurements SISO ANT2 (26 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 80 of 95

V9.0 02/01/2019

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-79.50	7.54	35.04	53.98	-18.94
4924.00	Peak	V	-	-	-68.88	7.54	45.66	73.98	-28.32
7386.00	Avg	V	-	-	-80.41	12.14	38.73	53.98	-15.25
7386.00	Peak	V	-	-	-69.73	12.14	49.41	73.98	-24.57
12310.00	Avg	V	-	-	-81.26	18.99	44.73	53.98	-9.25
12310.00	Peak	V	-	-	-71.57	18.99	54.42	73.98	-19.56

Table 7-18. Radiated Measurements SISO ANT2 (26 Tones)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-79.35	7.54	35.19	53.98	-18.79
4924.00	Peak	V	-	-	-68.71	7.54	45.83	73.98	-28.15
7386.00	Avg	V	-	-	-80.40	12.14	38.74	53.98	-15.24
7386.00	Peak	V	-	-	-70.10	12.14	49.04	73.98	-24.94
12310.00	Avg	V	-	-	-81.86	18.99	44.13	53.98	-9.85
12310.00	Peak	V	-	-	-71.01	18.99	54.98	73.98	-19.00

Table 7-19. Radiated Measurements SISO ANT2 (26 Tones) with WCP

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 81 of 95

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-79.68	7.78	35.10	53.98	-18.88
4824.00	Peak	V	-	-	-69.61	7.78	45.17	73.98	-28.81
12060.00	Avg	V	-	-	-81.26	18.26	44.00	53.98	-9.98
12060.00	Peak	V	-	-	-70.77	18.26	54.49	73.98	-19.49

Table 7-20. Radiated Measurements SISO ANT2 (242 Tones)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-79.60	7.53	34.93	53.98	-19.05
4874.00	Peak	V	-	-	-69.06	7.53	45.47	73.98	-28.51
7311.00	Avg	V	-	-	-80.36	12.43	39.07	53.98	-14.91
7311.00	Peak	V	-	-	-70.18	12.43	49.25	73.98	-24.73
12185.00	Avg	V	-	-	-81.98	19.08	44.10	53.98	-9.88
12185.00	Peak	V	-	-	-71.54	19.08	54.54	73.98	-19.44

Table 7-21. Radiated Measurements SISO ANT2 (242 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 82 of 95

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-79.53	7.54	35.01	53.98	-18.97
4924.00	Peak	V	-	-	-69.10	7.54	45.44	73.98	-28.54
7386.00	Avg	V	-	-	-80.15	12.14	38.99	53.98	-14.99
7386.00	Peak	V	-	-	-69.85	12.14	49.29	73.98	-24.69
12310.00	Avg	V	-	-	-81.91	18.99	44.08	53.98	-9.90
12310.00	Peak	V	-	-	-71.93	18.99	54.06	73.98	-19.92

Table 7-22. Radiated Measurements SISO ANT2 (242 Tones)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-80.53	7.54	34.01	53.98	-19.97
4924.00	Peak	V	-	-	-70.44	7.54	44.10	73.98	-29.88
7386.00	Avg	V	-	-	-80.31	12.14	38.83	53.98	-15.15
7386.00	Peak	V	-	-	-69.37	12.14	49.77	73.98	-24.21
12310.00	Avg	V	-	-	-82.05	18.99	43.94	53.98	-10.04
12310.00	Peak	V	-	-	-71.90	18.99	54.09	73.98	-19.89

Table 7-23. Radiated Measurements SISO ANT2 (242 Tones) with WCP


FCC ID: A3LSMS916U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 83 of 95

7.7.2 MIMO Radiated Spurious Emission Measurements


\$15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

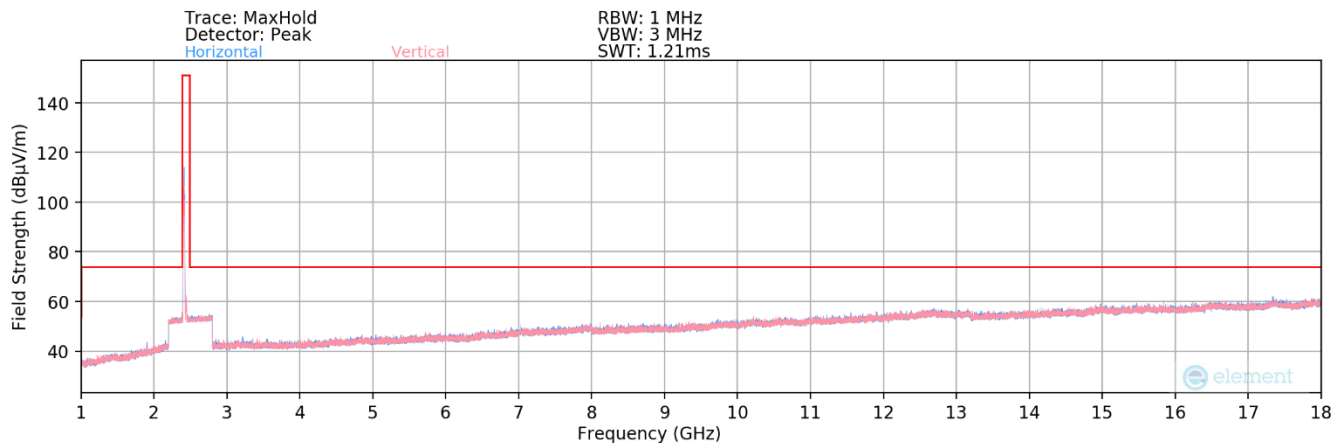

Plot 7-93. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 1)

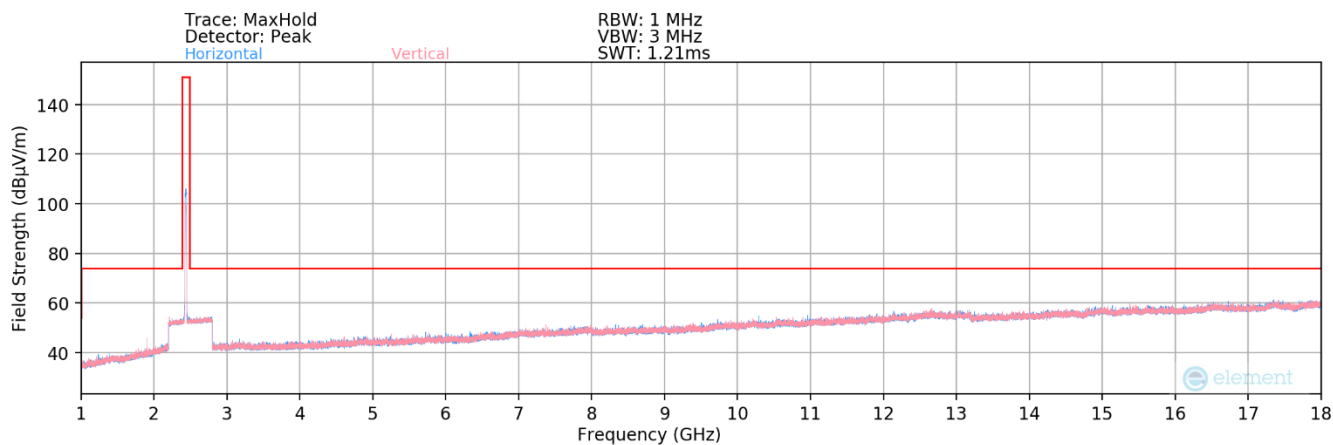

Plot 7-94. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 6)

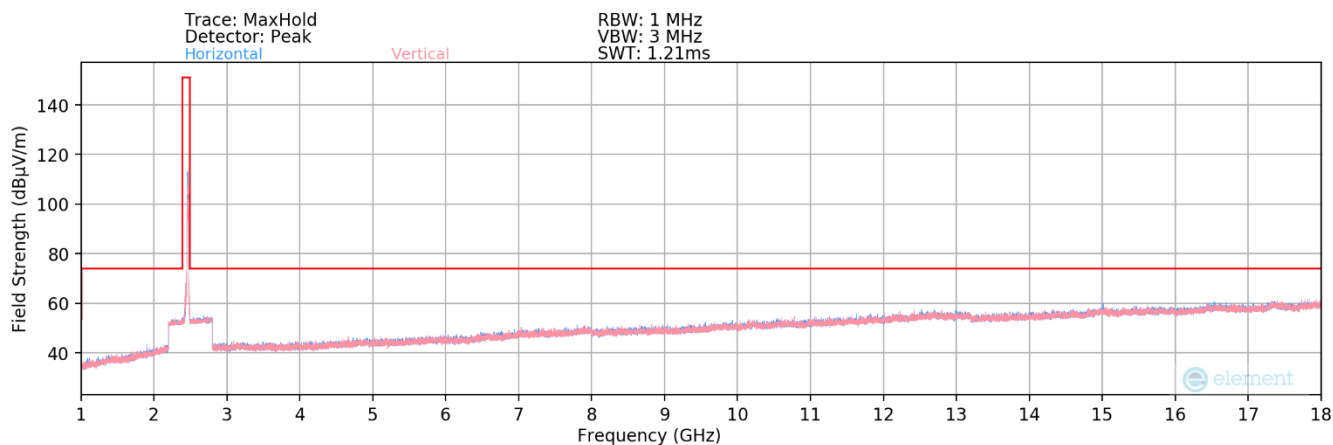


Plot 7-95. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 11)


FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 84 of 95

V9.0 02/01/2019


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

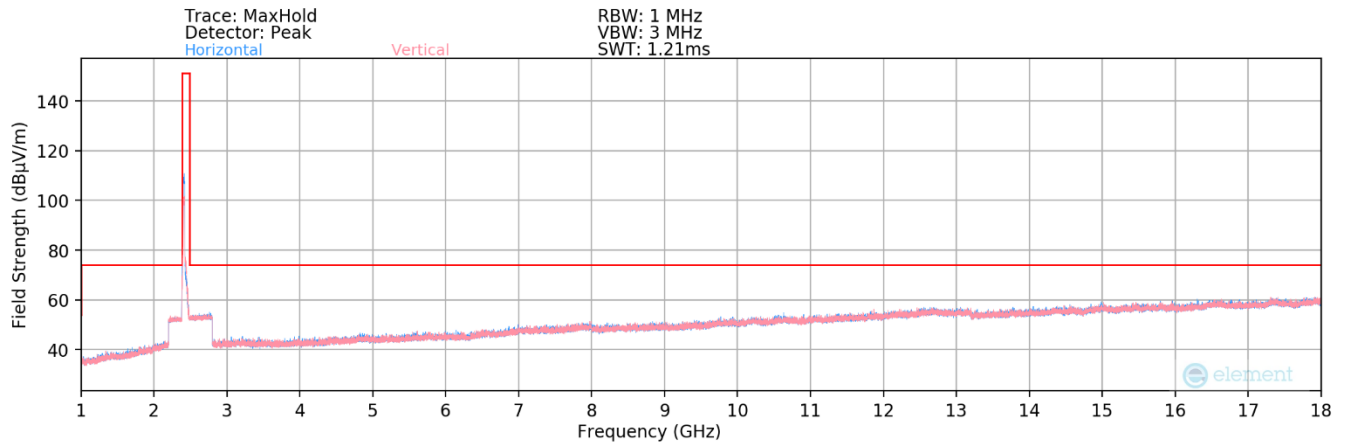

Plot 7-96. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 1)

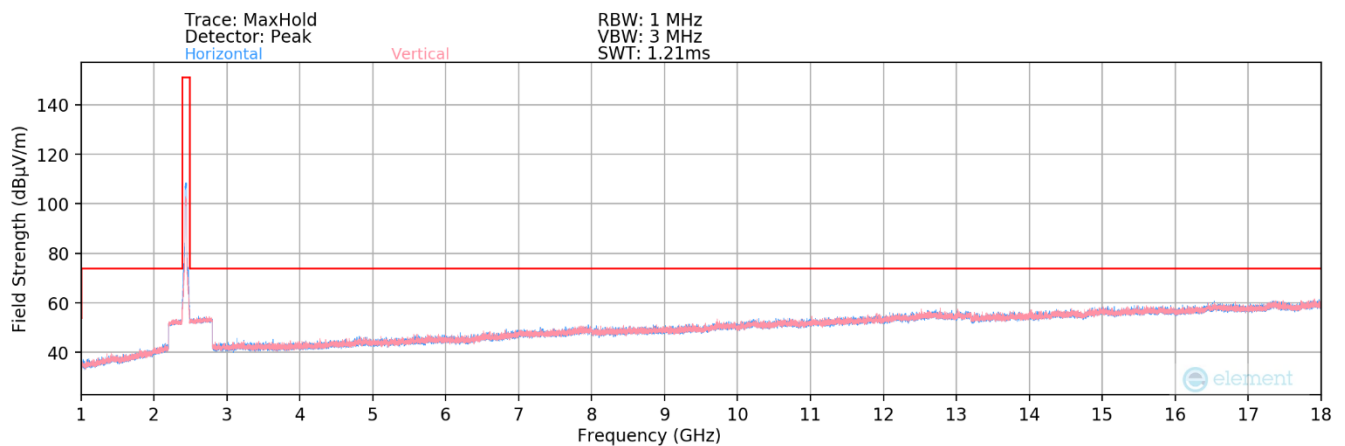

Plot 7-97. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 6)

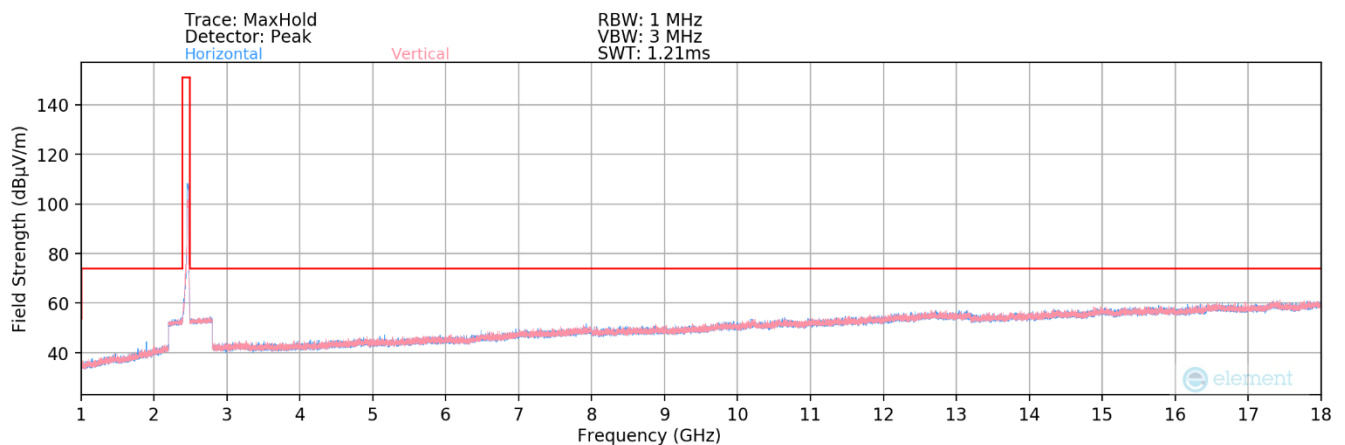


Plot 7-98. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 11)


FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 85 of 95

MIMO Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

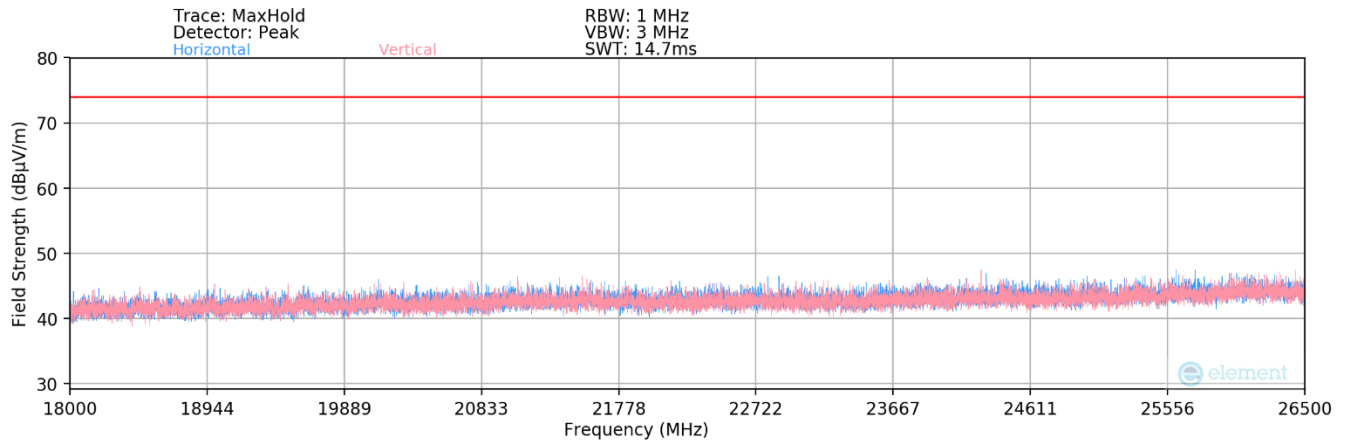

Plot 7-99. Radiated Spurious Plot above 18GHz MIMO (802.11ax OFDMA – 26 Tones)

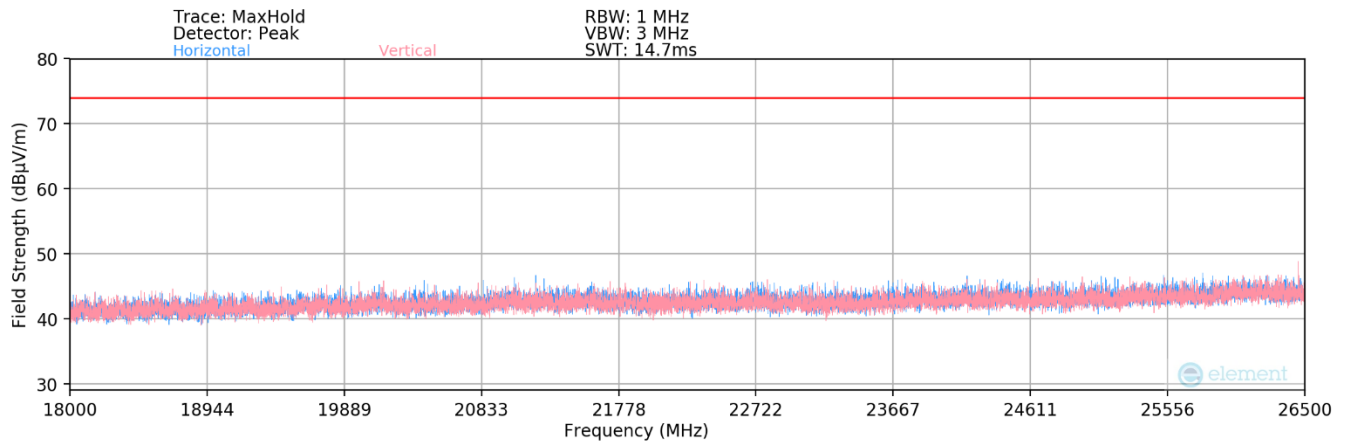

Plot 7-100. Radiated Spurious Plot above 18GHz MIMO (802.11ax OFDMA – 242 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 86 of 95

V9.0 02/01/2019

MIMO Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-79.59	7.78	35.19	53.98	-18.79
4824.00	Peak	H	-	-	-68.83	7.78	45.95	73.98	-28.03
12060.00	Avg	H	-	-	-81.40	18.26	43.86	53.98	-10.12
12060.00	Peak	H	-	-	-71.13	18.26	54.13	73.98	-19.85

Table 7-24. Radiated Measurements MIMO (26 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.54	7.53	34.99	53.98	-18.99
4874.00	Peak	H	-	-	-68.88	7.53	45.65	73.98	-28.33
7311.00	Avg	H	-	-	-80.48	12.43	38.95	53.98	-15.03
7311.00	Peak	H	-	-	-69.81	12.43	49.62	73.98	-24.36
12185.00	Avg	H	-	-	-82.03	19.08	44.05	53.98	-9.93
12185.00	Peak	H	-	-	-71.29	19.08	54.79	73.98	-19.19

Table 7-25. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 87 of 95

V9.0 02/01/2019

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.46	7.54	35.08	53.98	-18.90
4924.00	Peak	H	-	-	-69.14	7.54	45.40	73.98	-28.58
7386.00	Avg	H	-	-	-80.25	12.14	38.89	53.98	-15.09
7386.00	Peak	H	-	-	-70.12	12.14	49.02	73.98	-24.96
12310.00	Avg	H	-	-	-82.06	18.99	43.93	53.98	-10.05
12310.00	Peak	H	-	-	-71.68	18.99	54.31	73.98	-19.67

Table 7-26. Radiated Measurements MIMO (26 Tones)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.55	7.54	34.99	53.98	-18.99
4924.00	Peak	H	-	-	-69.52	7.54	45.02	73.98	-28.96
7386.00	Avg	H	-	-	-80.34	12.14	38.80	53.98	-15.18
7386.00	Peak	H	-	-	-69.65	12.14	49.49	73.98	-24.49
12310.00	Avg	H	-	-	-82.02	18.99	43.97	53.98	-10.01
12310.00	Peak	H	-	-	-71.93	18.99	54.06	73.98	-19.92

Table 7-27. Radiated Measurements MIMO (26 Tones) with WCP

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 88 of 95

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-79.54	7.78	35.24	53.98	-18.74
4824.00	Peak	H	-	-	-68.87	7.78	45.91	73.98	-28.07
12060.00	Avg	H	-	-	-81.38	18.26	43.88	53.98	-10.10
12060.00	Peak	H	-	-	-71.03	18.26	54.23	73.98	-19.75

Table 7-28. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.14	7.53	35.39	53.98	-18.59
4874.00	Peak	H	-	-	-69.53	7.53	45.00	73.98	-28.98
7311.00	Avg	H	-	-	-80.47	12.43	38.96	53.98	-15.02
7311.00	Peak	H	-	-	-70.79	12.43	48.64	73.98	-25.34
12185.00	Avg	H	-	-	-81.81	19.08	44.27	53.98	-9.71
12185.00	Peak	H	-	-	-71.44	19.08	54.64	73.98	-19.34

Table 7-29. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 89 of 95

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.68	7.54	34.86	53.98	-19.12
4924.00	Peak	H	-	-	-68.69	7.54	45.85	73.98	-28.13
7386.00	Avg	H	-	-	-80.35	12.14	38.79	53.98	-15.19
7386.00	Peak	H	-	-	-70.06	12.14	49.08	73.98	-24.90
12310.00	Avg	H	-	-	-82.01	18.99	43.98	53.98	-10.00
12310.00	Peak	H	-	-	-71.20	18.99	54.79	73.98	-19.19

Table 7-30. Radiated Measurements MIMO (242 Tones)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.46	7.54	35.08	53.98	-18.90
4924.00	Peak	H	-	-	-68.85	7.54	45.69	73.98	-28.29
7386.00	Avg	H	-	-	-80.29	12.14	38.85	53.98	-15.13
7386.00	Peak	H	-	-	-70.54	12.14	48.60	73.98	-25.38
12310.00	Avg	H	-	-	-82.08	18.99	43.91	53.98	-10.07
12310.00	Peak	H	-	-	-71.64	18.99	54.35	73.98	-19.63

Table 7-31. Radiated Measurements MIMO (242 Tones) with WCP


FCC ID: A3LSMS916U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 90 of 95

7.7.3 SISO Antenna-2 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

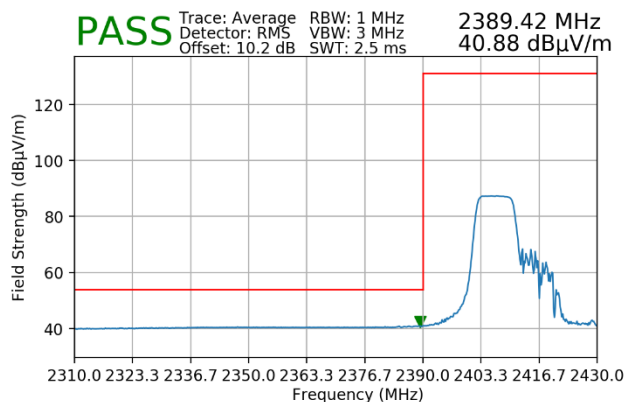


Plot 7-101. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106 Tones)

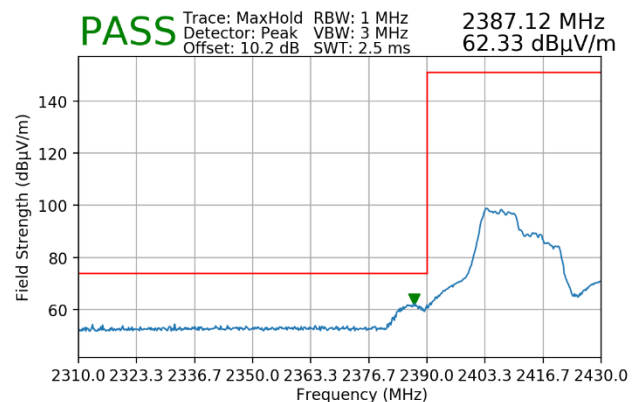


Plot 7-102. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

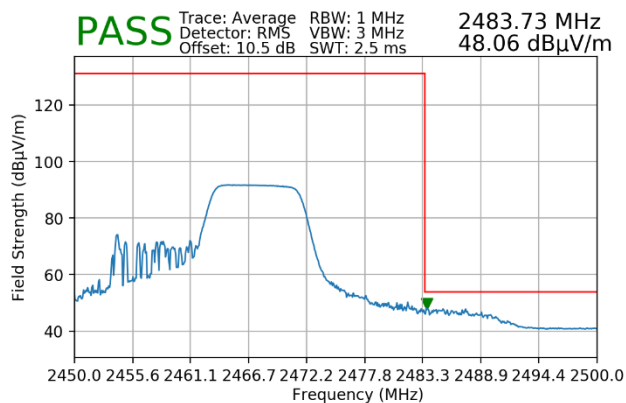


Plot 7-103. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106 Tones)

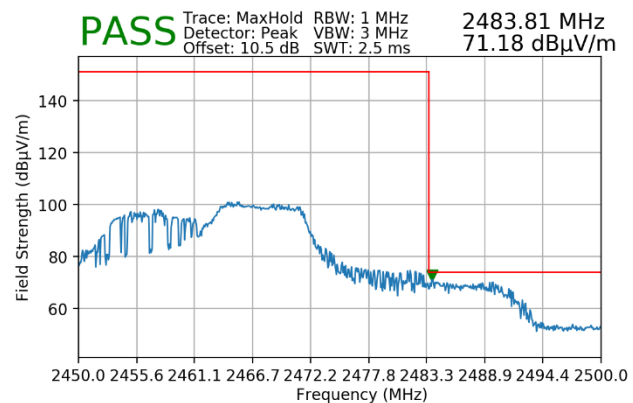


Plot 7-104. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 91 of 95

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

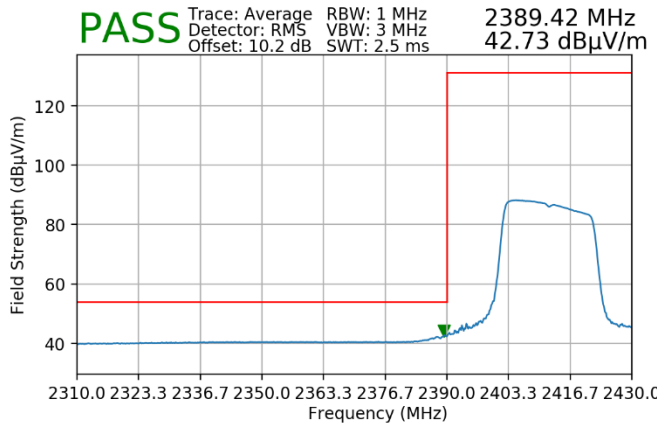


Plot 7-105. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 242 Tones)

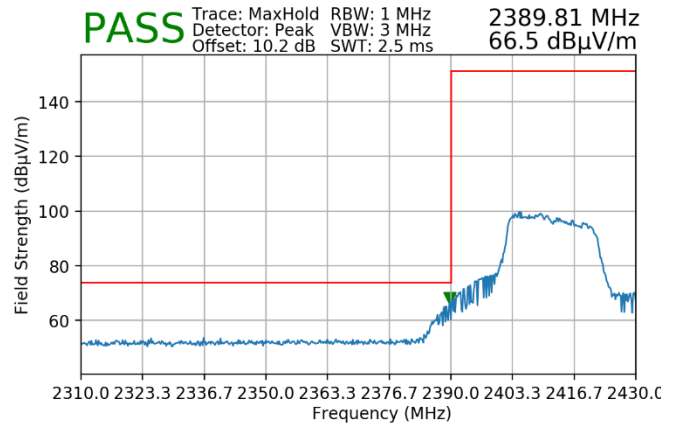


Plot 7-106. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

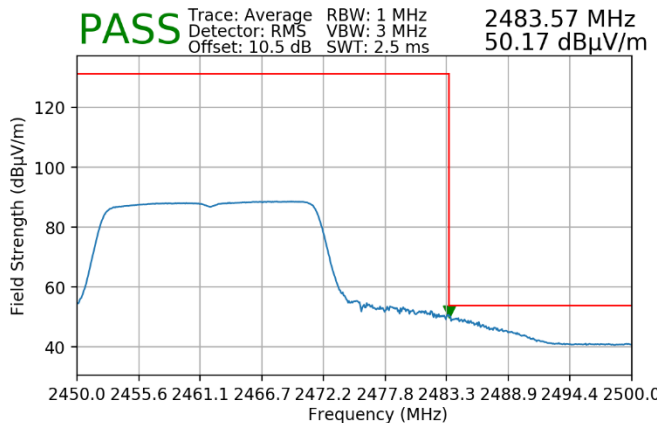

Plot 7-107. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 242 Tones)

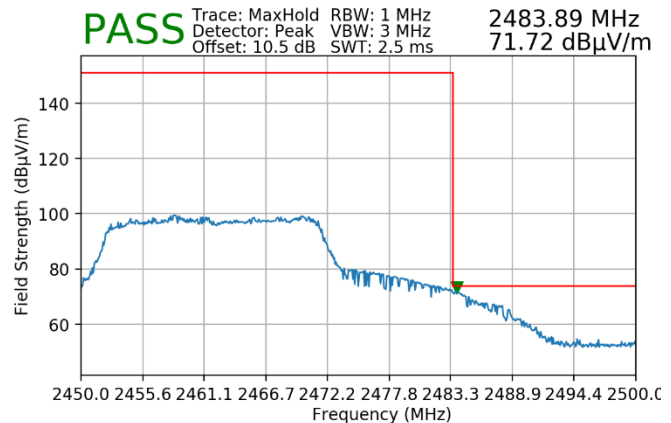

Plot 7-108. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 242 Tones)


FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 92 of 95

7.7.4 MIMO Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

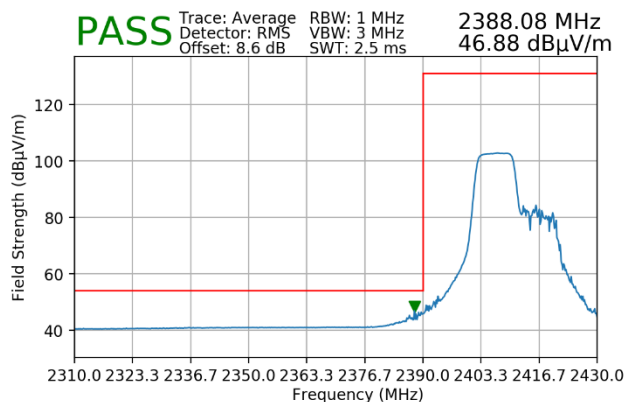


Plot 7-109. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 Tones)

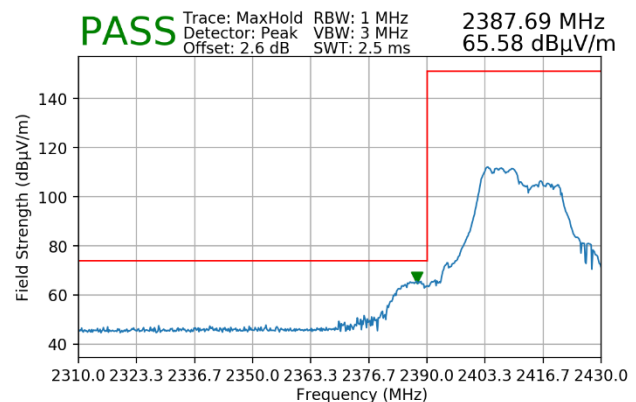


Plot 7-110. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

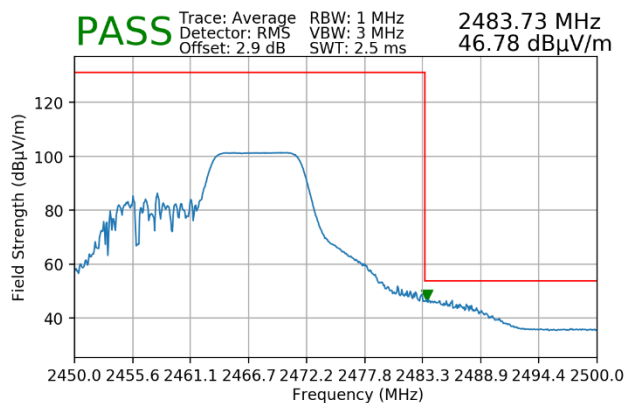

Plot 7-111. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

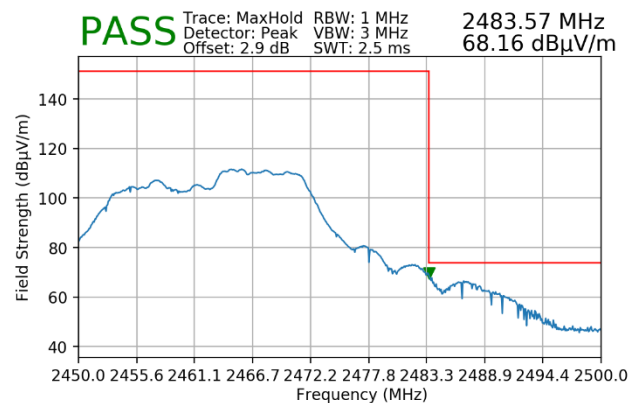


Plot 7-112. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)


FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 93 of 95

V9.0 02/01/2019

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

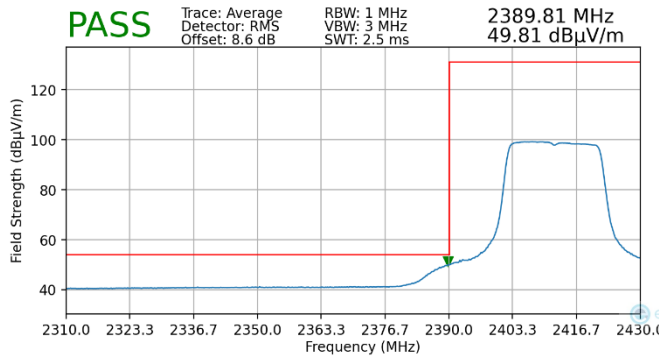


Plot 7-113. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)

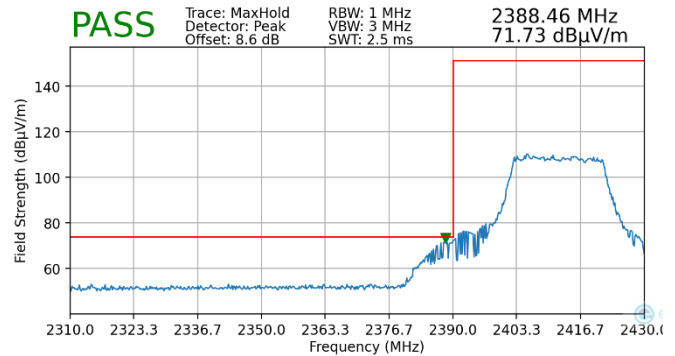


Plot 7-114. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

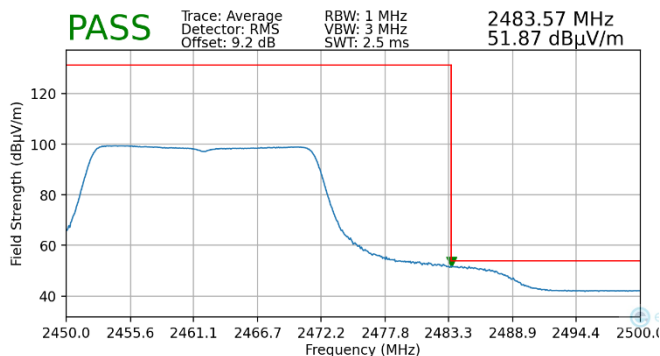

Plot 7-115. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

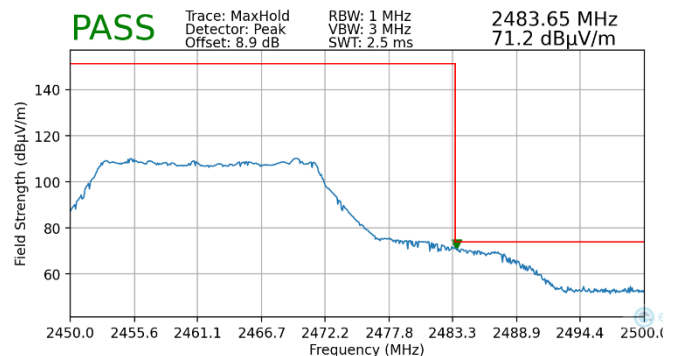

Plot 7-116. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 94 of 95

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS916U** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMS916U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2209010097-12.A3L	Test Dates: 09/02/2022-11/08/2022	EUT Type: Portable Handset	Page 95 of 95