




SOMApport Quick Setup

1 Get to know the SOMApport

The Outdoor SOMApport consists of two parts: an outdoor unit and an indoor unit.


After installing the SOMApport, simply plug-in the indoor unit and connect it to your computer using the provided Ethernet cable. The SOMApport will automatically connect your service provider and you can setup your account using a Web browser.

If you are using your SOMApport to provide telephone service, you can connect ordinary telephones to it.

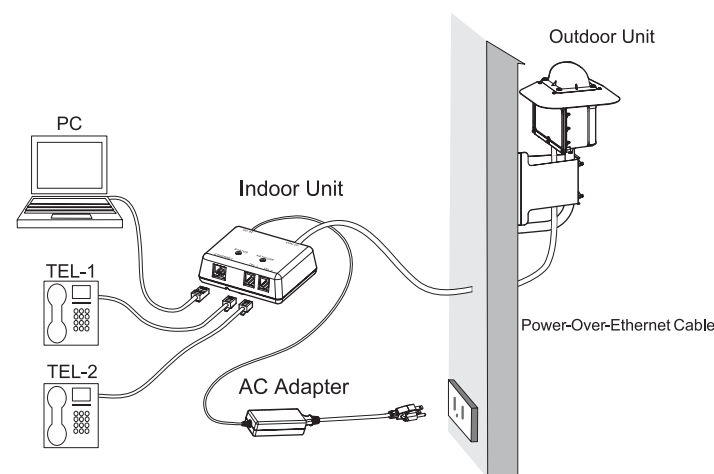

Cable


The Ethernet cable is supplied with the SOMApport. If your computer has an Ethernet port, use the Ethernet cable.



If your computer does not have an Ethernet port, you will need to purchase an Ethernet card or an Ethernet-to-USB adapter.

Top and side panels

Before beginning the installation, familiarize yourself with the top and side panels of the indoor unit.

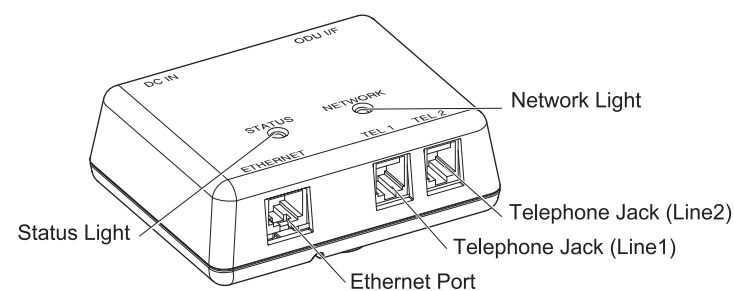

Top panel lights

The lights on the top panel tell you when the SOMApport is ready.

Status Light


Off	The SOMApport is not receiving power.
Amber	The SOMApport is booting and running its internal diagnostics.
Flashing amber	The SOMApport is upgrading its software.
Green	The SOMApport is powered and operating normally.
Red	An error occurred. The SOMApport is not currently functional.

Network Light

Off	The SOMApport is not receiving power.
Amber	The SOMApport is attempting to locate a base station.
Flashing amber	The SOMApport cannot locate a base station.
Flashing green	The SOMApport has located a base station and is attempting to establish a connection.
Green	The SOMApport has located a base station and has established a connection.
Red	An error occurred. The SOMApport is not currently functional.

2 Prepare the SOMApport

Before plugging in the SOMApport, make sure that the CAT5 cable from the outdoor unit has been inserted to the ODU/I/F port on the side of the indoor unit.

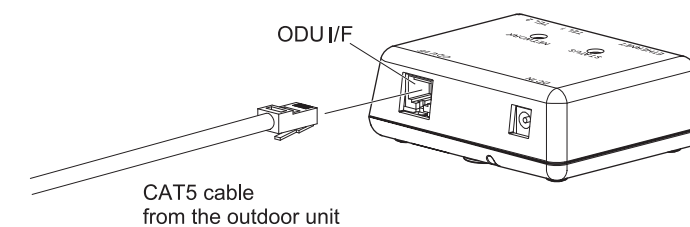


When setting up the SOMApport, follow these guidelines:

- Do not connect any third-party devices to the indoor unit, CAT5 cable, or outdoor unit.
- Do not use the outdoor unit indoors. It must be mounted on a permanent outdoor structure.

3 Plug in the SOMApport

- 1 Insert the connector of the power cord that is attached to the power supply into the power jack on the indoor unit. **A**
- 2 Insert the socket end of the AC power cord into the power supply. **B**
- 3 Position and orient the SOMApport in the location in which you plan on keeping it.
- 4 Insert the plug end of the AC power cord into a power outlet.

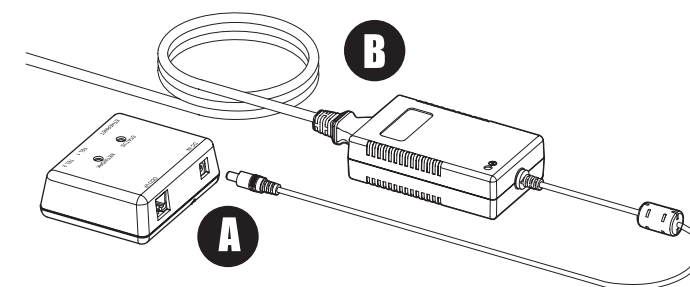

The SOMApport takes up to five minutes to start, connect to your service provider's network, and acquire a radio signal. The light on the power supply indicates whether or not it is receiving power. Wait until the Network light on the top of the SOMApport turns green before you begin connecting equipment to the SOMApport.