

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	海 芯
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	G43.5*0.75-20.5-0.08*48P-10TS-6.5UH-L40MM+BJ
FINE P/N:	
產 品 型 號:	Φ 43.5MMX0.75MM
DESC:	
日 期:	2024/05/24
DATE:	
版 本:	A.0
Version:	

擬 制 PREPARED BY	審 核 CHECKED BY	批 准 APPROVED BY	客 戶 承 認 CUSTOMER APPROVE
何立成	马莉	但可清	

东莞市音泽电子科技有限公司

工廠地址：东莞市茶山镇兴韩路（创富中心城）2 栋 901 号

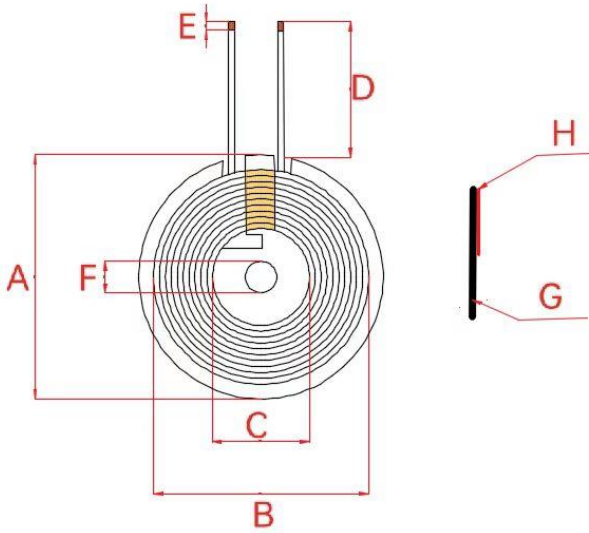
但可清 TEL：18617251159

版本變更履歷

Version Change History

[illegible]

SPECIFICATION

產 品 型 號: DESC		G43.5*0.75-20.5-0.08*48P-10 TS-6.5UH-L40MM+BJ		版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	海 芯																												
一、尺寸 DIMENSION:(mm) 					A	43.5±0.5																												
					B	38.3±0.5																												
					C	20.5±0.5																												
					D	40 ±2																												
					E	3±2																												
					F	5.3±0.2																												
					G	0.75±0.05																												
					H	1.65±0.1																												
					I																													
					K																													
二、天线增益 Antenna gain: <table><tr><td>Operation frequency:</td><td>113kHz-205kHz</td></tr><tr><td>Antenna Type:</td><td>Loop coil Antenna</td></tr><tr><td>Antenna gain:</td><td>0dBi</td></tr></table>					Operation frequency:	113kHz-205kHz	Antenna Type:	Loop coil Antenna	Antenna gain:	0dBi	Note: 1. Cross out wire; 2. The coil is attached to the double-slot magnetic disc, the magnetic disc size is 43.5±0.5mm, and the thickness is 0.75±0.05mm. 3. Glue the back of the magnetic disc																							
					Operation frequency:	113kHz-205kHz																												
					Antenna Type:	Loop coil Antenna																												
					Antenna gain:	0dBi																												
三、绕线参数 Winding Specification: <table><tr><td>序号 NO.</td><td colspan="2">端子 TERMINAL</td><td>线径 WIRE</td><td>圈数 Turns</td><td colspan="2">绕线方向 Winding Direction</td></tr><tr><td>1</td><td>S</td><td>F</td><td>Hot air cable 0.08*48P</td><td>10Ts</td><td colspan="2">CCW</td></tr></table>							序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction		1	S	F	Hot air cable 0.08*48P	10Ts	CCW															
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																													
1	S	F	Hot air cable 0.08*48P	10Ts	CCW																													
四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE:25±10 ℃, 湿度 RELATIVE HUMIDITY:65±20% <table><tr><td>序号 NO.</td><td>项目 ITEM</td><td>端子 TERMINAL</td><td>标准 SPECIFICATION</td><td>测试条件 TEST FREQUENCY</td><td colspan="2">测试仪器 TEST EQUIPMENTS</td></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>3.7uH ±10% Individual coil</td><td>100KHz/1.0V</td><td colspan="2">LCZ METER 1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>6.5uH ±10% Magnetized sheet</td><td>100KHz/1.0V</td><td colspan="2">LCZ METER 1062B</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>≤100m Ω</td><td></td><td colspan="2">LCZ METER 502B</td></tr></table>							序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS		1	IND.	S-F	3.7uH ±10% Individual coil	100KHz/1.0V	LCZ METER 1062B		2	IND.	S-F	6.5uH ±10% Magnetized sheet	100KHz/1.0V	LCZ METER 1062B		3	DCR	S-F	≤100m Ω		LCZ METER 502B	
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																													
1	IND.	S-F	3.7uH ±10% Individual coil	100KHz/1.0V	LCZ METER 1062B																													
2	IND.	S-F	6.5uH ±10% Magnetized sheet	100KHz/1.0V	LCZ METER 1062B																													
3	DCR	S-F	≤100m Ω		LCZ METER 502B																													
擬制/日期 PREPARED BY/DATE				審核/日期 CHECKED BY/DATE																														
何立成 2024.05.24																																		