


4.6 Conducted Spurious Emissions

4.6.1 Limit

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.6.2 Test Setup

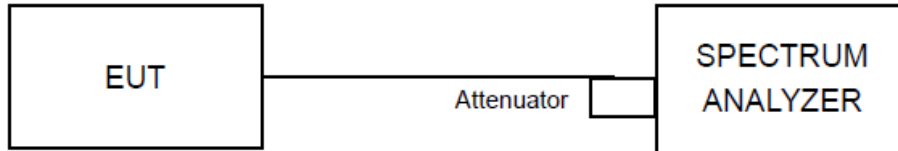

4.6.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.4 Deviation of Test Standard

No deviation.


4.6.5 Test Results

Test Mode	Antenna	Channel [MHz]	FreqRange [MHz]	RefLevel [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.81	6.81	---	PASS
			30~1000	6.81	-63.39	<=-13.19	PASS
			1000~26500	6.81	-46.6	<=-13.19	PASS
		2437	Reference	6.67	6.67	---	PASS
			30~1000	6.67	-63.69	<=-13.33	PASS
			1000~26500	6.67	-46.37	<=-13.33	PASS
		2462	Reference	6.23	6.23	---	PASS
			30~1000	6.23	-63.13	<=-13.77	PASS
			1000~26500	6.23	-44.93	<=-13.77	PASS
11G	Ant1	2412	Reference	-1.85	-1.85	---	PASS
			30~1000	-1.85	-62.87	<=-21.85	PASS
			1000~26500	-1.85	-45.99	<=-21.85	PASS
		2437	Reference	-2.60	-2.60	---	PASS
			30~1000	-2.60	-62.94	<=-22.6	PASS
			1000~26500	-2.60	-45.43	<=-22.6	PASS
		2462	Reference	-4.36	-4.36	---	PASS
			30~1000	-4.36	-63.11	<=-24.36	PASS
			1000~26500	-4.36	-45.23	<=-24.36	PASS
11N20SISO	Ant1	2412	Reference	-2.29	-2.29	---	PASS
			30~1000	-2.29	-63.04	<=-22.29	PASS
			1000~26500	-2.29	-43.95	<=-22.29	PASS
		2437	Reference	-2.10	-2.10	---	PASS
			30~1000	-2.10	-62.76	<=-22.1	PASS
			1000~26500	-2.10	-46.03	<=-22.1	PASS
		2462	Reference	-2.39	-2.39	---	PASS
			30~1000	-2.39	-62.54	<=-22.39	PASS
			1000~26500	-2.39	-45.14	<=-22.39	PASS


11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

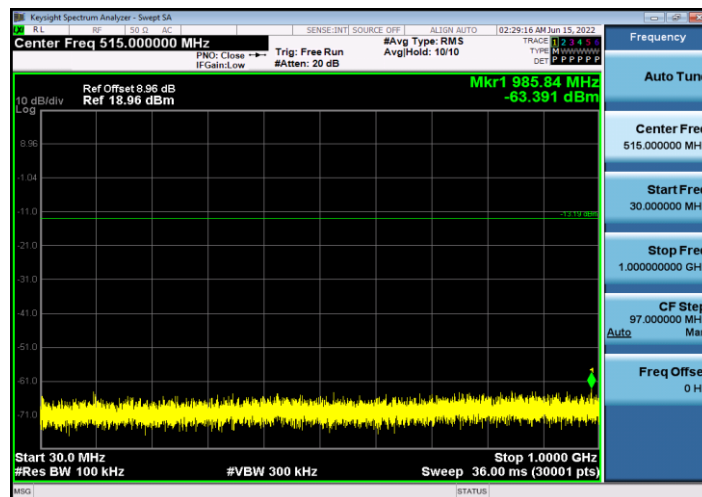

11B_Ant1_2412_1000~26500

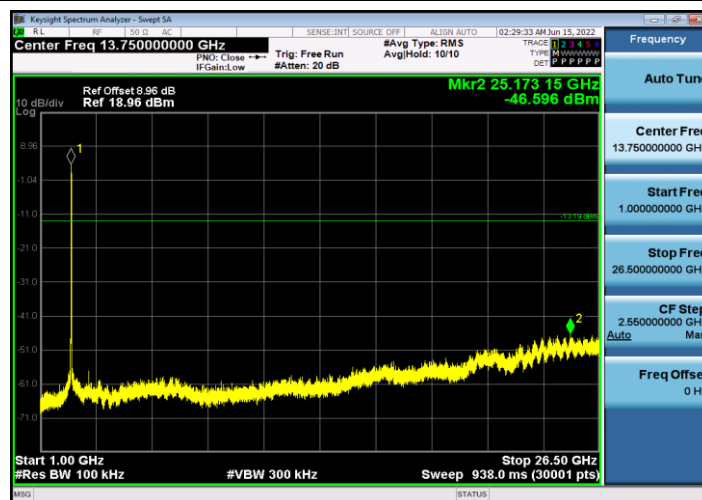





11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000

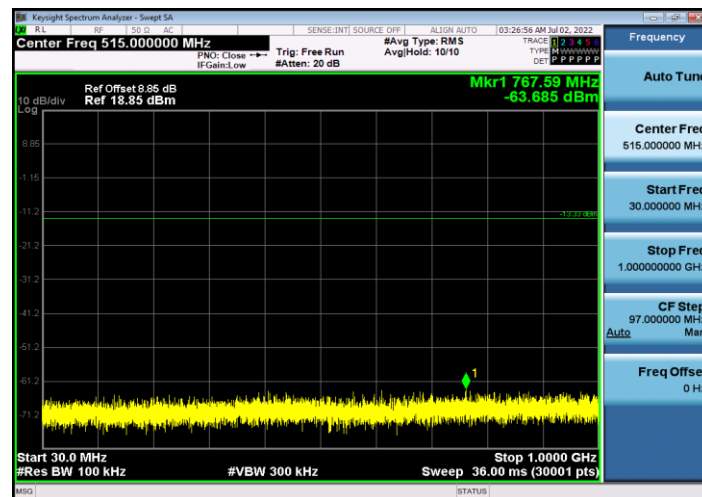


11B_Ant1_2437_1000~26500

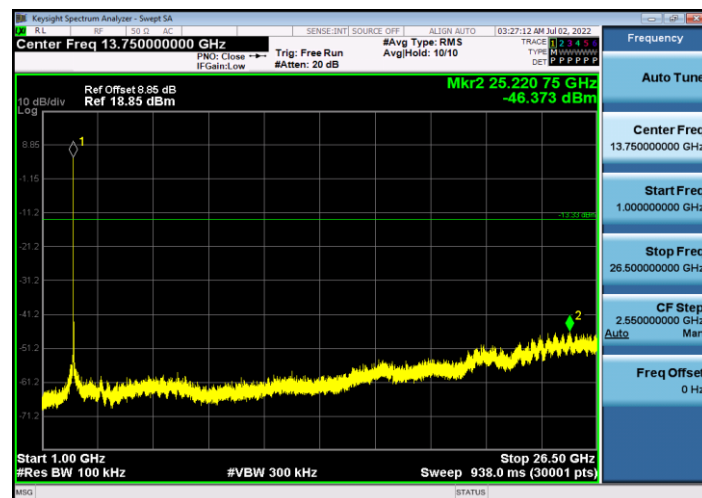


11B_Ant1_2462_0~Reference



11B_Ant1_2462_30~1000

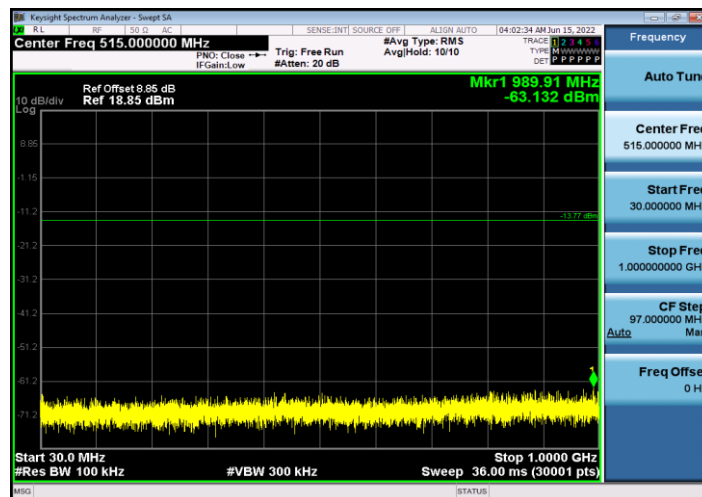


11B_Ant1_2462_1000~26500

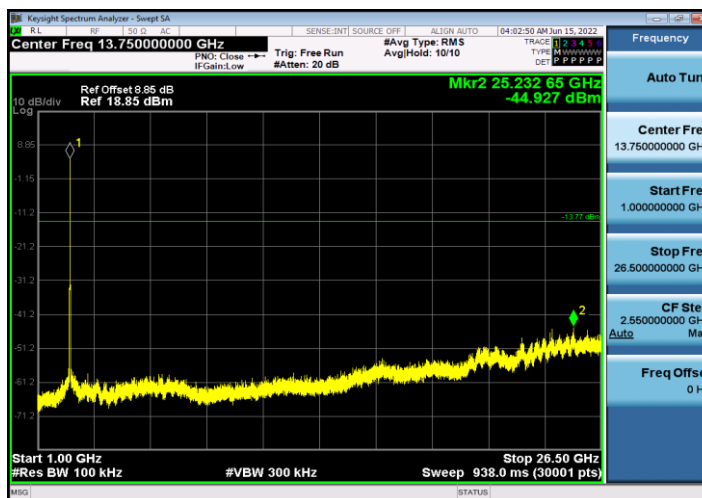





11G_Ant1_2412_0~Reference

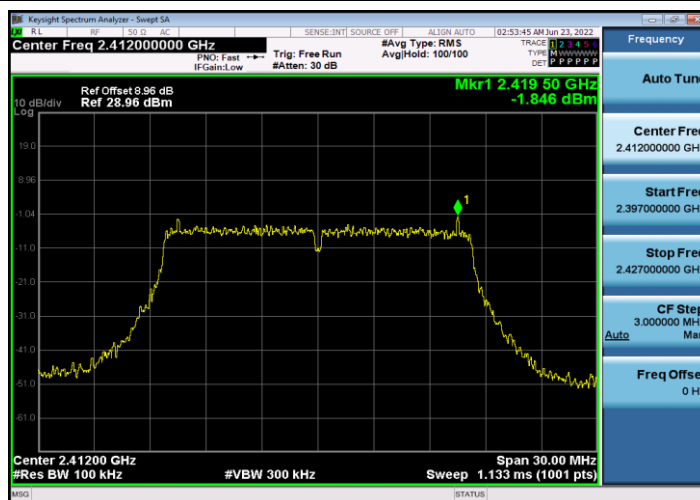


11G_Ant1_2412_30~1000

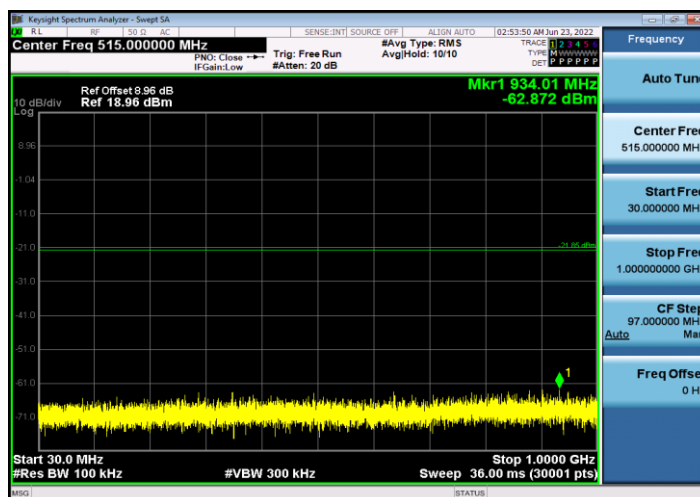


11G_Ant1_2412_1000~26500

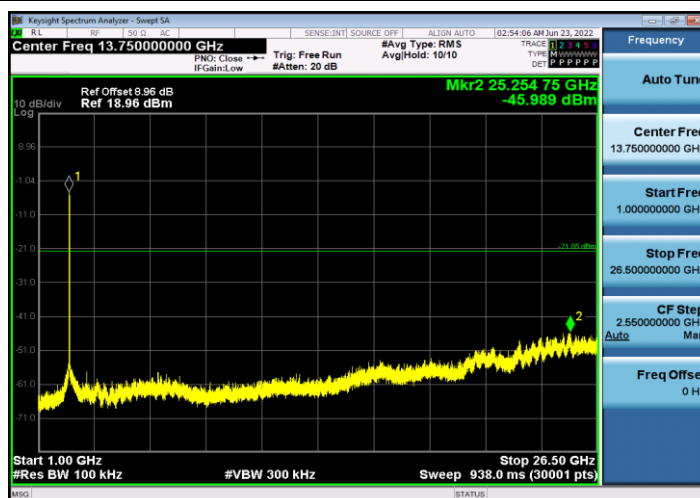


11G_Ant1_2437_0~Reference

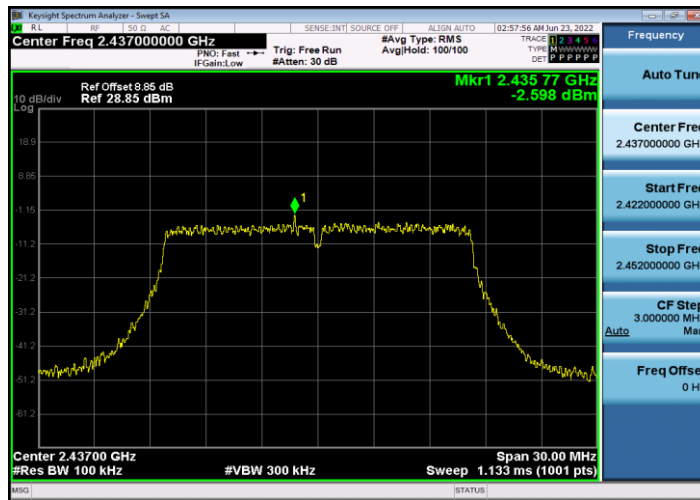


11G_Ant1_2437_30~1000

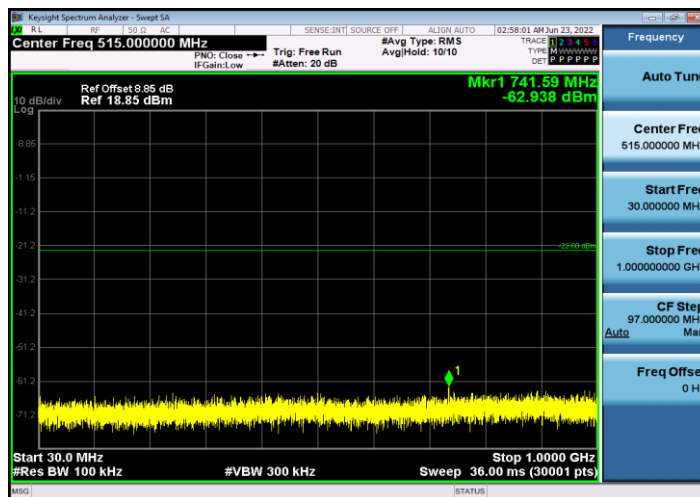


11G_Ant1_2437_1000~26500

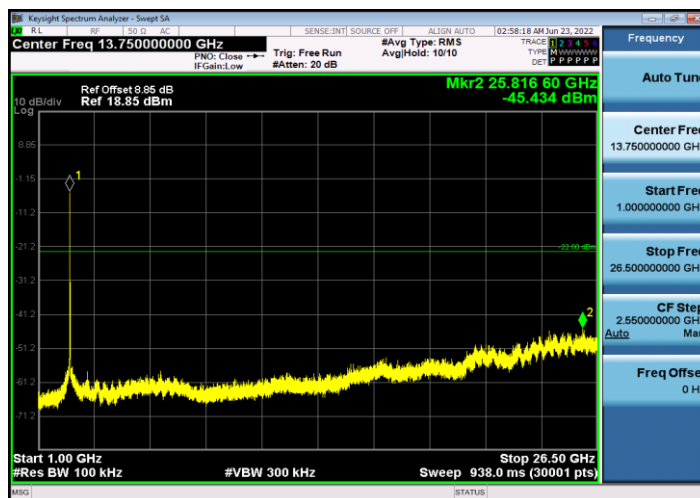


11G_Ant1_2462_0~Reference

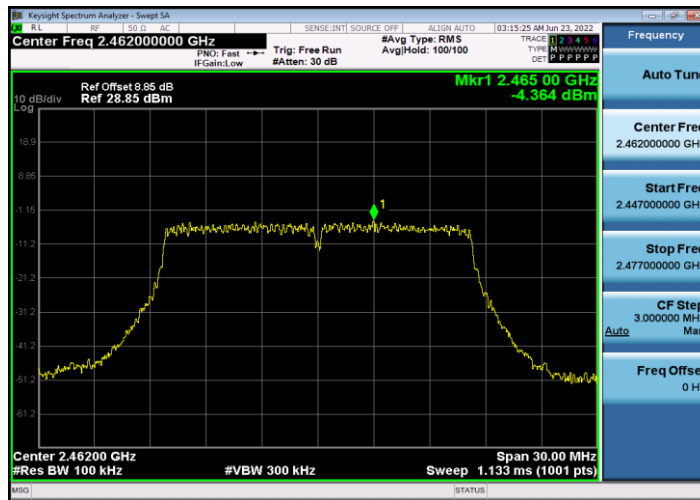

11G_Ant1_2462_30~1000

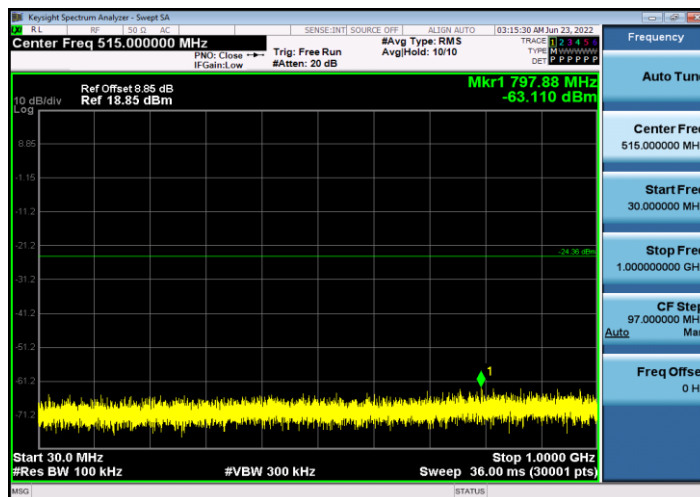


11G_Ant1_2462_1000~26500

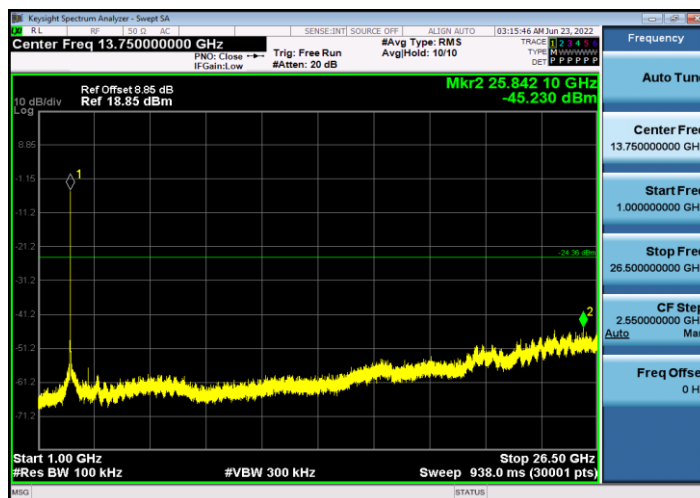





11N20SISO_Ant1_2412_0~Reference

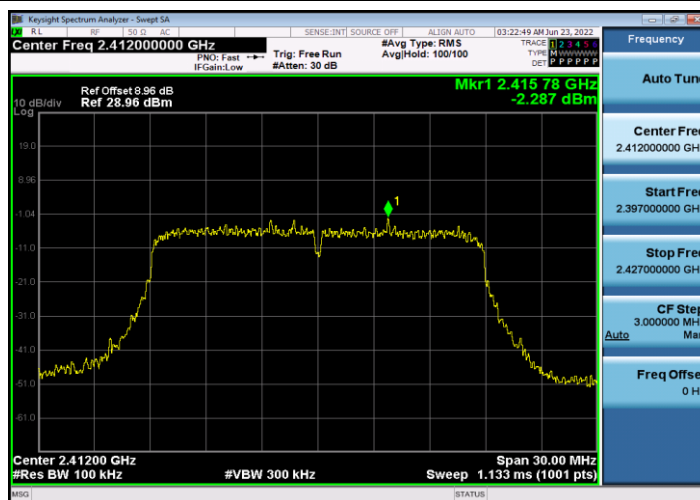

11N20SISO_Ant1_2412_30~1000

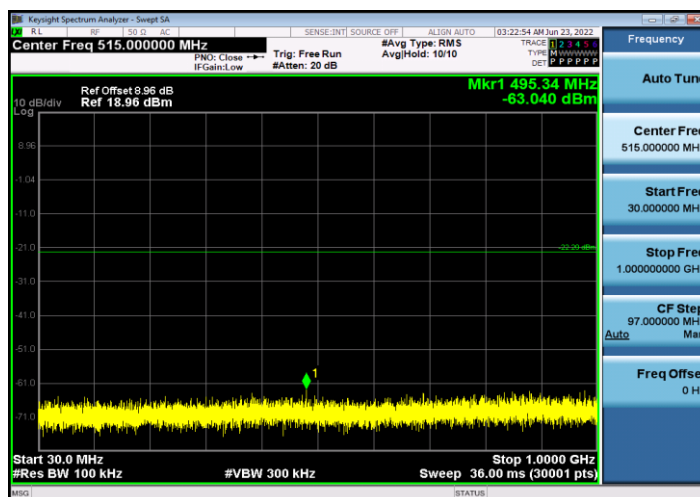


11N20SISO_Ant1_2412_1000~26500

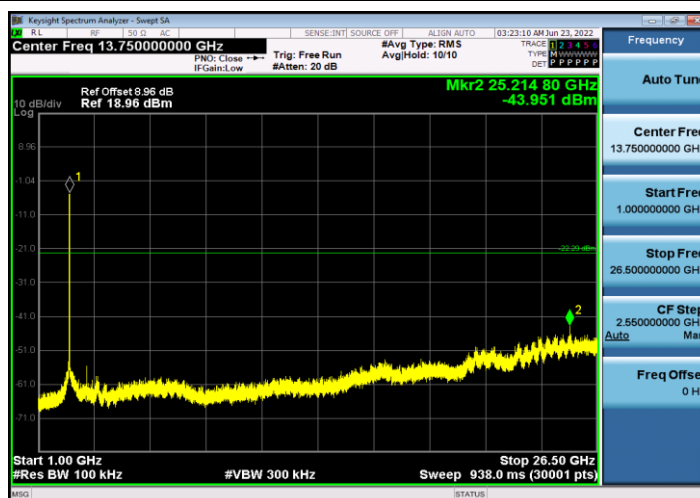





11N20SISO_Ant1_2437_0-Reference

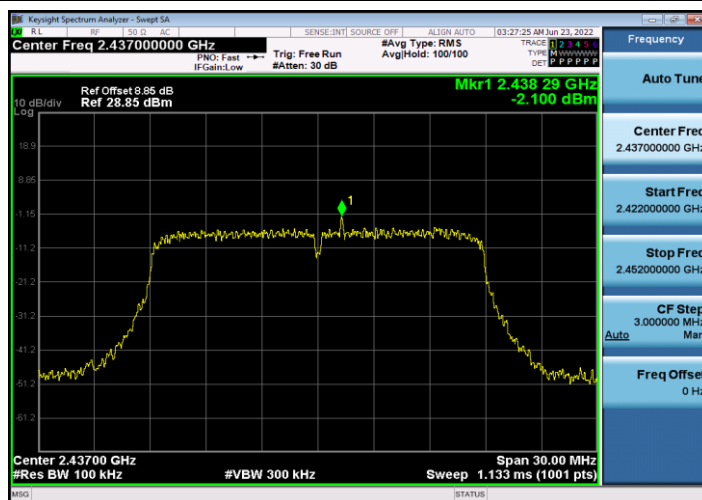

11N20SISO_Ant1_2437_30-1000

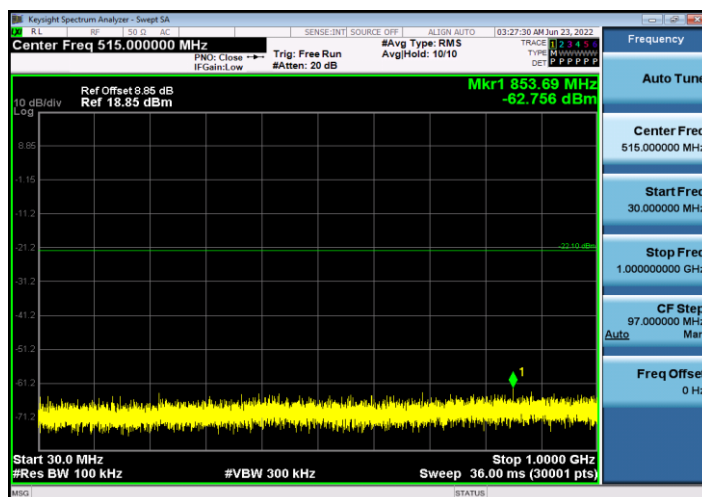


11N20SISO_Ant1_2437_1000-26500

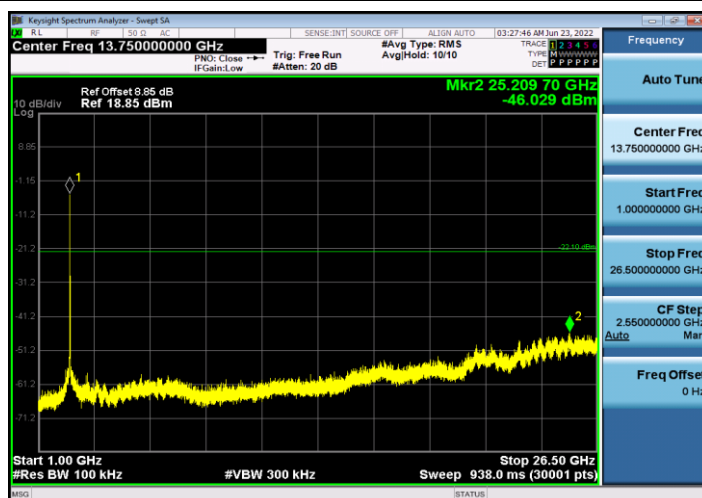





11N20SISO_Ant1_2462_0-Reference

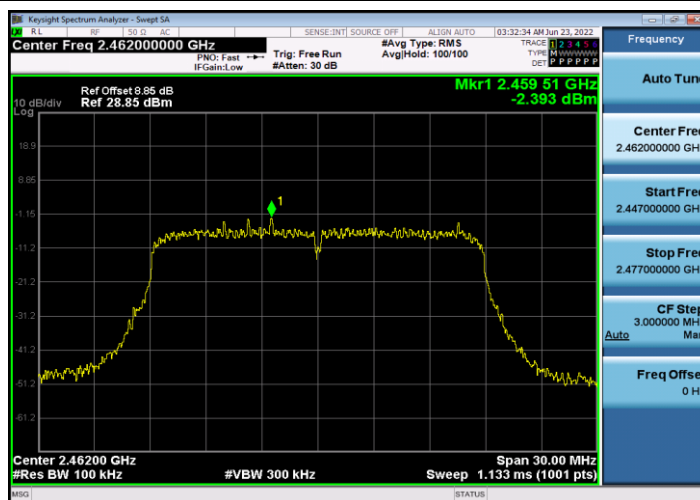

11N20SISO_Ant1_2462_30~1000

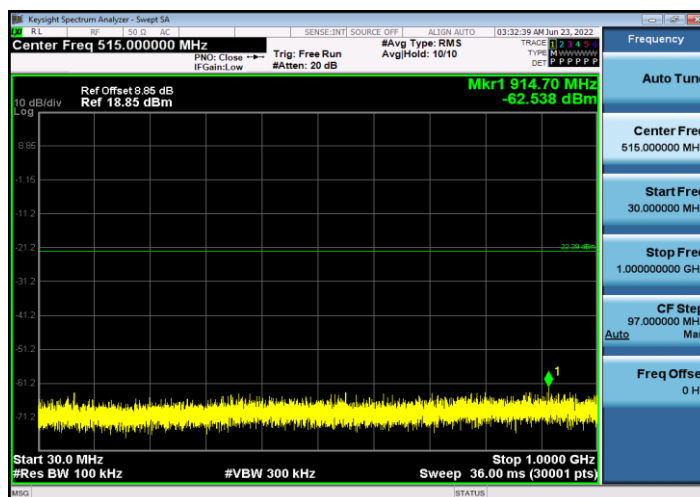

11N20SISO_Ant1_2462_1000~26500

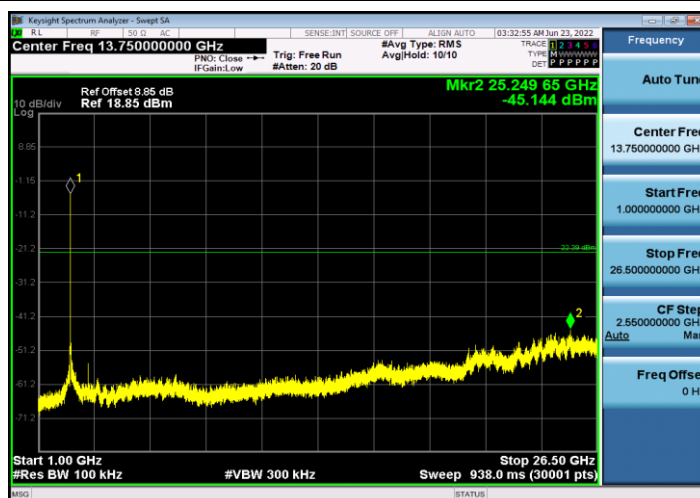



4.7 Emissions in restricted frequency bands

4.7.1 Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

4.7.2 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

4.7.3 Test Procedures

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


4.7.4 Test Setup

For Radiated emission above 1GHz

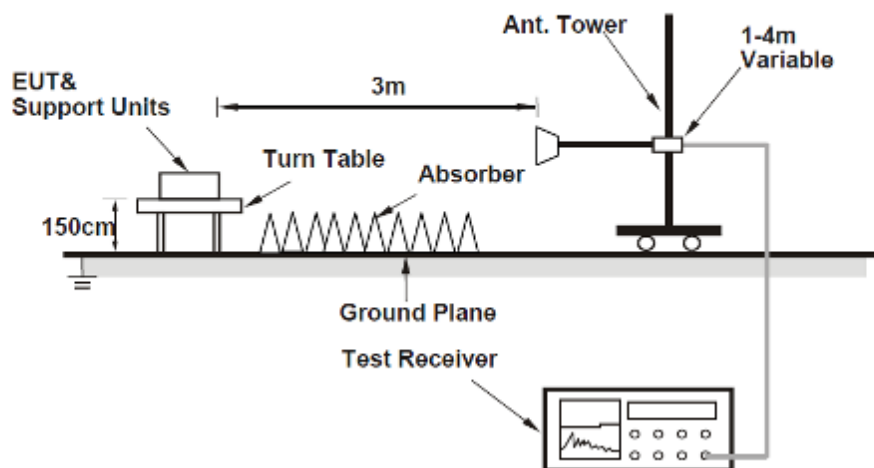

4.7.5 Test Results


802.11b-2412MHz/ Horizontal

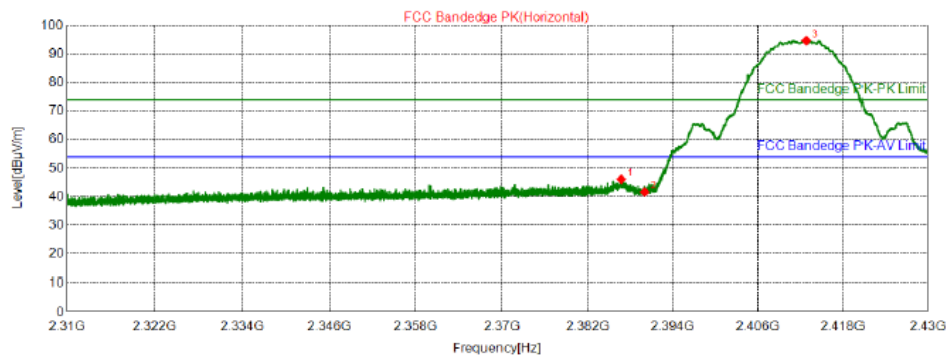

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2386.7100	63.79	46.06	74.00	27.94	155	238	Horizontal	PK
2	2390.0100	59.31	41.59	74.00	32.41	155	2	Horizontal	PK
3	2412.8850	112.34	94.69	74.00	-20.69	155	232	Horizontal	PK


802.11b-2412MHz/ Vertical

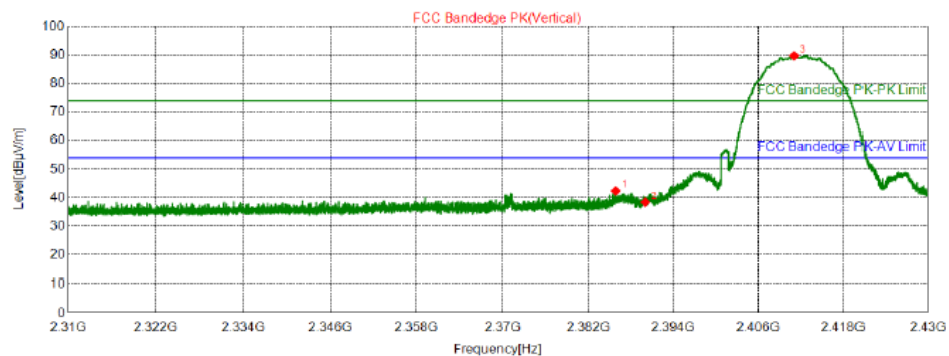

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.8400	60.09	42.36	74.00	31.64	155	271	Vertical	PK
2	2390.0100	56.15	38.43	74.00	35.57	155	265	Vertical	PK
3	2411.1000	107.38	89.72	74.00	-15.72	155	271	Vertical	PK


802.11b-2462MHz/ Horizontal

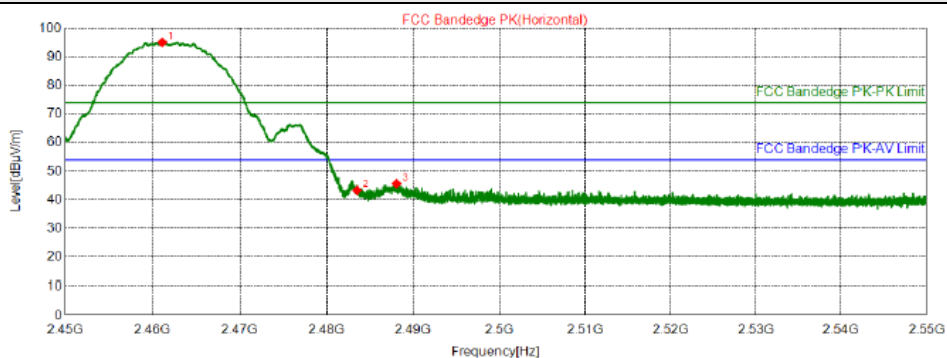

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2461.1000	112.61	95.11	74.00	-21.11	155	237	Horizontal	PK
2	2483.5000	60.73	43.29	74.00	30.71	155	237	Horizontal	PK
3	2488.0625	63.05	45.63	74.00	28.37	155	237	Horizontal	PK


802.11b-2462MHz/ Vertical

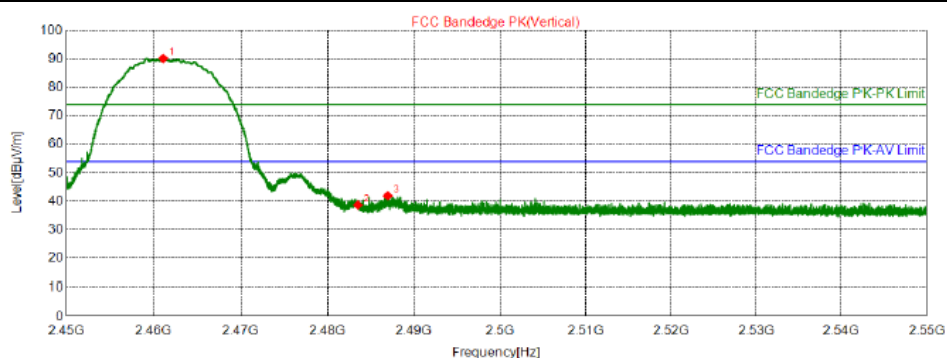

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2461.0875	107.68	90.18	74.00	-16.18	155	272	Vertical	PK
2	2483.5000	56.08	38.64	74.00	35.36	155	260	Vertical	PK
3	2486.9625	59.29	41.87	74.00	32.13	155	266	Vertical	PK


802.11g-2412MHz/ Horizontal-PK

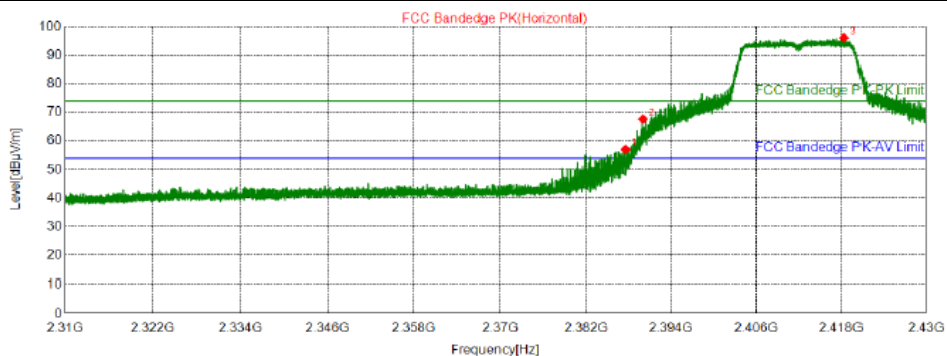

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.5650	74.72	56.99	74.00	17.01	155	238	Horizontal	PK
2	2390.0100	85.38	67.66	74.00	6.34	155	232	Horizontal	PK
3	2418.4650	113.71	96.08	74.00	-22.08	155	232	Horizontal	PK


802.11g-2412MHz/ Horizontal-AV

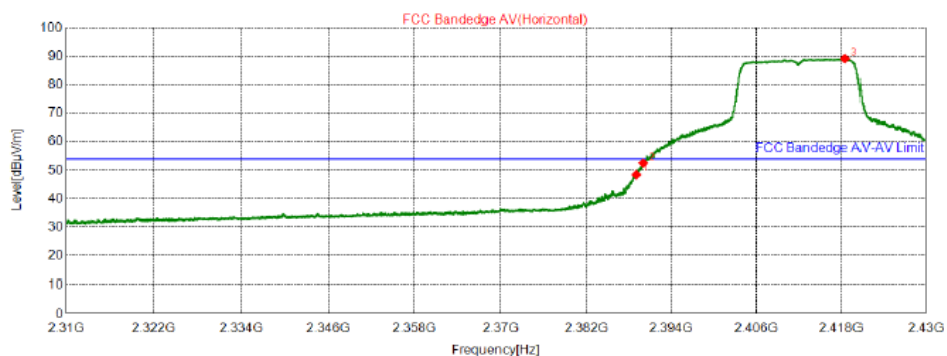

● QP Detector ★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.0500	65.89	48.42	54.00	5.58	150	241	Horizontal	PK
2	2390.0100	69.98	52.51	54.00	1.49	150	241	Horizontal	PK
3	2418.6150	106.55	89.17	54.00	-35.17	150	241	Horizontal	PK


802.11g-2412MHz/ Vertical

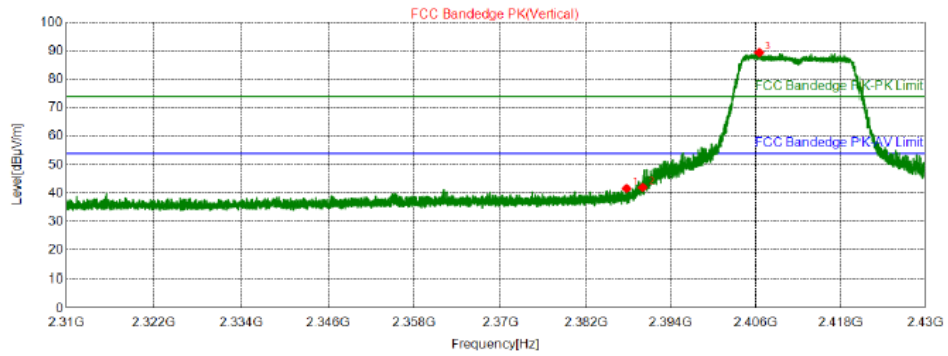

★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.7300	59.30	41.57	74.00	32.43	155	266	Vertical	PK
2	2390.0100	59.70	41.98	74.00	32.02	155	272	Vertical	PK
3	2406.5250	107.07	89.40	74.00	-15.40	155	158	Vertical	PK


802.11g-2462MHz/ Horizontal-PK

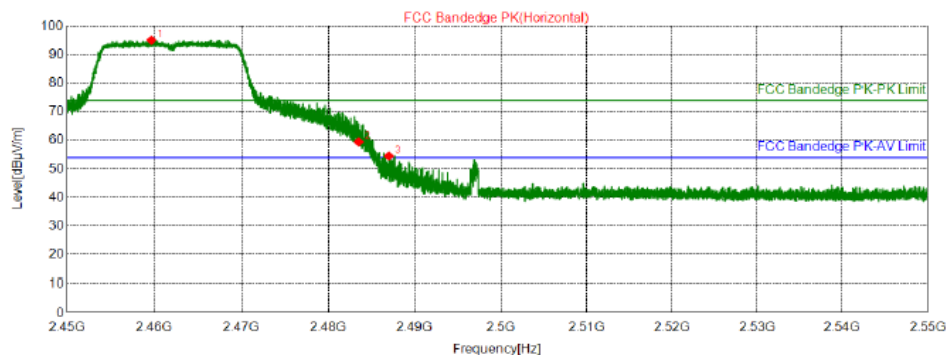

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2459.6625	112.60	95.09	74.00	-21.09	155	242	Horizontal	PK
2	2483.5000	76.87	59.43	74.00	14.57	155	242	Horizontal	PK
3	2487.0000	71.88	54.46	74.00	19.54	155	242	Horizontal	PK


802.11g-2462MHz/ Horizontal-AV

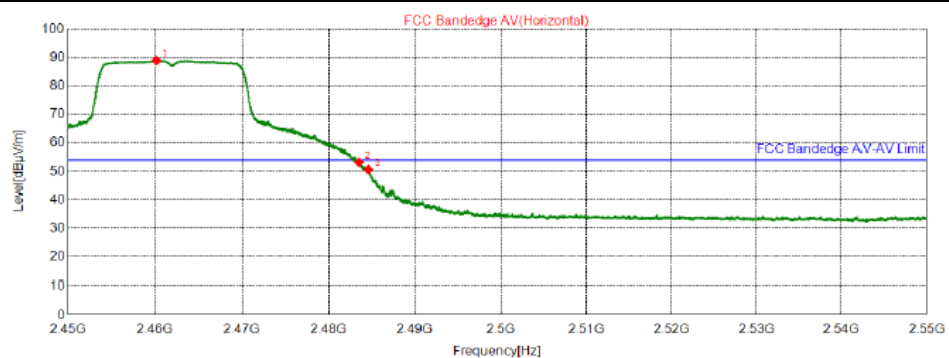

● QP Detector ★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2460.1500	106.12	88.88	54.00	-34.88	150	232	Horizontal	PK
2	2483.5000	70.35	53.19	54.00	0.81	150	232	Horizontal	PK
3	2484.5875	67.81	50.65	54.00	3.35	150	232	Horizontal	PK


802.11g-2462MHz/ Vertical

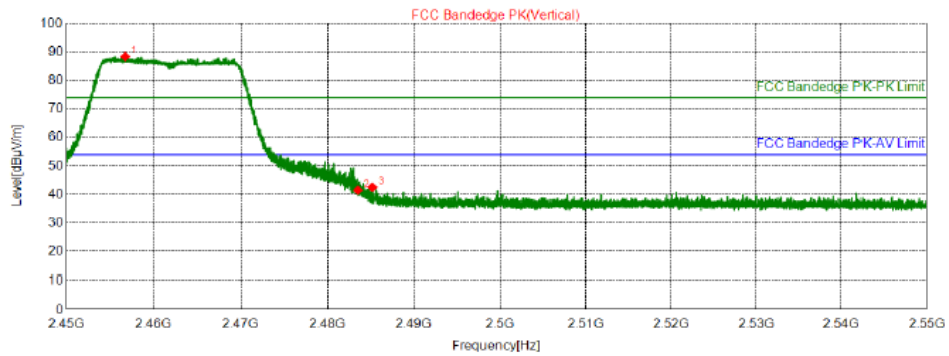

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2456.7375	105.89	88.37	74.00	-14.37	155	271	Vertical	PK
2	2483.5000	58.88	41.44	74.00	32.56	155	265	Vertical	PK
3	2485.1750	59.91	42.48	74.00	31.52	155	265	Vertical	PK


802.11n (HT20)-2412MHz/ Horizontal-PK

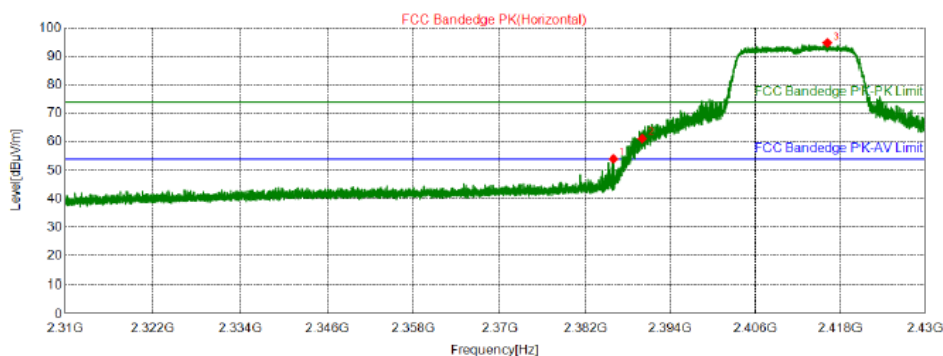

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.9450	71.70	53.97	74.00	20.03	155	6	Horizontal	PK
2	2390.0100	78.85	61.13	74.00	12.87	155	6	Horizontal	PK
3	2416.2600	112.44	94.80	74.00	-20.80	155	11	Horizontal	PK


802.11n (HT20)-2412MHz/ Horizontal-AV

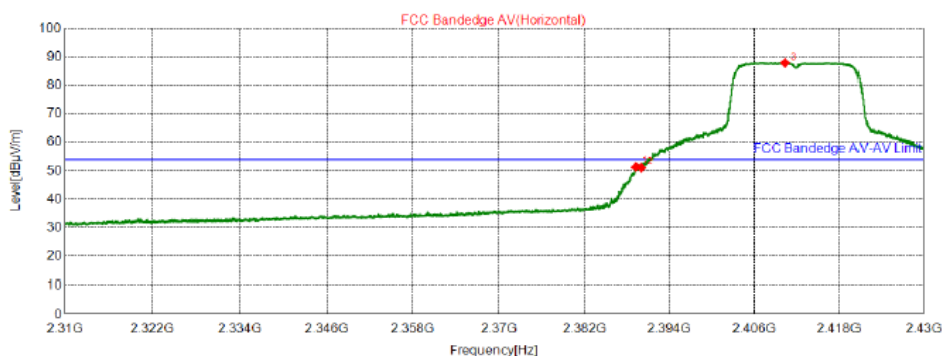

● QP Detector ★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.2450	68.77	51.30	54.00	2.70	150	10	Horizontal	PK
2	2390.0100	68.52	51.05	54.00	2.95	150	10	Horizontal	PK
3	2410.3800	105.31	87.91	54.00	-33.91	150	5	Horizontal	PK


802.11n (HT20)-2412MHz/ Vertical

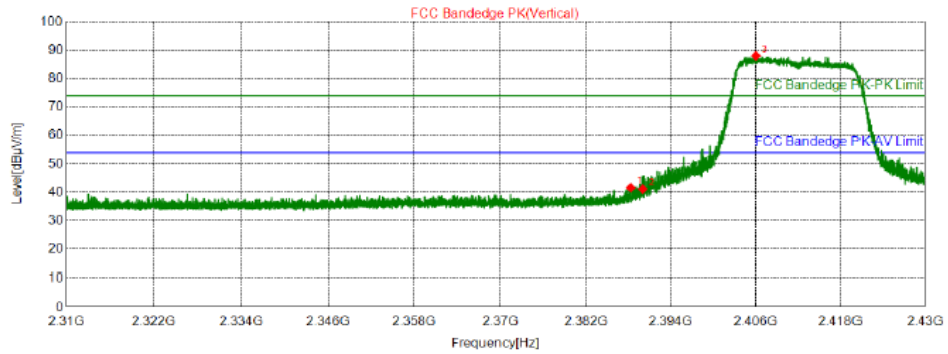

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.3150	59.28	41.55	74.00	32.45	155	158	Vertical	PK
2	2390.0100	58.81	41.09	74.00	32.91	155	164	Vertical	PK
3	2406.0450	105.69	88.02	74.00	-14.02	155	164	Vertical	PK


802.11n (HT20)-2462MHz/ Horizontal-PK

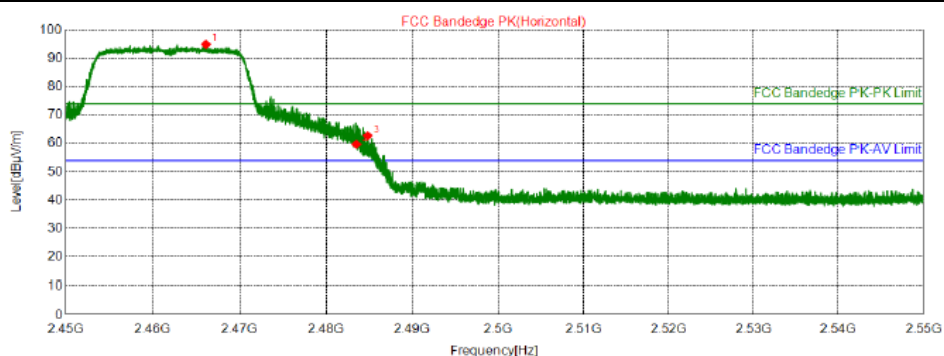

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2466.1125	112.43	94.94	74.00	-20.94	155	242	Horizontal	PK
2	2483.5000	77.13	59.69	74.00	14.31	155	9	Horizontal	PK
3	2484.8125	80.15	62.72	74.00	11.28	155	14	Horizontal	PK

802.11n (HT20)-2462MHz/ Horizontal-AV

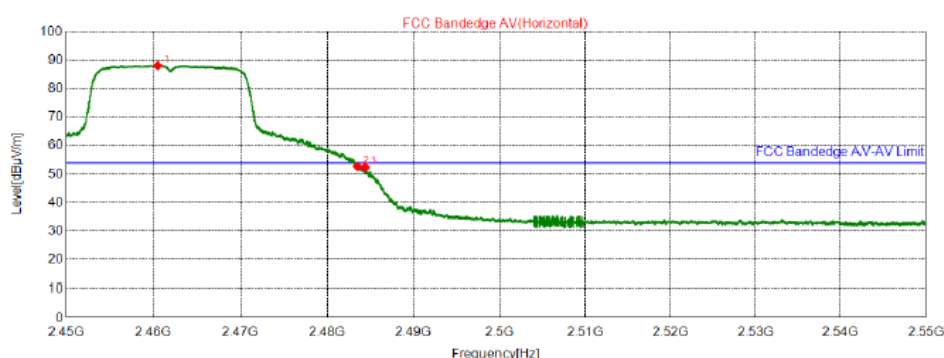


● QP Detector ★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2460.4875	105.34	88.10	54.00	-34.10	150	232	Horizontal	PK
2	2483.5000	69.85	52.69	54.00	1.31	150	238	Horizontal	PK
3	2484.3750	69.48	52.32	54.00	1.68	150	232	Horizontal	PK



802.11n (HT20)-2462MHz/ Vertical

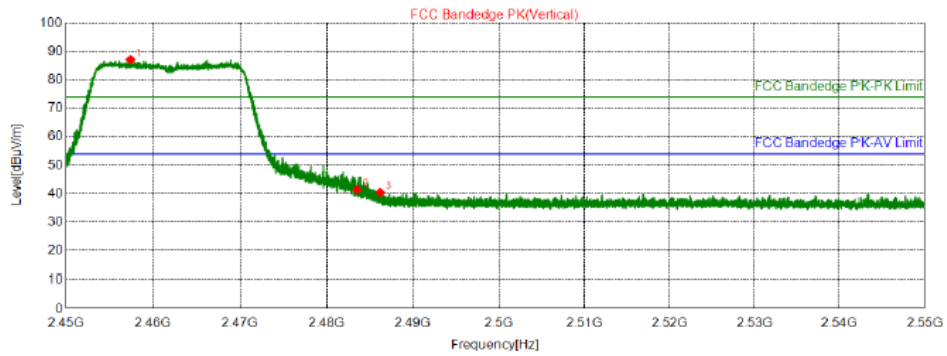

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2457.4125	104.61	87.10	74.00	-13.10	155	160	Vertical	PK
2	2483.5000	58.80	41.36	74.00	32.64	155	268	Vertical	PK
3	2486.1875	57.86	40.43	74.00	33.57	155	262	Vertical	PK

4.8 Radiated Emission Measurement

4.8.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.8.2 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq$ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup


For Radiated emission below 30MHz

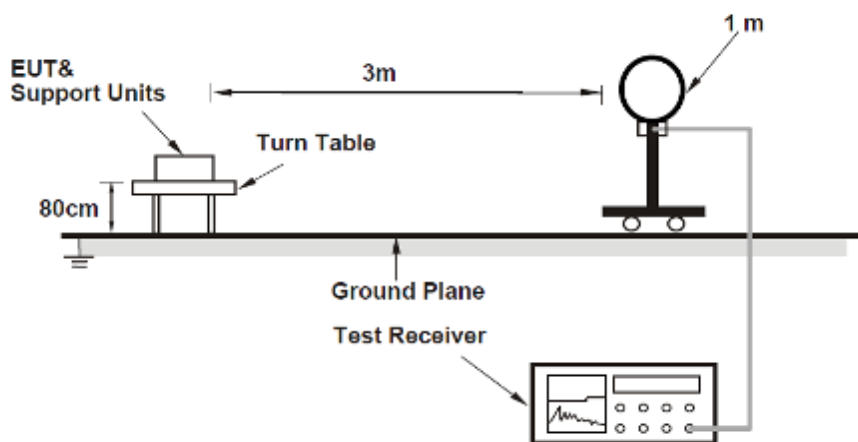

For Radiated emission 30MHz to 1GHz

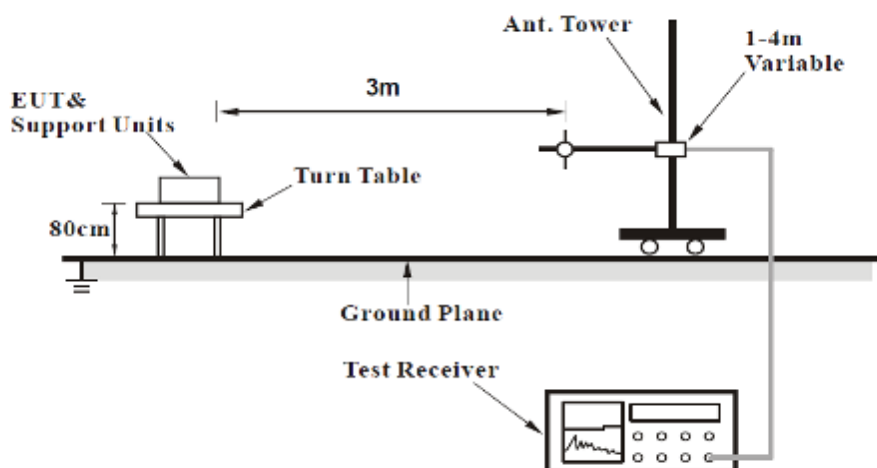

For Radiated emission above 1GHz

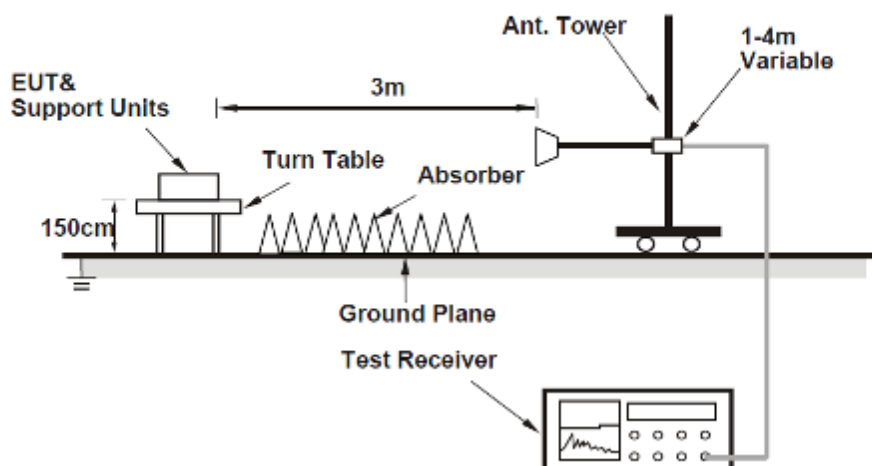



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 EUT Operating Conditions

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.8.6 Test Results

Radiated Emissions Range 9kHz~30MHz


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

Channel	Channel 1	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal

Test Plot:

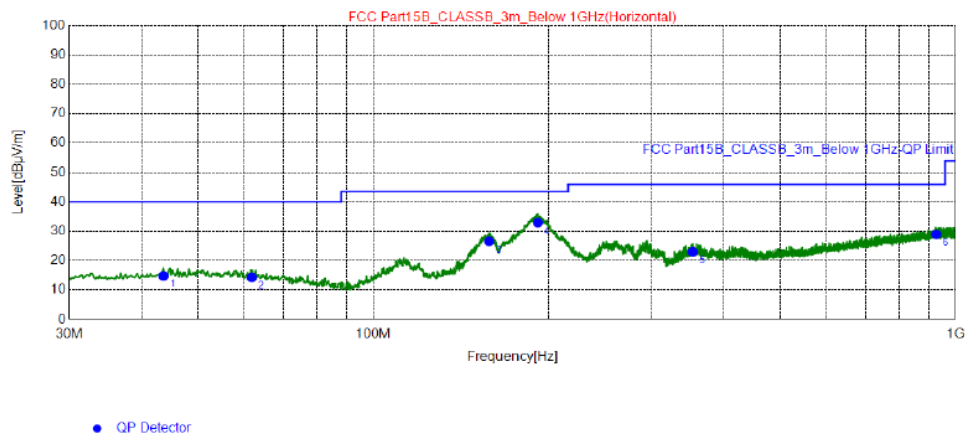

Final Data List


NO.	Freq. [MHz]	QP Reading [dB μV/m]	Factor [dB]	QP Value [dB μV/m]	QP Limit [dB μV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.58	25.7	-10.90	14.80	40.00	25.20	200	358	Horizontal
2	61.81	25.26	-10.99	14.27	40.00	25.73	200	165	Horizontal
3	158.0	36.64	-10.07	26.57	43.50	16.93	200	268	Horizontal
4	191.6	45.11	-12.16	32.95	43.50	10.55	200	117	Horizontal
5	353.7	30.35	-7.36	22.99	46.00	23.01	100	106	Horizontal
6	926.4	25.35	3.60	28.95	46.00	17.05	200	114	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	Channel 1	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical

Test Plot:

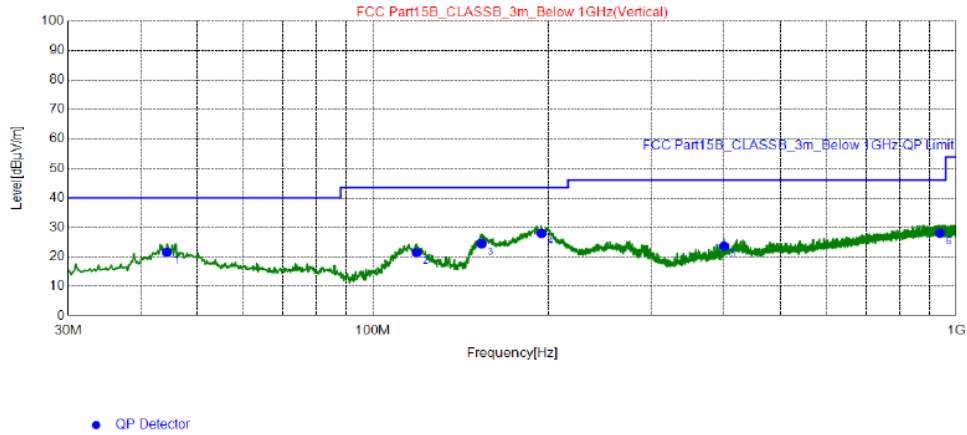

Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.35	32.46	-10.85	21.61	40.00	18.39	100	129	Vertical
2	118.8	34.23	-12.80	21.43	43.50	22.07	100	72	Vertical
3	153.5	34.49	-9.92	24.57	43.50	18.93	100	26	Vertical
4	194.5	40.32	-12.29	28.03	43.50	15.47	100	181	Vertical
5	399.9	30.27	-6.64	23.63	46.00	22.37	200	278	Vertical
6	938.1	24.36	3.78	28.14	46.00	17.86	200	221	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



Radiated Emission Range 1GHz~10th Harmonic

802.11b

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4823.3000	50.37	74.00	23.63	-12.43	H	PK
2	4825.0000	45.57	54.00	8.43	-12.42	H	AV
3	4823.3000	46.70	74.00	27.30	-12.43	V	PK
4	4825.0000	41.84	54.00	12.16	-12.42	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4874.3000	50.31	74.00	23.69	-12.28	H	PK
2	4876.0000	42.15	54.00	11.85	-12.28	H	AV
3	4874.3000	48.22	74.00	25.78	-12.28	V	PK
4	4876.0000	39.85	54.00	14.15	-12.28	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4923.6000	49.75	74.00	24.25	-12.15	H	PK
2	4925.3000	44.74	54.00	9.26	-12.14	H	AV
3	4923.6000	48.40	74.00	25.60	-12.15	V	PK
4	4925.3000	43.40	54.00	10.60	-12.14	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level



802.11g

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4825.0000	39.19	74.00	34.81	-12.42	H	PK
2	4828.4000	35.44	54.00	18.56	-12.41	H	AV
3	4821.6000	38.14	74.00	35.86	-12.43	V	PK
4	4825.0000	32.99	54.00	21.01	-12.42	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4867.5000	41.52	74.00	32.48	-12.30	H	PK
2	4876.0000	36.60	54.00	17.40	-12.28	H	AV
3	4867.5000	37.67	74.00	36.33	-12.30	V	PK
4	4867.5000	30.19	54.00	23.81	-12.30	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level



Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4925.3000	41.90	74.00	32.10	-12.14	H	PK
2	4921.9000	36.74	54.00	17.26	-12.15	H	AV
3	4921.9000	41.56	74.00	32.44	-12.15	V	PK
4	4921.9000	35.09	54.00	18.91	-12.15	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

802.11n (HT20)

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4825.0000	38.10	74.00	35.90	-12.42	H	PK
2	4825.0000	33.49	54.00	20.51	-12.42	H	AV
3	7237.3000	36.82	74.00	37.18	-8.22	V	PK
4	7237.3000	31.96	54.00	22.04	-8.22	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4872.6000	41.02	74.00	32.98	-12.29	H	PK
2	4882.8000	36.74	54.00	17.26	-12.26	H	AV
3	4867.5000	38.87	74.00	35.13	-12.30	V	PK
4	4876.0000	33.94	54.00	20.06	-12.28	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4925.3000	38.88	74.00	35.12	-12.14	H	PK
2	4925.3000	35.46	54.00	18.54	-12.14	H	AV
3	4925.3000	38.40	74.00	35.60	-12.14	V	PK
4	4925.3000	34.13	54.00	19.87	-12.14	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

----- END -----