

Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

FCC 2.4GWLAN TEST REPORT

PRODUCT	4G Wireless Smart Module
BRAND	SIMCom
MODEL	SIM8905A-R2
APPLICANT	SIMCom Wireless Solutions Limited
FCC ID	2AJYU-8PSA303
ISSUE DATE	Septmber 15, 2022
STANDARD(S)	FCC Part15

Prepared by: Tao Lingyan

Signature



Reviewed by: Yang Fan

Signature



Approved by: Liu Long

Signature

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1. SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD(S)	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	4
2. GENERAL INFORMATION OF THE LABORATORY	5
2.1 TESTING LABORATORY	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	5
2.3 PROJECT INFORMATION	5
3. GENERAL INFORMATION OF THE CUSTOMER.....	6
3.1 APPLICANT	6
3.2 MANUFACTURER	6
4. GENERAL INFORMATION OF THE PRODUCT.....	7
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	7
4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
5. TEST CONFIGURATION INFORMATION	8
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	8
5.2 TEST EQUIPMENTS UTILIZED.....	8
5.3 MEASUREMENT UNCERTAINTY	10
6. TEST RESULTS.....	11
6.1 OUTPUT POWER-CONDUCTED	11
6.2 PEAK POWER SPECTRAL DENSITY	15
6.3 OCCUPIED 6dB BANDWIDTH.....	18
6.4 99% OCCUPIED BANDWIDTH.....	21
6.5 BAND EDGES COMPLIANCE.....	24
6.6 TRANSMITTER SPURIOUS EMISSION-CONDUCTED.....	26
6.7 TRANSMITTER SPURIOUS EMISSION-RADIATED	29
ANNEX A: REVISED HISTORY	43
ANNEX B: ACCREDITATION CERTIFICATE.....	44

1. Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard(s)	Title	Version
1	FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2020

1.2 Reference Documents

No.	Test Standard(s)	Title	Version
1	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
2	KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	2019
3	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017

1.3 Summary of Test Results

Measurement Items	Sub-clause of Part15C	Verdict
Maximum Peak Output Power	15.247(b)	Pass
Peak Power Spectral Density	15.247(e)	Pass
6dB Occupied Bandwidth	15.247(a)	Pass
99% Occupied Bandwidth	N/A	Pass
Band Edges Compliance	15.247(d)	Pass
Transmitter Spurious Emission-Conducted	15.247(d)	Pass
Transmitter Spurious Emission-Radiated	15.247/15.205/15.209	Pass

Note:

The IM8905A-R2 manufactured by SIMCom Wireless Solutions Limited. Incorporated is new products for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

a. All the test data for each data were verified, but only the worst case was reported.

1.4 Data Provided by Applicant

No.	Item(s)	Data
1	Antenna gain of EUT	5 dBi

Note: The data of 1.3 is provided by the customer may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

2. General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	958356
FCC Designation No.	CN1177

2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	101kPa

2.3 Project Information

Project Manager	Xu Yuting
Test Date	June 8, 2022 to August 19, 2022

3. General Information of The Customer

3.1 Applicant

Company	SIMCom Wireless Solutions Limited
Address	8F, Bldg3 No.289 Linhong Rd, ChangNing District Shanghai, PRC China
Telephone	02131575100/15102196457

3.2 Manufacturer

Company	SIMCom Wireless Solutions Limited
Address	8F, Bldg3 No.289 Linhong Rd, ChangNing District Shanghai, PRC China

4. General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	4G Wireless Smart Module
Model	SIM8905A-R2
Date of Receipt	August 2,2022/ August 3,2022
EUT ID*	N01/N02
SN/IMEI	861384050078878861384050080916/ 861384050078126861384050080163
Supported Radio Technology and Bands	LTE Band 2/4/5/7/8/12/13/17/25/26/41 BT BR EDR,BLE WLAN 802.11 b, g,n GPS/Glonass/BDS/Gallileo
Hardware Version	V1.03
Software Version	R2148.02
FCC ID	2AJYU-8PSA303
NOTE: EUT ID is the internal identification code of the laboratory.	

4.2 Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF Cable	N/A	N/A
NOTE: AE ID is the internal identification code of the laboratory.			

5. Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25℃	-35℃	75℃
Working Voltage of EUT	Normal	Minimum	Maximum
	3.9V	3.4V	4.4V

5.2 Test Equipments Utilized

5.2.1 Conducted Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Programmable Power Supply	Keithley 2303	4039070	Starpont	May 10, 2021	1.5years
2	Vector Signal Generator	SMBV100A	257904	R&S	February 21, 2022	1 year
3	Temperature box	B-TF-107C	BTF107C-201804107	Boyi	May 10, 2021	1.5 years
4	Spectrum Analyzer	FSQ40	200063	R&S	November 02, 2021	1 year
5	USB Wideband Power Sensor	U2021XA	MY56410009	Keysight	February 21, 2022	1 year
6	Simultaneous Sampling DQA	U2531A	TW56183514	Agilent	March 02, 2022	1 year
7	Vector Signal Generator	SMU200A	104684	R&S	May 10, 2021	1.5 years
8	Wireless communication comprehensive tester	CMW270	100919	R&S	May 10, 2021	1.5 years
9	Eagle Test Software	Eagle V3.3	N/A	ECIT	N/A	N/A

5.2.2 Radiated Emission Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	May 10,2021	1.5 years
2	Universal Radio Communication	CMW500	104178	R&S	May 10,2021	1.5 years

	Tester					
3	EMI Test Receiver	ESU40	100307	R&S	February 23, 2022	1 year
4	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	March 11, 2022	1 year
5	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	March 9, 2022	2 years
6	2-Line V-Network	ENV216	101380	R&S	February 21, 2022	1 year
7	EMI Test Software	EMC32 V9.15.00	N/A	R&S	N/A	N/A

5.2.3 Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz

5.3 Measurement Uncertainty

Item(s)	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2412MHz-2462MHz	95%	0.544dB
Peak Power Spectral Density	2412MHz-2462MHz	95%	0.502dB
Occupied 6dB Bandwidth	2412MHz-2462MHz	95%	69.26kHz
Band Edges-Conducted	2412MHz-2462MHz	95%	0.544dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

6. Test Results

6.1 Output Power-Conducted

6.1.1. Measurement Limit


Standard	Limit (dBm)
FCC 47 Part 15.247(b)(3)	<30

6.1.2. Test Procedure

The measurement is according to ANSI C63.10 clause 11.9.

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto.
6. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
7. If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
8. Trace average at least 100 traces in power averaging (i.e., RMS) mode.i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum

6.1.3. Test setup

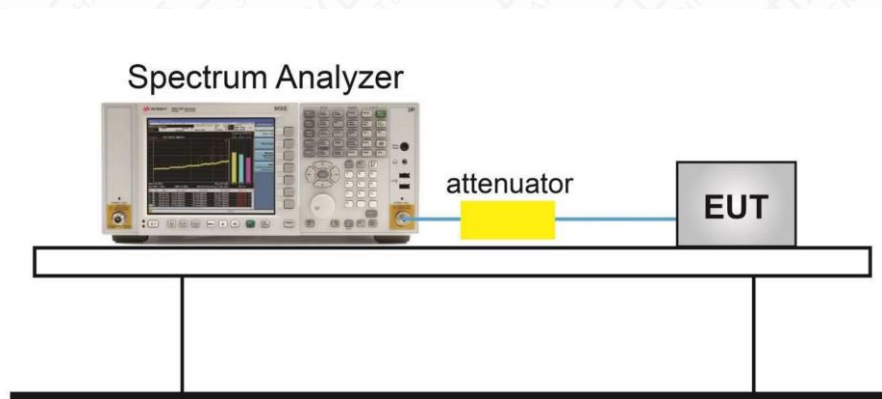


Maximum Average Output Power-conducted

Measurement Results


Mode	Channel	Conducted (dBm)	E.I.R.P.(dBm)	Duty cycle factor (dB)
802.11b	1	19.28	24.28	0.10
	6	21.82	26.82	0.10
	11	19.51	24.51	0.10
802.11g	1	13.45	18.45	0.60
	6	17.49	22.49	0.60
	11	12.93	17.93	0.60
802.11n(20MHz)	1	12.13	17.13	0.62
	6	17.30	22.3	0.62
	11	13.63	18.63	0.62

Conclusion: PASS

TEST PLOTS:

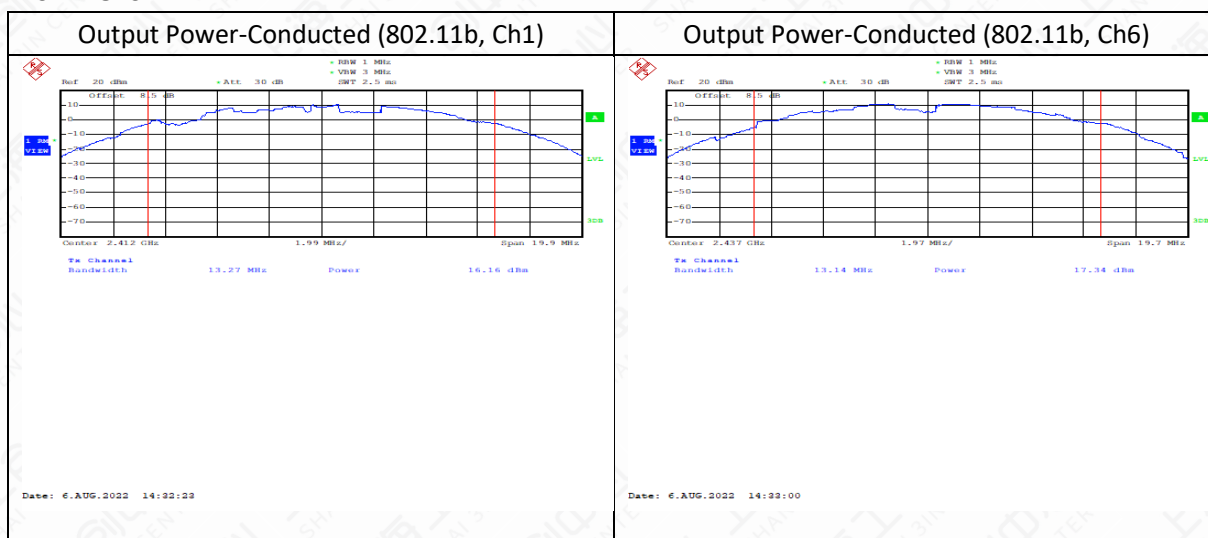


Output Power-Conducted (802.11b, Ch11)

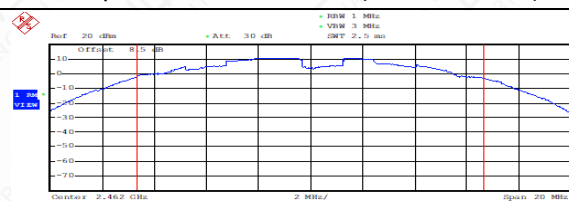

Center 2.402 GHz Span 20 MHz
Tx Channel Bandwidth 13.33 MHz Power 17.06 dBm

Date: 6.AUG.2022 14:22:36


Output Power-Conducted (802.11g, Ch1)

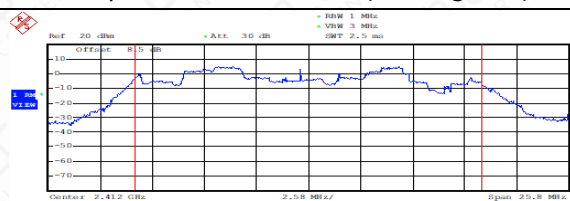

Center 2.412 GHz Span 20 MHz
Tx Channel Bandwidth 17.18 MHz Power 10.40 dBm

Date: 12.AUG.2022 11:26:28


Output Power-Conducted (802.11g, Ch6)

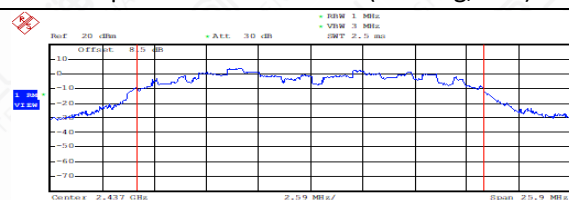

Center 2.437 GHz Span 20 MHz
Tx Channel Bandwidth 17.24 MHz Power 9.82 dBm

Date: 12.AUG.2022 11:27:01


Output Power-Conducted (802.11g, Ch11)

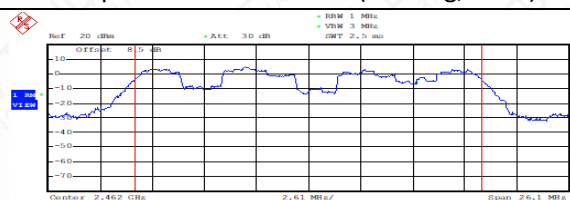

Center 2.452 GHz Span 20 MHz
Tx Channel Bandwidth 17.37 MHz Power 10.97 dBm

Date: 12.AUG.2022 11:27:27


Output Power-Conducted (802.11n-HT20, Ch1)

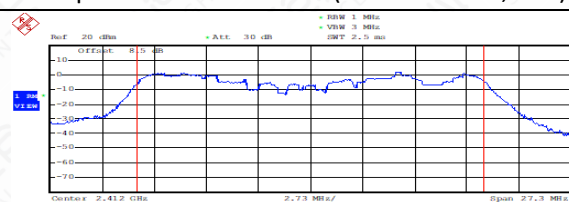

Center 2.412 GHz Span 20 MHz
Tx Channel Bandwidth 18.2 MHz Power 8.73 dBm

Date: 12.AUG.2022 11:28:24


Output Power-Conducted (802.11n-HT20, Ch6)

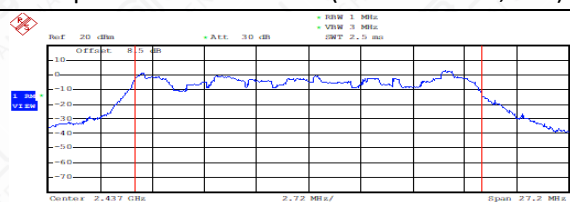

Center 2.437 GHz Span 20 MHz
Tx Channel Bandwidth 18.14 MHz Power 8.04 dBm

Date: 12.AUG.2022 11:28:55

Output Power-Conducted (802.11n-HT20, Ch11)

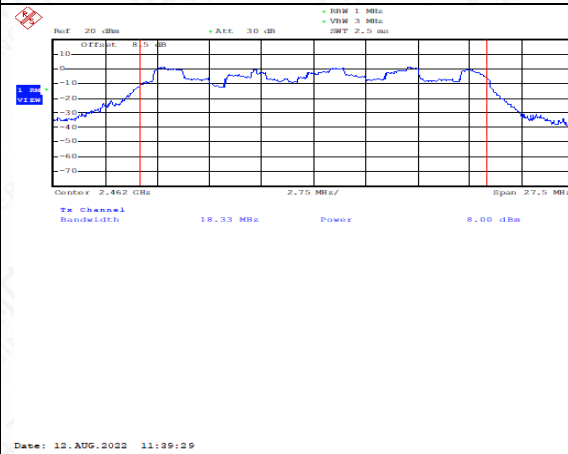

6.2 Peak Power Spectral Density

6.2.1. Measurement Limit


Standard	Limit
FCC 47 Part 15.247(e)	$\leq 8\text{dBm}/3\text{ KHz}$

6.2.2. Test procedures

The measurement is according to ANSI C63.10 clause 11.10.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW=3kHz
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat


6.2.3. Test setup

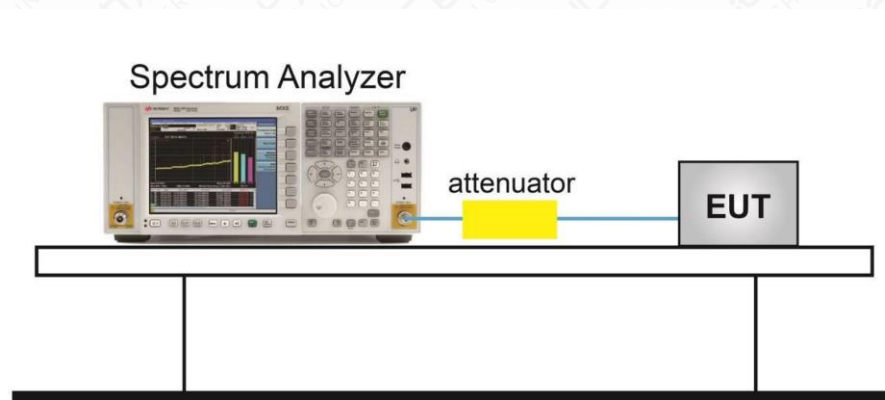

Measurement Result

Modulation type	Frequency (MHz)	PSD (dBm/3kHz)
802.11 b	2412	-12.930
	2437	-13.076
	2462	-12.928
802.11 g	2412	-9.851
	2437	-10.264
	2462	-9.874
802.11 n-HT20	2412	-11.537
	2437	-12.409
	2462	-11.830

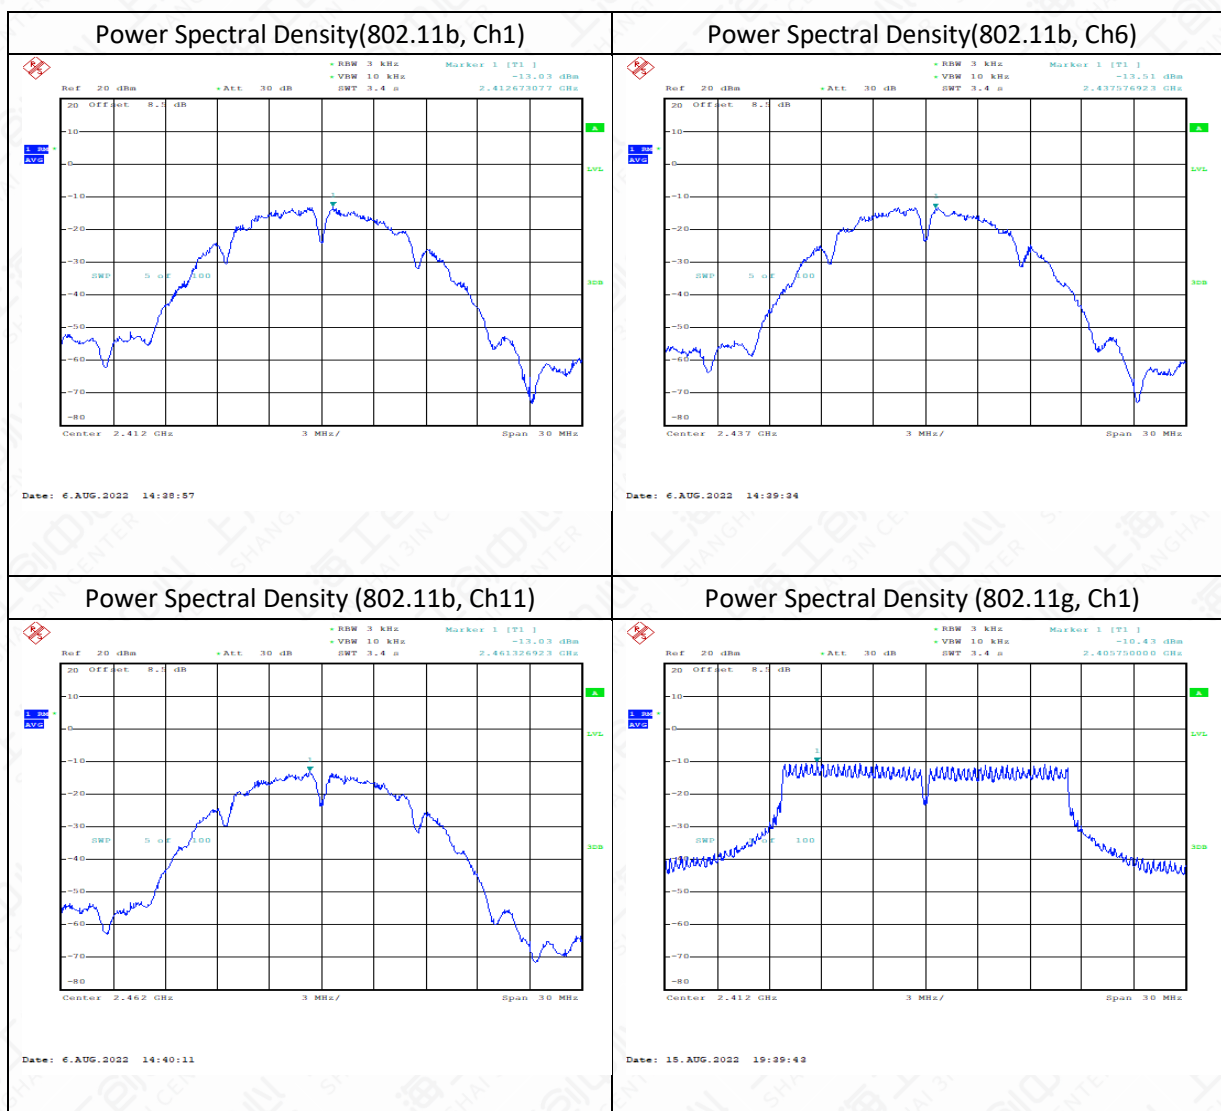

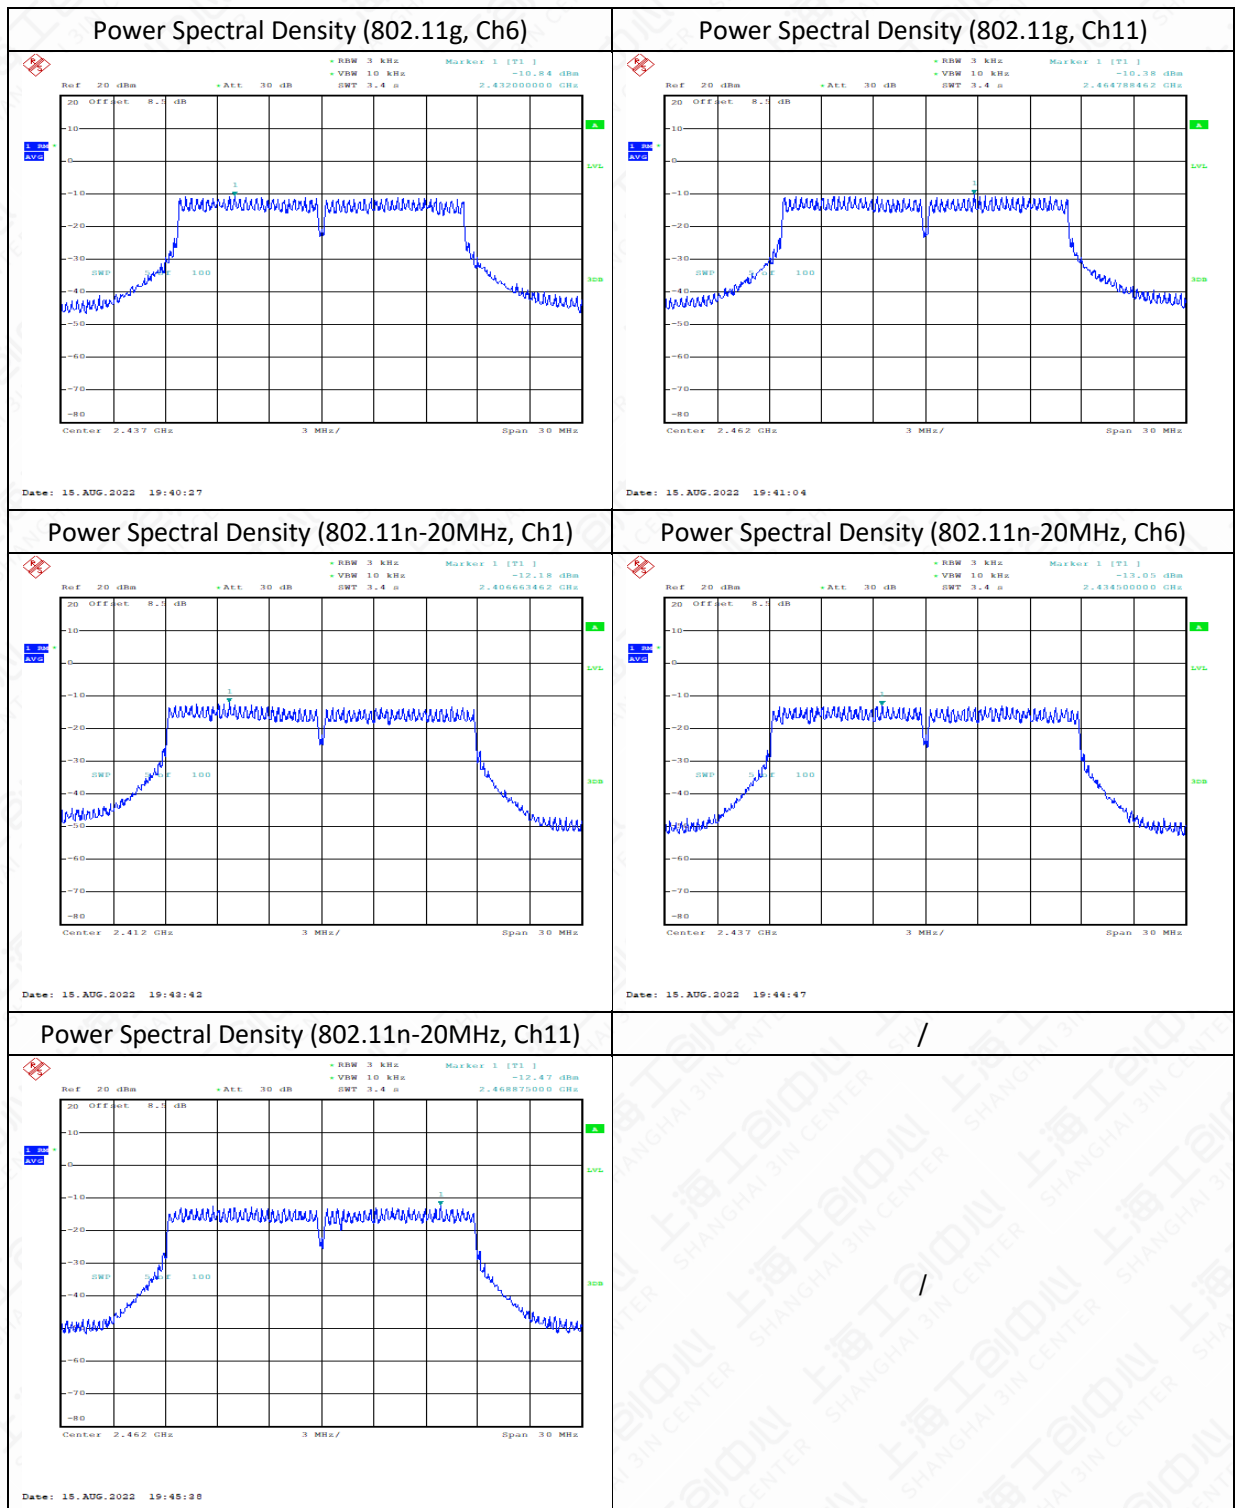

6.3 Occupied 6dB Bandwidth


6.3.1. Measurement Limit

Standard	Limit(KHz)
FCC 47 Part 15.247(a) (2)	≥500KHz

6.3.2. Test procedures

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.3. Test Setup

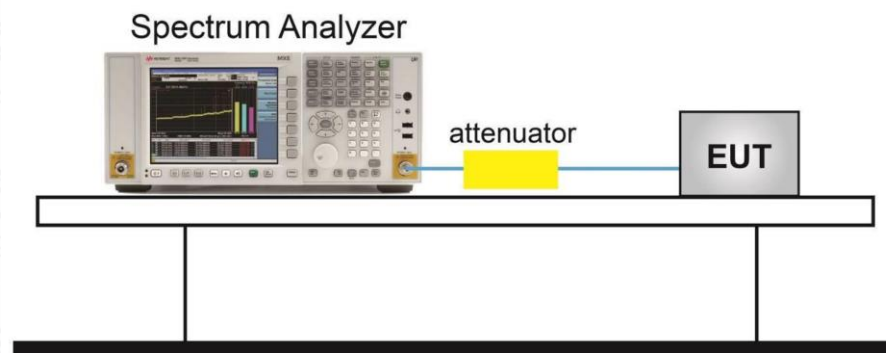



Measurement Results

Mode	Test Result (MHz)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11b	8.59	8.08	8.59
802.11g	16.35	16.41	16.41
802.11n(20MHz)	17.63	17.56	17.69

Conclusion: PASS

Test graphs as below

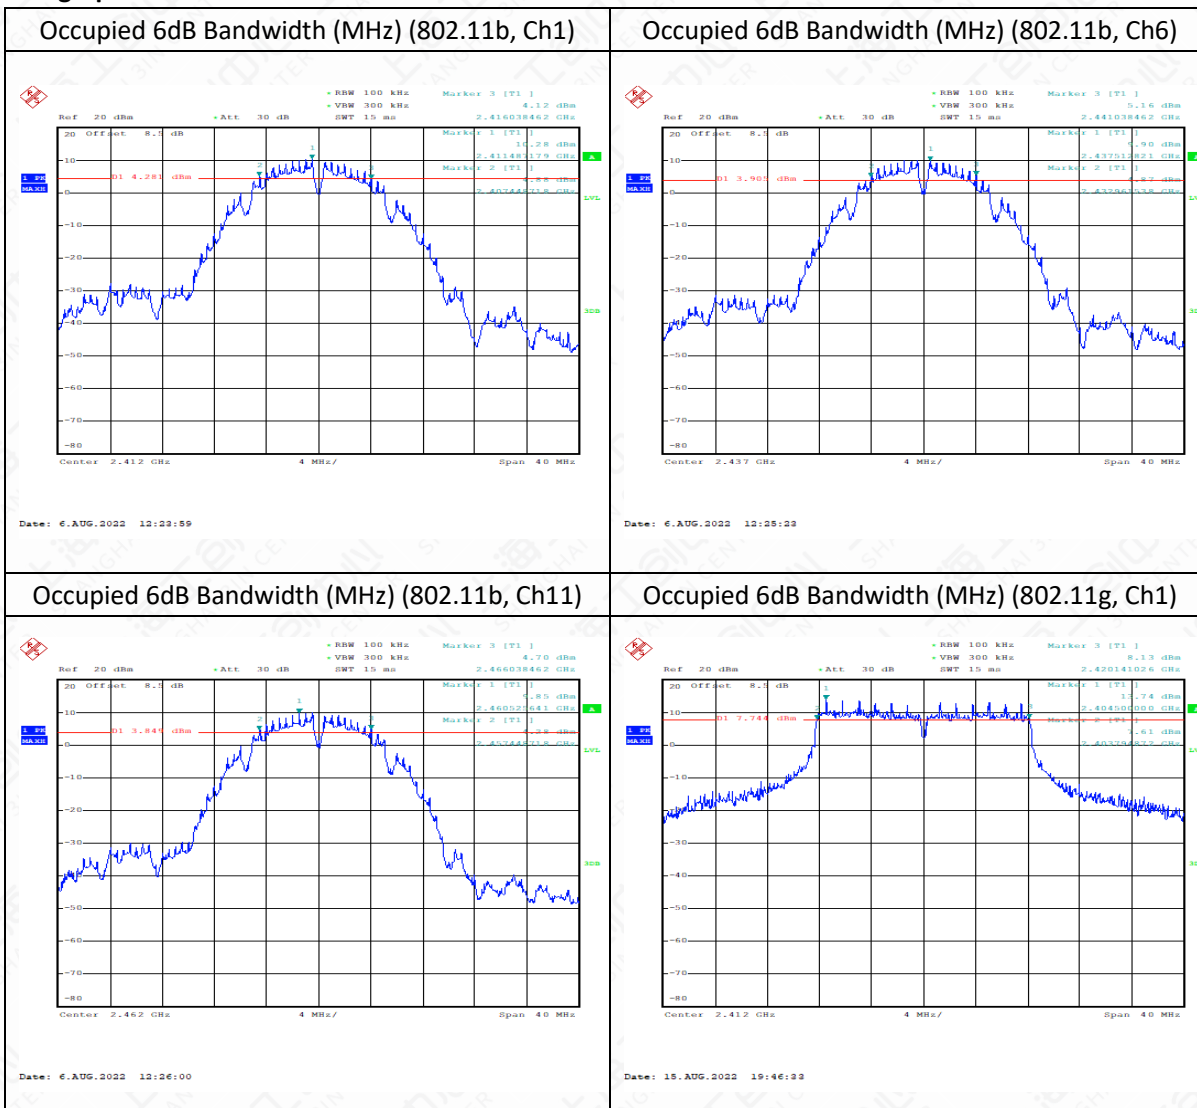

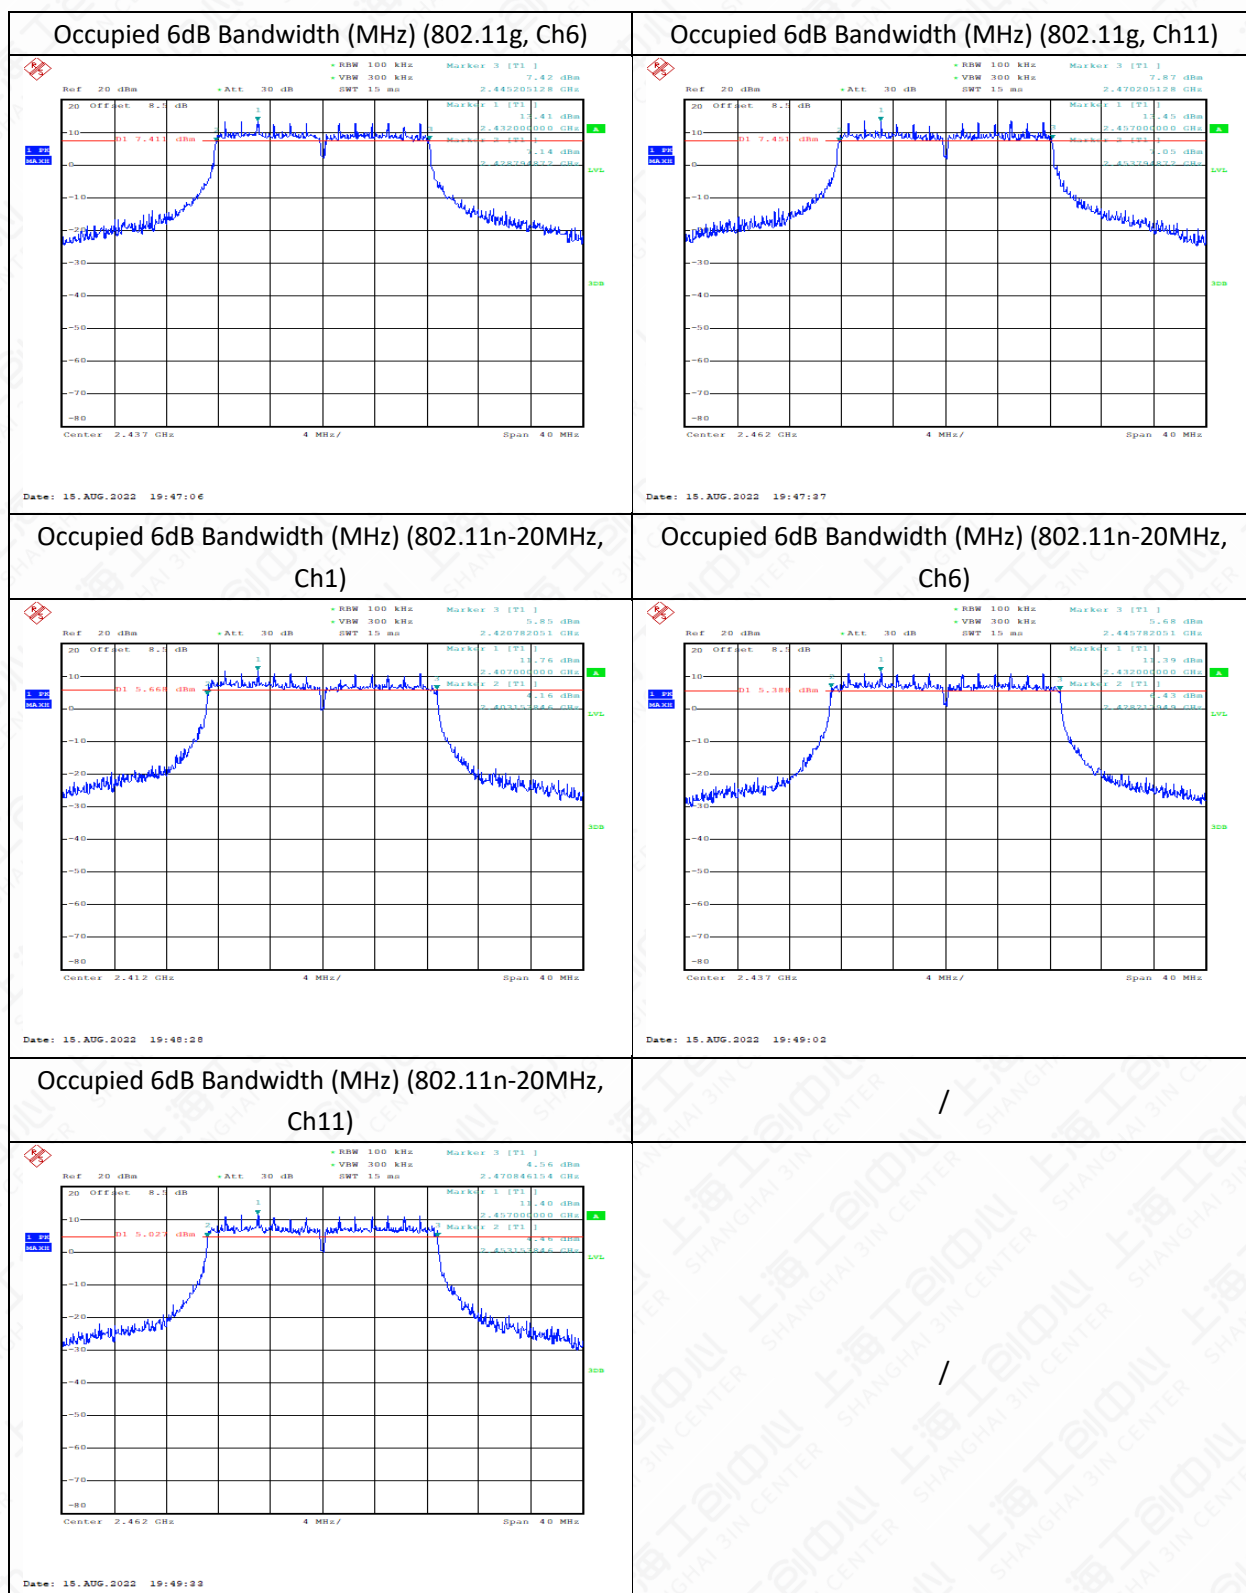

6.4 99% Occupied Bandwidth

6.4.1. Measurement Limit


Standard	Limit
N/A	N/A

6.4.2. Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.


6.4.3. Test setup

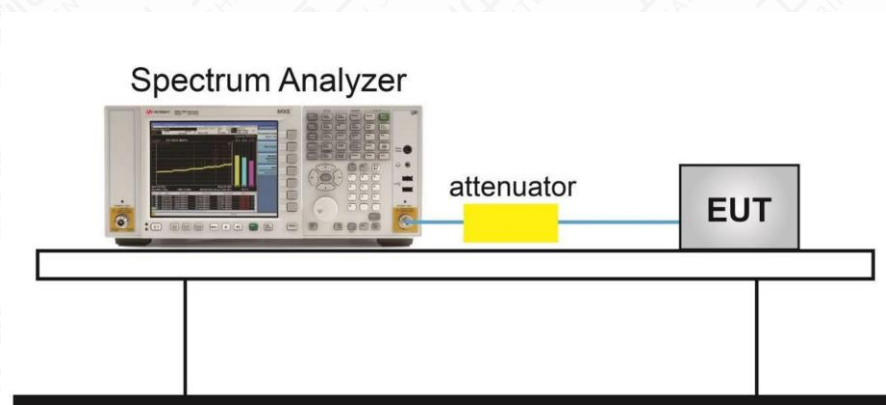


Measurement Result

Mode	Test Result (MHz)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11b	13.269	13.141	13.333
802.11g	17.628	17.564	17.564
802.11n(20MHz)	18.333	18.205	18.205

Conclusion: PASS

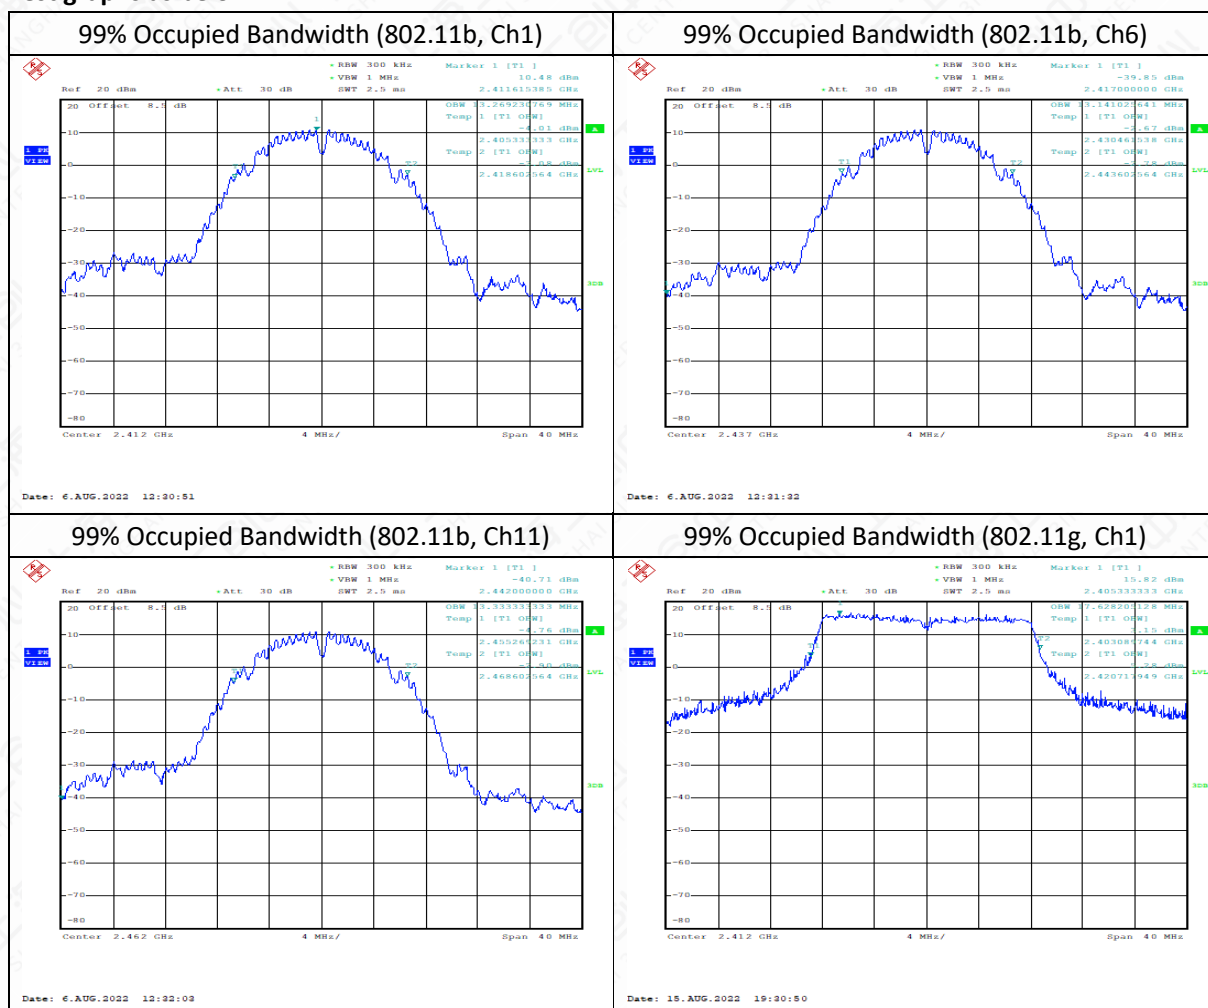Test graphs as below

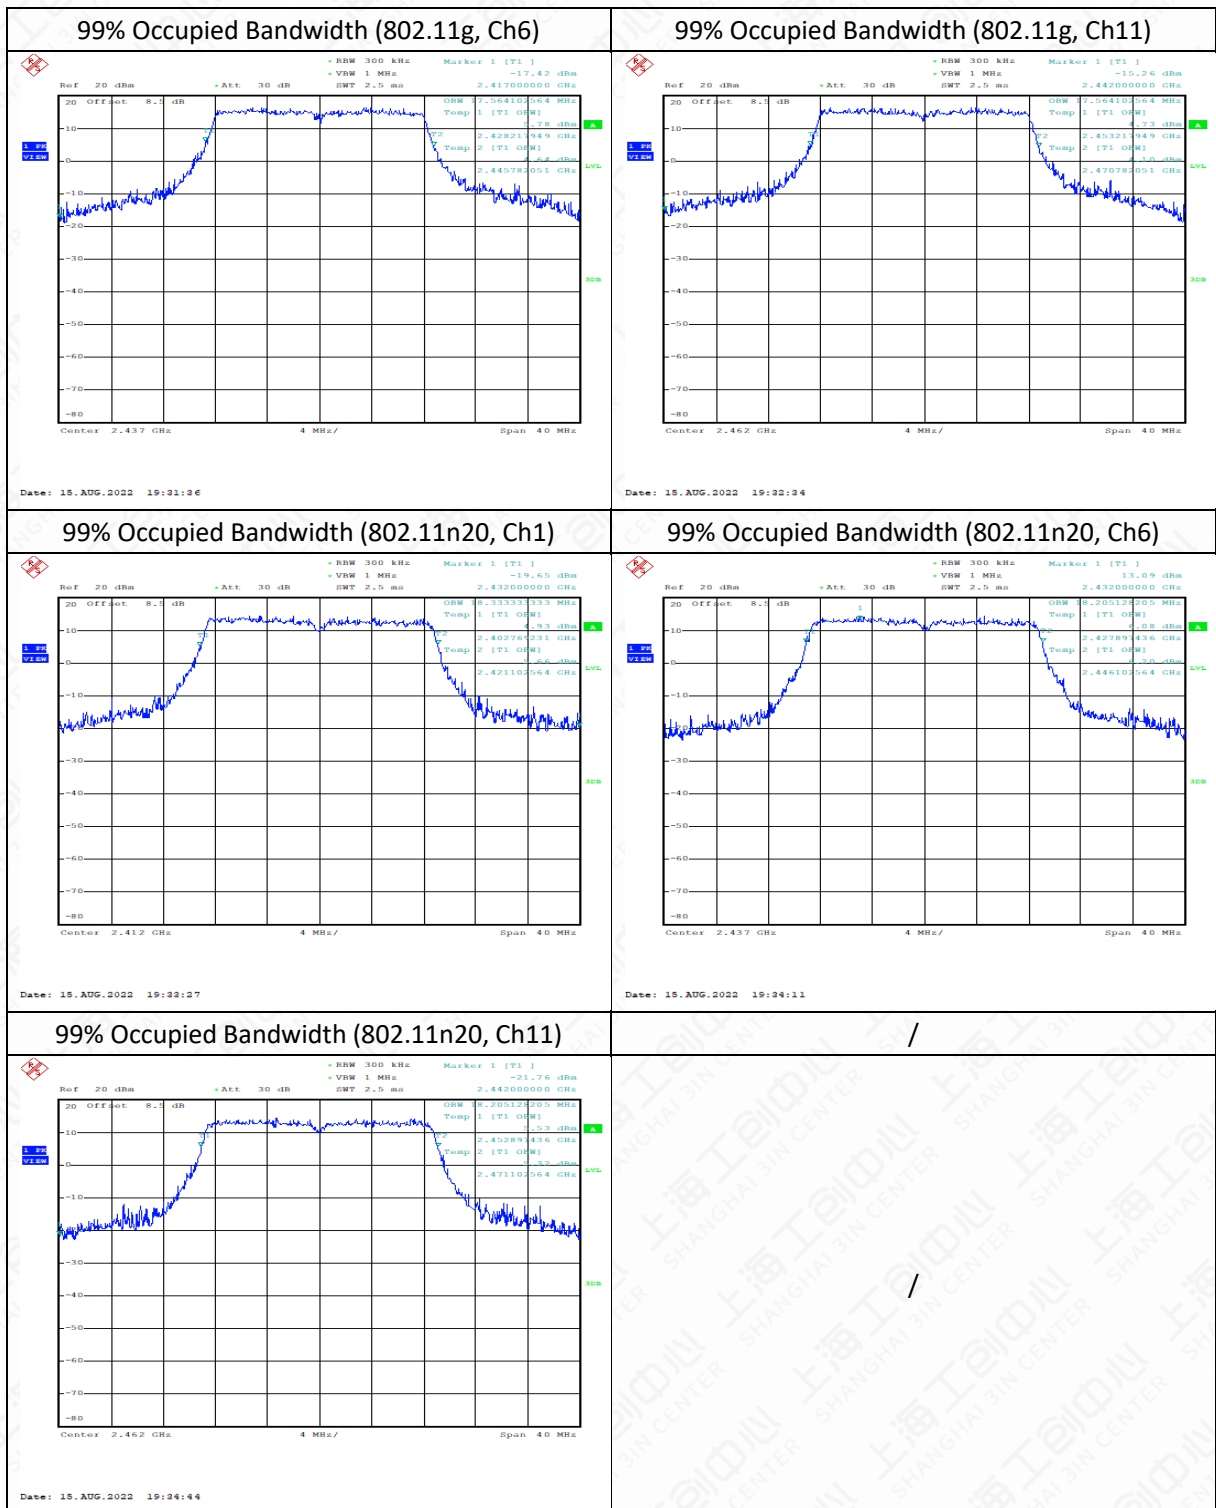


6.5 Band Edges Compliance

6.5.1. Measurement Limit


Standard	Limit(dBc)
FCC 47 Part 15.247(d)	>30


6.5.2. Test procedures

The measurement is according to ANSI C63.10 clause11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. $VBW \geq [3 \times RBW]$.
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

Measurement results

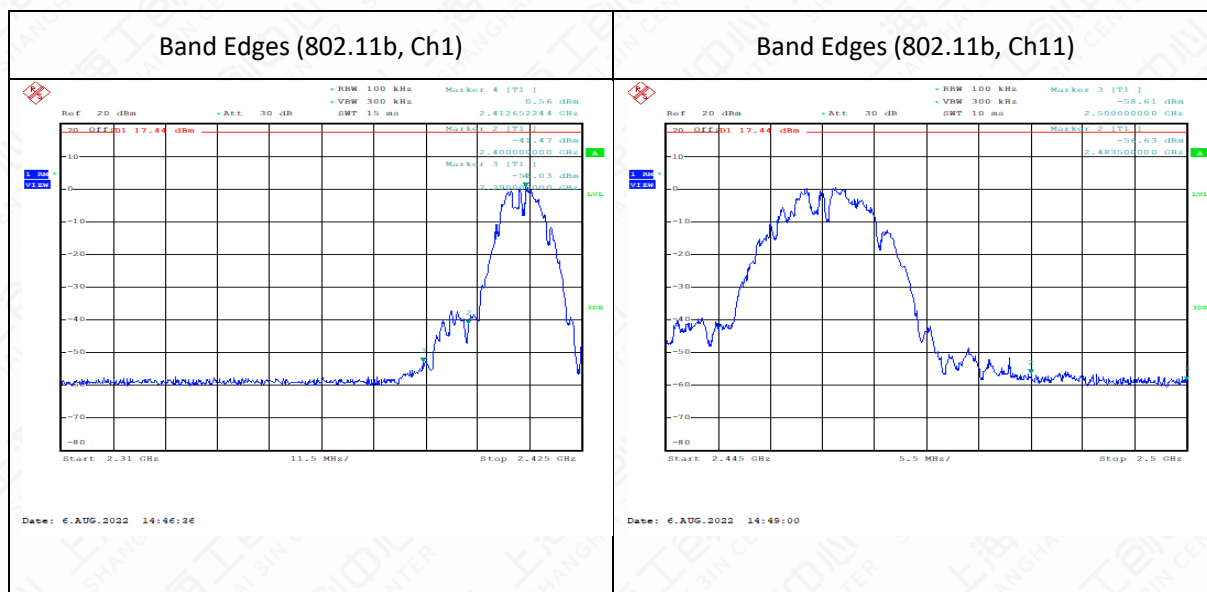

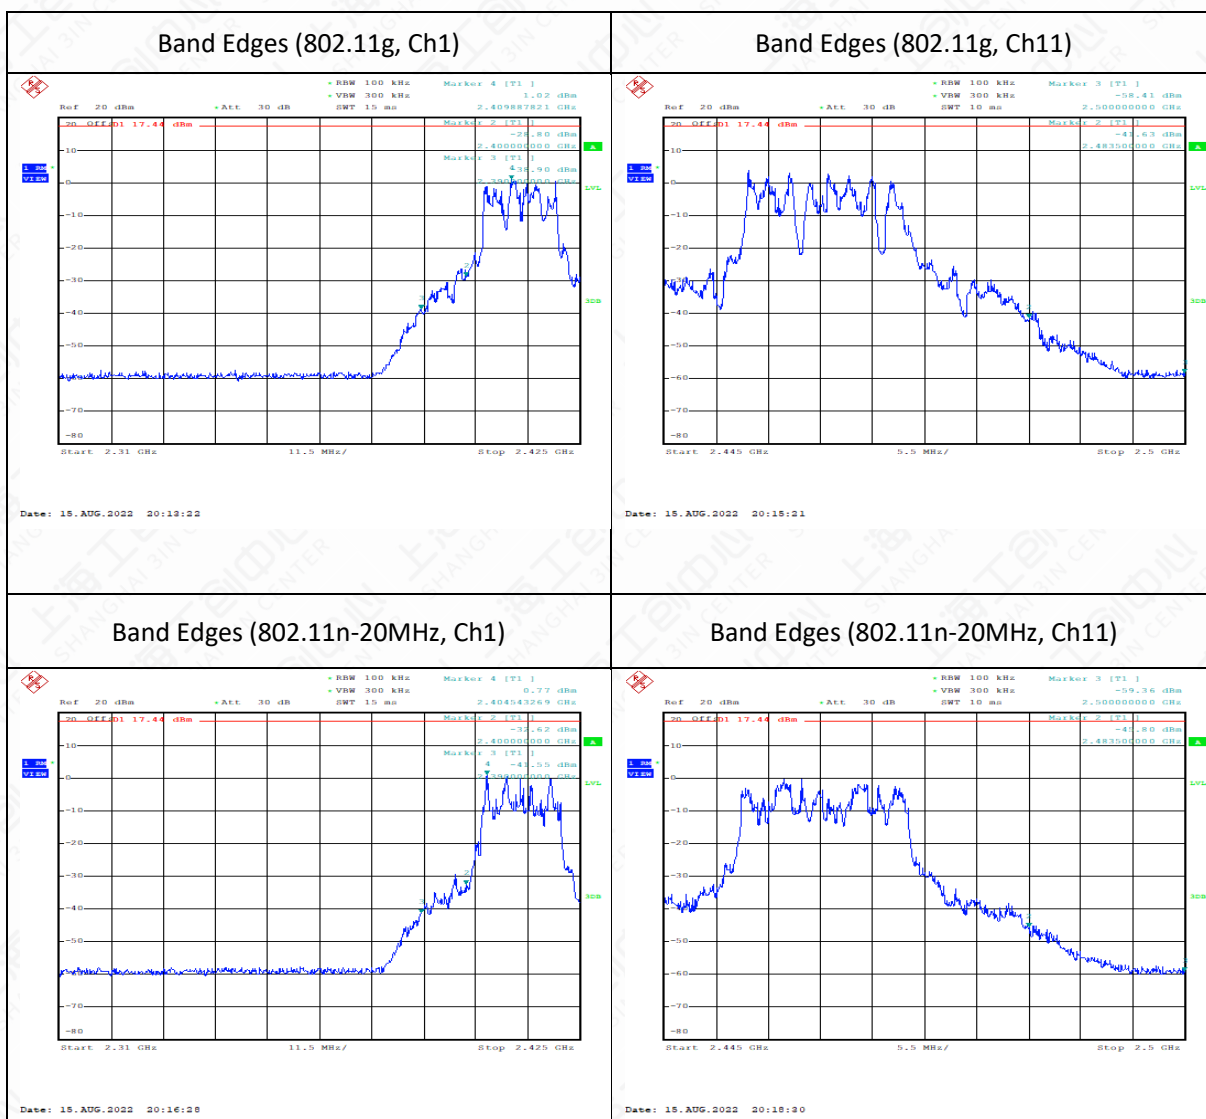

Conclusion: PASS

6.6 Transmitter Spurious Emission-conducted

6.6.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247(d)	30dB below highest level power in 100KHz bandwidth

6.6.2. Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.


Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.


Emission level measurement






1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq [3 \times \text{RBW}]$.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

6.6.3. Test Setup

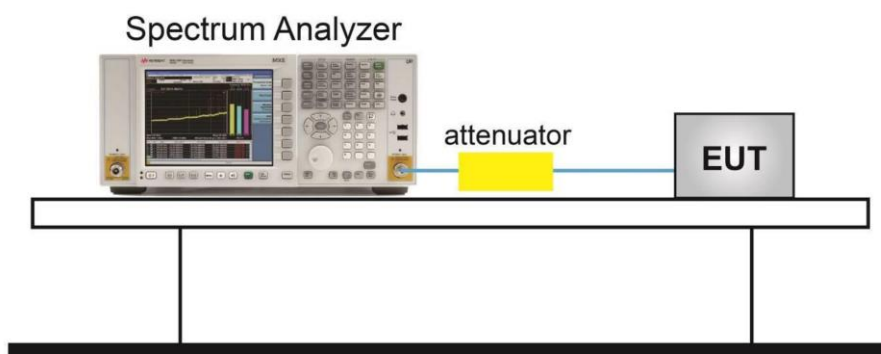

Measurement Result

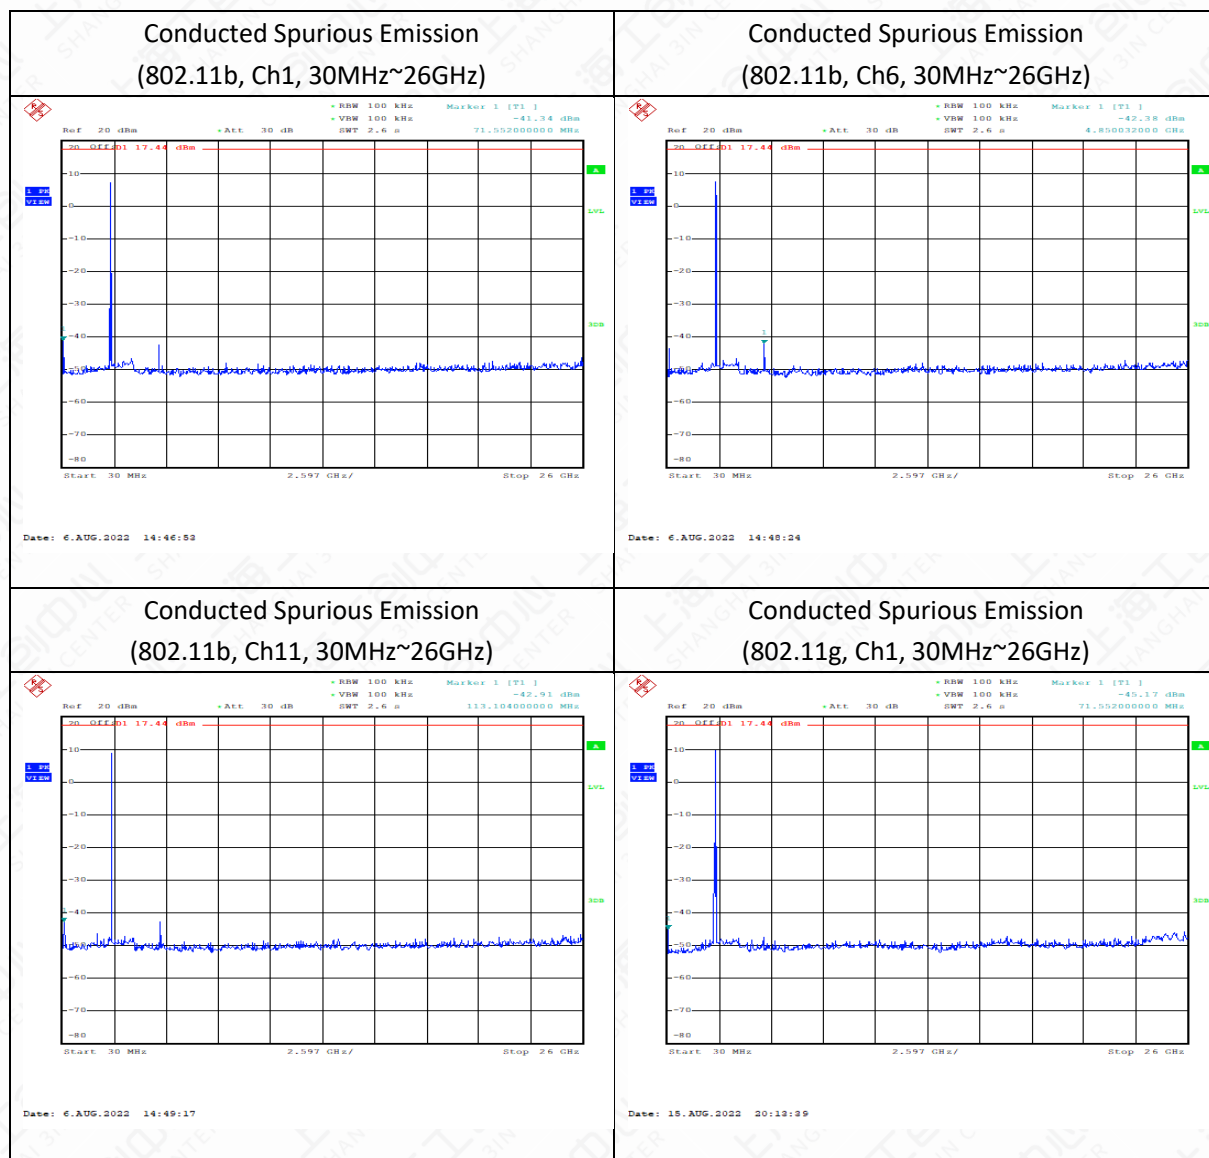

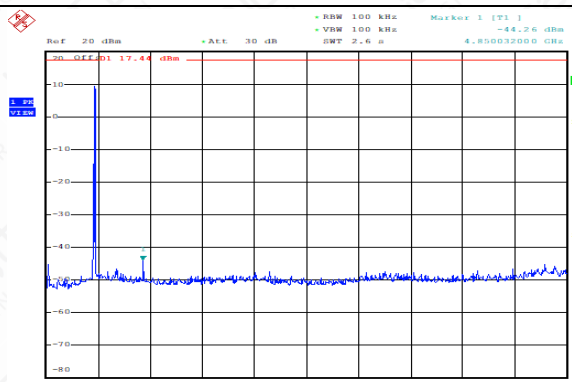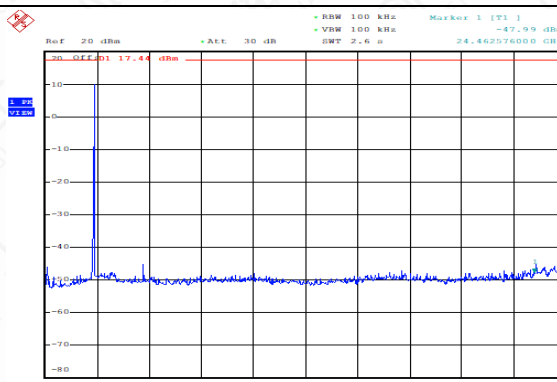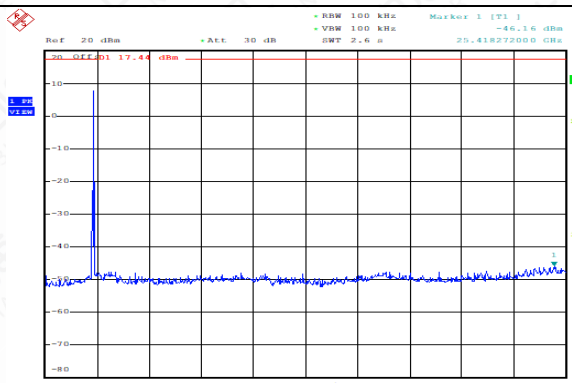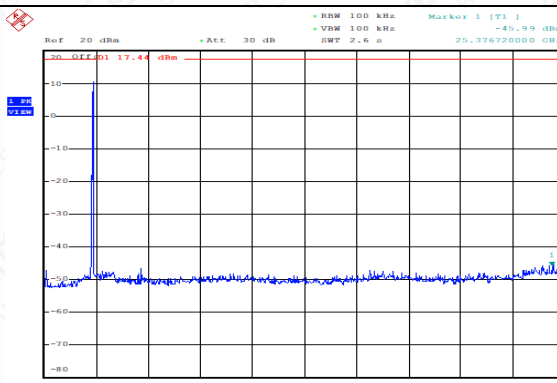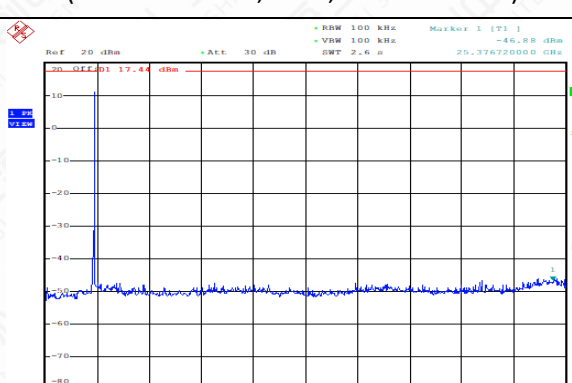Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)  Date: 15.AUG.2022 20:14:43	Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)  Date: 15.AUG.2022 20:15:38
Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)  Date: 15.AUG.2022 20:16:45	Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)  Date: 15.AUG.2022 20:17:48
Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)  Date: 15.AUG.2022 20:18:46	/

6.7 Transmitter Spurious Emission-Radiated

6.7.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)).

The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

6.7.2. Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54


6.7.3. Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.


The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

6.7.4. Test Setup

Below 1GHz Test Setup

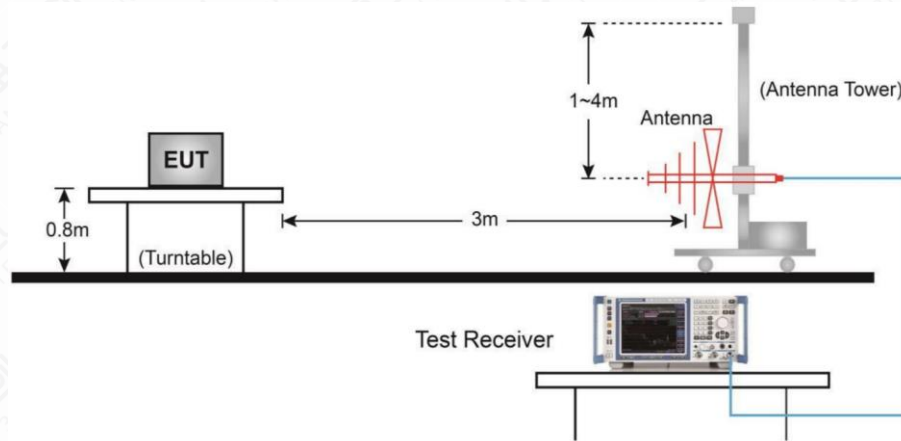

Above 1GHz Test Setup

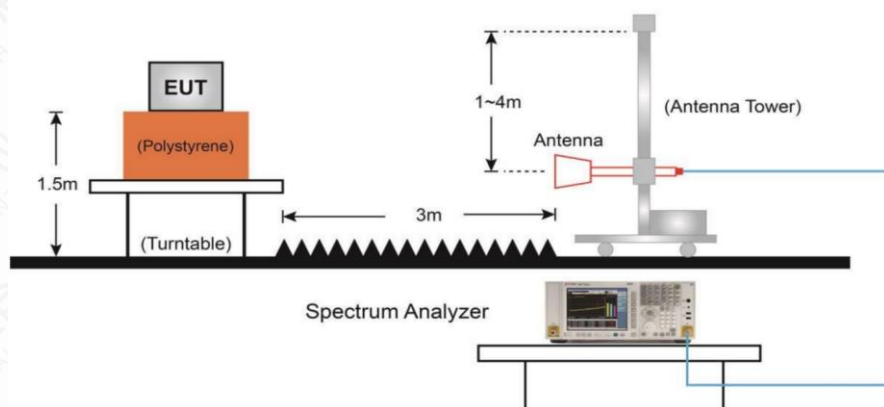

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20


Measurement Results

A “reference path loss” is established and A_{Rpi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.


The measurement results are obtained as described below:

$A_{Rpi} = \text{Cable loss} + \text{Antenna Factor} - \text{Preamplifier gain}$


$\text{Result} = P_{\text{Mea}} + A_{Rpi}$

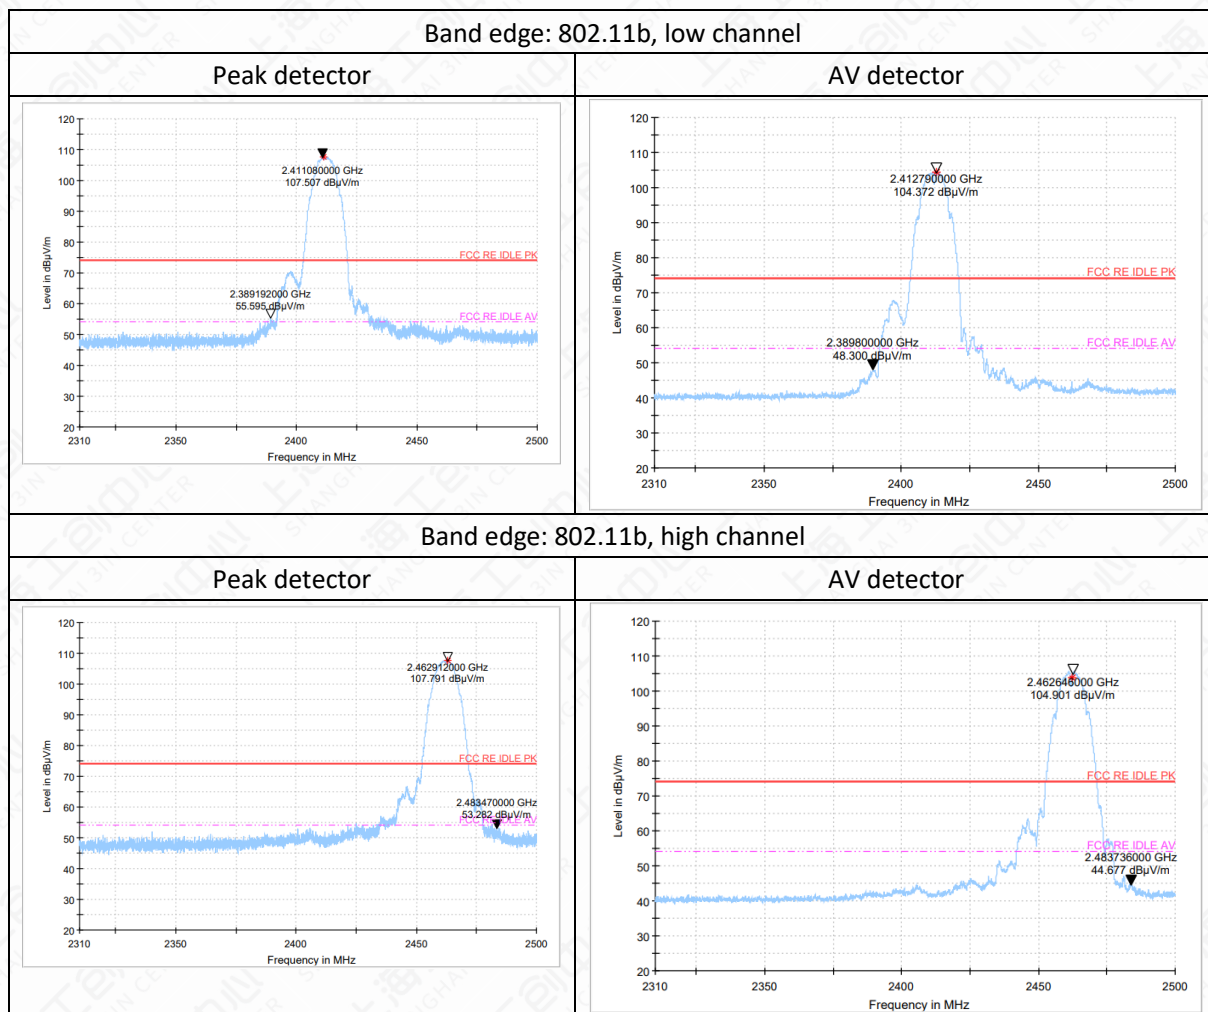


Radiated Spurious Emission
(802.11b, Ch1, 30MHz~1GHz)

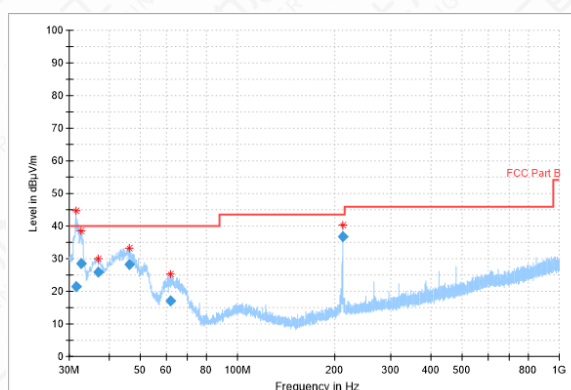


Radiated Spurious Emission
(802.11b, Ch1, 1GHz~3GHz)

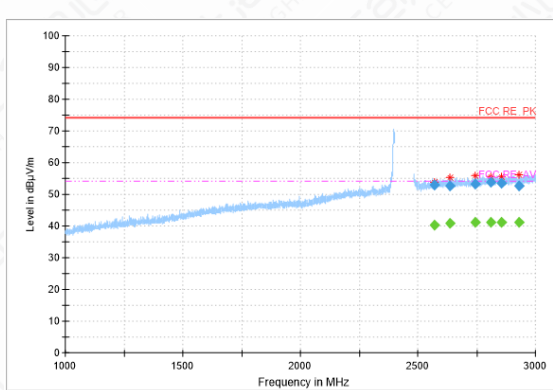


Radiated Spurious Emission
(802.11b, Ch1, 3GHz~18GHz)

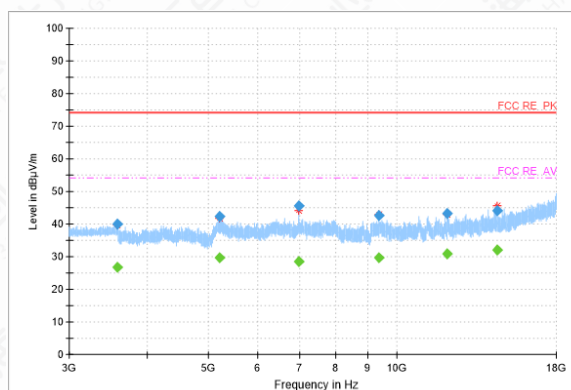


Radiated Spurious Emission
(802.11b, Ch11, 30MHz~1GHz)

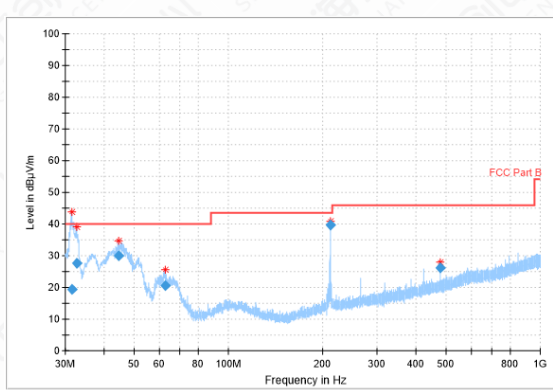


Radiated Spurious Emission
(802.11b, Ch11, 1GHz~3GHz)

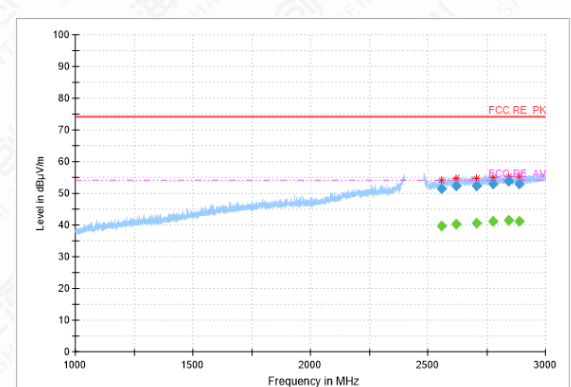


Radiated Spurious Emission
(802.11b, Ch11, 3GHz~18GHz)

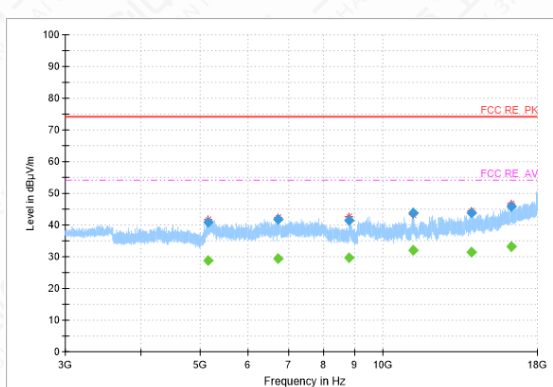


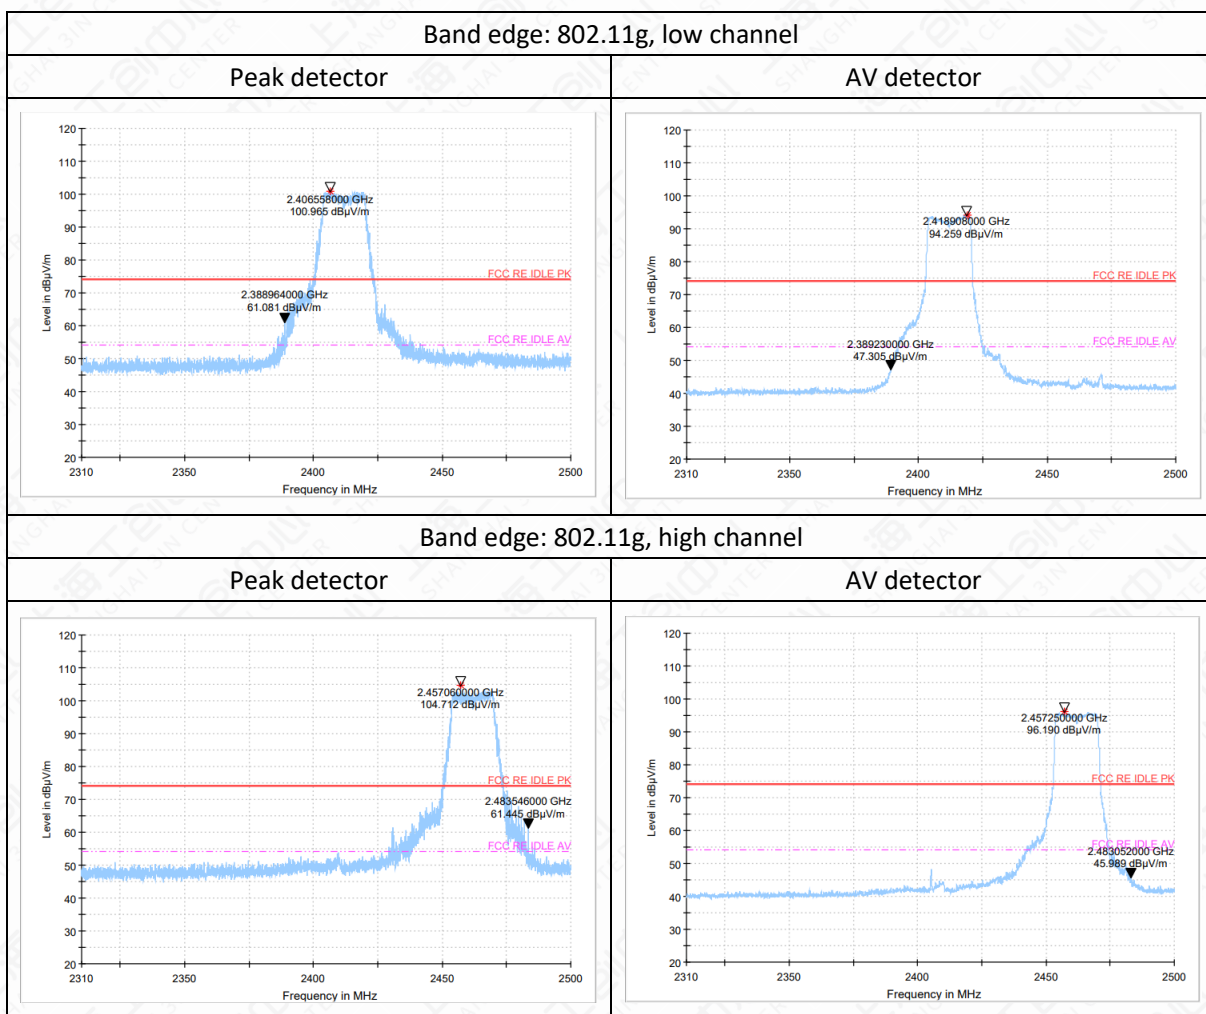


Radiated Spurious Emission
(802.11g, Ch1, 30MHz~1GHz)

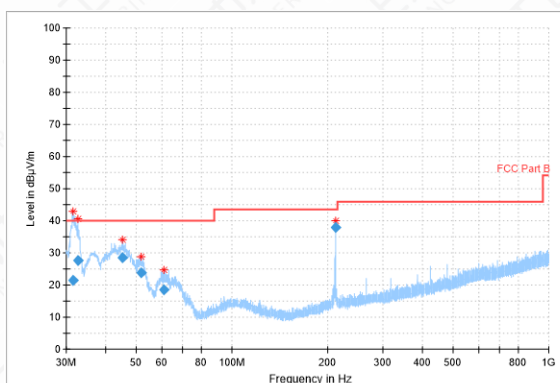


Radiated Spurious Emission
(802.11g, Ch1, 1GHz~3GHz)

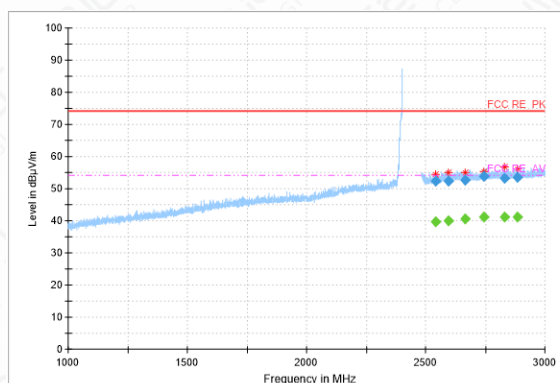


Radiated Spurious Emission
(802.11g, Ch1, 3GHz~18GHz)

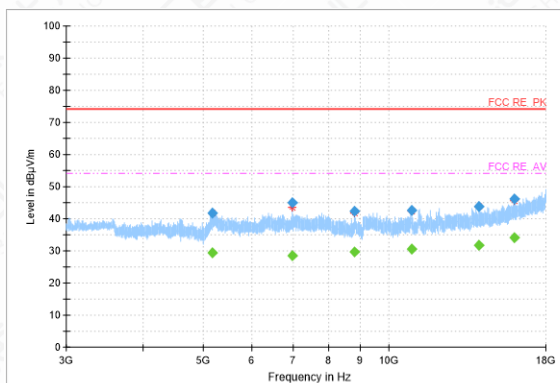


Radiated Spurious Emission
(802.11g, Ch11, 30MHz~1GHz)

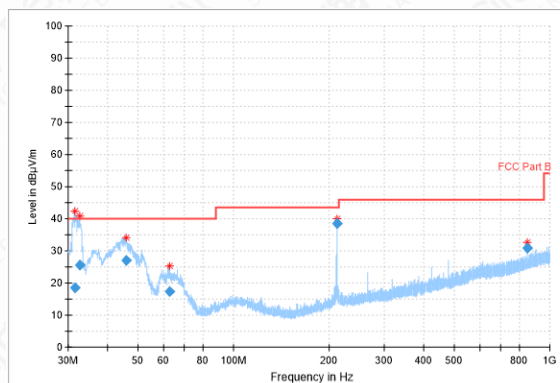

Radiated Spurious Emission
(802.11g, Ch11, 1GHz~3GHz)

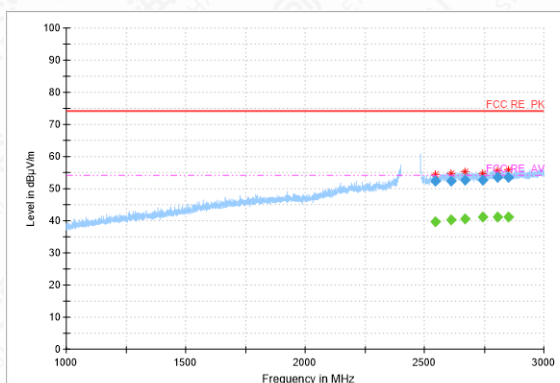


Radiated Spurious Emission
(802.11g, Ch11, 3GHz~18GHz)

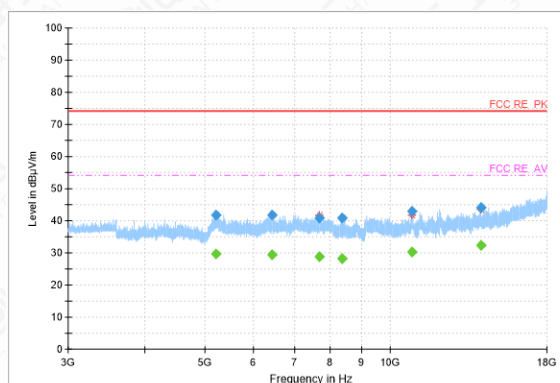


Band edge: 802.11n-20MHz, low channel

Peak detector

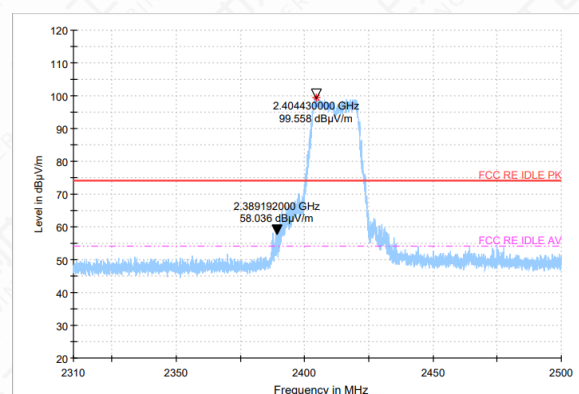


AV detector

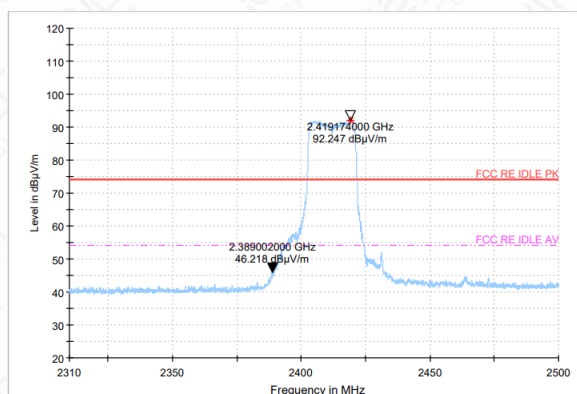


Band edge: 802.11n-20MHz, high channel


Peak detector

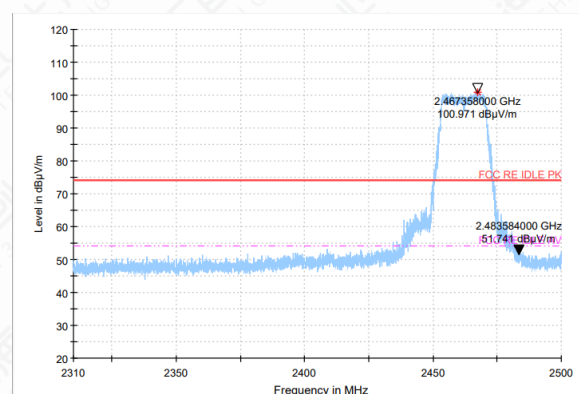


AV detector

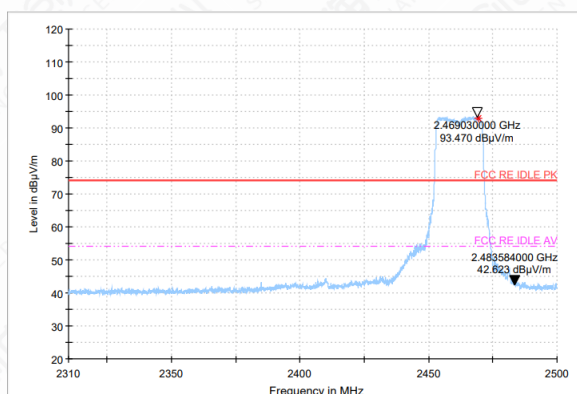


Radiated Spurious Emission
(802.11n-20MHz, Ch1,30MHz~1GHz)

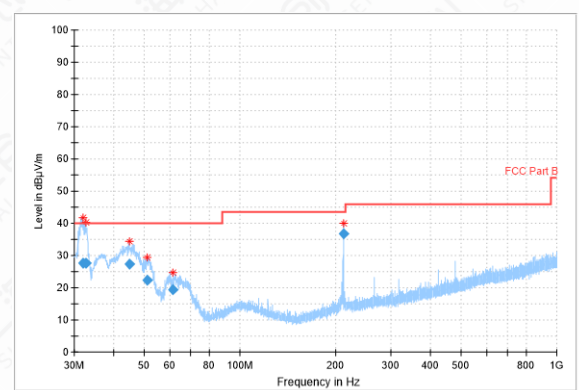

Radiated Spurious Emission
(802.11n-20MHz, Ch1,1GHz~3GHz)

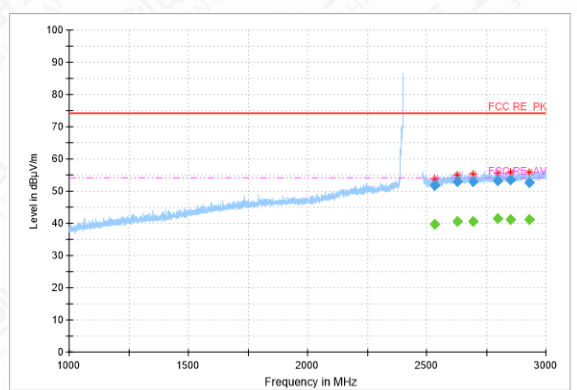

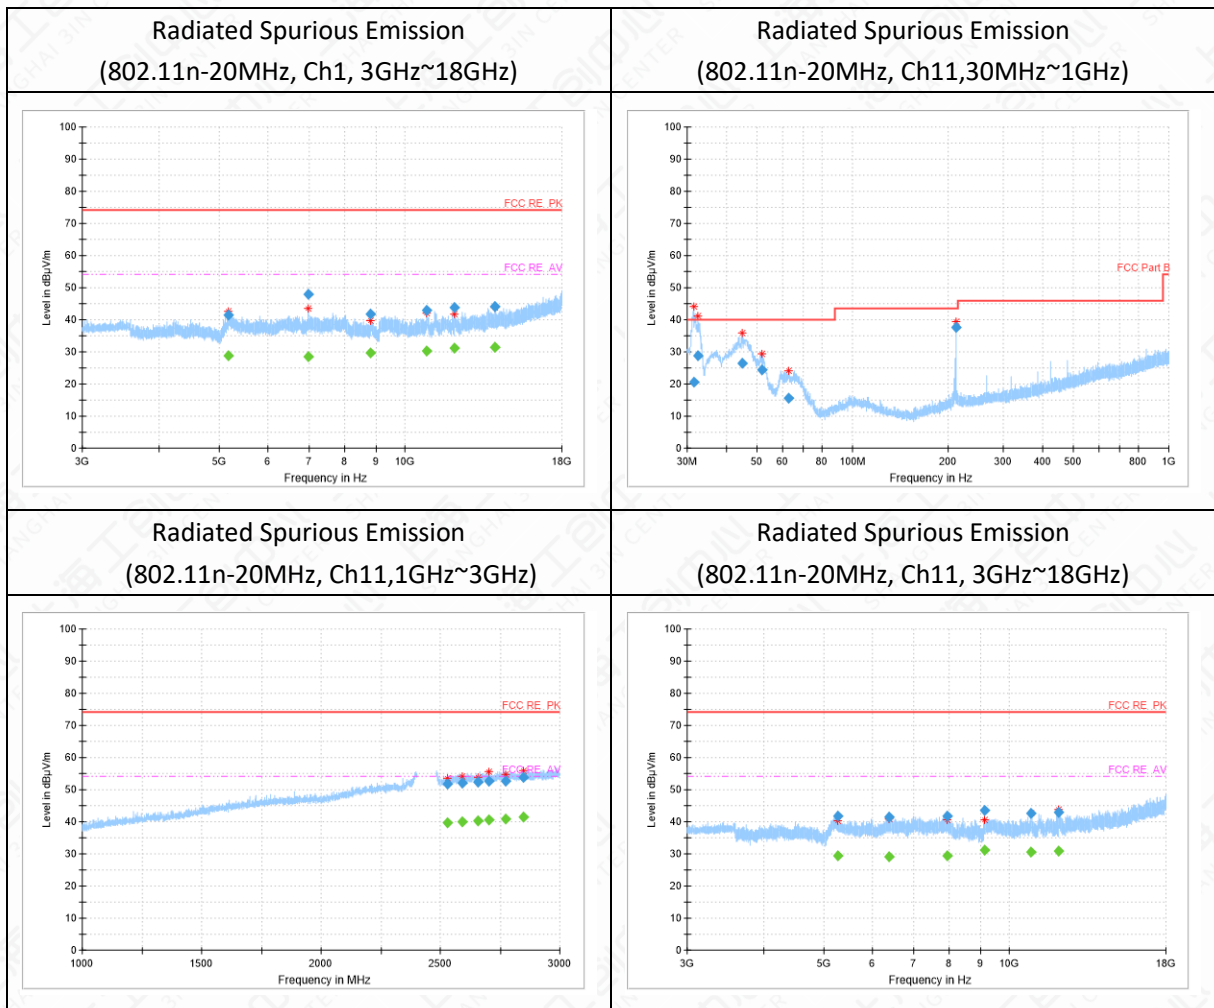

Note:

A "reference path loss" is established and A_{Rpi} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

A_{Rpi} = Cable loss + Antenna Factor-Preamplifier gain

Result = P_{Mea} + Cable loss + Antenna Factor-Preamplifier gain = $P_{Mea} + A_{Rpi}$.

802.11b mode

Ch1 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.6	21.61	-14.3	35.91	H
32.7	28.41	-14.2	42.61	H
36.9	25.92	-13.6	39.52	H
46.2	28.38	-12.3	40.68	H
61.9	17.04	-13	30.04	H
211.9	36.73	-13.1	49.83	V

Ch1 1GHz~3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2572.3	52.82	15.3	37.52	V
2636.7	52.71	15.8	36.91	V
2745.3	53.1	16.2	36.9	V
2810.1	53.72	16.6	37.12	V
2856.8	53.49	16.7	36.79	V
2931.1	52.79	16.8	35.99	V

Ch1 3GHz~18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
3575.0	40.11	-7	47.11	V
5216.1	42.37	-1.1	43.47	V
6989.4	45.71	-2.3	48.01	V
9378.5	42.79	-0.1	42.89	V
12058.1	43.32	2	41.32	V
14486.4	44.04	5.1	38.94	V

Ch11 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.5	19.44	-14.3	33.74	H
32.7	27.67	-14.2	41.87	H
44.4	29.89	-12.4	42.29	H
62.7	20.7	-13.3	34	H
211.9	39.75	-13.1	52.85	V
476.7	26.15	-6.7	32.85	V

Ch11 1GHz~3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2556.8	51.5	15.2	36.3	V
2620.6	52.35	15.7	36.65	V
2706.2	52.41	15.9	36.51	V
2777.1	52.92	16.4	36.52	V
2841.1	53.75	16.6	37.15	V
2887.2	53.07	16.7	36.37	V

Ch11 3GHz~18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5165.7	40.79	-1.1	41.89	V
6735.0	41.82	-2.4	44.22	V
8796.8	41.5	-1.5	43	V
11241.3	43.74	1.7	42.04	V
14005.4	43.85	4.7	39.15	V
16302.8	45.77	7.9	37.87	V

802.11g mode

Ch1 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.6	21.33	-14.3	35.63	V
32.7	27.54	-14.2	41.74	H
45.3	28.67	-12.3	40.97	H
51.6	23.85	-12	35.85	V
61.2	18.67	-12.7	31.37	H
211.9	38.03	-13.1	51.13	H

Ch1 1GHz~3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2541.9	52.36	15	37.36	V
2596.5	52.26	15.5	36.76	V
2665.3	52.72	15.9	36.82	V
2743.1	53.71	16.2	37.51	V
2832.3	53.36	16.6	36.76	V
2884.0	53.39	16.7	36.69	V

Ch1 3GHz~18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
5185.2	41.78	-1	42.78	V
6985.6	44.96	-2.3	47.26	V
8796.4	42.44	-1.5	43.94	V
10904.6	42.64	1.1	41.54	V
14003.4	43.81	4.7	39.11	V
15989.7	46.08	7.7	38.38	V

Ch11 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.5	18.57	-14.3	32.87	V
32.7	25.6	-14.2	39.8	H
45.8	27.08	-12.3	39.38	V
62.7	17.49	-13.2	30.69	V
211.9	38.51	-13.1	51.61	H
847.5	30.94	-0.9	31.84	V

Ch11 1GHz~3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2544.3	52.25	15	37.25	V
2610.4	52.33	15.6	36.73	V
2669.6	52.64	15.9	36.74	V
2744.5	52.78	16.2	36.58	V
2806.1	53.43	16.6	36.83	V
2849.6	53.4	16.6	36.8	V

Ch11 3GHz~18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5224.5	41.64	-1.2	42.84	V
6431.0	41.84	-2.6	44.44	V
7676.7	40.81	-1.8	42.61	V
8357.2	40.99	-2	42.99	V
10863.4	42.93	1.1	41.83	V
14046.3	44.06	4.7	39.36	V

802.11n-20MHz

Ch1 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.0	27.56	-14.3	41.86	V
32.6	27.71	-14.2	41.91	V
44.8	27.24	-12.4	39.64	H
50.9	22.34	-11.9	34.24	H
61.3	19.45	-12.8	32.25	H
211.8	36.73	-13.1	49.83	H

Ch1 1GHz~3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2534.4	51.82	14.8	37.02	V
2629.9	53.01	15.7	37.31	V
2693.3	52.88	15.9	36.98	V
2797.6	53.37	16.6	36.77	V
2851.0	53.6	16.6	37	V
2930.9	52.76	16.8	35.96	V

Ch1 3GHz~18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
5168.8	41.36	-1.1	42.46	V
6986.0	48.08	-2.3	50.38	V
8797.5	41.65	-1.5	43.15	V
10859.3	42.81	1.1	41.71	V
12054.9	43.69	2	41.69	V
14001.3	44.24	4.7	39.54	V

Ch11 30MHz~1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.5	20.45	-14.3	34.75	H
32.5	28.78	-14.2	42.98	H
44.8	26.52	-12.4	38.92	V
51.6	24.32	-12	36.32	H
63.0	15.54	-13.3	28.84	V
211.9	37.7	-13.1	50.8	H

Ch11 1GHz~3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2530.0	51.63	14.7	36.93	V
2590.4	52.12	15.4	36.72	V
2656.5	52.45	15.9	36.55	V
2703.0	52.58	15.9	36.68	V
2773.3	52.75	16.4	36.35	V
2847.0	53.7	16.6	37.1	V

Ch11 3GHz~18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
5265.5	41.66	-1.9	43.56	V
6390.1	41.43	-2.6	44.03	V
7952.1	41.79	-1.1	42.89	V
9135.8	43.54	-0.4	43.94	V
10842.8	42.62	1.1	41.52	V
12054.5	42.88	2	40.88	V

Annex A: Revised History

Version	Revised Content
V00	Initial
V01	Add the test lab's registered MRA test site number

Annex B: Accreditation Certificate



END OF REPORT