





# **FCC Test Report**

FCC ID : 2AWC2-AIRH203

Equipment : Kebbi Air S

(Please refer to section 1.1.1 for more details)

Model No. : AIR-H203

(Please refer to section 1.1.1 for more details)

Brand Name : NUWAROBOTICS

Applicant : NUWA ROBOTICS (HK) LIMITED TAIWAN

**BRANCH** 

Address : 3F., No. 102, Dunhua N. Rd., Songshan Dist.,

Taipei City, Taiwan (R.O.C.)

Standard : 47 CFR FCC Part 15.247

Received Date : Apr. 07, 2021

Tested Date : May 04 ~ May 13, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Cheld/ Assistant Manager Gary Chang / Manager

Report No.: FR240701AE Page: 1 of 20



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	Test Equipment List and Calibration Data	9
1.5	Test Standards	11
1.6	Reference Guidance	11
1.7	Deviation from Test Standard and Measurement Procedure	11
1.8	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Facility	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	6dB and Occupied Bandwidth	13
3.2	Conducted Output Power	14
3.3	Power Spectral Density	15
3.4	Unwanted Emissions in Restricted Frequency Bands	16
3.5	Emissions in non-restricted Frequency Bands	18
3.6	AC Power Line Conducted Emissions	19
4	TEST LABORATORY INFORMATION	20

- Appendix A. 6dB and Occupied Bandwidth
- **Appendix B. Conducted Output Power**
- **Appendix C. Power Spectral Density**
- Appendix D. Unwanted Emissions into Restricted Frequency Bands
- Appendix E. Emissions in Non-Restricted Frequency Bands
- **Appendix F. AC Power Line Conducted Emissions**



## **Release Record**

Report No.	Version	Description	Issued Date
FR240701AE	Rev. 01	Initial issue	Jun. 06, 2022

Report No.: FR240701AE Page: 3 of 20



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 14.907MHz 34.79 (Margin -15.21dB) - AV	Pass
15.247(d)	Unwanted Emissions	[dBuV/m at 3m]: 245.66MHz	Pass
15.209	Onwanted Emissions	40.89 (Margin -5.11dB) - PK	F d S S
15.247(b)(3)	Conducted Output Power	Power [dBm]: 2.72	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR240701AE Page: 4 of 20



## 1 General Description

### 1.1 Information

#### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description	
NUWAROBOTICS	AIR-H203	Kebbi Air S	Outer appearance: white	
NUWAROBOTICS	AIR-H204	Robot Creator DX	Outer appearance: black	

<sup>+</sup> All models are electrically identical, different model names are for marketing purpose.

## 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz) Bluetooth (MHz) Channel Number Data Rate					
2400-2483.5	V4.2 LE	2402-2480	0-39 [40]	1 Mbps	
Note: Bluetooth LE (Low energy) uses GFSK modulation.					

#### 1.1.3 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)
1	PIFA	N/A	2.4

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

 DC 3.7V from battery DC 5V=3A/10V=2A/12V=1.67A from adapter
DC 5V=3A/9V=2A/12V=1.5A from adapter

Report No.: FR240701AE Page: 5 of 20

<sup>★</sup> The above models, model AIR-H203 was selected as a representative one for the final test and only its data was recorded in this report.



## 1.1.5 Accessories

	Accessories				
No.	Equipment	Description			
1	AC adapter	Brand: JIANGSU CHENYANG Model: MC-201 I/P: 100-240Vac, 50/60Hz, 0.7A Max O/P: 5V-3A, 15.0W / 10.0V-2.0A, 20W / 12V-1.67A, 20W			
2	AC adapter	Brand: Jiangxi Jian Aohai Model: A138A-120150U-UK3 I/P: 100-240Vac, 50/60Hz, 0.5A Max O/P: 5V=3A, 15.0W / 9.0V=2.0A, 18W / 12V=1.5A, 18W			
3	AC adapter	Brand: SHENZHEN KEYU Model: KA1803A-US I/P: 100-240Vac, 50/60Hz, 0.5A Max O/P: 5V=3A / 9.0V=2.0A / 12V=1.5A			
4	AC adapter	Brand: JIANGSU CHENYANG Model: MC-203 I/P: 100-240Vac, 50/60Hz, 0.7A Max O/P: 5V=3A, 15.0W / 10V=2.0A, 20W / 12V=1.67A, 20W			
5	Li-ion Battery	Brand: Shenzhen GUANGWEI Electronic Technology Co., Ltd Model: NB2 Rating: 3.7Vdc, 9100mA, 33.67Wh			
6	USB charger Cable	1.2m non-shielded without core			

Report No.: FR240701AE Page: 6 of 20



## 1.1.6 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

## 1.1.7 Test Tool and Duty Cycle

Test Tool	Qualcomm Radio Control Tool, V4.0.00185.0			
Modulation Mode	Duty Cycle Of Test Signal (%) Duty Factor (dB)			
BT-LE(1Mbps)	76.69%	1.15		

## 1.1.8 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)			
Modulation Wode	2402	2440	2480	
BT-LE(1Mbps)	Default	Default	Default	


Report No.: FR240701AE Page: 7 of 20



## 1.2 Local Support Equipment List

	Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks	
1	Notebook	DELL	Latitude E5470	DoC		

## 1.3 Test Setup Chart

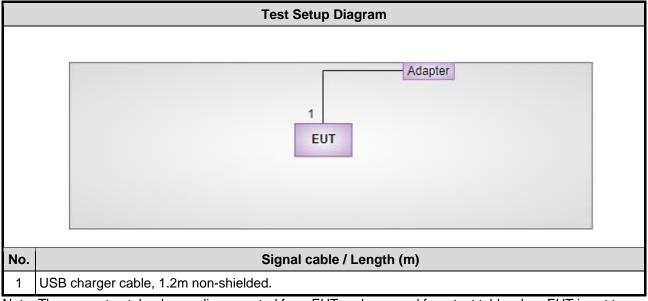

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit/receive continuously.

Report No.: FR240701AE Page: 8 of 20



## 1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission					
Test Site	Conduction room 1 / (	Conduction room 1 / (CO01-WS)				
Tested Date	May 12, 2022					
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until	
Receiver	R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023	
LISN	R&S	ENV216	101579	Apr. 21, 2022	Apr. 20, 2023	
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan .07, 2022	Jan .06, 2023	
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022	
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022	
Measurement Software	AUDIX	e3	6.120210k	NA	NA	

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	May 04, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	May 06, 2021	May 05, 2022
Preamplifier	EMC	EMC02325	980187	Jul. 26, 2021	Jul. 25, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Sep. 24, 2021	Sep. 23, 2022
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Sep. 24, 2021	Sep. 23, 2022
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Sep. 24, 2021	Sep. 23, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Inter	val of instruments liste	d above is one year.			

Report No.: FR240701AE Page: 9 of 20



Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	May 10, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Mar. 08, 2022	Mar. 07, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2021	Dec. 19, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023
Preamplifier	Agilent	83017A	MY39501309	Sep. 06, 2021	Sep. 05, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 24, 2021	Sep. 23, 2022
RF cable-8M	EMC	EMC104-SM-SM-80 00	181107	Sep. 24, 2021	Sep. 23, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	May. 13, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2022	Apr. 17, 2023
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.				

Report No.: FR240701AE Page: 10 of 20



## 1.5 Test Standards

47 CFR FCC Part 15.247 ANSI C63.10-2013

### 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty			
Parameters	Uncertainty		
Bandwidth	±34.130 Hz		
Conducted power	±0.808 dB		
Power density	±0.583 dB		
Conducted emission	±2.715 dB		
AC conducted emission	±2.92 dB		
Unwanted Emission ≤ 1GHz	±3.96 dB		
Unwanted Emission > 1GHz	±4.51 dB		

Report No.: FR240701AE Page: 11 of 20



## 2 Test Configuration

## 2.1 Testing Facility

Test Laboratory	International Certification Corporation		
Test Site	CO01-WS, TH01-WS		
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)		
Test Site	03CH03-WS		
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)		

FCC Designation No.: TW0009FCC site registration No.: 207696

➤ ISED#: 10807C

➤ CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions	BT-LE(1Mbps)	2402	2
Unwanted Emissions ≤ 1GHz	BT-LE(1Mbps)	2402	1
Unwanted Emissions > 1GHz	BT-LE(1Mbps)	2402, 2440, 2480	1
Conducted Output Power 6dB bandwidth Power spectral density	BT-LE(1Mbps)	2402, 2440, 2480	1

#### NOTE:

- 1. Four adapters (Model: MC-201, A138A-120150U-UK3, KA1803A-US and MC-203) had been covered during the pretest, and found that Model: A138A-120150U-UK was worst case of AC power line conducted emission and Model: MC-203 was worst case of Radiated emission.
- 2. Test configurations are listed as below:

1) Configuration 1: Model:MC-201 adapter

2) Configuration 2: Model:A138A-120150U-UK3 adapter

Report No.: FR240701AE Page: 12 of 20



## 3 Transmitter Test Results

## 3.1 6dB and Occupied Bandwidth

#### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.1.2 Test Procedures


#### 6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### **Occupied Bandwidth**

- 1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

#### 3.1.3 Test Setup



#### 3.1.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix A.

Report No.: FR240701AE Page: 13 of 20



## 3.2 Conducted Output Power

#### 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.2.3 Test Setup



#### 3.2.4 Test Results

Refer to Appendix B.

Report No.: FR240701AE Page: 14 of 20



## 3.3 Power Spectral Density


### 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.3.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

### 3.3.3 Test Setup



#### 3.3.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix C.

Report No.: FR240701AE Page: 15 of 20



## 3.4 Unwanted Emissions in Restricted Frequency Bands

### 3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.4.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR240701AE Page: 16 of 20



## 3.4.3 Test Setup

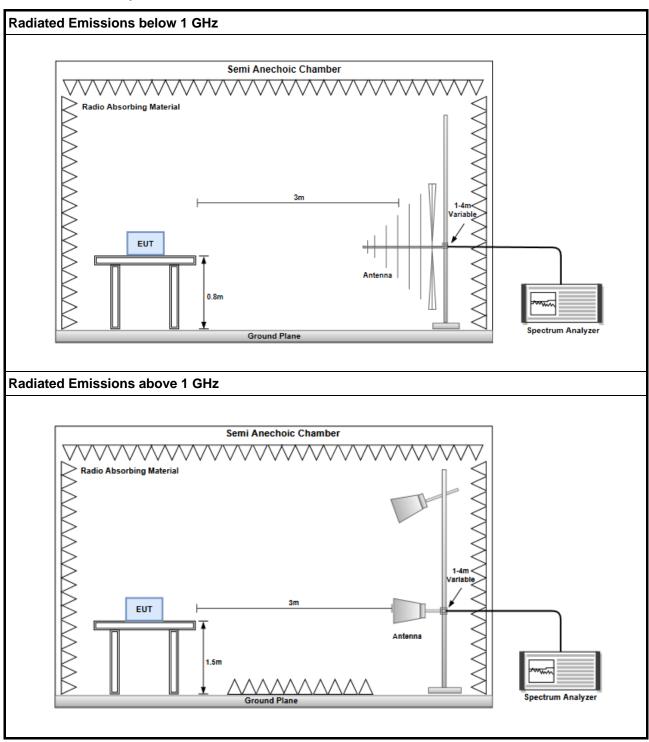

### 3.4.4 Test Results

Refer to Appendix D.

Report No.: FR240701AE Page: 17 of 20



## 3.5 Emissions in non-restricted Frequency Bands

### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.5.2 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- Trace = max hold , Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

#### 3.5.3 Test Setup



#### 3.5.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix E.

Report No.: FR240701AE Page : 18 of 20



#### 3.6 AC Power Line Conducted Emissions


#### 3.6.1 Limit of AC Power Line Conducted Emissions

Conducted Emissions Limit				
Frequency Emission (MHz) Quasi-Peak Average				
0.15-0.5	66 - 56 *	56 - 46 *		
0.5-5	56	46		
5-30	60	50		
Note 1: * Decreases with the logarithm of the frequency.				

#### 3.6.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

#### 3.6.3 Test Setup

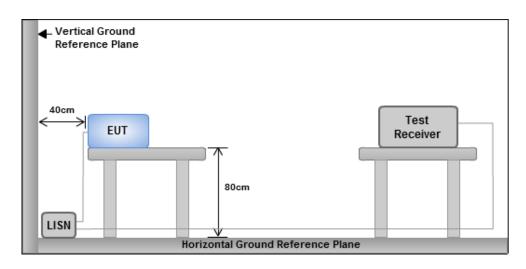

Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 3.6.4 Test Results

Refer to Appendix F.

Report No.: FR240701AE Page: 19 of 20



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

#### Kwei Shan

Tel: 886-3-271-8666
No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

#### Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC Service@icertifi.com.tw

==END==

Report No.: FR240701AE Page: 20 of 20



## 6dB and Occupied Bandwidth

Appendix A

Summary

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	673.913k	1.053M	1M05F1D	666.667k	1.053M


Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

#### Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	673.913k	1.053M
2440MHz	Pass	500k	666.667k	1.053M
2480MHz	Pass	500k	670.29k	1.053M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth



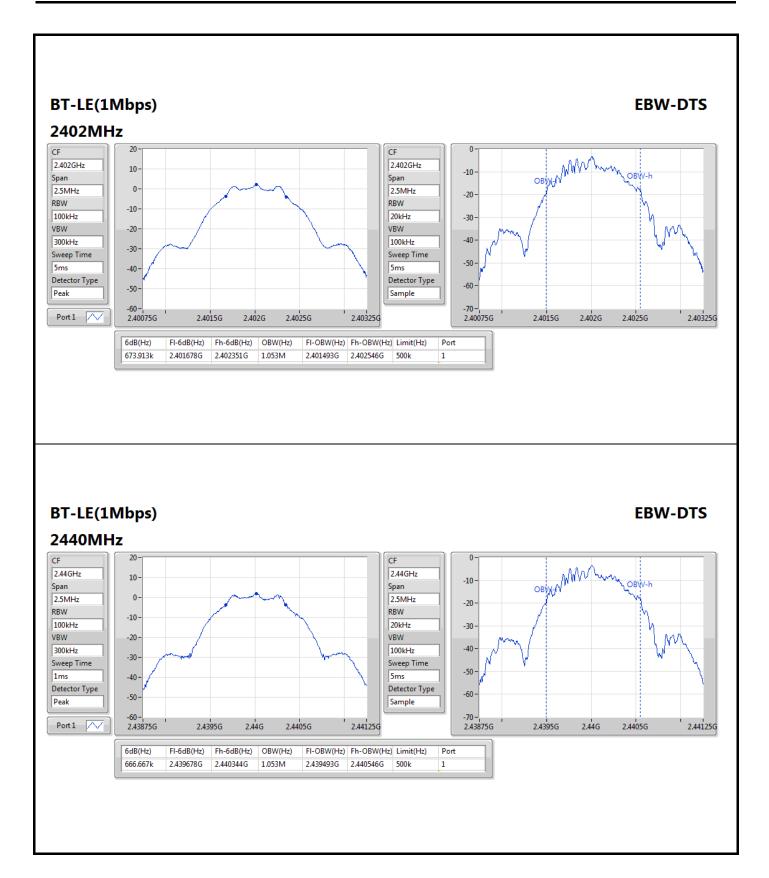



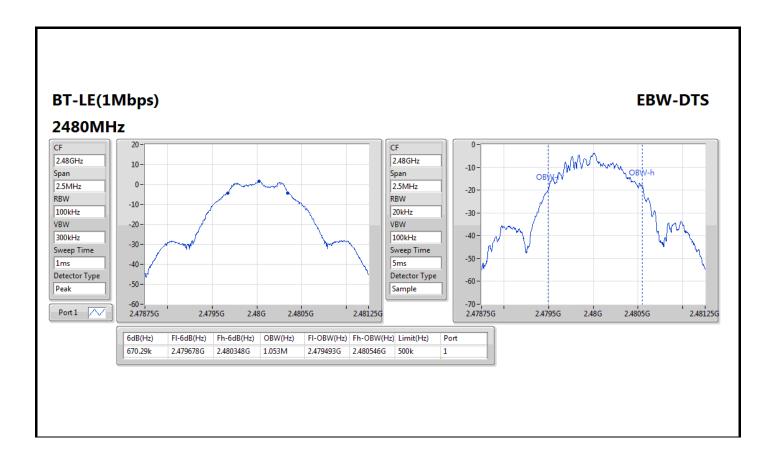



## Conducted Output Power (Peak)

Appendix B

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.72	0.00187

### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.40	2.72	30.00
2440MHz	Pass	2.40	2.46	30.00
2480MHz	Pass	2.40	2.18	30.00



## Conducted Output Power (Average)

Appendix B

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.48	0.00177

### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.40	2.48	-
2440MHz	Pass	2.40	2.28	-
2480MHz	Pass	2.40	1.99	-

Note: Average power is for reference only.



## **Power Spectral Density**

Appendix C


Summary

Mode	PD (dBm/3kHz)	
2.4-2.4835GHz	-	
BT-LE(1Mbps)	-12.74	


### Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(1Mbps)	-	- (abi)	- (ubiii/3ki i2)	(ubiii/3Ki12)
2402MHz	Pass	2.40	-12.74	8.00
2440MHz	Pass	2.40	-12.92	8.00
2480MHz	Pass	2.40	-13.20	8.00



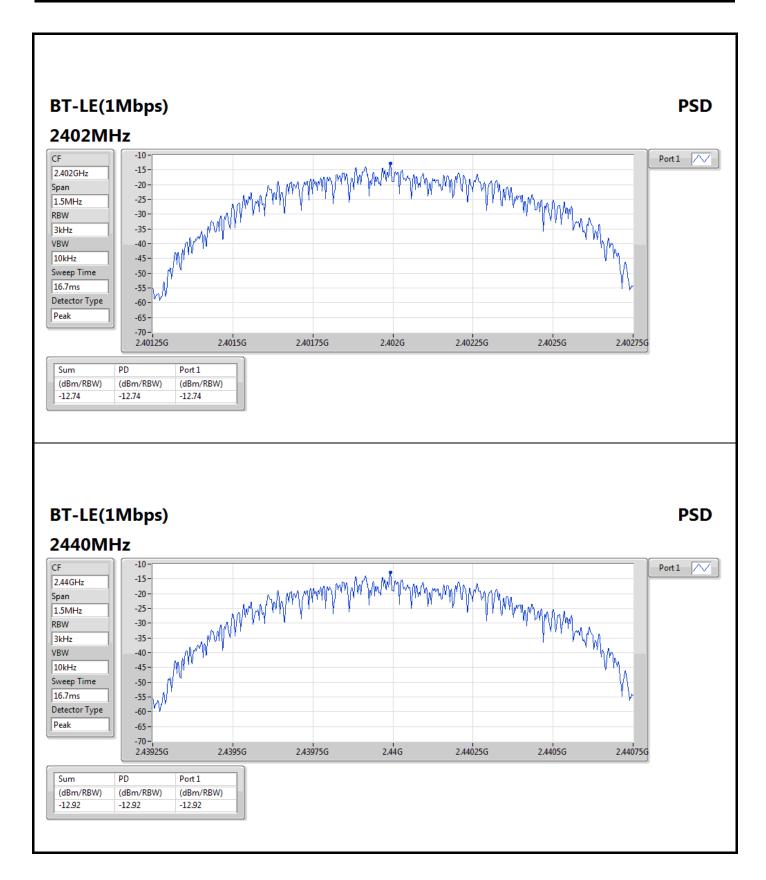




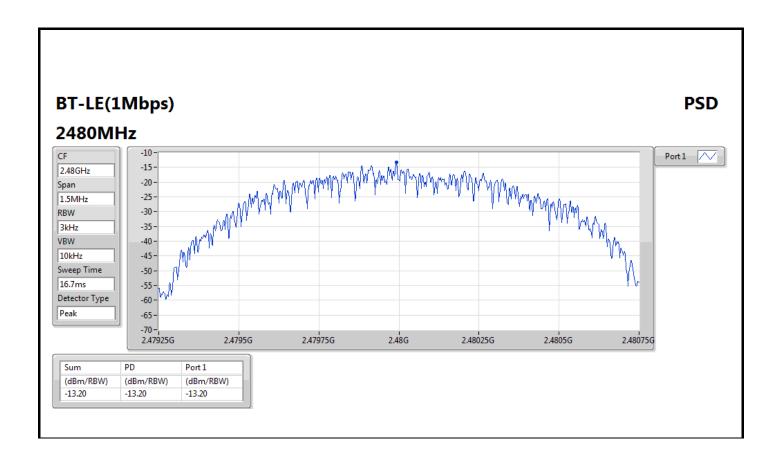



### **Unwanted Emissions (Below 1GHz)**

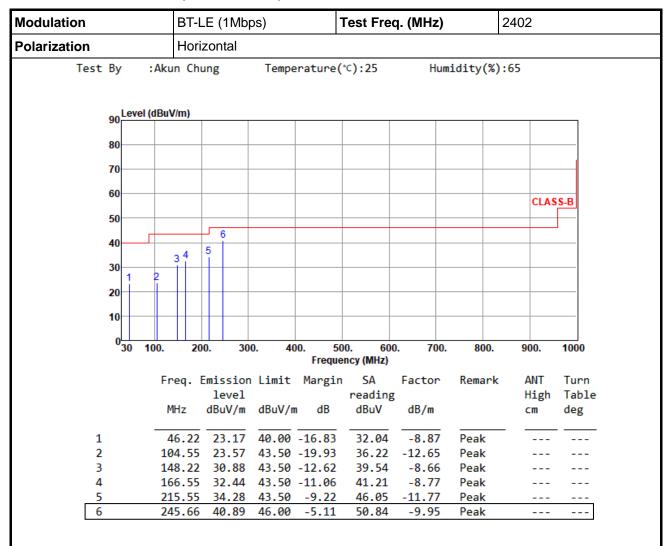


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



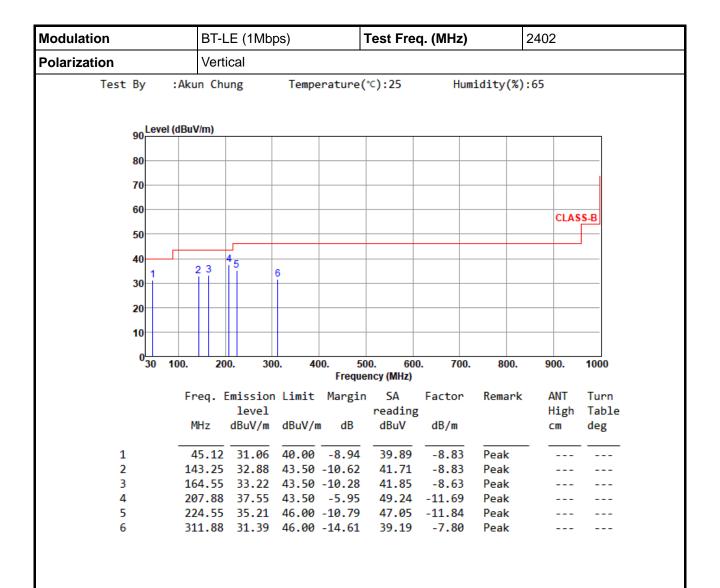


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




### **Unwanted Emissions (Above 1GHz)**

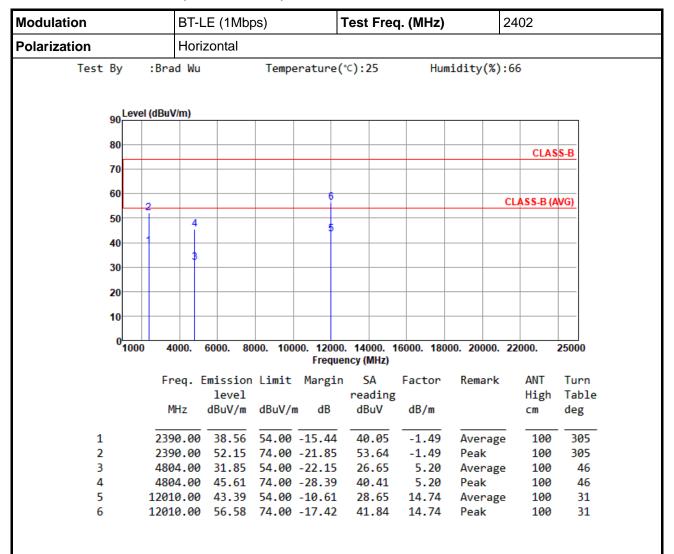

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor, cable loss and amplifier gain



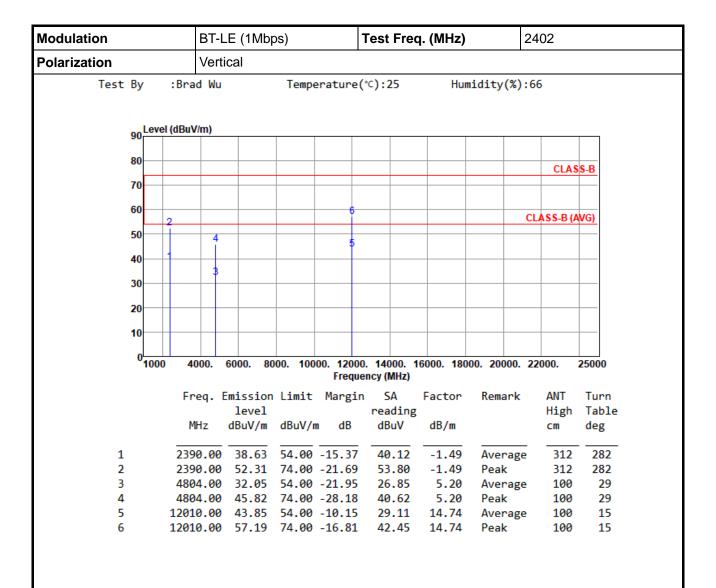


\*Factor includes antenna factor, cable loss and amplifier gain



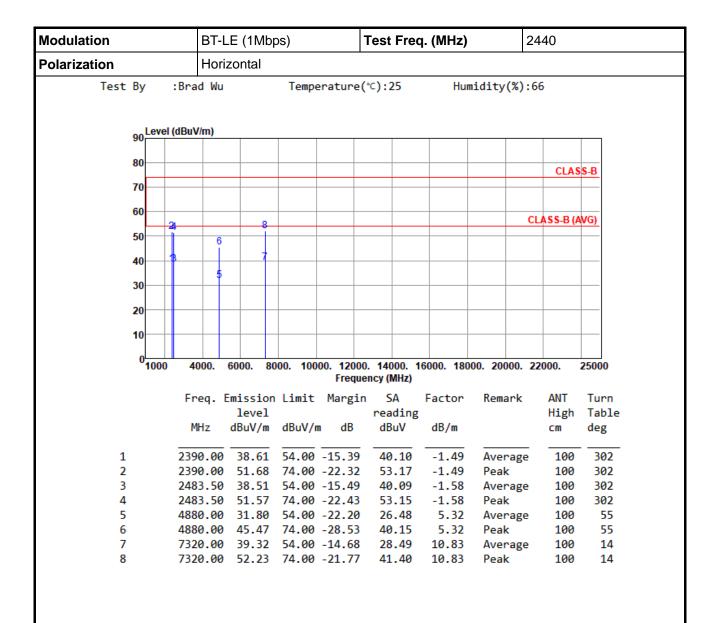


\*Factor includes antenna factor, cable loss and amplifier gain



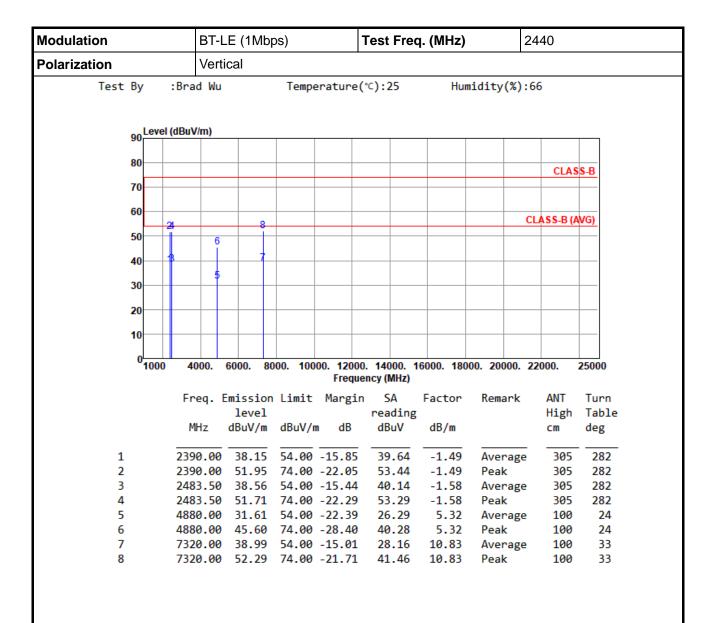


\*Factor includes antenna factor, cable loss and amplifier gain



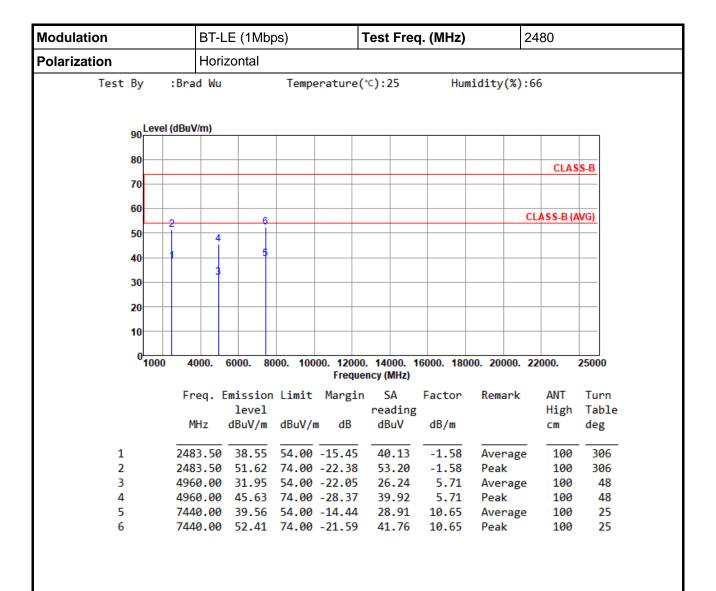


\*Factor includes antenna factor, cable loss and amplifier gain



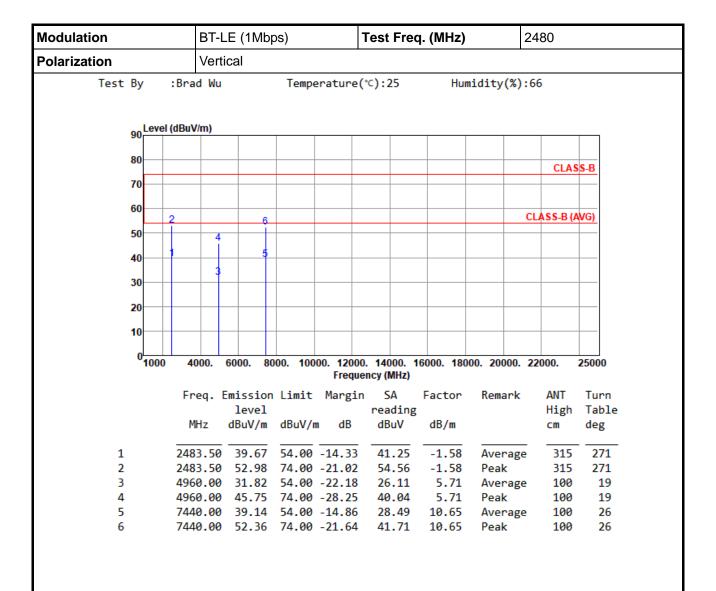


\*Factor includes antenna factor, cable loss and amplifier gain




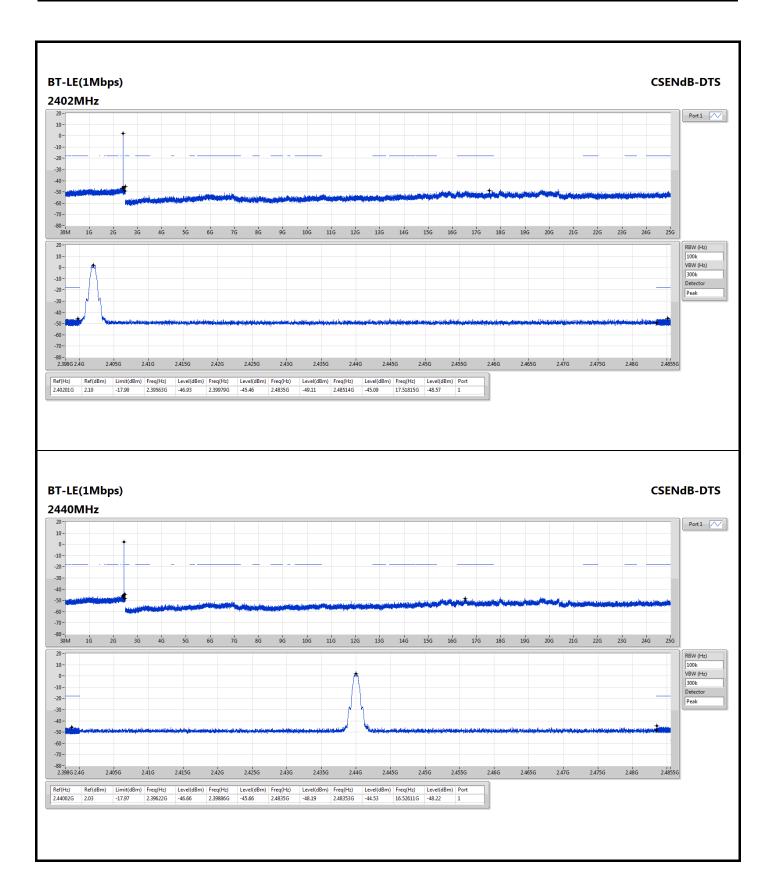



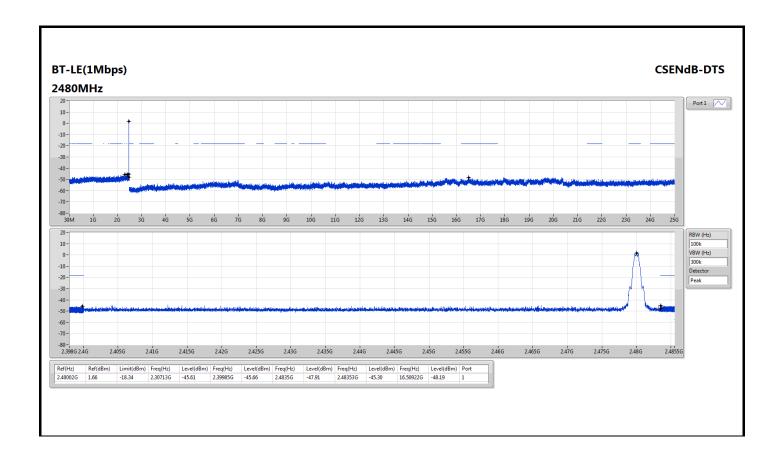




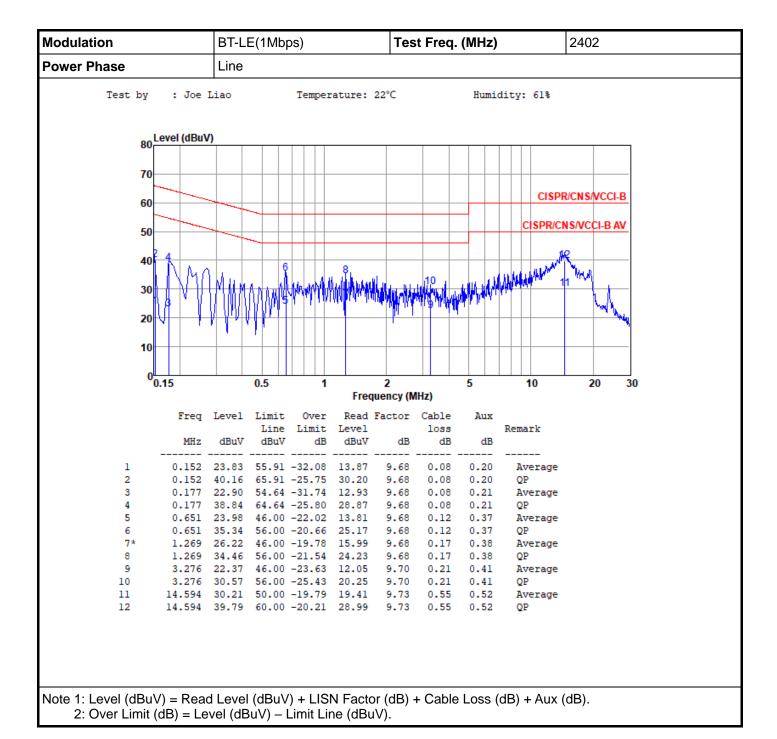

Page No. : 1 of 2



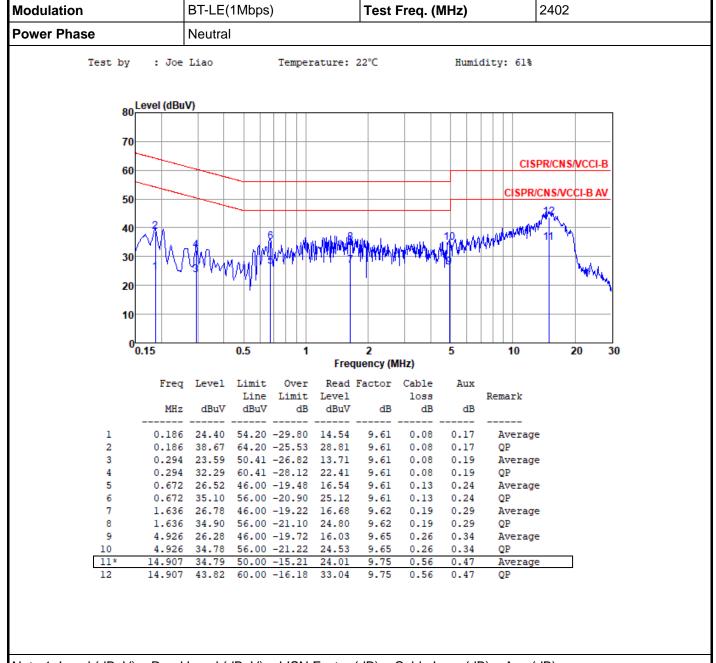

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).