



Report No.: FCC 1901181-01 File reference No.: 2019-02-20

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Product: 15.6' Advertising Displayer

Model No.: ULT156-03

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: February 20,2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1901181-01 Page 2 of 104

Date: 2019-02-20



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

Page 3 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
6.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement.	23
8.0	Maximum Output Power	43
9.0	Power Spectral Density Measurement.	46
10.0	Out of Band Measurement.	64
11.0	Antenna Requirement.	82
12.0	FCC ID Label	83
13.0	Photo of Test Setup and EUT View	84

Report No.: FCC1901181-01

Date: 2019-02-20



Page 4 of 104

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: 4/Floor, west block, Longzhu Road, Xin WuCun Industry Building, NanShan District, ShenZhen

Telephone: (755)-26001808-305 Fax: (755)-26002933

1.3 Description of EUT

Product: 15.6' Advertising Displayer

Manufacturer: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: 4/Floor, west block, Longzhu Road, Xin WuCun Industry Building, NanShan

District, ShenZhen

Brand Name: N/A

Model Number: ULT156-03

Hardware Version: 1.0.0 Software Version 1.0.0

Additional Model Number: N/A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20 Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

Antenna: Dipole antenna used with reverse polarity antenna connector. The gain of the antennas

is 2.0dBi.

Power Supply: Model: SUN-1200500; Rating: Input: 100-240VV~, 50/60Hz, 1.7A;

Output:DC12V,5A

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1901181-01 Page 5 of 104

Date: 2019-02-20



1.5 Test Duration 2019-01-21 to 2019-02-20

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1901181-01 Page 7 of 104

Date: 2019-02-20



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing ,Dutycycle>98%.

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing ,Dutycycle>98%.

Page 8 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB	PASS	Complies
	bandwidth>500kHz		
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit:	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1901181-01

Date: 2019-02-20



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

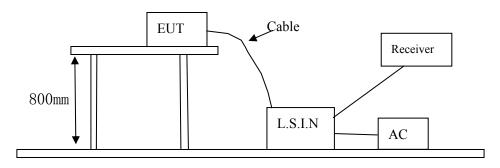

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID	
15 Cl A deserticio - Diculare	GLORY STAR TECHNICS	III T157 02	24 4 CC 111 T15 (02	
15.6' Advertising Displayer	(SHENZHEN) CO., LTD.	ULT156-03	2AACS-ULT156-03	

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1901181-01 Page 10 of 104

Date: 2019-02-20



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

	<u> </u>					
Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5 00$	73.0	60.0	56.0	46.0		
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Page 11 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

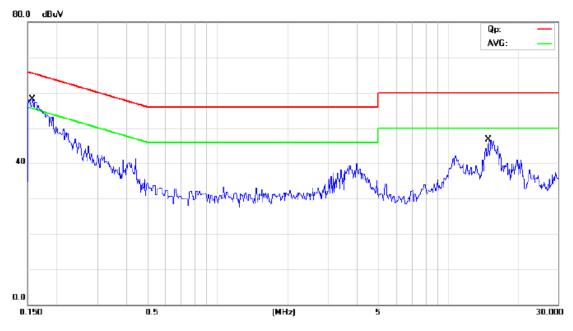

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1567	42.80	9.78	52.58	65.64	-13.06	QP	
2	0.1567	10.30	9.78	20.08	55.64	-35.56	AVG	
3	15.0400	28.30	10.38	38.68	60.00	-21.32	QP	
4	15.0400	2.50	10.38	12.88	50.00	-37.12	AVG	

Report No.: FCC1901181-01 Page 12 of 104

Date: 2019-02-20



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

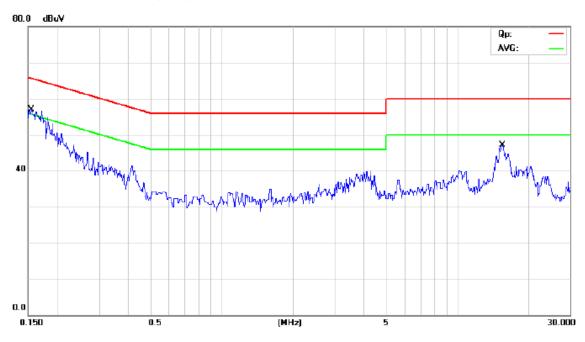

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1545	42.80	9.78	52.58	65.75	-13.17	QP	
2	0.1545	9.80	9.78	19.58	55.75	-36.17	AVG	
3	15.3727	31.00	10.40	41.40	60.00	-18.60	QP	
4	15.3727	5.00	10.40	15.40	50.00	-34.60	AVG	

Report No.: FCC1901181-01 Page 13 of 104

Date: 2019-02-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**OP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre –Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1901181-01 Page 14 of 104

Date: 2019-02-20



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Page 15 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

FCC_FCC Part 15B Class B 30MHz-1GHz

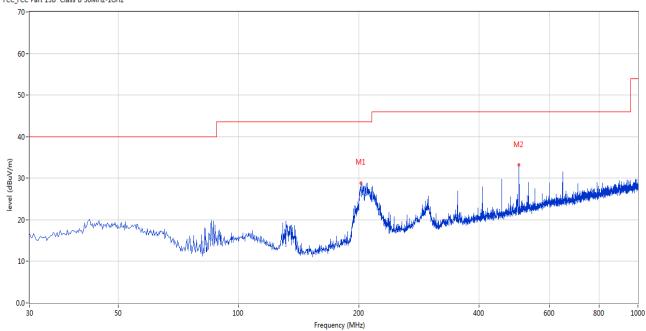

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	202.374	28.90	-13.39	43.5	-14.60	Peak	72.00	100	Н	Pass
2	503.969	33.17	-7.05	46.0	-12.83	Peak	206.00	100	Н	Pass

Page 16 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

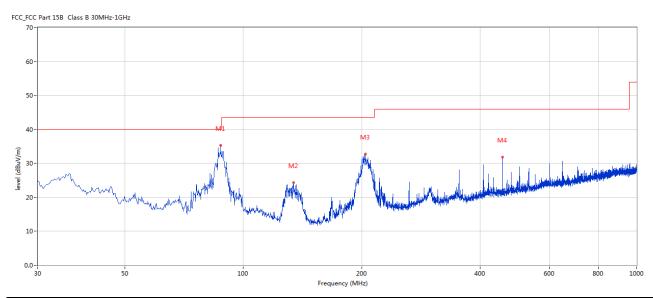

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	87.701	35.24	-15.67	40.0	-4.76	Peak	0.00	200	V	Pass
2	134.249	24.29	-17.05	43.5	-19.21	Peak	0.00	200	V	Pass
3	204.556	32.78	-13.55	43.5	-10.72	Peak	19.00	100	V	Pass
4	455.966	31.80	-7.95	46.0	-14.20	Peak	0.00	200	V	Pass


Page 17 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

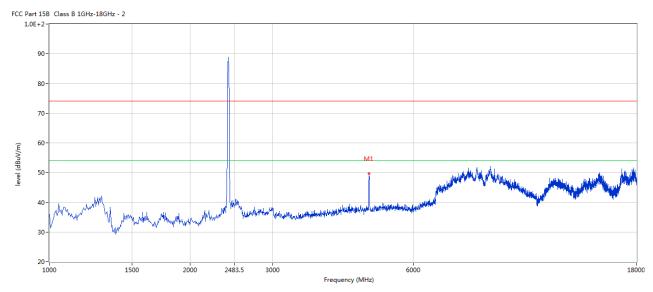

Ī	No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
	1	4819.795	49.69	3.14	74.0	-24.31	Peak	138.00	100	Н	Pass

Page 18 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



CH01 for 11g at 6Mbps: Vertical



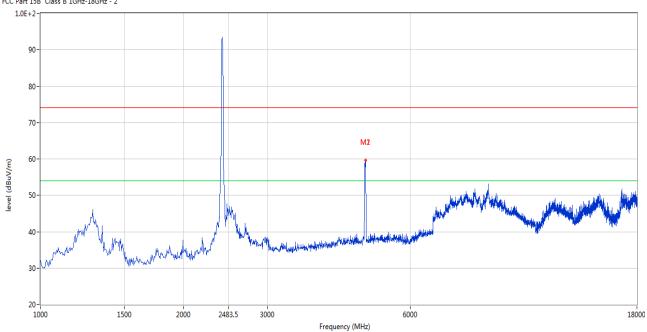


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4828.293	59.63	3.15	74.0	-14.37	Peak	319.00	100	V	Pass
2	4828.293	46.55	3.15	54.0	-7.45	AV	319.00	100	٧	Pass

Report No.: FCC1901181-01 Page 19 of 104

Date: 2019-02-20



CH06 for 11g at 6Mbps: Vertical

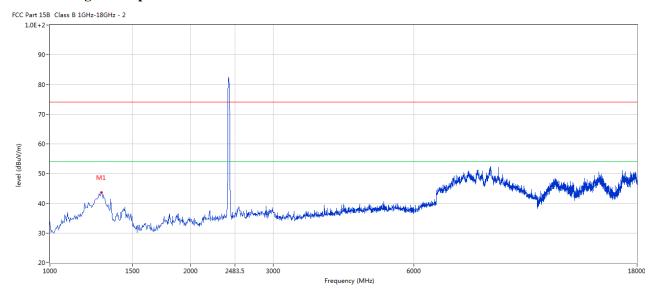


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	1288.928	43.65	-8.31	74.0	-30.35	Peak	17.00	100	V	Pass

Page 20 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



CH06 for 11g at 6Mbps: Horizontal

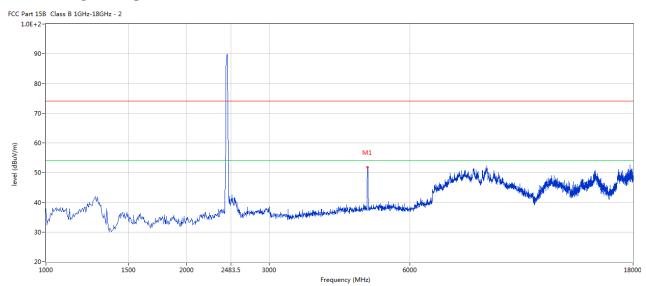


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4874.031	51.73	3.19	74.0	-22.27	Peak	137.00	100	Н	Pass

Report No.: FCC1901181-01 Page 21 of 104

Date: 2019-02-20



CH11 for 11g at 6Mbps: Vertical

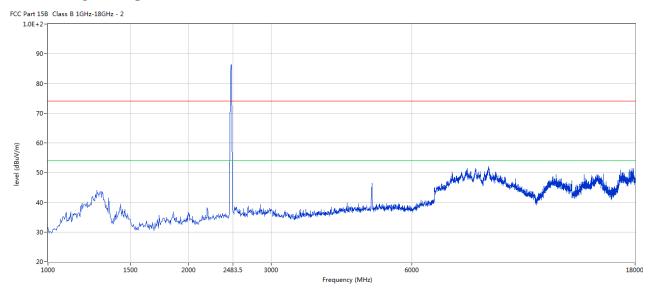


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4912	46.40	3.28	74.0	-27.60	Peak	314.00	100	V	Pass

Report No.: FCC1901181-01 Page 22 of 104

Date: 2019-02-20



CH11 for 11g at 6Mbps: Horizontal

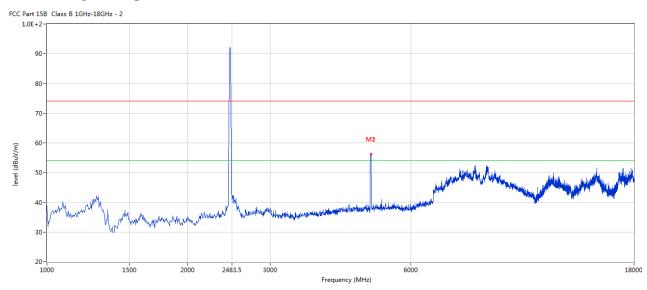

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4924.267	56.20	3.29	74.0	-17.80	Peak	146.00	100	Н	Pass
2	4924.267	41.39	3.29	54.0	-12.61	AV	146.00	100	Н	Pass

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz, it is only the floor noise.

Page 23 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 24 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



6dB Occupied Bandwidth


EUT		15.6' Adve	ertising Dis	player	Model		ULT	156-03
Mode		8	302.11b		Input Vol	tage	12	0V~
Temperat	ure	24	4 deg. C,		Humidity	,	56%	6 RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1		2412		10.04		0.5		Pass
6		2437	1	10	.04		0.5	Pass
11		2462	1	10	10.04		0.5	Pass
1		2412	11	9.	32		0.5	Pass
6		2437	11	9.32			0.5	Pass
11	2462		11	9.	32		0.5	Pass

Report No.: FCC1901181-01 Page 25 of 104

Date: 2019-02-20



1. 802.11b at 1Mbps of CH01

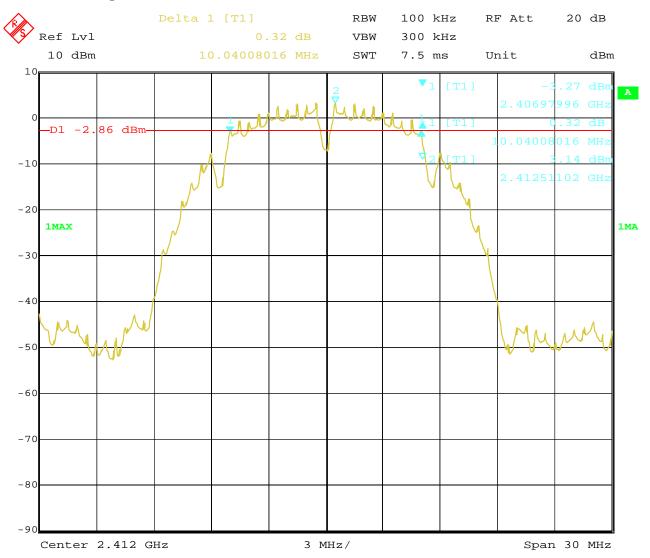


Date: 18.FEB.2019 15:01:23 Report No.: FCC1901181-01 Page 26 of 104

Date: 2019-02-20



2. 802.11b at 1Mbps of CH06

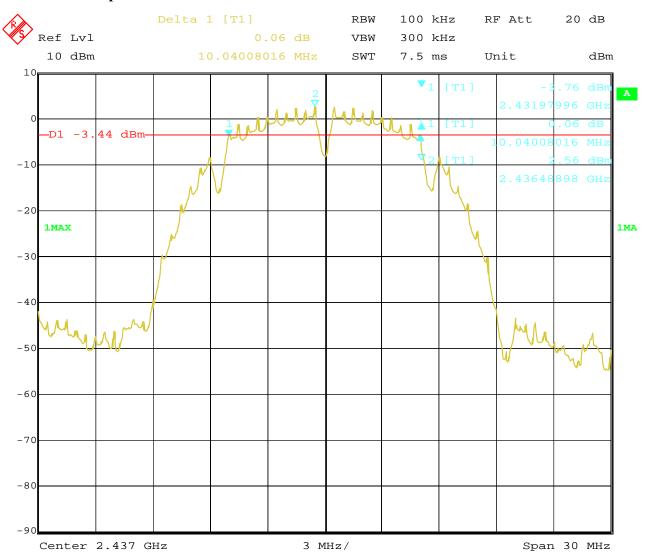


Date: 18.FEB.2019 15:19:20 Report No.: FCC1901181-01 Page 27 of 104

Date: 2019-02-20



3. 802.11b at 1Mbps of CH11

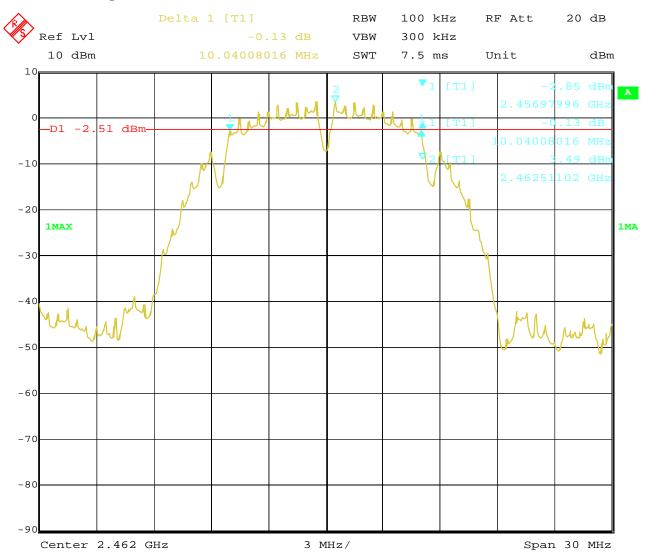


Date: 18.FEB.2019 15:20:51 Report No.: FCC1901181-01 Page 28 of 104

Date: 2019-02-20



4. 802.11b at 11Mbps of CH01

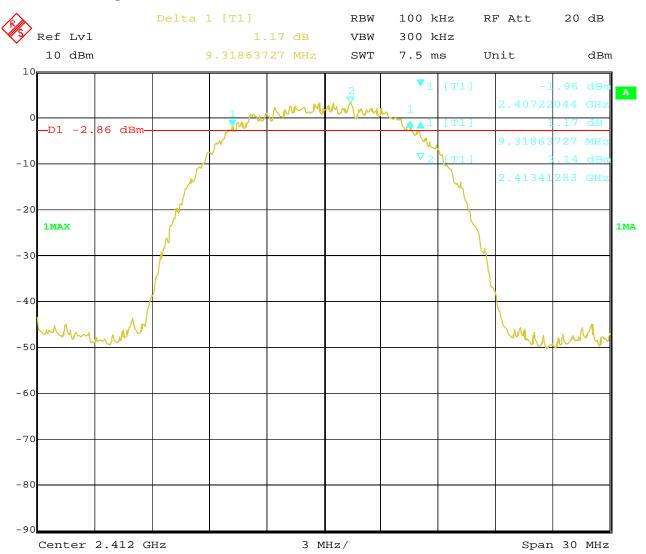


Date: 18.FEB.2019 15:10:27 Report No.: FCC1901181-01 Page 29 of 104

Date: 2019-02-20



5. 802.11b at 11Mbps of CH06

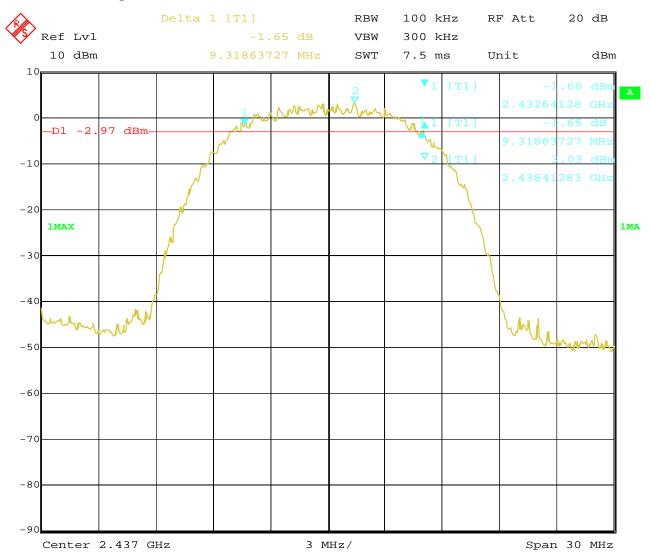


Date: 18.FEB.2019 15:13:01 Report No.: FCC1901181-01 Page 30 of 104

Date: 2019-02-20



6. 802.11b at 11Mbps of CH11

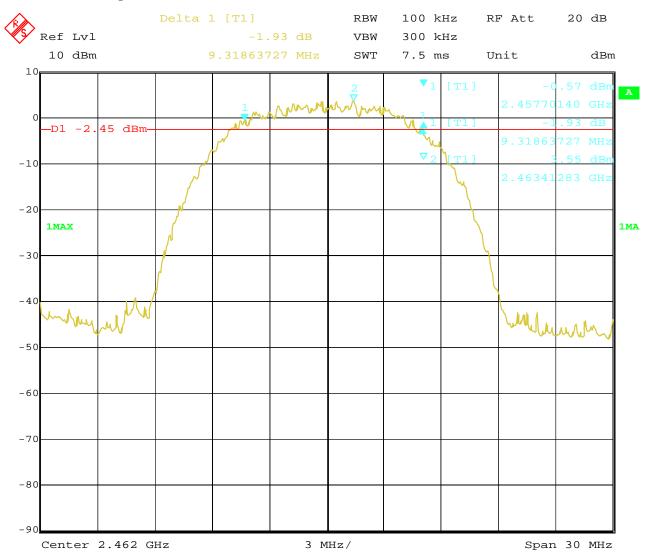

Date: 18.FEB.2019 15:30:04

Page 31 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



6dB Occupied Bandwidth

EUT		15.6' Adve	ertising Dis	player	Model		UI	T156-03
Mode		8	302.11g		Input Vol	tage		120V~
Temperature		24	4 deg. C,		Humidity	r	5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)			Pass/ Fail
1		2412	6	15	.81		0.5	Pass
6		2437	6	15	.81	0.5		Pass
11		2462	6	15.81		0.5		Pass

Page 32 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



Test Plots:

1. 802.11g at 6Mbps of CH01

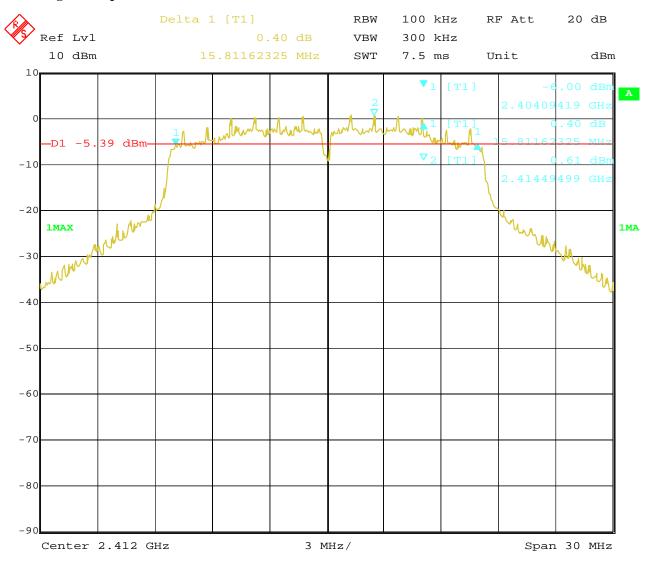


Date: 18.FEB.2019 15:07:08 Report No.: FCC1901181-01 Page 33 of 104

Date: 2019-02-20



2. 802.11g at 6Mbps of CH06

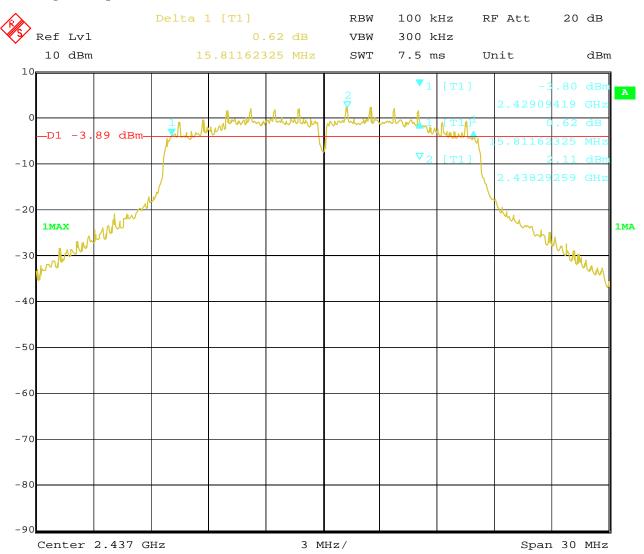


Date: 18.FEB.2019 15:18:07 Report No.: FCC1901181-01 Page 34 of 104

Date: 2019-02-20



3. 802.11g at 6Mbps of CH11

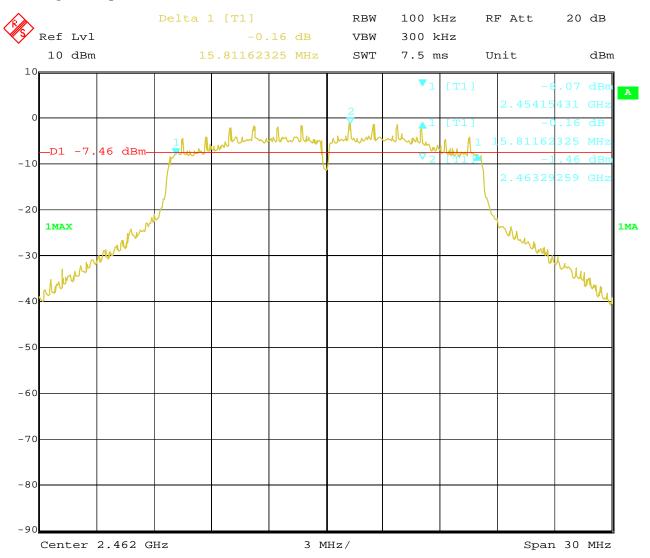

Date: 18.FEB.2019 15:28:03

Page 35 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



6dB Occupied Bandwidth

EUT	_	15.6' Adve	ertising Dis	player	Model		ULT	156-03
Mode		802	.11n HT20		Input Vol	tage	12	0V~
Temperature		24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	mcs0	17	.01		0.5	Pass
6		2437	mcs0	17	.01		0.5	Pass
11	2462		mcs0	17	.01		0.5	Pass

Page 36 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



Test Plots:

1. 802.11n at HT20 of CH01

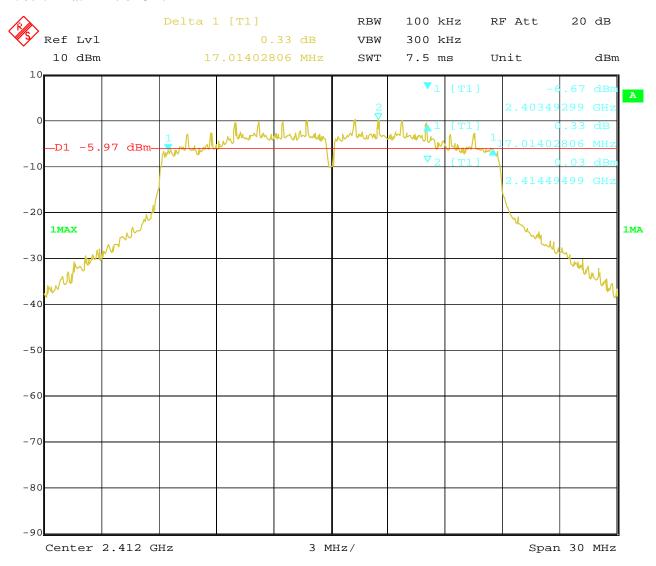


Date: 18.FEB.2019 15:51:56 Report No.: FCC1901181-01 Page 37 of 104

Date: 2019-02-20



2. 802.11n at HT20 of CH06

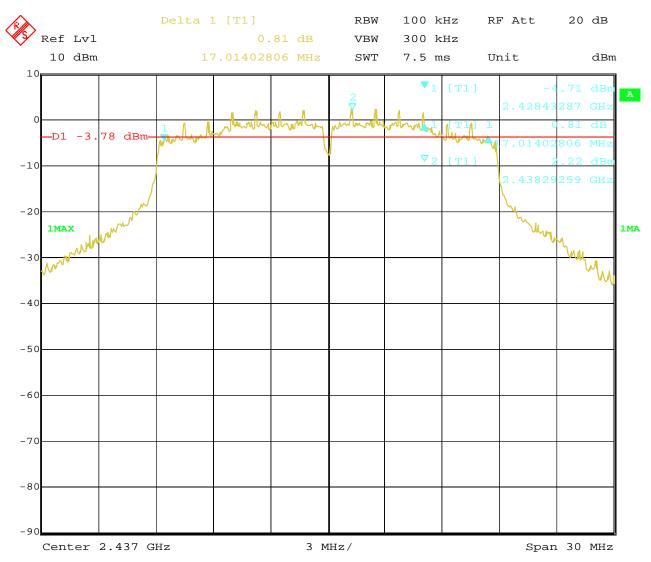


Date: 18.FEB.2019 15:48:34 Report No.: FCC1901181-01 Page 38 of 104

Date: 2019-02-20



3. 802.11n at HT20 of CH11

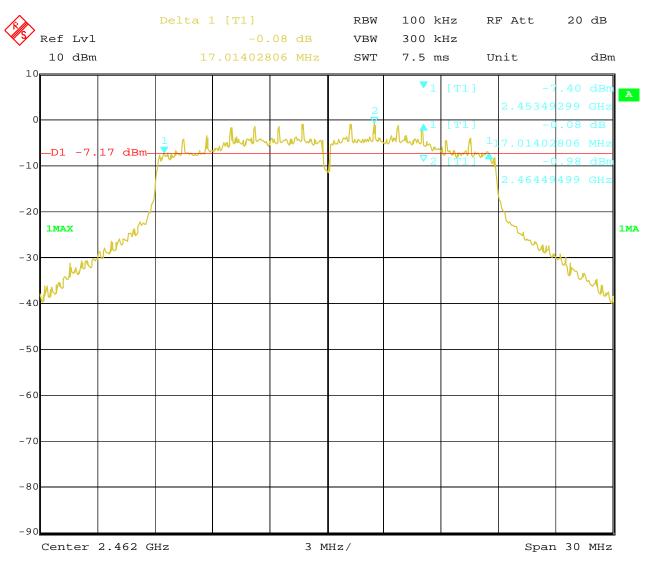

Date: 18.FEB.2019 15:35:51

Page 39 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



6dB Occupied Bandwidth

EUT		15.6' Adve	ertising Dis	player	Model	•	ULT156-03	
Mode		802	.11n HT40		Input Vol	tage	12	0V~
Temperati	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
3		2422	mcs0	35	.15		0.5	Pass
6		2437	mcs0	35	.15		0.5	Pass
9		2452	mcs0	35	.15		0.5	Pass

Page 40 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



Test Plots:

1. 802.11n at HT40 of CH03

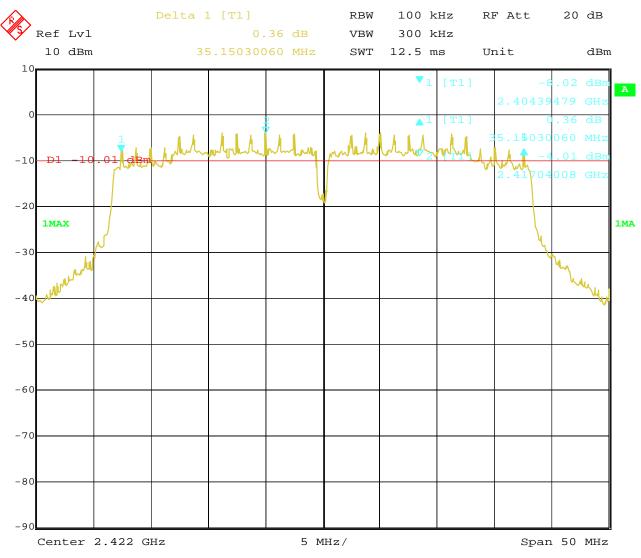


Date: 18.FEB.2019 15:53:32 Report No.: FCC1901181-01 Page 41 of 104

Date: 2019-02-20



2. 802.11n at HT40 of CH06

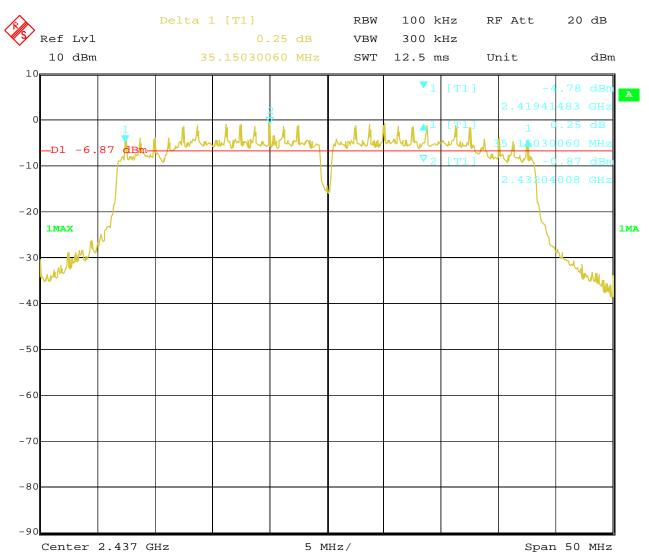


Date: 18.FEB.2019 15:57:29 Report No.: FCC1901181-01 Page 42 of 104

Date: 2019-02-20



3. 802.11n at HT40 of CH09

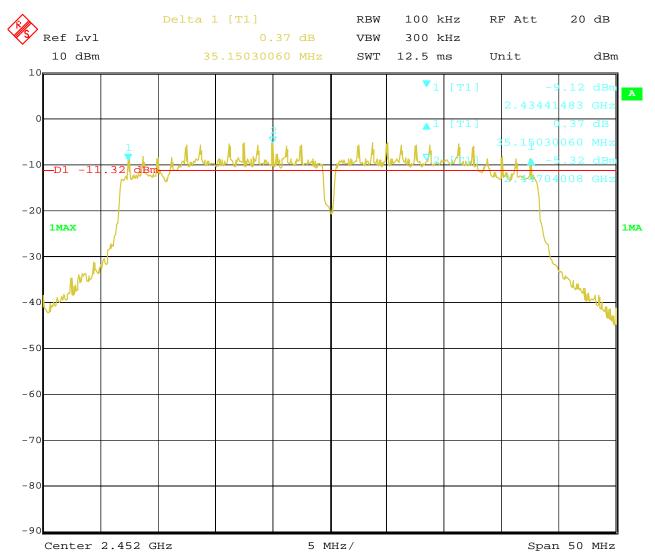

Date: 18.FEB.2019 15:59:27 Report No.: FCC1901181-01


Date: 2019-02-20



Page 43 of 104

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Report No.: FCC1901181-01 Page 44 of 104

Date: 2019-02-20



8.4Test Results

EUT	EUT 15.6' Advertising Displayer Model		odel	ULT156-03				
Mode	Mode 802.11b Inp		Input	ıt Voltage		120V~		
Temperat	ure	24 deg	g. C,	Hur	nidity 5		56% RH	
Channel	Cha	annel Frequency (MHz)	Max. Power (dBm)	Max. Power Output (dBm) Power I (dBn)				
		(1:1112)	Peak		(32)			
1		2412	14.90	14.90)	Pass	
6		2437	14.78		30		Pass	
11		2462	15.23		30		Pass	

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	EUT 15.6' Advertising Displayer Model		odel	ULT156-03			
Mode	Mode 802.11g Input		Voltage		120V~		
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH
Channel	Cha	annel Frequency (MHz)	Max. Power (dBm)	Output	Power Limit (dBm)		Pass/ Fail
1		2412	18.43		30		Pass
6		2437	19.87	19.87)	Pass
11		2462	16.45	30)	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 45 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



EUT		15.6' Advertisin	ng Displayer	M	odel		ULT156-03	
Mode		802.11n ((HT20)	Input Voltage			120V~	
Temperati	ure	24 deg	g. C,	Hur	nidity		56% RH	
Channel	Channel Frequency		Max. Power (dBm)	Power			Pass/ Fail	
		(MHz)	Peak		(dBm)			
1		2412	18.05		30		Pass	
6		2437	19.57		30		Pass	
11		2462	16.29		30		Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		15.6' Advertisi	ng Displayer	M	odel		ULT156-03	
Mode		802.11n (802.11n (HT40) Input Voltage		Voltage	120V~		
Temperat	ure	24 deg	g. C,	Hur	nidity		56% RH	
Channel	Channel Frequency (MHz)		Max. Power (dBm)	Output	Power (dB		Pass/ Fail	
		(WITIZ)	Peak		(uD	111)		
3		2422	16.87		30)	Pass	
6		2437	19.90	19.90)	Pass	
9		2452	15.64		30		Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH01, CH04 and CH07

- The result basic equation calculation as follow:
 Max. Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Page 46 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 47 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



9.4Test Result

EUT	EUT 15.6' Advertisin		ng Displayer Model		ULT156-03		
Mode	Mode 802.11b 11Mbps		1Mbps	Input Voltage		120V~	
Temperat	ure	24 deg	g. C,	Humidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Final RF Po Level (dBi				
			11Mbps	5			
1		2412 -6.89			8		Pass
6		2437 -6.69			8		Pass
11		2462 -6.46		8			Pass

		T					
EUT	EUT 15.6' Advertising Displayer Mode		odel		ULT156-03		
Mode		802.11b	1 Mbps	Input Voltage			120V~
Temperat	ure	24 deg	g. C,	Hur	nidity		56% RH
Channel	Ch	annel Frequency	Final RF Pc	RF Power M		n Limit	Pass/ Fail
Chamilei	(MHz) Level in (dBm)		3m)	(dB	m)		
			1Mbps	3			
1		2412	-6.27		8		Pass
6		2437	-6.29		8		Pass
11		2462	-5.86		8		Pass

Page 48 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



EUT	EUT 15.6' Advertisin		ng Displayer Model		odel	ULT156-03		
Mode	Mode 802.11g 6Mbps Input Volta		Voltage		120V~			
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Channel Frequency Final RF Power M		Maximum Limit		Pass/ Fail			
Chamiei		(MHz)	Level in (dl	3m)	(dBm)			
			6Mbps					
1		2412	-8.77	-8.77			Pass	
6		2437	-7.21		8		Pass	
11		2462	-9.99		8		Pass	

EUT	EUT 15.6' Advertisin		ng Displayer Model		odel	ULT156-03		
Mode	Mode 802.11n HT20 mcs0 Input Vol		Voltage		120V~			
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Channel Frequency Final RF Power		Maximum Limit		Pass/ Fail			
Chamilei		(MHz)	Level (dB	m)	(dBm)			
			HT20					
1	2412 -8.95			8		Pass		
6		2437	-7.03		8		Pass	
11		2462	-9.81		8		Pass	

EUT	EUT 15.6' Advertising Displayer Model		odel	ULT156-03				
Mode		802.11n H7	11n HT40 msc0 Input Voltage			120V~		
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Final RF Po Level (dBi	.,,				
	ı		HT40					
3		2422	-12.93		8		Pass	
6		2437	-10.21		8		Pass	
9		2452	-14.07		8		Pass	


Report No.: FCC1901181-01 Page 49 of 104

Date: 2019-02-20



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

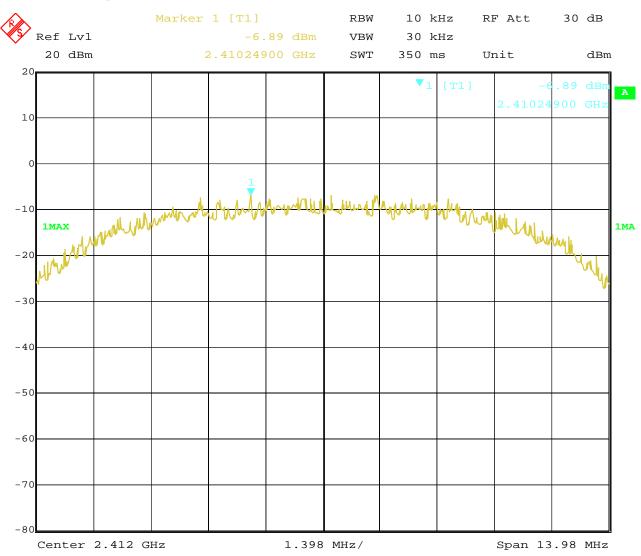

Date: 18.FEB.2019 17:34:47


Page 50 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



2. 802.11b at 11Mbps at CH06

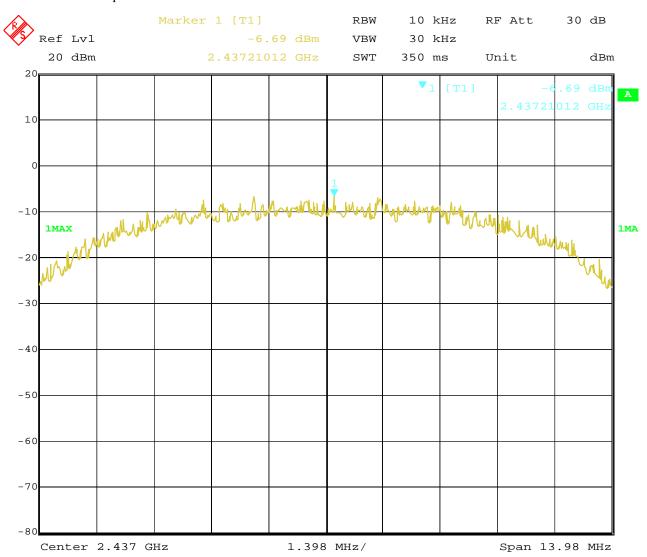

Date: 18.FEB.2019 17:35:11


Page 51 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



3. 802.11b at 11Mbps of CH11

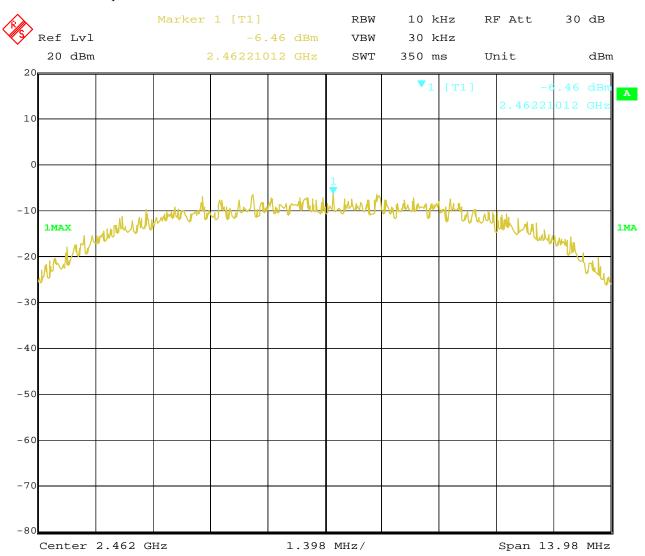

Date: 18.FEB.2019 17:35:36


Page 52 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



4. 802.11b at 1Mbps of CH1

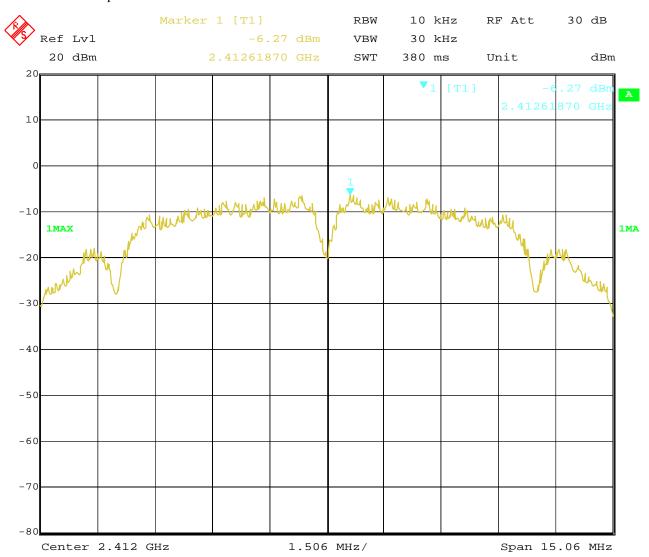

Date: 18.FEB.2019 17:31:38


Page 53 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



5. 802.11b at 1Mbps of CH6

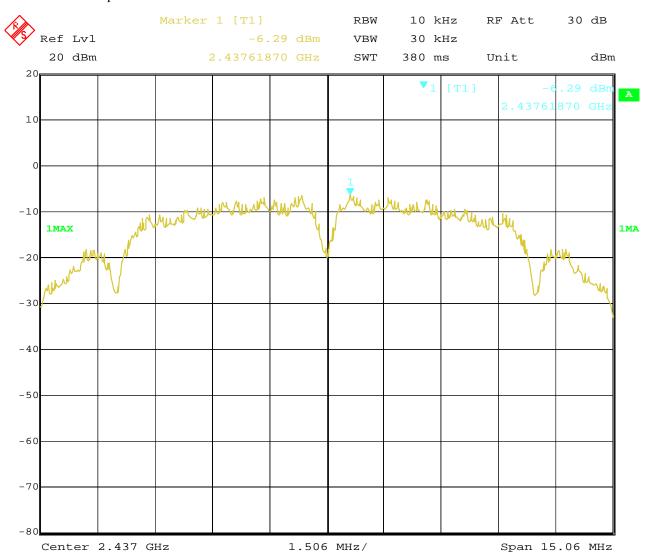

Date: 18.FEB.2019 17:31:07


Page 54 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



6. 802.11b at 1Mbps of CH11

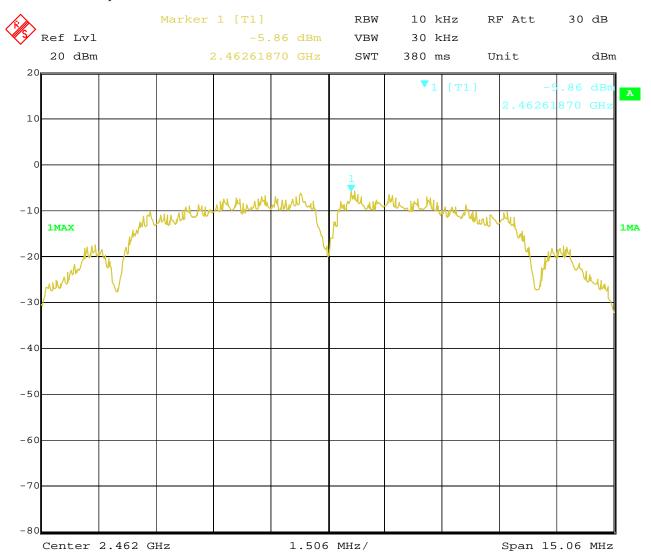

Date: 18.FEB.2019 17:32:05


Page 55 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



7. 802.11g at 6Mbps of CH1

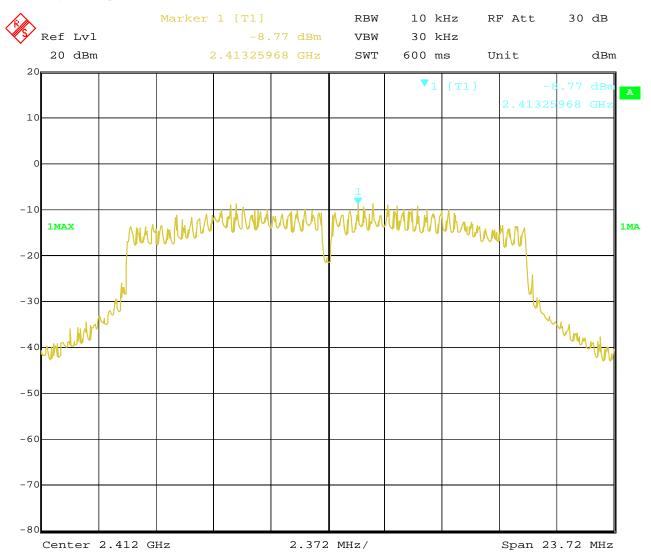

Date: 18.FEB.2019 17:34:15


Page 56 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



8. 802.11g at 6Mbps of CH6

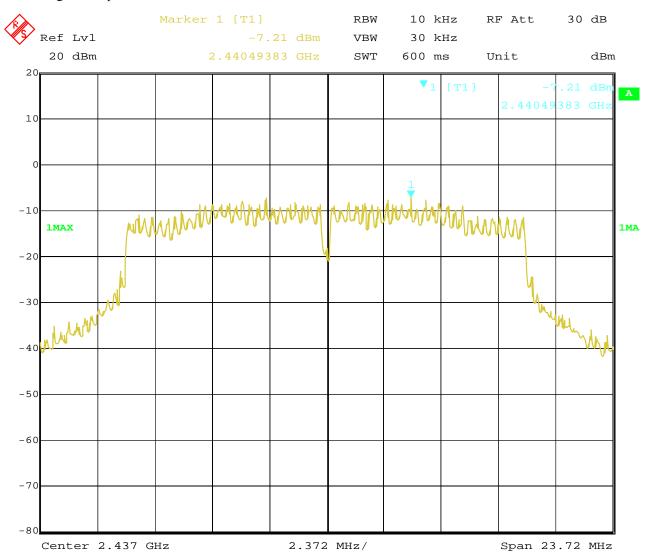

Date: 18.FEB.2019 17:33:46


Page 57 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



9. 802.11g at 6Mbps of CH11

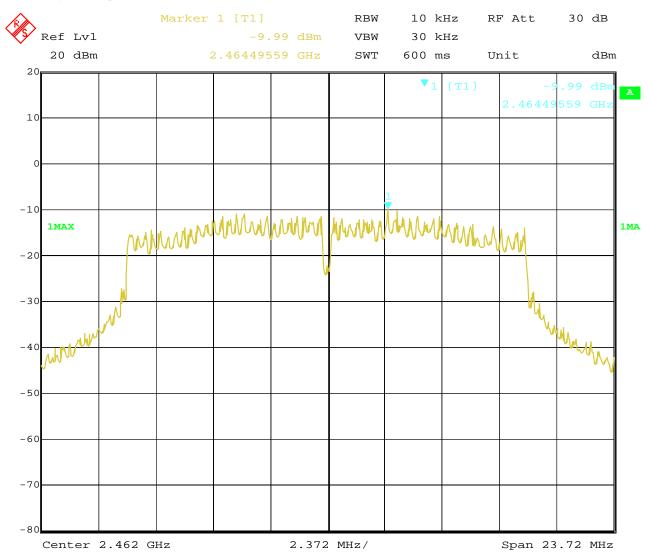

Date: 18.FEB.2019 17:32:55


Page 58 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



10. 802.11n at HT20 of CH01

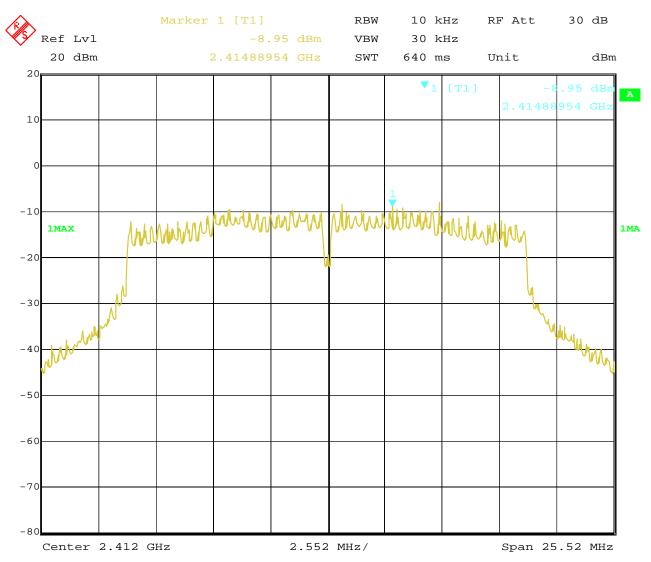

Date: 18.FEB.2019 17:23:49


Page 59 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



11. 802.11n at HT20 of CH06

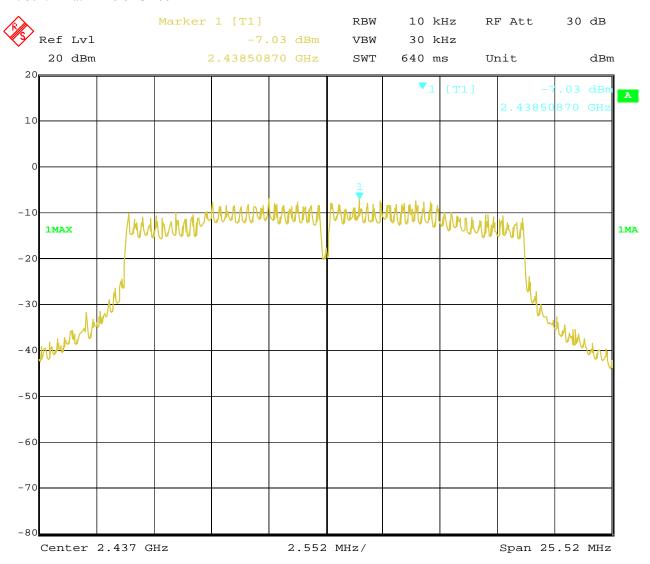

Date: 18.FEB.2019 17:30:26


Page 60 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



12. 802.11n at HT20 of CH11

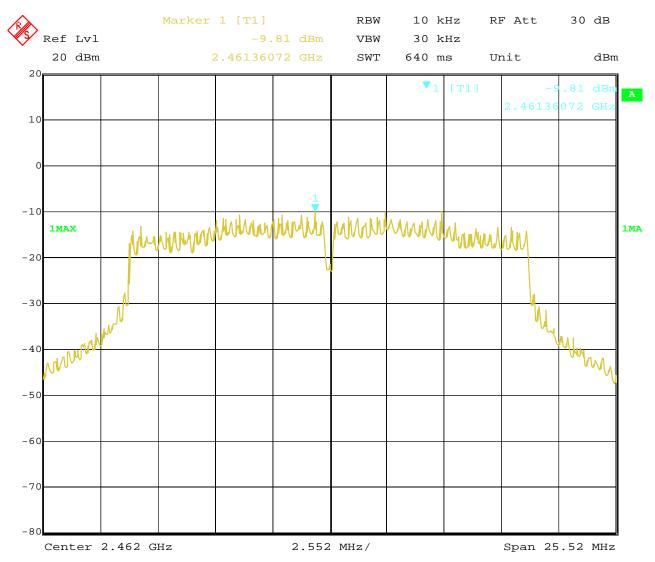

Date: 18.FEB.2019 17:25:15


Page 61 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



13. 802.11n at HT40 of CH01

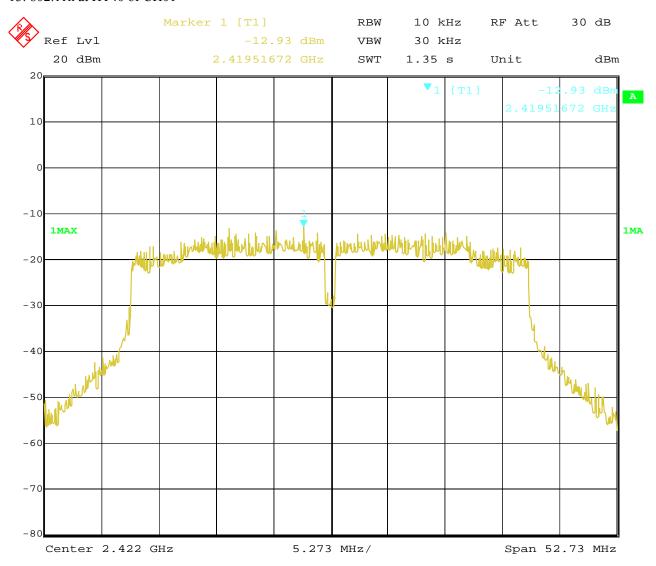


Date: 18.FEB.2019 17:22:45 Report No.: FCC1901181-01 Page 62 of 104

Date: 2019-02-20



14. 802.11n at HT40 of CH04

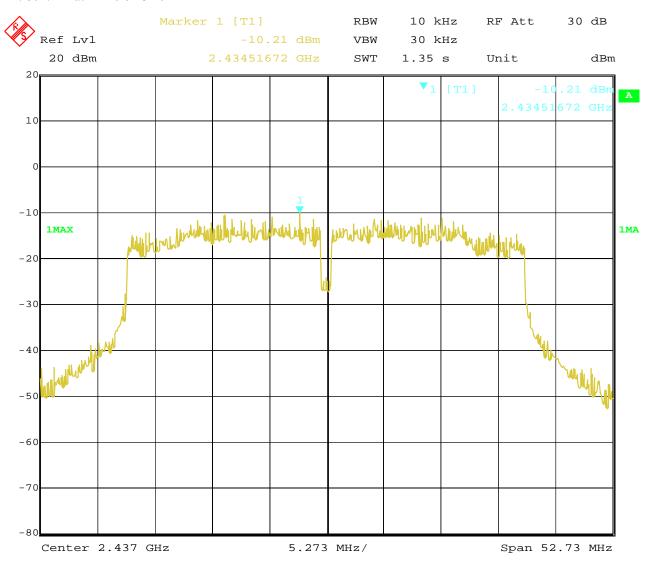


Date: 18.FEB.2019 17:22:15 Report No.: FCC1901181-01 Page 63 of 104

Date: 2019-02-20



15. 802.11n at HT40 of CH07

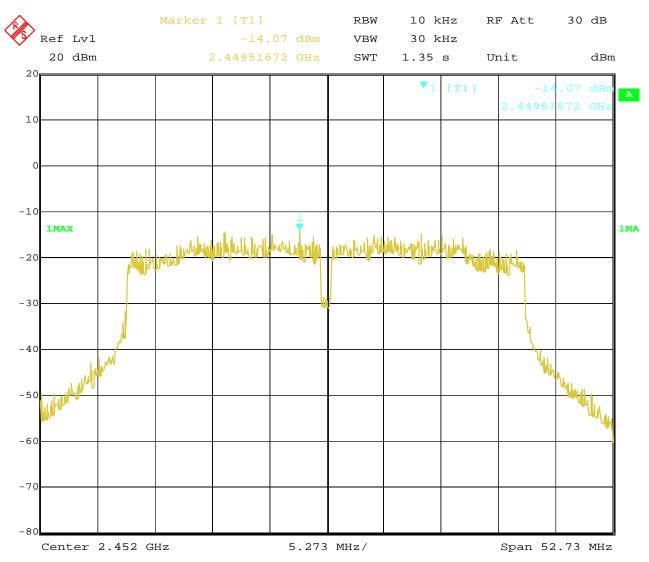


Date: 18.FEB.2019 17:21:41 Report No.: FCC1901181-01

Date: 2019-02-20



Page 64 of 104

10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 65 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Mode Keeping Transmitting		120V~
Temperature 24 deg. C,		Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

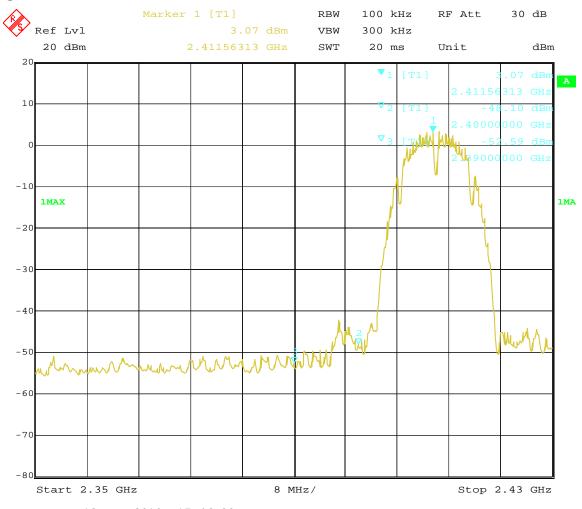

18.FEB.2019 17:46:33 Date:

Page 66 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature 24 deg. C,		Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

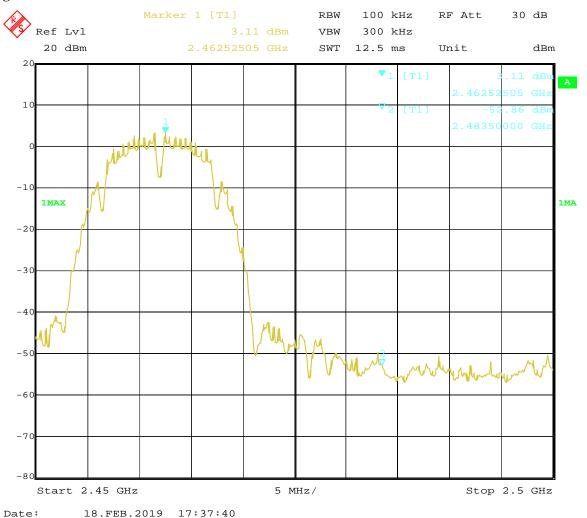

Page 67 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




For 802.11b mode

CH01 at 11Mbps

Band-edge Measurement 10.4

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

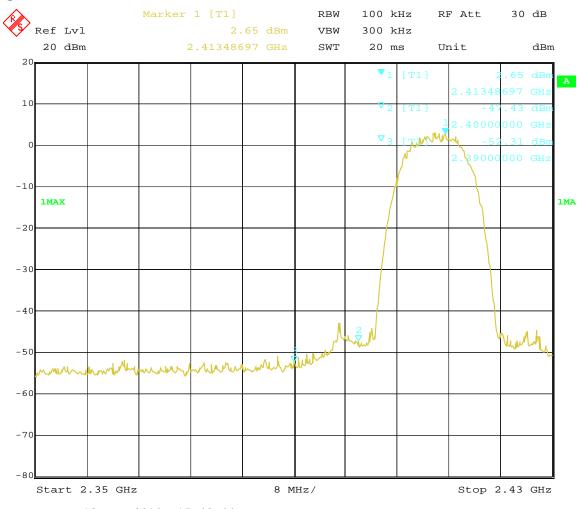

18.FEB.2019 17:48:44 Date:

Page 68 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

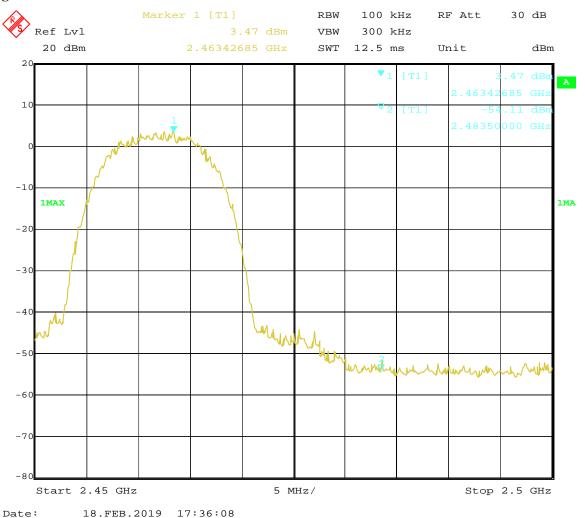

Page 69 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

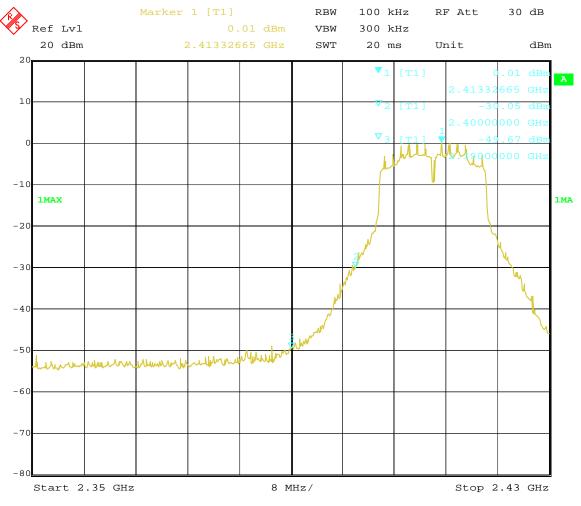

Date: 18.FEB.2019 17:47:54

Page 70 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




CH11 at 6Mbps

10.4 Band-edge Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

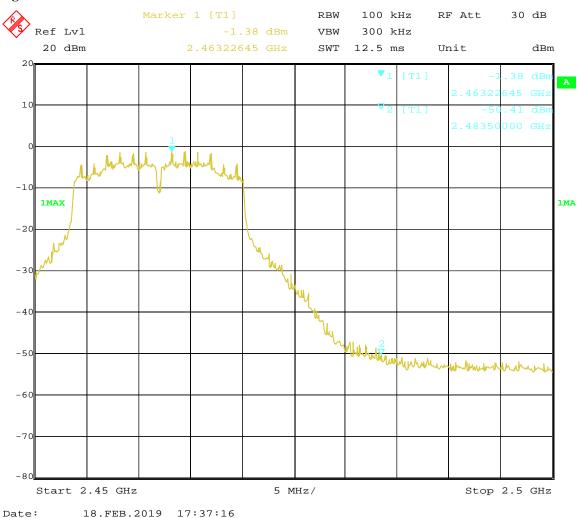

Page 71 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

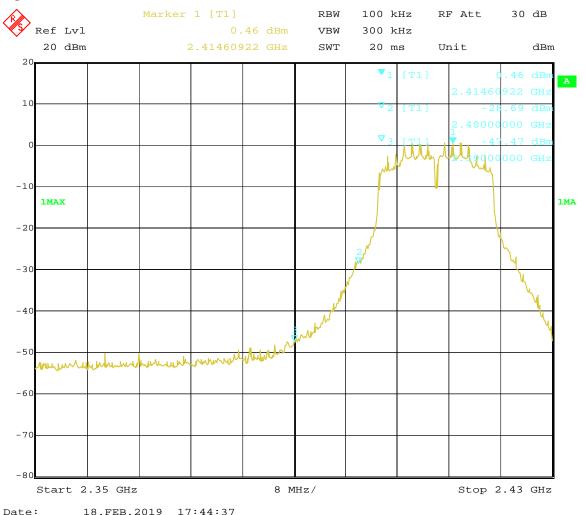

18.FEB.2019 17:44:37

Page 72 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




CH11 at mcs0

10.4 Band-edge Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

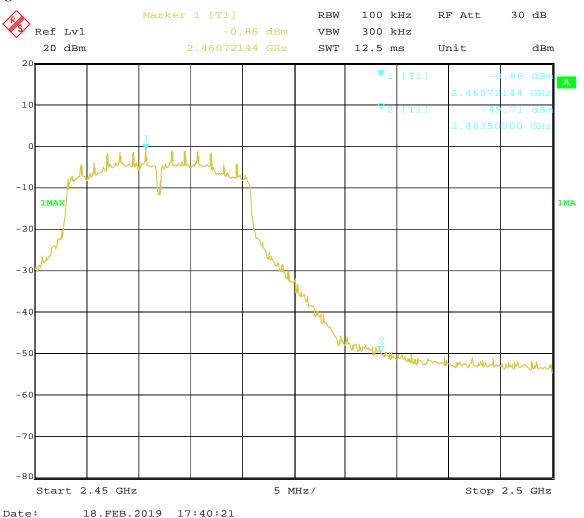

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 73 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

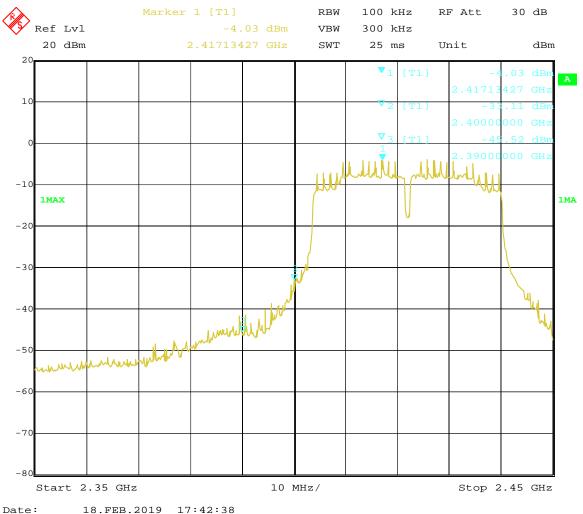

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 74 of 104

Report No.: FCC1901181-01

Date: 2019-02-20




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	15.6' Advertising Displayer	Model	ULT156-03
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

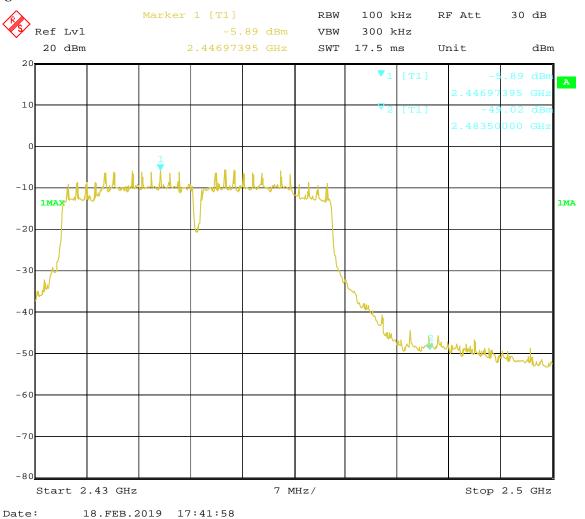

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 75 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



10.5 Restricted band Measurement

EUT	15.6' Adve	rtising Displayer	Model	ULT156-03				
Mode	Keeping	Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11b mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	37.22	Timi	$74(dB\mu V/m)$				
	AV (dBμV/m)		Limit	54(dBμV/m)				
		802.11b mod	e, Vertical					
2390	PK (dBμV/m)	40.85	Limit	74(dBμV/m)				
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				

2000 10000110000	Restricted band virtusurement							
EUT	15.6' Adve	rtising Displayer	Model	ULT156-03				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11b mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	42.96	T 114	74(dBμV/m)				
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				
		802.11b mode, High	Channel, Vertical					
2483.5	PK (dBμV/m)	42.33	Timi	74(dBµV/m)				
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				

Page 76 of 104

Report No.: FCC1901181-01


Date: 2019-02-20



10.5 Restricted band Measurement

EUT	15.6' Adve	rtising Displayer	Model	ULT156-03					
Mode	Keeping	g Transmitting	Input Voltage	120V~					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11g mode, Low Channel, Horizontal									
2390	PK (dBμV/m)	41.43	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	54(dBμV/m)					
	802.11g mode, Vertical								
2390	PK (dBμV/m)	37.43	Limit	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					

Test Plots

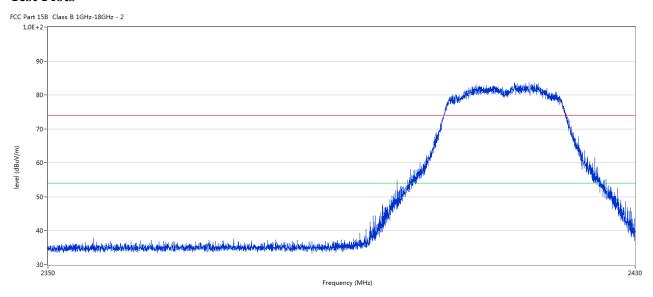


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	2390.000	37.43	-3.53	74.0	-36.57	Peak	210.00	100	V	Pass

Page 77 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



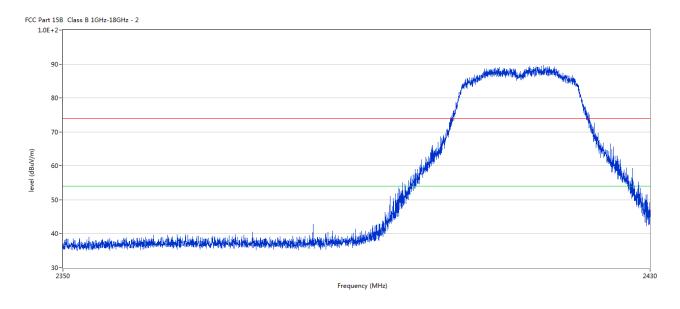

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2390.000	41.43	-3.53	74.0	-32.57	Peak	136.00	100	Н	Pass


Page 78 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



EUT	15.6' Adve	rtising Displayer	Model	ULT156-03				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11g mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	43.72	T ::4	$74(dB\mu V/m)$				
	AV ($dB\mu V/m$)		Limit	$54(dB\mu V/m)$				
	802.11g mode, High Channel, Vertical							
2483.5	PK (dBμV/m)	43.38	Limit	74(dBμV/m)				
	AV $(dB\mu V/m)$		Limit	54(dBμV/m)				

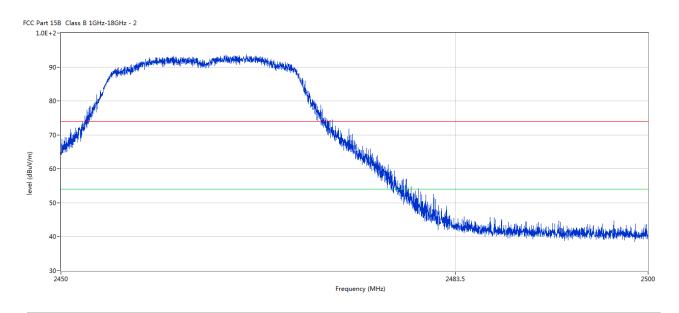


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	2483.500	43.72	-3.57	74.0	-30.28	Peak	168.00	100	Н	Pass

Report No.: FCC1901181-01 Page 79 of 104

Date: 2019-02-20



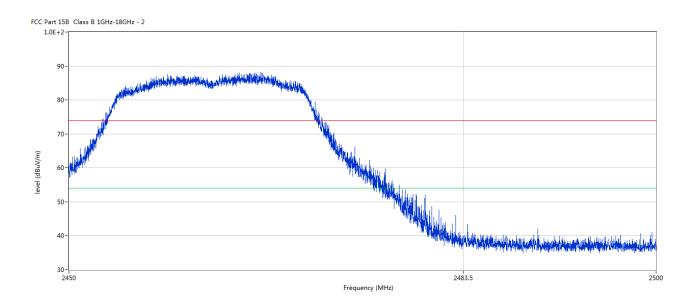

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2483.500	43.38	-3.57	74.0	-30.62	Peak	318.00	100	V	Pass

Page 80 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



10.5 Restricted band Measurement

EUT	15.6' Adve	rtising Displayer	Model	ULT156-03				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	l deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11n HT20 mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	37.21	T ::4	74(dBµV/m)				
	AV (dBμV/m)		Limit	54(dBµV/m)				
	802.11n HT20 mode, Low Channel, Vertical							
2390	PK (dBμV/m)	40.56	Limit	74(dBμV/m)				
	AV (dBμV/m)		Limit	54(dBµV/m)				

EUT	15.6' Adve	rtising Displayer	Model	ULT156-03			
Mode	Keeping	Transmitting	Input Voltage	120V~			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
802.11n HT20 mode, High Channel, Horizontal							
2483.5	PK (dBμV/m)	43.08	T ::4	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	54(dBμV/m)			
	8	02.11n HT20 mode, H	igh Channel, Vertic	cal			
2483.5	PK (dBμV/m)	42.56	Limit	74(dBμV/m)			
	AV (dBμV/m)		Liffill	$54(dB\mu V/m)$			

Page 81 of 104 Report No.: FCC1901181-01

Date: 2019-02-20



10.5 Restricted band Measurement

EUT	15.6' Advertising Displayer		Model	ULT156-03			
Mode	Keeping Transmitting		Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
802.11n HT40 mode, Low Channel, Horizontal							
2390	PK (dBµV/m)	36.92	Limit	$74(dB\mu V/m)$			
	AV (dBμV/m)			54(dBμV/m)			
802.11n HT40 mode, Low Channel, Vertical							
2390	PK (dBμV/m)	40.25	Limit	74(dBμV/m)			
	AV (dBμV/m)			54(dBμV/m)			

10.5 Restricted band Weasurement							
EUT	15.6' Advertising Displayer		Model	ULT156-03			
Mode	Keeping Transmitting		Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
802.11n HT40 mode, High Channel, Horizontal							
2483.5	PK (dBµV/m)	42.16	T ''	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$			
802.11n HT40 mode, High Channel, Vertical							
2483.5	PK (dBµV/m)	41.78	- Limit	74(dBμV/m)			
	AV (dBμV/m)			$54(dB\mu V/m)$			

Report No.: FCC1901181-01

Date: 2019-02-20



Page 82 of 104

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Dipole antenna used with reverse polarity antenna connector. The gain of the antennas is 2.0dBi.

Report No.: FCC1901181-01 Page 83 of 104

Date: 2019-02-20



12.0 FCC ID Label

FCC ID: 2AACS-ULT156-03

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 84 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



13.0 Photo of testing

Conducted Emission Test Setup:

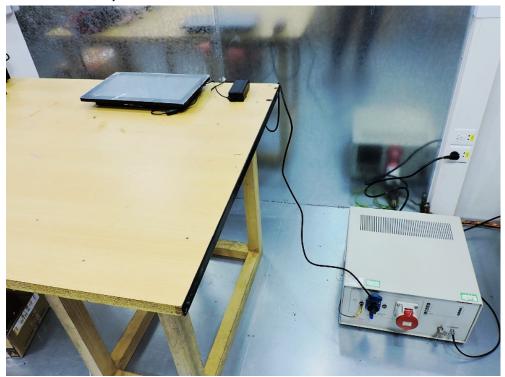


Page 85 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



Radiated Emission Test Setup:

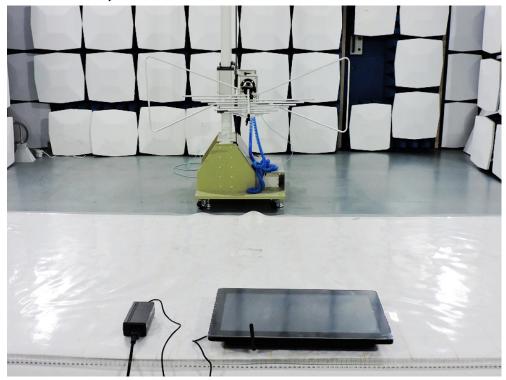

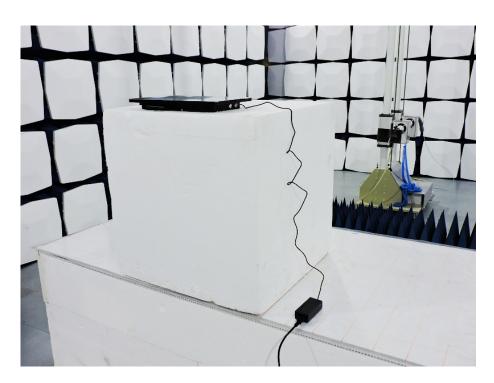

Page 86 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



Photographs - EUT

Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 87 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 88 of 104

Report No.: FCC1901181-01

Date: 2019-02-20



Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 89 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



Outside view



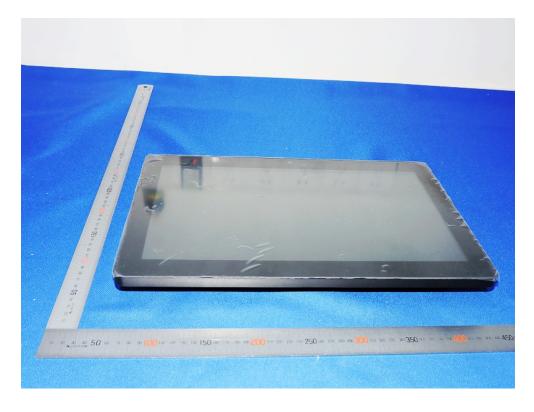

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 90 of 104


Report No.: FCC1901181-01

Date: 2019-02-20



Outside view



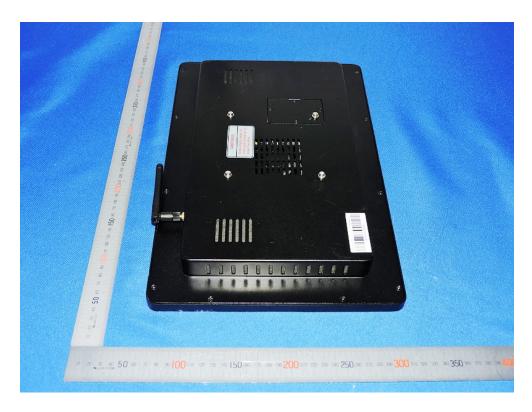

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.