


## RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant/Manufacturer : Zhong Shan City Richsound Electronic Industrial Ltd.  
Address : Qunle Industrial Area, East ShaGang Road, GangKou, ZhongShan, China.  
Factory : Zhong Shan City Richsound Electronic Industrial Ltd.  
Address : Qunle Industrial Area, East ShaGang Road, GangKou, ZhongShan, China.  
E.U.T. : TV Sound bar with wireless subwoofer, TV Soundbar, SOUND BAR WITH WIRELESS SUBWOOFER  
Brand Name : RSR, TOSHIBA  
Model No. : TB285CWW (For addition model and model difference refer to section 1)  
FCC ID : Z8M-TB235CWW  
Measurement Standard : FCC PART 15.249: 2016  
Date of Receiver : April 17, 2017  
Date of Test : April 19, 2017 to May 12, 2017  
Date of Report : June 07, 2017

This Test Report is Issued Under the Authority of :

Prepared by



Alina Guo / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S) .....	9
1.3 TEST METHODOLOGY .....	9
1.4 EQUIPMENT MODIFICATIONS .....	9
1.5 SUPPORT DEVICE .....	9
1.6 TEST FACILITY AND LOCATION .....	10
1.7 SUMMARY OF TEST RESULTS .....	11
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>12</b>
2.1 EUT CONFIGURATION .....	12
2.2 SPECIAL ACCESSORIES .....	12
2.3 DESCRIPTION OF TEST MODES .....	12
2.4 EUT EXERCISE .....	12
<b>3. CONDUCTED EMISSIONS TEST .....</b>	<b>13</b>
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	13
3.2 TEST CONDITION .....	13
3.3 MEASUREMENT RESULTS .....	13
<b>4. RADIATED EMISSION TEST .....</b>	<b>16</b>
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	16
4.2 MEASUREMENT PROCEDURE .....	17
4.3 LIMIT .....	18
4.4 MEASUREMENT RESULTS .....	19
<b>5. 20DB BANDWIDTH .....</b>	<b>23</b>
5.1 MEASUREMENT PROCEDURE .....	23
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	23
5.3 MEASUREMENT RESULTS .....	23
<b>6. BAND EDGE .....</b>	<b>26</b>
6.1 MEASUREMENT PROCEDURE .....	26
6.2 LIMIT .....	26
6.3 MEASUREMENT RESULTS .....	26
<b>7. ANTENNA REQUIREMENT .....</b>	<b>27</b>
7.1 MEASUREMENT PROCEDURE .....	27
7.2 MEASUREMENT RESULTS .....	27
<b>8. TEST EQUIPMENT LIST .....</b>	<b>28</b>

## Revision History of This Test Report

Report Number	Description	Issued Date
NTC1705213FV00	Initial Issue	2017-06-07

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

This device is a Bluetooth speaker, it's powered by AC power. For more details features, please refer to User's Manual.

Model Name : TB285CWW, TB230C, TB231C, TB232C, TB235C, TB341C, TB280C, TB282C, TB285C, TB286C, TB230CWW, TB231CWW, TB232CWW, TB235CWW, TB341CWW, TB280CWW, TB282CWW, TB286CWW, TY-WSB600  
All tests were carried on model TB285CWW.

Model Difference Description : These models have the same circuit schematic, construction, PCB Layout and critical components. Their difference in model number, Product name, function and brand name due to trading purpose. Details refer to model difference list.

Power Supply : AC120V 60Hz 30W

Test Voltage : AC 120V 60Hz

Note : None

#### Technical Specification:

##### 2.4G Function:

Frequency Range : 2404.5~2479.5MHz

Modulation Type : GFSK

Number of Channel : 16

Channel Space : 5MHz

Antenna Type : PCB

Antenna Gain : 2dBi (Declaration by manufacturer)

Channel List:

Channel	Frequency MHz	Channel	Frequency MHz
1	2404.5	9	2444.5
2	2409.5	10	2449.5
3	2414.5	11	2454.5
4	2419.5	12	2459.5
5	2424.5	13	2464.5
6	2429.5	14	2469.5
7	2434.5	15	2474.5
8	2439.5	16	2479.5

**Note:** The Lowest, middle, and the Highest frequency of channel were selected to perform the test. The frequency selected see below:

The Lowest frequency: 2404.5MHz

The middle frequency: 2444.5MHz

The Highest frequency: 2479.5MHz

### Model difference list:

Product name	Trade name	Model No.	Description
TV Soundbar	RSR	TB230C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1.Flat End Cap Plastic Panel. 2.Microradian Speak Grill And House
TV Soundbar	RSR	TB231C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1.Oval End Cap Plastic Panel. 2. Microradian Speak Grill And House
TV Soundbar	RSR	TB232C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1.Ladder shape End Cap Plastic Panel. 2. Microradian Speak Grill And House
TV Soundbar	RSR	TB235C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1.Triangle End Cap plastic panel. 2. Microradian Speak Grill And House
TV Soundbar r	RSR	TB341C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1.Flat End Cap plastic panel. 2.Flat speak grill and house
TV Soundbar	RSR	TB280C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1. Flat End Cap plastic panel. 2.Oval speak grill and house
TV Soundbar	RSR	TB282C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1. Oval End Cap plastic panel Oval speak grill and house
TV Soundbar	RSR	TB285C	<b>Function:</b> AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC <b>Appearance:</b> 1.Flat End Cap plastic panel. 2.Oval speak grill and house 3. Detachable design

TV Soundbar	RSR	TB286C	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Oval End Cap plastic panel. 2.Oval speak grill and house 3. Detachable design
TV Sound bar with wireless subwoofer	RSR	TB230CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Flat End Cap Plastic Panel. 2.Microradian Speak Grill And House
TV Sound bar with wireless subwoofer	RSR	TB231CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Oval End Cap Plastic Panel. 2. Microradian Speak Grill And House
TV Sound bar with wireless subwoofer	RSR	TB232CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Ladder shape End Cap Plastic Panel. 2. Microradian Speak Grill And House
TV Sound bar with wireless subwoofer	RSR	TB235CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Triangle End Cap plastic panel. 2. Microradian Speak Grill And House
TV Sound bar with wireless subwoofer	RSR	TB341CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Flat End Cap plastic panel. 2.Flat speak grill and house
TV Sound bar with wireless subwoofer	RSR	TB280CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1. Flat End Cap plastic panel. 2.Oval speak grill and house
TV Sound bar with wireless subwoofer	RSR	TB282CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1. Oval End Cap plastic panel Oval speak grill and house

TV Sound bar with wireless subwoofer	RSR	TB285CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Flat End Cap plastic panel. 2.Oval speak grill and house 3. Detachable design
TV Sound bar with wireless subwoofer	RSR	TB286CWW	Function: AUX1\LINE IN\Optical\Coaxial\ Bluetooth\HDMI\HDMI ARC Appearance: 1.Oval End Cap plastic panel. 2.Oval speak grill and house 3. Detachable design
SOUND BAR WITH WIRELESS SUBWOOFER	TOSHIBA	TY-WSB600	Function: AUX\Optical\Coaxial\ Bluetooth\HDMI ARC Appearance: 1.Ladder shape End Cap Plastic Panel. 2. Microradian Speak Grill And House

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: Z8M-TB235CWW filing to comply with Section 15.249 of the FCC Part 15 (2016), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

Notebook PC	:	Manufacturer: IBM Model: 1834 P/N: 13N5615. CE, FCC: DOC
Adapter	:	Manufacturer: LITEON Model: PA-1900-05 I/P: AC 100-240V 50-60Hz, 1.5A O/P: DC 19V 4.74A

## 1.6 Test Facility and Location

Listed by CNAS, August 14, 2015

The certificate is valid until August 13, 2018

The Laboratory has been assessed and proved to be in compliance with CNAS/CL01

The Certificate Registration Number is L5795.

Listed by FCC, July 03, 2014

The Certificate Registration Number is 665078.

Listed by Industry Canada, June 18, 2014

The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.

(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China

(Full Name: Building D, Gaosheng Science & Technology Park,  
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

## 1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207(a)	AC Power Conducted Emission	±1.06dB	Compliant
§15.249(a)/ 15.209	Radiated Emissions	±3.70dB	Compliant
§15.249(d)/ 15.205	Band Edge	±1.70dB	Compliant
§15.215(c)	20dB Bandwidth	±1.42 x10 <sup>-4</sup> %	Compliant
§15.203	Antenna Requirement	---	Compliant

## **2. System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 Special Accessories**

Not available for this EUT intended for grant.

### **2.3 Description of test modes**


The EUT has been tested under operating condition. The Lowest, middle and highest frequencies were chosen for testing.

### **2.4 EUT Exercise**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

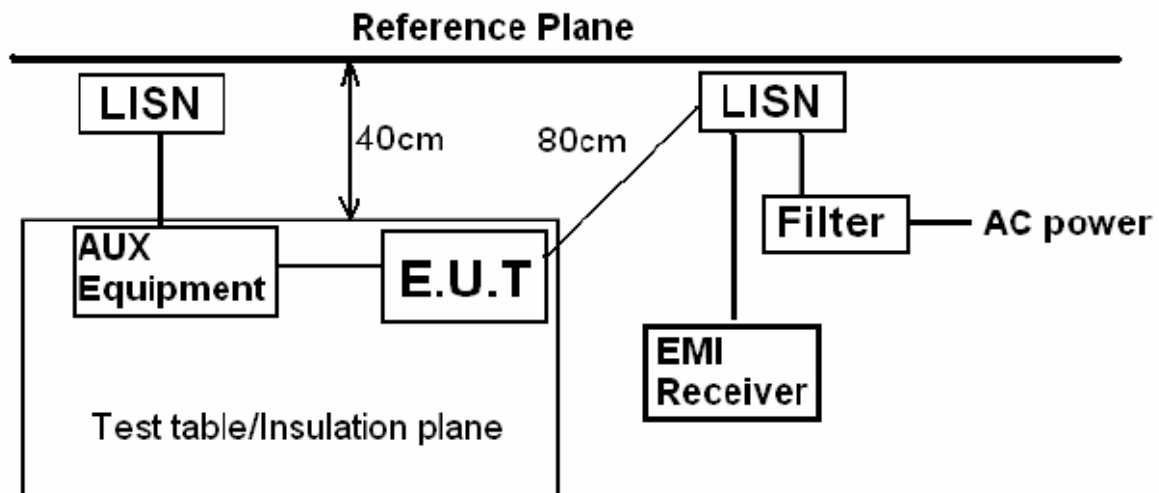

#### 3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX

#### 3.3 Measurement Results


Please refer to following the test plots of the worst case: Low channel.



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-4-20 11:05:58

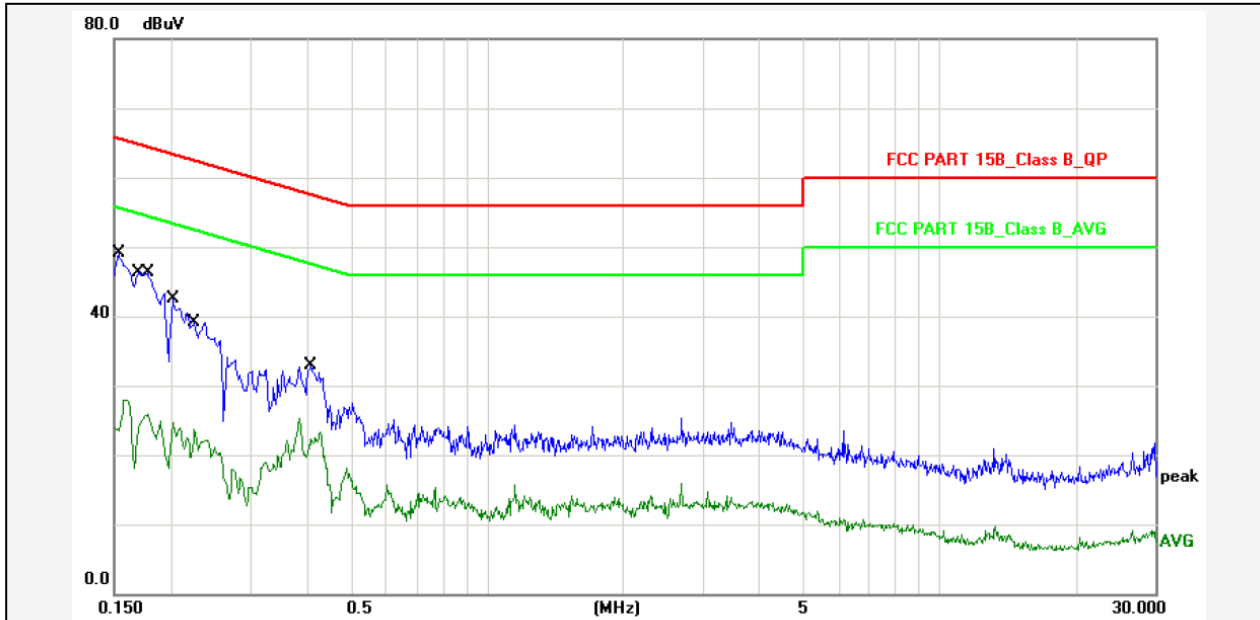

Report No.: TB285CWW

Test Standard: FCC PART 15B\_Class B\_QP

Test item: Conducted Emission

Phase: L1

Applicant: Richsound

Temp.( )/Hum.(%): 26(C) / 60 %

Product: TV Sound bar with wireless subwoofer

Power Rating: AC 120V/60Hz

Model No.: TB285CWW

Test Engineer: Eden

Test Mode: TX(2.4G)

Remark: Low channel


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	36.30	47.10	65.78	-18.68	QP	P	
2	0.1539	10.80	15.10	25.90	55.78	-29.88	AVG	P	
3	0.1700	10.80	33.40	44.20	64.96	-20.76	QP	P	
4	0.1700	10.80	14.90	25.70	54.96	-29.26	AVG	P	
5	0.1796	10.80	32.70	43.50	64.50	-21.00	QP	P	
6	0.1796	10.80	13.20	24.00	54.50	-30.50	AVG	P	
7	0.2020	10.80	39.60	50.40	63.52	-13.12	QP	P	
8	0.2020	10.80	12.00	22.80	53.52	-30.72	AVG	P	
9	0.2260	10.80	26.20	37.00	62.59	-25.59	QP	P	
10	0.2260	10.80	10.80	21.60	52.59	-30.99	AVG	P	
11	0.4100	10.80	20.00	30.80	57.65	-26.85	QP	P	
12	0.4100	10.80	10.10	20.90	47.65	-26.75	AVG	P	



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-4-20 11:13:31

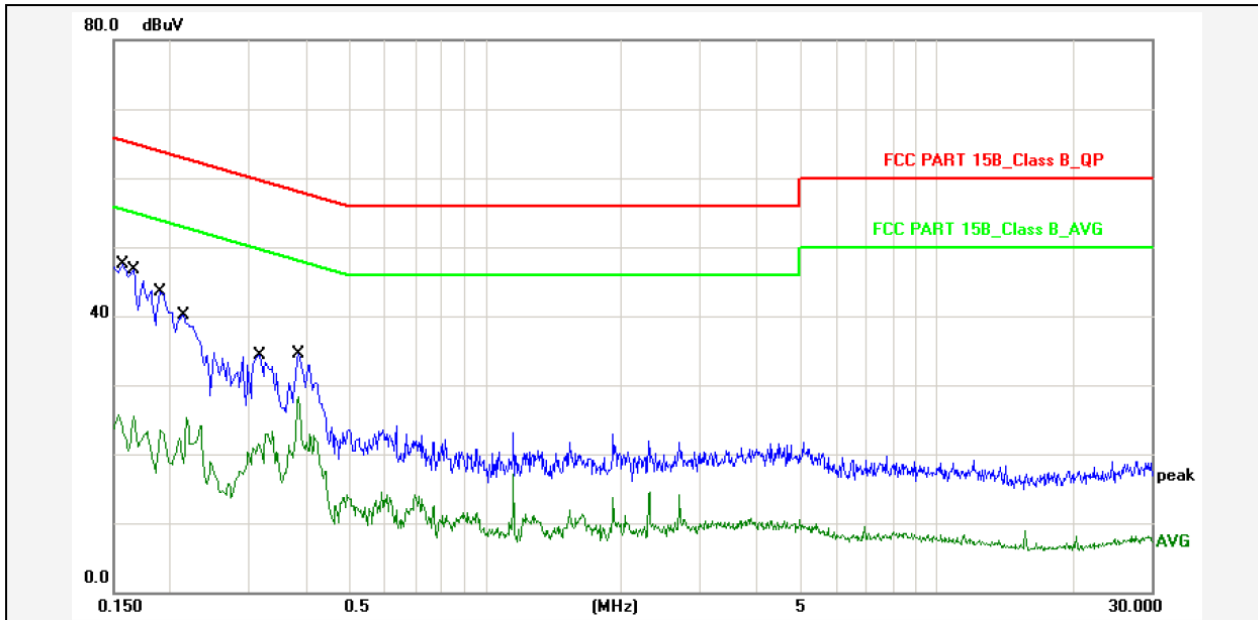

Report No.: TB285CWW

Test Standard: FCC PART 15B\_Class B\_QP

Test item: Conducted Emission

Phase: N

Applicant: Richsound

Temp.( )/Hum.(%): 26(C) / 60 %

Product: TV Sound bar with wireless subwoofer

Power Rating: AC 120V/60Hz

Model No.: TB285CWW

Test Engineer: Eden

Test Mode: TX(2.4G)


Remark: Low channel

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1580	10.80	34.70	45.50	65.56	-20.06	QP	P	
2	0.1580	10.80	12.80	23.60	55.56	-31.96	AVG	P	
3	0.1660	10.80	33.90	44.70	65.15	-20.45	QP	P	
4	0.1660	10.80	12.70	23.50	55.15	-31.65	AVG	P	
5	0.1900	10.80	30.70	41.50	64.03	-22.53	QP	P	
6	0.1900	10.80	10.70	21.50	54.03	-32.53	AVG	P	
7	0.2140	10.80	27.40	38.20	63.04	-24.84	QP	P	
8	0.2140	10.80	12.40	23.20	53.04	-29.84	AVG	P	
9	0.3180	10.80	21.50	32.30	59.76	-27.46	QP	P	
10	0.3180	10.80	10.50	21.30	49.76	-28.46	AVG	P	
11	0.3830	10.80	21.20	32.00	58.21	-26.21	QP	P	
12	0.3830	10.80	15.50	26.30	48.21	-21.91	AVG	P	


## 4. Radiated Emission Test

### 4.1 Test SET-UP (Block Diagram of Configuration)

#### 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

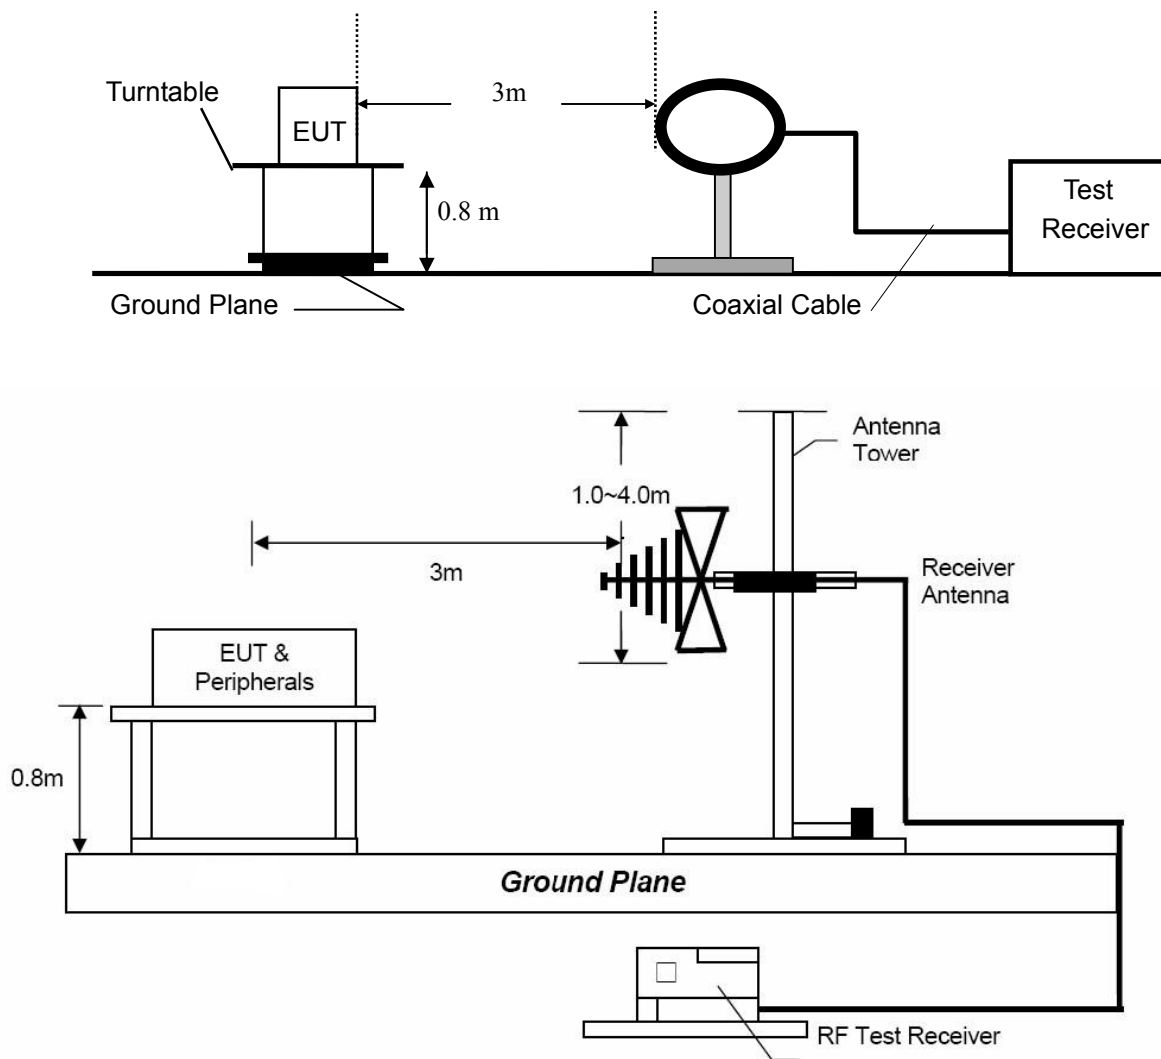

#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

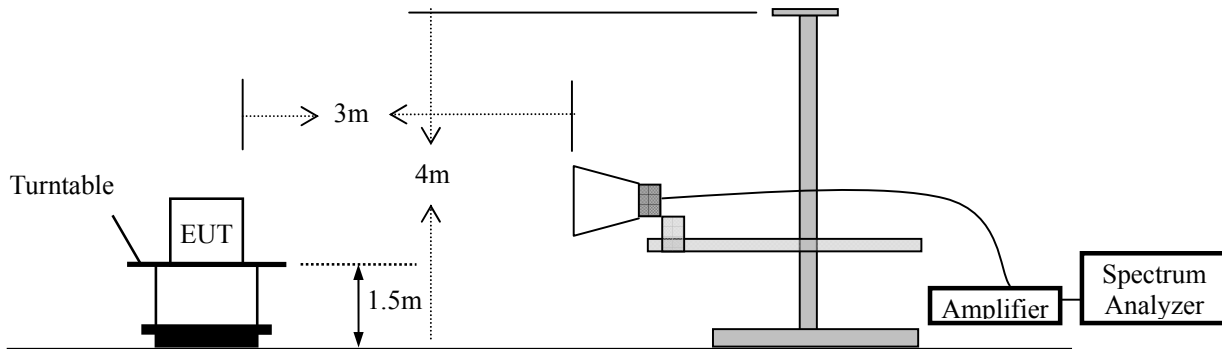

#### 4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

#### 4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)	
		$\mu\text{V/m}$	
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	
88 ~ 216	3	150	
216 ~ 960	3	200	
Above 960	3	500	
Frequency range MHz	Distance Meters	Field Strengths Limit (15.249)	
		mV/m (Field strength of fundamental)	$\mu\text{V/m}$ (Field strength of Harmonics)
902 ~ 928	3	50	500
2400 ~ 2483.5	3	50	500
5725 ~ 5875	3	50	500
24000 ~ 2425000	3	250	2500

- Remark : (1) Emission level (dB) $\mu\text{V}$  = 20 log Emission level  $\mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.  
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

#### 4.4 Measurement Results


Please refer to following the test plots of the worst case: Low channel.



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2017-4-21 18:20:10

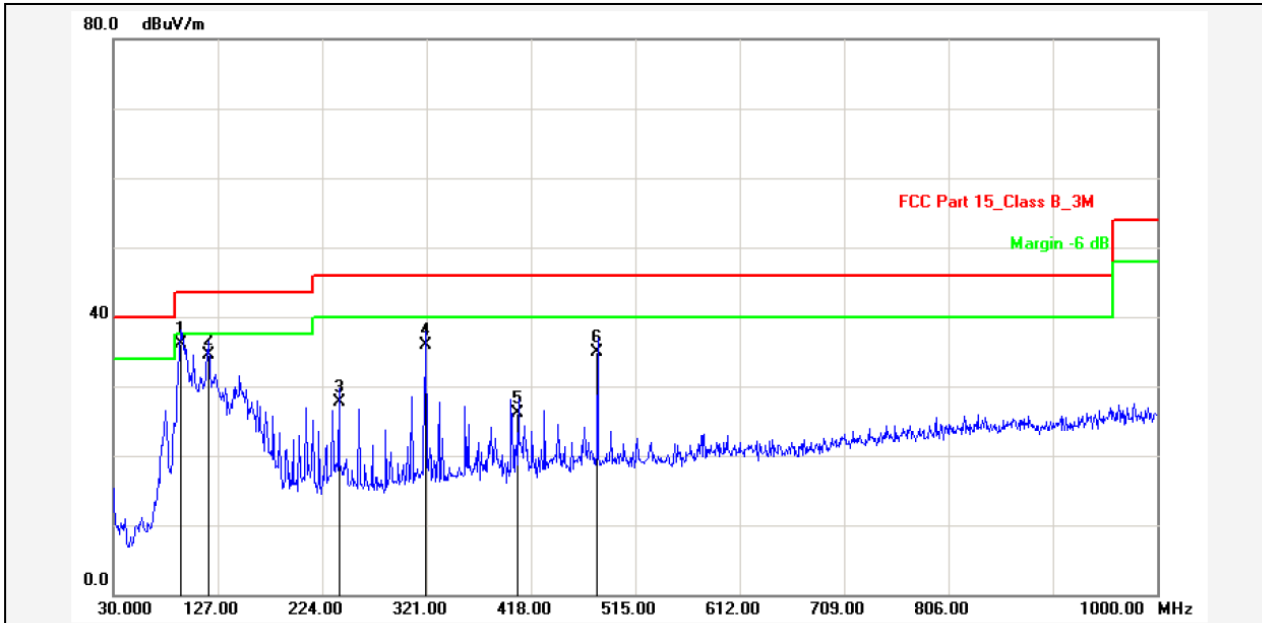

Report No.: TB285CWW

Test Standard: FCC Part 15\_Class B\_3M

Test item: Radiation Emission

Applicant: Richsound

Product: TV Sound bar with wireless subwoofer

Model No.: TB285CWW

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: AC 120V/60Hz

Test Engineer: Knight

Test Mode: TX(2.4G)

Remark: Low channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	92.0800	-13.45	49.55	36.10	43.50	-7.40	QP			P	
2	118.2699	-13.68	48.28	34.60	43.50	-8.90	QP			P	
3	239.5200	-12.06	39.86	27.80	46.00	-18.20	QP			P	
4	320.0300	-9.93	45.83	35.90	46.00	-10.10	QP			P	
5	406.3599	-8.95	35.15	26.20	46.00	-19.80	QP			P	
6	480.0799	-7.21	42.11	34.90	46.00	-11.10	QP			P	


**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-4-21 18:27:42

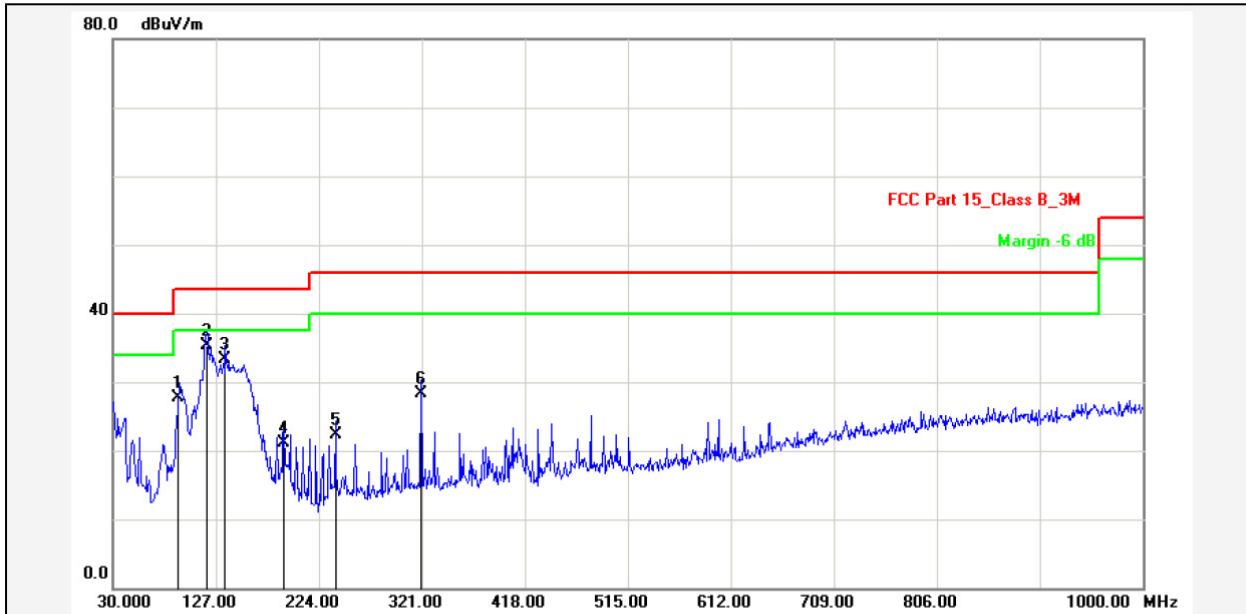

Report No.: TB285CWW

Test Standard: FCC Part 15\_Class B\_3M

Test item: Radiation Emission

Applicant: Richsound

Product: TV Sound bar with wireless subwoofer

Model No.: TB285CWW

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: AC 120V/60Hz

Test Engineer: Knight

Test Mode: TX(2.4G)

Remark: Low channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	92.0799	-16.45	44.25	27.80	43.50	-15.70	QP			P	
2	118.2700	-16.68	51.98	35.30	43.50	-8.20	QP			P	
3	135.7298	-18.40	51.80	33.40	43.50	-10.10	QP			P	
4	191.0200	-16.53	37.73	21.20	43.50	-22.30	QP			P	
5	239.5200	-15.06	37.36	22.30	46.00	-23.70	QP			P	
6	320.0300	-11.93	40.23	28.30	46.00	-17.70	QP			P	

**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**

Frequency Range: 1-25GHz  
Test Result: PASS  
Measured Distance: 3m  
Test By: Sance

Test Date : April 24, 2017  
Temperature : 21 °C  
Humidity : 55 %

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
2404.5	V	97.43	86.18	0.14	97.57	86.32	114.00	94.00	-16.43	-7.68
4809.0	V	47.44	36.12	6.33	53.77	42.45	74.00	54.00	-20.23	-11.55
7213.5	V	43.93	33.35	10.46	54.39	43.81	74.00	54.00	-19.61	-10.19
---										
2404.5	H	98.18	87.32	0.14	98.32	87.46	114.00	94.00	-15.68	-6.54
4809.0	H	44.53	6.33	33.44	50.86	39.77	74.00	54.00	-23.14	-14.23
7213.5	H	42.43	30.97	10.46	52.89	41.43	74.00	54.00	-21.11	-12.57
---										
Operation Mode: TX Mode (Mid)										
2444.5	V	97.14	86.00	0.25	97.39	86.25	114.00	94.00	-16.61	-7.75
4889.0	V	48.09	37.03	6.63	54.72	43.66	74.00	54.00	-19.28	-10.34
7333.5	V	42.74	31.94	10.55	53.29	42.49	74.00	54.00	-20.71	-11.51
---										
2444.5	H	97.34	86.20	0.25	97.59	86.45	114.00	94.00	-16.41	-7.55
4889.0	H	46.75	36.03	6.63	53.38	42.66	74.00	54.00	-20.62	-11.34
7333.5	H	44.17	33.10	10.55	54.72	43.65	74.00	54.00	-19.28	-10.35
---										
Operation Mode: TX Mode (High)										
2479.5	V	97.62	85.98	0.34	97.96	86.32	114.00	94.00	-16.04	-7.68
4959.0	V	46.74	35.46	6.89	53.63	42.35	74.00	54.00	-20.37	-11.65
7438.5	V	44.28	33.15	10.60	54.88	43.75	74.00	54.00	-19.12	-10.25
---										
2479.5	H	97.39	86.07	0.34	97.73	86.41	114.00	94.00	-16.27	-7.59
4959.0	H	46.74	34.86	6.69	52.63	41.75	74.00	54.00	-21.37	-12.25
7438.5	H	43.09	31.94	10.60	53.69	42.54	74.00	54.00	-20.31	-11.46
---										

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty :  $\pm 3.7$ dB.
  - (6) Horn antenna used for the emission over 1000MHz.


## 5. 20dB Bandwidth

### 5.1 Measurement Procedure

The 20dB bandwidth of the emission was contained within the frequency band designated which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered, FCC Rule 15.215(c):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### 5.2 Test SET-UP (Block Diagram of Configuration)




### 5.3 Measurement Results

Refer to attached data chart.

RBW:	30KHz	VBW:	100KHz
Spectrum Detector:	PK	Temperature :	22 °C
Test By:	Sance	Humidity :	54 %
Test Result:	PASS	Test Date :	April 27, 2017


Channel frequency (MHz)	20dB Down BW(kHz)
2404.5	2091
2444.5	2091
2479.5	2099

Lowest Channel

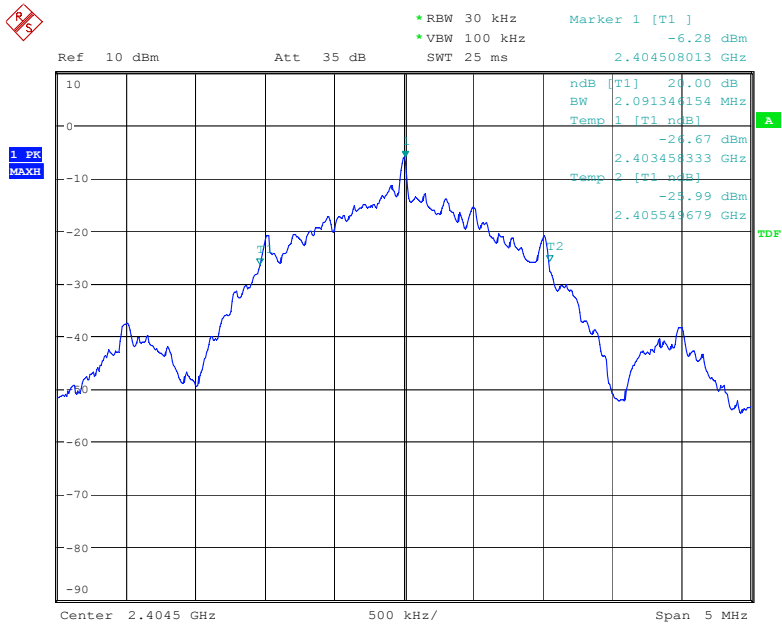


Date: 27.APR.2017 09:43:38

Middle Channel

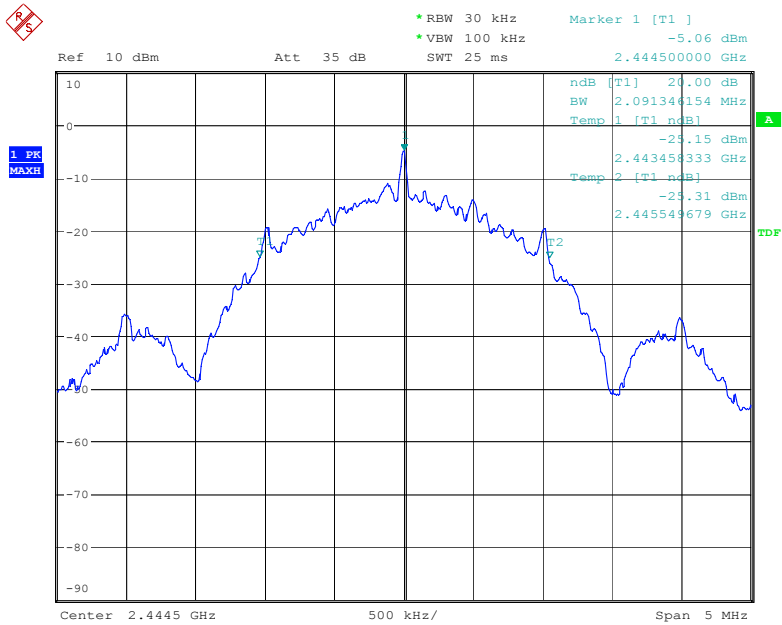

Date: 27.APR.2017 09:41:29

Highest Channel

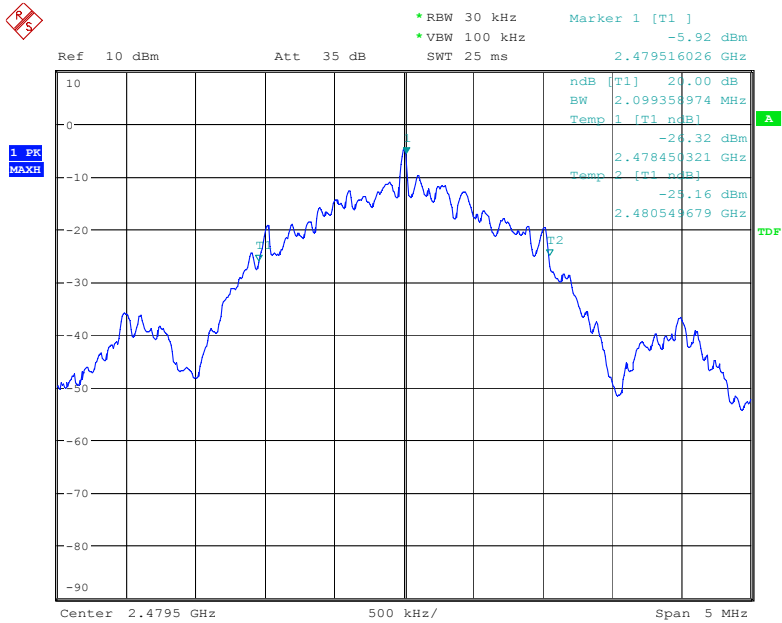

Date: 27.APR.2017 10:24:35

## 6. Band Edge

### 6.1 Measurement Procedure

Same as Radiated Emission Test.

### 6.2 Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 6.3 Measurement Results

Operation Mode:	TX Mode	Test Date :	April 24, 2017
Temperature :	21 °C	Humidity :	55 %
Test Result:	PASS	Test By:	Sance
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	52.66	41.59	0.09	52.75	41.68	74.00	54.00	-21.25	-12.32
2390.000	V	49.55	38.67	0.09	49.64	38.76	74.00	54.00	-24.36	-15.24
2483.500	H	52.24	41.37	0.34	52.58	41.71	74.00	54.00	-21.42	-12.29
2483.500	V	54.42	43.20	0.34	54.76	43.54	74.00	54.00	-19.24	-10.46

**Note:** (1) Emission Level= Reading Level + Factor  
 (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain  
 (3) Horn antenna used for the emission over 1000MHz.

## 7. Antenna requirement

### 7.1 Measurement Procedure

According to of FCC part 15C section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 7.2 Measurement Results

The antenna is PCB antenna and no consideration of replacement, and the best case gain of the antenna is 2 dBi. So, the antenna is consider meet the requirement.

## 8. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 22, 2016	Nov. 21, 2017
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 25, 2016	Nov. 24, 2017
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 06, 2016	Nov. 05, 2017
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 06, 2016	Nov. 05, 2017
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 05, 2017	Mar. 04, 2018
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 06, 2016	Nov. 05, 2017
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Feb.23, 2017	Feb.22, 2018
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 04, 2016	Nov. 03, 2017
RF Cable	Huber+Suhner	SF-106	N/A	9KHz~40GHz	April. 06, 2017	April. 04, 2018
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.09, 2016	Oct.08, 2017
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Aug. 31, 2016	Aug. 30, 2017
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	April. 06, 2017	April. 05, 2018
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 04, 2016	Nov. 03, 2017
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 02, 2016	Nov. 01, 2017
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 06, 2016	Nov. 07, 2017
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 04, 2016	Nov. 03, 2017
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 04, 2016	Nov. 03, 2017

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---