


Channel: BOTTOM, Modulation: 256QAM,  
BW=5MHz, Channel Power




Channel: BOTTOM, Modulation: 256QAM,  
BW=5MHz, CCDF

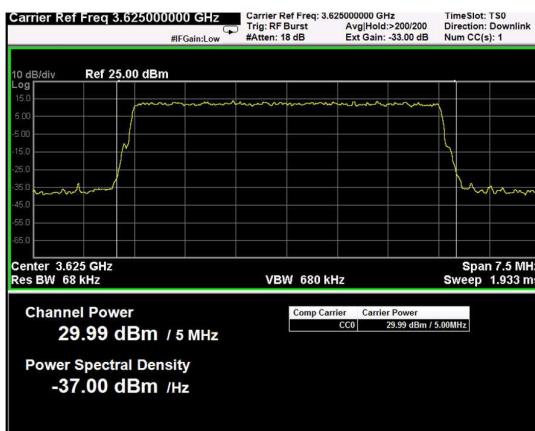

Channel: MIDDLE, Modulation: 256QAM,  
BW=5MHz, Channel Power



Channel: MIDDLE, Modulation: 256QAM,  
BW=5MHz, CCDF

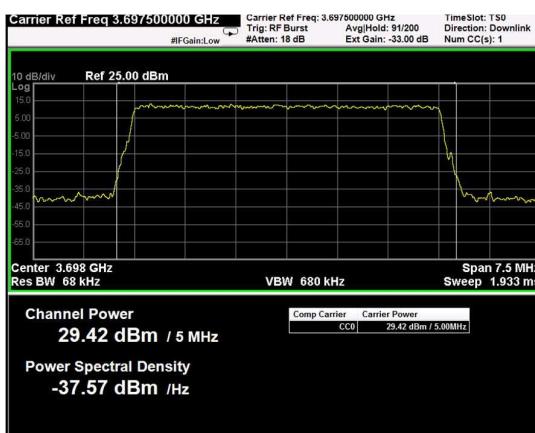


Channel: TOP, Modulation: 256QAM,  
BW=5MHz, Channel Power



Channel: TOP, Modulation: 256QAM,  
BW=5MHz, CCDF


## RF PORT 2

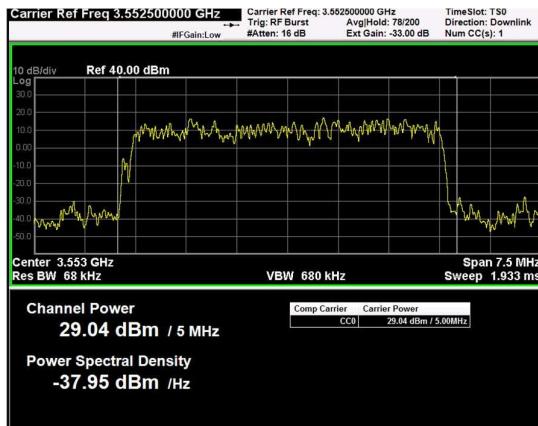

Channel: BOTTOM, Modulation: QPSK,  
BW=5MHz, Channel Power




Channel: BOTTOM, Modulation: QPSK,  
BW=5MHz, CCDF

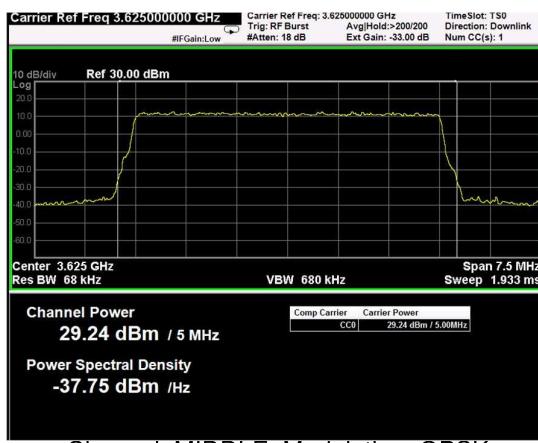

Channel: MIDDLE, Modulation: QPSK,  
BW=5MHz, Channel Power




Channel: MIDDLE, Modulation: QPSK,  
BW=5MHz, CCDF

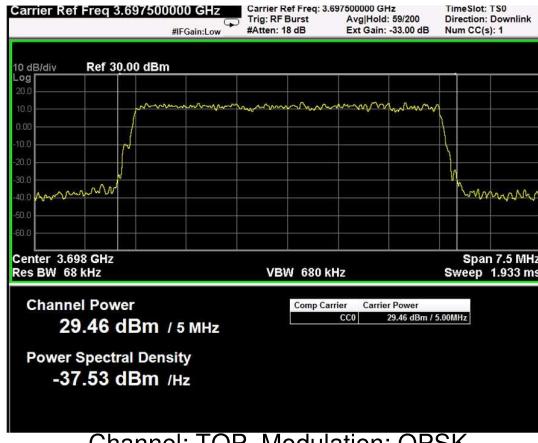


Channel: TOP, Modulation: QPSK,  
BW=5MHz, Channel Power




Channel: TOP, Modulation: QPSK,  
BW=5MHz, CCDF

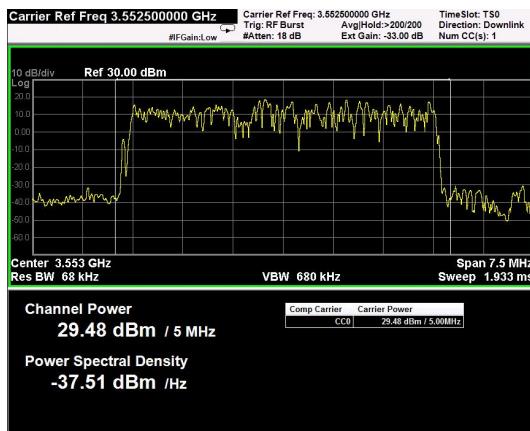


Channel: BOTTOM, Modulation: 16QAM, BW=5MHz, Channel Power

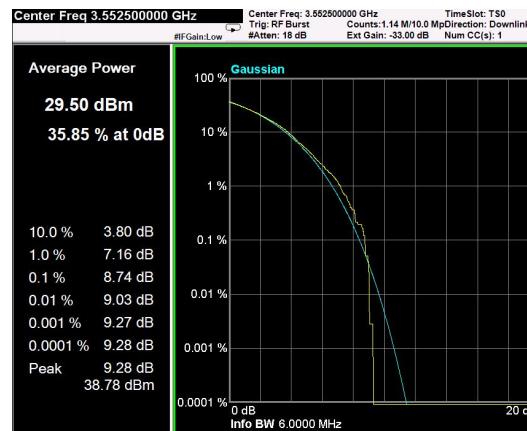


Channel: BOTTOM, Modulation: 16QAM, BW=5MHz, CCDF

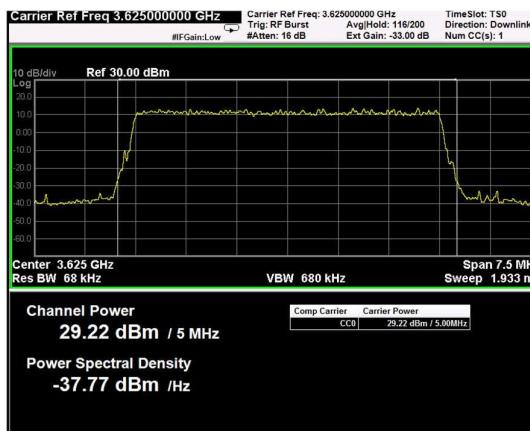


Channel: MIDDLE, Modulation: 16QAM, BW=5MHz, Channel Power

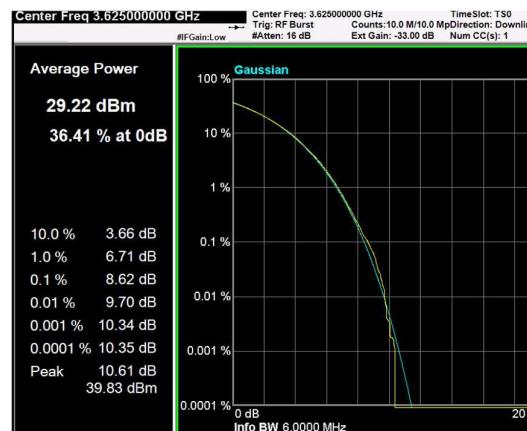


Channel: MIDDLE, Modulation: 16QAM, BW=5MHz, CCDF

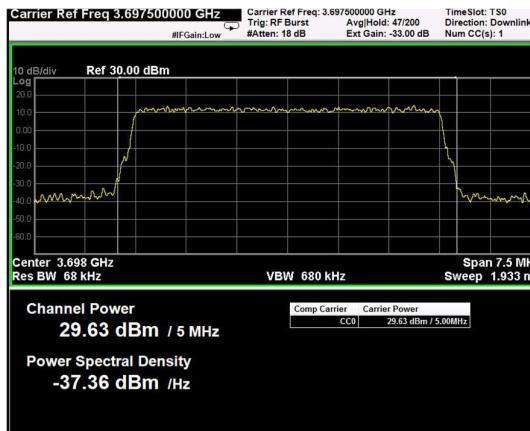


Channel: TOP, Modulation: 16QAM, BW=5MHz, Channel Power

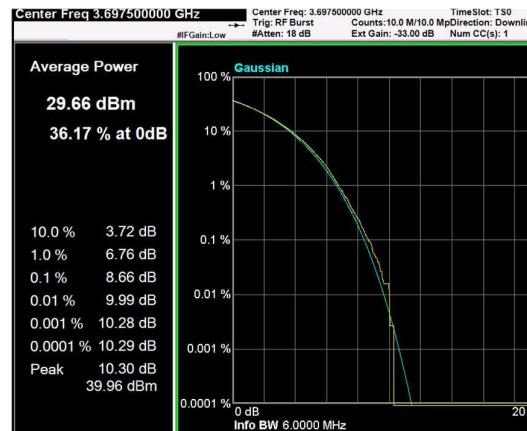


Channel: TOP, Modulation: 16QAM, BW=5MHz, CCDF

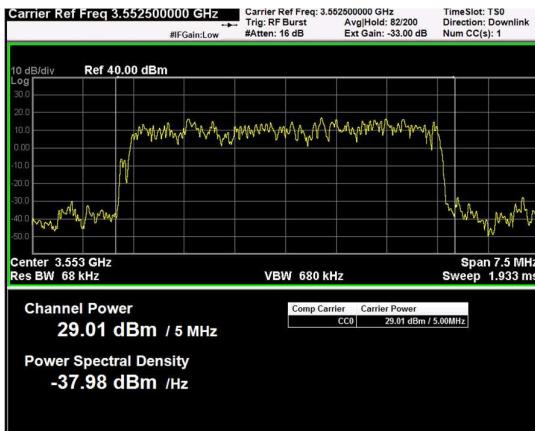

Channel: BOTTOM, Modulation: 64QAM, BW=5MHz, Channel Power

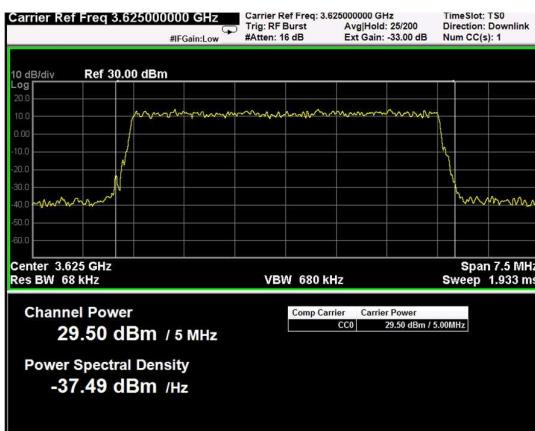

Channel: MIDDLE, Modulation: 64QAM, BW=5MHz, Channel Power

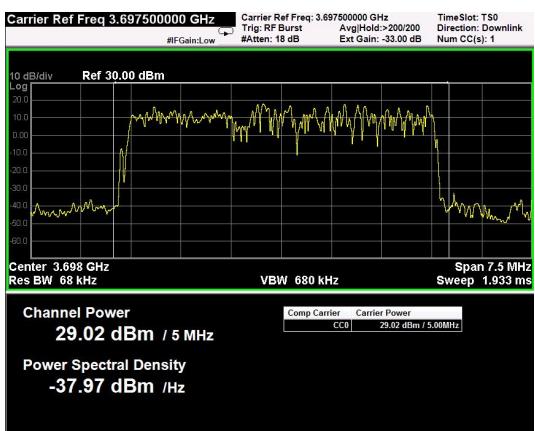


Channel: TOP, Modulation: 64QAM, BW=5MHz, Channel Power




Channel: BOTTOM, Modulation: 64QAM, BW=5MHz, CCDF




Channel: MIDDLE, Modulation: 64QAM, BW=5MHz, CCDF

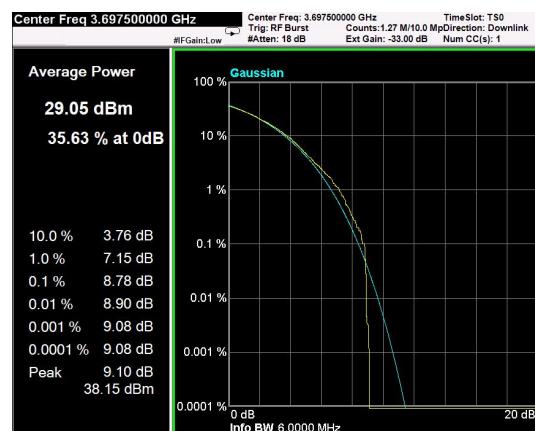


Channel: TOP, Modulation: 64QAM, BW=5MHz, CCDF

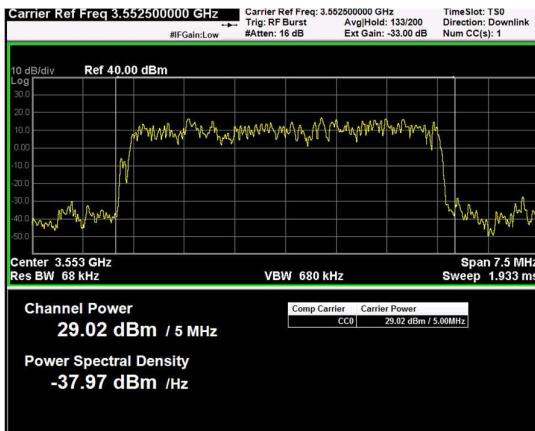


Channel: BOTTOM, Modulation: 256QAM, BW=5MHz, Channel Power

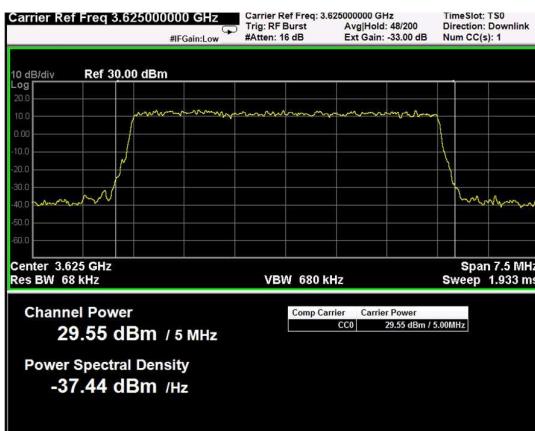


Channel: MIDDLE, Modulation: 256QAM, BW=5MHz, Channel Power

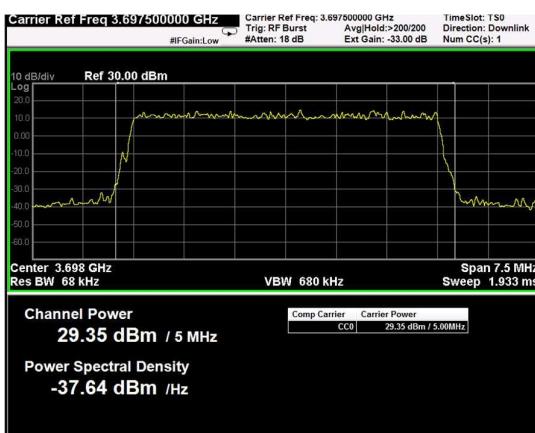

Channel: TOP, Modulation: 256QAM, BW=5MHz, Channel Power

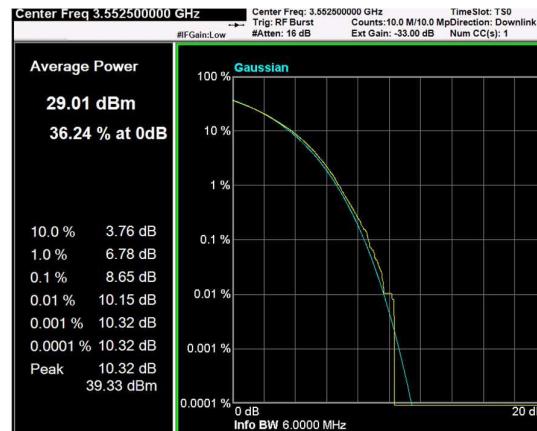

Channel: BOTTOM, Modulation: 256QAM, BW=5MHz, CCDF

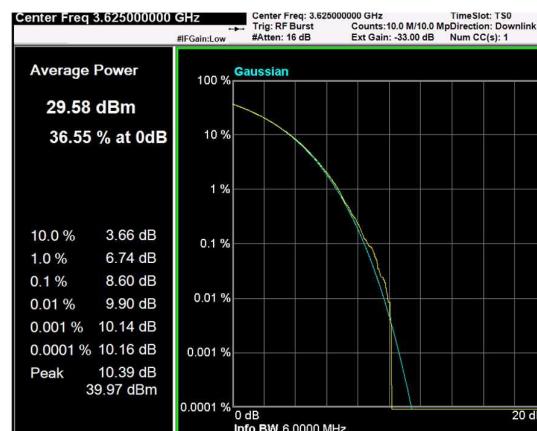

Channel: MIDDLE, Modulation: 256QAM, BW=5MHz, CCDF



Channel: TOP, Modulation: 256QAM, BW=5MHz, CCDF

**RF PORT 1**

Test data							
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	PSD (dBm/Hz)	PSD (dBm/MHz)	PAR (dB)
Down-link	LTE 10MHz (QPSK)	3555	29.5	0.891	-40.5	19.5	9.2
Down-link	LTE 10MHz (QPSK)	3625	29.7	0.931	-40.3	19.7	9.2
Down-link	LTE 10MHz (QPSK)	3695	29.1	0.818	-40.9	19.1	9.3
Down-link	LTE 10MHz (16QAM)	3555	30.3	1.059	-39.8	20.3	9.5
Down-link	LTE 10MHz (16QAM)	3625	30.1	1.012	-40.0	20.1	9.3
Down-link	LTE 10MHz (16QAM)	3695	29.6	0.916	-40.4	19.6	9.3
Down-link	LTE 10MHz (64QAM)	3555	30.2	1.052	-39.8	20.2	10.0
Down-link	LTE 10MHz (64QAM)	3625	30.3	1.069	-39.7	20.3	9.3
Down-link	LTE 10MHz (64QAM)	3695	29.9	0.968	-40.1	19.9	9.3
Down-link	LTE 10MHz (256QAM)	3555	29.5	0.895	-40.5	19.5	9.3
Down-link	LTE 10MHz (256QAM)	3625	29.6	0.916	-40.4	19.6	9.3
Down-link	LTE 10MHz (256QAM)	3695	29.7	0.940	-40.3	19.7	9.3



## RF PORT 2

Test data							
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	PSD (dBm/Hz)	PSD (dBm/MHz)	PAR (dB)
Down-link	LTE 10MHz (QPSK)	3555.0	29.8	0.964	-40.2	19.8	9.2
Down-link	LTE 10MHz (QPSK)	3625.0	29.7	0.931	-40.3	19.7	9.2
Down-link	LTE 10MHz (QPSK)	3695.0	29.2	0.828	-40.8	19.2	9.5
Down-link	LTE 10MHz (16QAM)	3555.0	30.4	1.091	-39.6	20.4	9.2
Down-link	LTE 10MHz (16QAM)	3625.0	29.6	0.916	-40.4	19.6	9.3
Down-link	LTE 10MHz (16QAM)	3695.0	29.3	0.841	-40.8	19.3	9.3
Down-link	LTE 10MHz (64QAM)	3555.0	30.4	1.104	-39.6	20.4	11.7
Down-link	LTE 10MHz (64QAM)	3625.0	29.7	0.931	-40.3	19.7	9.2
Down-link	LTE 10MHz (64QAM)	3695.0	29.3	0.847	-40.7	19.3	9.3
Down-link	LTE 10MHz (256QAM)	3555.0	30.5	1.114	-39.5	20.5	9.2
Down-link	LTE 10MHz (256QAM)	3625.0	30.3	1.069	-39.7	20.3	9.3
Down-link	LTE 10MHz (256QAM)	3695.0	29.2	0.838	-40.8	19.2	9.3

### Special notes

Maximum EIRP  $\leq$  30dBm/10MHz  
Maximum PSD eirp  $\leq$  20dBm/1MHz

Remark: MIMO application where only cross-polarized antennas are allowed (KDB "662911 D01 Multiple Transmitter Output v02r01", chapter F, paragraph 2), letter c), item (i) ).

PSD eirp (in 1 MHz) = PSDmax - N + Gmax = 20 - N + Gmax  $\leq$  20  
Gmax  $\leq$  (20-20+N) = N


Where:

- PSD<sub>max</sub> is the maximum PSD value measured on the antenna connector of the equipment and it depends on the LTE bandwidth signal
- N is system path loss (in dB) due to cable insertion, splitter, etc....
- G<sub>max</sub> is the maximum antenna gain (in dBi)


Therefore:

- Maximum antenna gain Gmax = N and Output power setting = 30 dBm


## RF PORT 1 PLOT

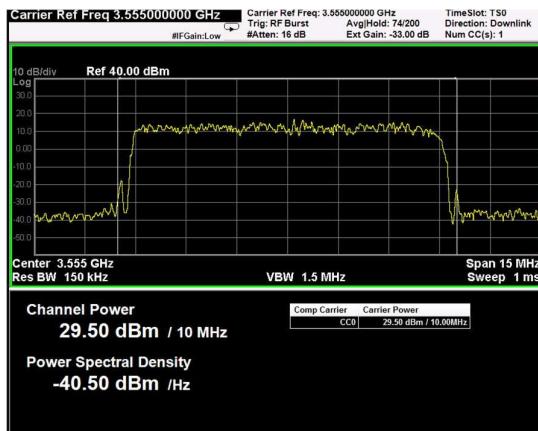


Channel: BOTTOM, Modulation: QPSK,  
BW=10MHz, Channel Power

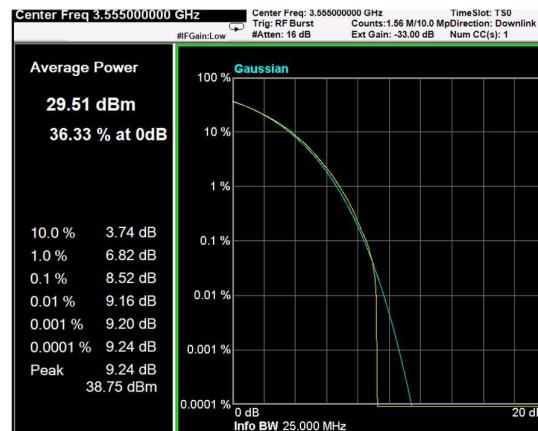


Channel: BOTTOM, Modulation: QPSK,  
BW=10MHz, CCDF

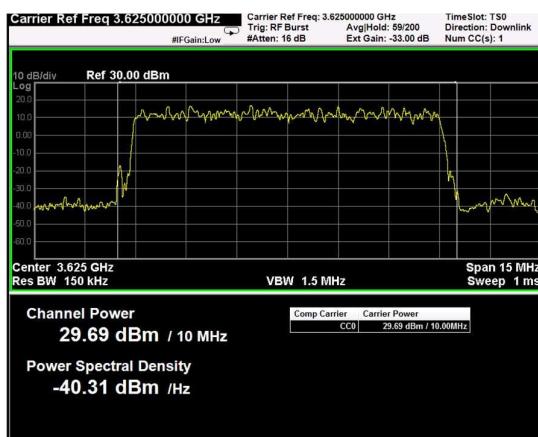


Channel: MIDDLE, Modulation: QPSK,  
BW=10MHz, Channel Power

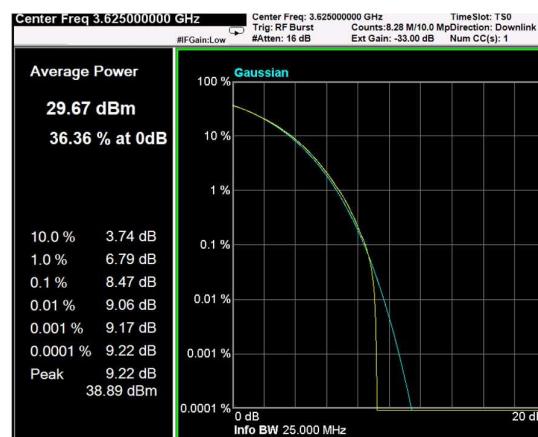


Channel: MIDDLE, Modulation: QPSK,  
BW=10MHz, CCDF

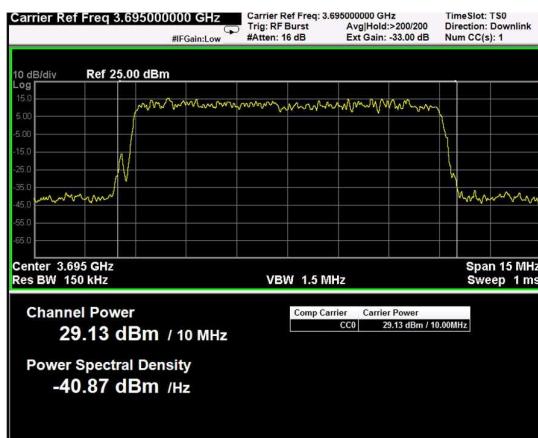

Channel: TOP, Modulation: QPSK,  
BW=10MHz, Channel Power

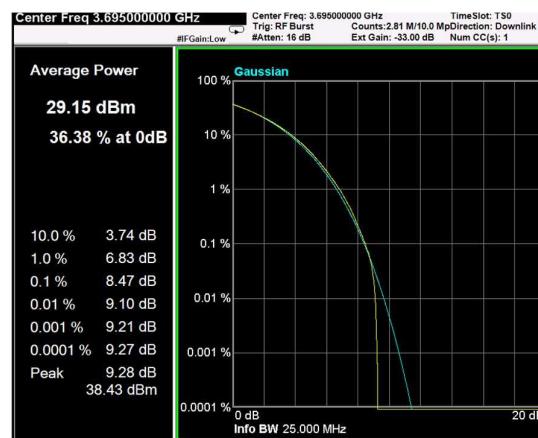


Channel: TOP, Modulation: QPSK,  
BW=10MHz, CCDF

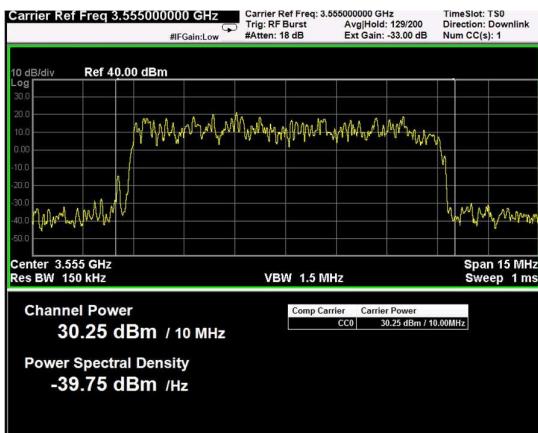

Channel: BOTTOM, Modulation: 16QAM, BW=10MHz, Channel Power




Channel: BOTTOM, Modulation: 16QAM, BW=10MHz, CCDF

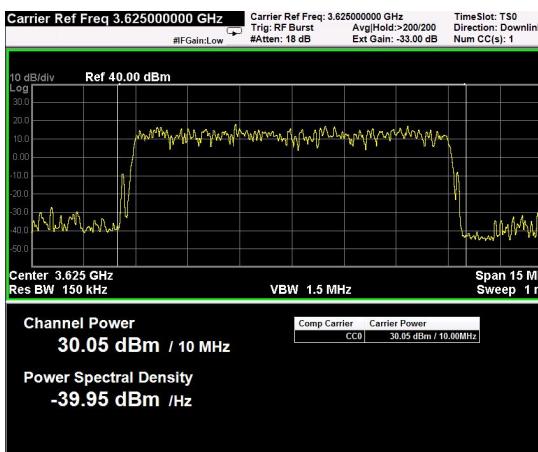


Channel: MIDDLE, Modulation: 16QAM, BW=10MHz, Channel Power




Channel: MIDDLE, Modulation: 16QAM, BW=10MHz, CCDF

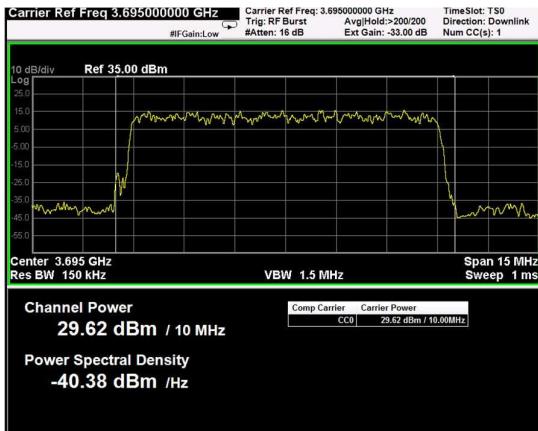


Channel: TOP, Modulation: 16QAM, BW=10MHz, Channel Power

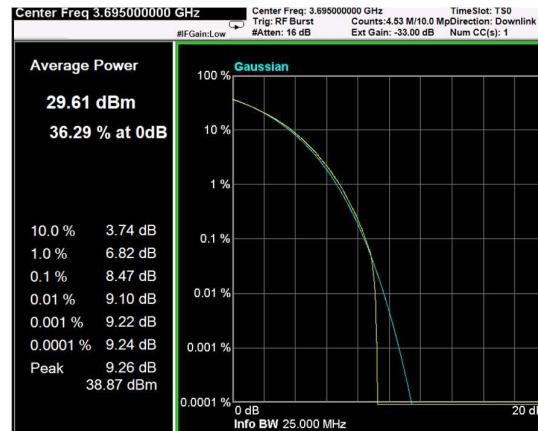


Channel: TOP, Modulation: 16QAM, BW=10MHz, CCDF

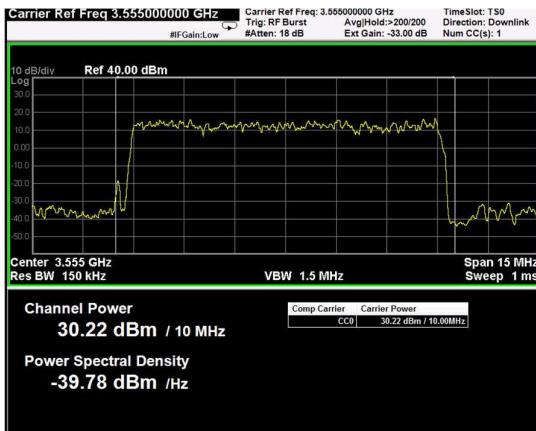


Channel: BOTTOM, Modulation: 64QAM,  
BW=10MHz, Channel Power

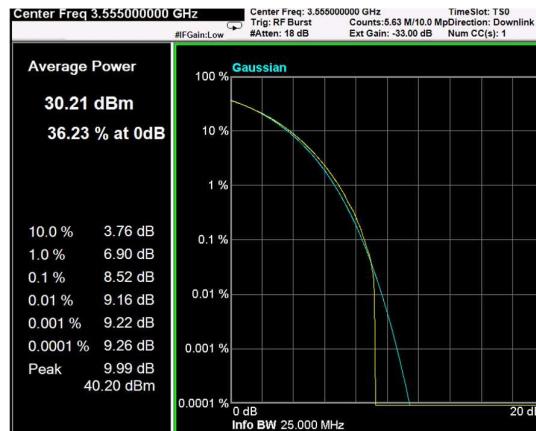


Channel: BOTTOM, Modulation: 64QAM,  
BW=10MHz, CCDF

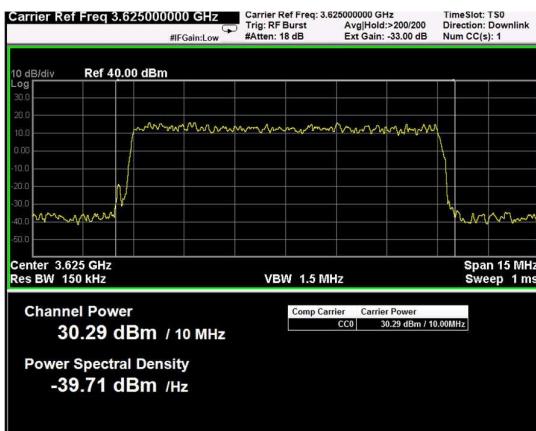

Channel: MIDDLE, Modulation: 64QAM,  
BW=10MHz, Channel Power

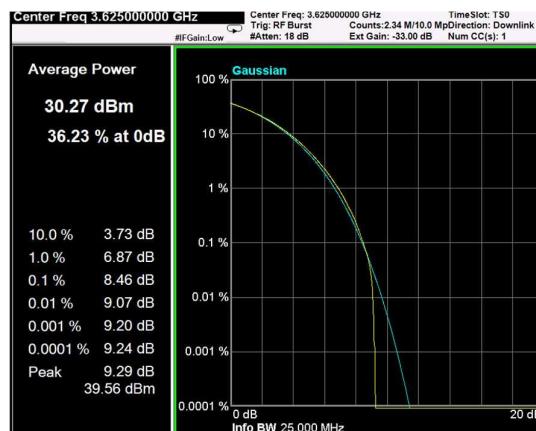


Channel: MIDDLE, Modulation: 64QAM,  
BW=10MHz, CCDF

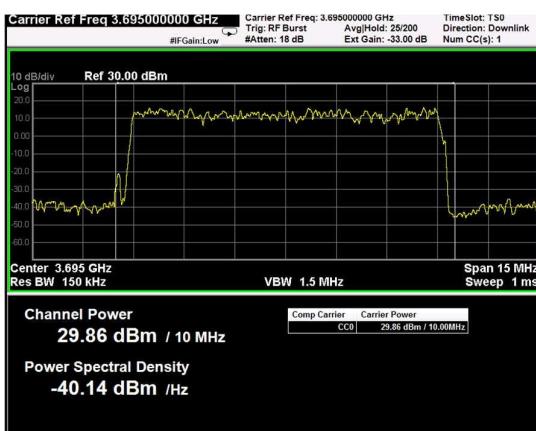


Channel: TOP, Modulation: 64QAM,  
BW=10MHz, Channel Power




Channel: TOP, Modulation: 64QAM,  
BW=10MHz, CCDF

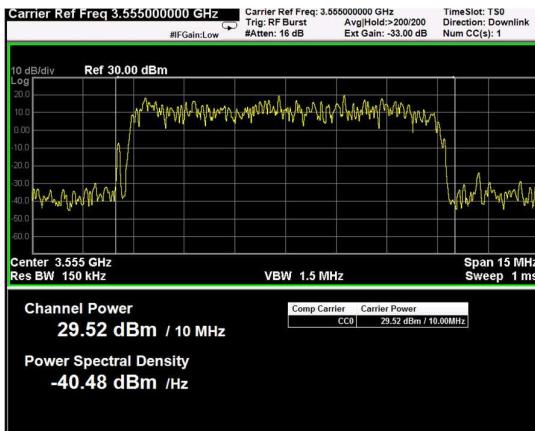

Channel: BOTTOM, Modulation: 256QAM, BW=10MHz, Channel Power

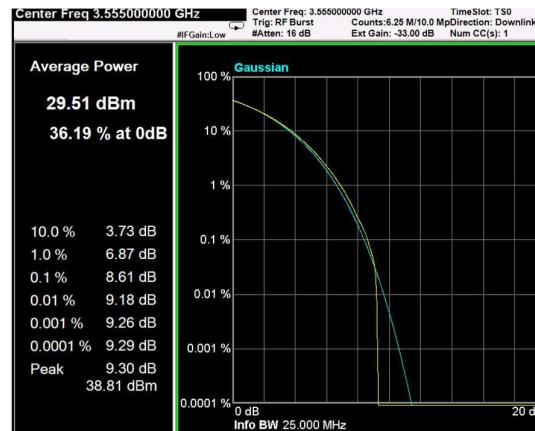


Channel: BOTTOM, Modulation: 256QAM, BW=10MHz, CCDF

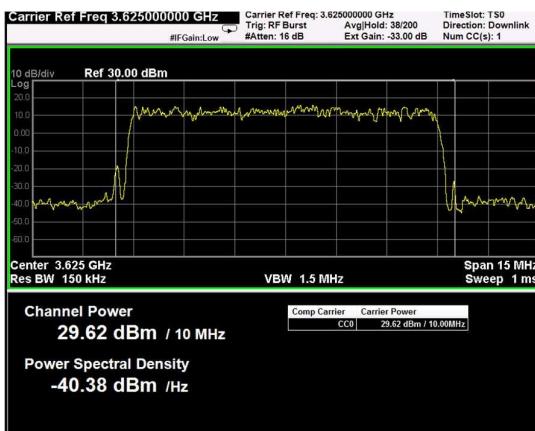

Channel: MIDDLE, Modulation: 256QAM, BW=10MHz, Channel Power



Channel: MIDDLE, Modulation: 256QAM, BW=10MHz, CCDF

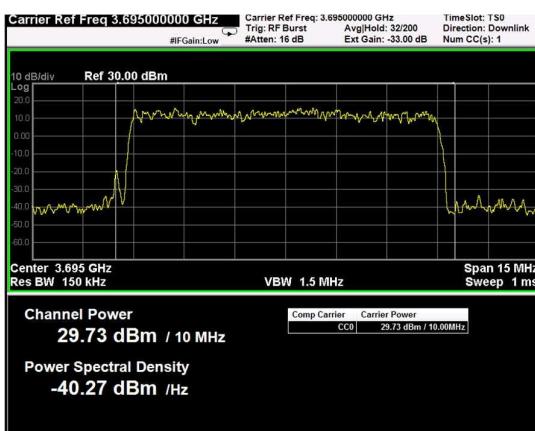

Channel: TOP, Modulation: 256QAM, BW=10MHz, Channel Power









Channel: TOP, Modulation: 256QAM, BW=10MHz, CCDF




Specification: FCC 96

## RF PORT 2

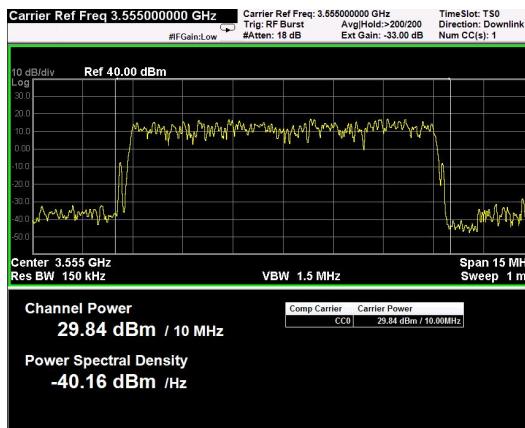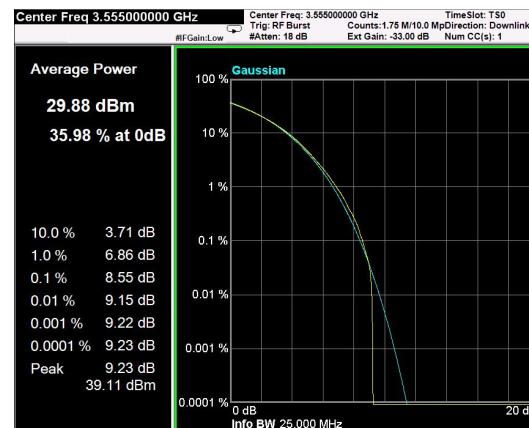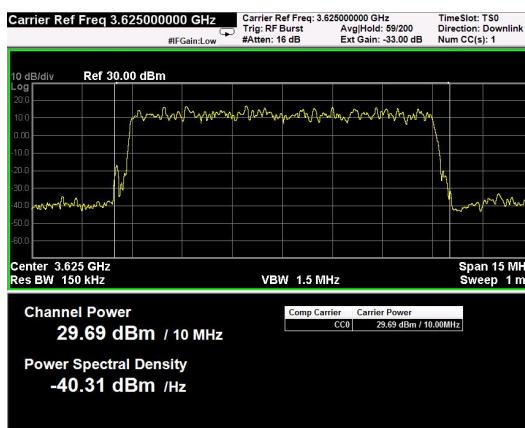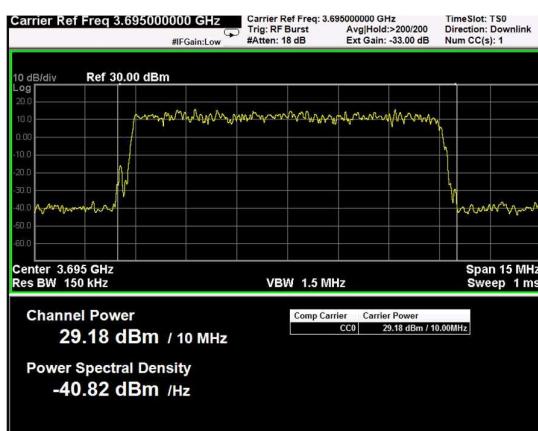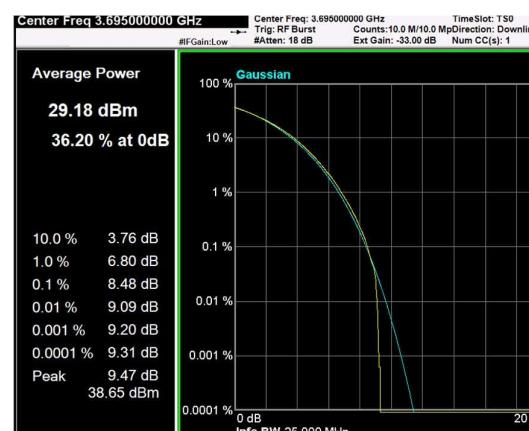
Channel: BOTTOM, Modulation: QPSK,  
BW=10MHz, Channel PowerChannel: BOTTOM, Modulation: QPSK,  
BW=10MHz, CCDFChannel: MIDDLE, Modulation: QPSK,  
BW=10MHz, Channel PowerChannel: MIDDLE, Modulation: QPSK,  
BW=10MHz, CCDFChannel: TOP, Modulation: QPSK,  
BW=10MHz, Channel PowerChannel: TOP, Modulation: QPSK,  
BW=10MHz, CCDF

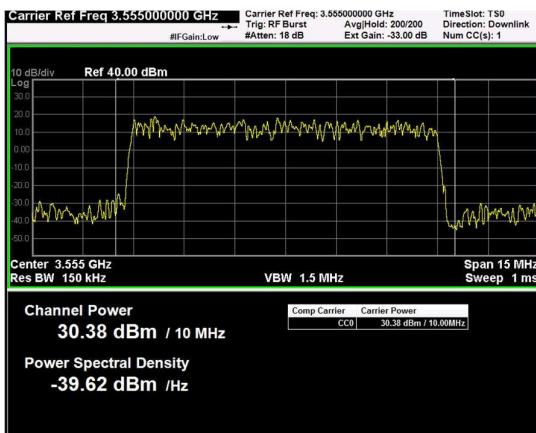


Channel: BOTTOM, Modulation: 16QAM,  
BW=10MHz, Channel Power

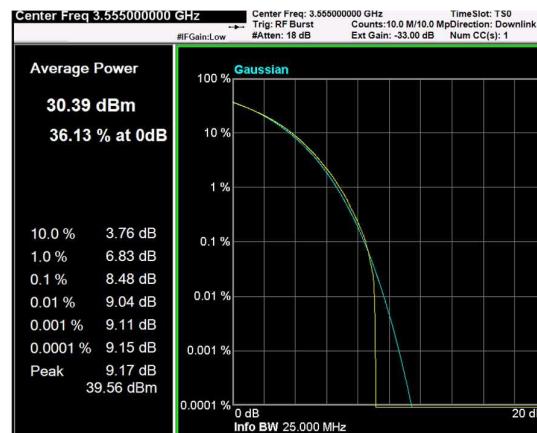


Channel: BOTTOM, Modulation: 16QAM,  
BW=10MHz, CCDF

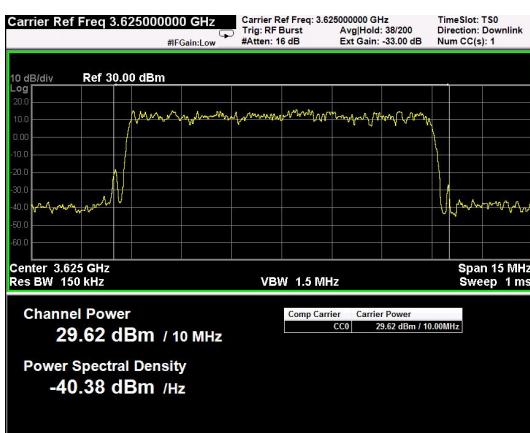


Channel: MIDDLE, Modulation: 16QAM,  
BW=10MHz, Channel Power

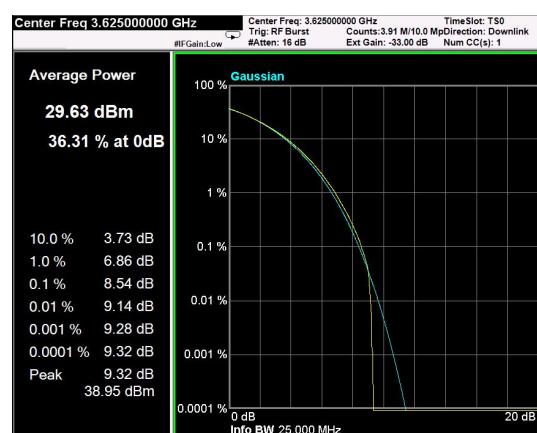

Channel: MIDDLE, Modulation: 16QAM,  
BW=10MHz, CCDF

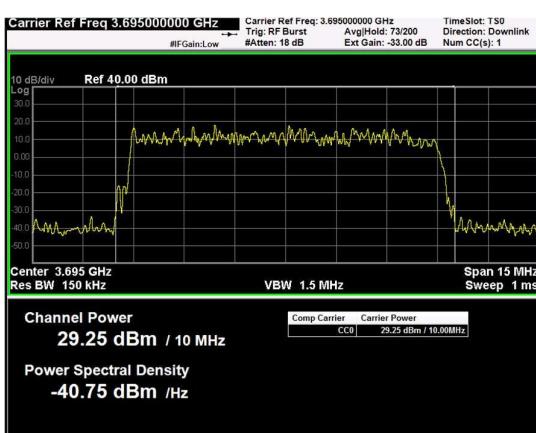

Channel: TOP, Modulation: 16QAM,  
BW=10MHz, Channel Power

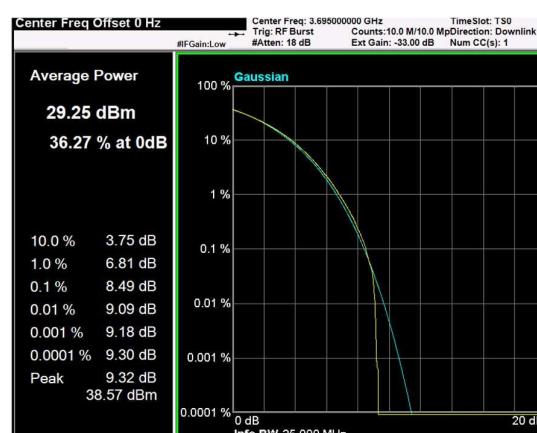

Channel: TOP, Modulation: 16QAM,  
BW=10MHz, CCDF