



# **FCC TEST REPORT**

**Test report**

**On Behalf of**

**Anhui Inno-Sign International Co., Ltd**

**For**

**Camping COB Lantern With Power Bank And Wireless Charger**

**Model No.: 92194**

**FCC ID: 2ANFN-92194**

**Prepared for :** Anhui Inno-Sign International Co., Ltd  
Room 1409-1410, Building B, Sky Blue Business Center, No. 188  
South Qianshan Road, Hefei, Anhui, China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai  
Street, Bao'an District, Shenzhen City, China

**Date of Test:** Sep. 25, 2018 to Oct. 10, 2018

**Date of Report:** Oct. 10, 2018

**Report Number:** HK1810101244E



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Anhui Inno-Sign International Co., Ltd  
**Address** ..... : Room 1409-1410, Building B, Sky Blue Business Center, No. 188  
South Qianshan Road, Hefei, Anhui, China  
**Manufacture's Name** ..... : Anhui Inno-Sign International Co., Ltd  
**Address** ..... : Room 1409-1410, Building B, Sky Blue Business Center, No. 188  
South Qianshan Road, Hefei, Anhui, China

### Product description

**Trade Mark:** N/A  
**Product name**..... : Camping COB Lantern With Power Bank And Wireless Charger  
**Model and/or type reference** : 92194  
**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.207,  
15.209, 15.203  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
**Date (s) of performance of tests**..... : Sep. 25, 2018 to Oct. 10, 2018  
**Date of Issue**..... : Oct. 10, 2018  
**Test Result**..... : **Pass**

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. RADIATED EMISSION	8
3.1 TEST LIMIT	8
3.2. MEASUREMENT PROCEDURE	9
3.3. TEST SETUP	10
3.4. TEST RESULT	11
4. 20DB BANDWIDTH	14
4.1. MEASUREMENT PROCEDURE	14
4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3. MEASUREMENT RESULTS	15
5. FCC LINE CONDUCTED EMISSION TEST	16
5.1. LIMITS OF LINE CONDUCTED EMISSION TEST	16
5.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	16
5.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	17
5.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	17
5.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	18
6. PHOTOGRAPH OF TEST	20
7. PHOTOGRAPH OF EUT	22



## 1. TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.209	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant

### 1.2 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,  
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

### 1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	123.6KHz
<b>Maximum field strength</b>	58.43dBuV/m(Peak)@3m
<b>Number of channels</b>	1
<b>Antenna Designation</b>	Integrated Antenna (Met 15.203 Antenna requirement)
<b>Hardware Version</b>	V2.1
<b>Software Version</b>	V1.0
<b>Power Supply</b>	DC5V by adapter or DC 3.7V by Battery




## 2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(half load)
3	Wireless charging Mode(Null load)
Note: 1. The mode 1 was the worst case and only the data of the worst case record in this report.	

## 2.3 DESCRIPTION OF TEST SETUP

Configure :

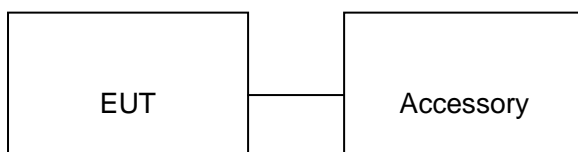

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless electronic Load	--	Maximum power 5W	Support
2	Adapter	CD05	DC5V	AE

**2.4 MEASUREMENT INSTRUMENTS LIST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
4.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
5.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
6.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
7.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
8.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2017	N/A
9.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year



### 3. RADIATED EMISSION

#### 3.1 TEST LIMIT

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	---
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark:

- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V}/\text{m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.





### 3.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


  

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




### 3.3. TEST SETUP

#### Radiated Emission Test-Setup Frequency Below 30MHz

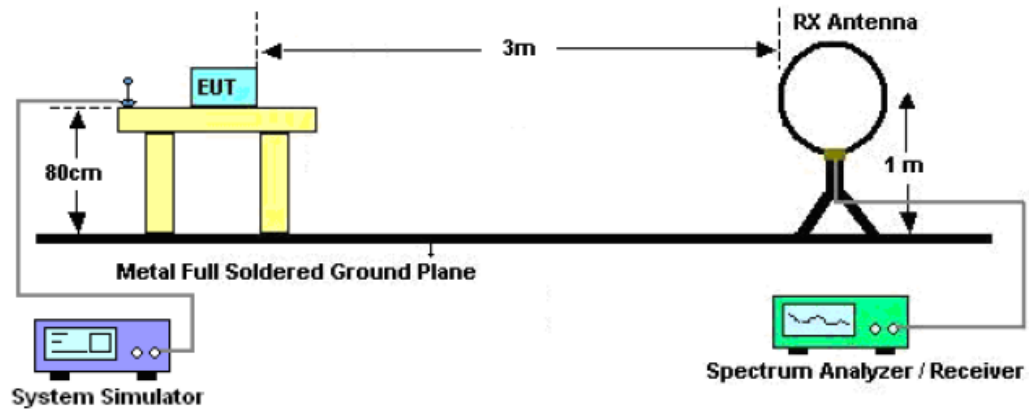

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

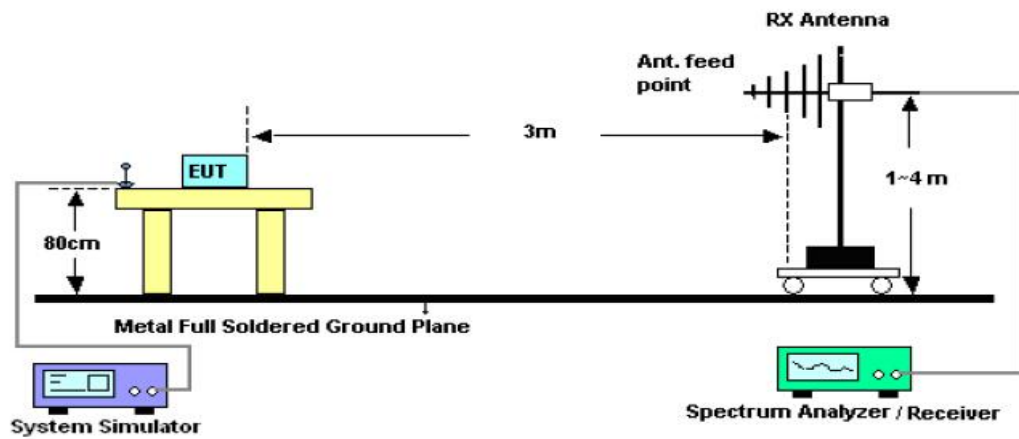



### 3.4. TEST RESULT

#### RADIATED EMISSION BELOW 30MHZ


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) Peak	Limit dB(uV/m) Average	Margin dB	Pass/Fail
0.1236	Face	48.03	10.4	58.43	105.76	47.33	Pass
0.1236	Side	37.69	10.4	48.09	105.76	57.67	Pass

Note: No other emissions found between lowest internal used/generated frequencies to 30MHz. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.

**RADIATED EMISSION 30MHz- 1GHZ**

EUT :	Camping COB Lantern With Power Bank And Wireless Charger	Model Name. :	92194
Temperature :	20 °C	Relative Humidity:	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Horizontal

66.9 dBuV/m

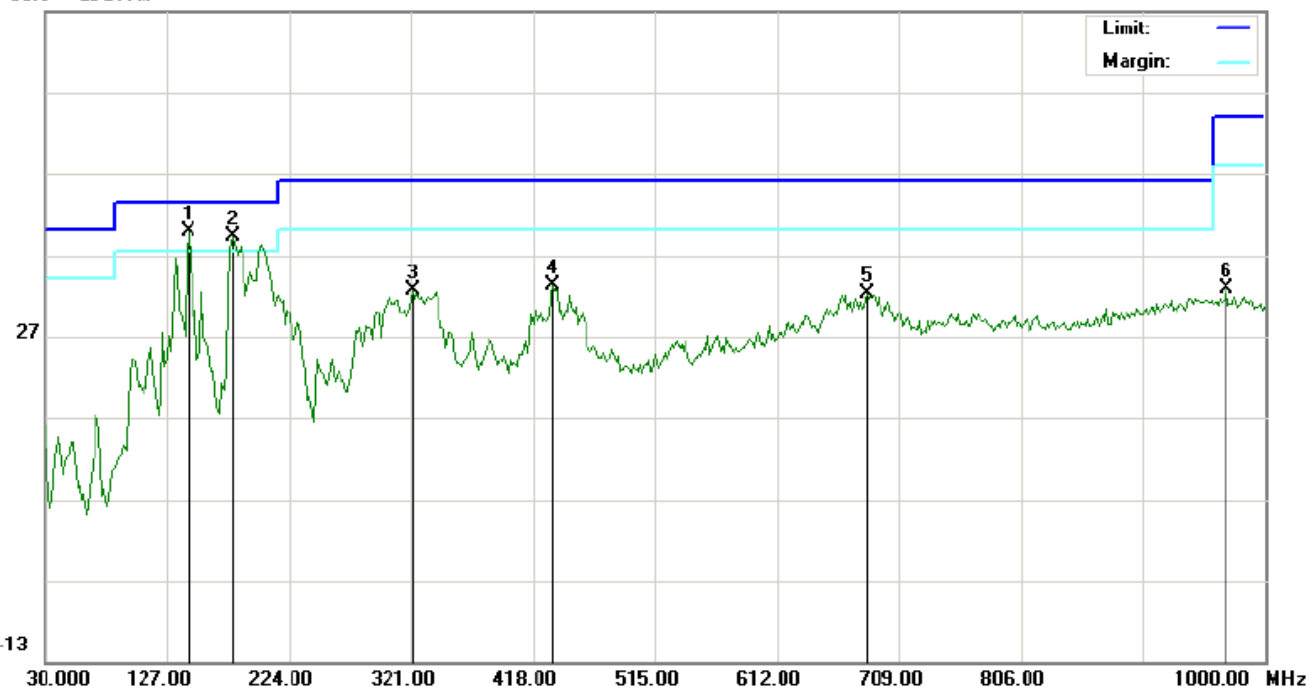


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	144.7833	25.78	14.04	39.82	43.50	-3.68	peak			
2	!	178.7333	28.19	11.02	39.21	43.50	-4.29	peak			
3		322.6167	15.69	16.92	32.61	46.00	-13.39	peak			
4		434.1667	13.10	20.11	33.21	46.00	-12.79	peak			
5		683.1333	7.54	24.76	32.30	46.00	-13.70	peak			
6		969.2833	3.00	29.81	32.81	54.00	-21.19	peak			

**RESULT: PASS**



EUT :	Camping COB Lantern With Power Bank And Wireless Charger	Model Name. :	92194
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Vertical

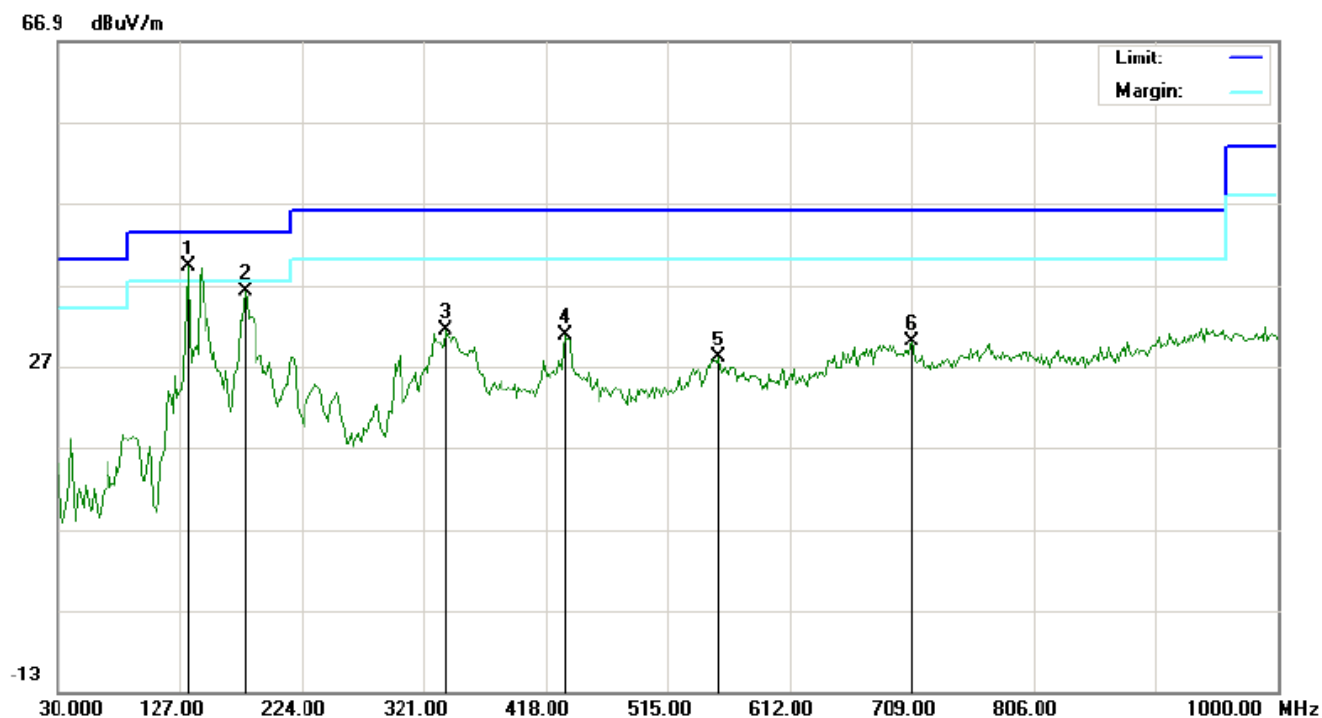

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	133.4667	26.65	12.48	39.13	43.50	-4.37	peak			
2		178.7333	22.13	14.15	36.28	43.50	-7.22	peak			
3		338.7833	13.43	17.99	31.42	46.00	-14.58	peak			
4		434.1667	10.69	20.11	30.80	46.00	-15.20	peak			
5		555.4167	5.41	22.51	27.92	46.00	-18.08	peak			
6		709.0000	4.57	25.45	30.02	46.00	-15.98	peak			

## RESULT: PASS

### Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 which operate with maximum output power was the worst case and only the data of the worst case record in this report.




## 4. 20DB BANDWIDTH

### 4.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Set the EUT Work on operation frequency.
3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a channel  
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.


### 4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

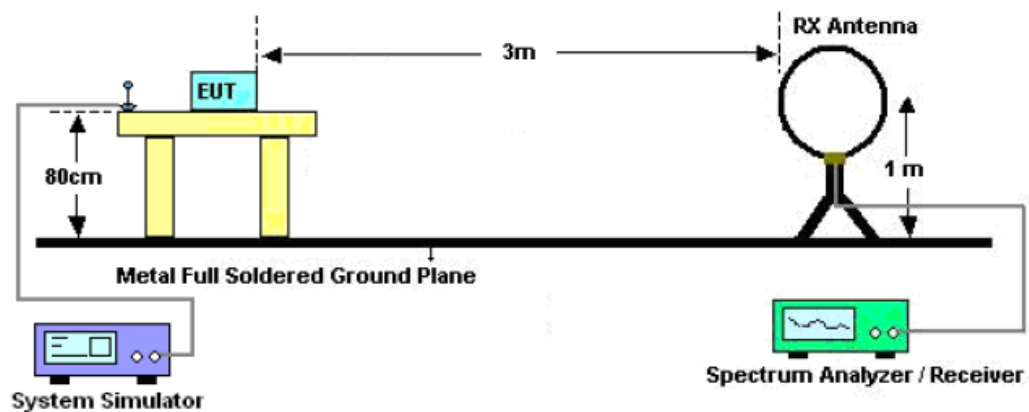

**4.3. MEASUREMENT RESULTS**

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	FSK

Frequency (KHz)	Test Data (Hz)	Criteria
123.6	251	PASS

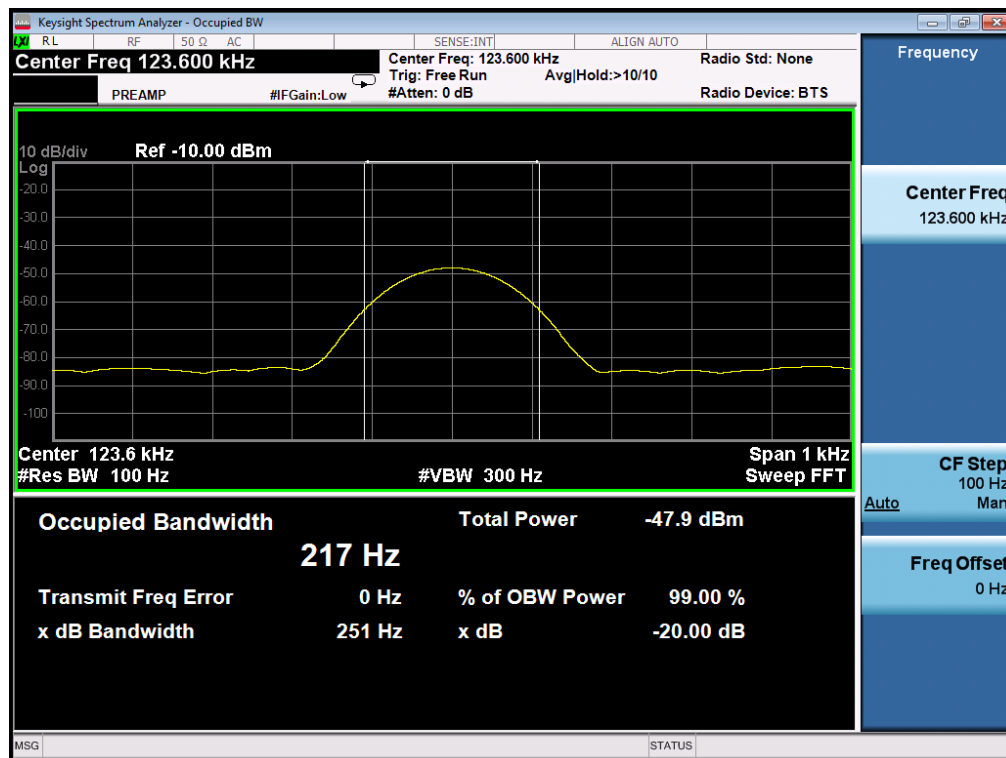**TEST PLOT OF BANDWIDTH**



## 5. FCC LINE CONDUCTED EMISSION TEST


### 5.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

### 5.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

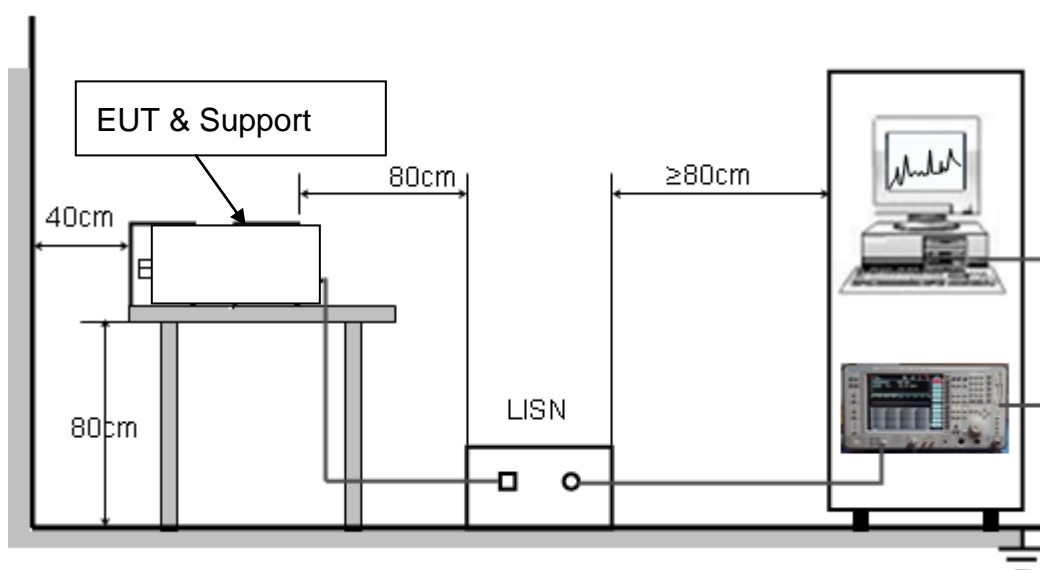






### 5.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 5.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

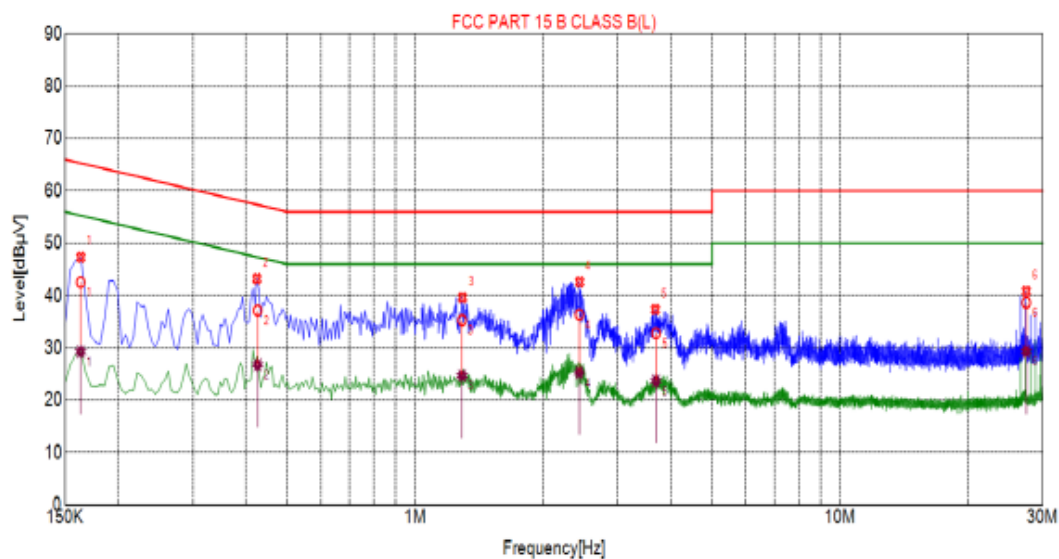**5.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST****LINE CONDUCTED EMISSION TEST-L****Suspected List**

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.1635	47.30	9.98	65.28	17.98	PK
2	0.4245	43.22	10.04	57.36	14.14	PK
3	1.2930	39.62	10.09	56.00	16.38	PK
4	2.4405	42.60	10.18	56.00	13.40	PK
5	3.6780	37.33	10.25	56.00	18.67	PK
6	27.4380	40.63	10.26	60.00	19.17	PK


**Final Data List**

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1633	9.98	42.54	65.29	22.75	29.25	55.29	26.04
2	0.4260	10.04	37.14	57.33	20.19	26.76	47.33	20.57
3	1.2906	10.09	35.29	56.00	20.71	24.70	46.00	21.30
4	2.4359	10.18	36.36	56.00	19.64	25.27	46.00	20.73
5	3.6887	10.25	32.82	56.00	23.18	23.68	46.00	22.32
6	27.4317	10.26	38.64	60.00	21.36	29.31	50.00	20.69

**RESULT: PASS**



## LINE CONDUCTED EMISSION TEST-N

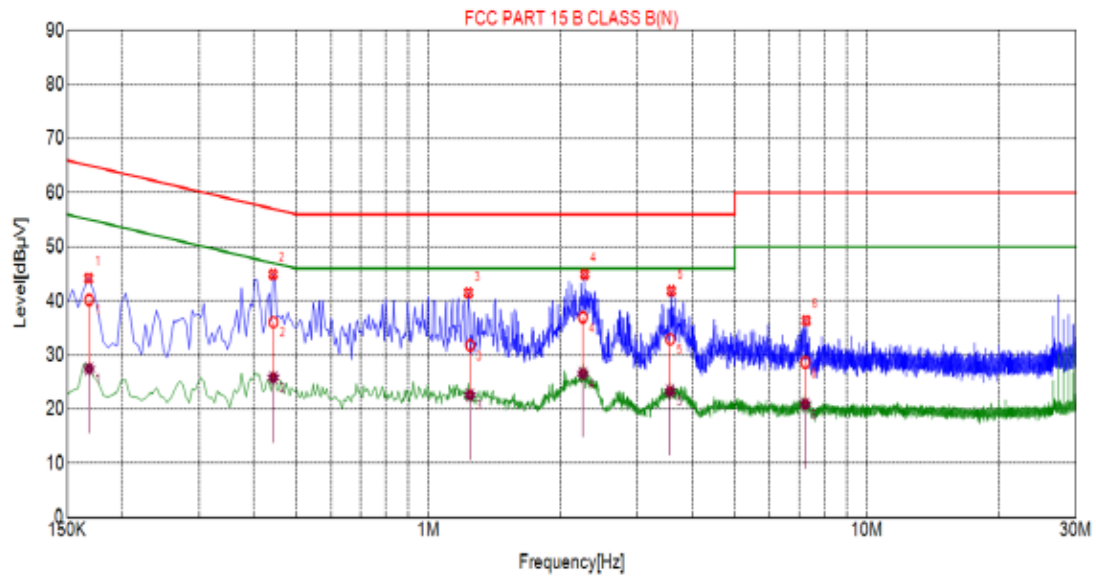

## Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.1680	44.17	10.01	65.06	20.89	PK
2	0.4425	44.93	10.05	57.01	12.08	PK
3	1.2345	41.53	10.09	56.00	14.47	PK
4	2.2740	44.94	10.18	56.00	11.06	PK
5	3.5835	41.88	10.25	56.00	14.12	PK
6	7.2735	36.39	10.18	60.00	23.61	PK

## Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1684	10.01	40.18	65.04	24.86	27.44	55.04	27.60
2	0.4433	10.04	36.08	57.00	20.92	25.80	47.00	21.20
3	1.2449	10.09	31.82	56.00	24.18	22.59	46.00	23.41
4	2.2513	10.18	36.98	56.00	19.02	26.61	46.00	19.39
5	3.5612	10.25	32.91	56.00	23.09	23.32	46.00	22.68
6	7.2350	10.19	28.65	60.00	31.35	20.90	50.00	29.10

2

## RESULT: PASS

Note: The mode 1 which operate with maximum output power was the worst case and only the data of the worst case record in this report.


## 6. PHOTOGRAPH OF TEST

### Radiated Emission





## Conducted Emission

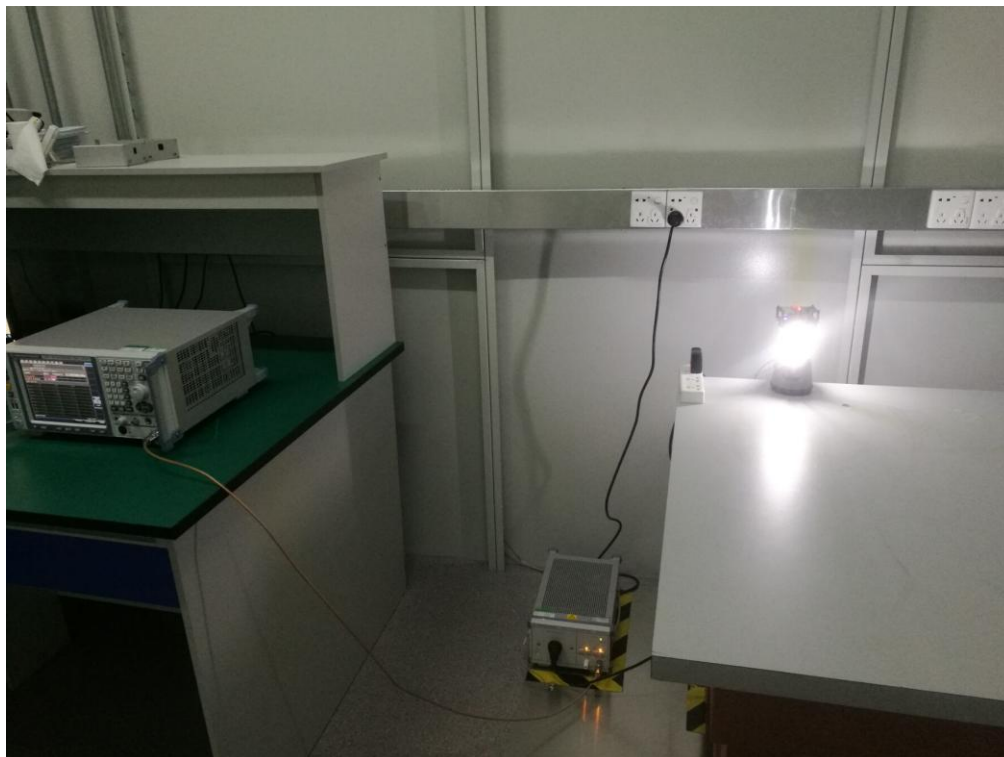







## 7. PHOTOGRAPH OF EUT


TOP VIEW OF EUT

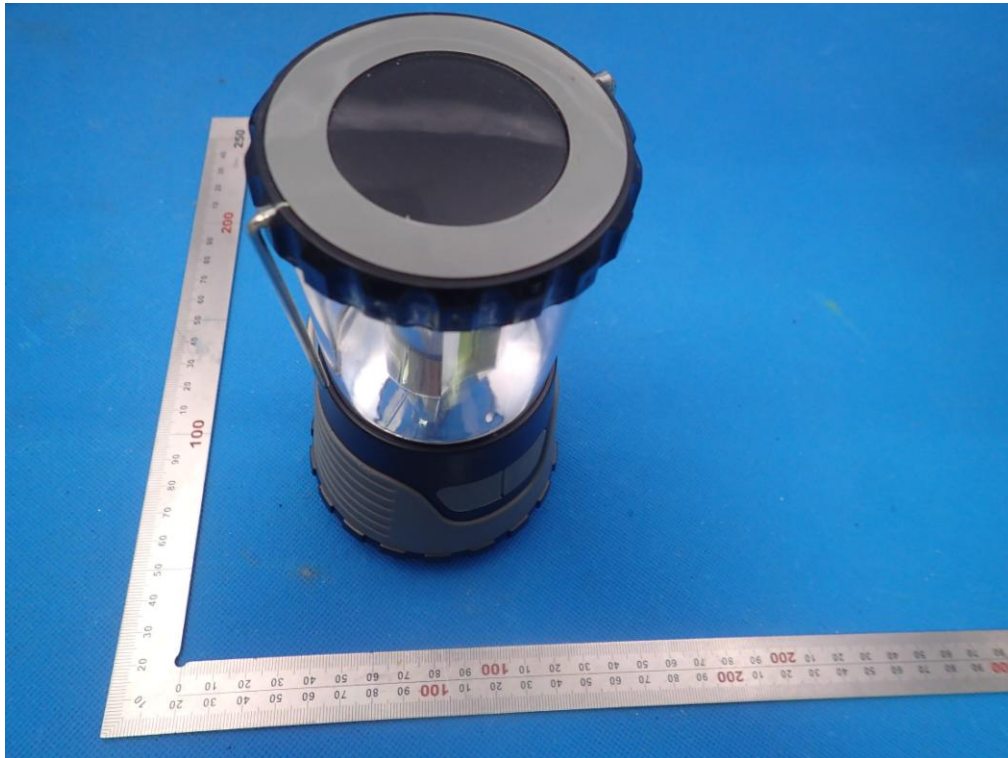

BOTTOM VIEW OF EUT

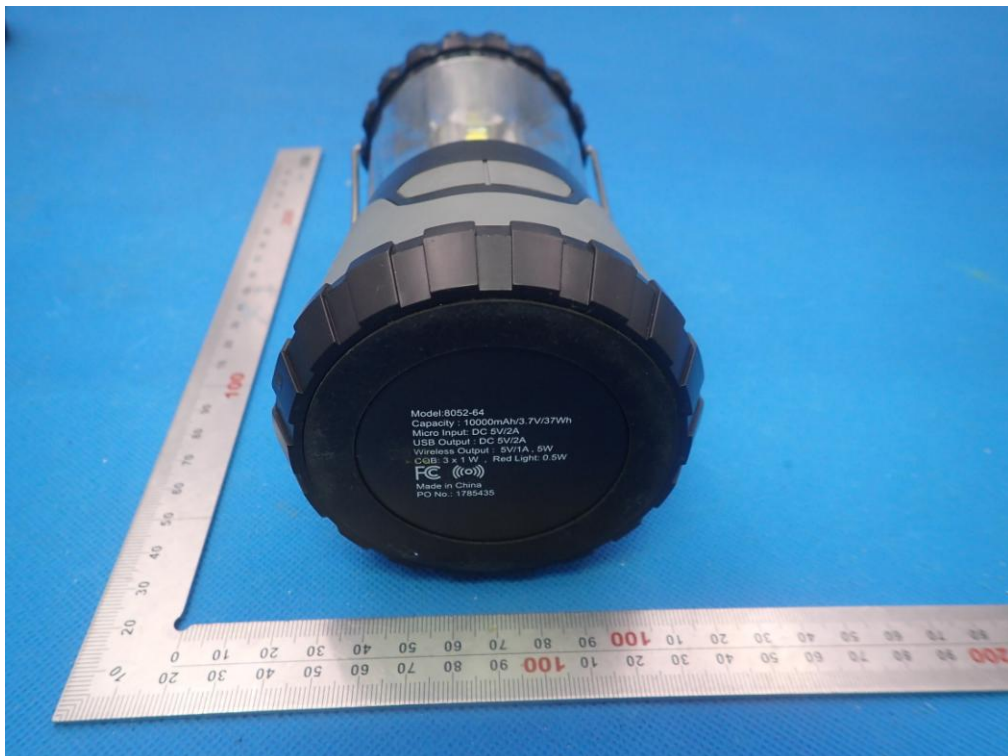

FRONT VIEW OF EUT

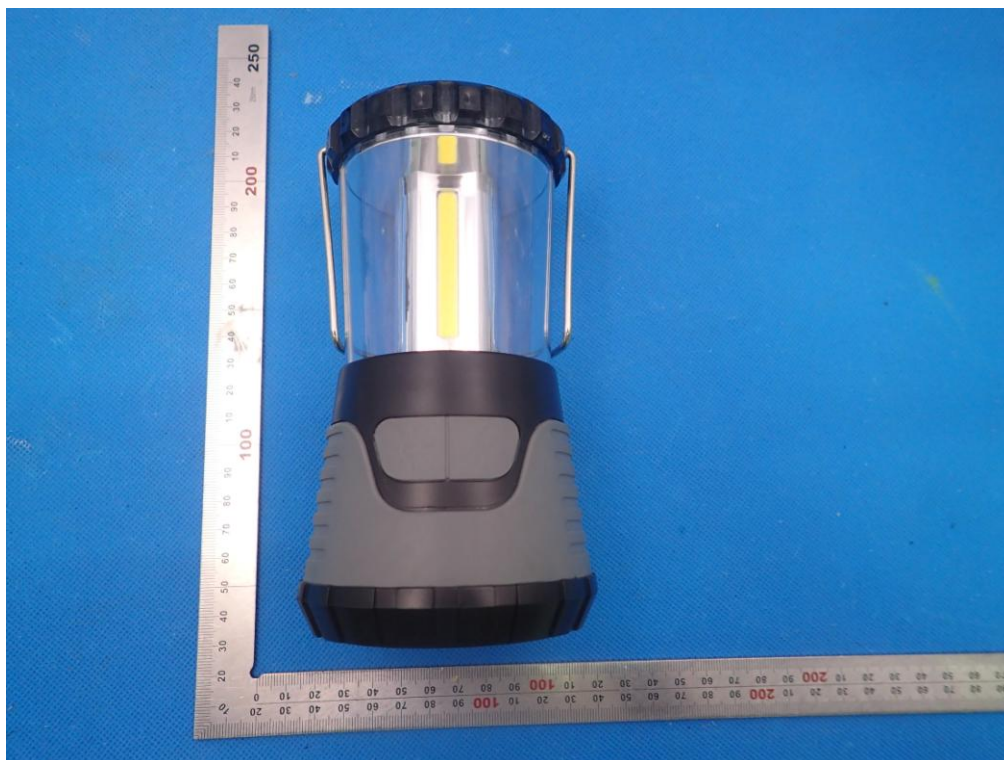

BACK VIEW OF EUT





LEFT VIEW OF EUT




RIGHT VIEW OF EUT






OPEN VIEW-1 OF EUT

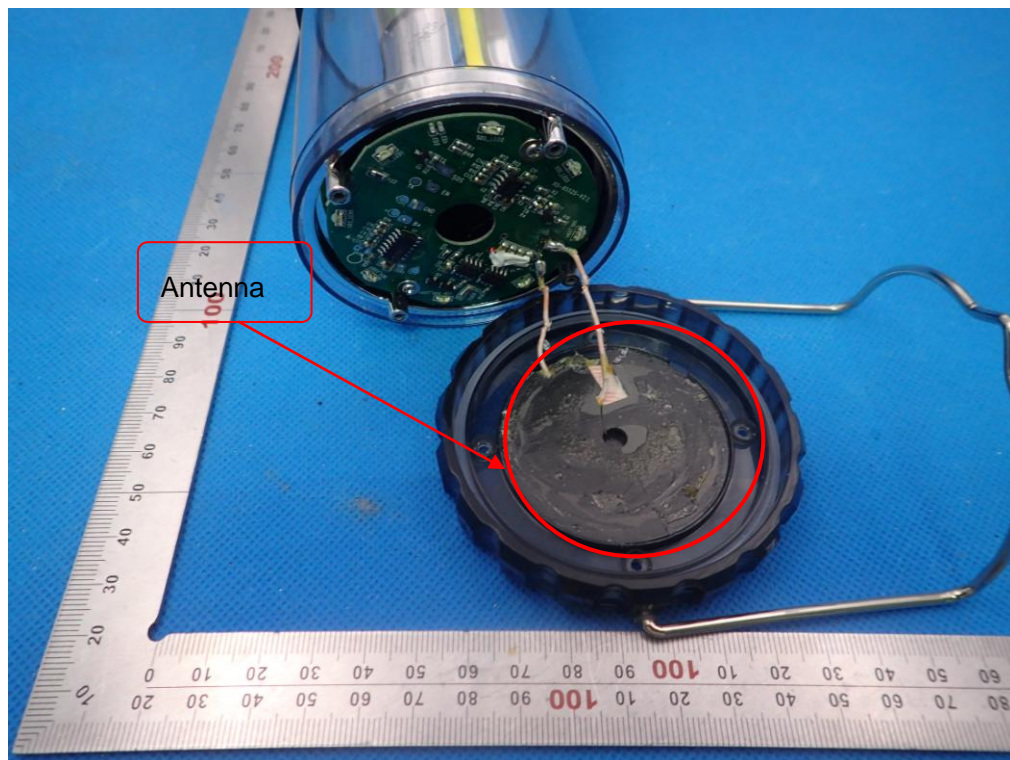


OPEN VIEW-2 OF EUT

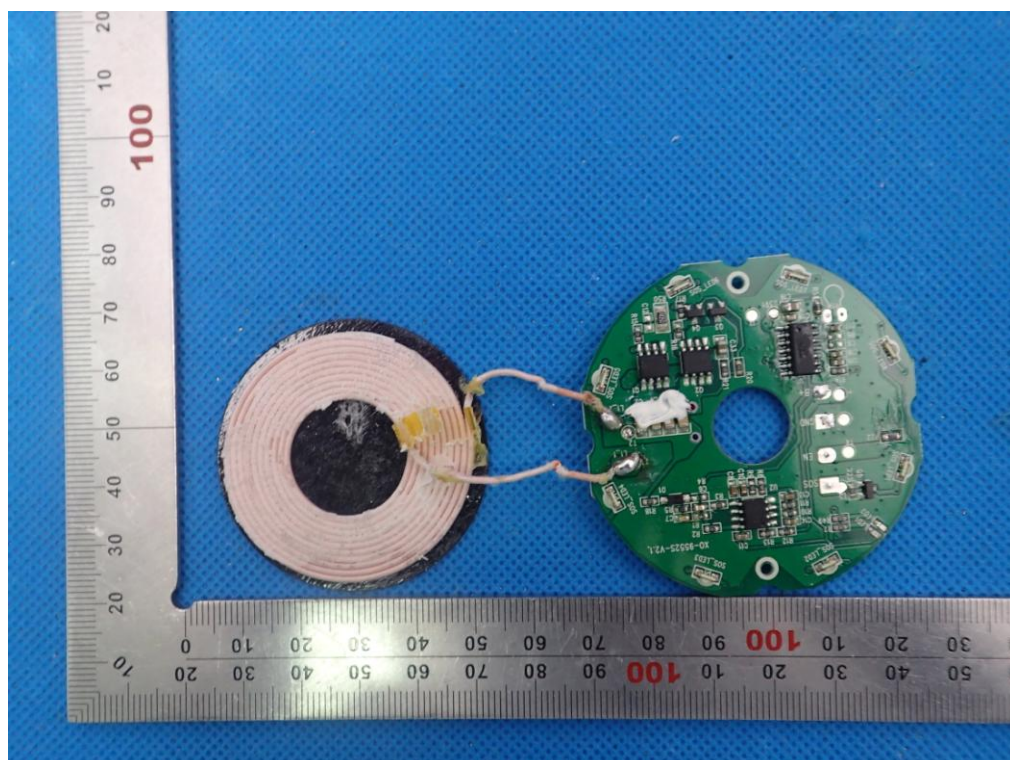

## OPEN VIEW-2 OF EUT




## INTERNAL VIEW-1 OF EUT

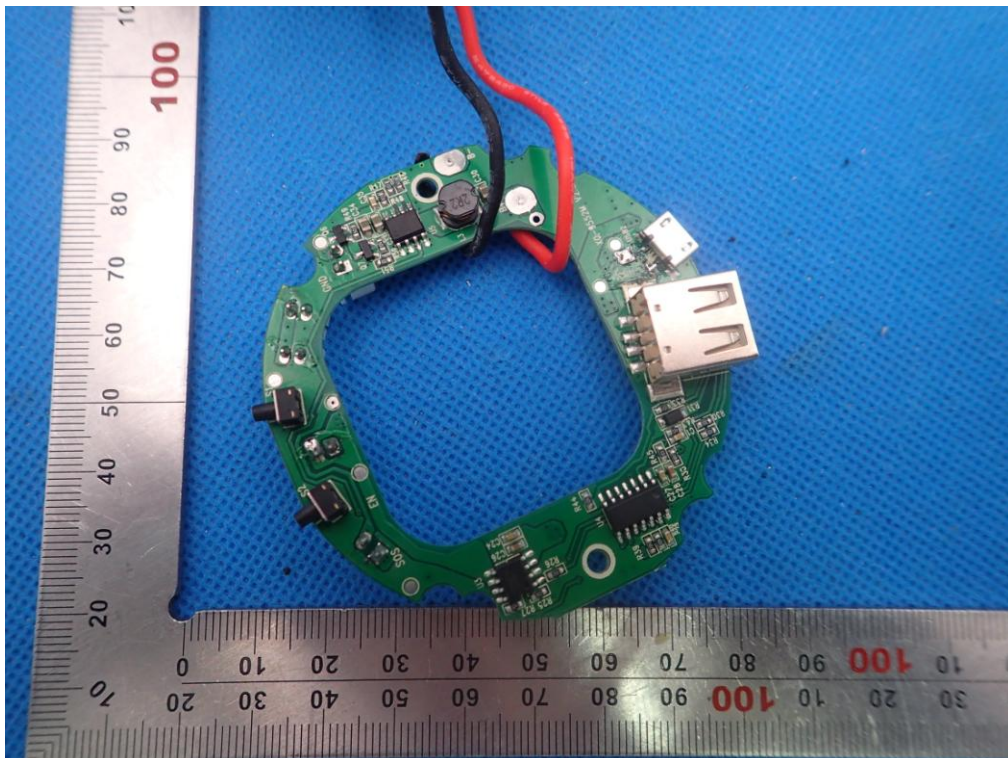




INTERNAL VIEW-2 OF EUT

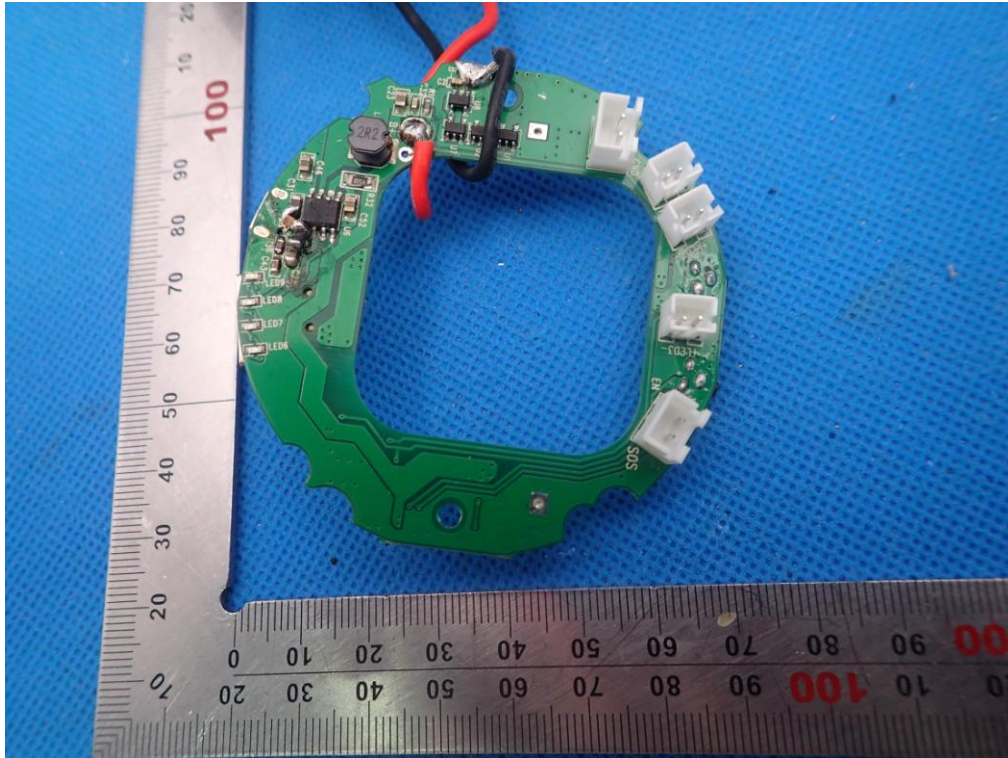

INTERNAL VIEW-3 OF EUT

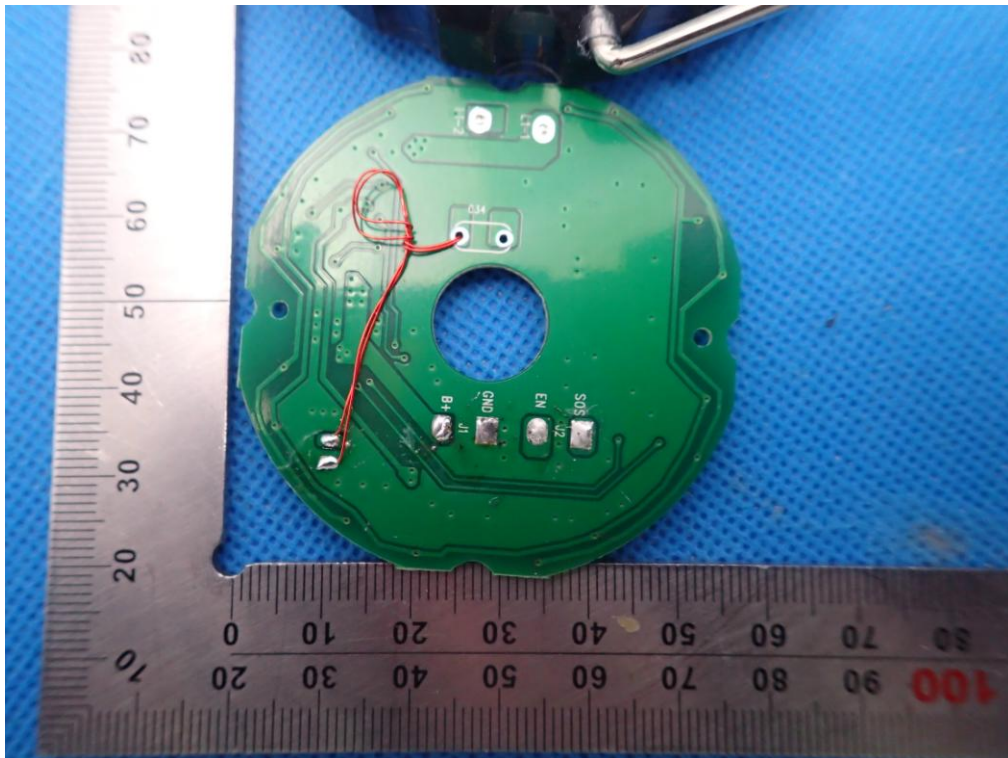

## INTERNAL VIEW-4 OF EUT

