

SPECIFICATION

for

Antenna

Sunnyway Technology (Shenzhen) Co. Ltd

Customer No. Jimilot

Product No. Sunnyway

Author: Peilin Lu Review: Huangxiong

Release Date: 2022.11.19

Sunnyway Technology (Shenzhen) Co.Ltd

6th Floor, Building 5, Nantaiyun Chuanggu Center, Guangming District, Shenzhen

E- mail: sales@sunnyway-iot.com

Tel : +86-0755-82504210

Fax: +86-021-64842328

Contents

SPECIFICATION.....	1
Sunnyway Technology (Shenzhen)Co.Ltd.....	2
CONTENTS	2
1. BILATERAL CONFIRMATION PAGE	3
2. GENERAL	4
3. GENERAL PRODUCT SPECIFICATIONS	4
4. SPECIFICATION DETIALS	5
4.1 MECHANICAL PROPERTIES	5
4.2 ELECTRIC PERFORMANCE	7
5. PRODUCT PACKAGING	9
6. DOCUMENT RESUME	9

1 . Bilateral Confirmation page

1.1 Customer signature

Customer: Jimilot

Seapartment/ post	Sign	Date
Hardware Engineer/ RD		
Mechanical/ MD		
Project Manager/ PM		
Commercial/ Puchasing		
Checker		

1.2 Signature of Sunnyway Technology company

Seapartment/ post	Sign	Date
Antenna Engineer/ RD		
Mechanical/ MD		
Project Manager/ PM		
QA		
Checker		

2. General

2.1 Scope of application

This specification is only applicable to Jimi IoT LTE antenna


2.2 Operating temperature range

Temperature range of this product: -20 ~ + 65 °C

2.3 Storage temperature range:

This product is stored at - 30 ~ + 75 °C

3. General product specifications

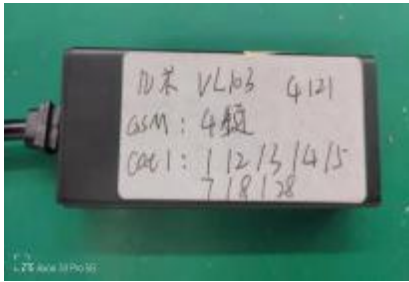NO.	ITEMS	DETAILS
1	Type	FPC
2	Operating Frequency Band	BT 2.4G
3	VSWR	≤ 2.5
4	Max. Gain	1.33dBi
5	Radiation Efficiency	$\geq 40\%$
6	Impedance	50Ω
7	Antenna Type	PIFA
8	Antenna composition	N/A
9	Entity Picture	

4 . Specification Detials

4 . 1 Mechanical Properties

4.11 Product Composition;


No.	Material	Size (MM)
1	FPC	50*12*12 Thick 0.3mm

4.12 Apperance

Good appearance without scars 、 dirt 、 protuberances, etc.

4.13 Antenna Picture and Structure Dimension

Refer to product drawings:

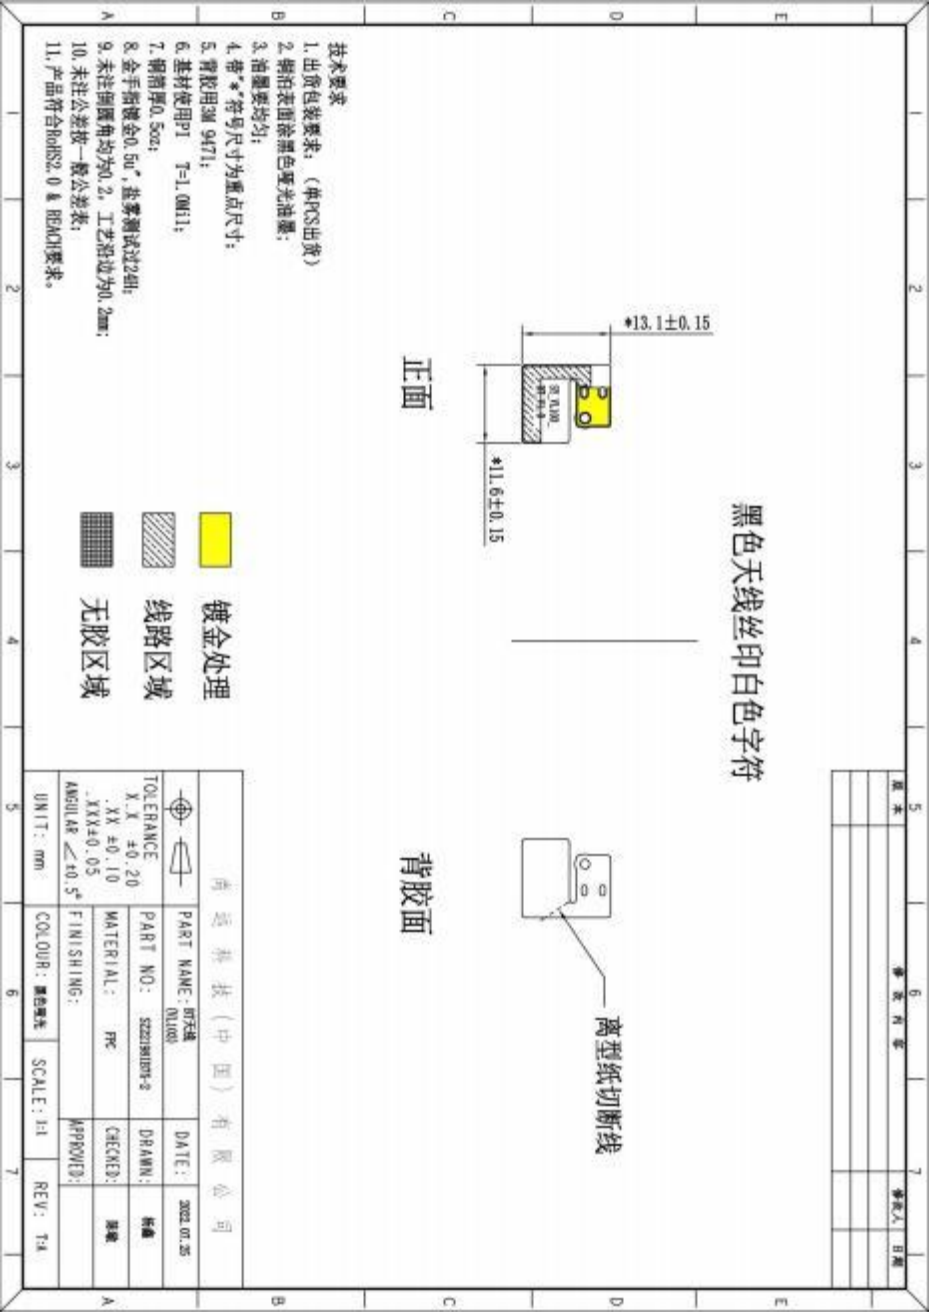


4.2 Electric Performance

Environment:		Equipment:	
Temperature:	10℃——+30℃	Network Analyzer:	Agilent E8358A
Humidity:	≤ 80% (+40℃)	Anechior Chamber:	ETS
Atmospher:	750mmkg±30mmkg		

4.22 Test Data for Electrical Performance:

4.22.1 S11 of the Antenna:



Maker	2400	2500
VSWR	2.4	2

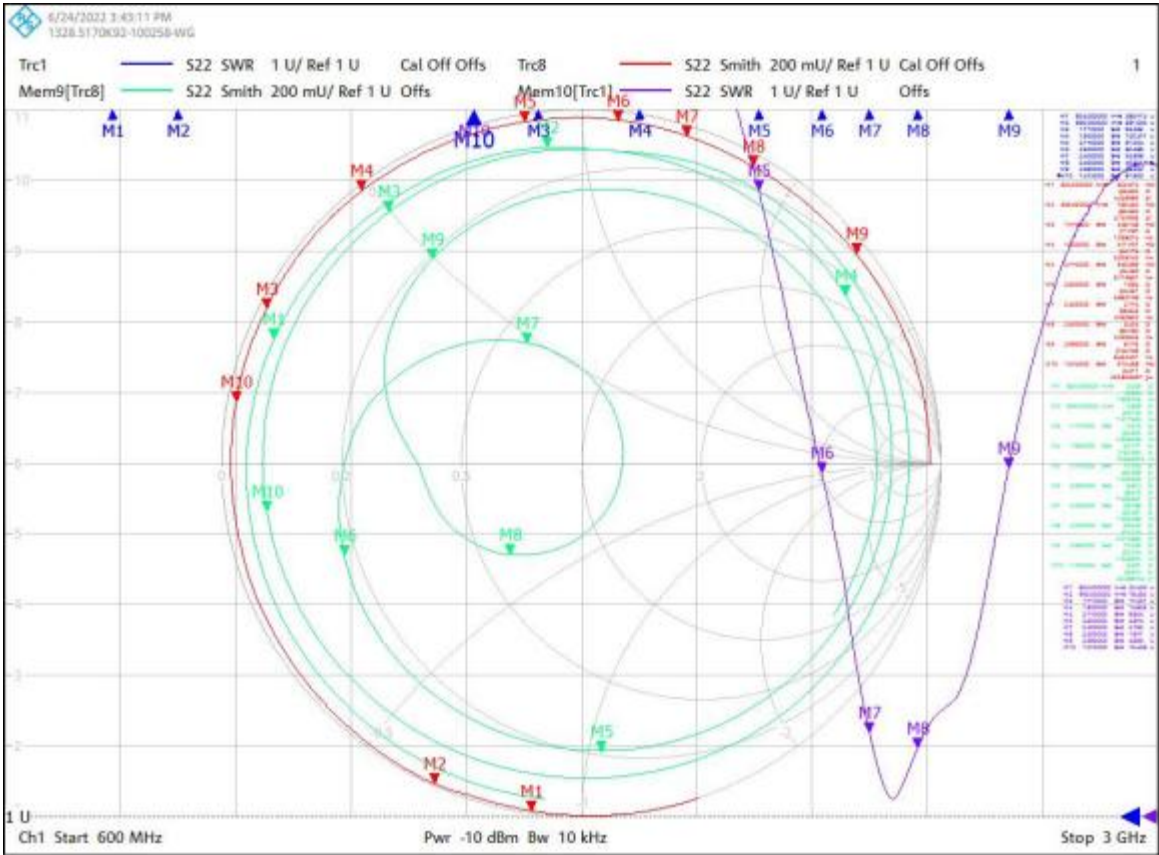

4.22.2 Passive gain efficiency :

Frequency/ Mhz	Efficiency / %	MaxGain/ dBi
2400	39.17	0.93
2410	40.09	1.19
2420	42.85	1.09
2430	43.25	1.33
2440	43.55	0.84
2450	43.85	1.09
2460	41.59	0.58
2470	42.85	1.14
2480	41.11	0.81
2490	39.99	0.97
2500	37.15	0.67

4.22.3 Radiation pattern:

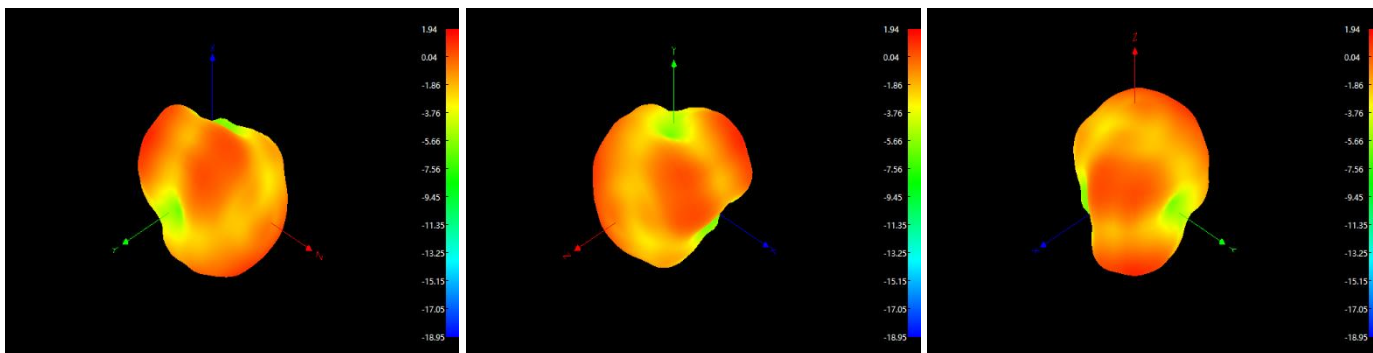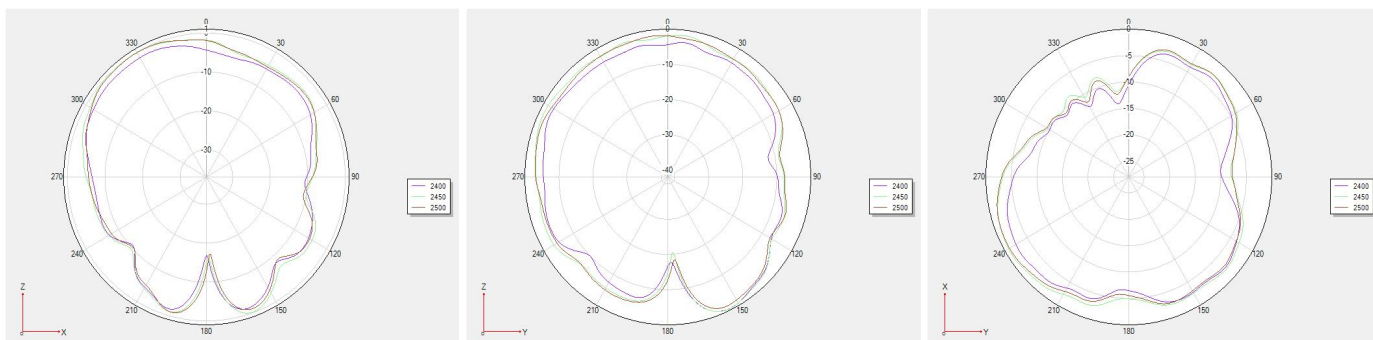

5. Product

Manner of packing:

Packed in self sealed bags, 200 pcs each.

6. Document

Document No.	
Release Date	2022/11/ 19
Author	Peilin Lu
Review	Huangxiong

Revised History

Date	Version	Revised Record
2022/ 11/ 19	1.00	New Project