

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 291-23**

In Accordance with the Requirements of
FCC TITLE 47 CFR Part 15.519, Subpart F
Technical Requirements for Handheld UWB Systems
Class II Permissive Change

Issued to


Wiser Systems, Inc.
819 W Hargett St
Raleigh, NC 27603
(919) 551-5566

For the
USB Dongle
Models: USB5V1.0

FCC ID: 2AGZM-A01116

Report Issued on October 6, 2023

Tested by



Sean P. Defelice

Reviewed by



Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details	3
2.1. Manufacturer	3
2.2. Model Number.....	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source.....	3
2.6. Hardware Revision.....	3
2.7. Software Revision	3
2.8. Modulation Type.....	3
2.9. Operating Frequency	3
2.10. EMC Modifications	3
3. Product Configuration.....	3
3.1. Operational Characteristics & Software.....	3
3.2. EUT Hardware	3
3.3. EUT Cables/Transducers.....	3
3.4. Support Equipment	3
3.5. Test Setup.....	4
4. Measurements Parameters	5
4.1. Measurement Equipment Used to Perform Test	5
4.2. Measurement & Equipment Setup	6
4.3. Measurement Procedure	6
4.4. Measurement Uncertainty.....	6
5. Measurement Summary	7
6. Measurement Data	8
6.1. Antenna Requirement	8
6.2. Operational Requirements	9
6.3. UWB Bandwidth	11
6.4. Radiated Emissions below 960 MHz	13
6.5. Radiated Emissions above 960 MHz	22
6.6. Radiated Emissions in the GPS Bands.....	30
6.7. RMS Emissions of UWB Transmission.....	35
6.8. Peak Emissions in a 50 MHz Bandwidth	38
6.9. Conducted Emissions Test Setup.....	41
6.10. Conducted Emissions Test Data.....	42
7. Test Site Description	46
8. Test Images	47
8.1. Spurious and Harmonic Emissions - 30 kHz to 1 GHz Front.....	47
8.2. Spurious and Harmonic Emissions - 30 kHz to 30 MHz Rear	48
8.3. Spurious and Harmonic Emissions - 30 MHz to 1 GHz Rear	49
8.4. Spurious and Harmonic Emissions - 1 to 18 GHz Front.....	50
8.5. Spurious and Harmonic Emissions - 1 to 18 GHz Rear.....	51
8.6. Spurious and Harmonic Emissions - 18 to 40 GHz Side	52

1. Scope

This test report certifies that the Wiser Systems USB Dongle USB5V1.0 as tested, meets the FCC Part 15, Subpart F requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

2. Product Details

- 2.1. Manufacturer:** Wiser Systems, Inc.
- 2.2. Model Numbers:** USB5V1.0
- 2.3. Serial Numbers:** Pre production
- 2.4. Description:** RRLT Locator System leverages new advances in Ultra-Wideband technology to deliver low cost/high accuracy, real-time localization.
- 2.5. Power Source:** 5 VDC via USB, External Battery or USB to AC Adapter
- 2.6. Hardware Revision:** Rev 3
- 2.7. Software Revision:** N/A
- 2.8. Modulation Type:** Pulse Modulation, Frequency Hopping
- 2.9. Operating Frequencies:** 4.5 GHz Center Frequency Nominal (Channel 3 – 500 MHz BW),
4.5 GHz Center Frequency Nominal (Channel 3 – 900 MHz BW)
- 2.10. EMC Modifications:** None

3. Product Configuration

3.1 Operational Characteristics & Software

Hardware Setup:

Connect the Wiser USB Dongle to a remotely located laptop computer via USB.

Using the software tool configure the USB dongle to transmit on Channel 3 normal or wide modes.

3.2. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Volts	Freq (Hz)	Description/Function
Wiser Systems	USB5V1.0	Pre-production	5.0	DC	USB Dongle Anchor

3.3. EUT Cables/Transducers


Cable Type	Length	Shield	From	To
USB	1M	Yes	EUT	Laptop for Control / Battery Power

3.4. Support Equipment

Manufacturer	Model/Part # / Options	Serial Number	Input Voltage	Freq (Hz)	Description/Function
Dell	XPS 13 – L321X	41647808737	120	60	For controlling the USB Dongle

3. Product Configuration (cont.)

3.5. Test Setup Diagram

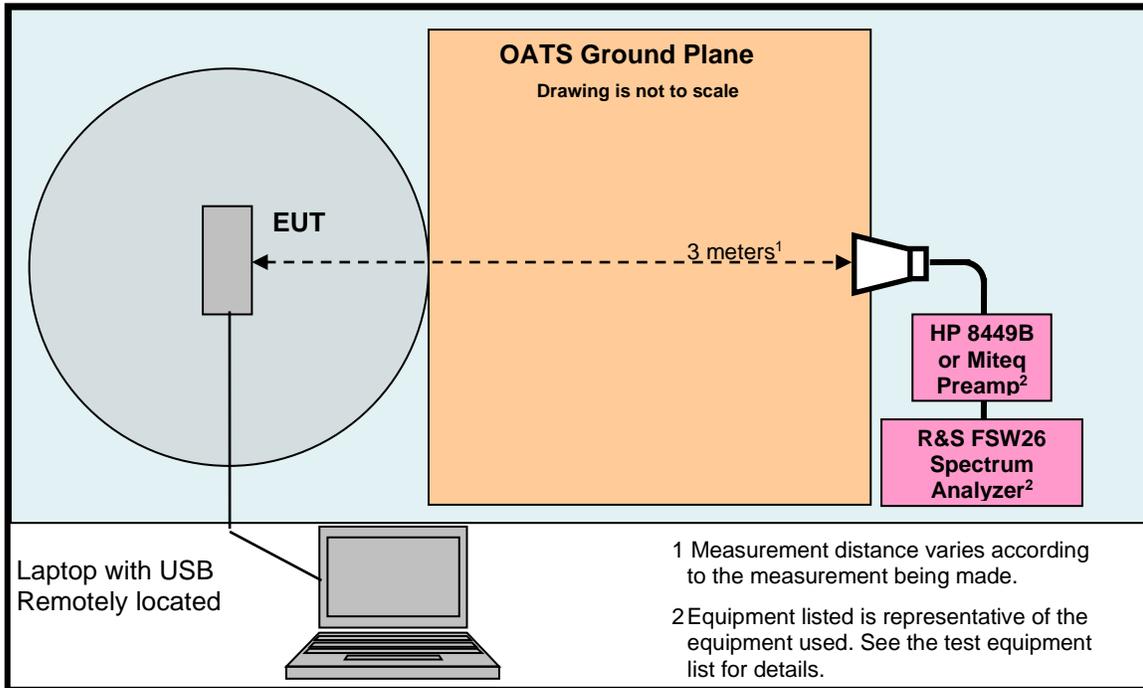

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Test Receiver, 9kHz - 7GHz ¹	Rohde & Schwarz	ESR7	101156	10/25/2023	2 Years
EMI Test Receiver, 10 Hz - 7GHz ¹	Rohde & Schwarz	ESR7	101770	7/23/2024	3 Years
Spectrum Analyzer, 2 Hz to 26.5 GHz ²	Rohde & Schwarz	FSW26	102057	6/24/2024	3 Years
Spectrum Analyzer, 9 kHz to 40 GHz ³	Rohde & Schwarz	FSV40	100899	8/12/2024	4 Years
Spectrum Analyzer 10 Hz – 40 GHz ⁴	Rohde & Schwarz	FSVR40	100909	9/18/2024	4 Years
Loop Antenna 9 kHz - 30 MHz	EMCO	6512	9309-1139	4/14/2025	3 Years
Biconilog Antenna, 30 MHz - 2 GHz	Sunol Sciences	JB1	A050913	7/1/2024	3 Years
Dbl Ridged Guide Antenna 1- 18 GHz	ETS-Lindgren	3117	00143292	5/11/2024	2 Years
Dbl Ridged Guide Antenna 1- 18 GHz	ETS-Lindgren	3117	00227631	4/21/2024	2 Years
Preamplifier 100 MHz to 7 GHz	Miteq	AFS3-00100200-10-15P-4	988773	2/28/2024	1 Year
Preamplifier 100 MHz to 18 GHz	Miteq	AMF-7D-00101800-30-10P	1953081	2/28/2024	1 Year
Preamplifier 2 to 12 GHz	JCA	JCA48-4111B1	7087S	2/28/2024	1 Year
Preamplifier, 1 GHz to 26.5 GHz	Hewlett Packard	8449B	3008A01323	11/30/2023	2 Years
Preamplifier 18 to 40 GHz	Miteq	JSD42-21004200-40-5P	649199/649219	2/28/2024	1 Year
Horn Antenna 18 to 40 GHz	Com Power	AH-840	101032	1/25/2024	2 Years
High Pass Filter 8 to 18 GHz	Micro-Tronics	HPM50107	G036	2/28/2024	1 Year
High Pass Filter 6.4 to 18 GHz	Micro-Tronics	HPM50112	14	2/28/2024	1 Year
Low Pass Filter DC to 2700 MHz	Mini-Circuits	NLP-2950+	15542	11/21/2023	1 Year
10 dB Attenuator	Pasternack	PE7004-10	ID473	12/19/2023	1 Year
Barometric Pressure/Humidity & Temp Datalogger	Extech Instruments	SD700	Q590483	10/14/2023	2 Years

¹ ESR7 Firmware revision: V3.48 SP3, Date installed: 09/30/2020

² FSW26 Firmware revision: V4.71 SP1, Date installed: 11/16/2020

³ FSV40 Firmware revision: V2.30 SP4, Date installed: 05/04/2016

⁴ FSVR40 Firmware revision: V2.23 SP1, Date installed: 08/19/2016

Previous V3.48 SP2, installed 07/23/2020.

Previous V4.61, installed 08/11/2020.

Previous V2.30 SP1, installed 10/22/2014.

Previous V2.23, installed 10/22/2014.

4. Measurements Parameters (continued)

4.2. Measurement & Equipment Setup

Test Dates:	9/12/2023, 9/14/2023, 9/22/2023, 9/26/2023, 9/27/2023, 9/28/2023, 10/6/2023
Test Engineers:	Sean Defelice, Larry Stillings
Normal Site Temperature (15 – 35°C):	21.6
Relative Humidity (20 -75%RH):	35
Frequency Range:	30 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 30 kHz to 150 kHz 9 kHz – 150 kHz to 30 MHz 120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth:	>= 3 * RBW
Detector Function:	Peak, Quasi-Peak & Average

4.3. Measurement Procedure

Test measurements were made in accordance FCC Parts 15.209 and 15.519 Subpart F requirements.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

4.4. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency (out of band)	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter to 100 GHz	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^{\circ}$ C
Humidity	$\pm 5\%$

5. Measurements Summary

Test Requirement	FCC Rule Requirement	Test Report Section	Result	Comment
Antenna Requirement	15.203	6.1	Compliant	
Operational Requirements	15.519 (a) (1)	6.2	Compliant	
UWB Bandwidth	15.503 (a) (d) 15.519 (b)	6.3	Compliant	
Radiated Emissions below 960 MHz	15.209	6.4	Compliant	
Radiated Emissions above 960 MHz	15.519 (c) 15.521 (d)	6.5	Compliant	
Radiated Emissions in GPS Bands	15.519 (d)	6.6	Compliant	
RMS Emissions of UWB Transmission in a 1 MHz Bandwidth	15.519 (c) 15.521 (d)	6.7	Compliant	
Peak Emissions in a 50 MHz Bandwidth	15.519 (e) 15.521 (g)	6.8	Compliant	
Conducted Emissions	15.207	6.9 6.10	Compliant	

6. Measurement Data

6.1. Antenna Requirement (15.203)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply.

Result: The antenna utilized by the device under test is a custom soldered type.

6. Measurement Data (continued)


6.2. Operational Requirements of the Device under Test (15.519 (a) (1))

Requirement: UWB device operating under the provisions of this section must be hand held, i.e., they are relatively small device that are primarily hand held while being operated and do not employ a fixed infrastructure. UWB devices operating under the provisions of this section may operate indoors or outdoors.

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

Result: Compliant, the EUT transmits a 178.35 μ S burst of location information every 10.398 seconds to an associated receiver.

6.2.1 Plot of Transmission

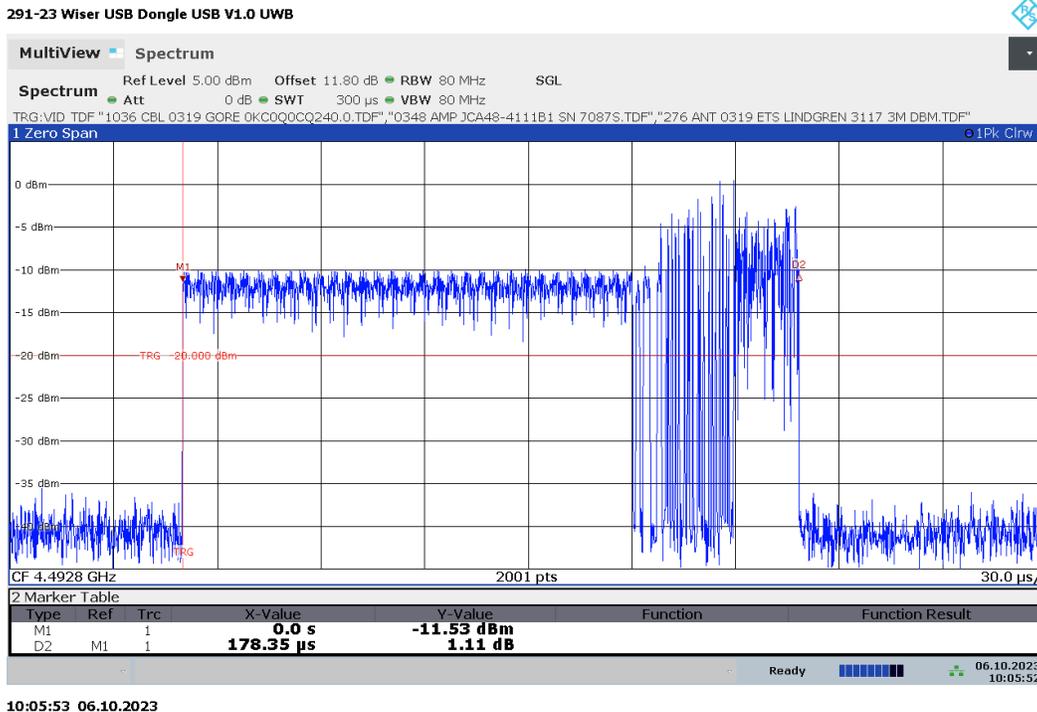


6. Measurement Data (continued)

6.2. Operational Requirements of the Device under Test (15.519 (a) (1))

6.2.2 Plot of Transmission Period

291-23 Wiser USB Dongle USB V1.0 UWB

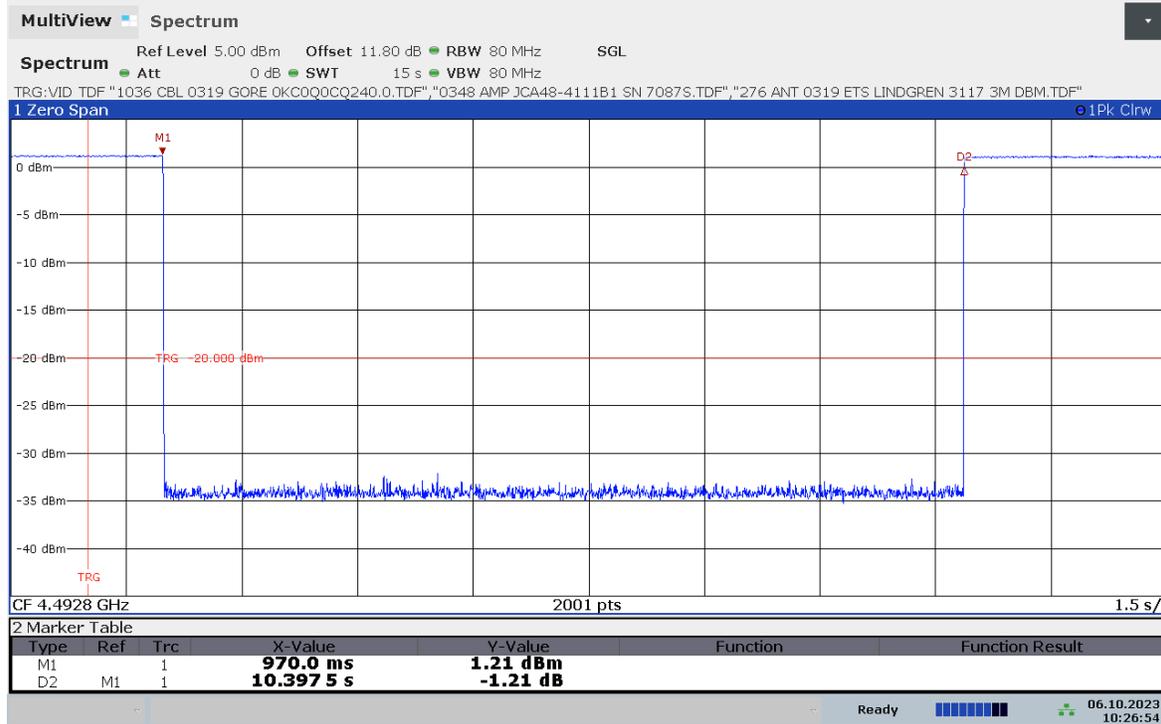

10:26:54 06.10.2023

6. Measurement Data (continued)


6.3. UWB Bandwidth (15.503 (a) (d), 15.519 (b))

Requirement: The UWB bandwidth of a device operating under the provisions of this section shall be contained between 3,100 MHz and 10,600 MHz and at any point in time, and has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

6.3.1. Measurement Data – Values in GHz

		CH3
f _M	The highest emission peak	4.5010
f _L	10 dB below the highest peak	4.2283
f _H	10 dB above the highest peak	4.7857
f _c	Calculated: (f _H + f _L) / 2	4.5070
Bandwidth	Calculated: (f _H - f _L)	0.5574
Fractional BW	Calculated: 2*(f _H - f _L) / (f _H + f _L)	0.1237

6.3.2. Measurement Plot of 10 dB frequencies (Channel 3 Normal)

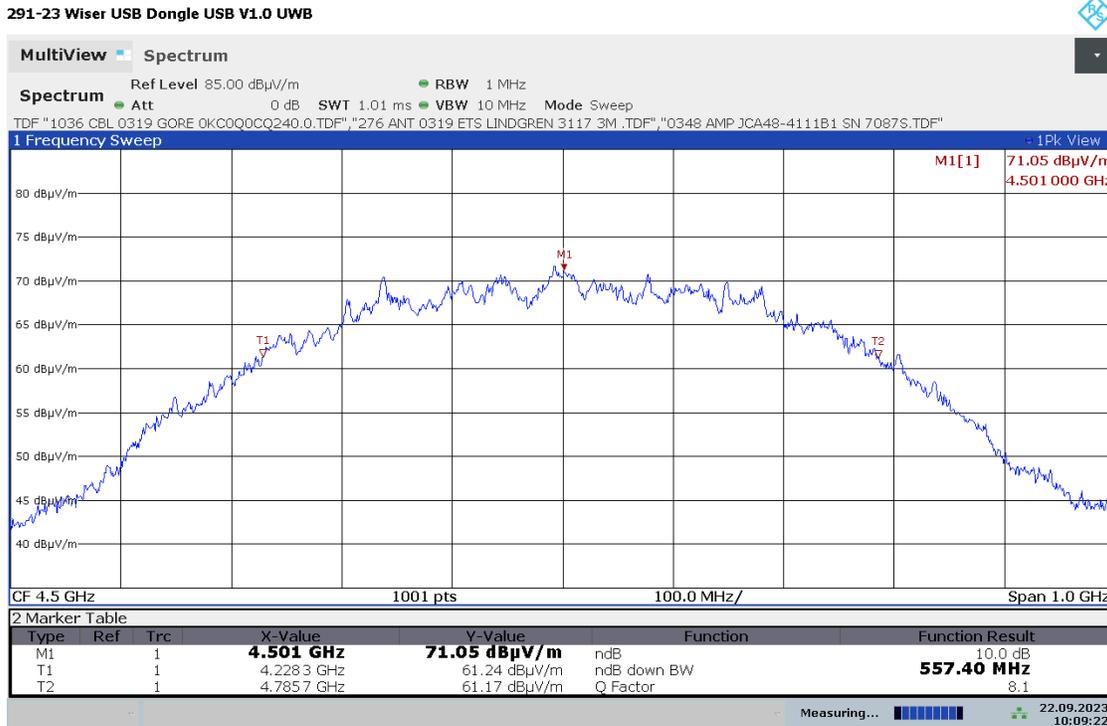

10:09:23 22.09.2023

6. Measurement Data (continued)


6.3. UWB Bandwidth (15.503 (a) (d), 15.519 (b) continued)

6.3.3. Measurement Data – Values in GHz

		CH3
f _M	The highest emission peak	4.4920
f _L	10 dB below the highest peak	4.0982
f _H	10 dB above the highest peak	5.0517
f _c	Calculated: (f _H + f _L) / 2	4.5750
Bandwidth	Calculated: (f _H - f _L)	0.9535
Fractional BW	Calculated: 2*(f _H - f _L) / (f _H + f _L)	0.2084

6.3.4. Measurement Plot of 10 dB frequencies (Channel 3 Wide)

291-23 Wiser USB Dongle USB V1.0 UWB

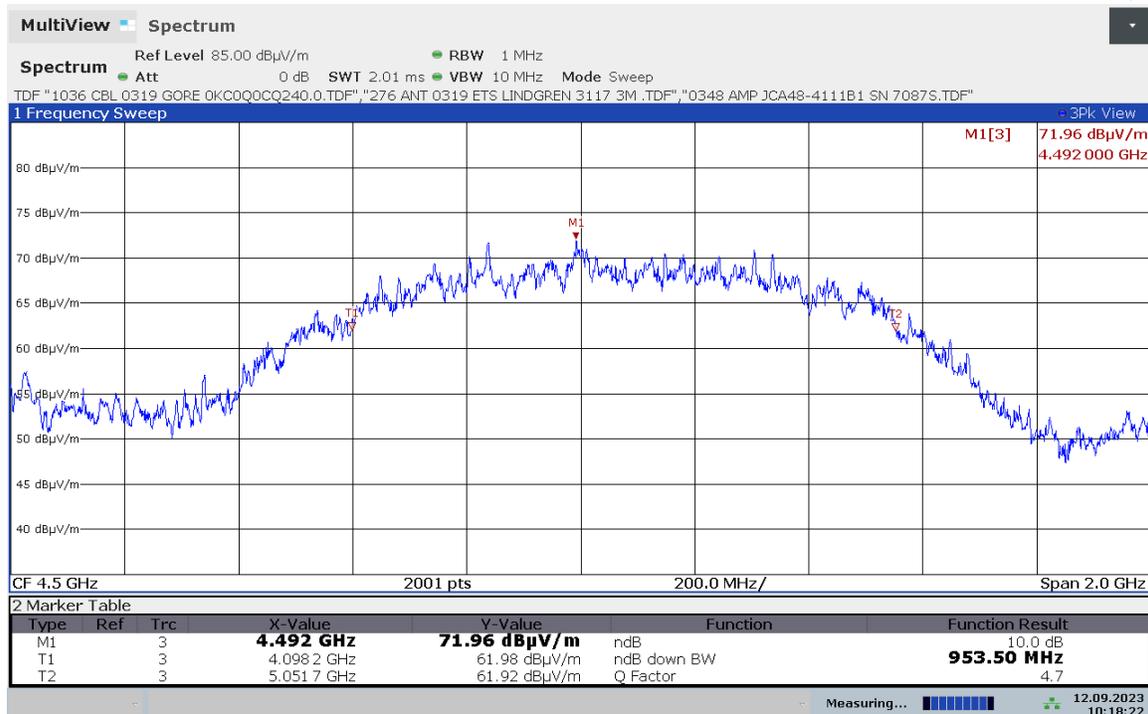

10:18:22 12.09.2023

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions below 960 MHz (15.519 (c), 15.209)

Requirement: The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

Radiated Emissions Field Strength Limits at 3 Meters (Section 15.209, RSS-220)

Frequency (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
0.009 to 0.490	2,400/F (F in kHz)	128.5 to 93.8
0.490 to 1.705	24,000/F (F in kHz)	73.8 to 63
1.705 - 30	30	69.5
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46

Test Notes: Refer to Section 4.1 for the test equipment used.

Frequency Range:	30 kHz to 960 MHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 30 kHz to 150 kHz 9 kHz – 150 kHz to 30 MHz 120 kHz - 30 MHz to 960 MHz
EMI Receiver Avg Bandwidth:	≥ 3 * RBW or IF(BW)
Detector Function:	Peak, Quasi-Peak & Average


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209, continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.1 Parallel Measurement Antenna – 30 to 150 kHz – CH3 Normal

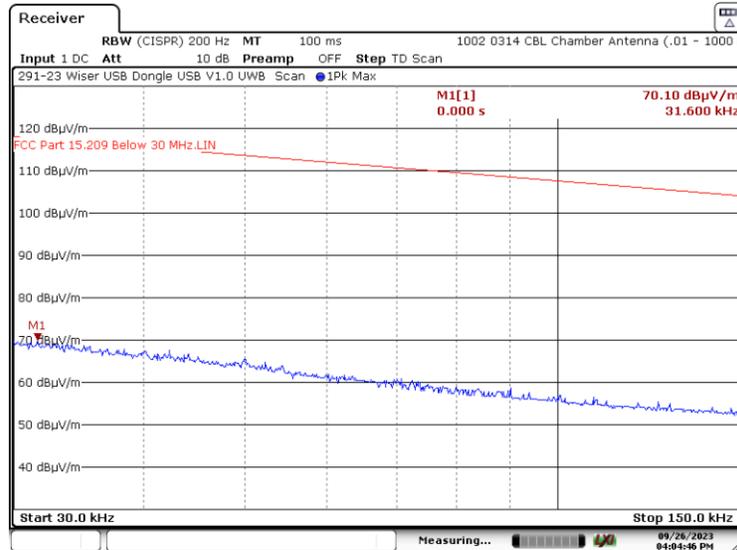

6.4.1.2 Perpendicular Measurement Antenna – 30 to 150 kHz – CH3 Normal

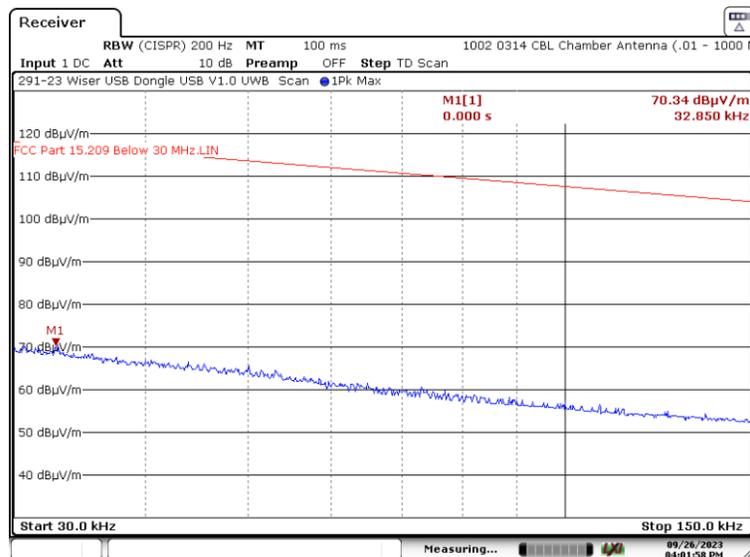


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.3 Ground Parallel Measurement Antenna – 30 to 150 kHz – CH3 Normal

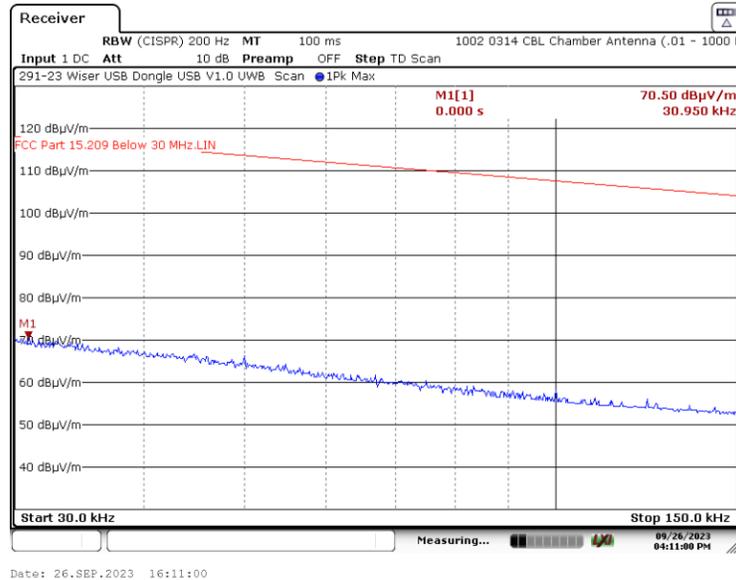

6.4.1.4 Parallel Measurement Antenna – 30 to 150 kHz – CH3 Wide

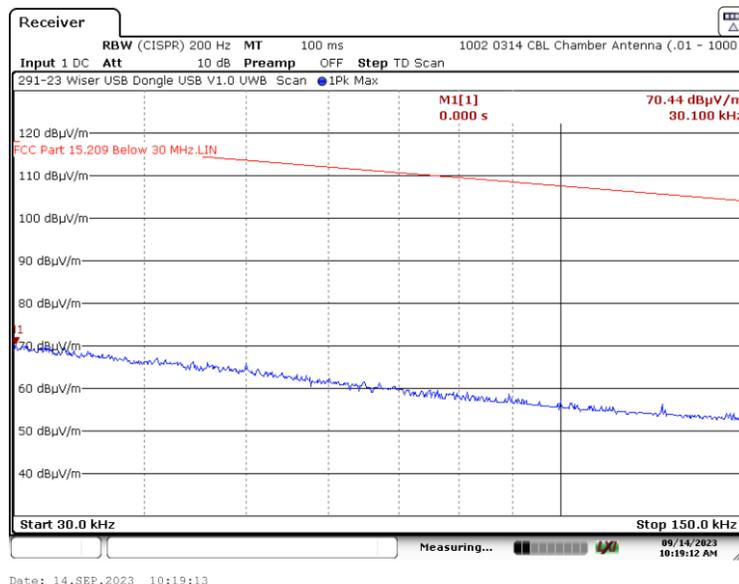


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.5 Perpendicular Measurement Antenna – 30 to 150 kHz – CH3 Wide

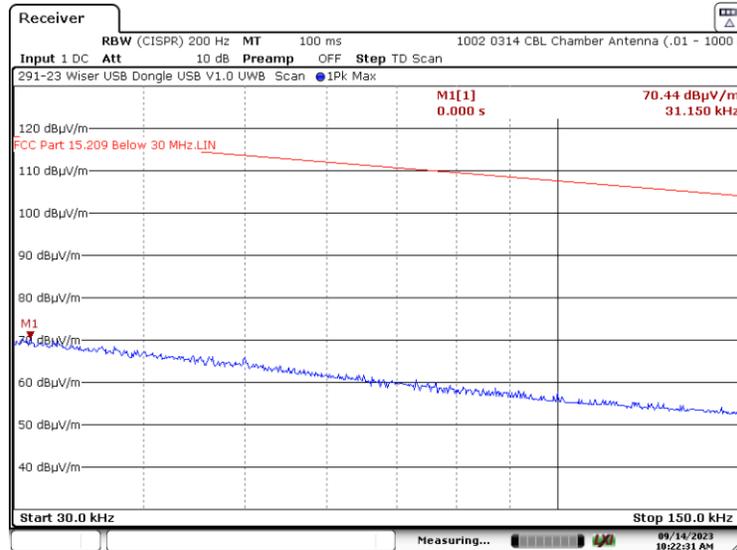

6.4.1.6 Ground Parallel Measurement Antenna – 30 to 150 kHz – CH3 Wide

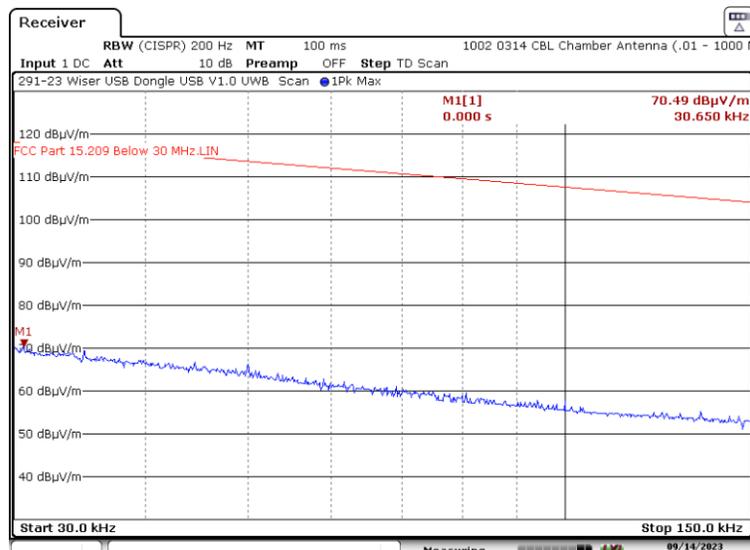


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.7 Parallel Measurement Antenna – 150 kHz to 30 MHz – CH3 Normal

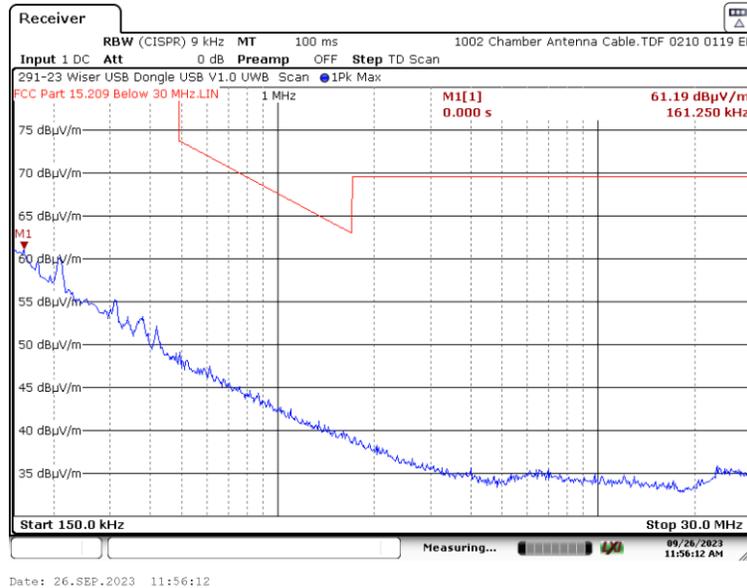

6.4.1.8 Perpendicular Measurement Antenna – 150 kHz to 30 MHz – CH3 Normal




6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.9 Ground Parallel Measurement Antenna – 150 kHz to 30 MHz – CH3 Normal

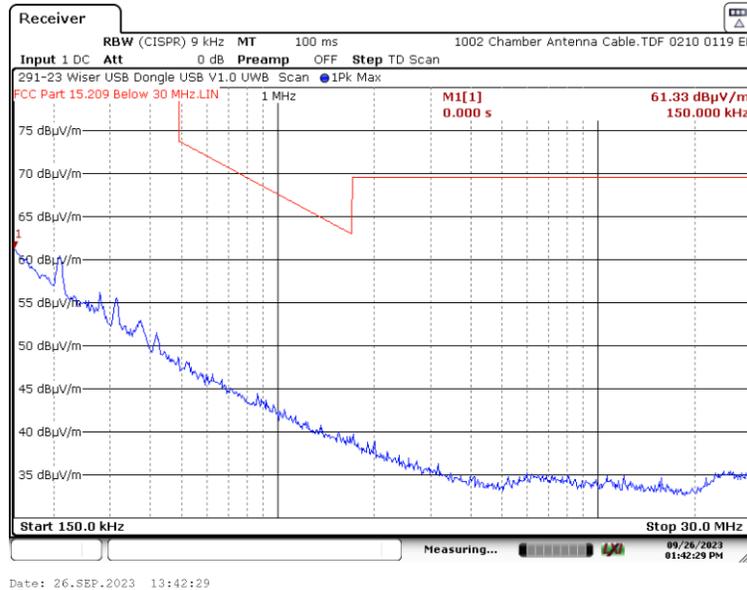

6.4.1.10 Parallel Measurement Antenna – 150 kHz to 30 MHz – CH3 Wide

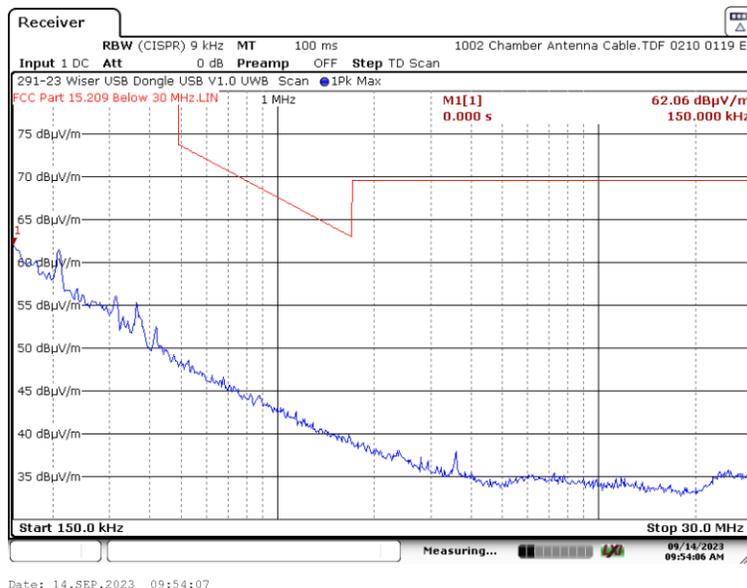


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.11 Perpendicular Measurement Antenna – 150 kHz to 30 MHz – CH3 Wide

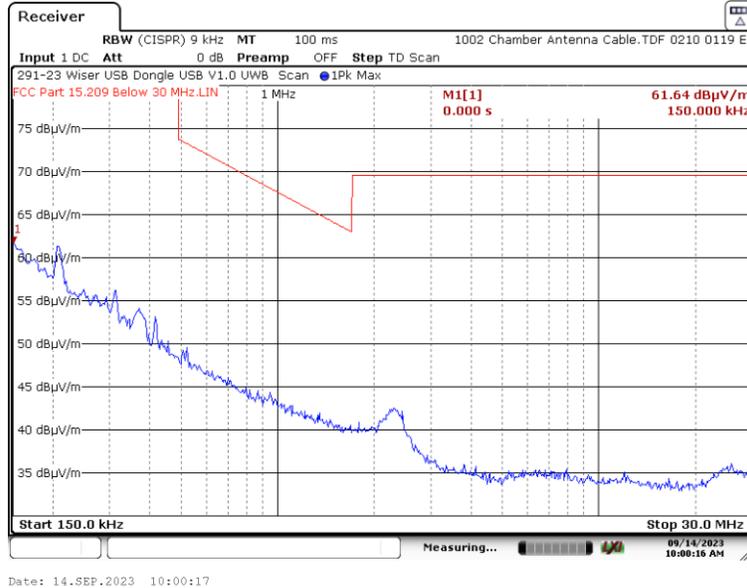

6.4.1.12 Ground Parallel Measurement Antenna – 150 kHz to 30 MHz – CH3 Wide

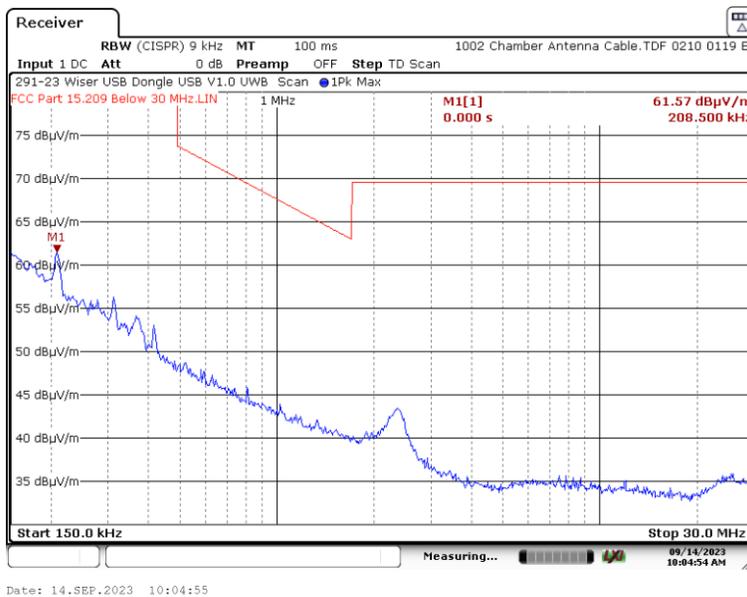


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.13 Horizontal Polarity – 30 to 960 MHz – CH3 Normal

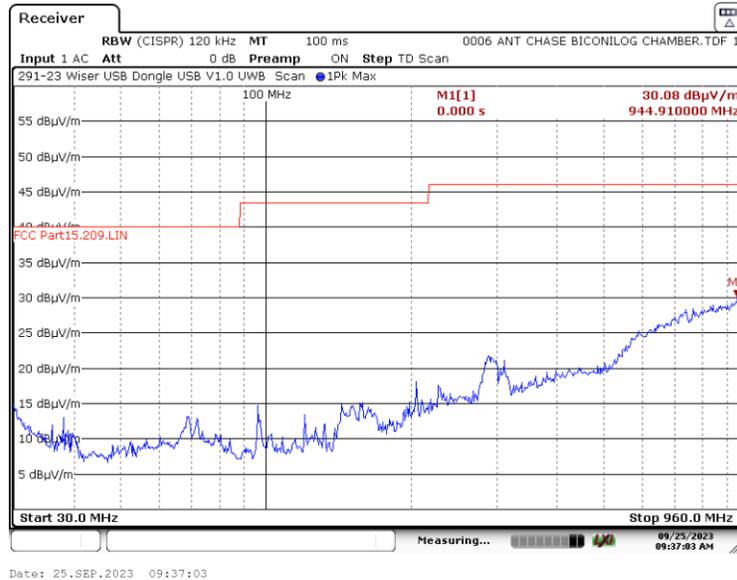

6.4.1.14 Vertical Polarity – 30 to 960 MHz – CH3 Normal

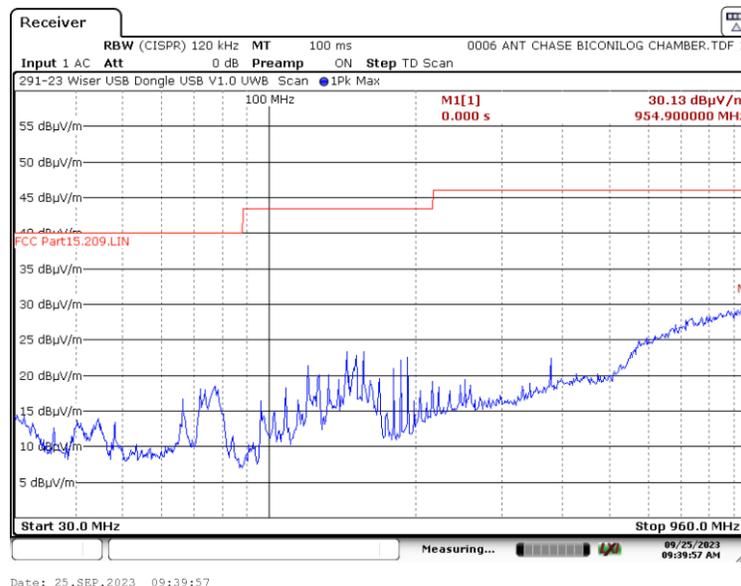


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.209 continued)


6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.15 Horizontal Polarity – 30 to 960 MHz – CH3 Wide

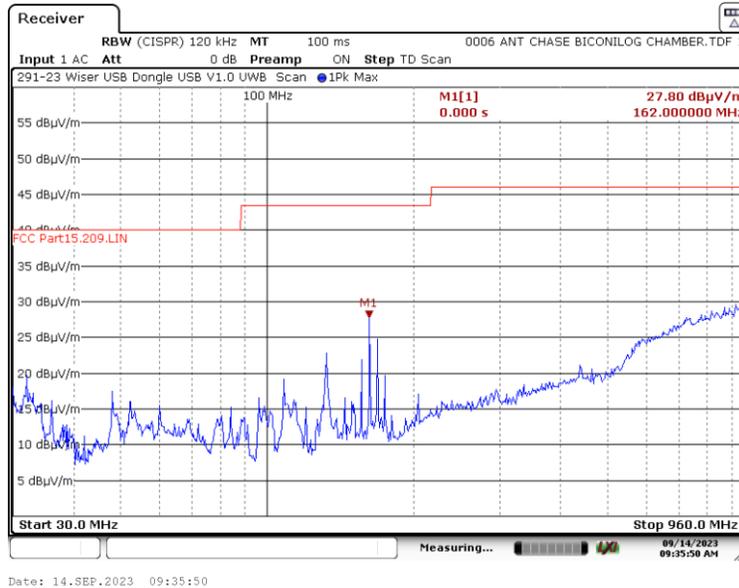

6.4.1.16 Vertical Polarity – 30 to 960 MHz – CH3 Wide

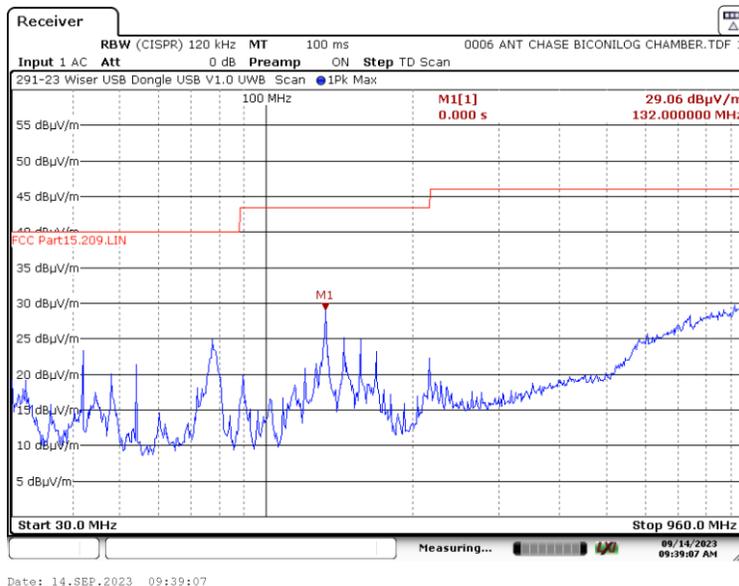

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions above 960 MHz (15.519 (c), 15.521 (d))

Requirement: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz: The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

The EIRP in terms of dBm, can be converted to a field strength, in dBµV/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBµV/m)
960 - 1610	-75.3	19.9
1610 - 1990	-63.3	31.9
1990 - 3100	-61.3	33.9
3100 - 10600	-41.3	53.9
Above 10600	-61.3	33.9

Frequency Range: 960 MHz to 40 GHz
 Measurement Distance: 1 Meter and 0.3 Meter
 EMI Receiver IF Bandwidth: 1 MHz
 EMI Receiver Avg Bandwidth: 10 MHz
 Detector Function: RMS 1 mS Average as defined in 15.521(d)

Notes: Measurements made from 960 MHz to 18 GHz were made in a semi-anechoic chamber at 1 Meter using a -9.54 dB distance offset was programmed into the spectrum analyzer.


Measurements made from 8 to 18 GHz were done with the aid of a High Pass Filter before the low noise amplifier.

Measurements made from 18 to 40 GHz were done at 0.3 meters and a -20.00 dB distance offset was programmed into the spectrum analyzer.


6. Measurement Data (continued)

6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.1. 960 MHz to 8 GHz Horizontal at 1 Meter, CH3 Normal

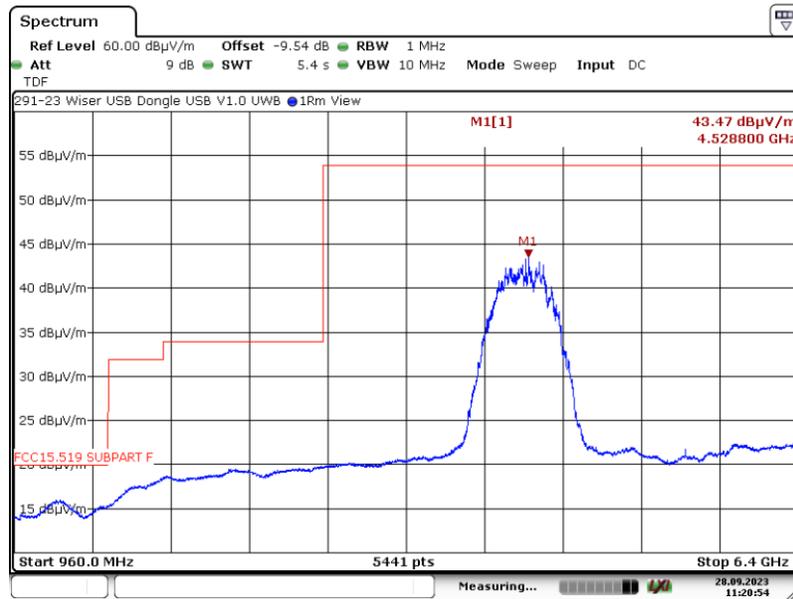

6.5.2. 960 MHz to 8 GHz Vertical at 1 Meter, CH3 Normal

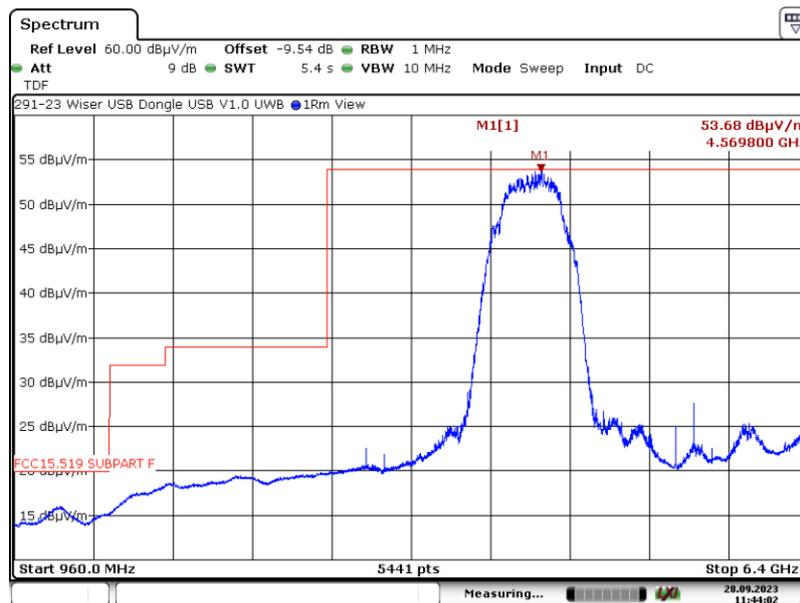

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.3. 960 MHz to 1.99 GHz Horizontal at 1 Meter, CH3 Wide



Date: 28.SEP.2023 12:00:10

6.5.4. 960 MHz to 1.99 GHz Vertical at 1 Meter, CH3 Wide




Date: 28.SEP.2023 12:04:08

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.5. 1.99 GHz to 6.4 GHz Horizontal at 1 Meter, CH3 Wide

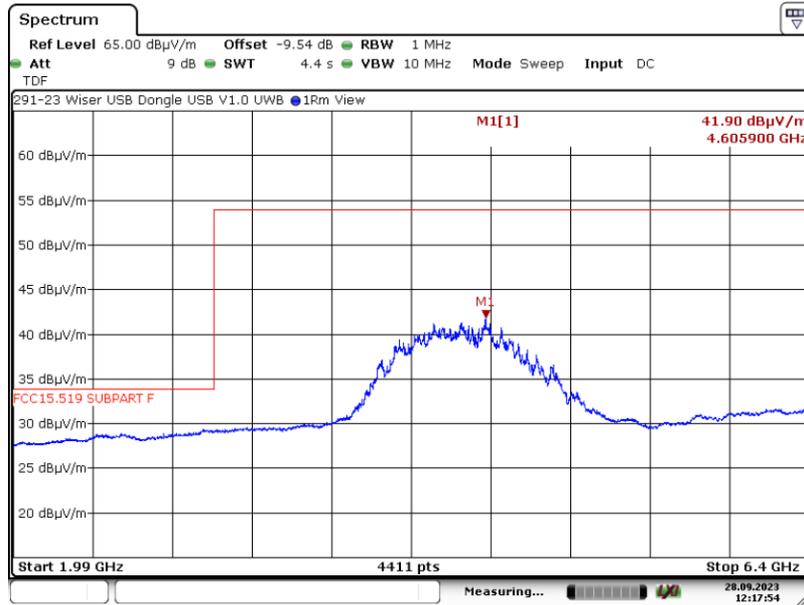

Date: 28.SEP.2023 12:17:54

6.5.6. 1.99 GHz to 6.4 GHz Vertical at 1 Meter, CH3 Wide




Date: 28.SEP.2023 12:12:13

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.7. 6.4 to 18 GHz Horizontal at 1 Meter, CH3 Normal

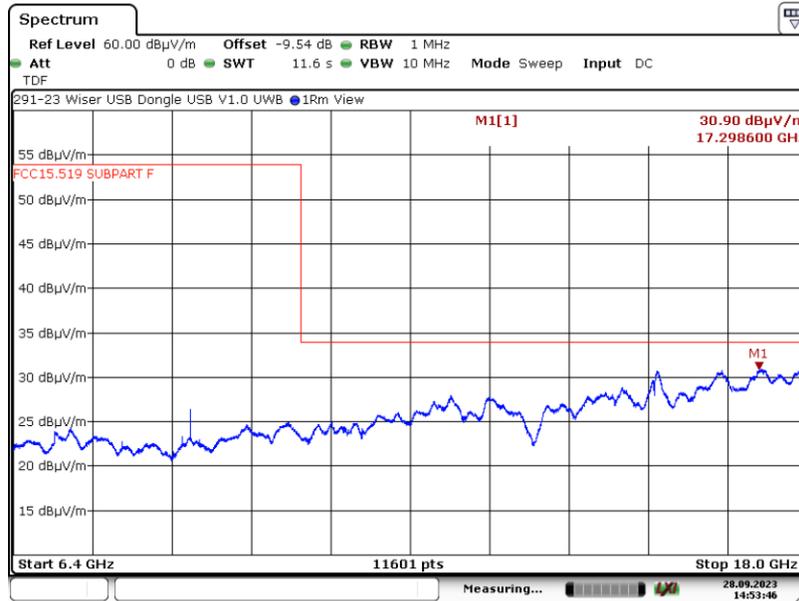

Date: 28.SEP.2023 14:53:45

6.5.8. 6.4 to 18 GHz Vertical at 1 Meter, CH3 Normal



Date: 28.SEP.2023 14:43:11

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.9. 6.4 to 18 GHz Horizontal at 1 Meter, CH3 Wide



Date: 28.SEP.2023 14:56:45

6.5.10. 6.4 to 18 GHz Vertical at 1 Meter, CH3 Wide

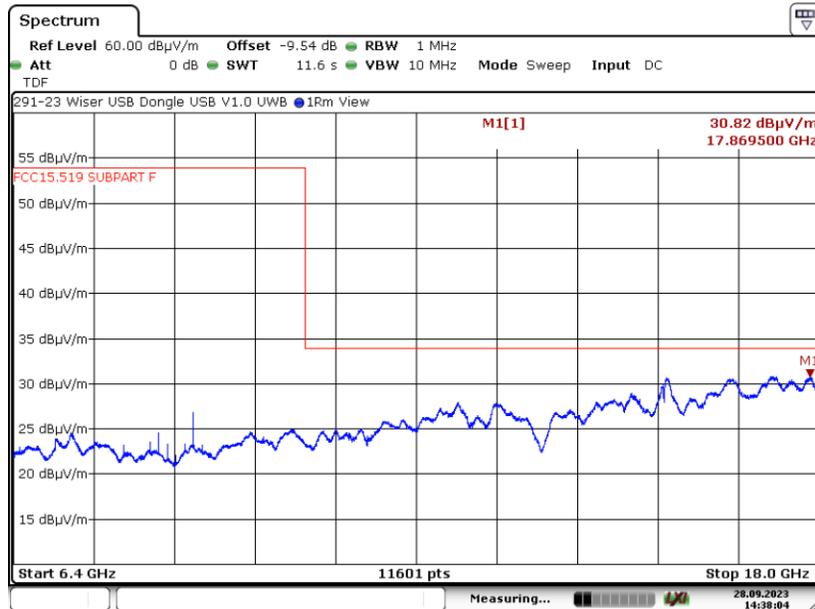


Date: 28.SEP.2023 14:38:04

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.11. 18 to 40 GHz Horizontal at 0.3 Meter, CH3 Normal

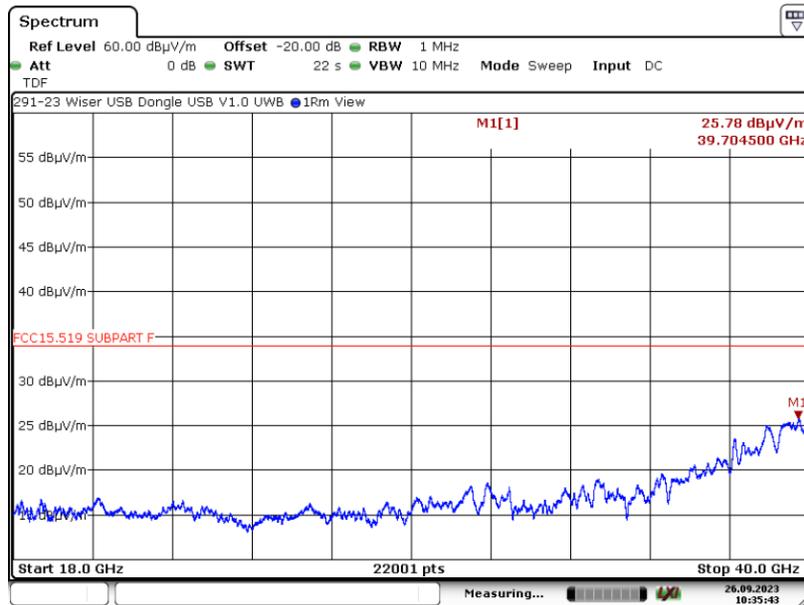

Date: 26.SEP.2023 10:35:42

6.5.12. 18 to 40 GHz Vertical at 0.3 Meter, CH3 Normal

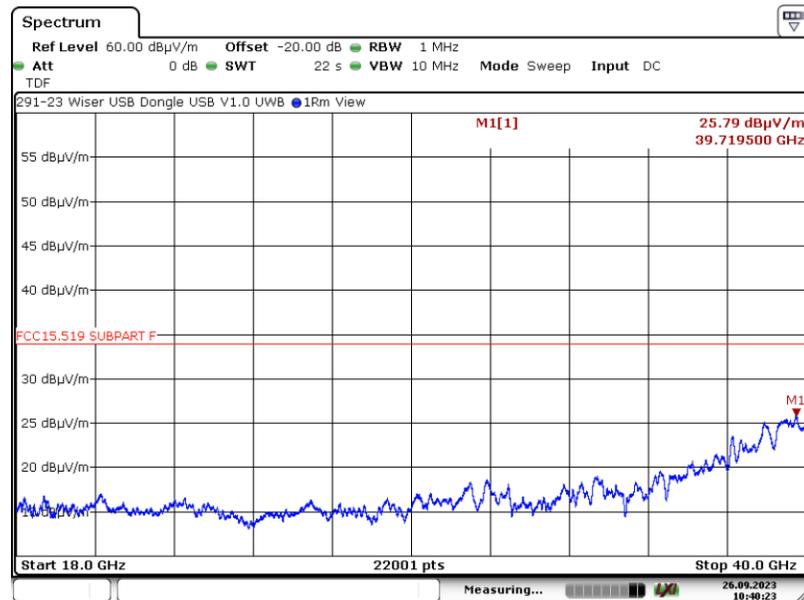


Date: 26.SEP.2023 10:40:23

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions (15.519 (c) continued)

6.5.13. 18 to 40 GHz Horizontal at 0.3 Meter, CH3 Wide

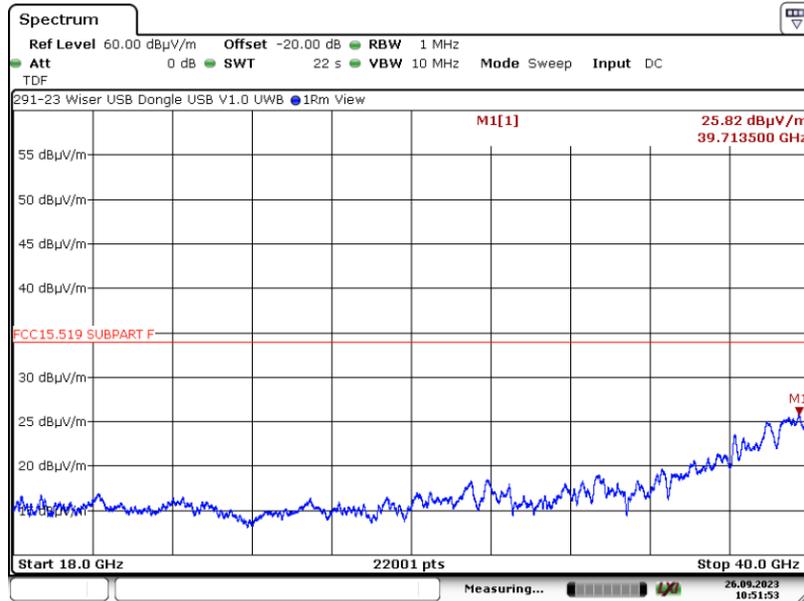

Date: 26.SEP.2023 10:51:53

6.5.14. 18 to 40 GHz Vertical at 0.3 Meter, CH3 Wide



Date: 26.SEP.2023 10:46:51

6. Measurement Data (continued)

6.6. Spurious Radiated Emissions in GPS Bands (15.519 (d))

Requirement: In addition to the radiated emission limits specified in the table in paragraph (d) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
1164 - 1240	-85.3	9.9
1559 - 1610	-85.3	9.9

6.6.1. Measurement & Equipment Setup

EMI Receiver IF Bandwidth:	1 kHz
EMI Receiver Avg Bandwidth:	10 kHz
Detector Functions:	RMS Average


6.6.2. 1164 to 1240 MHz & 1559 to 1610 MHz

There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section. Measurements were made at 1.0 Meter with a -9.54 dB distance correction factor. The -85.3 dBm limit was converted to a field strength limit of 9.9 dB μ V/m using a factor of 95.2.

6. Measurement Data (continued)


6.6. Spurious Radiated Emissions in GPS Bands (15.519 (d) continued)

6.6.3.1 Horizontal Measurement Polarity 1164 to 1240 MHz, CH3 Normal

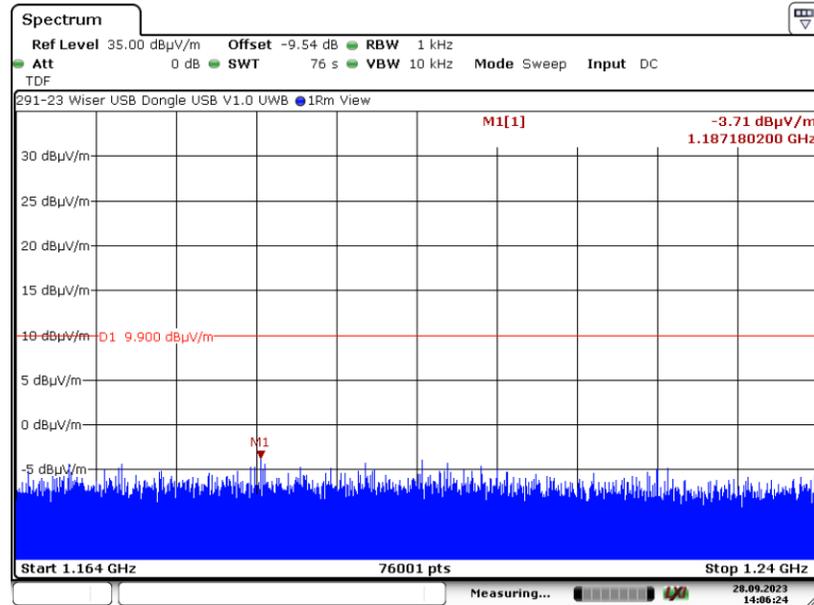

Date: 28.SEP.2023 14:06:24

6.6.3.2 Vertical Measurement Polarity 1164 to 1240 MHz, CH3 Normal

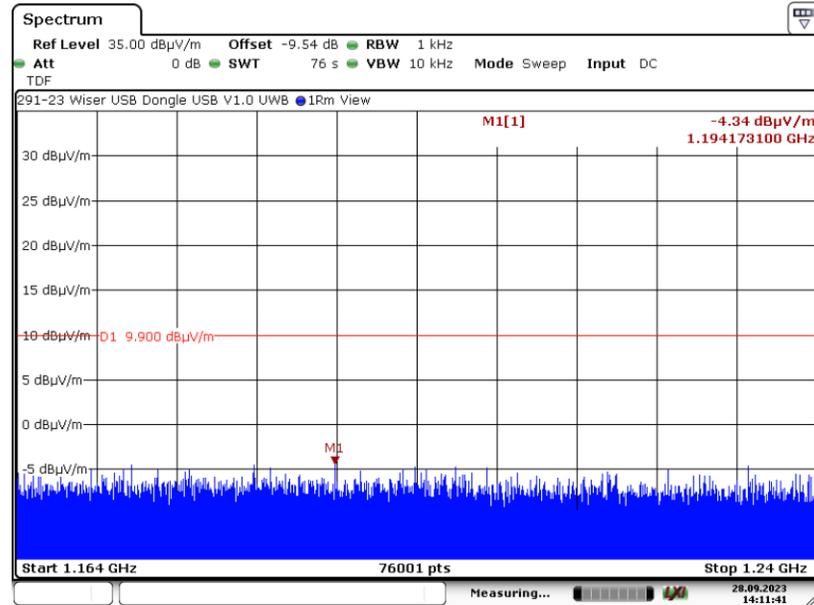


Date: 28.SEP.2023 14:11:40

6. Measurement Data (continued)


6.6. Spurious Radiated Emissions in GPS Bands (15.519 (d) continued)

6.6.3.3 Horizontal Measurement Polarity 1164 to 1240 MHz, CH3 Wide

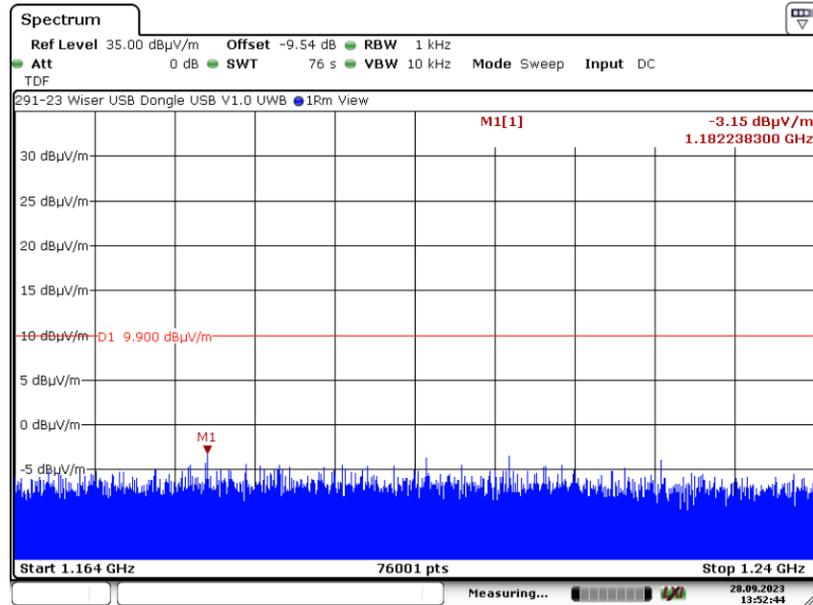

Date: 28.SEP.2023 13:52:45

6.6.3.4 Vertical Measurement Polarity 1164 to 1240 MHz, CH3 Wide

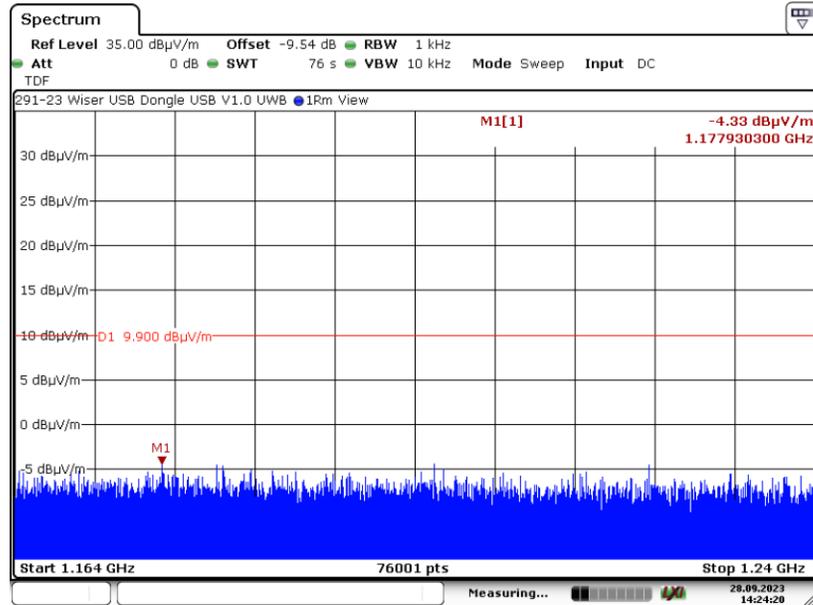


Date: 28.SEP.2023 14:24:20

6. Measurement Data (continued)


6.6. Spurious Radiated Emissions in GPS Bands (15.519 (d) continued)

6.6.3.5 Horizontal Measurement Polarity 1559 to 1610 MHz, CH3 Normal

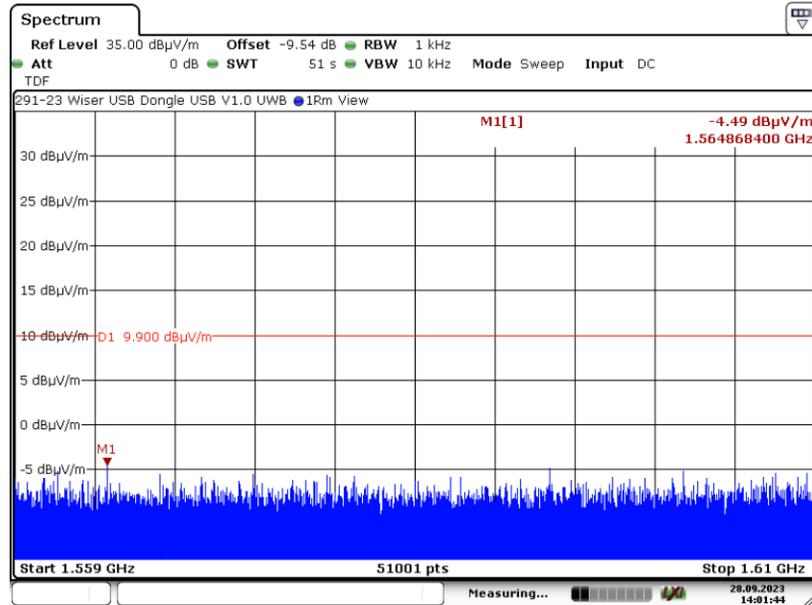

Date: 28.SEP.2023 14:01:44

6.6.3.6 Vertical Measurement Polarity 1559 to 1610 MHz, CH3 Normal

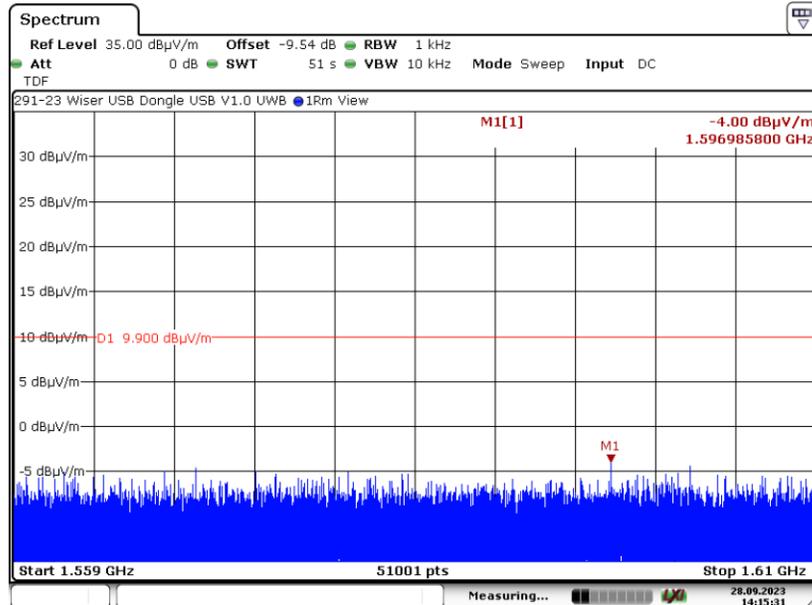


Date: 28.SEP.2023 14:15:30

6. Measurement Data (continued)


6.6. Spurious Radiated Emissions in GPS Bands (15.519 (d) continued)

6.6.3.7 Horizontal Measurement Polarity 1559 to 1610 MHz, CH3 Wide

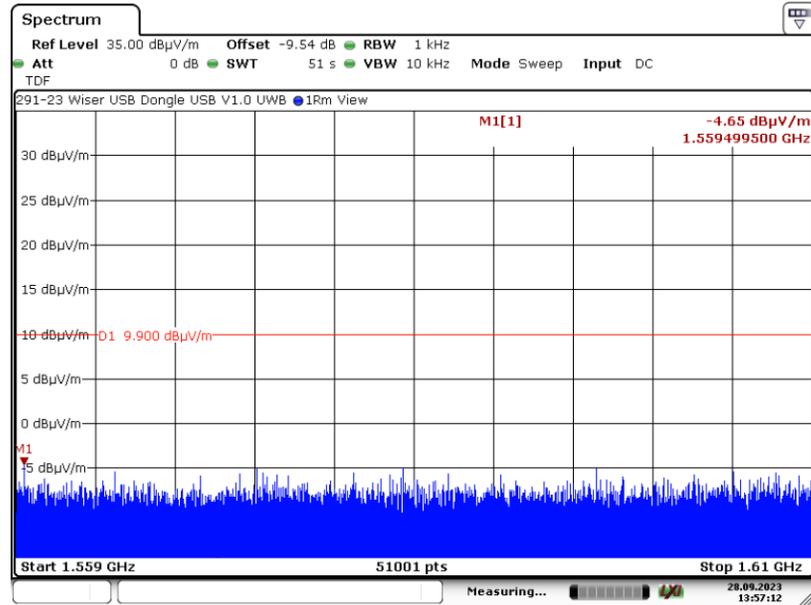

Date: 28.SEP.2023 13:57:12

6.6.3.8 Vertical Measurement Polarity 1559 to 1610 MHz, CH3 Wide

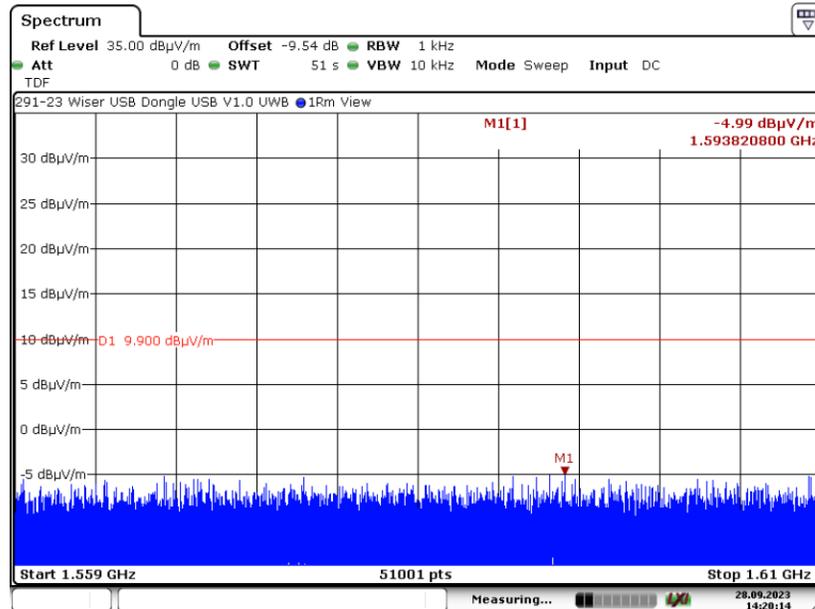

Date: 28.SEP.2023 14:20:14

6. Measurement Data (continued)

6.7. Radiated Emissions of UWB Transmission (15.519 (c), 15.521 (d))

Requirement: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
3100 - 10600	-41.3	53.9

Frequency Range: 4 to 5 GHz, 3.5 to 5.5 GHz
 Measurement Distance: 3 Meters
 EMI Receiver IF Bandwidth: 1 MHz
 EMI Receiver Avg Bandwidth: 10 MHz
 Detector Function: RMS 1 mS Average as defined in 15.521(d)

6. Measurement Data (continued)

6.7. Radiated Emissions of UWB Transmission (15.519 (c), 15.521 (d) continued)

6.7.1. Plot of RMS Power at 3 Meters (CH3 Normal)

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
4.496	52.48	53.90	-1.42	V	127	67	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$
 $EIRP (dBm) = E_{meas} (dB\mu V/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
4.496	-42.72	-41.30	-1.42	V	127	67	Compliant

291-23 Wiser USB Dongle USB V1.0 UWB



09:37:52 22.09.2023

6. Measurement Data (continued)

6.7. Radiated Emissions of UWB Transmission (15.519 (c), 15.521 (d) continued)

6.7.2. Plot of RMS Power at 3 Meters (Channel 3 Wide)

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
4.496	52.56	53.90	-1.32	V	127	101	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$

$EIRP (dBm) = E_{meas} (dB\mu V/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
4.496	-42.63	-41.30	-1.32	V	127	101	Compliant

291-23 Wiser USB Dongle USB V1.0 UWB

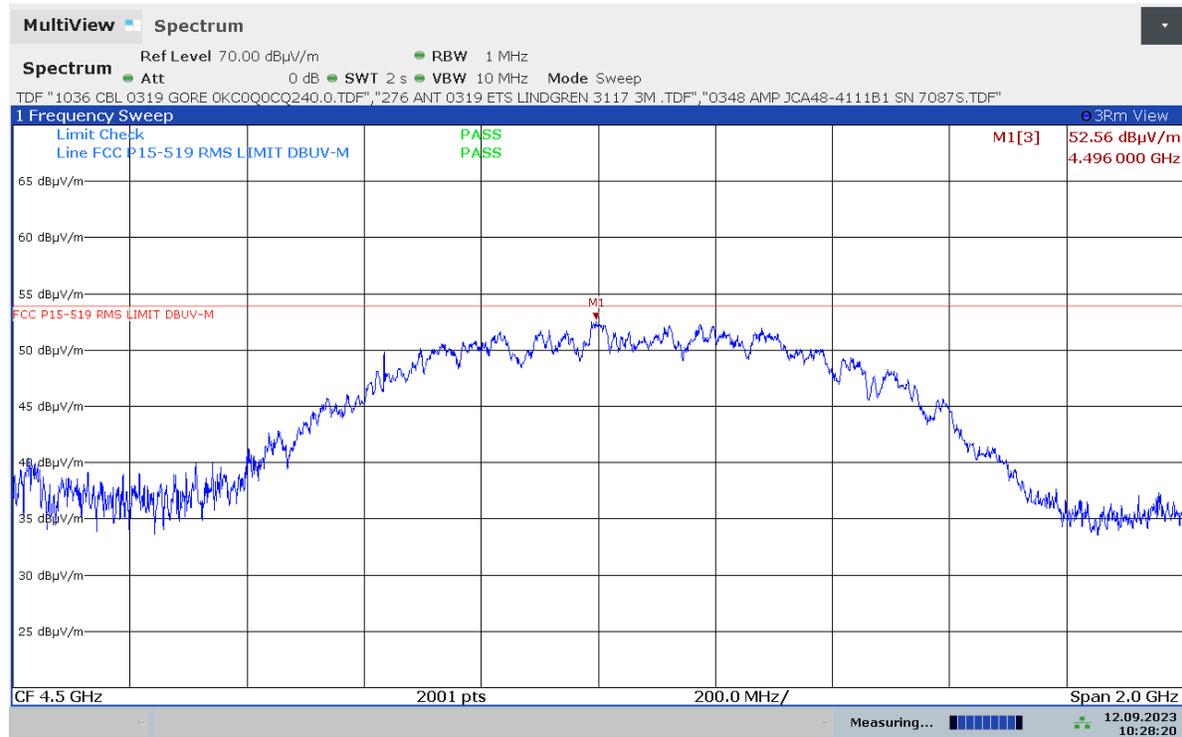

10:28:21 12.09.2023

6. Measurement Data (continued)

6.8. Peak Emissions in a 50 MHz Bandwidth (15.519 (e), 15.521 (g))

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2. As used in this subpart, EIRP refers to the highest signal strength measured in any direction and at any frequency from the UWB device.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
3100 - 10600	0	95.2

Frequency Range: 4 to 5 GHz, 3.5 to 5.5 GHz
 Measurement Distance: 3 Meters
 EMI Receiver IF Bandwidth: 50 MHz
 EMI Receiver Avg Bandwidth: 80 MHz
 Detector Function: Peak, Max Held

6. Measurement Data (continued)

6.8. Peak Emissions in a 50 MHz Bandwidth (15.519 (e), 15.521 (g) continued)

6.8.1 Plot of Peak Power at 3 Meters (Channel 3 Normal)

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
4.497	95.13	95.20	-0.07	V	127	67	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$

$EIRP (dBm) = E_{meas} (dBμV/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
4.497	-0.07	0.00	-0.07	V	127	67	Compliant

291-23 Wiser USB Dongle USB V1.0 UWB

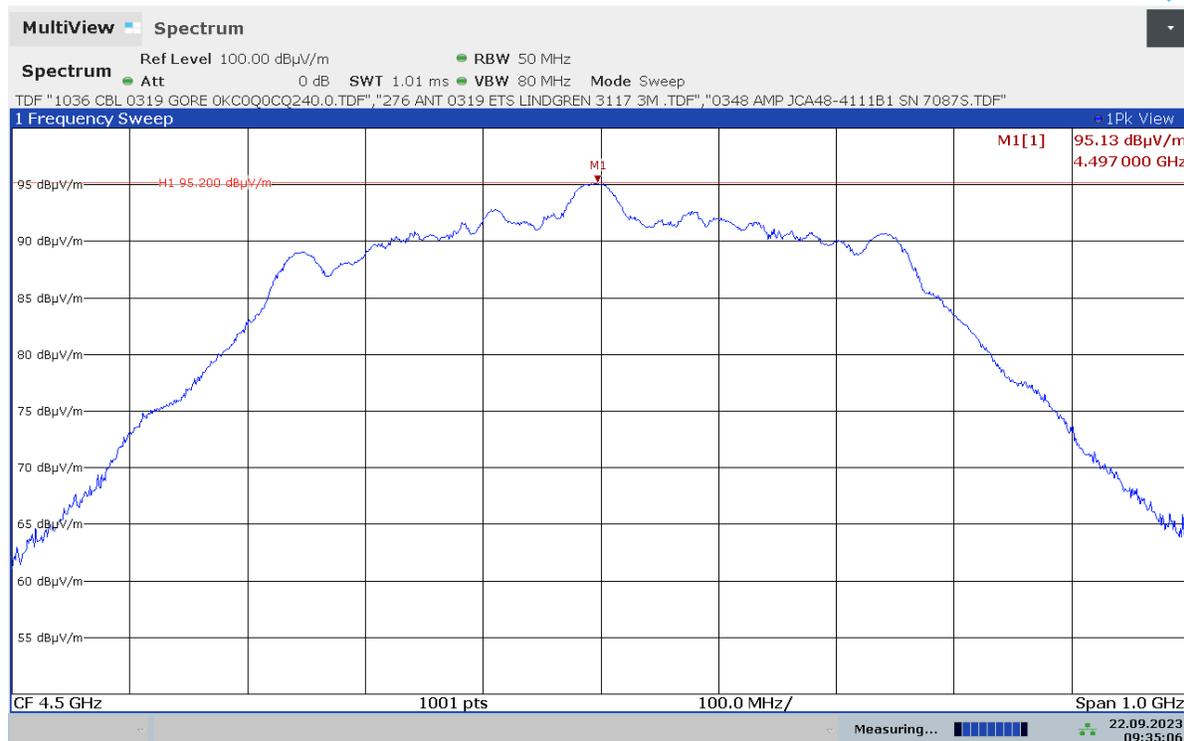

09:35:07 22.09.2023

6. Measurement Data (continued)

6.8. Peak Emissions in a 50 MHz Bandwidth (15.519 (e), 15.521 (g) continued)

6.8.2 Plot of Peak Power at 3 Meters (Channel 3 Wide)

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
4.498	94.91	95.20	-0.29	V	127	101	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$

$EIRP (dBm) = E_{meas} (dBμV/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
4.498	-0.29	0.00	-0.29	V	127	101	Compliant

291-23 Wiser USB Dongle USB V1.0 UWB

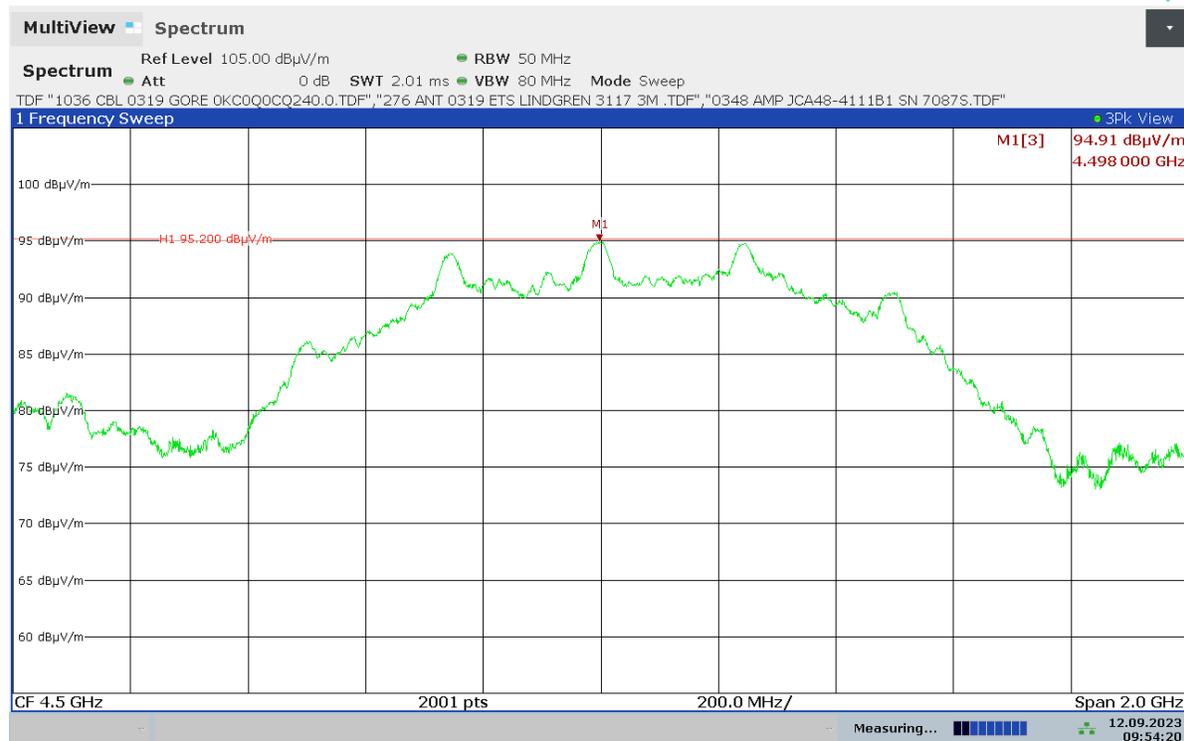

09:54:21 12.09.2023

6. Measurement Data (continued)

6.9 Conducted Emissions Test Setup

6.9.1. Regulatory Limit: FCC Part 15, Class B, IC RSS-GEN

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

6.9.2 Measurement Equipment and Software Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due
EMI Receiver	Rohde & Schwarz	ESR7	101156	10/25/2024
LISN	EMCO	3825/2	9109-1860	1/4/2024
Manufacturer	Software Description		Title/Model #	Rev.
Compliance Worldwide	Test Report Generation Software		Test Report Generator	1.0

6.9.3. Measurement & Equipment Setup

Test Date: 9/27/2023
 Test Engineer: Sean Defelice
 Site Temperature (°C): 21
 Relative Humidity (%RH): 35
 Frequency Range: 0.15 MHz to 30 MHz
 EMI Receiver IF Bandwidth: 9 kHz
 EMI Receiver Avg Bandwidth: ≥ 3 * RBW or IF(BW)
 Detector Functions: Peak, Quasi-Peak. & Average

6.9.4. Test Procedure

Test measurements were made in accordance with ANSI C63.4-2014, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.


6. Measurement Data (continued)

6.10 Conducted Emissions Test Results

6.10.1. 120 Volts, 60 Hz Phase

Test No.: 291-23, 120 Volts, 60 Hz Phase

FCC, Class B

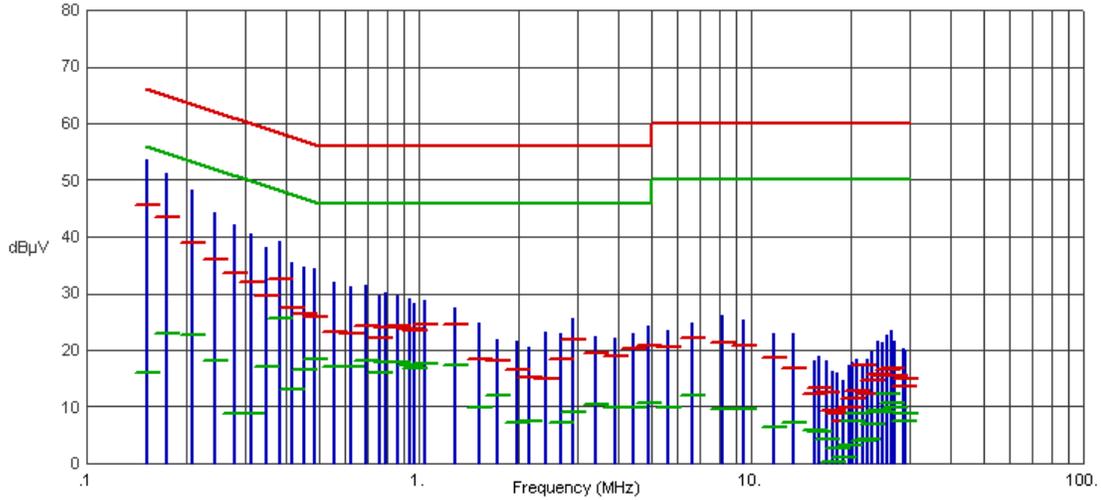

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1523	53.51	45.49	65.87	-20.38	15.92	55.87	-39.95	
.1748	51.33	43.35	64.73	-21.38	22.93	54.73	-31.80	
.2085	48.28	38.91	63.26	-24.35	22.76	53.26	-30.50	
.2423	44.30	35.92	62.02	-26.10	18.24	52.02	-33.78	
.2783	42.12	33.69	60.87	-27.18	8.89	50.87	-41.98	
.3120	40.45	32.04	59.92	-27.88	8.84	49.92	-41.08	
.3458	38.23	29.73	59.06	-29.33	17.01	49.06	-32.05	
.3818	39.08	32.41	58.24	-25.83	25.60	48.24	-22.64	
.4155	35.36	27.43	57.54	-30.11	13.09	47.54	-34.45	
.4515	34.66	26.30	56.85	-30.55	16.49	46.85	-30.36	
.4853	34.42	25.74	56.25	-30.51	18.35	46.25	-27.90	
.5550	32.10	23.27	56.00	-32.73	17.03	46.00	-28.97	
.6248	31.24	22.98	56.00	-33.02	17.16	46.00	-28.84	
.6945	31.56	24.20	56.00	-31.80	18.21	46.00	-27.79	
.7620	29.60	22.07	56.00	-33.93	16.01	46.00	-29.99	
.7980	30.14	24.07	56.00	-31.93	17.83	46.00	-28.17	
.8678	29.58	24.26	56.00	-31.74	17.98	46.00	-28.02	
.9353	29.16	23.85	56.00	-32.15	17.46	46.00	-28.54	
.9713	28.37	23.44	56.00	-32.56	16.87	46.00	-29.13	
1.0410	28.82	24.53	56.00	-31.47	17.57	46.00	-28.43	
1.2840	27.35	24.62	56.00	-31.38	17.45	46.00	-28.55	
1.5135	24.89	18.52	56.00	-37.48	9.74	46.00	-36.26	
1.7318	21.92	18.14	56.00	-37.86	12.11	46.00	-33.89	
1.9703	21.50	16.47	56.00	-39.53	7.18	46.00	-38.82	
2.1458	20.64	15.26	56.00	-40.74	7.35	46.00	-38.65	
2.4113	23.26	15.02	56.00	-40.98	-.97	46.00	-46.97	
2.6723	23.06	18.46	56.00	-37.54	7.17	46.00	-38.83	
2.9153	25.51	22.00	56.00	-34.00	8.94	46.00	-37.06	

6. Measurement Data (continued)

6.10 Conducted Emissions Test Results

6.10.1. 120 Volts, 60 Hz Phase (continued)

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
3.3968	22.50	19.43	56.00	-36.57	10.39	46.00	-35.61	
3.8828	22.08	18.91	56.00	-37.09	9.81	46.00	-36.19	
4.4048	22.86	20.34	56.00	-35.66	9.87	46.00	-36.13	
4.8885	24.37	20.82	56.00	-35.18	10.64	46.00	-35.36	
5.6130	23.41	20.45	60.00	-39.55	9.99	50.00	-40.01	
6.6143	24.80	22.16	60.00	-37.84	11.99	50.00	-38.01	
8.1668	26.00	21.38	60.00	-38.62	9.54	50.00	-40.46	
9.4605	25.42	20.84	60.00	-39.16	9.47	50.00	-40.53	
11.6790	22.94	18.57	60.00	-41.43	6.43	50.00	-43.57	
13.3575	22.89	16.81	60.00	-43.19	7.28	50.00	-42.72	
15.4748	18.06	12.30	60.00	-47.70	5.75	50.00	-44.25	
15.9990	19.03	13.22	60.00	-46.78	5.56	50.00	-44.44	
16.8383	18.02	12.50	60.00	-47.50	4.37	50.00	-45.63	
17.6798	16.23	9.32	60.00	-50.68	.23	50.00	-49.77	
18.2423	16.03	8.69	60.00	-51.31	2.73	50.00	-47.27	
18.9173	14.66	7.34	60.00	-52.66	1.13	50.00	-48.87	
19.7115	17.31	9.96	60.00	-50.04	3.31	50.00	-46.69	
20.2583	17.88	11.39	60.00	-48.61	7.52	50.00	-42.48	
20.8073	18.51	12.85	60.00	-47.15	8.69	50.00	-41.31	
21.6600	17.70	17.21	60.00	-42.79	3.93	50.00	-46.07	
22.4588	18.29	12.24	60.00	-47.76	4.26	50.00	-45.74	
23.1270	19.72	14.65	60.00	-45.35	7.02	50.00	-42.98	
24.0000	21.57	15.76	60.00	-44.24	9.37	50.00	-40.63	
24.9608	21.41	15.36	60.00	-44.64	8.98	50.00	-41.02	
25.6943	22.55	16.53	60.00	-43.47	12.38	50.00	-37.62	
26.4863	23.52	16.87	60.00	-43.13	10.75	50.00	-39.25	
27.1590	21.51	15.44	60.00	-44.56	9.78	50.00	-40.22	
28.6845	20.33	13.72	60.00	-46.28	7.60	50.00	-42.40	
29.2335	20.03	14.97	60.00	-45.03	8.79	50.00	-41.21	


6. Measurement Data (continued)

6.10 Conducted Emissions Test Results (continued)

6.10.2. 120 Volts, 60 Hz Neutral

Test No.: 291-23, 120 Volts, 60 Hz Neutral

FCC, Class B

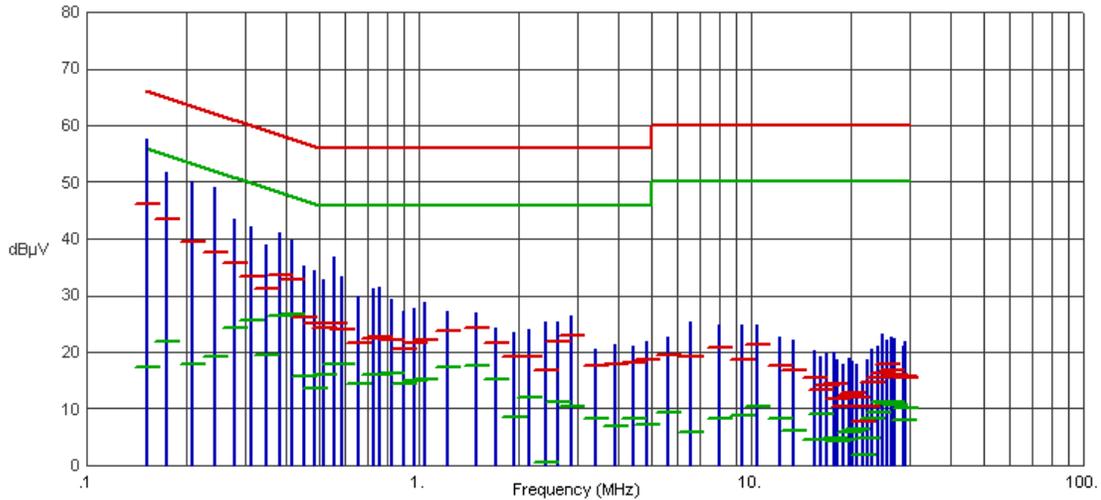

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1523	57.64	46.04	65.87	-19.83	17.36	55.87	-38.51	
.1748	51.77	43.57	64.73	-21.16	21.78	54.73	-32.95	
.2085	50.24	39.56	63.26	-23.70	17.79	53.26	-35.47	
.2423	48.96	37.68	62.02	-24.34	19.22	52.02	-32.80	
.2783	43.51	35.71	60.87	-25.16	24.20	50.87	-26.67	
.3120	42.11	33.30	59.92	-26.62	25.48	49.92	-24.44	
.3458	38.82	31.22	59.06	-27.84	19.34	49.06	-29.72	
.3818	41.12	33.64	58.24	-24.60	26.50	48.24	-21.74	
.4155	39.66	32.87	57.54	-24.67	26.72	47.54	-20.82	
.4493	35.14	26.10	56.89	-30.79	15.84	46.89	-31.05	
.4853	34.49	25.03	56.25	-31.22	13.65	46.25	-32.60	
.5190	32.83	24.21	56.00	-31.79	16.00	46.00	-30.00	
.5550	36.78	25.08	56.00	-30.92	17.96	46.00	-28.04	
.5888	33.34	24.12	56.00	-31.88	17.74	46.00	-28.26	
.6585	29.92	21.54	56.00	-34.46	14.33	46.00	-31.67	
.7283	31.07	22.48	56.00	-33.52	16.07	46.00	-29.93	
.7620	31.55	22.54	56.00	-33.46	16.05	46.00	-29.95	
.8318	29.27	22.18	56.00	-33.82	16.33	46.00	-29.67	
.8993	27.18	20.61	56.00	-35.39	14.43	46.00	-31.57	
.9713	27.74	21.73	56.00	-34.27	14.93	46.00	-31.07	
1.0410	28.86	22.18	56.00	-33.82	15.25	46.00	-30.75	
1.2143	27.27	23.86	56.00	-32.14	17.23	46.00	-28.77	
1.4910	26.83	24.17	56.00	-31.83	17.47	46.00	-28.53	
1.6980	24.15	21.54	56.00	-34.46	15.30	46.00	-30.70	
1.9343	23.37	19.09	56.00	-36.91	8.44	46.00	-37.56	
2.1458	24.13	19.32	56.00	-36.68	11.94	46.00	-34.06	
2.4113	25.25	16.69	56.00	-39.31	.44	46.00	-45.56	
2.6318	25.44	21.81	56.00	-34.19	11.17	46.00	-34.83	

6. Measurement Data (continued)

6.10 Conducted Emissions Test Results (continued)

6.10.2. 120 Volts, 60 Hz Neutral (continued)

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
2.8725	26.36	23.05	56.00	-32.95	10.40	46.00	-35.60	
3.3968	20.54	17.63	56.00	-38.37	8.15	46.00	-37.85	
3.9188	21.36	17.84	56.00	-38.16	7.05	46.00	-38.95	
4.4025	21.14	18.13	56.00	-37.87	8.31	46.00	-37.69	
4.8773	21.77	18.71	56.00	-37.29	7.13	46.00	-38.87	
5.6085	22.57	19.52	60.00	-40.48	9.27	50.00	-40.73	
6.6030	25.32	19.15	60.00	-40.85	5.77	50.00	-44.23	
8.0183	24.85	20.81	60.00	-39.19	8.19	50.00	-41.81	
9.3503	24.79	18.66	60.00	-41.34	8.67	50.00	-41.33	
10.4258	24.68	21.22	60.00	-38.78	10.38	50.00	-39.62	
12.1943	22.70	17.61	60.00	-42.39	8.22	50.00	-41.78	
13.3575	22.09	16.87	60.00	-43.13	6.26	50.00	-43.74	
15.5603	20.29	15.46	60.00	-44.54	4.48	50.00	-45.52	
16.2263	19.17	13.25	60.00	-46.75	9.09	50.00	-40.91	
16.9013	19.79	14.14	60.00	-45.86	4.44	50.00	-45.56	
17.6955	20.04	14.49	60.00	-45.51	4.83	50.00	-45.17	
18.2445	18.80	11.63	60.00	-48.37	4.21	50.00	-45.79	
18.9150	17.87	10.48	60.00	-49.52	4.56	50.00	-45.44	
19.7093	18.89	12.29	60.00	-47.71	5.75	50.00	-44.25	
20.2583	18.40	12.89	60.00	-47.11	6.04	50.00	-43.96	
20.8073	17.77	11.94	60.00	-48.06	6.47	50.00	-43.53	
21.6623	14.93	7.84	60.00	-52.16	1.84	50.00	-48.16	
22.4543	18.67	10.36	60.00	-49.64	4.76	50.00	-45.24	
23.1270	20.48	14.59	60.00	-45.41	8.35	50.00	-41.65	
24.0000	21.06	15.43	60.00	-44.57	9.28	50.00	-40.72	
24.8978	23.20	16.38	60.00	-43.62	11.25	50.00	-38.75	
25.6920	22.10	17.74	60.00	-42.26	10.94	50.00	-39.06	
26.4885	22.72	16.70	60.00	-43.30	11.25	50.00	-38.75	
27.1590	22.49	16.08	60.00	-43.92	10.66	50.00	-39.34	
28.6845	20.99	15.66	60.00	-44.34	8.04	50.00	-41.96	
29.2335	21.76	15.38	60.00	-44.62	10.11	50.00	-39.89	

7. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0274.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 32, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

The radiated emissions test site for measurements above 1GHz is a 3 Meter open area test site (OATS) with a 3.6 by 3.6 meter anechoic absorber floor patch to achieve a quasi-free space measurement environment per ANSI C63.4/C63.10 and CISPR 16-1-4 standards.

The sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

8. Test Images

8.1. Spurious and Harmonic Emissions – 30 kHz to 1 GHz Front



8. Test Images

8.2. Spurious and Harmonic Emissions – 30 kHz to 30 MHz Rear



8. Test Images

8.3. Spurious and Harmonic Emissions – 30 MHz to 1 GHz Rear



8. Test Images

8.4. Spurious and Harmonic Emissions – 1 to 18 GHz Front



8. Test Images

8.5. Spurious and Harmonic Emissions – 1 to 18 GHz Rear



8. Test Images

8.6. Spurious and Harmonic Emissions – 18 to 40 GHz Side View

