



深圳市安特通讯科技有限公司

Shenzhen ANT Communication Technology Co., LTD.

Product specification sheet

customer	虎一	project	WT08
Customer part number		Part number	ANT652401IB58-01
version	V1.0	describe	WIFI/BT antenna
RF		ME	LIZHIEN
technical manager		date	2024/2/22

customer confirmation	
Does the assembly meet your company's requirements: ☐ OK ☐ NG	

2.Product specifications and technical parameters:


Electrical performance parameters	
Frequency range	2400–2500MHZ
Impedance	50 Ω
standing-wave ratio	≤ 2.5
Maximum gain	2.8dBi
efficiency	$>25\%$
Polarization mode	perpendicular
Radiation direction	Omnidirectional
mechanical parameters	
Antenna size	20.7*15.05MM
Coaxial line type	$\phi 1.13$
Joint type	Second generation terminals
Salt spray test	24H
Environmental parameters	
operation temperature	$-45^{\circ}\text{C}-- +85^{\circ}\text{C}$

3. Test equipment


3.1. Agilent E5071C

3.2. CMW500 Agilent 8960


3.3. SATIMO-16 XH-24

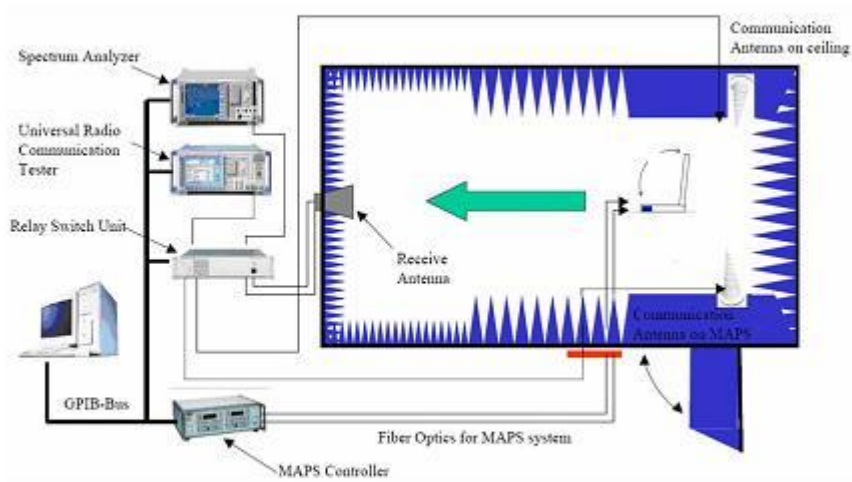

(Testing by 3D anechoic chamber)




Phi axis test

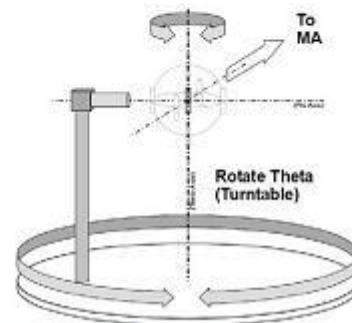

Theta axis test

4. Antenna testing parameters


S11

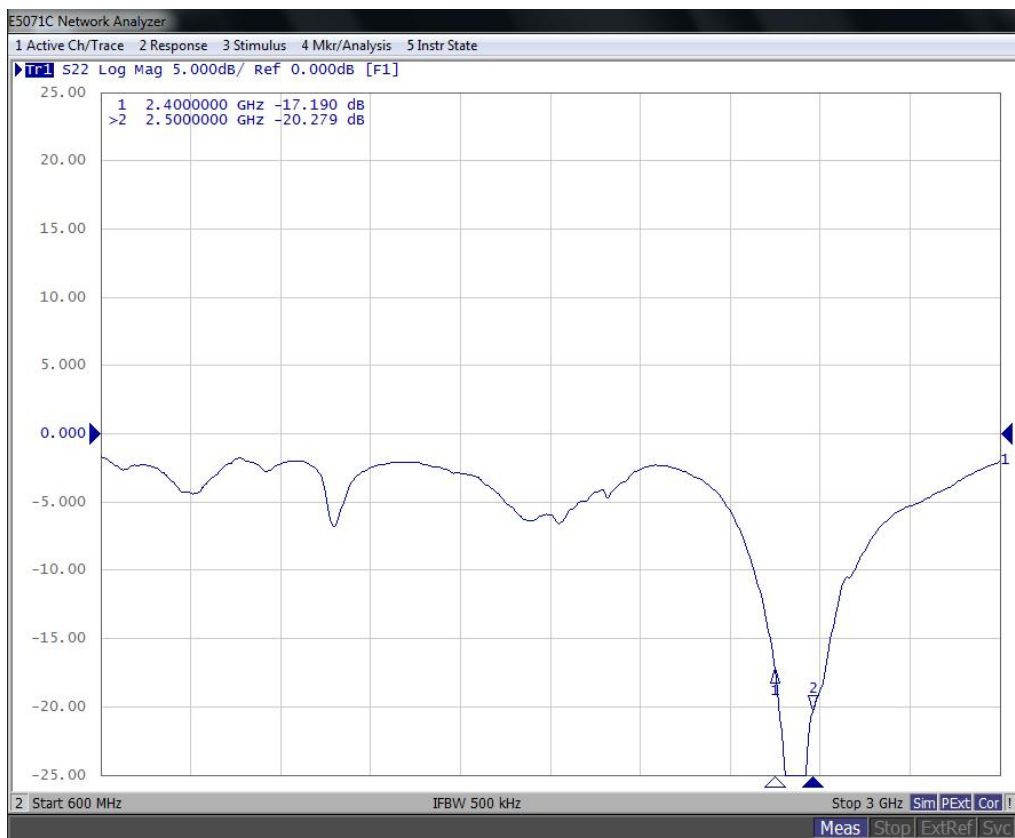


Passive Test			
Frequency/Mhz	Efficiency/dB	Efficiency/%	MaxGain/dBi
2400	-3.9	40.1	1.8
2410	-3.9	40	2.1
2420	-3.9	40.3	2.3
2430	-3.8	40.8	2.6
2440	-3.8	41.3	2.8
2450	-3.8	40.8	2.8
2460	-3.9	40.1	2.5
2470	-3.8	41.3	2.2
2480	-3.9	40.7	1.8
2490	-3.9	40.1	1.7
2500	-4.1	38.1	1.6

2D-Etotal (2400/2450/2500Mhz)


Phi 0 2D

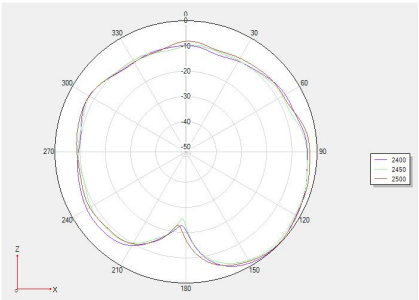




Phi 90 2D

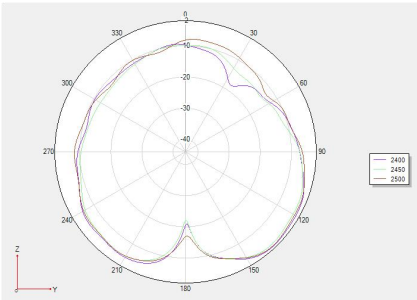




Theta 90 2D

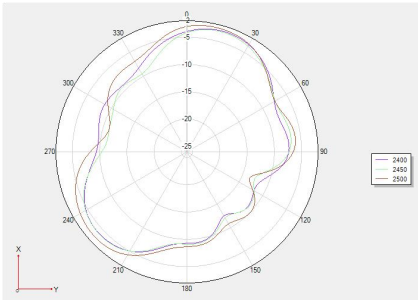




3D-Etotal (2400Mhz)

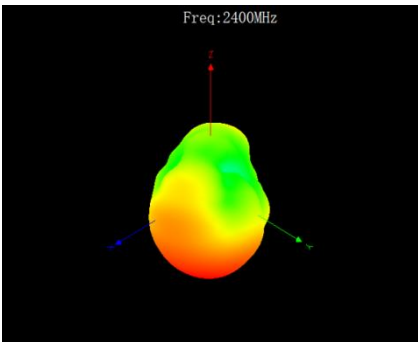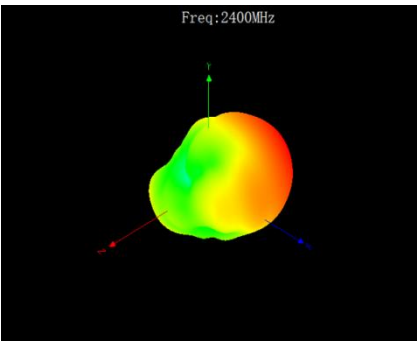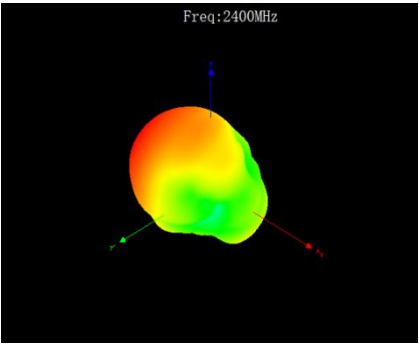

3D-Etotal (2450Mhz)

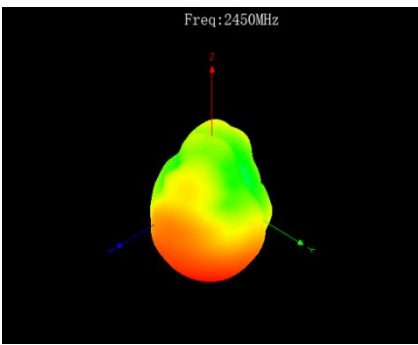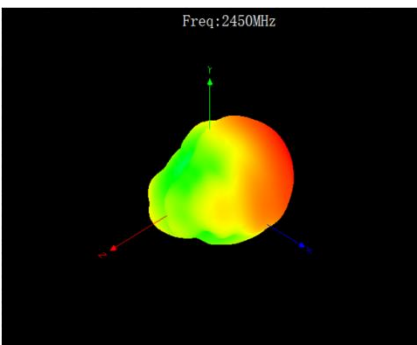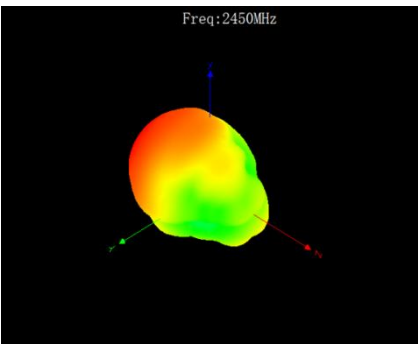

3D-Etotal (2500Mhz)

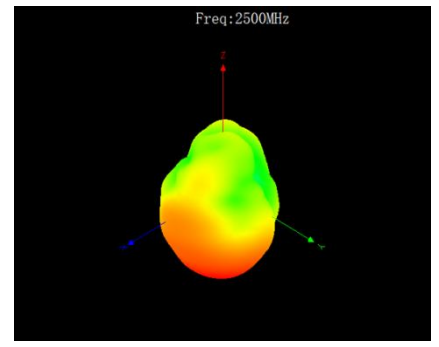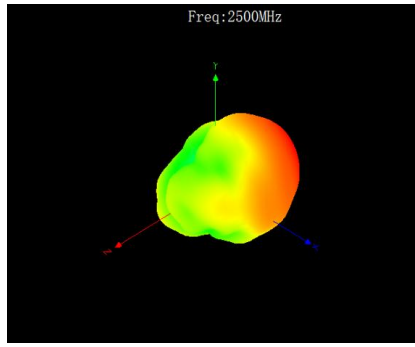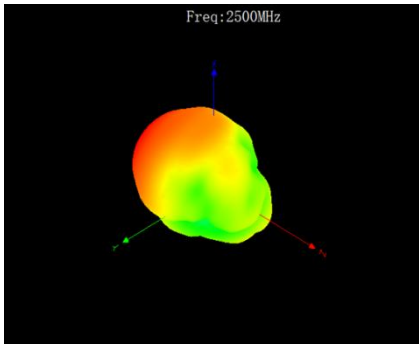

深圳市安特通讯科技有限公司规格书