





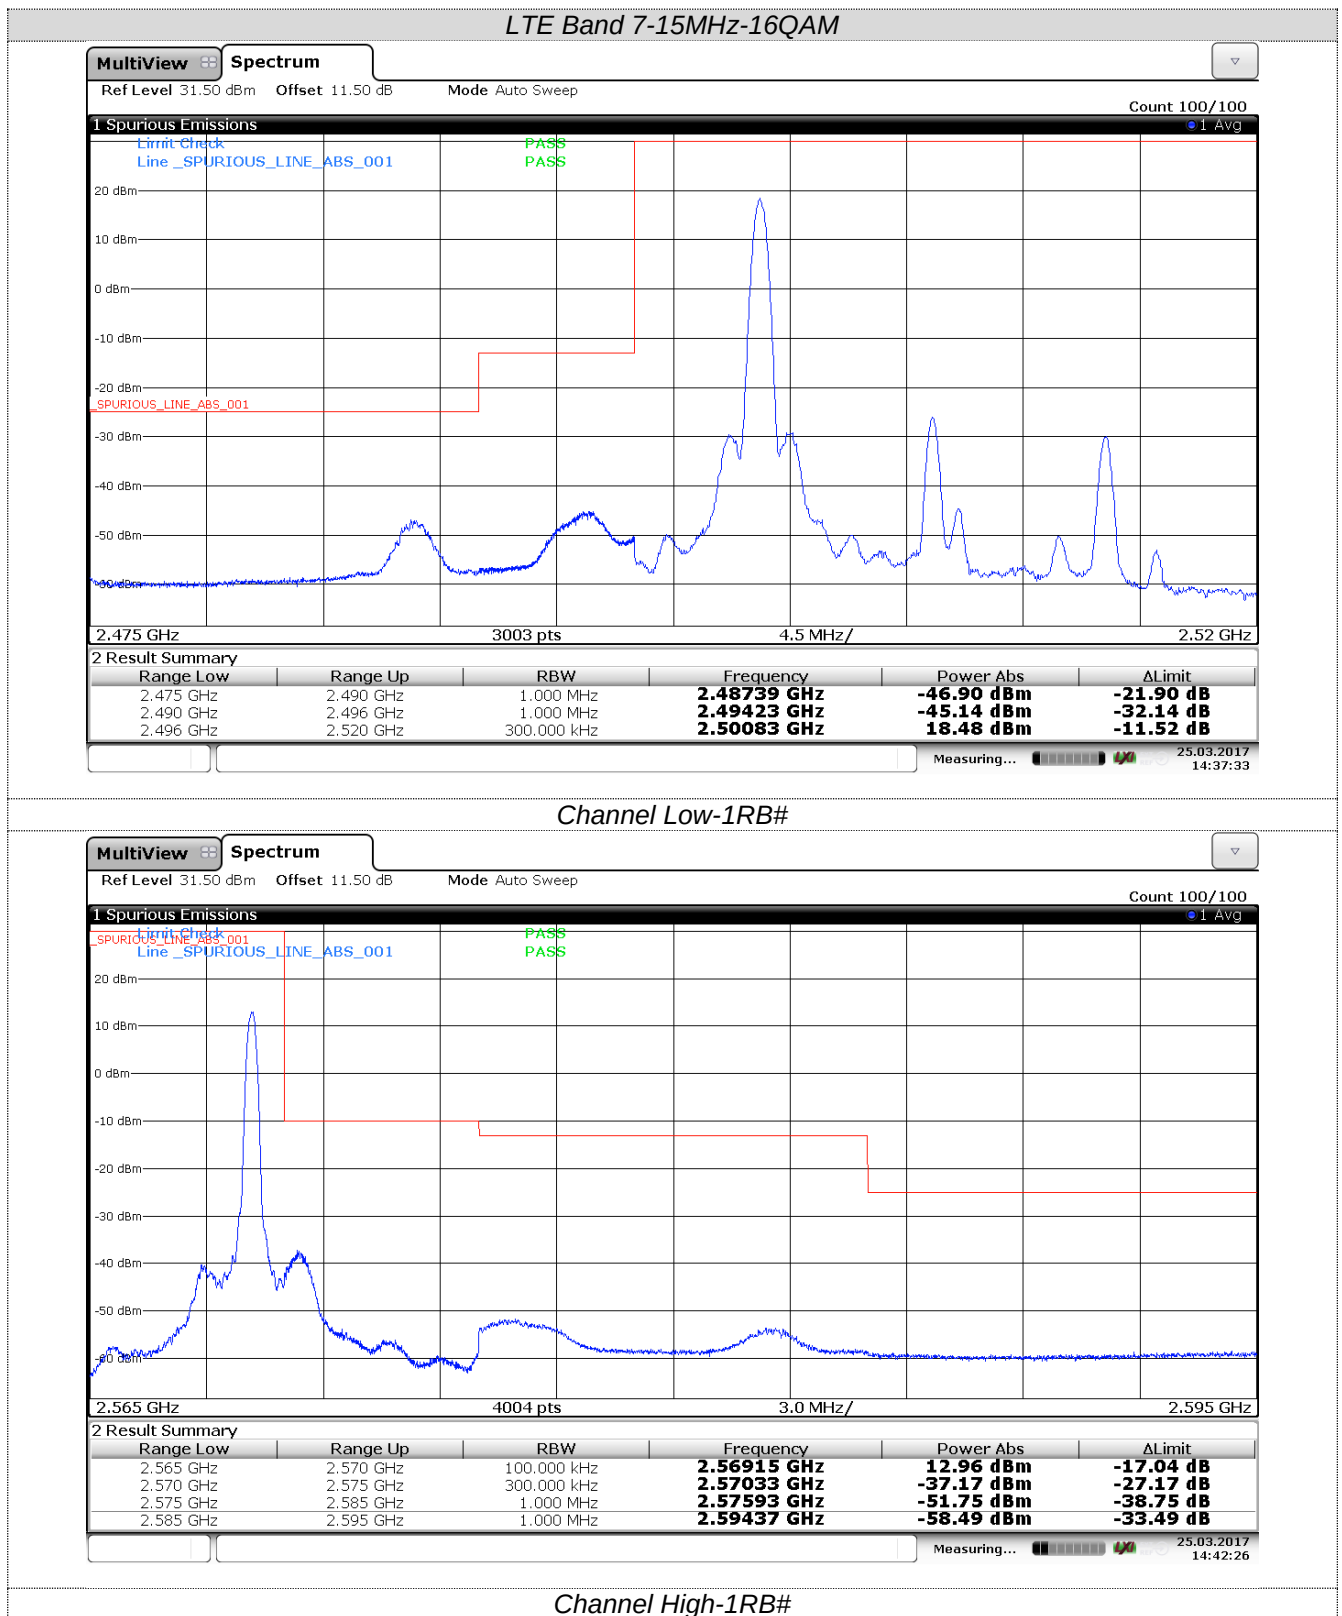

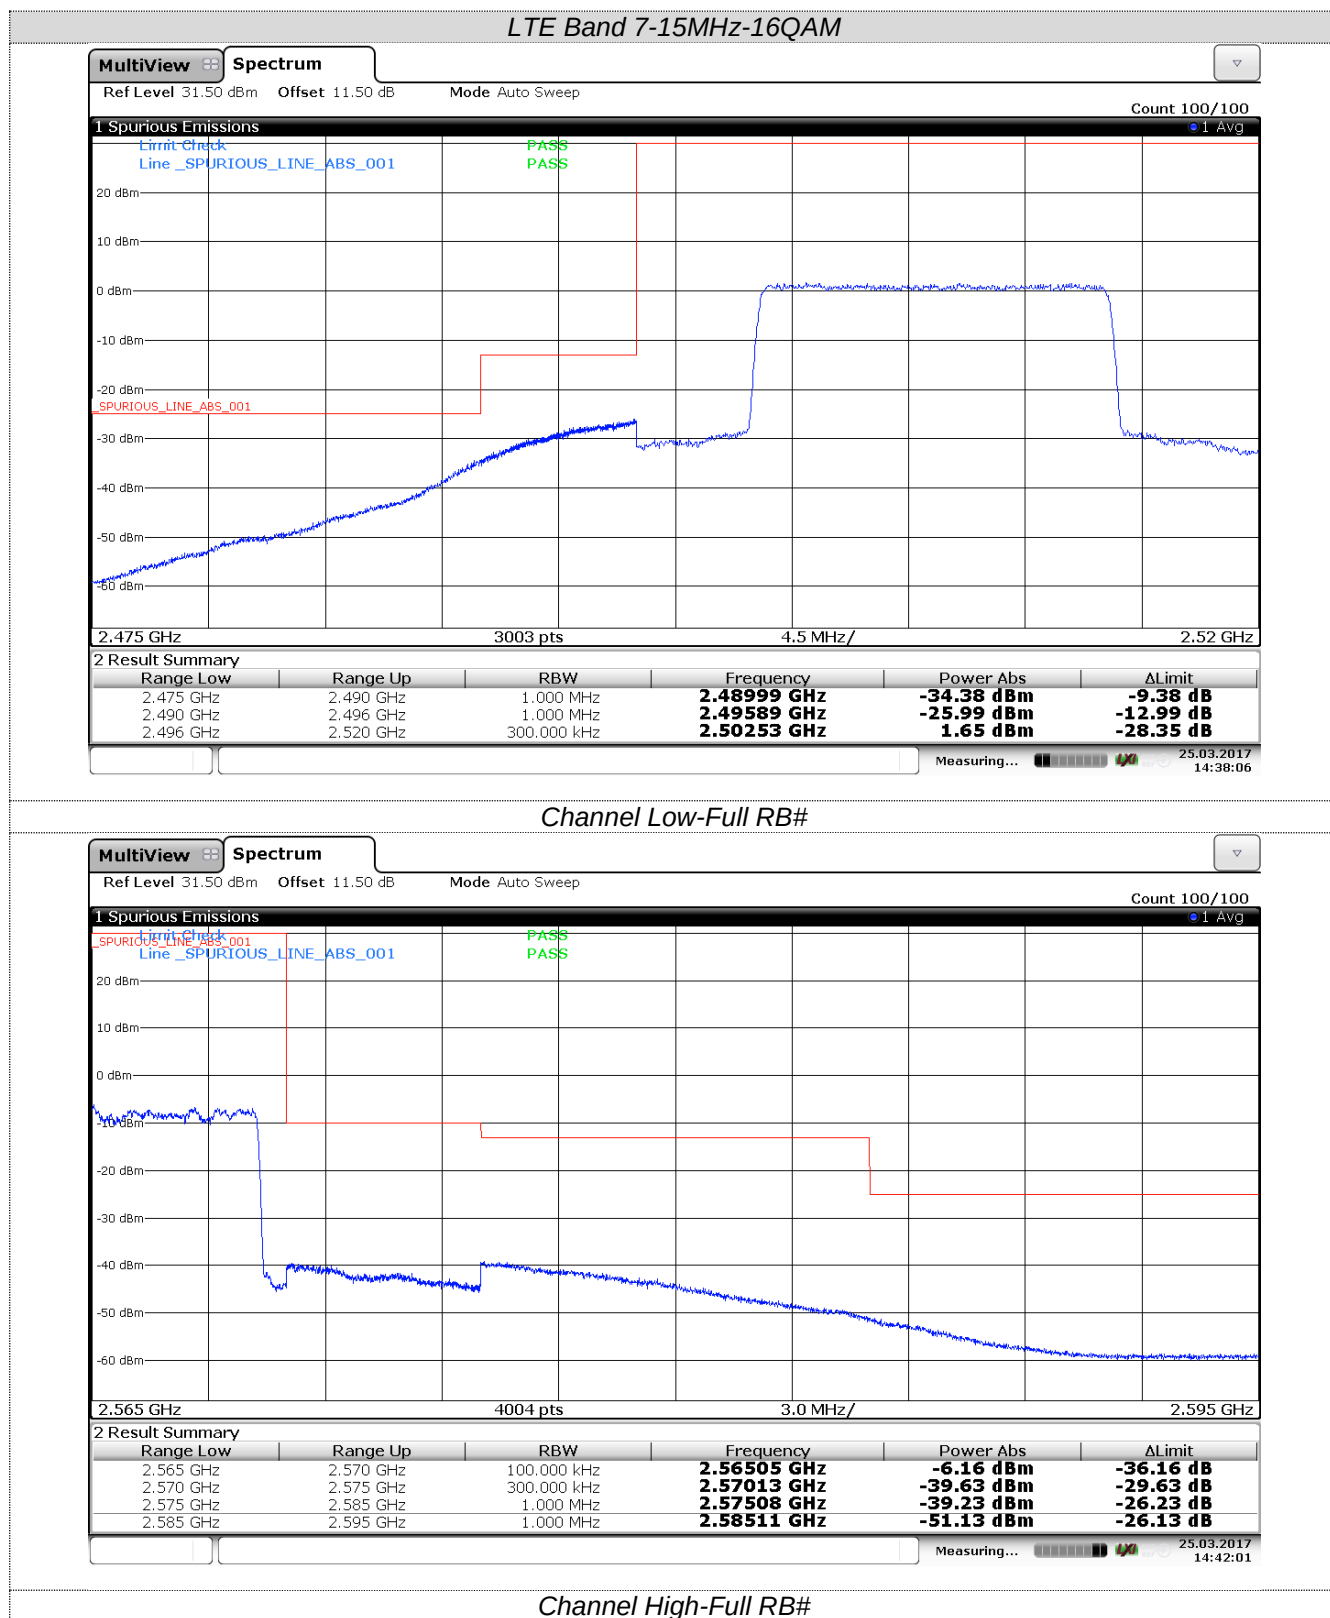


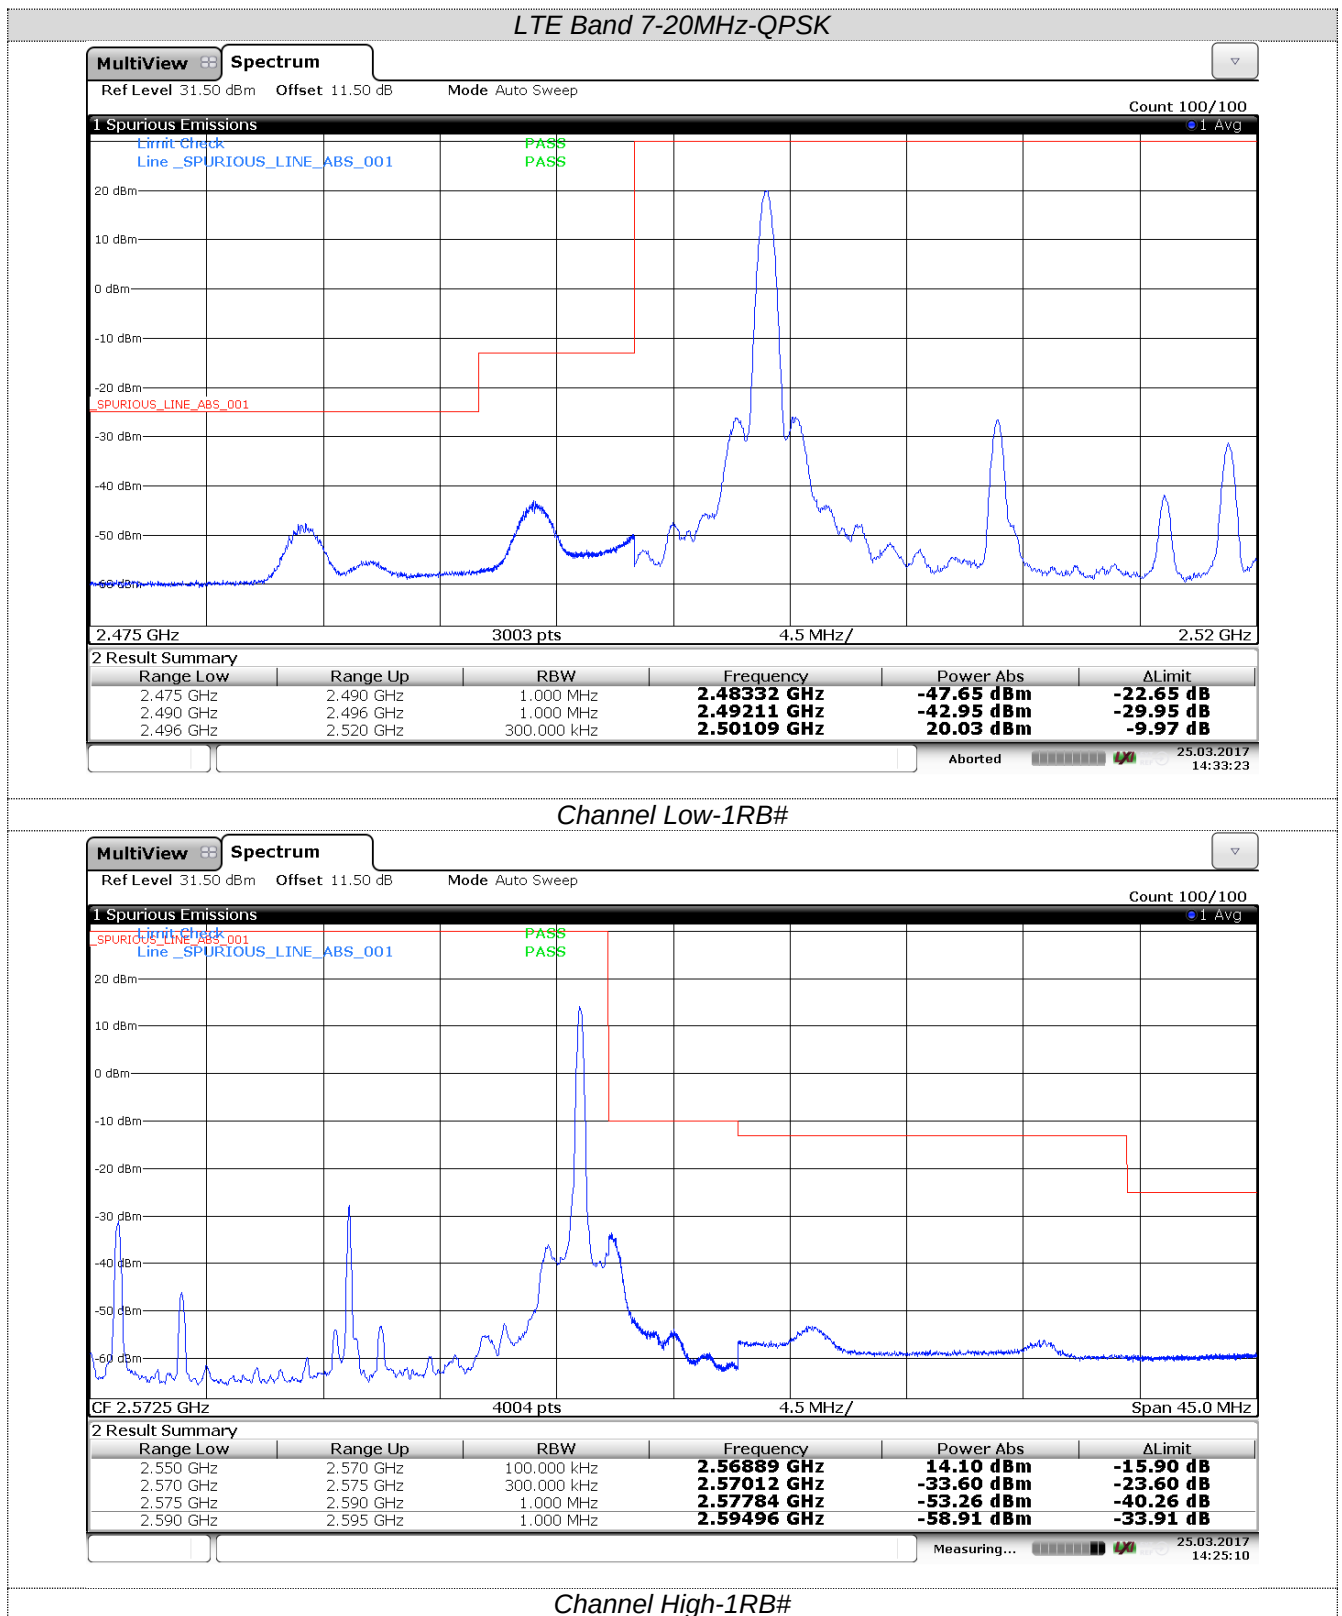


LTE Band 7-20MHz-QPSK

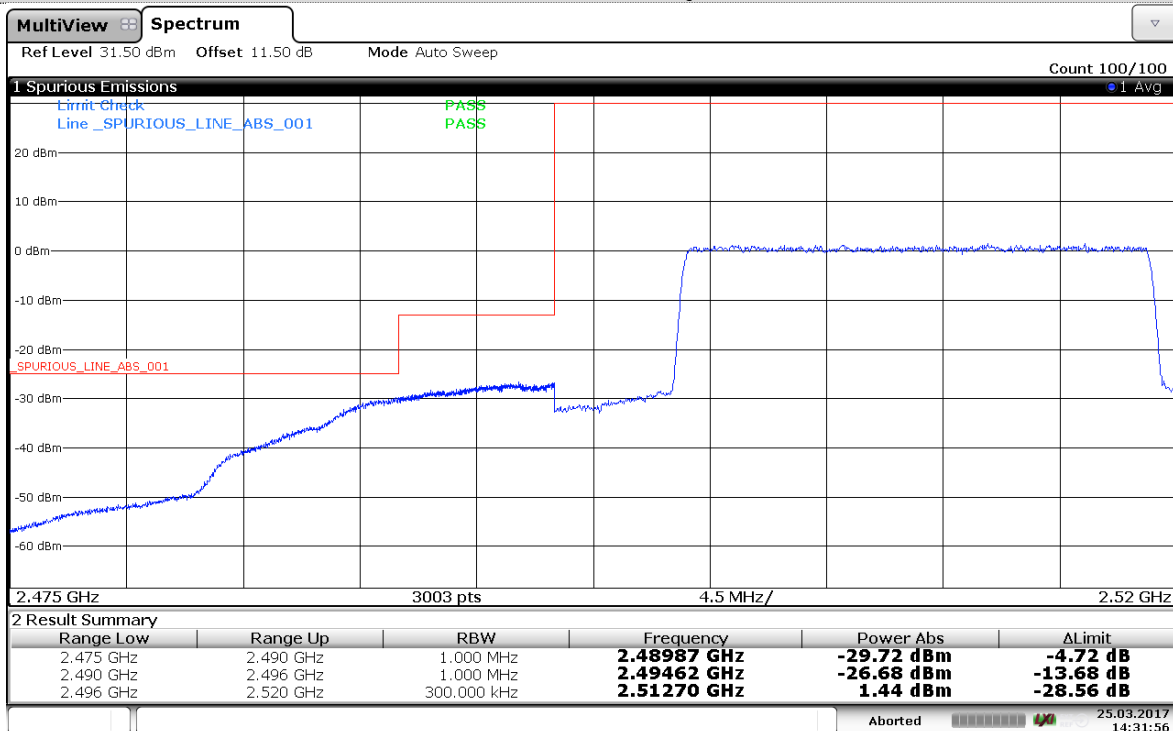


Channel Low-Full RB#

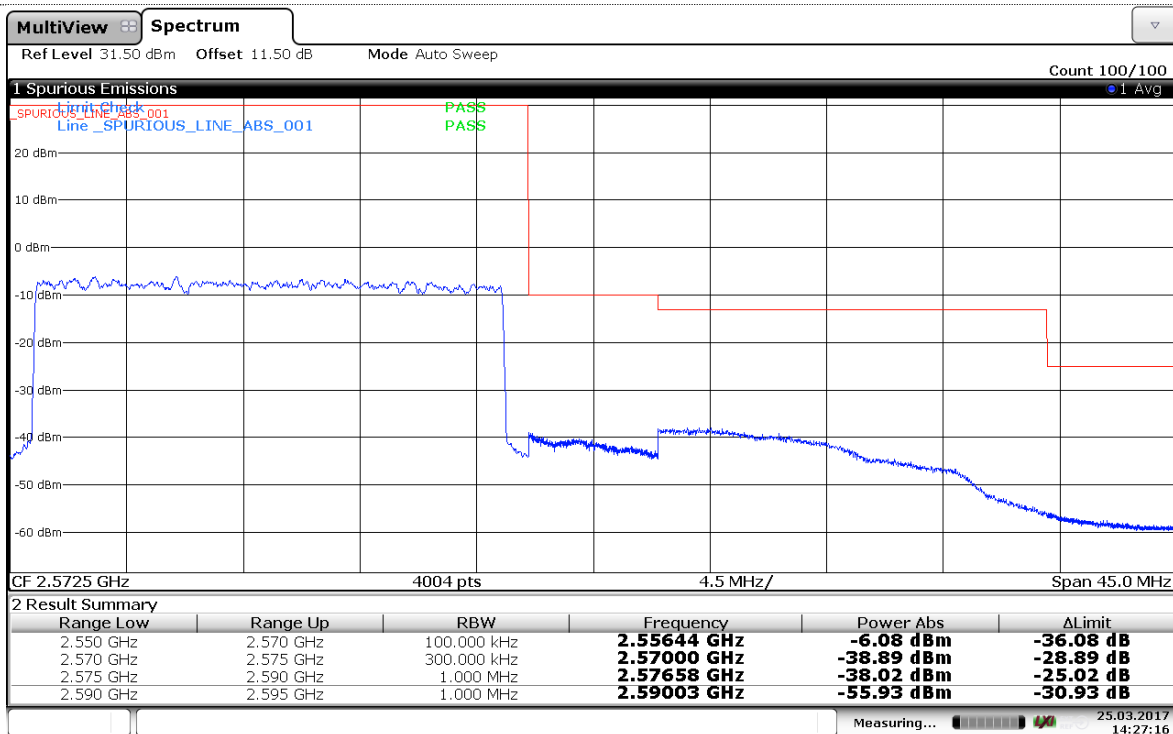

Channel High-Full RB#

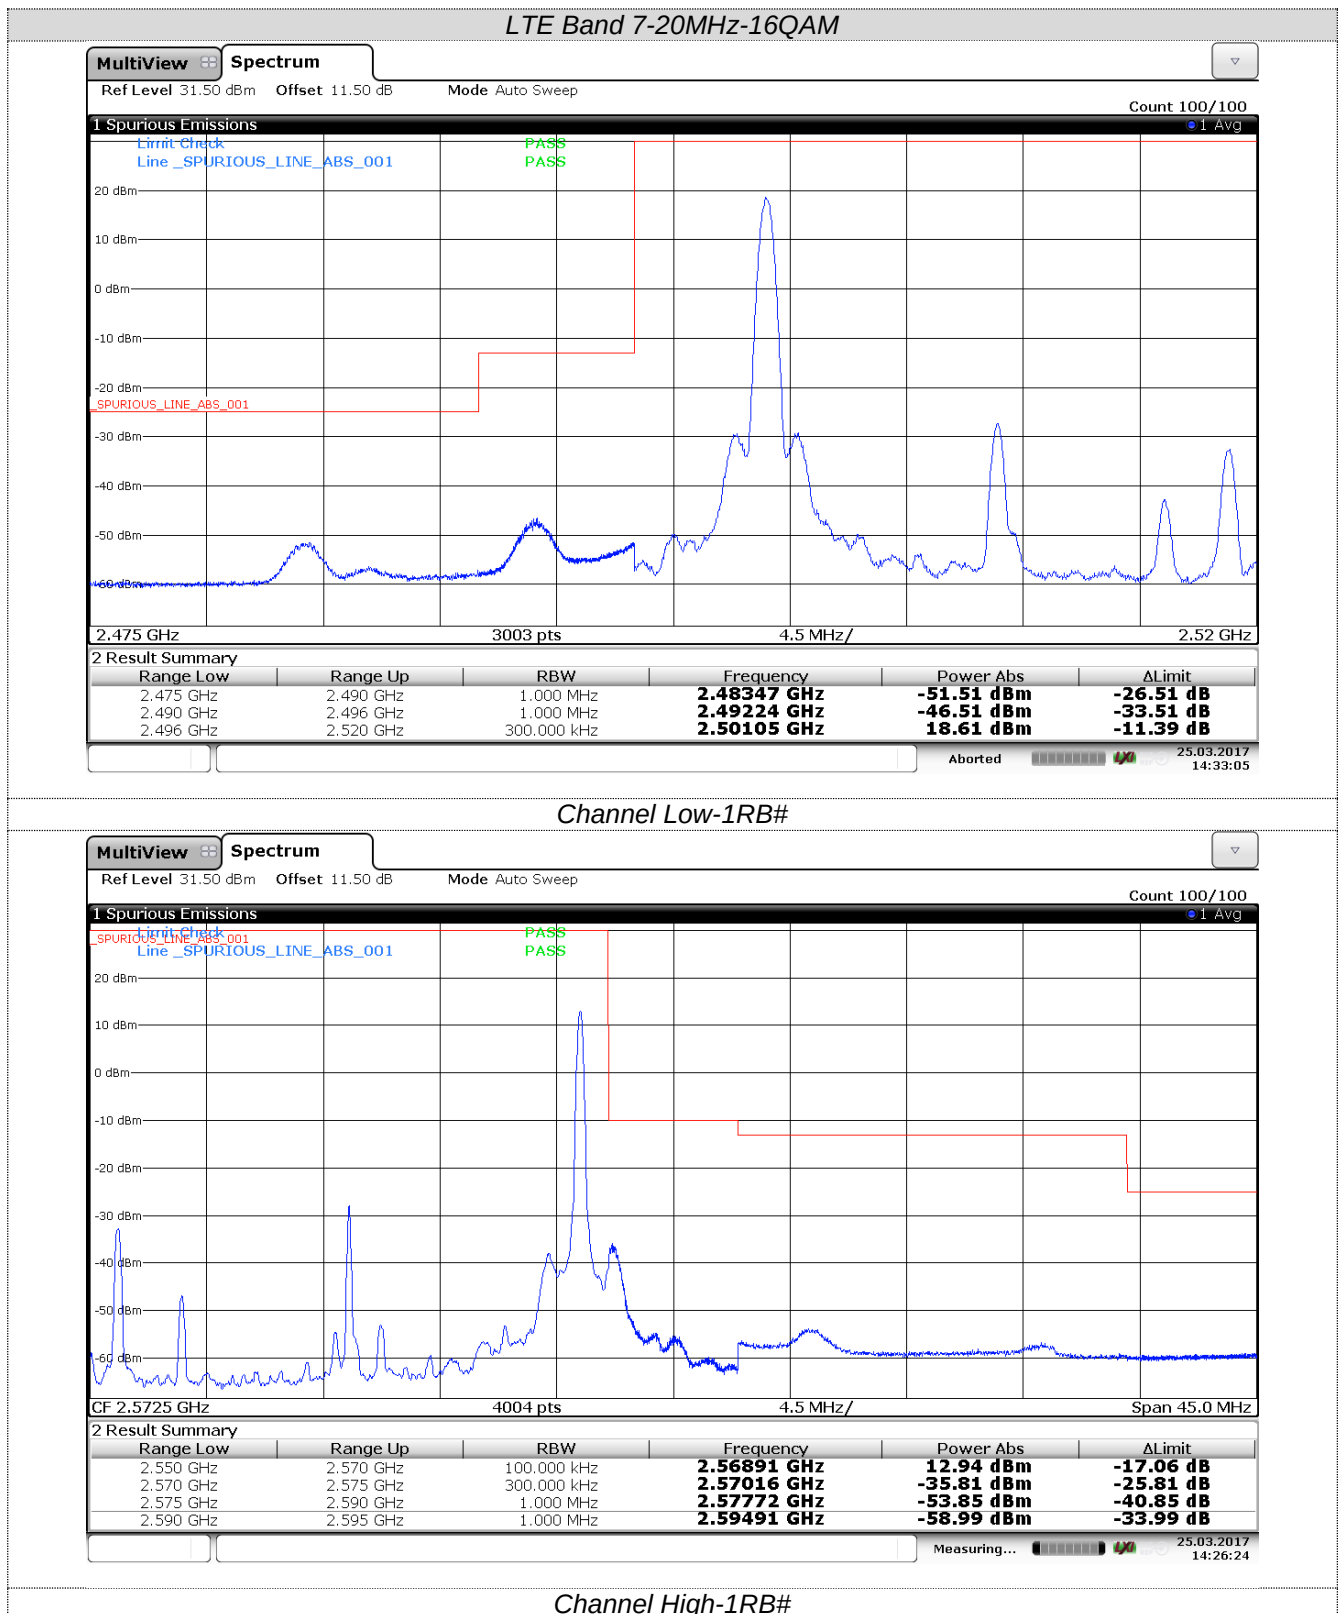

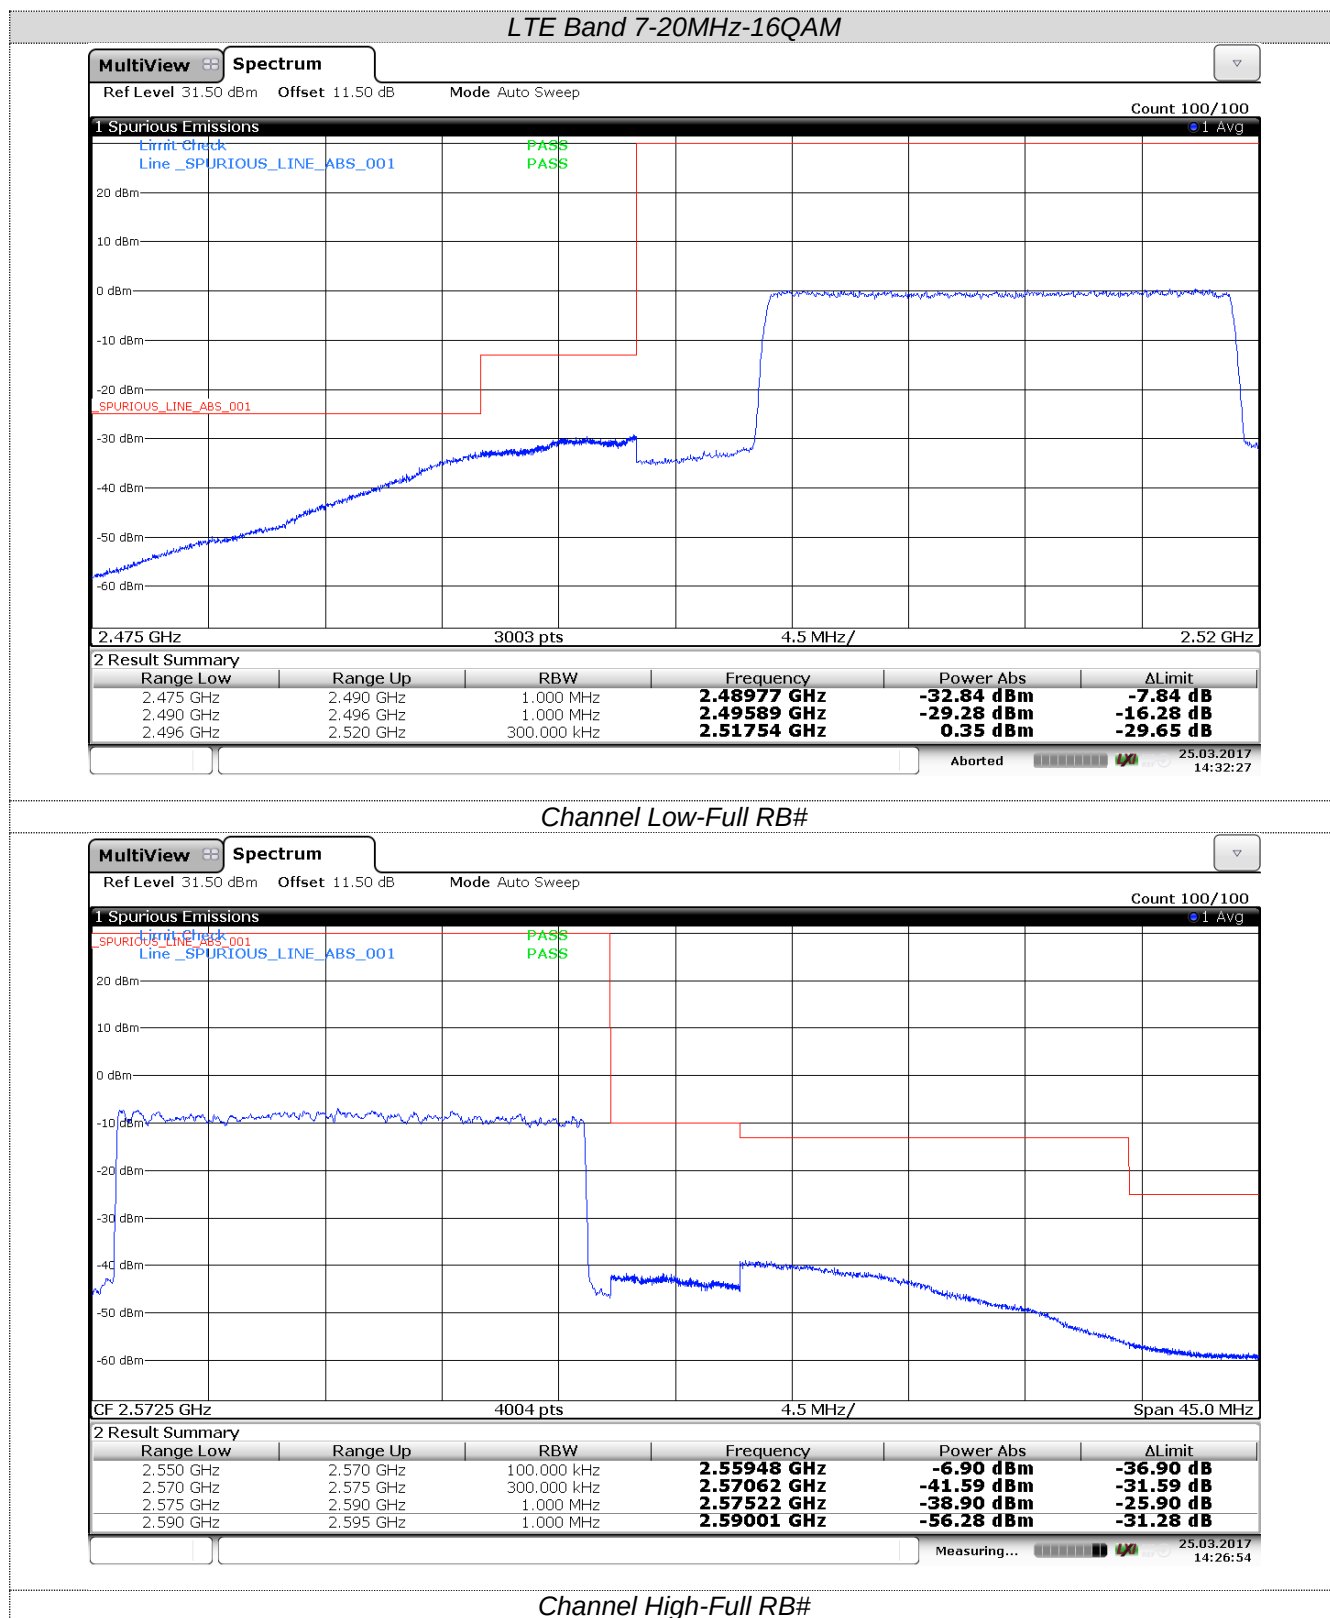


5.5. ERP AND EIRP

LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W,LTE Band 5:ERP<7W,LTE Band 7:EIPR<2W

TEST CONFIGURATION

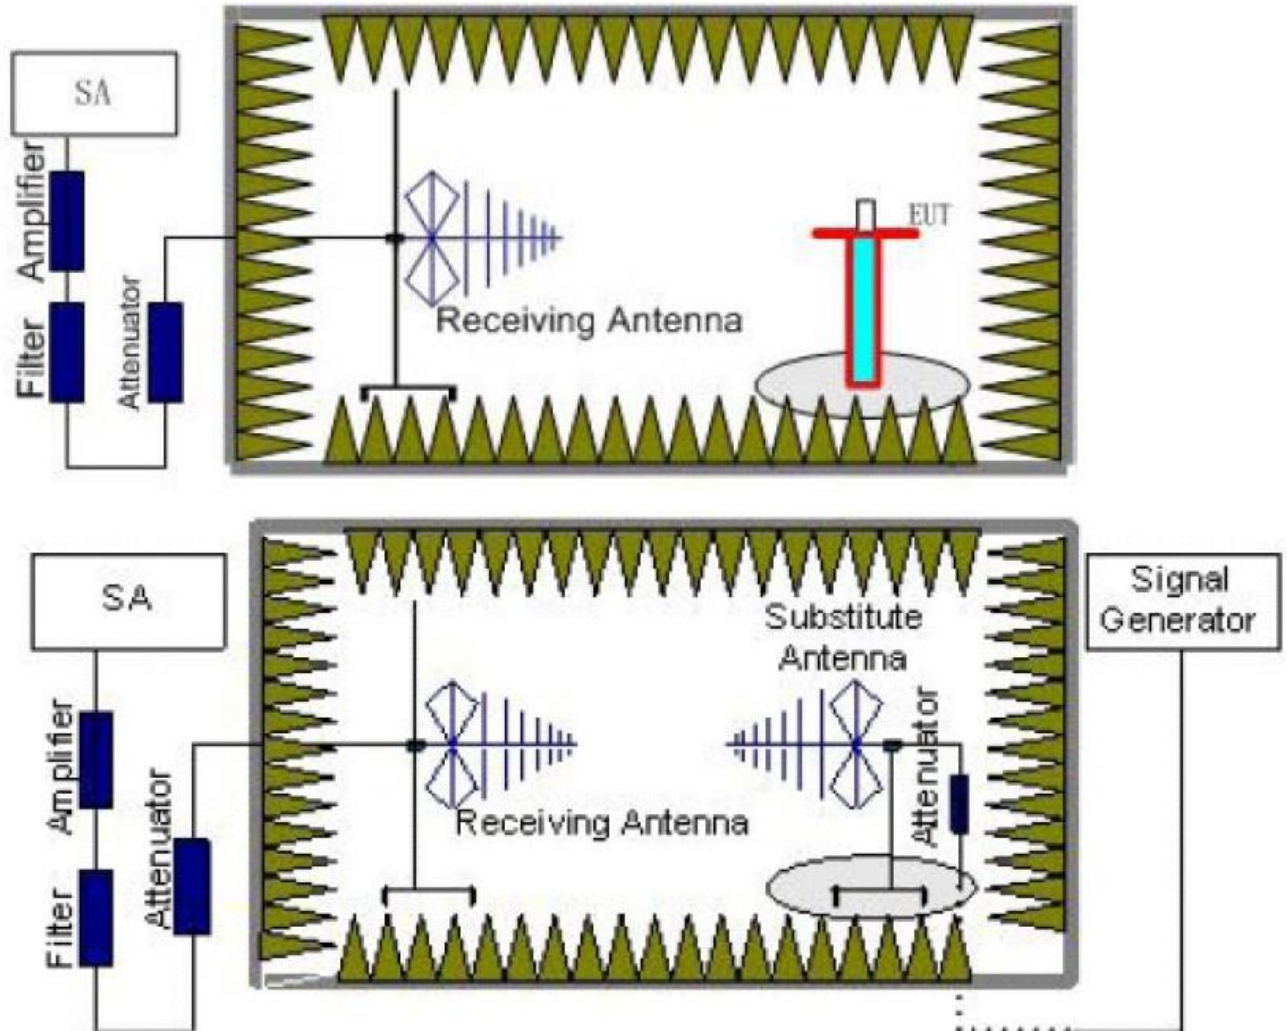

TEST PROCEDURE

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

LTE Band 2-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.47	18.52	33.00	PASS
	Mid	20.65	18.44		
	High	20.58	18.49		
16QAM	Low	21.32	18.37		PASS
	Mid	21.28	18.58		
	High	20.69	18.63		

LTE Band 2-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	18.44	33.00	PASS
	Mid	20.69	17.84		
	High	20.16	17.26		
16QAM	Low	21.14	18.57		PASS
	Mid	21.62	18.08		
	High	20.28	17.29		

LTE Band 2-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.22	18.05	33.00	PASS
	Mid	19.75	17.88		
	High	19.65	17.84		
16QAM	Low	19.39	18.05		PASS
	Mid	18.92	17.88		
	High	20.31	17.99		

LTE Band 2-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.52	17.06	33.00	PASS
	Mid	19.46	17.58		
	High	19.77	17.43		
16QAM	Low	19.38	16.40		PASS
	Mid	19.71	17.72		
	High	19.55	17.18		

LTE Band 2-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.52	17.58	33.00	PASS
	Mid	19.66	16.85		
	High	19.43	17.44		
16QAM	Low	19.01	17.58		PASS
	Mid	19.66	16.85		
	High	19.30	17.44		

LTE Band 2-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.52	17.32	33.00	PASS
	Mid	19.08	17.43		
	High	19.43	17.25		
16QAM	Low	19.05	17.22		PASS
	Mid	18.38	17.25		
	High	19.50	17.27		

LTE Band 4-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.36	19.32	30.00	PASS
	Mid	21.43	19.08		
	High	21.58	19.45		
16QAM	Low	20.88	19.44		PASS
	Mid	20.91	18.97		
	High	21.40	19.34		

LTE Band 4-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	18.43	30.00	PASS
	Mid	20.35	18.43		
	High	20.67	18.25		
16QAM	Low	20.01	18.32		PASS
	Mid	19.58	18.24		
	High	20.75	18.27		

LTE Band 4-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.42	18.22	30.00	PASS
	Mid	20.06	18.32		
	High	20.12	18.43		
16QAM	Low	19.95	18.12		PASS
	Mid	20.53	18.41		
	High	19.75	18.35		

LTE Band 4-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.25	18.06	30.00	PASS
	Mid	20.17	17.49		
	High	20.32	17.58		
16QAM	Low	20.12	18.07		PASS
	Mid	20.16	17.48		
	High	20.17	17.57		

LTE Band 4-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.25	18.32	30.00	PASS
	Mid	20.43	17.43		
	High	20.36	17.52		
16QAM	Low	19.68	18.32		PASS
	Mid	20.43	17.43		
	High	20.21	17.52		

LTE Band 4-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.25	17.65	30.00	PASS
	Mid	20.14	17.43		
	High	19.86	17.52		
16QAM	Low	19.72	17.54		PASS
	Mid	19.35	17.23		
	High	20.61	17.68		

LTE Band 5-1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.25	18.52	38.50	PASS
	Mid	20.14	18.42		
	High	20.31	17.63		
16QAM	Low	20.22	18.54		PASS
	Mid	20.16	18.40		
	High	20.21	17.65		

LTE Band 5-3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.12	18.32	38.50	PASS
	Mid	20.44	18.15		
	High	20.25	18.43		
16QAM	Low	20.02	18.30		PASS
	Mid	20.29	18.11		
	High	20.25	18.43		

LTE Band 5-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.85	17.65	38.50	PASS
	Mid	19.46	17.52		
	High	20.15	18.43		
16QAM	Low	19.61	17.70		PASS
	Mid	19.65	17.48		
	High	20.33	18.47		

LTE Band 5-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.85	17.46	38.50	PASS
	Mid	19.66	17.36		
	High	19.74	17.52		
16QAM	Low	20.12	17.76		PASS
	Mid	19.85	17.44		
	High	20.02	18.51		

LTE Band 7-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.32	18.59	33.00	PASS
	Mid	20.43	18.43		
	High	20.52	18.27		
16QAM	Low	20.21	18.68		PASS
	Mid	20.51	18.35		
	High	20.15	18.35		

LTE Band 7-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.52	16.44	33.00	PASS
	Mid	19.74	16.75		
	High	19.85	17.38		
16QAM	Low	19.15	16.36		PASS
	Mid	19.19	16.61		
	High	19.89	17.39		

LTE Band 7-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.41	17.06	33.00	PASS
	Mid	19.52	16.52		
	High	19.36	16.49		
16QAM	Low	18.79	17.20		PASS
	Mid	20.01	16.41		
	High	19.83	16.59		


LTE Band 7-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	19.42	16.85	33.00	PASS
	Mid	19.35	17.42		
	High	19.66	16.33		
16QAM	Low	20.11	17.36		PASS
	Mid	19.84	16.30		
	High	20.39	16.69		

5.6. Radiated Spurious Emission

LIMIT

LTE Band 2/4/17:<-13dBm;LTE Band 7<-25dBm

TEST CONFIGURATION

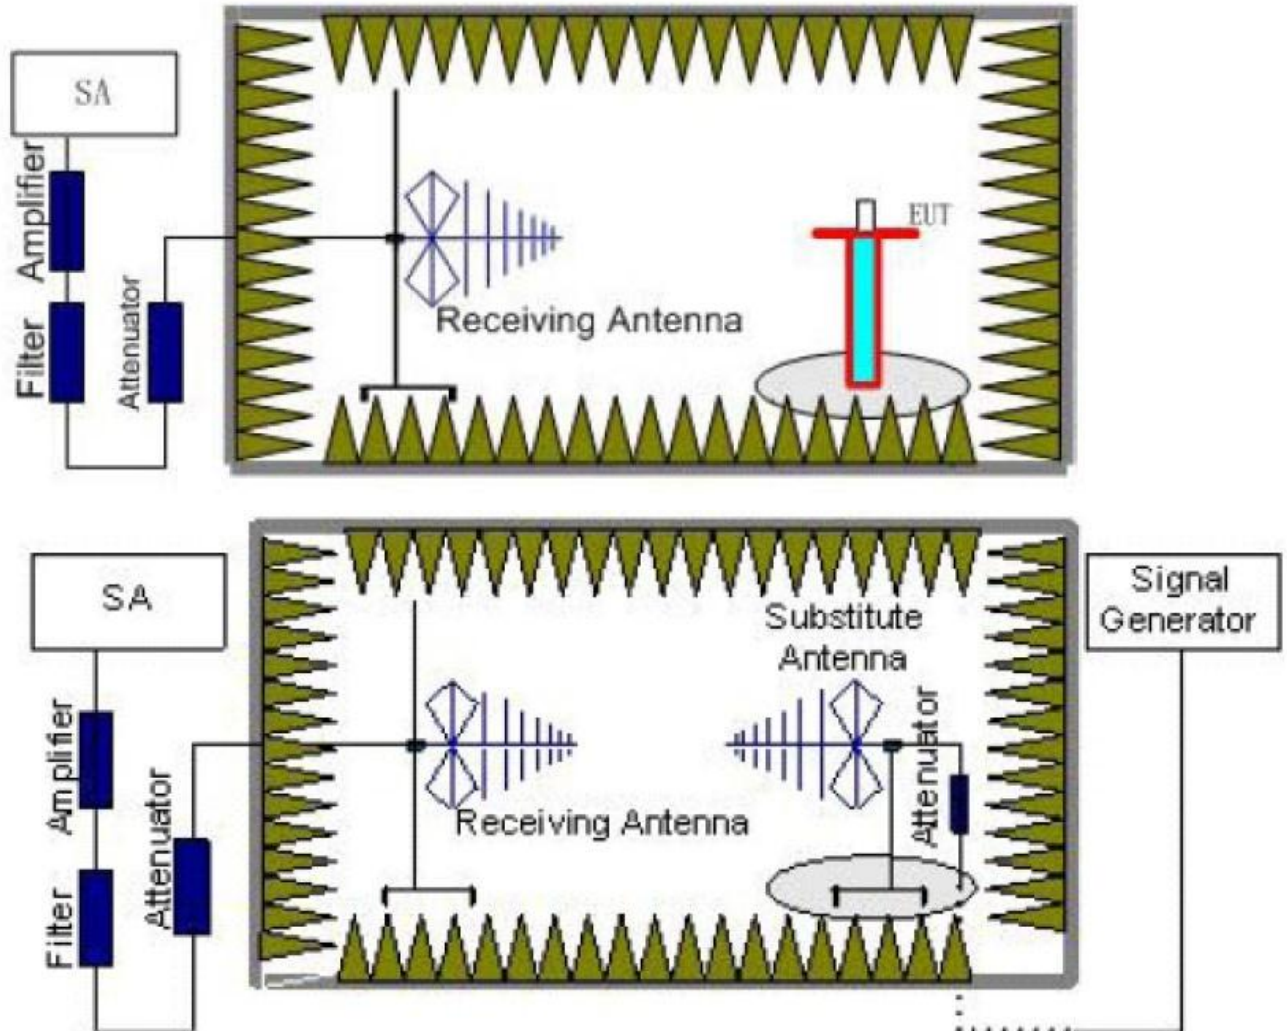

TEST RESULTS

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

LTE Band 2-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3701.4	Vertical	-37.52	-13.00	Pass
	5552.1	V	-43.65		
	7402.8	V	---		
	3701.4	Horizontal	-39.85	-13.00	Pass
	5552.1	H	-46.74		
	7402.8	H	---		
Mid	3760	Vertical	-37.02	-13.00	Pass
	5640	V	-43.75		
	7520	V	---		
	3760	Horizontal	-39.74	-13.00	Pass
	5640	H	-46.63		
	7520	H	---		
High	3818.6	Vertical	-37.21	-13.00	Pass
	5727.9	V	-43.92		
	7637.2	V	---		
	3818.6	Horizontal	-39.76	-13.00	Pass
	5727.9	H	-46.62		
	7637.2	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3703	Vertical	-37.99	-13.00	Pass
	5554.5	V	-43.88		
	7406	V	---		
	3703	Horizontal	-36.94	-13.00	Pass
	5554.5	H	-44.10		
	7406	H	---		
Mid	3760	Vertical	-37.11	-13.00	Pass
	5640	V	-44.79		
	7520	V	---		
	3760	Horizontal	-37.39	-13.00	Pass
	5640	H	-45.81		
	7520	H	---		
High	3817	Vertical	-35.63	-13.00	Pass
	5725.5	V	-45.48		
	7634	V	---		
	3817	Horizontal	-36.66	-13.00	Pass
	5725.5	H	-45.69		
	7634	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3705	Vertical	-37.25	-13.00	Pass
	5557.5	V	-44.05		
	7410	V	---		
	3705	Horizontal	-36.46	-13.00	Pass
	5557.5	H	-44.22		
	7410	H	---		
Mid	3760	Vertical	-36.59	-13.00	Pass
	5640	V	-44.74		
	7520	V	---		
	3760	Horizontal	-36.06	-13.00	Pass
	5640	H	-43.97		
	7520	H	---		
High	3815	Vertical	-37.39	-13.00	Pass
	5722.5	V	-44.23		
	7630	V	---		
	3815	Horizontal	-37.95	-13.00	Pass
	5722.5	H	-44.34		
	7630	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3710	Vertical	-36.69	-13.00	Pass
	5565	V	-44.35		
	7420	V	---		
	3710	Horizontal	-35.34	-13.00	Pass
	5565	H	-44.63		
	7420	H	---		
Mid	3760	Vertical	-35.56	-13.00	Pass
	5640	V	-45.53		
	7520	V	---		
	3760	Horizontal	-34.67	-13.00	Pass
	5640	H	-45.70		
	7520	H	---		
High	3810	Vertical	-34.36	-13.00	Pass
	5715	V	-45.65		
	7620	V	---		
	3810	Horizontal	-33.60	-13.00	Pass
	5715	H	-45.49		
	7620	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3705	Vertical	-35.74	-13.00	Pass
	5557.5	V	-44.74		
	7410	V	---		
	3705	Horizontal	-33.96	-13.00	Pass
	5557.5	H	-45.11		
	7410	H	---		
Mid	3760	Vertical	-34.25	-13.00	Pass
	5640	V	-46.29		
	7520	V	---		
	3760	Horizontal	-33.07	-13.00	Pass
	5640	H	-46.99		
	7520	H	---		
High	3815	Vertical	-31.86	-13.00	Pass
	5722.5	V	-46.76		
	7630	V	---		
	3815	Horizontal	-32.11	-13.00	Pass
	5722.5	H	-46.81		
	7630	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3720	Vertical	-34.48	-13.00	Pass
	5580	V	-45.19		
	7440	V	---		
	3720	Horizontal	-32.47	-13.00	Pass
	5580	H	-45.60		
	7440	H	---		
Mid	3760	Vertical	-32.80	-13.00	Pass
	5640	V	-46.93		
	7520	V	---		
	3760	Horizontal	-31.47	-13.00	Pass
	5640	H	-46.61		
	7520	H	---		
High	3800	Vertical	-32.02	-13.00	Pass
	5700	V	-46.72		
	7600	V	---		
	3800	Horizontal	-33.44	-13.00	Pass
	5700	H	-47.01		
	7600	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3421.4	Vertical	-44.52	-13.00	Pass
	5132.1	V	-40.69		
	6842.8	V	---		
	3421.4	Horizontal	-46.75	-13.00	Pass
	5132.1	H	-44.84		
	6842.8	H	---		
Mid	3465	Vertical	-44.65	-13.00	Pass
	5197.5	V	-40.56		
	6930	V	---		
	3465	Horizontal	-46.59	-13.00	Pass
	5197.5	H	-44.71		
	6930	H	---		
High	3508.6	Vertical	-44.86	-13.00	Pass
	5262.9	V	-40.77		
	7017.2	V	---		
	3508.6	Horizontal	-46.61	-13.00	Pass
	5262.9	H	-44.73		
	7017.2	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3423	Vertical	-45.10	-13.00	Pass
	5134.5	V	-40.54		
	6846	V	---		
	3423	Horizontal	-46.44	-13.00	Pass
	5134.5	H	-44.70		
	6846	H	---		
Mid	3465	Vertical	-45.21	-13.00	Pass
	5197.5	V	-40.65		
	6930	V	---		
	3465	Horizontal	-46.30	-13.00	Pass
	5197.5	H	-44.82		
	6930	H	---		
High	3507	Vertical	-45.41	-13.00	Pass
	5260.5	V	-40.46		
	7014	V	---		
	3423	Horizontal	-46.16	-13.00	Pass
	5134.5	H	-44.95		
	6846	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3425	Vertical	-45.57	-13.00	Pass
	5137.5	V	-40.72		
	6850	V	---		
	3425	Horizontal	-46.33	-13.00	Pass
	5137.5	H	-45.11		
	6850	H	---		
Mid	3465	Vertical	-45.44	-13.00	Pass
	5197.5	V	-40.59		
	6930	V	-		
	3465	Horizontal	-46.20	-13.00	Pass
	5197.5	H	-45.00		
	6930	H	---		
High	3505	Vertical	-45.62	-13.00	Pass
	5257.5	V	-40.76		
	7010	V	-		
	3505	Horizontal	-46.32	-13.00	Pass
	5257.5	H	-45.12		
	7010	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3430	Vertical	-45.01	-13.00	Pass
	5145	V	-41.01		
	6860	V	---		
	3430	Horizontal	-45.90	-13.00	Pass
	5145	H	-44.76		
	6860	H	---		
Mid	3465	Vertical	-45.23	-13.00	Pass
	5197.5	V	-41.22		
	6930	V	---		
	3465	Horizontal	-45.85	-13.00	Pass
	5197.5	H	-44.72		
	6930	H	-		
High	3500	Vertical	-45.31	-13.00	Pass
	5250	V	-41.29		
	7000	V	-		
	3500	Horizontal	-45.68	-13.00	Pass
	5250	H	-44.56		
	7000	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3435	Vertical	-44.06	-13.00	Pass
	5152.5	V	-41.41		
	6870	V	---		
	3435	Horizontal	-46.07	-13.00	Pass
	5152.5	H	-44.19		
	6870	H	---		
Mid	3465	Vertical	-44.35	-13.00	Pass
	5197.5	V	-41.68		
	6930	V	---		
	3465	Horizontal	-45.89	-13.00	Pass
	5197.5	H	-44.05		
	6930	H	---		
High	3490	Vertical	-44.60	-13.00	Pass
	5235	V	-41.91		
	6980	V	---		
	3490	Horizontal	-45.84	-13.00	Pass
	5235	H	-44.00		
	6980	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3440	Vertical	-42.80	-13.00	Pass
	5160	V	-42.35		
	6880	V	---		
	3440	Horizontal	-45.42	-13.00	Pass
	5160	H	-44.35		
	6880	H	---		
Mid	3465	Vertical	-42.49	-13.00	Pass
	5197.5	V	-42.50		
	6930	V	---		
	3465	Horizontal	-45.57	-13.00	Pass
	5197.5	H	-44.23		
	6930	H	---		
High	3490	Vertical	-42.28	-13.00	Pass
	5235	V	-44.16		
	6980	V	---		
	3490	Horizontal	-45.11	-13.00	Pass
	5235	H	-44.06		
	6980	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 5-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1649.4	Vertical	-40.52	-13.00	Pass
	2474.1	V	-41.48		
	3298.8	V	---		
	1649.4	Horizontal	-43.58	-13.00	Pass
	2474.1	H	-43.69		
	3298.8	H	---		
Mid	1673	Vertical	-40.34	-13.00	Pass
	2509.5	V	-41.31		
	3346	V	---		
	1673	Horizontal	-43.40	-13.00	Pass
	2509.5	H	-43.54		
	3346	H	---		
High	1696.6	Vertical	-40.60	-13.00	Pass
	2544.9	V	-41.55		
	3393.2	V	-		
	1696.6	Horizontal	-43.45	-13.00	Pass
	2544.9	H	-43.60		
	3393.2	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 5-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1651	Vertical	-40.48	-13.00	Pass
	2476.5	V	-41.52		
	3302	V	---		
	1651	Horizontal	-43.40	-13.00	Pass
	2476.5	H	-43.65		
	3302	H	---		
Mid	1673	Vertical	-40.33	-13.00	Pass
	2509.5	V	-41.40		
	3346	V	---		
	1673	Horizontal	-43.58	-13.00	Pass
	2509.5	H	-43.50		
	3346	H	---		
High	1696.6	Vertical	-39.70	-13.00	Pass
	2544.9	V	-40.34		
	3393.2	V	---		
	1696.6	Horizontal	-42.53	-13.00	Pass
	2544.9	H	-42.50		
	3393.2	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 5-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1653	Vertical	-40.49	-13.00	Pass
	2479.5	V	-41.51		
	3306	V	---		
	1653	Horizontal	-43.45	-13.00	Pass
	2479.5	H	-43.66		
	3306	H	---		
Mid	1673	Vertical	-40.53	-13.00	Pass
	2509.5	V	-41.54		
	3346	V	---		
	1673	Horizontal	-43.40	-13.00	Pass
	2509.5	H	-41.71		
	3346	H	---		
High	1695	Vertical	-40.70	-13.00	Pass
	2542.5	V	-41.82		
	3390	V	---		
	1695	Horizontal	-43.42	-13.00	Pass
	2542.5	H	-41.73		
	3390	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 5-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1658	Vertical	-40.49	-13.00	Pass
	2487	V	-41.51		
	3316	V	---		
	1658	Horizontal	-43.47	-13.00	Pass
	2487	H	-43.67		
	3316	H	---		
Mid	1673	Vertical	-40.51	-13.00	Pass
	2509.5	V	-41.52		
	3346	V	---		
	1673	Horizontal	-42.03	-13.00	Pass
	2509.5	H	-43.41		
	3346	H	---		
High	1688	Vertical	-40.07	-13.00	Pass
	2532	V	-41.93		
	3376	V	-		
	1688	Horizontal	-41.86	-13.00	Pass
	2532	H	-43.57		
	3376	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5005	Vertical	-37.52	-25.00	Pass
	7507.5	V	-41.35		
	10010	V	---		
	5005	Horizontal	-40.76	-25.00	Pass
	7507.5	H	-45.43		
	10010	H	---		
Mid	5070	Vertical	-36.97	-25.00	Pass
	7605	V	-40.87		
	10140	V	---		
	5070	Horizontal	-40.20	-25.00	Pass
	7605	H	-41.30		
	10140	H	---		
High	5135	Vertical	-37.41	-25.00	Pass
	7702.5	V	-41.58		
	10270	V	---		
	5135	Horizontal	-40.08	-25.00	Pass
	7702.5	H	-41.61		
	10270	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5010	Vertical	-37.54	-25.00	Pass
	7515	V	-41.33		
	10020	V	---		
	5010	Horizontal	-40.83	-25.00	Pass
	7515	H	-45.44		
	10020	H	---		
Mid	5070	Vertical	-37.59	-25.00	Pass
	7605	V	-41.38		
	10140	V	---		
	5070	Horizontal	-40.17	-25.00	Pass
	7605	H	-41.89		
	10140	H	---		
High	5130	Vertical	-38.10	-25.00	Pass
	7695	V	-42.22		
	10260	V	---		
	5130	Horizontal	-40.00	-25.00	Pass
	7695	H	-42.25		
	10260	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5015	Vertical	-37.57	-25.00	Pass
	7522.5	V	-41.30		
	10030	V	---		
	5015	Horizontal	-40.99	-25.00	Pass
	7522.5	H	-45.48		
	10030	H	---		
Mid	5070	Vertical	-37.70	-25.00	Pass
	7605	V	-41.41		
	10140	V	---		
	5070	Horizontal	-39.83	-25.00	Pass
	7605	H	-42.30		
	10140	H	---		
High	5125	Vertical	-38.60	-25.00	Pass
	7687.5	V	-42.89		
	10250	V	---		
	5125	Horizontal	-39.32	-25.00	Pass
	7687.5	H	-42.99		
	10250	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5015	Vertical	-37.49	-25.00	Pass
	7522.5	V	-41.38		
	10030	V	---		
	5015	Horizontal	-40.64	-25.00	Pass
	7522.5	H	-45.40		
	10030	H	---		
Mid	5070	Vertical	-37.22	-25.00	Pass
	7605	V	-41.13		
	10140	V	---		
	5070	Horizontal	-41.45	-25.00	Pass
	7605	H	-40.51		
	10140	H	---		
High	5125	Vertical	-36.59	-25.00	Pass
	7687.5	V	-40.10		
	10250	V	---		
	5125	Horizontal	-41.21	-25.00	Pass
	7687.5	H	-40.15		
	10250	H	---		

Remark:


1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

5.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

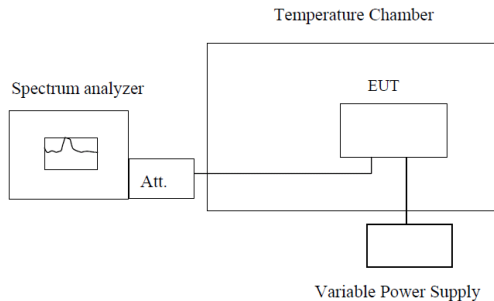

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Reference Frequency: LTE Band 2 Middle channel=1880MHz,20MHz Bandwidth							
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
3.70	-30	32	0.0170	79	0.0420	2.50	Pass
	-20	25	0.0133	56	0.0298		
	-10	21	0.0112	58	0.0309		
	0	23	0.0122	46	0.0245		
	10	23	0.0122	37	0.0197		
	20	26	0.0138	45	0.0239		
	30	28	0.0149	38	0.0202		
	40	26	0.0138	44	0.0234		
	50	28	0.0149	38	0.0202		
Reference Frequency: LTE Band 4 Middle channel=1732.5MHz,20MHz Bandwidth							
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
3.70	-30	37	0.0214	58	0.0335	2.50	Pass
	-20	35	0.0202	49	0.0283		
	-10	34	0.0196	47	0.0271		
	0	38	0.0219	37	0.0214		
	10	28	0.0162	41	0.0237		
	20	29	0.0167	44	0.0254		
	30	27	0.0156	50	0.0289		
	40	30	0.0173	49	0.0283		
	50	34	0.0196	48	0.0277		
Reference Frequency: LTE Band 5 Middle channel=836.5MHz,10MHz Bandwidth							
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
3.70	-30	34	0.0406	48	0.0574	2.50	Pass
	-20	30	0.0359	45	0.0538		
	-10	24	0.0287	39	0.0466		
	0	29	0.0347	42	0.0502		
	10	28	0.0335	41	0.0490		
	20	25	0.0299	39	0.0466		
	30	27	0.0323	38	0.0454		
	40	26	0.0311	40	0.0478		
	50	24	0.0287	42	0.0502		


Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth							
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
3.70	-30	36	0.0142	48	0.0189	2.50	Pass
	-20	34	0.0134	47	0.0185		
	-10	33	0.0130	46	0.0181		
	0	31	0.0122	43	0.0170		
	10	32	0.0126	38	0.0150		
	20	29	0.0114	39	0.0154		
	30	28	0.0110	42	0.0166		
	40	34	0.0134	43	0.0170		
	50	35	0.0138	45	0.0178		

5.8. Frequency stability V.S. Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

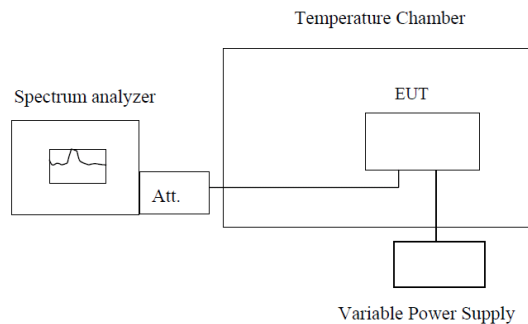

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and record the frequency.
3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**


Reference Frequency: LTE Band 2 Middle channel=1880MHz,20MHz Bandwidth							
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
25	4.20	37	0.0197	48	0.0255	2.50	Pass
	3.70	35	0.0186	49	0.0261		
	3.50	34	0.0181	47	0.0250		
Reference Frequency: LTE Band 4 Middle channel=1732.5MHz,20MHz Bandwidth							
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
25	4.20	32	0.0185	45	0.0260	2.50	Pass
	3.70	36	0.0208	47	0.0271		
	3.50	34	0.0196	43	0.0248		
Reference Frequency: LTE Band 5 Middle channel=836.5MHz,10MHz Bandwidth							
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
25	4.20	34	0.0406	43	0.0514	2.50	Pass
	3.70	35	0.0418	44	0.0526		
	3.50	33	0.0395	45	0.0538		
Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth							
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
25	4.20	36	0.0142	46	0.0181	2.50	Pass
	3.70	31	0.0122	45	0.0177		
	3.50	35	0.0138	47	0.0185		

5.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

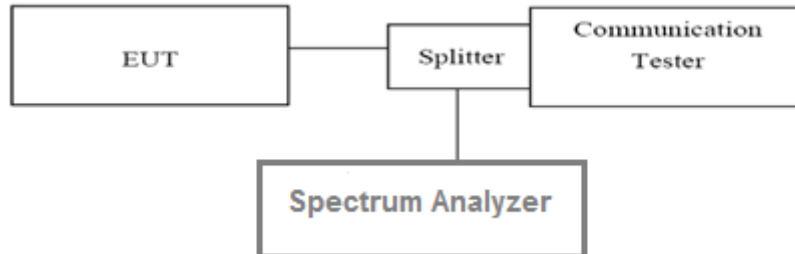

TEST PROCEDURE

According with KDB 971168

1. The signal analyzer' s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal " RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the " on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

LTE Band 2-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	4.28	5.56	5.30	6.34	13.00	Pass
Mid	4.32	5.82	5.46	6.42	13.00	Pass
High	4.82	5.64	5.52	6.38	13.00	Pass


LTE Band 4-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	3.98	5.62	4.92	6.36	13.00	Pass
Mid	4.14	5.36	4.98	6.08	13.00	Pass
High	3.78	5.52	4.58	6.12	13.00	Pass

LTE Band 5-10MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	4.06	5.8	5.18	6.44	13.00	Pass
Mid	4.34	5.96	4.92	6.56	13.00	Pass
High	4.20	5.26	5.08	6.02	13.00	Pass

LTE Band 7-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	2.70	5.06	3.76	5.84	13.00	Pass
Mid	3.20	5.10	3.82	5.80	13.00	Pass
High	3.34	5.14	4.26	5.90	13.00	Pass

6. Test Setup Photos of the EUT

Radiated emission:

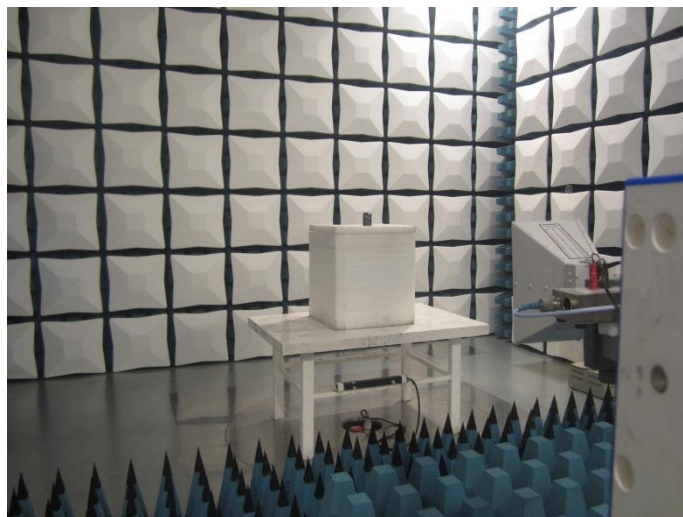

7. External and Internal Photos of the EUT

Reference to the test report No.: TRE1703015501.

.....**End of Report**.....