

TEST REPORT

Report No.: 20120556HKG-002

Application For Class II Permissive Change of 47 CFR Part 15 Certification

DECT 6.0 Cordless Telephone with Bluetooth - Base Unit

FCC ID: EW780-0835-00

Prepared and Checked by:

Approved by:

Signed On File
Leung Chiu Kuen, Stanley
Engineer

Tang Kwan Mo, Jess
Lead Engineer
Date: April 13, 2021

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	VTech Telecommunications Ltd.
Grantee Address:	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2019 Edition
FCC ID:	EW780-0835-00
FCC Model(s):	DL72219, DL72XY9, DL72119, DL72319, DL72419, DL72210, DL72310, DL72340, DL72350, DL72XY0
Type of EUT:	Transceiver
Description of EUT:	DECT 6.0 Cordless Telephone with Bluetooth - Base Unit
Serial Number:	N/A
Sample Receipt Date:	December 11, 2020
Date of Test:	December 11, 2020 to March 26, 2021
Report Date:	April 13, 2021
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

TEST REPORT

TABLE OF CONTENTS

1.0	TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE	4
1.1	Summary of Test Results	4
1.2	Statement of Compliance	4
2.0	GENERAL DESCRIPTION	5
2.1	Product Description	5
2.2	Test Methodology	5
2.2	Purpose of Change	5
2.3	Test Facility	5
3.0	SYSTEM TEST CONFIGURATION.....	6
3.1	Justification	6
3.2	EUT Exercising Software	7
3.3	Radiated Emission Test Setup	8
3.4	Conducted Emission Test Setup	9
3.5	Details of EUT and Description of Accessories.....	10
3.6	Measurement Uncertainty	10
4.0	TEST RESULTS.....	11
4.1	Field Strength Calculation	11
4.2	Radiated Emissions.....	12
4.2.1	Radiated Emission Configuration Photograph	12
4.2.2	Radiated Emission Data	12
4.2.3	Transmitter Duty Cycle Calculation	19
4.3	AC Power Line Conducted Emission	23
4.3.1	AC Power Line Conducted Emission Configuration Photograph	23
4.3.2	AC Power Line Conducted Emission Data.....	23
5.0	EQUIPMENT LIST	30

TEST REPORT

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details See Section
Radiated Emission	15.249(a), 209, & 109	Pass	4.2
Radiated Emission on the Bandedge	15.249(d)	Pass	4.3
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.4

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2019 Edition

TEST REPORT

2.0 GENERAL DESCRIPTION

2.1 Product Description

The DL72219 is a DECT 6.0 Cordless Telephone with Bluetooth - Base Unit. It operates at frequency range of 2402MHz to 2480MHz. The Base Unit is powered by an AC adaptor 100-120VAC 60Hz 150mA.

The Bluetooth antenna used in base unit is integral, and the test sample is a prototype.

The Model(s): DL72XY9, DL72119, DL72319, DL72419, DL72210, DL72310, DL72340, DL72350 and DL72XY0 is the same as the Model: DL72219 in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure as declared by client. The only differences between these models are color, cosmetic details, model number, package type, number of Handset and Charger to be sold for marketing purpose as declared by client. Suffix ("X, Y" in DL72XY9 and DL72XY0) indicates different number of handset and extra charger, and different package type or different color of enclosure.

The circuit description is saved with filename: descri.pdf.

Connection between the device and the telephone network is accomplished through the use of USOC RJ11C in the 2-wire loop calling central office line.

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014) and ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in Radiated Emission Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

2.3 Purpose of Change

The purpose of change is saved with filename: product change.pdf

2.4 Test Facility

The radiated emission test sites and conducted measurement facility used to collect the radiated data and conducted data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC.

TEST REPORT

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit continuously mode to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The Base Unit was powered by a 100-120VAC 60Hz 150mA to 6.0VDC 400mA adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. If the base unit attached to peripherals, they were connected and operational to simulate typical use. The handset was remotely located as far from the antenna and the base as possible to ensure full power transmission from the base. Else, the base was wired to transmit full power.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

Radiated emission measurement for transmitter was performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitry used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 Limits.

The DECT module was put into transmission mode when taking radiated emission data for determining worst-case spurious emission.

TEST REPORT

3.1 Justification - Cont'd

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.2.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was 625 μ s. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes and different type of adaptors have been tested, and the worst case data is included in this report.

3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

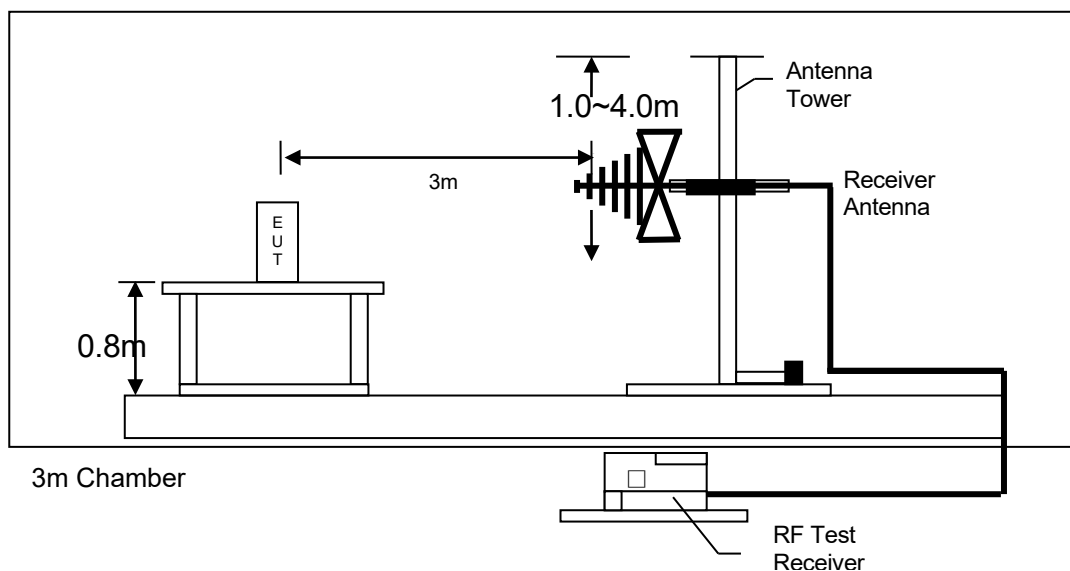


Figure 3.3.1 Test setup of radiated emissions up to 1GHz

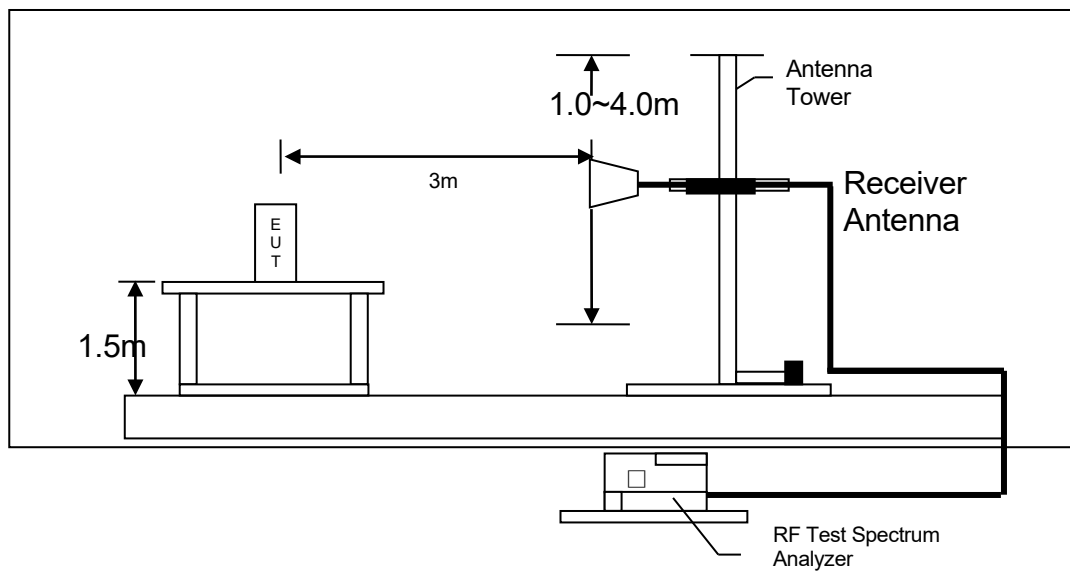


Figure 3.3.2 Test setup of radiated emissions above 1GHz

TEST REPORT

3.4 Conducted Emission Test Setup

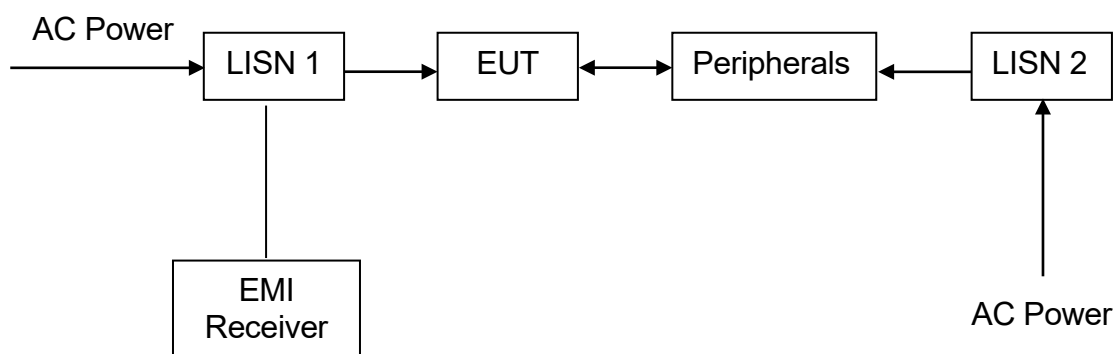


Figure 3.4.1

TEST REPORT

3.5 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-120VAC 60Hz 150mA to 6.0VDC 400mA, Model: VT05UUS06040, Brand Name: VTPL) (Supplied by Client)
- (2) An AC adaptor (100-120VAC 60Hz 150mA to 6.0VDC 400mA, Model: S003AKU0600040, Brand Name: Ten Pao) (Supplied by Client)
- (3) An AC adaptor (100-120VAC 50-60Hz 0.15A to 6.0VDC 0.4A, Model: A318-060040W-US1, Brand Name: Ao Hai) (Supplied by Client)

Description of Accessories:

- (1) Telecommunication cable with RJ11C connectors (1m, unshielded), terminated (Supplied by Intertek)
- (2) Handset, Model: DL72XY9 (FCC ID: EW780-9854-00) (Supplied by Client)

3.6 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level ($k=2$). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted test, frequency stability and timing jitter are $\pm 5.3\text{dB}$, $\pm 4.2\text{dB}$, $\pm 1\text{dB}$, $\pm 23\text{Hz}$, $0.1\mu\text{s}$ respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

TEST REPORT

4.0 TEST RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

4.2 Radiated Emissions

4.2.1 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
at

48.826 MHz

The worst case radiated emission configuration photographs are saved with filename: config photos.pdf

4.2.2 Radiated Emission Data

The data in tables 1-6 list the significant emission frequencies, the limit and the margin of compliance. Test setup is shown in section 3.3 Figure 3.3.1 and 3.3.2.

Judgement -

Passed by 5.6 dB margin

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 00 with VTPL adaptor

Table 1, Base Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2402.000	94.4	33	29.4	90.8	24	66.8	94.0	-27.2
V	4804.000	43.3	33	34.9	45.2	24	21.2	54.0	-32.8
V	7206.000	40.7	33	37.9	45.6	24	21.6	54.0	-32.4
V	9608.000	40.5	33	40.4	47.9	24	23.9	54.0	-30.2
H	12010.000	43.3	33	40.5	50.8	24	26.8	54.0	-27.2
V	14412.000	47.7	33	40.0	54.7	24	30.7	54.0	-23.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2402.000	94.4	33	29.4	90.8	114.0	-23.2
V	4804.000	43.3	33	34.9	45.2	74.0	-28.8
V	7206.000	40.7	33	37.9	45.6	74.0	-28.4
V	9608.000	40.5	33	40.4	47.9	74.0	-26.2
H	12010.000	43.3	33	40.5	50.8	74.0	-23.2
V	14412.000	47.7	33	40.0	54.7	74.0	-19.3

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 39 with VTPL adaptor

Table 2, Base Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2442.000	93.6	33	29.4	90.0	24	66.0	94.0	-28.0
H	4884.000	42.9	33	34.9	44.8	24	20.8	54.0	-33.2
V	7326.000	40.8	33	37.9	45.7	24	21.7	54.0	-32.3
V	9768.000	39.6	33	40.4	47.0	24	23.0	54.0	-31.0
H	12210.000	42.8	33	40.5	50.3	24	26.3	54.0	-27.7
V	14652.000	49.7	33	38.4	55.1	24	31.1	54.0	-22.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2442.000	93.6	33	29.4	90.0	114.0	-24.0
H	4884.000	42.9	33	34.9	44.8	74.0	-29.2
V	7326.000	40.8	33	37.9	45.7	74.0	-28.3
V	9768.000	39.6	33	40.4	47.0	74.0	-27.0
H	12210.000	42.8	33	40.5	50.3	74.0	-23.7
V	14652.000	49.7	33	38.4	55.1	74.0	-18.9

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 78 with VTPL adaptor

Table 3, Base Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2480.000	94.1	33	29.4	90.5	24	66.5	94.0	-27.5
V	4960.000	43.2	33	34.9	45.1	24	21.1	54.0	-32.9
V	7440.000	40.9	33	37.9	45.8	24	21.8	54.0	-32.2
V	9920.000	40.8	33	40.4	48.2	24	24.2	54.0	-29.8
V	12400.000	42.7	33	40.5	50.2	24	26.2	54.0	-27.9
V	14880.000	48.6	33	38.4	54.0	24	30.0	54.0	-24.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2480.000	94.1	33	29.4	90.5	114.0	-23.5
V	4960.000	43.2	33	34.9	45.1	74.0	-28.9
V	7440.000	40.9	33	37.9	45.8	74.0	-28.2
V	9920.000	40.8	33	40.4	48.2	74.0	-25.8
V	12400.000	42.7	33	40.5	50.2	74.0	-23.9
V	14880.000	48.6	33	38.4	54.0	74.0	-20.0

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: Bluetooth Ringing and Charging with Ten Pao adaptor

Table 4, Base Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	54.943	36.4	16	11.0	31.4	40.0	-8.6
V	59.913	34.9	16	10.0	28.9	40.0	-11.1
V	131.519	30.9	16	14.0	28.9	43.5	-14.6
V	207.203	27.7	16	17.0	28.7	43.5	-14.8
V	262.656	24.3	16	21.0	29.3	46.0	-16.7
H	414.634	19.9	16	25.0	28.9	46.0	-17.1

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: Bluetooth Ringing and Charging with VTPL adaptor

Table 5, Base Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	32.678	31.9	16	10.0	25.9	40.0	-14.1
V	48.826	39.4	16	11.0	34.4	40.0	-5.6
V	53.527	34.7	16	11.0	29.7	40.0	-10.3
V	125.669	27.4	16	14.0	25.4	43.5	-18.1
V	207.081	31.2	16	17.0	32.2	43.5	-11.3
V	290.322	23.6	16	22.0	29.6	46.0	-16.4

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: Bluetooth Ringing and Charging with Ao Hai adaptor

Table 6, Base Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	131.641	27.0	16	14.0	25.0	43.5	-18.5
V	150.409	28.3	16	14.0	26.3	43.5	-17.2
V	209.519	25.9	16	17.0	26.9	43.5	-16.6
V	262.656	25.6	16	21.0	30.6	46.0	-15.4
H	290.322	22.8	16	22.0	28.8	46.0	-17.2
V	518.399	22.3	16	27.0	33.3	46.0	-12.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

4.2.3 Transmitter Duty Cycle Calculation

Based on the Bluetooth Specification Version 2.0 / 2.1 + EDR, the transmitter ON time for each timeslot of Bluetooth is 625µs. DH5 has the maximum duty cycle, which consists of 5 continuous Tx slots and 1 Rx slot. Therefore one hopset take $(5+1) \times 625\mu s = 3.75ms$. For one period for a pseudo-random hopping through at least 20 RF channels in adaptive mode (worst case), it take: $20 \times 3.75ms = 75ms$.

The dwell time for DH5 is $5 \times 625\mu s = 3.125ms$

For the worst case calculation, there are two transmissions might occur in 100ms.

Therefore,

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in } 100ms / 100ms \\ &= 3.125ms \times 2 / 100ms \\ &= 0.0625\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF) of Bluetooth in dB} &= 20 \log_{10} (0.0625) \\ &= -24.0dB\end{aligned}$$

TEST REPORT

4.3 Radiated Emission on the Bandedge


From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz and 2483.5MHz). In case of emissions up to two standard bandwidths away from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.4 (2014) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in FCC Part 15 Section 15.209, whichever is the lesser attenuation, which meet the requirement of FCC Part 15 Section 15.249(d).


The plots of radiated emission on the bandedge are saved as below.

TEST REPORT

BASE UNIT WITH BLUETOOTH PORTION, LOWEST CHANNEL

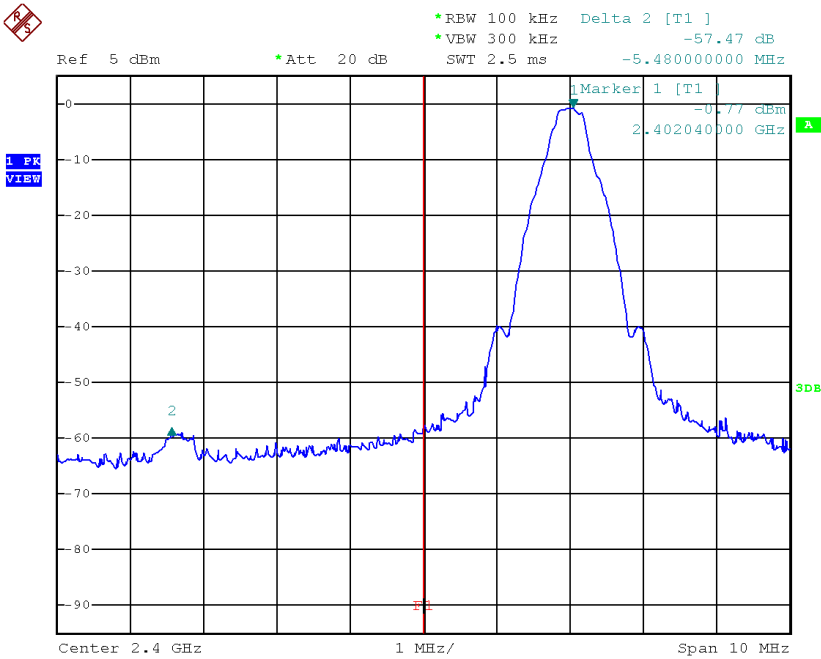

BASE UNIT WITH BLUETOOTH PORTION, HIGHEST CHANNEL

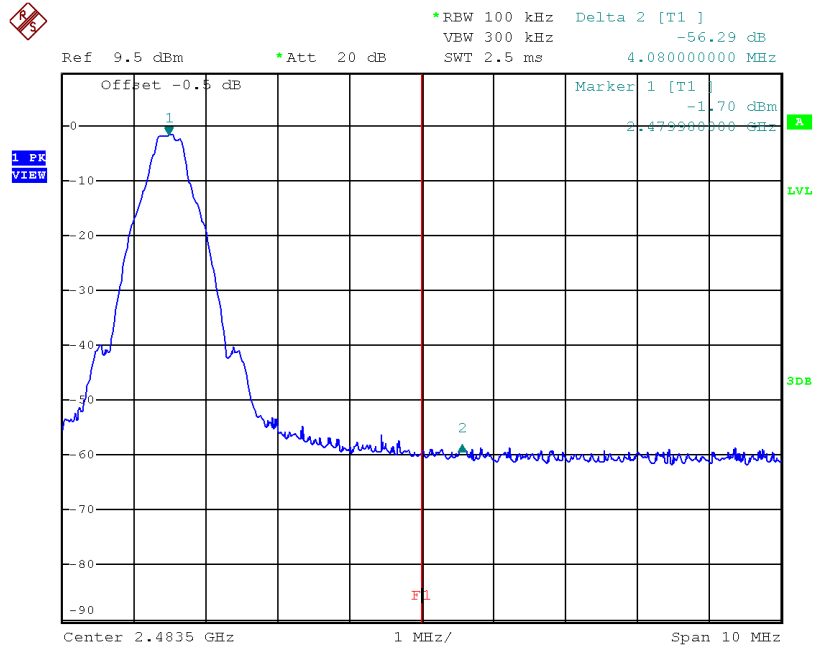

TEST REPORT

Bandedge compliance is determined by applying marker-delta method, i.e.

Resultant Field Strength = Fundamental Emissions - Delta from the plot

Resultant field strength for the lowest and/or highest channel(s), with corresponding average values are calculated as follows:

Channel	Fundamental Emission (dBμV/m)	Delta from the Plot (dB)	Resultant Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
Lowest	66.8	57.47	9.33	54	-44.67
Highest	66.5	56.29	10.21	54	-43.79

Channel	Fundamental Emission (dBμV/m)	Delta from the Plot (dB)	Resultant Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
Lowest	90.8	57.47	33.33	74	-40.67
Highest	90.5	56.29	34.21	74	-39.79

The resultant field strength meets the general radiated emission limit in FCC Part 15 Section 15.209, which does not exceed 74dBμV/m for peak limit and also 54dBμV/m for average limit.

TEST REPORT

4.4 AC Power Line Conducted Emission

- [] Not applicable – EUT is only powered by battery for operation.
- [x] EUT connects to AC power line. Emission Data is listed in following pages.
- [] Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

Test setup is shown in section 3.4 Figure 3.4.1.

4.4.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

2.6475 MHz

The worst case line conducted configuration photographs are saved with filename: config photos.pdf.

4.4.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 6.92 dB margin compared with quasi-peak limit

TEST REPORT

CONDUCTED EMISSION DATA

Worst Case: Bluetooth Ringing and Charging with Ten Pao adaptor

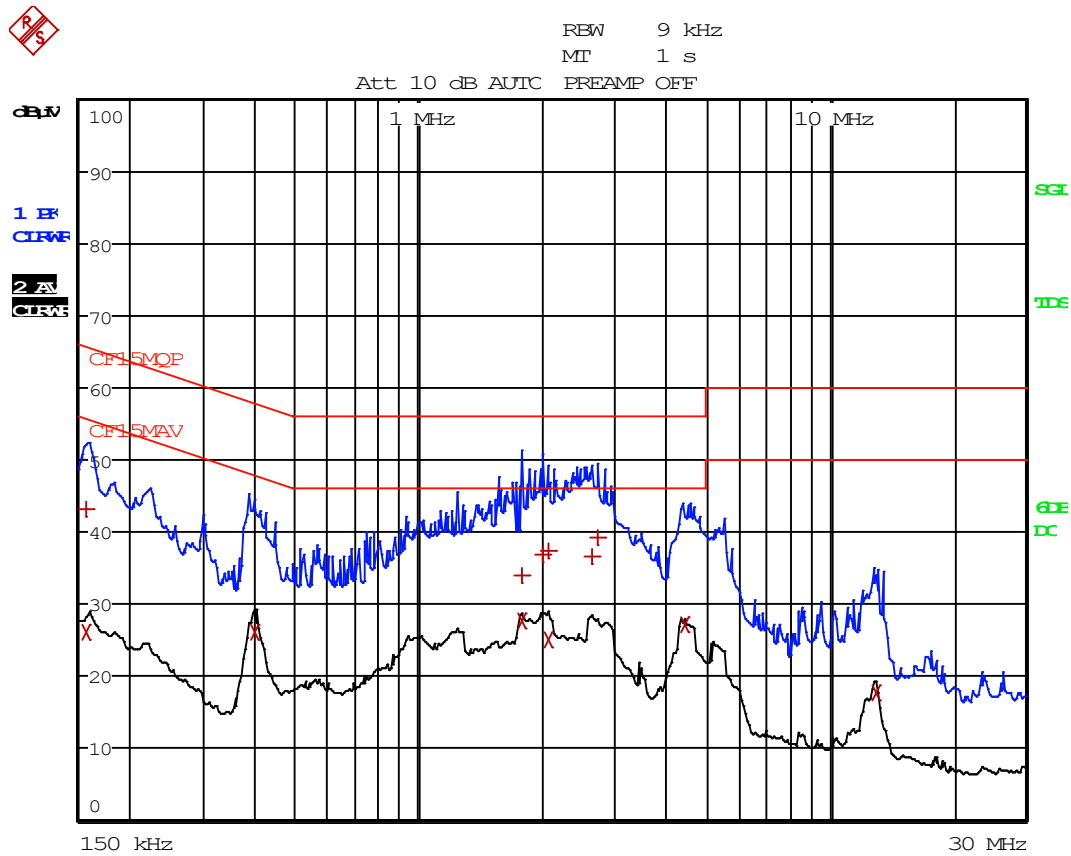


TEST REPORT

Worst Case: Bluetooth Ringing and Charging with Ten Pao adaptor

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	159 kHz	43.26	N	-22.25
2 CISPR Average	159 kHz	26.15	N	-29.36
2 CISPR Average	397.5 kHz	26.06	N	-21.84
1 Quasi Peak	1.7835 MHz	34.11	N	-21.88
2 CISPR Average	1.7835 MHz	27.59	L1	-18.40
1 Quasi Peak	2.004 MHz	36.76	N	-19.23
2 CISPR Average	2.0625 MHz	25.02	L1	-20.97
1 Quasi Peak	2.0805 MHz	37.36	L1	-18.63
1 Quasi Peak	2.6475 MHz	36.53	N	-19.46
1 Quasi Peak	2.742 MHz	39.12	L1	-16.87
2 CISPR Average	4.443 MHz	27.11	N	-18.88
2 CISPR Average	12.9705 MHz	17.69	L1	-32.30

TEST REPORT

Worst Case: Bluetooth Talk with VTPL adaptor

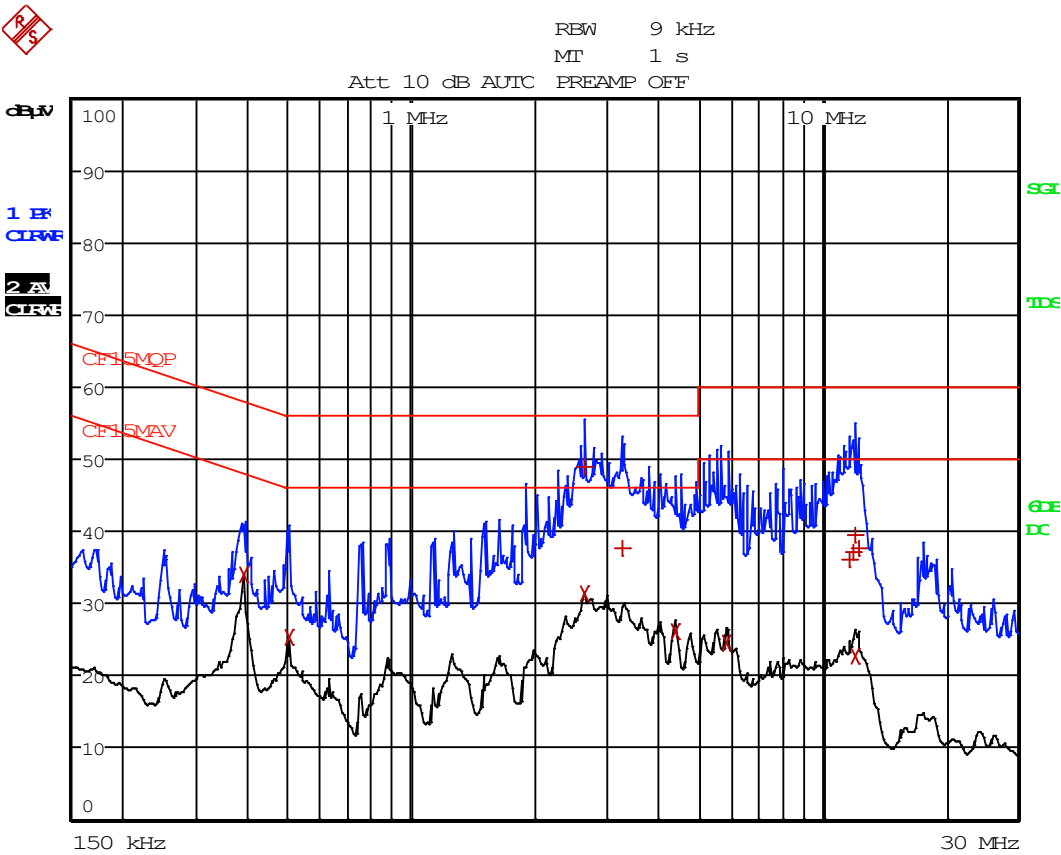


TEST REPORT

Worst Case: Bluetooth Talk with VTPL adaptor

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA LIMIT dB
2 CISPR Average	388.5 kHz	34.06	L1	-14.03
2 CISPR Average	501 kHz	25.42	L1	-20.57
1 Quasi Peak	2.6475 MHz	49.07	L1	-6.92
2 CISPR Average	2.6475 MHz	31.30	N	-14.69
1 Quasi Peak	3.2865 MHz	37.68	N	-18.31
2 CISPR Average	4.4115 MHz	26.15	N	-19.84
2 CISPR Average	5.8695 MHz	24.63	L1	-25.36
1 Quasi Peak	11.6565 MHz	36.06	L1	-23.93
1 Quasi Peak	11.8725 MHz	37.20	N	-22.79
1 Quasi Peak	12.0165 MHz	39.47	L1	-20.52
2 CISPR Average	12.0165 MHz	22.70	N	-27.29
1 Quasi Peak	12.2865 MHz	37.73	N	-22.27

TEST REPORT

Worst Case: Bluetooth Talk with Ao Hai adaptor

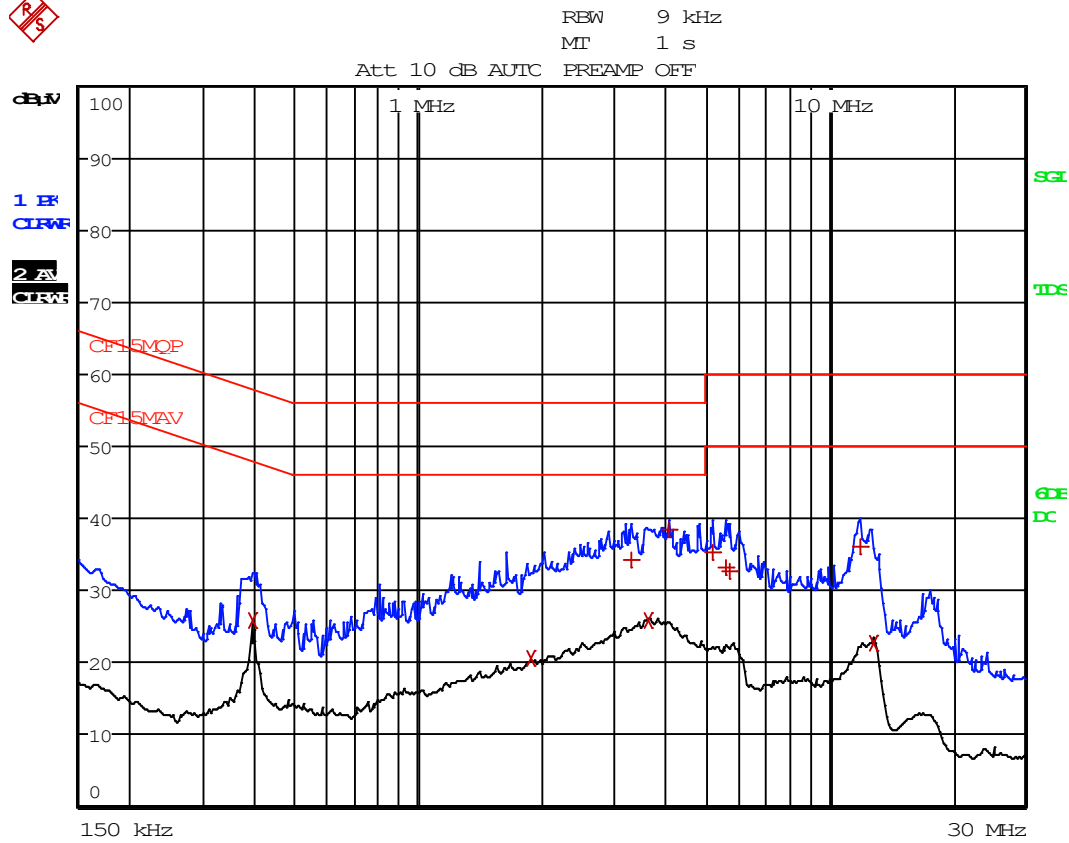

TEST REPORT

Worst Case: Bluetooth Talk with Ao Hai adaptor

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV		DELTA LIMIT dB
2 CISPR Average	393 kHz	25.73	N	-22.26
2 CISPR Average	1.8915 MHz	20.51	L1	-25.48
1 Quasi Peak	3.3135 MHz	34.35	N	-21.64
2 CISPR Average	3.651 MHz	25.81	N	-20.18
1 Quasi Peak	4.092 MHz	38.49	L1	-17.50
1 Quasi Peak	5.199 MHz	35.36	N	-24.63
1 Quasi Peak	5.64 MHz	33.30	N	-26.69
1 Quasi Peak	5.739 MHz	32.76	N	-27.23
1 Quasi Peak	11.8815 MHz	36.10	N	-23.89
2 CISPR Average	12.8625 MHz	22.62	L1	-27.37

TEST REPORT

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	BiConiLog Antenna (30MHz - 6GHz)
Registration No.	EW-3156	EW-2466	EW-3408
Manufacturer	ROHDESCHWARZ	R&S	EMCO
Model No.	ESR26	FSP30	
Calibration Date	September 30, 2020	September 05, 2020	October 25, 2020
Calibration Due Date	September 30, 2021	September 05, 2021	October 25, 2021

Equipment	14m Double Shield RF Cable (20MHz - 6GHz)	High Frequency Coaxial Cable Assembly (4 pcs)	Double Ridged Guide Antenna
Registration No.	EW-2074	EW-2107	EW-0194
Manufacturer	RADIALL	RADIALL	EMCO
Model No.	N(m)-RG142-BNC(m) L= 14M	SMA(m)-SHF5MPU- SMA(m) R.A 14m	3115
Calibration Date	August 29, 2020	July 03, 2020	September 26, 2019
Calibration Due Date	August 29, 2021	July 03, 2021	March 26, 2021

2) Conducted Emissions Test

Equipment	EMI Test Receiver	RF Cable 80cm (RG142) (9kHz to 30MHz)	LISN
Registration No.	EW-3156	EW-2452	EW-2501
Manufacturer	ROHDESCHWARZ	RADIALL	R&S
Model No.	ESR26	bnc m st / 142 / bnc m st 80cm	ENV-216
Calibration Date	September 30, 2020	November 10, 2020	September 11, 2020
Calibration Due Date	September 30, 2021	November 10, 2021	September 11, 2021

3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2466
Manufacturer	R&S
Model No.	FSP30
Calibration Date	September 05, 2020
Calibration Due Date	September 05, 2021

END OF TEST REPORT