



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road,
Nanshan District, Shenzhen, 518057 China

FCC ID: YAMBP5XXVHF

Product Name: Digital Portable Radio

Model Number: BP562 VHF, BP560 VHF, BP565 VHF,
BP566 VHF, BP568 VHF, BP569 VHF,
BP510 VHF, BP512 VHF, BP515 VHF,
BP516 VHF, BP518 VHF, BP519 VHF,
HP360 VHF, HP362 VHF, HP365 VHF,
HP366 VHF, HP368 VHF, HP369 VHF,
HP310 VHF, HP312 VHF, HP315 VHF,
HP316 VHF, HP318 VHF, HP319 VHF

Standard(s): FCC PART 22, 74, 80 and 90
ANSI C63.26-2015
TIA-603-E-2016

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21110027-00D

Date Of Issue: 2022-02-07

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 RF OUTPUT POWER.....	10
3.1.1 Applicable Standard.....	10
3.1.2 Test Procedure	10
3.2 MODULATION CHARACTERISTIC:.....	10
3.2.1 Applicable Standard.....	10
3.2.2 Test Procedure	10
3.3 OCCUPIED BANDWIDTH & EMISSION MASK:	10
3.3.1 Applicable Standard.....	10
3.3.2 Test Procedure	10
3.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:	11
3.4.1 Applicable Standard.....	11
3.4.2 Test Procedure	11
3.5 RADIATED SPURIOUS EMISSIONS:	11
3.5.1 Applicable Standard.....	11
3.5.2 Test Procedure	11
3.6 FREQUENCY STABILITY:.....	12
3.6.1 APPLICABLE STANDARD.....	12
3.6.2 Test Procedure	12
3.7 TRANSIENT FREQUENCY BEHAVIOR.....	13
3.7.1 Applicable Standard.....	13
3.7.2 TEST PROCEDURE	13
4. Test DATA AND RESULTS	14
4.1 RF OUTPUT POWER	14
4.2 MODULATION CHARACTERISTIC:.....	20
4.3 OCCUPIED BANDWIDTH & EMISSION MASK:	25
4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:	37
4.5 RADIATED SPURIOUS EMISSIONS:	43

4.6 FREQUENCY STABILITY:.....52

4.7 TRANSIENT FREQUENCY BEHAVIOR.....56

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Digital Portable Radio
EUT Model:	BP562 VHF
Multiple Models:	BP560 VHF, BP565 VHF, BP566 VHF, BP568 VHF, BP569 VHF, BP510 VHF, BP512 VHF, BP515 VHF, BP516 VHF, BP518 VHF, BP519 VHF, HP360 VHF, HP362 VHF, HP365 VHF, HP366 VHF, HP368 VHF, HP369 VHF, HP310 VHF, HP312 VHF, HP315 VHF, HP316 VHF, HP318 VHF, HP319 VHF
Operation Frequency:	136-174 MHz
Modulation Type:	FM, 4FSK
Channel Spacing:	12.5 kHz /25 KHz
Rated Output Power: (Conducted)	High Power Level: 5W Low Power Level: 1W
Rated Input Voltage:	DC 7.4V from Battery, DC 5V from Type-C USB port or DC 12V from Charger
Serial Number:	CR21110027-RF-S1-S1 (Model: BP562 VHF) CR21110027-RF-S1-S2 (Model: BP512 VHF)
EUT Received Date:	2021.11.26
EUT Received Status:	Good
Note: The Multiple models are identical with Test model, please refer to the declaration letter for more detail, which was provided by manufacturer. All tests were performed with model BP562 VHF except radiation emission test, which was tested with two models.	

Antenna Information Detail ▲:

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
1	Hytera Communications Corporation Limited	External/ Vertical	50	0 dBi/136-150MHz
2		External/ Vertical	50	0 dBi/146-174MHz

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Hytera Communications Corporation Limited	HKA01212010-XQ	Input: 100-240V~50/60Hz 0.5A Output: 12V 1A

Test Frequency Detail:

Per C63.26-2015, section 5.1, the lowest frequency, middle frequency, and highest frequency was performed the test as below:

Modulation/ Channel Bandwidth	Test Channel	Frequency (MHz)	Rule Part
FM 12.5kHz	Lowest	136.0125	For Federal
	Middle	156.0	For Part 90
	Highest	173.9875	For Federal
	Additional	150.8125	For Part 22
	Additional	161.1	For Part 74
4FSK 12.5kHz	Lowest	136.0125	For Federal
	Middle	156.0	For Part 90
	Highest	173.9875	For Federal
	Additional	150.8125	For Part 22
	Additional	161.1	For Part 74
FM 25kHz	Additional	150.8125	For Part 22
	Additional	161.1	For Part 74
	Additional	154.0125	For Part 80

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
WEINSCHEL Corp	Load	50oml	50oml Load

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
\	\	\	\	\	\

1.2.4 Block Diagram of Test Setup

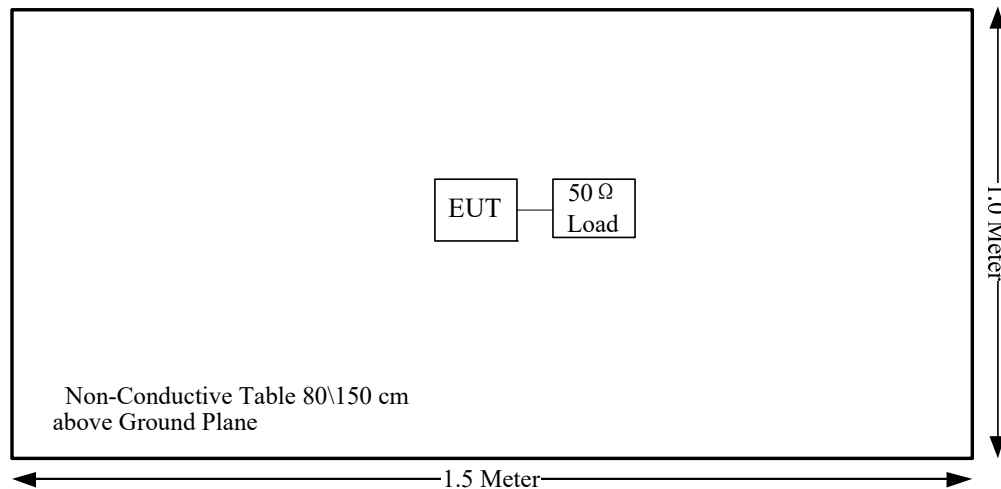

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{dB}$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1046; § 22.727; §80.215; §74.461; §90.205	RF Output Power	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1049; §22.357; § 22.731; §74.462; §80.205; §80.207 §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliant
§2.1051; §22.861; §74.462; §80.211; §90.210	Spurious Emission at Antenna Terminal	Compliant
§2.1053; §22.861; §74.462; §80.211; §90.210	Spurious Radiated Emissions	Compliant
§2.1055; § 22.355; §74.464; §80.209; §90.213	Frequency Stability	Compliant
§90.214	Transient Frequency Behavior	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 RF OUTPUT POWER

3.1.1 Applicable Standard

FCC §2.1046, § 22.727, §74.461, §80.215 and §90.205

3.1.2 Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

3.2 MODULATION CHARACTERISTIC:

3.2.1 Applicable Standard

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

3.2.2 Test Procedure

Test Method: TIA-603-E 2.2.3

3.3 OCCUPIED BANDWIDTH & EMISSION MASK:

3.3.1 Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, §80.205, §80.207, §90.209 and §90.210

3.3.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

3.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

3.4.1 Applicable Standard

FCC §2.1051, §22.861, §74.462, §80.211, and §90.210

3.4.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

3.5 RADIATED SPURIOUS EMISSIONS:

3.5.1 Applicable Standard

FCC §2.1053, §22.861, §74.462, §80.211 and §90.210

3.5.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

3.6 FREQUENCY STABILITY:

3.6.1 Applicable Standard

FCC §2.1055, § 22.355, §74.464, §80.209 and §90.213

3.6.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.


3.7 TRANSIENT FREQUENCY BEHAVIOR

3.7.1 Applicable Standard

Regulations: FCC §90.214

3.7.2 Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to “Video”, and tune the “trigger level” on suitable level. Then set the “tiger offset” to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

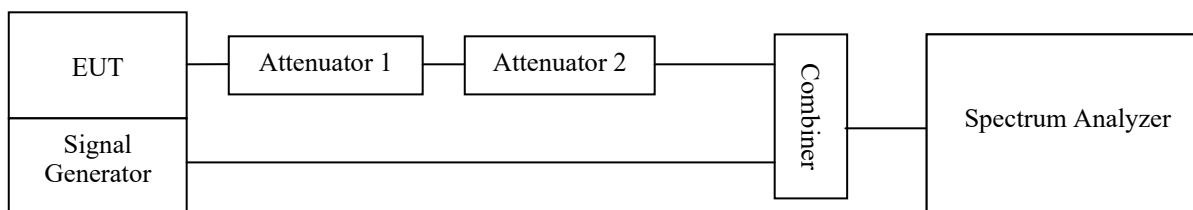

4. Test DATA AND RESULTS

4.1 RF OUTPUT POWER

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.8
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
BEW	Coaxial Attenuator	TS300-6-40	213311	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21






* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Modulation Mode	Channel Separation	f_c	Reading (dBm)	
		MHz	High Power Level	Low Power Level
FM	12.5kHz	136.0125	35.92	29.64
		155.7525	36.34	30.03
		173.9875	36.34	30.05
		150.8125	36.37	30.10
		161.1	36.29	29.87
4FSK	12.5kHz	136.0125	36.52	30.47
		155.7525	36.72	30.17
		173.9875	36.70	30.35
		150.8125	36.47	30.53
		161.1	36.52	29.97
FM	25kHz	150.8125	36.33	30.10
		161.1	36.36	29.92
		154.0125	36.30	30.02


Note:

The high rated power level is 5W(37dBm), and low rated power level is 1W(30dBm).


The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.(37.78dBm for High power level, 30.79dBm for Low power level)

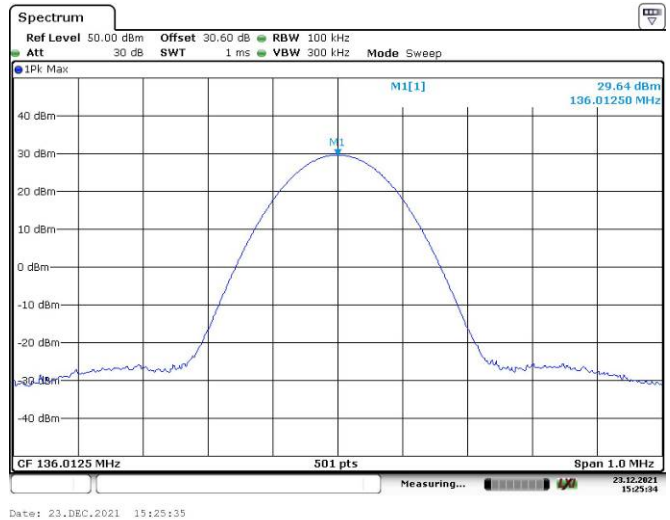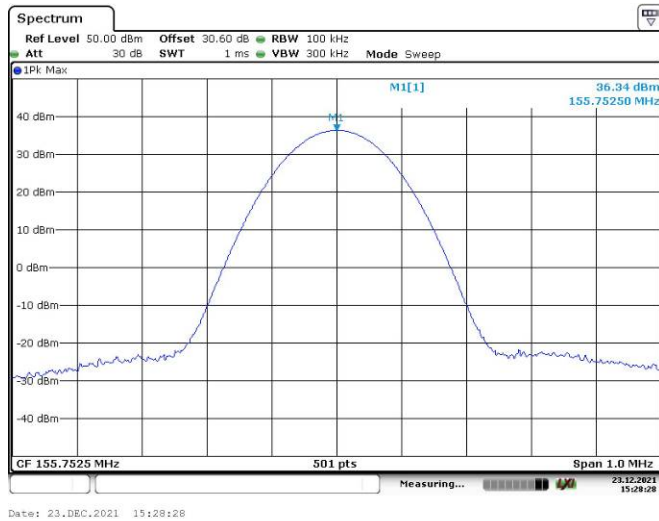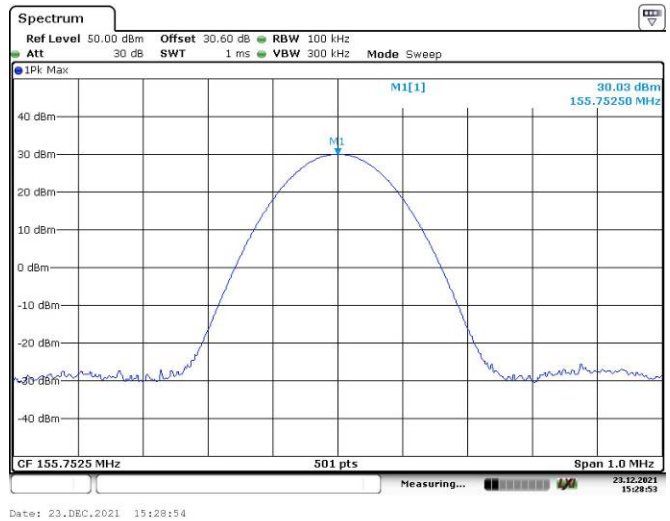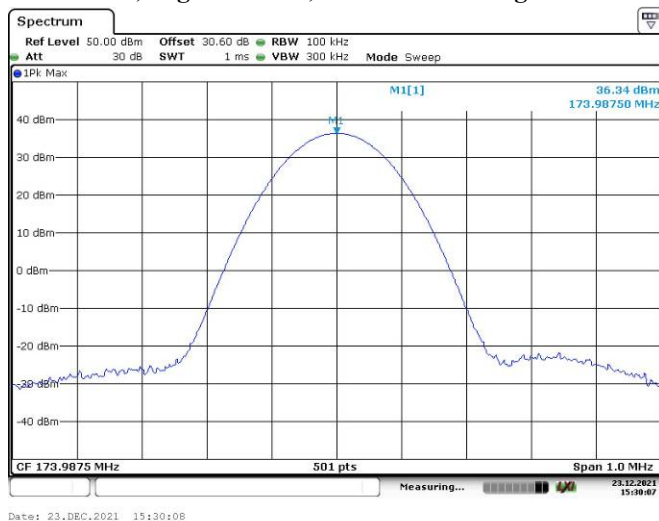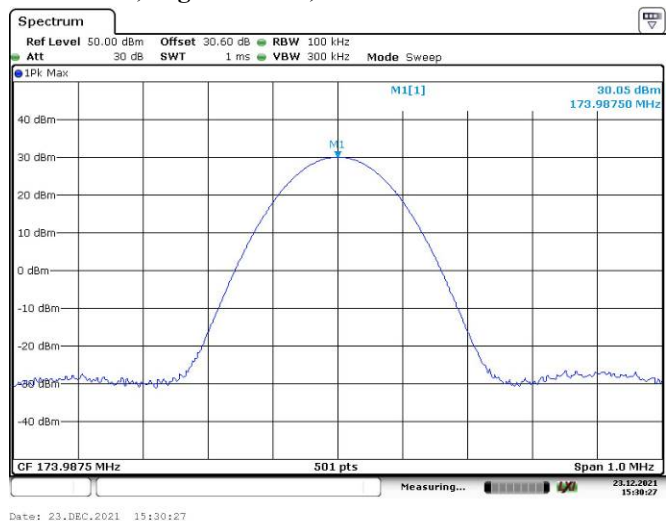FM, 12.5kHz:**Low Channel, 136.0125 MHz High Power****Low Channel, 136.0125 MHz Low Power****Part 90, Middle Channel, 155.7525 MHz High Power****Part 90, Middle Channel, 155.7525 MHz Low Power****Part 90, High Channel, 173.9875 MHz High Power****Part 90, High Channel, 173.9875 MHz Low Power**


Additional, For Part 22, 150.8125 MHz High Power

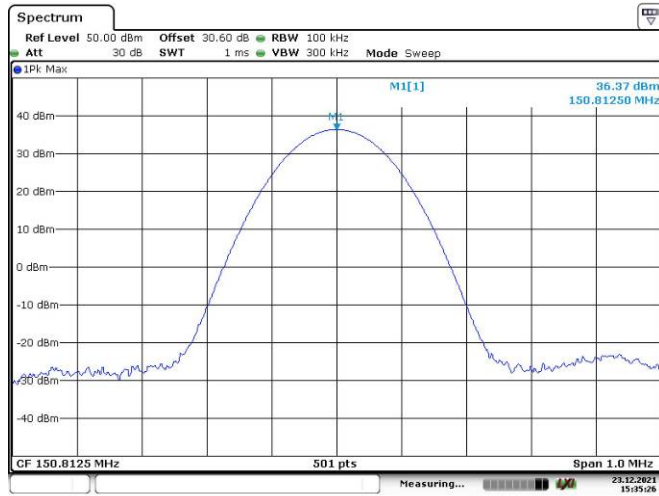


Additional, For Part 22, 150.8125 MHz Low Power






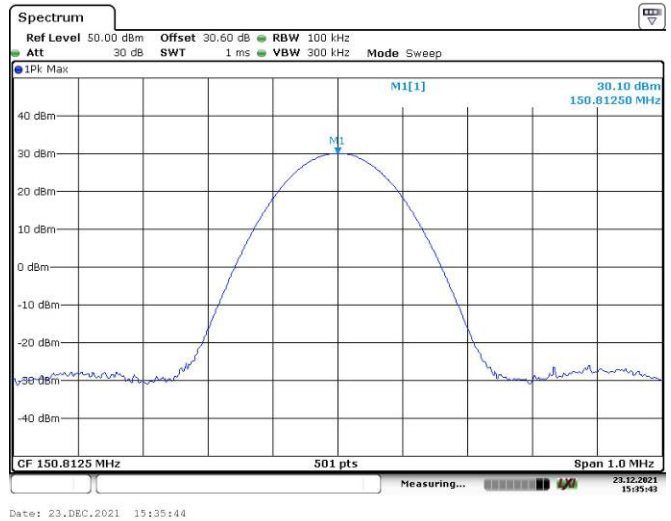


Additional, For Part 74, 161.1 MHz High Power

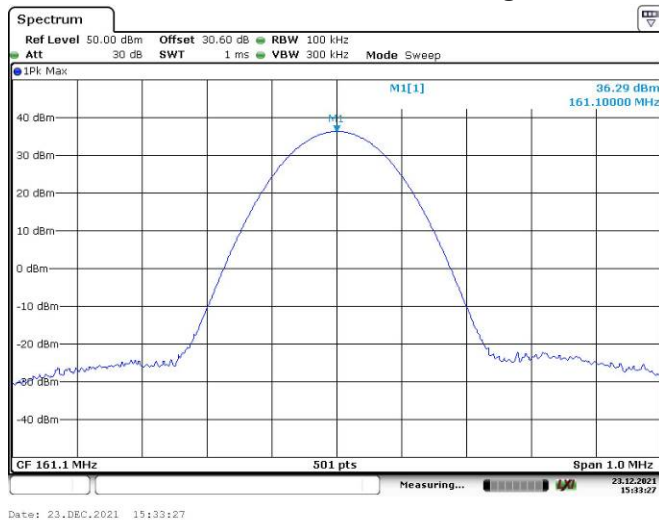


Additional, For Part 74, 161.1 MHz Low Power

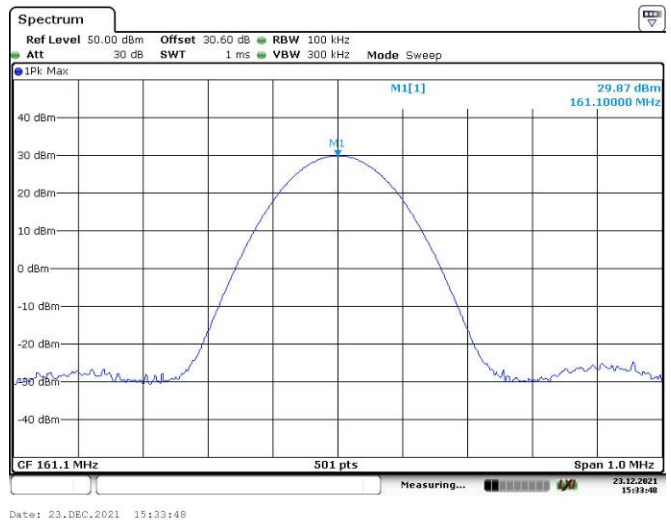

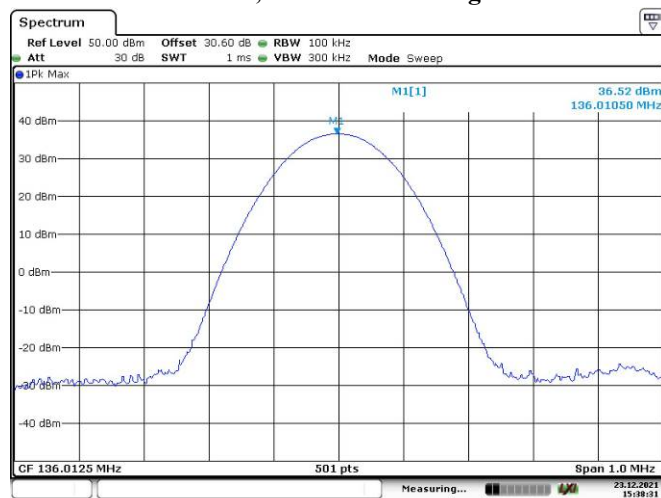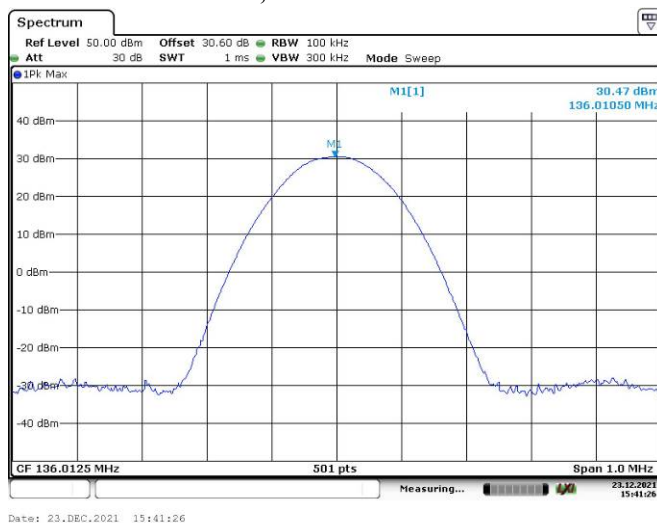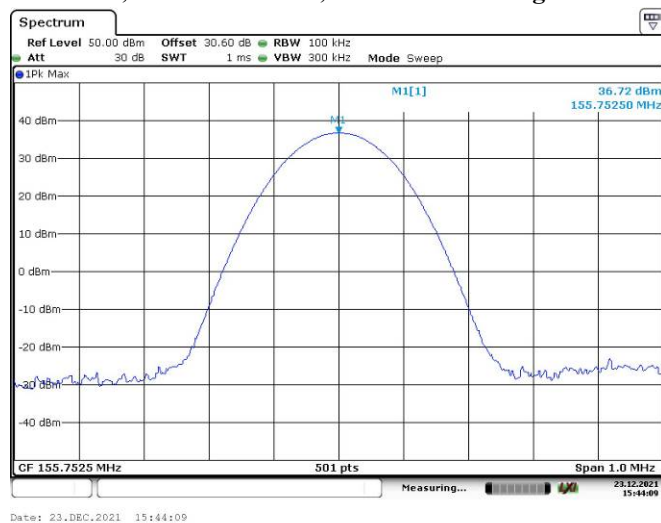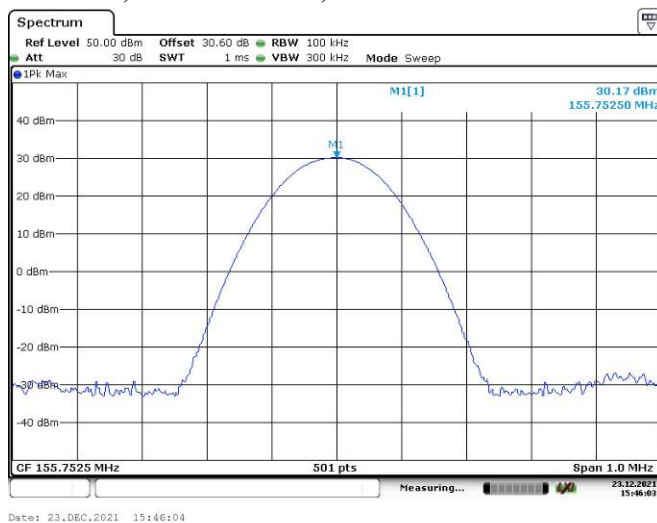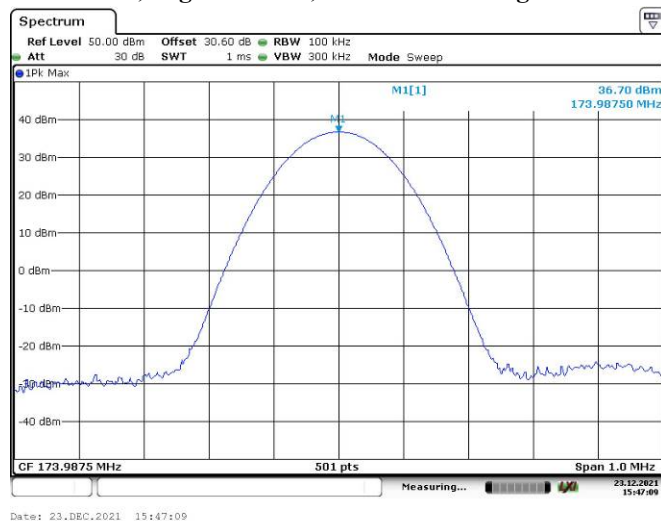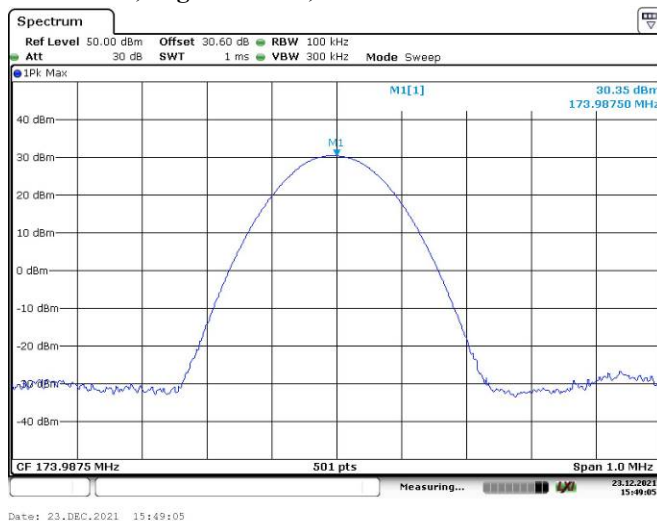
4FSK, 12.5kHz:**Low Channel, 136.0125 MHz High Power****Low Channel, 136.0125 MHz Low Power****Part 90, Middle Channel, 155.7525 MHz High Power****Part 90, Middle Channel, 155.7525 MHz Low Power****Part 90, High Channel, 173.9875 MHz High Power****Part 90, High Channel, 173.9875 MHz Low Power**

Additional, For Part 22, 150.8125 MHz High Power

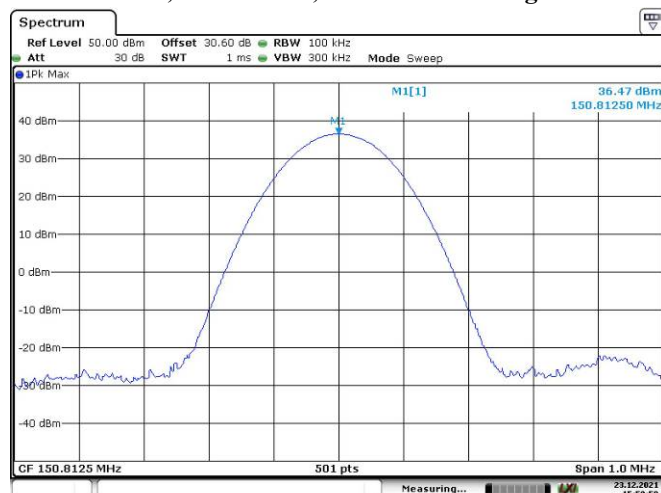


Date: 23.DEC.2021 15:50:59

Additional, For Part 22, 150.8125 MHz Low Power

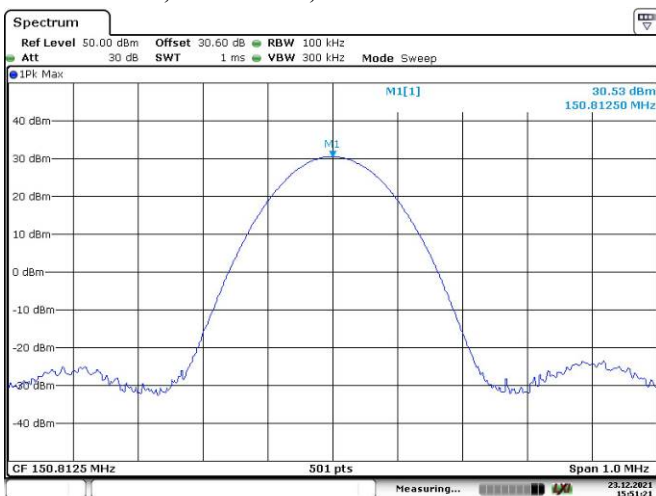

Date: 23.DEC.2021 15:51:22

Additional, For Part 74, 161.1 MHz High Power





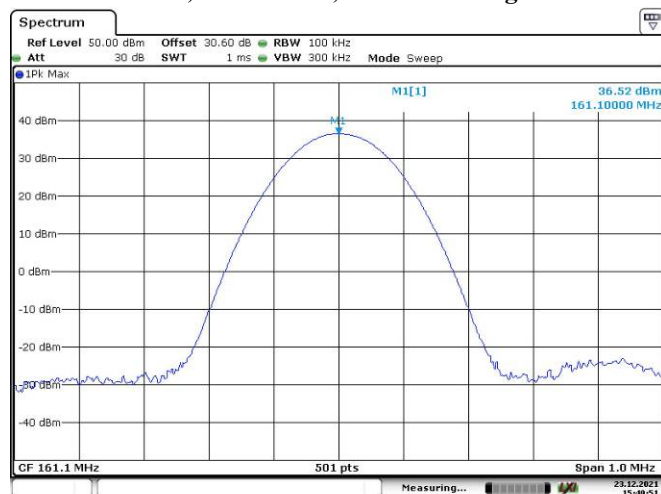


Date: 23.DEC.2021 15:49:51

Additional, For Part 74, 161.1 MHz Low Power



Date: 23.DEC.2021 15:50:11

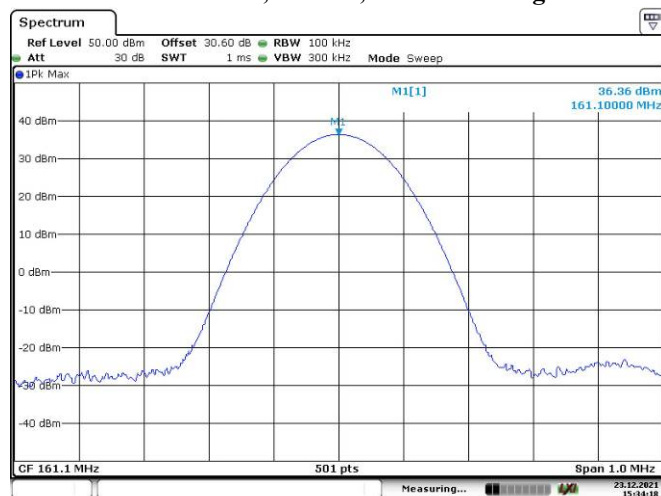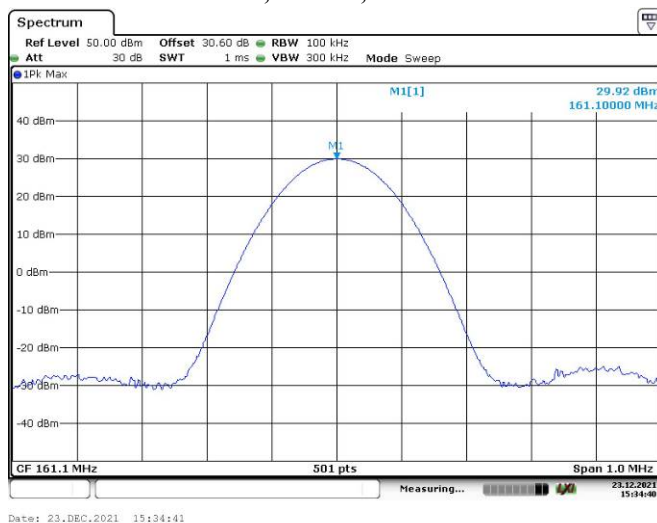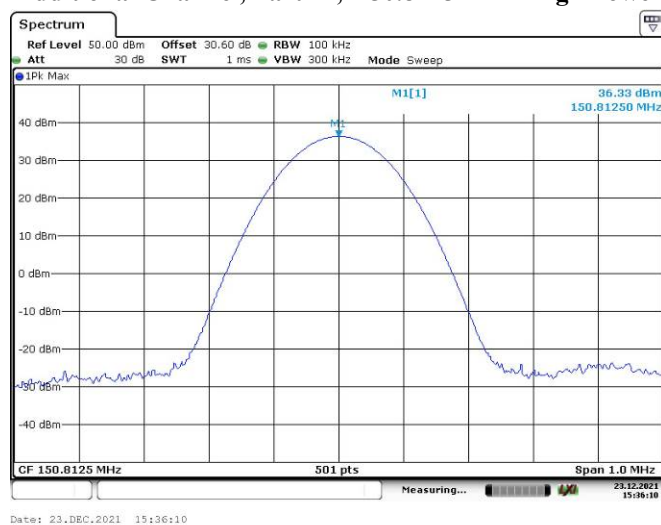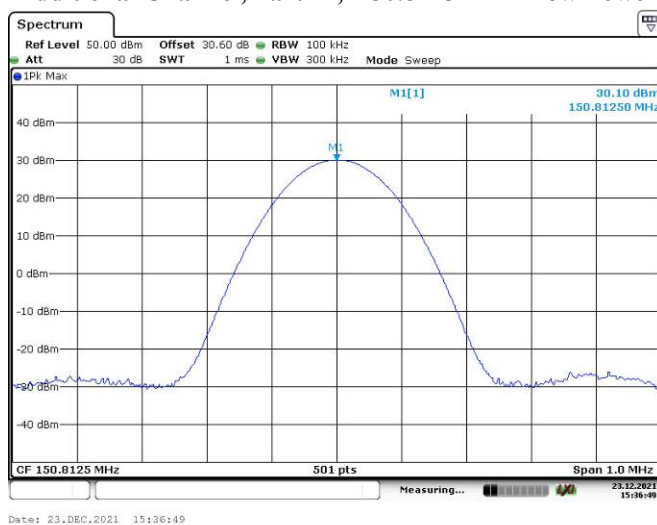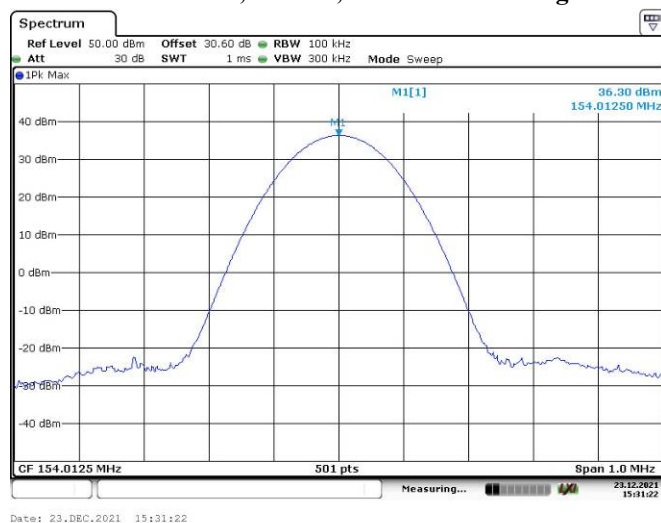FM, 25kHz:**Additional Channel, Part 74, 161.1 MHz High Power****Additional Channel, Part 74, 161.1 MHz Low Power****Additional Channel, Part 22, 150.8125 MHz High Power****Additional Channel, Part 22, 150.8125 MHz Low Power****Additional Channel, Part 80, 154.0125 MHz High Power****Additional Channel, Part 80, 154.0125 MHz Low Power**

4.2 MODULATION CHARACTERISTIC:

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.8



Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
BEW	Coaxial Attenuator	TS300-6-40	213311	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Audio Frequency Response – High Power

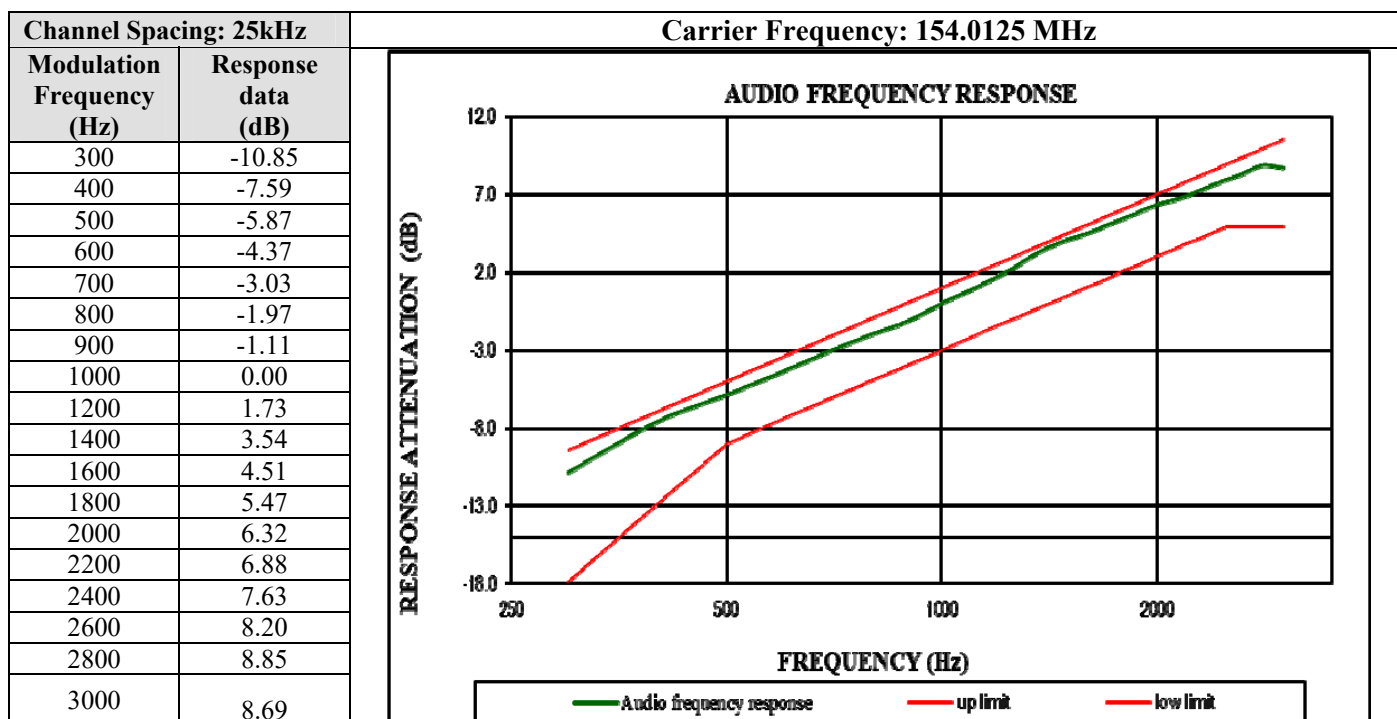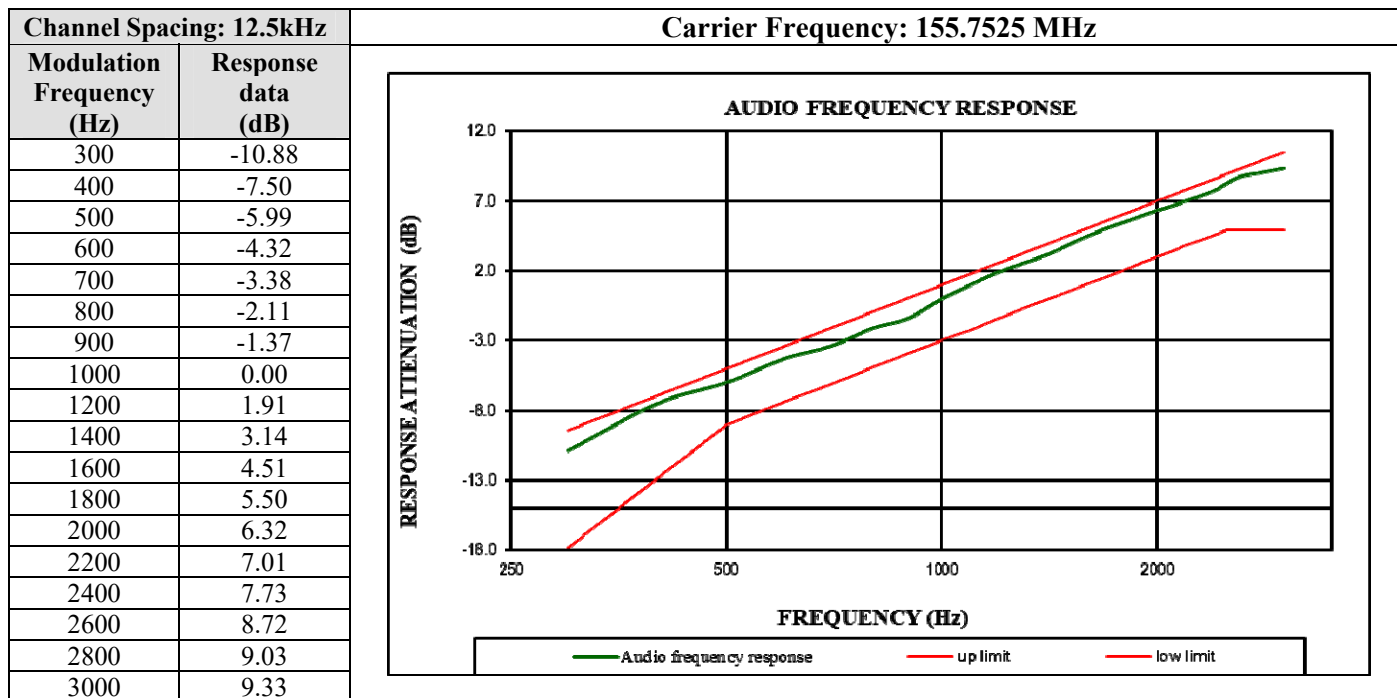


Modulation Limiting – High Power



Channel Spacing: 12.5kHz		Carrier Frequency: 155.7525 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	0.617	0.135	0.611	0.112	2.5
400	0.875	0.146	0.854	0.138	2.5
500	1.053	0.162	1.034	0.158	2.5
600	1.274	0.176	1.234	0.167	2.5
700	1.466	0.194	1.487	0.185	2.5
800	1.658	0.207	1.678	0.197	2.5
900	1.751	0.217	1.774	0.211	2.5
1000	1.756	0.232	1.768	0.227	2.5
1200	1.788	0.256	1.798	0.264	2.5
1400	1.763	0.296	1.782	0.282	2.5
1600	1.728	0.323	1.736	0.313	2.5
1800	1.786	0.356	1.794	0.345	2.5
2000	1.806	0.376	1.834	0.358	2.5
2200	1.845	0.394	1.869	0.384	2.5
2400	1.885	0.444	1.894	0.425	2.5
2600	1.878	0.477	1.897	0.467	2.5
2800	1.902	0.494	1.904	0.487	2.5
3000	1.848	0.522	1.821	0.514	2.5

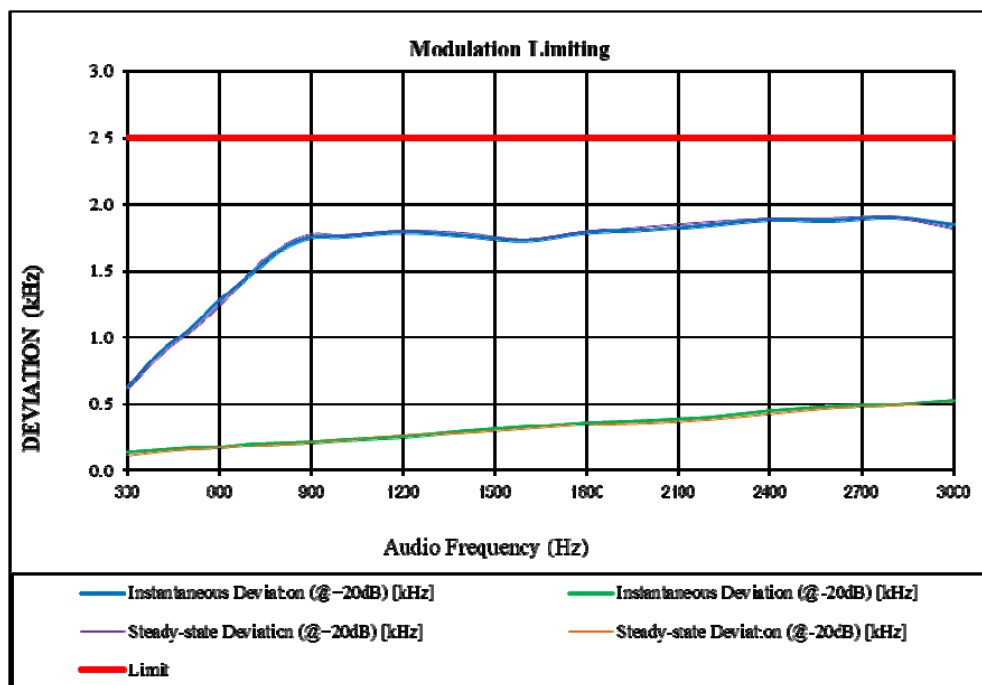

Channel Spacing: 25kHz		Carrier Frequency: 154.0125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.235	0.202	1.225	0.196	5
400	1.565	0.241	1.524	0.231	5
500	1.967	0.257	1.948	0.243	5
600	2.278	0.297	2.245	0.285	5
700	2.557	0.324	2.514	0.311	5
800	2.932	0.335	2.928	0.312	5
900	3.340	0.386	3.346	0.365	5
1000	3.695	0.425	3.645	0.411	5
1200	3.326	0.465	3.316	0.435	5
1400	3.353	0.584	3.335	0.564	5
1600	3.568	0.623	3.557	0.602	5
1800	3.834	0.654	3.821	0.637	5
2000	3.986	0.697	3.946	0.674	5
2200	3.936	0.794	3.911	0.768	5
2400	4.023	0.837	3.986	0.812	5
2600	4.038	0.925	4.011	0.934	5
2800	4.341	0.965	4.251	0.974	5
3000	4.245	1.045	4.212	0.980	5

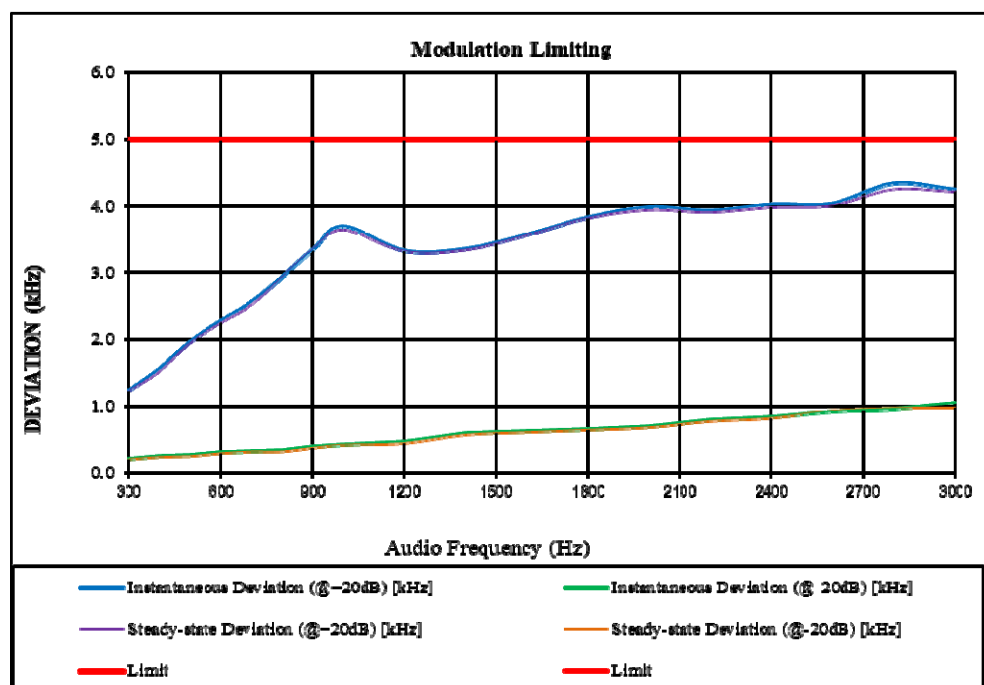

Audio Frequency Low Pass Filter Response – High Power

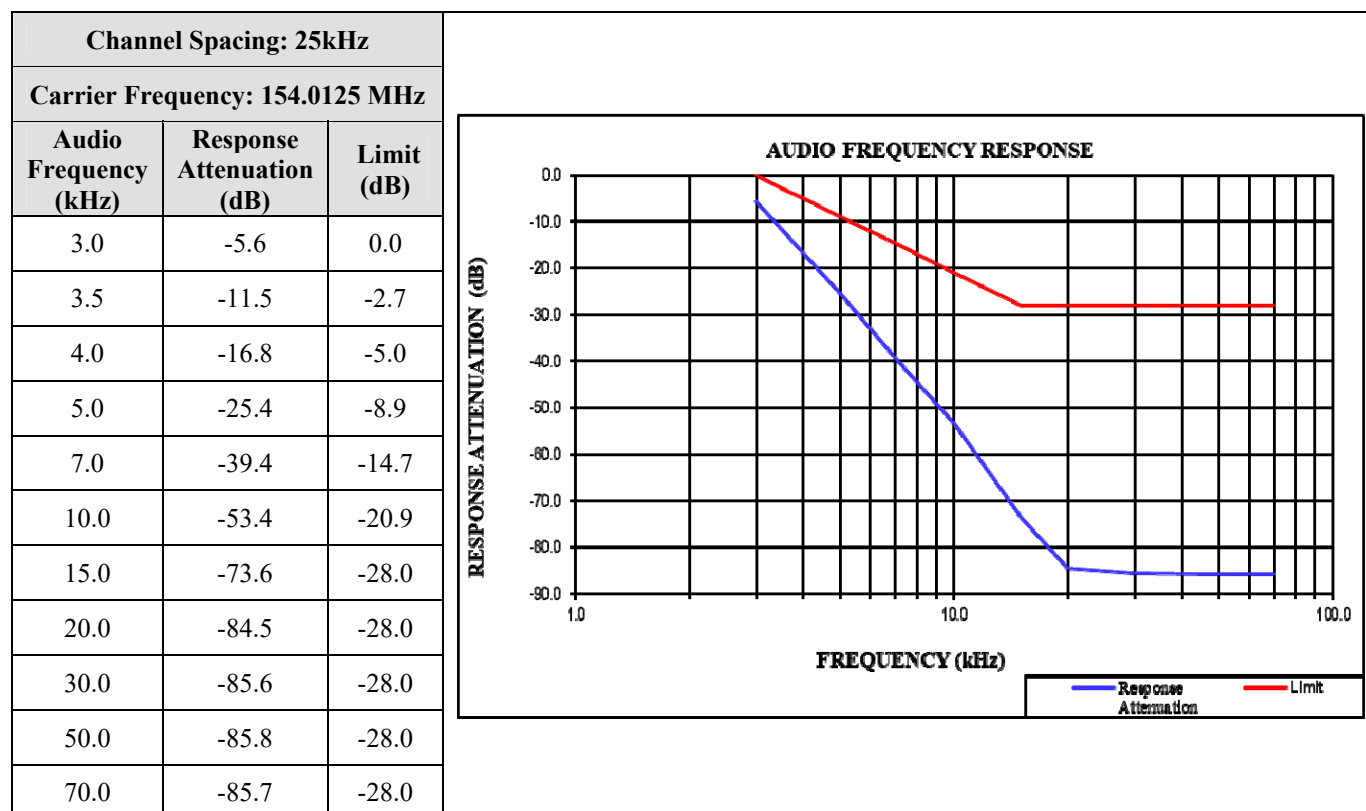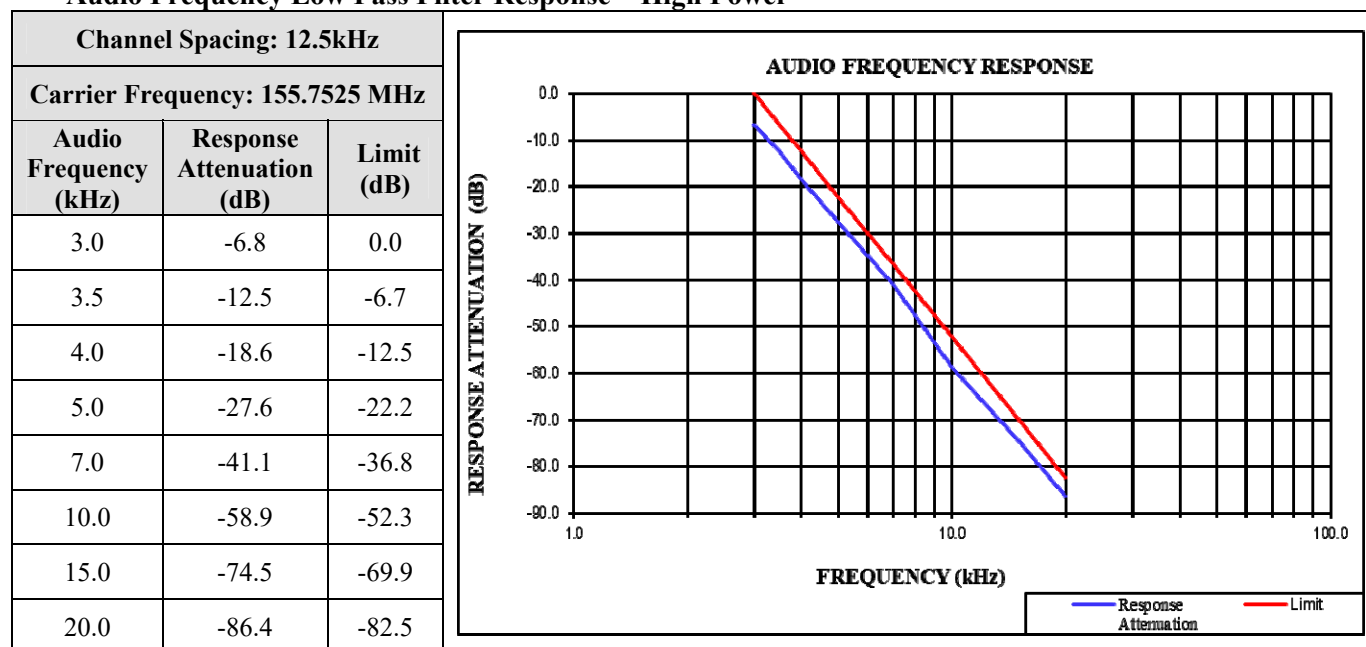

4.3 OCCUPIED BANDWIDTH & EMISSION MASK:

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-25~2022-02-07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.4~22.1	Relative Humidity: (%)	26~58	ATM Pressure: (kPa)	101.0~101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
BEW	Coaxial Attenuator	TS300-6-40	213311	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Mode	Test Frequency (MHz)	High Power Level		Low Power Level	
		99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)
FM 12.5kHz	136.0125	5.311	5.511	5.210	5.511
	155.7525	5.311	5.511	5.311	5.611
	173.9875	5.311	5.511	5.311	5.511
	150.8125	5.311	5.511	5.210	5.511
	161.1	5.311	5.461	5.210	5.361
4FSK 12.5kHz	136.0125	6.613	8.517	6.613	8.417
	155.7525	6.814	9.018	6.513	8.717
	173.9875	6.914	9.519	6.413	8.216
	150.8125	6.914	8.717	6.713	8.116
	161.1	6.814	9.018	6.513	8.917
FM 25kHz	150.8125	10.220	11.072	10.220	11.072
	161.1	10.220	11.022	10.220	11.022
	154.0125	10.220	11.072	10.220	11.072

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.







For Digital Mode (Channel Spacing: 12.5 kHz)


Emission Designator: 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).


F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

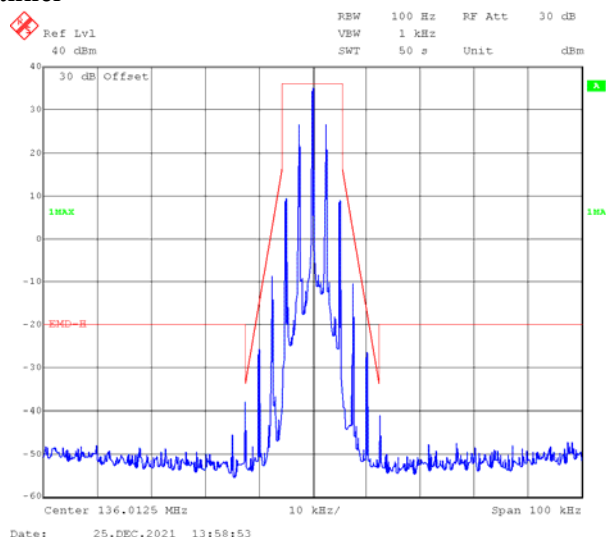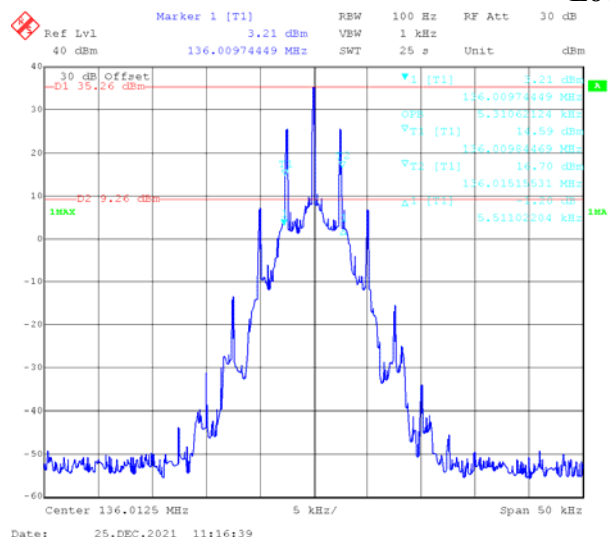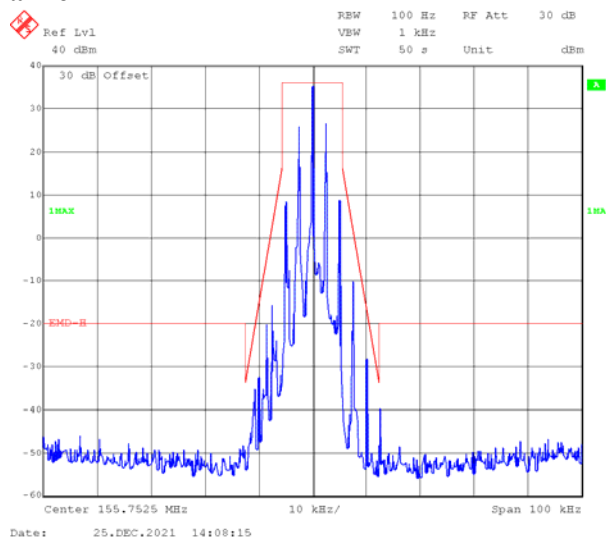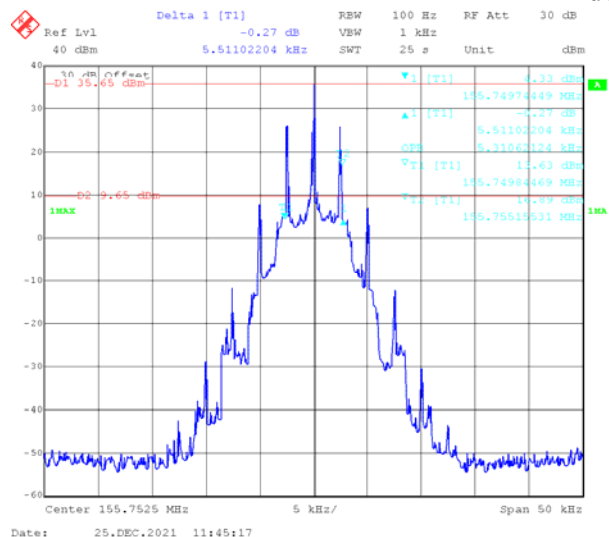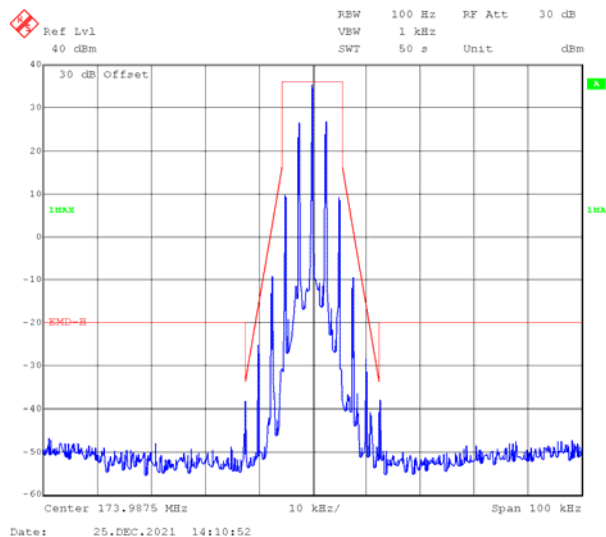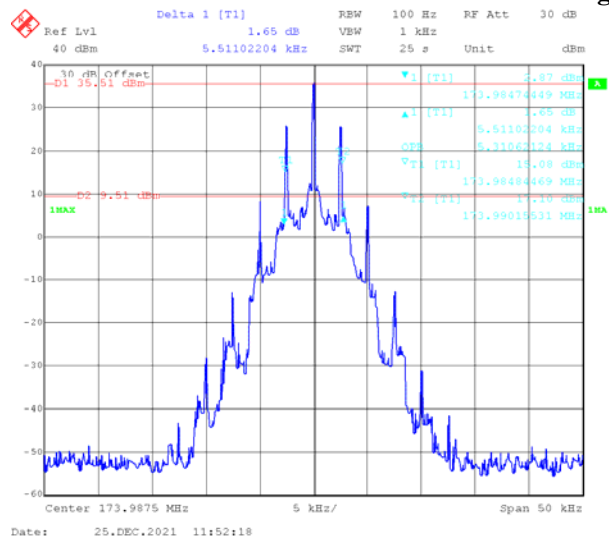
FM, 12.5kHz, High Power:**Low Channel****Middle Channel****High Channel**

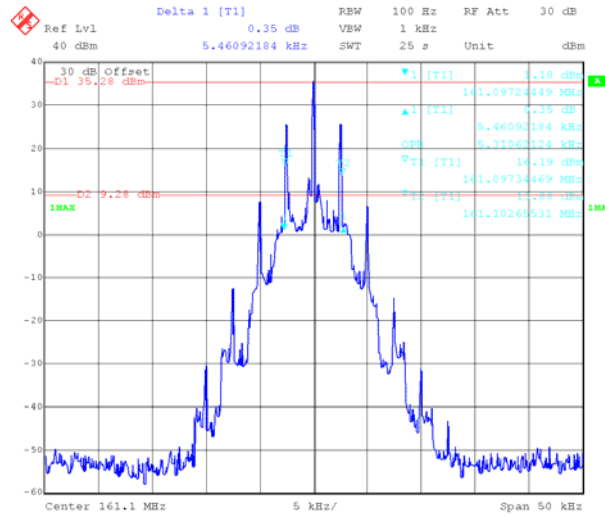Additional Channel Part 74, 161.1 MHz


Date: 25.DEC.2021 12:06:22

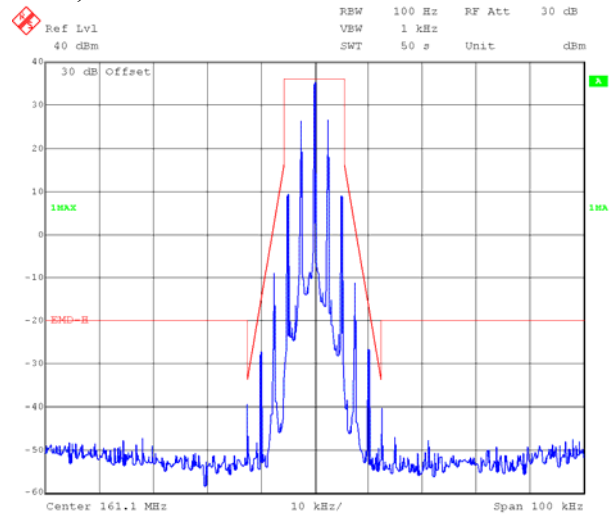

Date: 25.DEC.2021 14:27:32

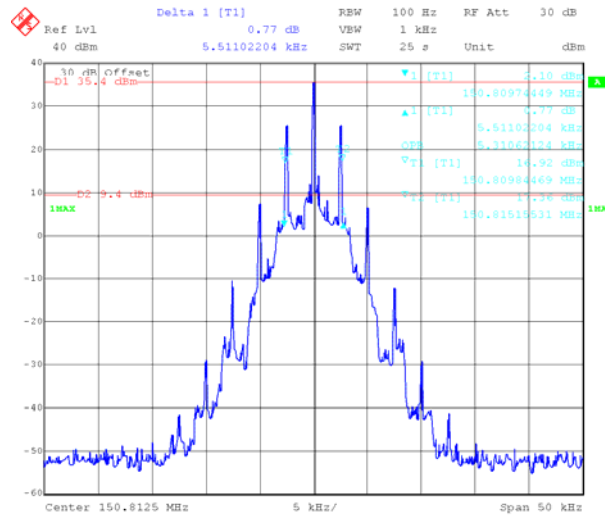Additional Channel Part 22, 150.8125 MHz



Date: 25.DEC.2021 12:37:20

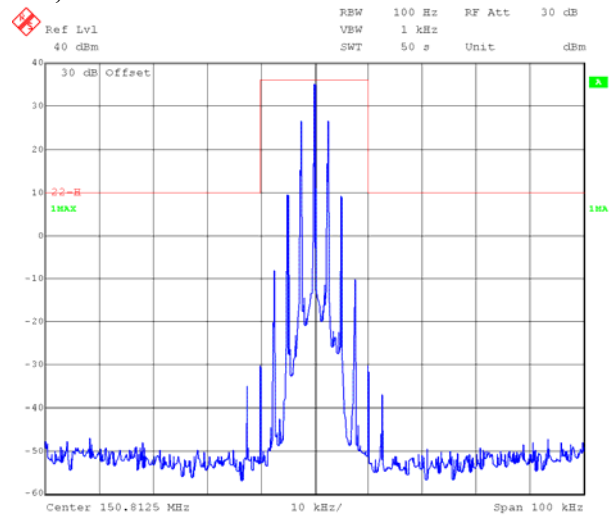



Date: 25.DEC.2021 14:59:35

FM, 12.5kHz, Low Power:



Low Channel

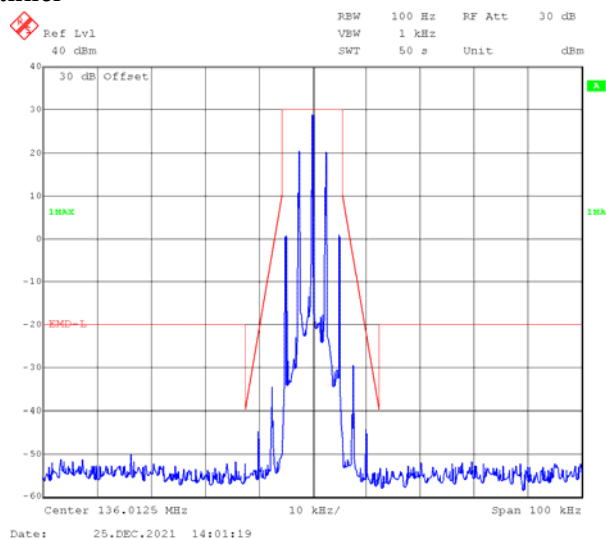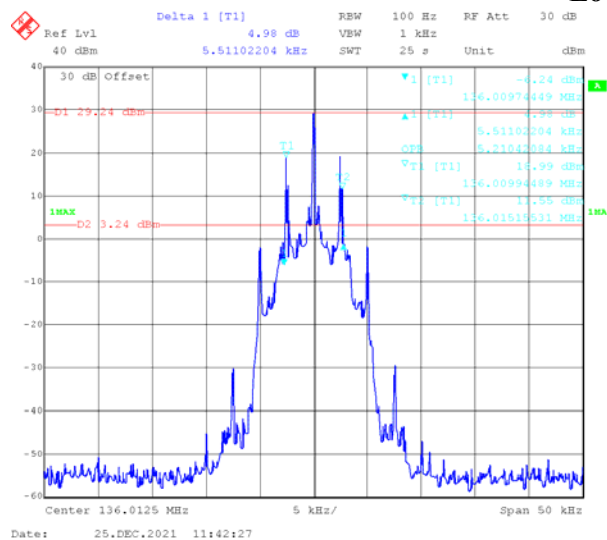

Middle Channel

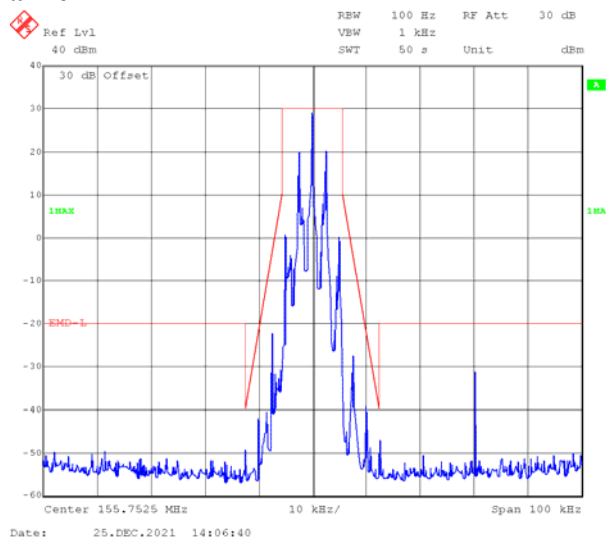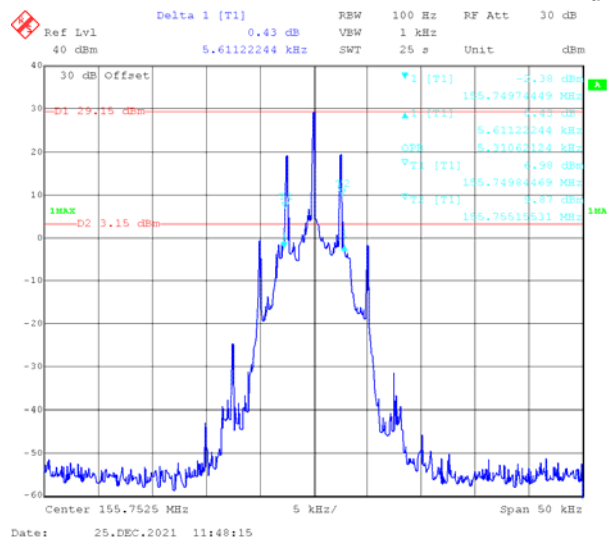

High Channel

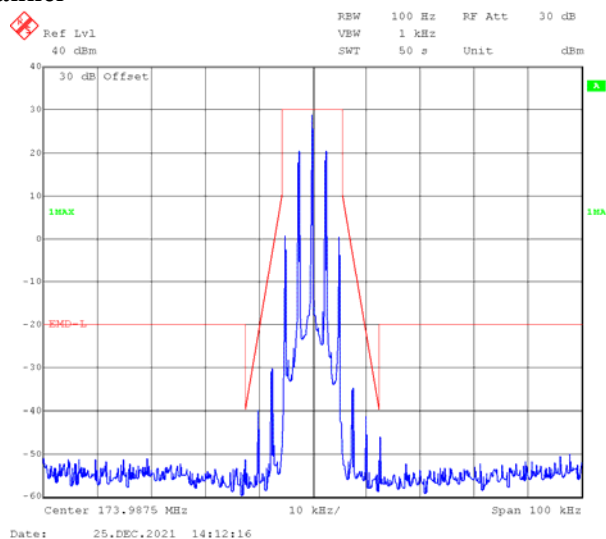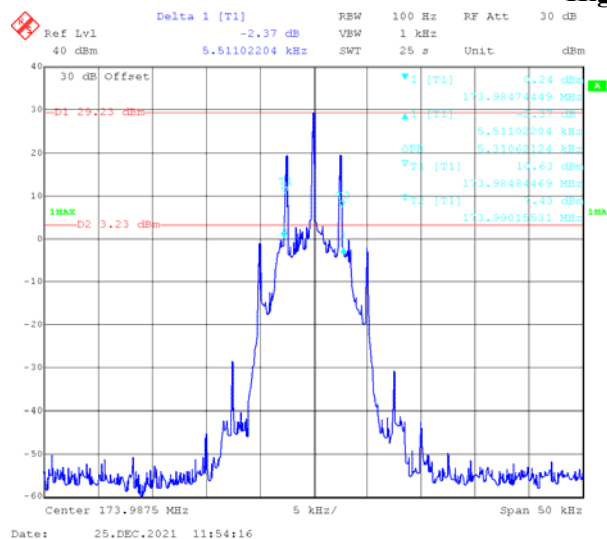

Delta [T1]

Ref Lvl 40 dBm

40 dBm

5.36072144 kHz

100 Hz

RF Att 30 dB

VBW 1 kHz

SWT 25 s

Unit dBm

30 dB Offset

D1 28.8 dBm

1MAX

D2 2.8 dBm

1MAX

Center 161.1 MHz

5 kHz/

Span 50 kHz

▼1 [T1] -4.99 dBm
141.09724449 MHz


▲2 [T1] -7.99 dBm
5.36072144 kHz

OTM 5.31042584 kHz

▼3 [T1] 14.25 dBm
141.09734469 MHz

▼4 [T1] 14.75 dBm
141.10259511 MHz

Date: 25.DEC.2021 12:10:21

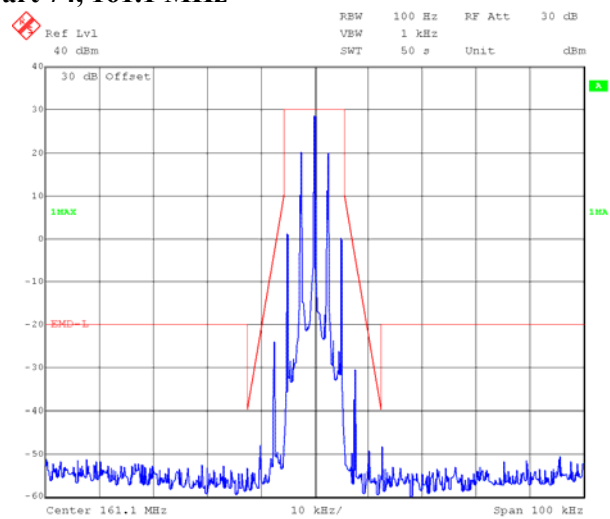


Date: 25.DEC.2021 14:29:06

Delta 1 [T1] 2.88 dB RBW 100 Hz RF Att 30 dB
 Ref Lvl 40 dBm VSW 1 kHz Unit dBm

30 dB Offset
 D1 19.2 dBm
 D2 3.2 dBm
 1MAX
 2MAX

Center 150.8125 MHz 5 kHz/ Span 50 kHz



Date: 25.DEC.2021 12:38:44

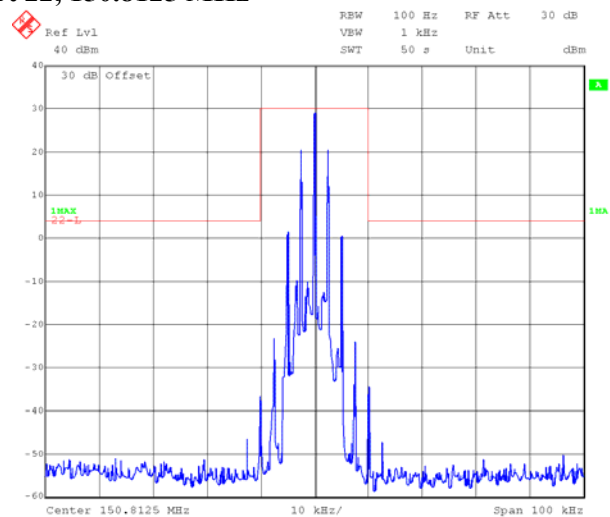



Date: 25.DEC.2021 14:58:10

4FSK, 12.5kHz, High Power:



Low Channel

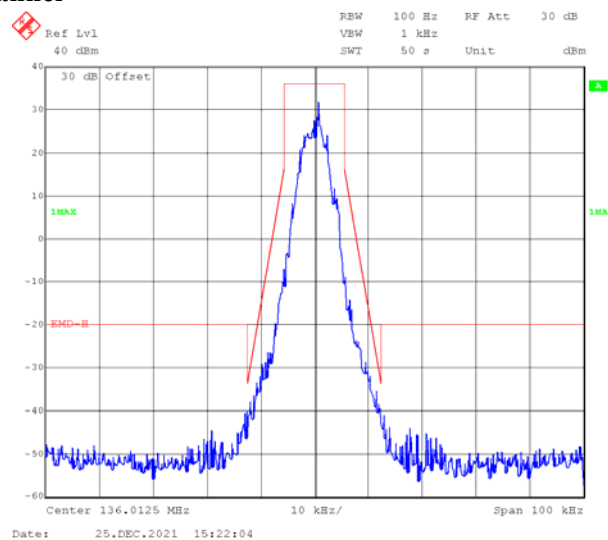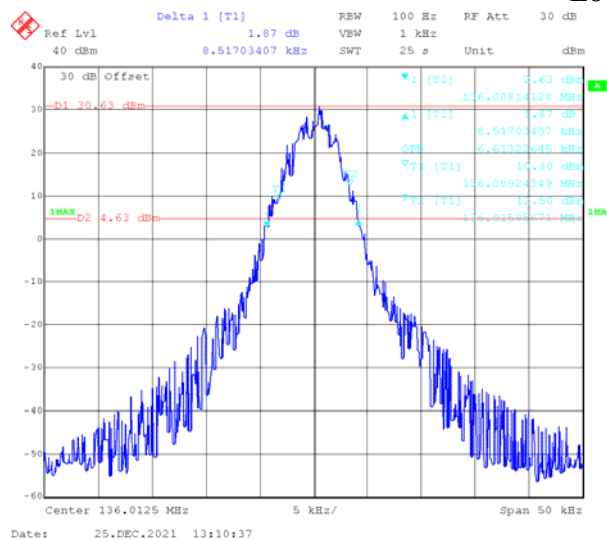



Middle Channel

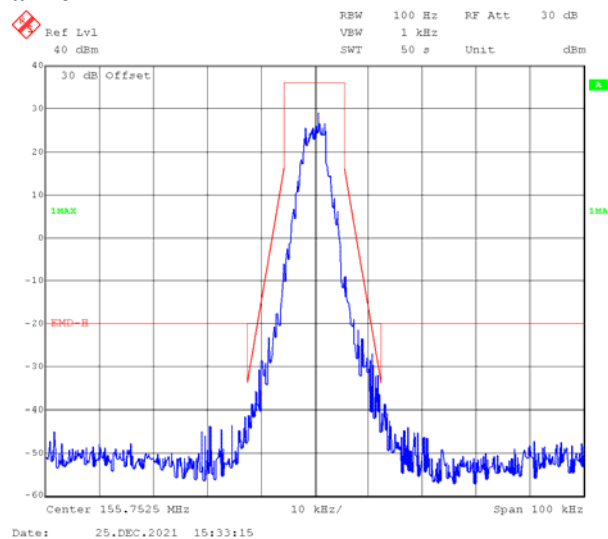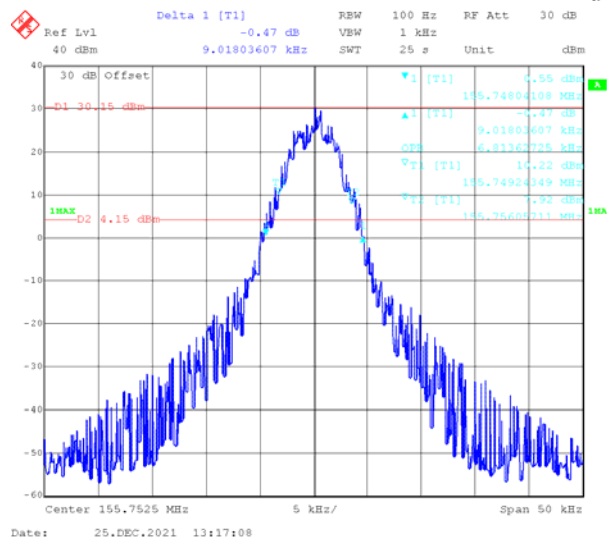



High Channel

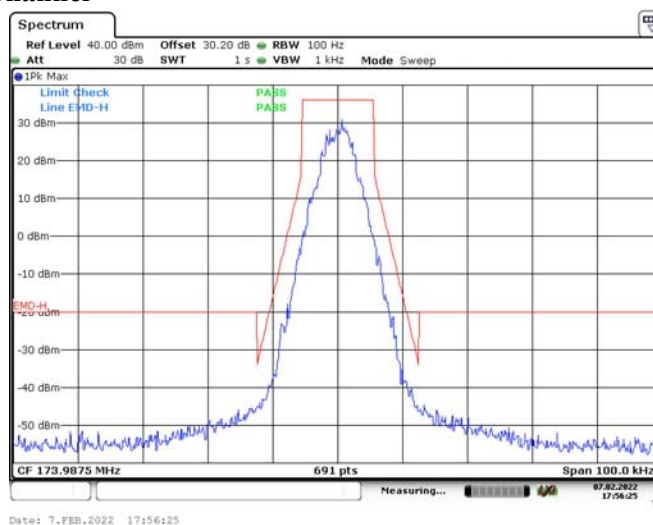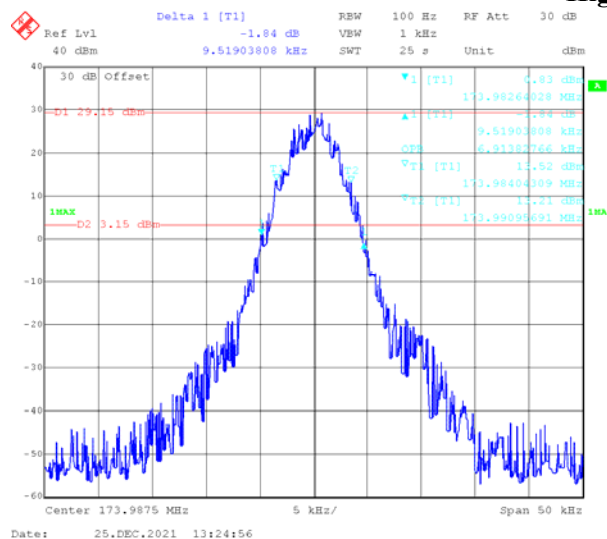

Additional Channel Part 74, 161.1 MHz

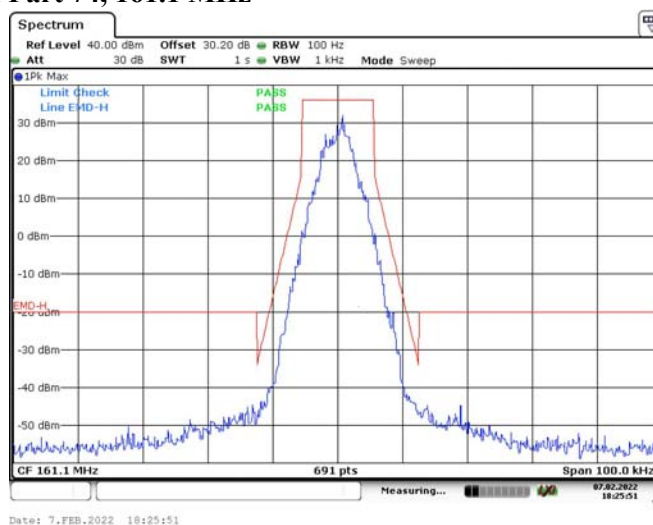
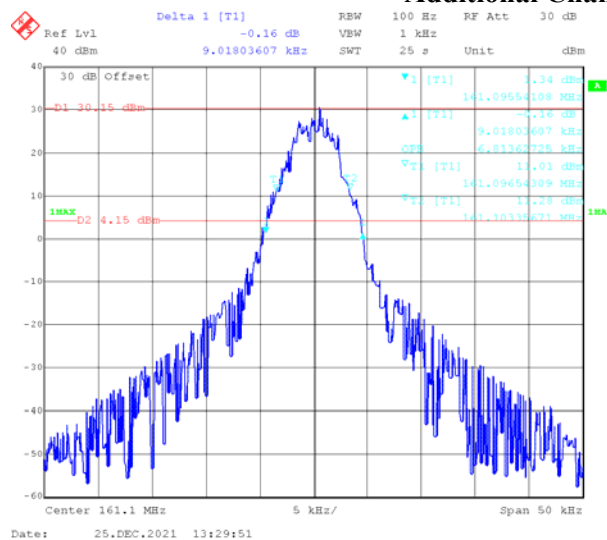


Additional Channel Part 22, 150.8125 MHz

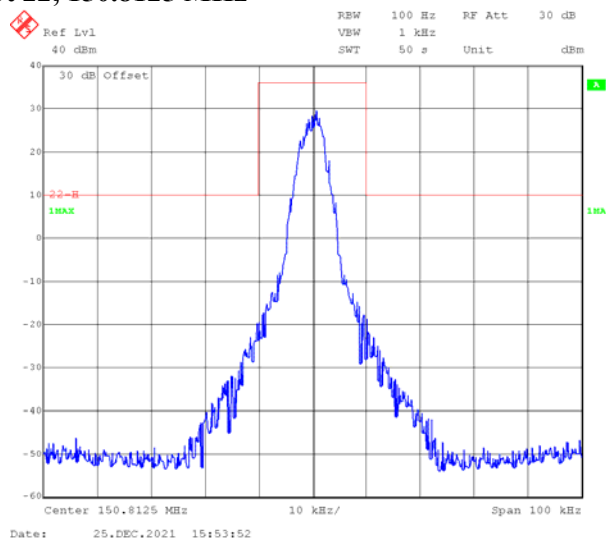
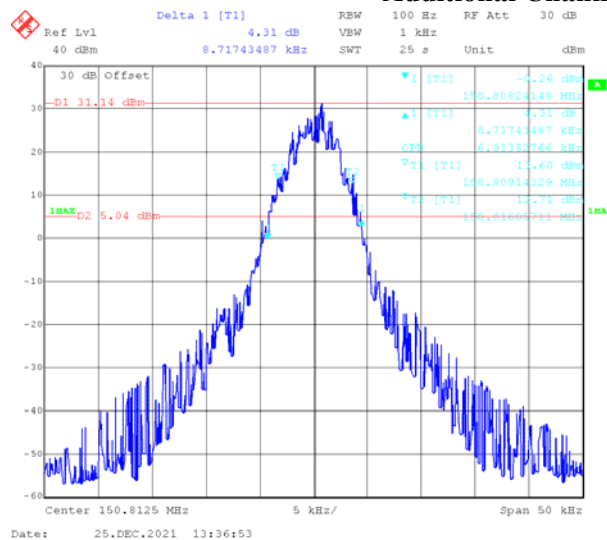


4FSK, 12.5kHz, Low Power:



Low Channel

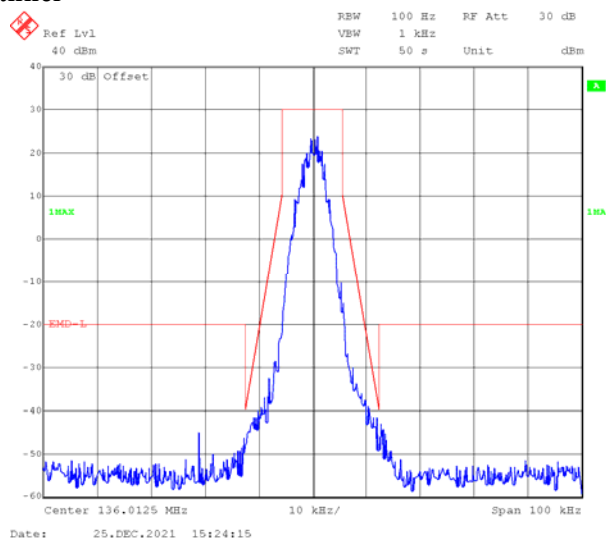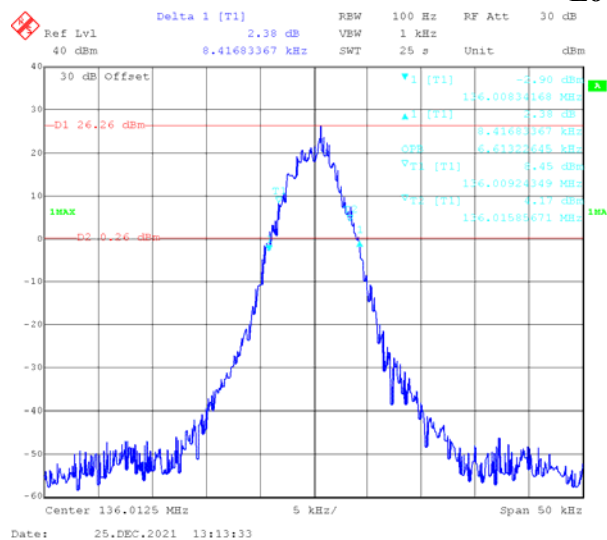



Middle Channel

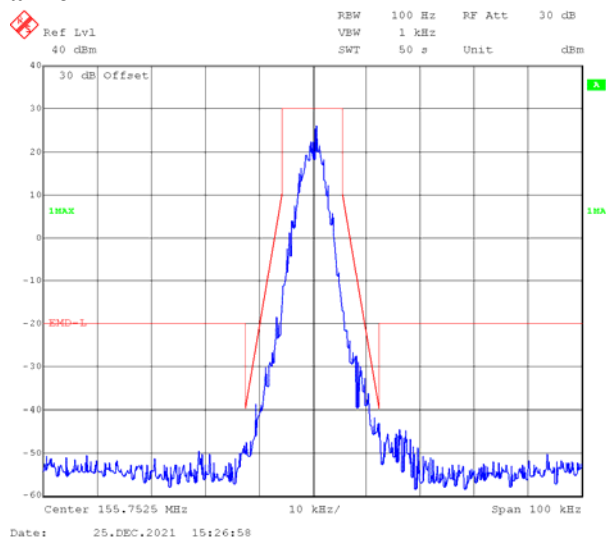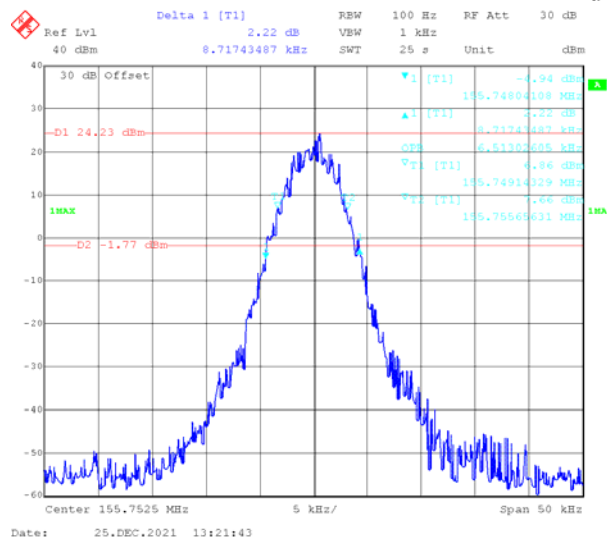



High Channel

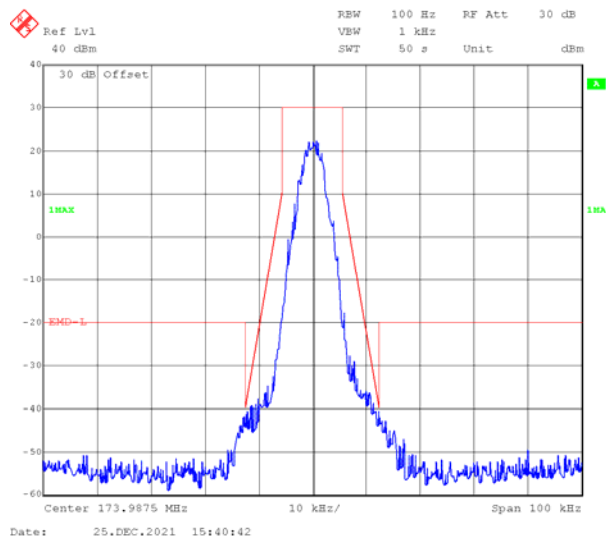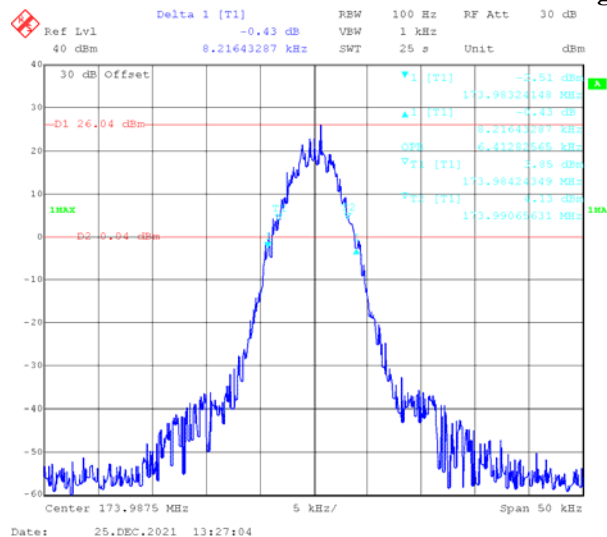

Additional Channel Part 74, 161.1 MHz

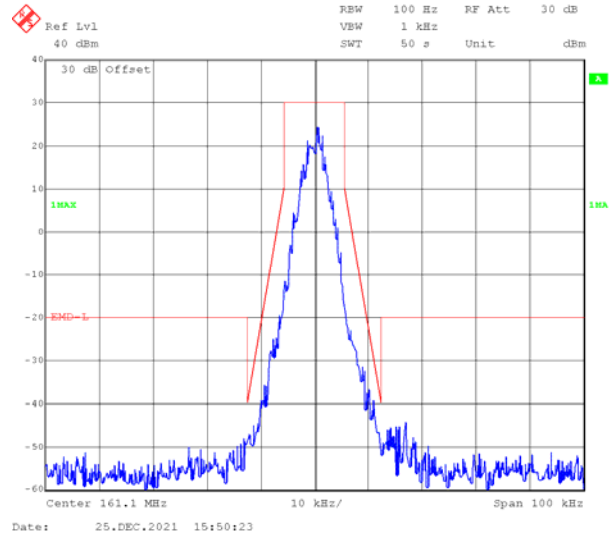
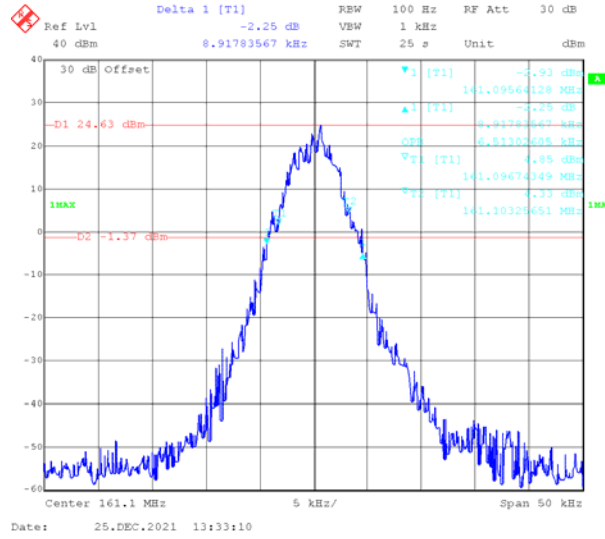


Additional Channel Part 22, 150.8125 MHz

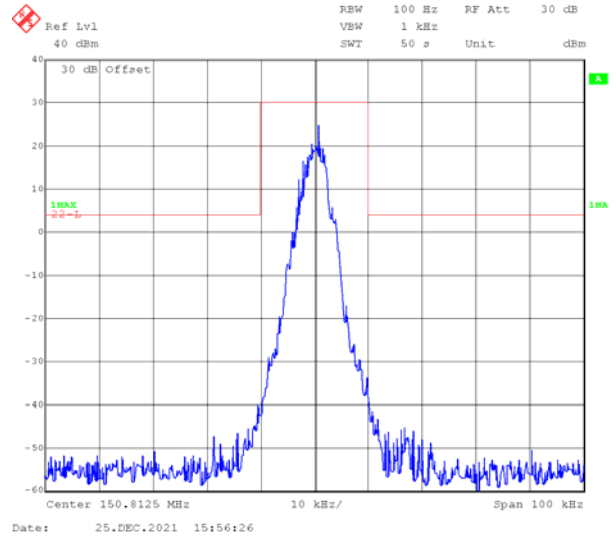
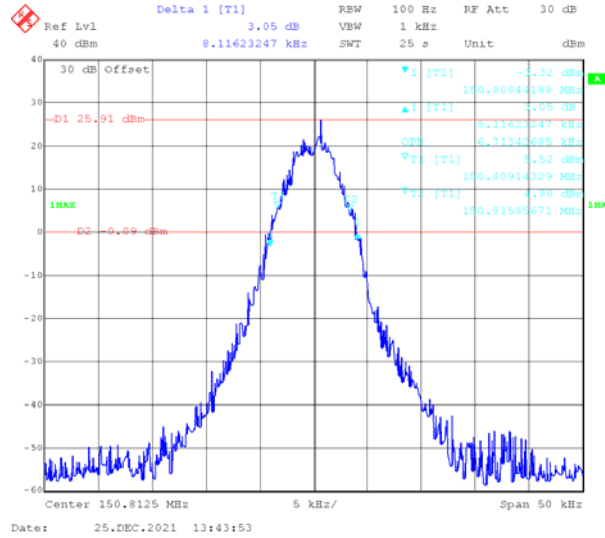


FM, 25 kHz, High Power:



Additional Channel Part 80, 154.0125 MHz

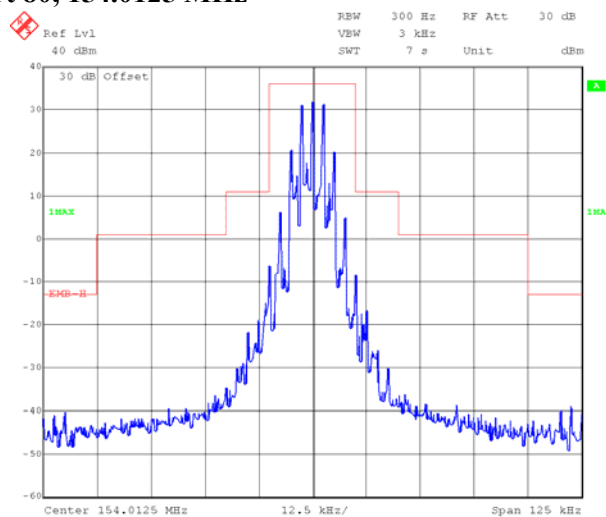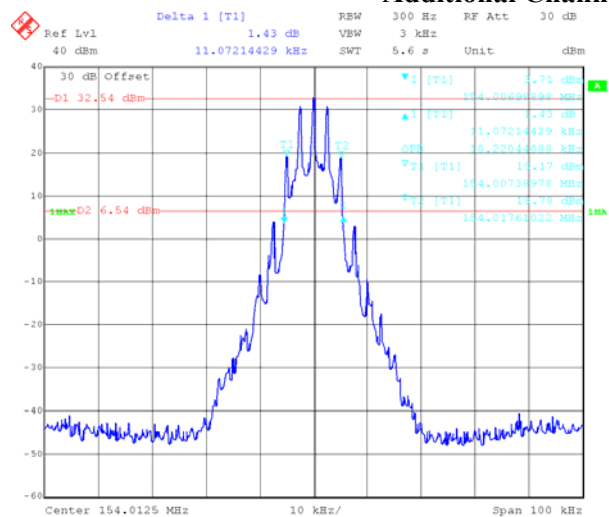

Additional Channel Part 74, 161.1 MHz

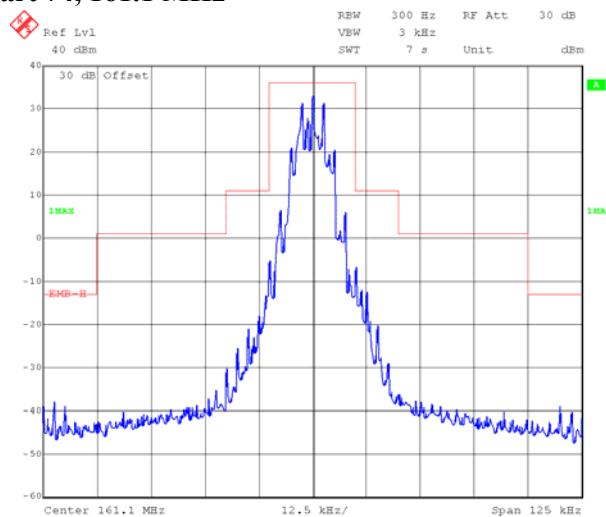
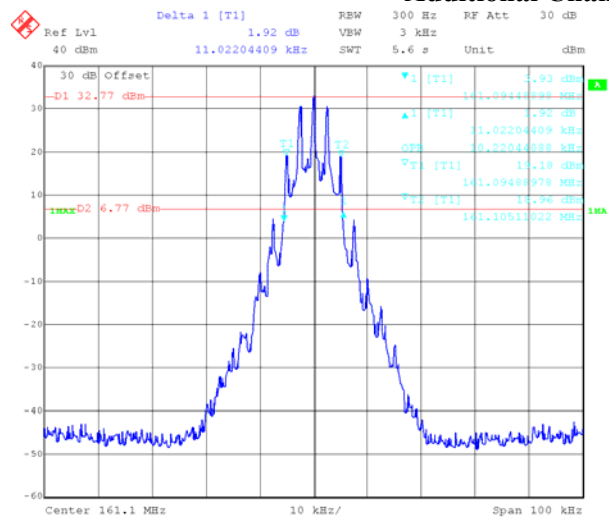


Additional Channel Part 22, 150.8125 MHz

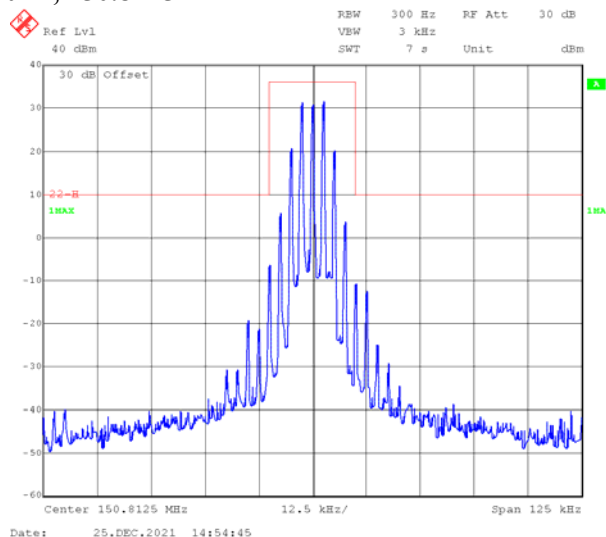
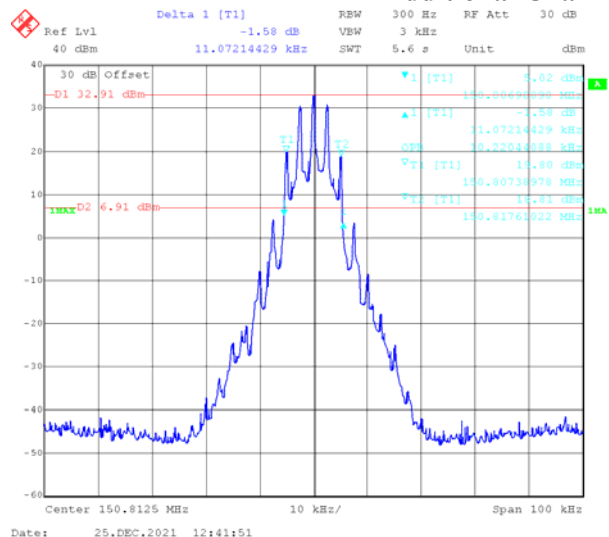


FM, 25 kHz, Low Power:



Additional Channel Part 80, 154.0125 MHz

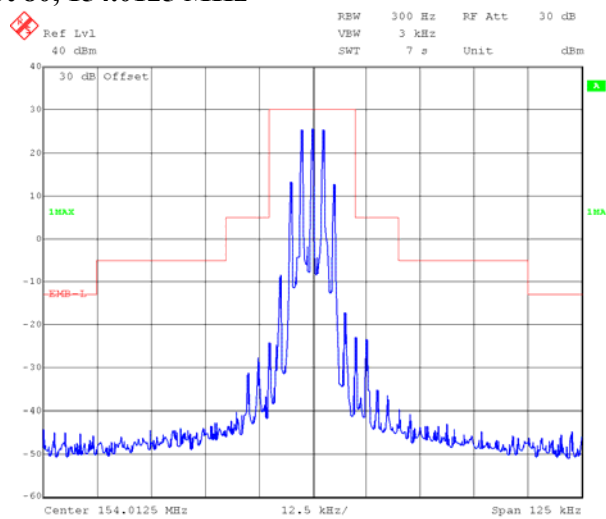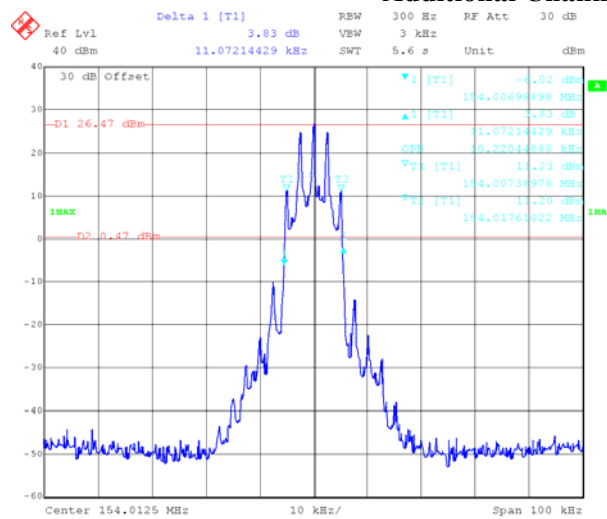

Additional Channel Part 74, 161.1 MHz

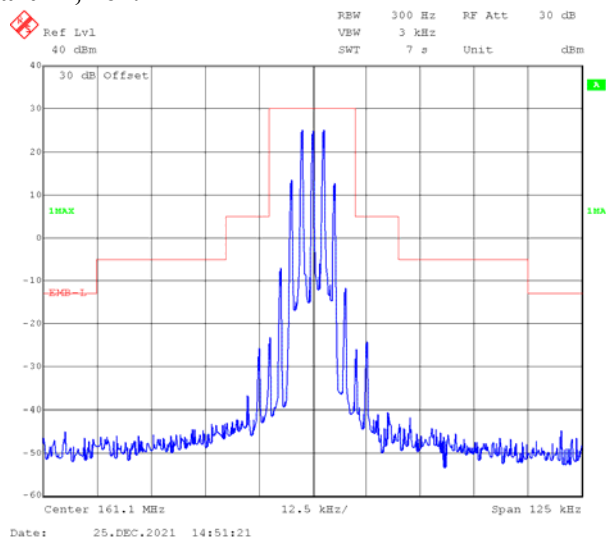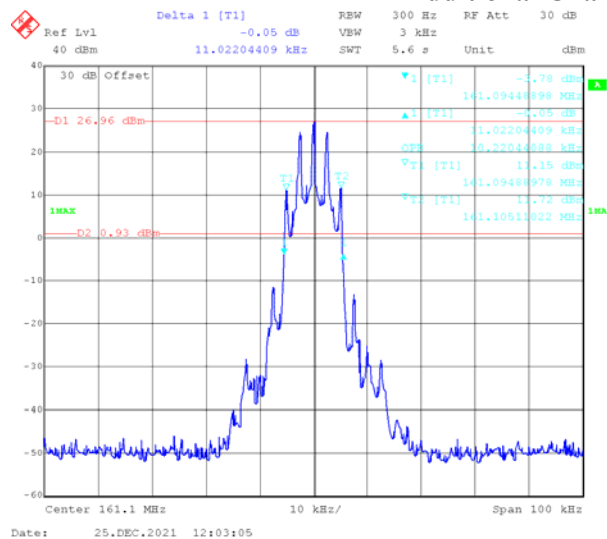

Additional Channel Part 22, 150.8125 MHz

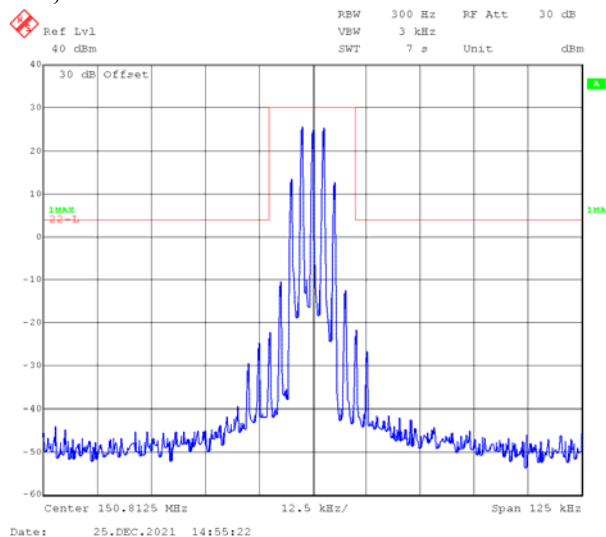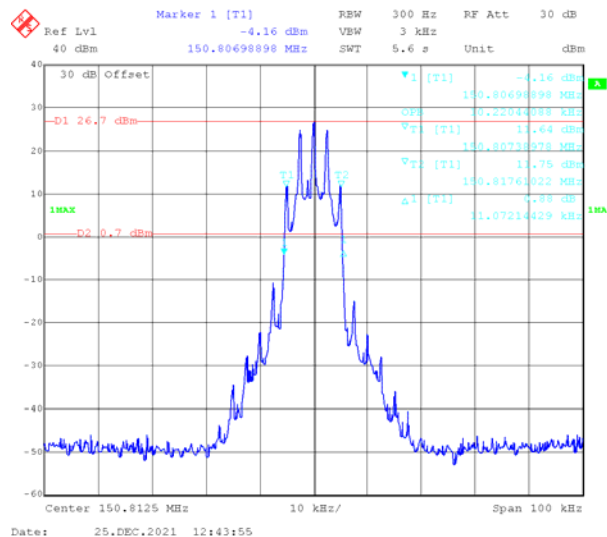

4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-23
Test Site:	RF	Test Mode:	Transmitting (High power was tested)
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.7
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021/10/10	2022/10/9
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
BEW	Coaxial Attenuator	TS300-6-40	213311	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	Each time	N/A
E-Microwave	Band Rejector Filter	OBF-ZP-136-174-NF	OE0120143	2021-01-23	2022-01-22



** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:



Note: Test performed at high power level with Band Rejector Filter, please refer to the following table.

FM, 12.5kHz:



Low Channel, 136.0125 MHz

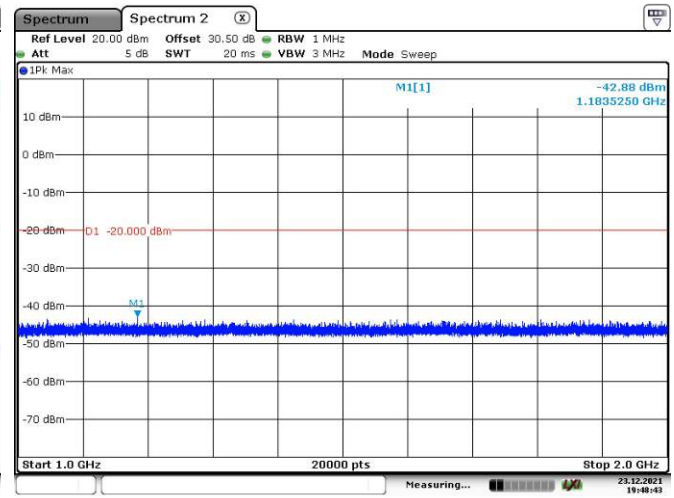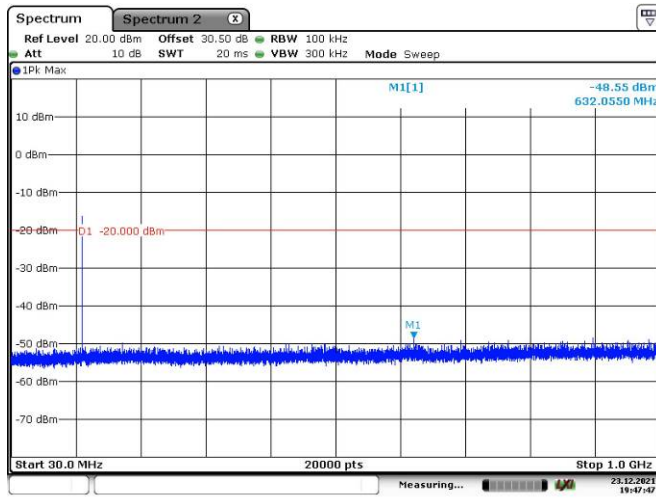

Middle Channel, 155.7525 MHz

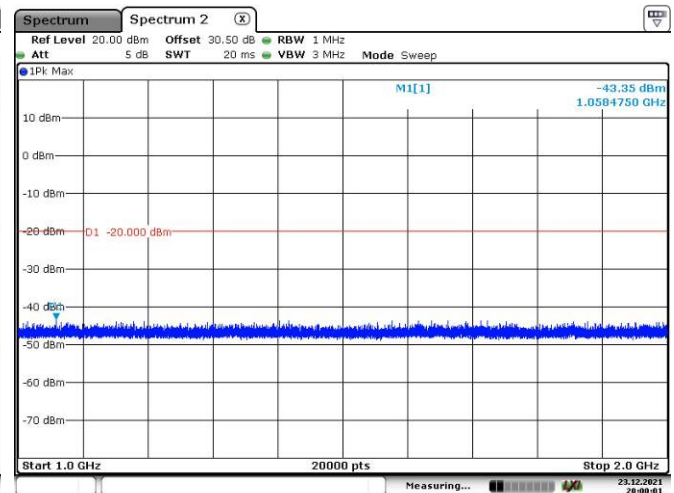
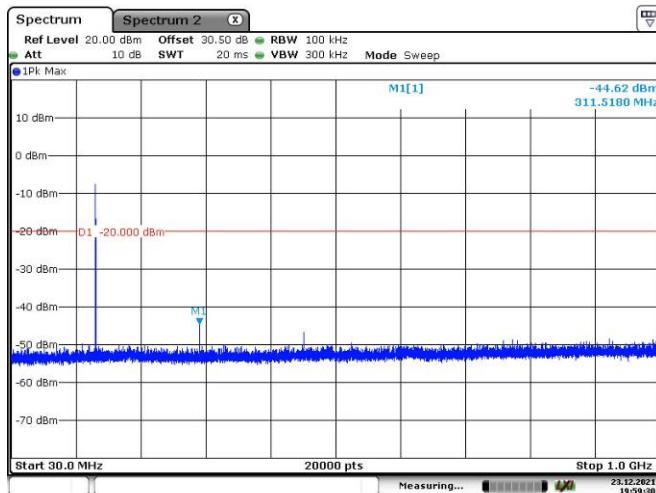


High Channel, 173.9875 MHz

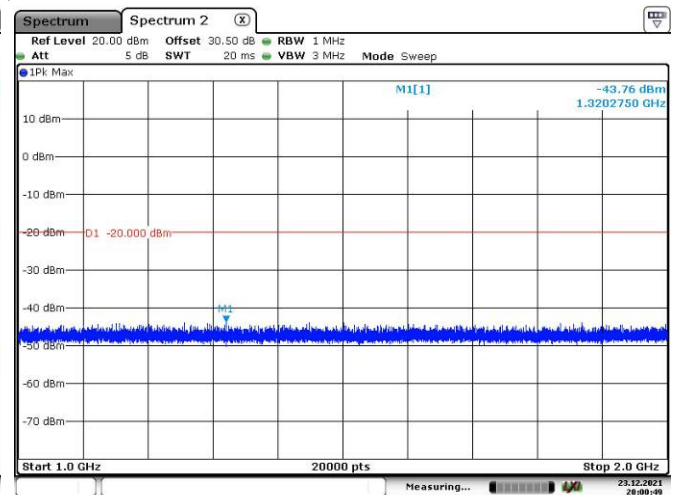
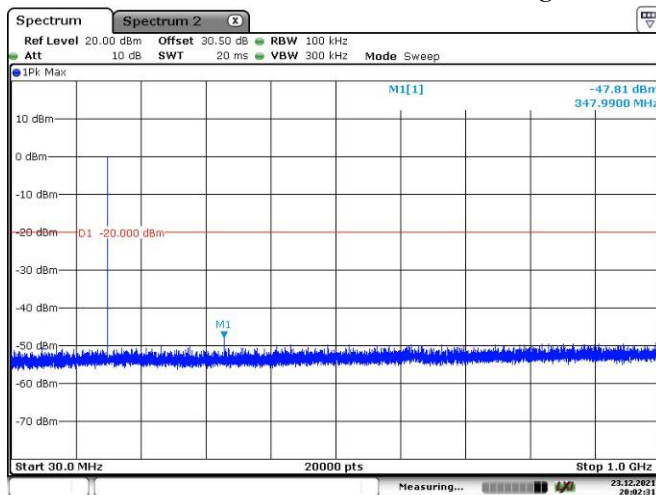


4FSK, 12.5kHz:



Low Channel, 136.0125 MHz

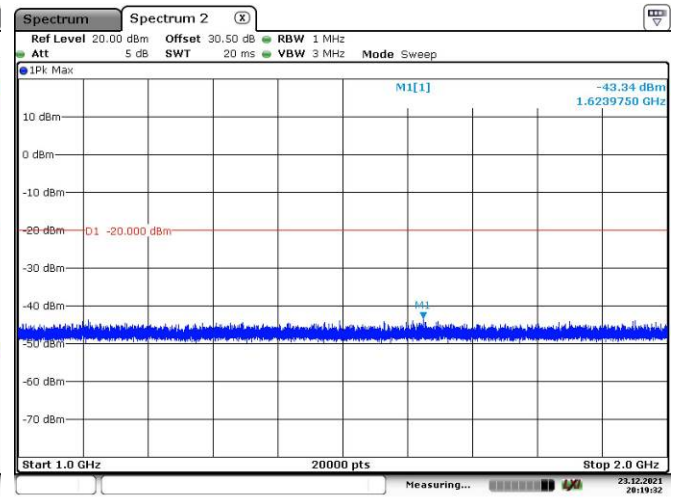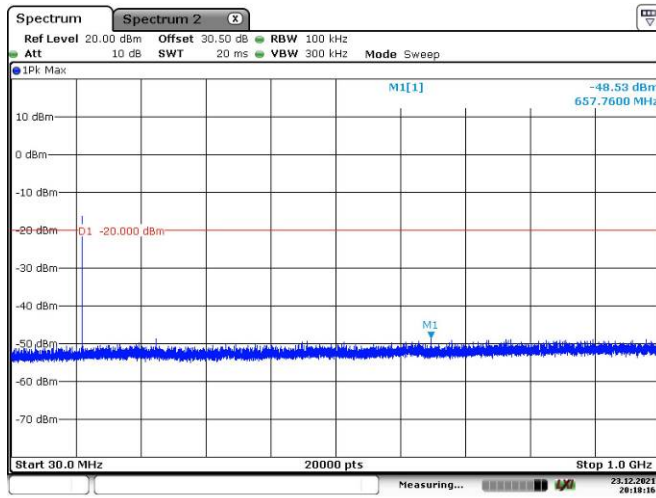

Middle Channel, 155.7525 MHz

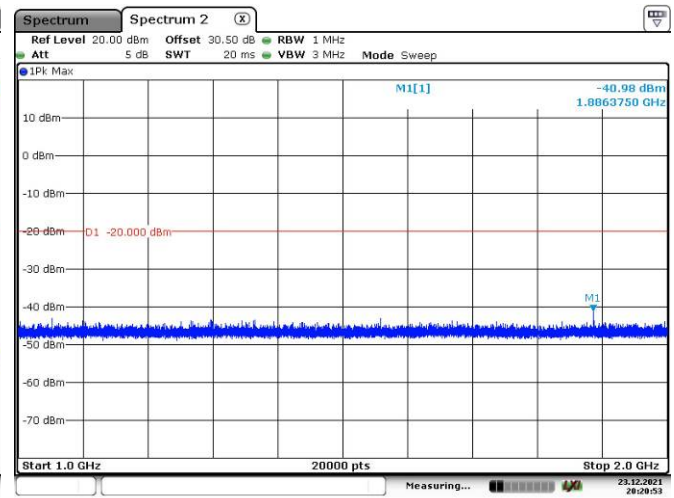
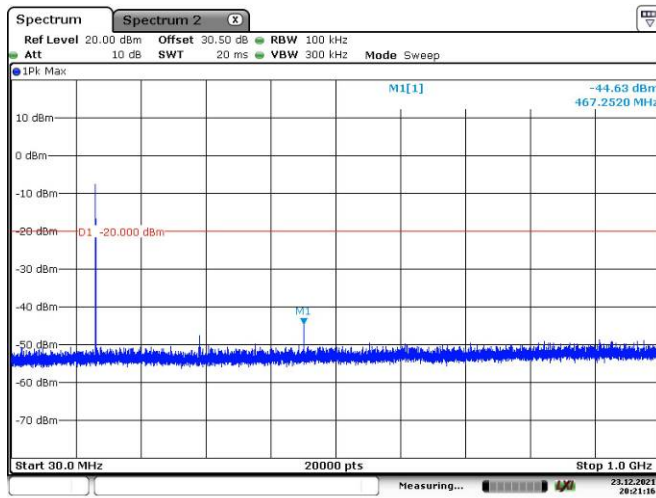


High Channel, 173.9875 MHz

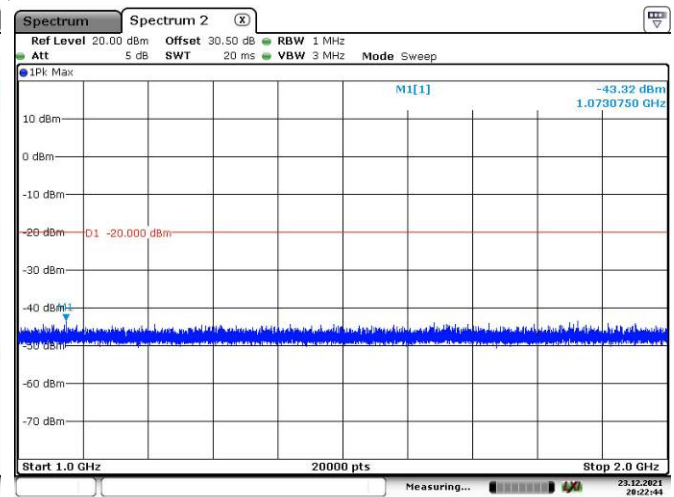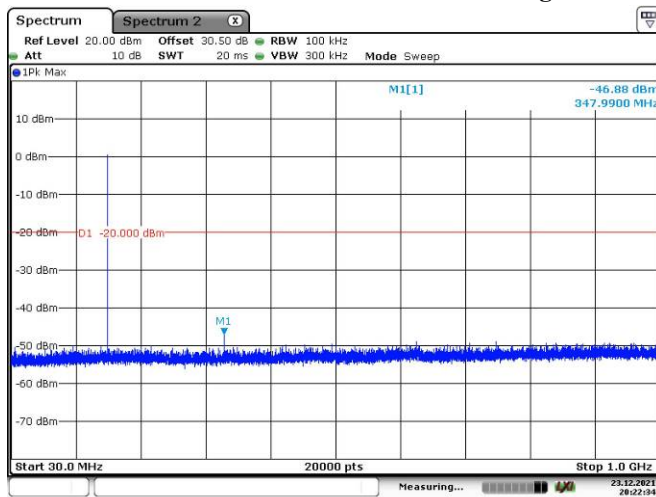



Part 80:

FM,25kHz, 154.0125 MHz

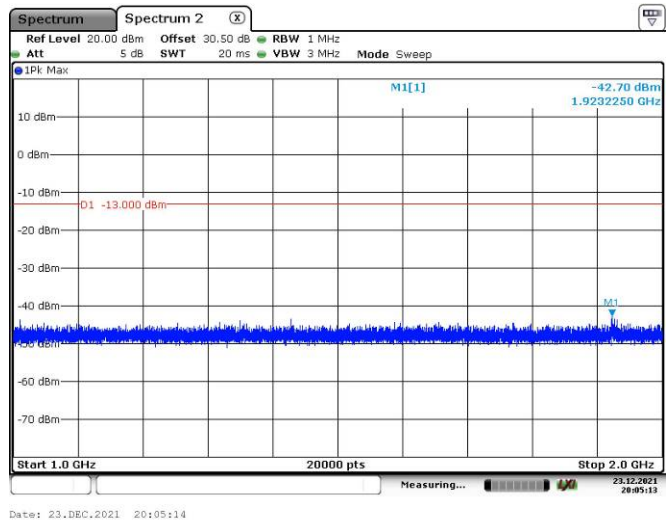
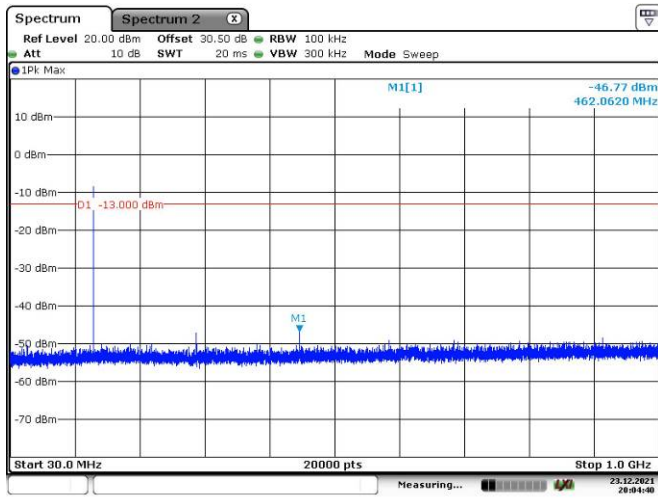


Part 74:



FM,12.5kHz, 161.1 MHz

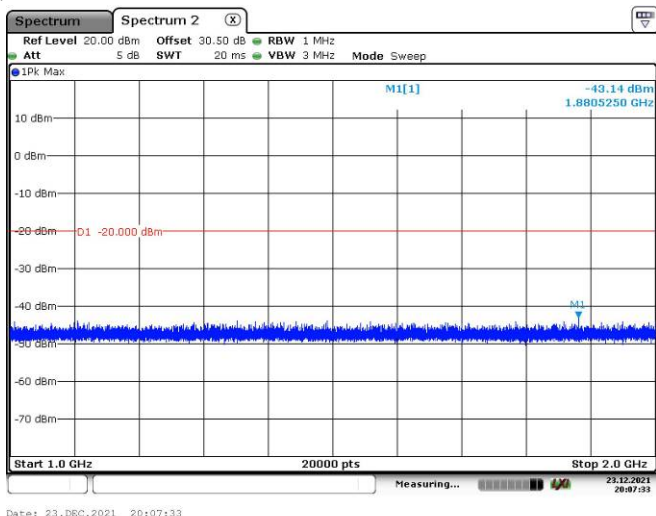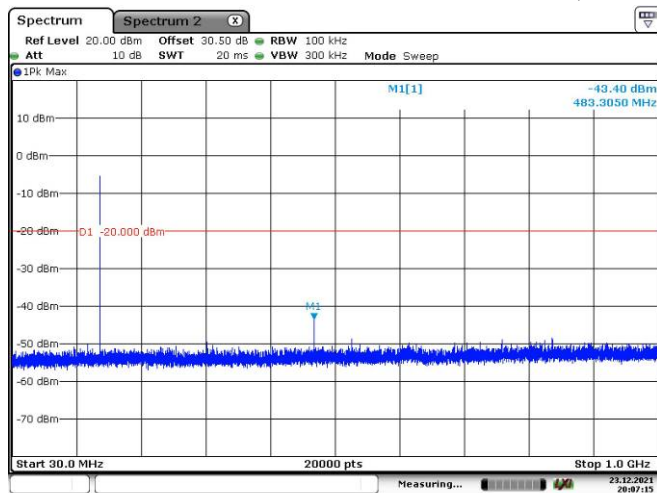

FM,25kHz, 161.1 MHz

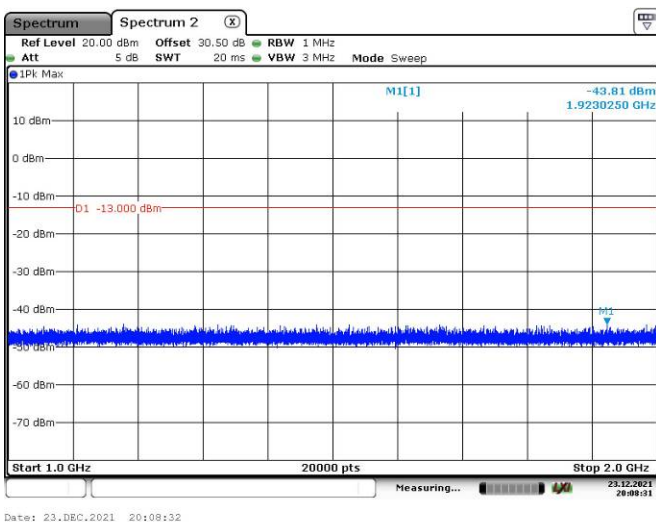
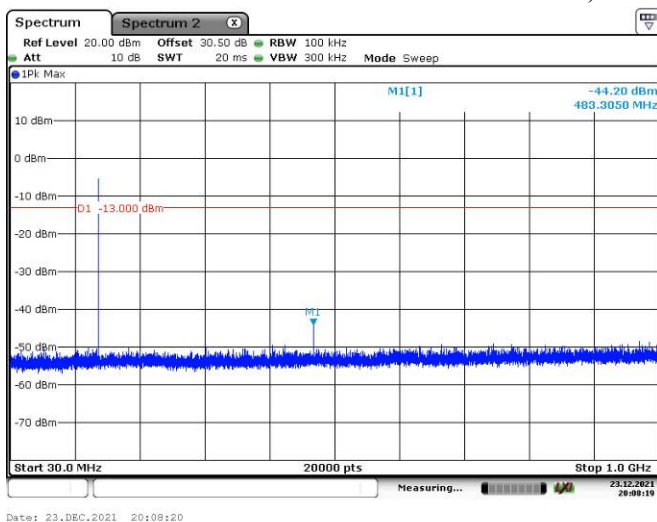


4FSK,12.5kHz, 161.1 MHz

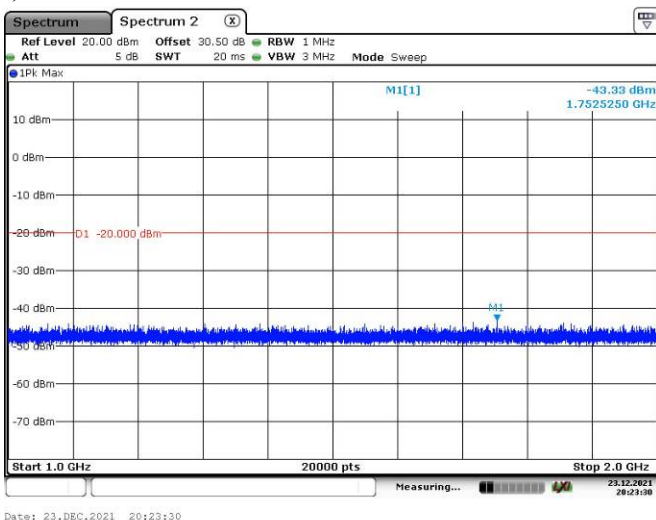
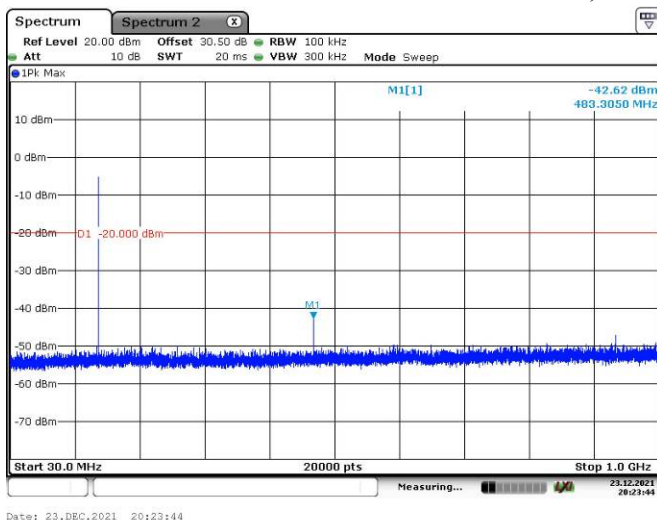


Part 22:



FM,12.5kHz, 150.8125 MHz

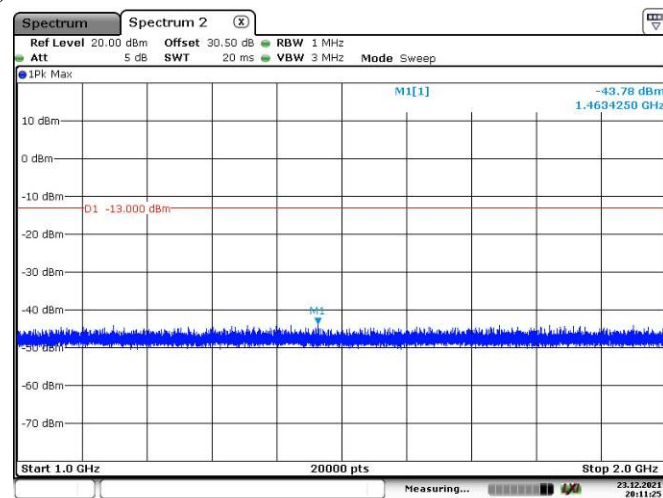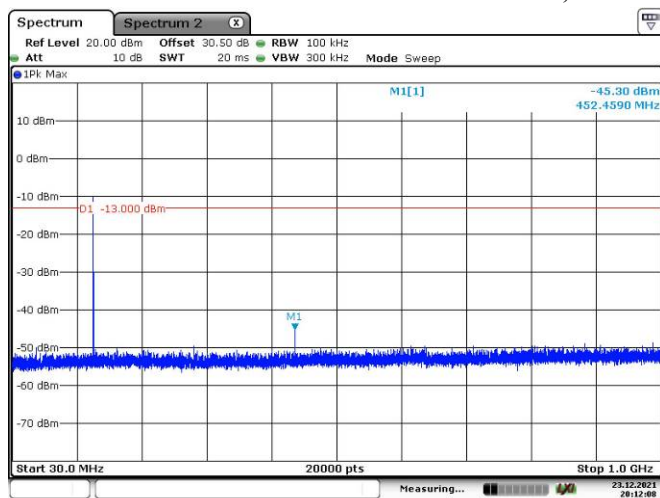

FM,25kHz, 150.8125 MHz

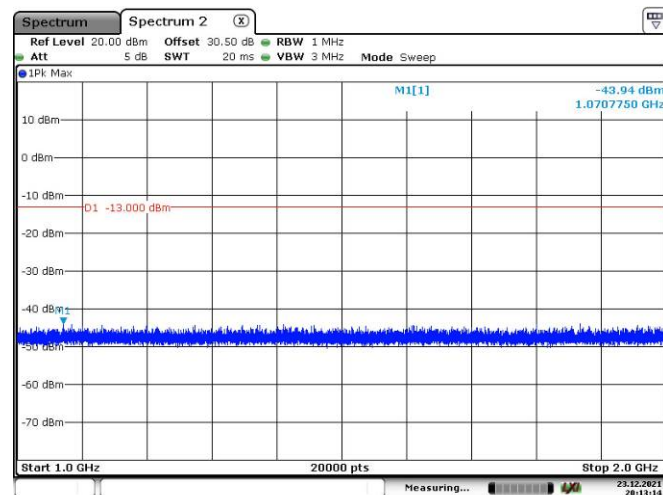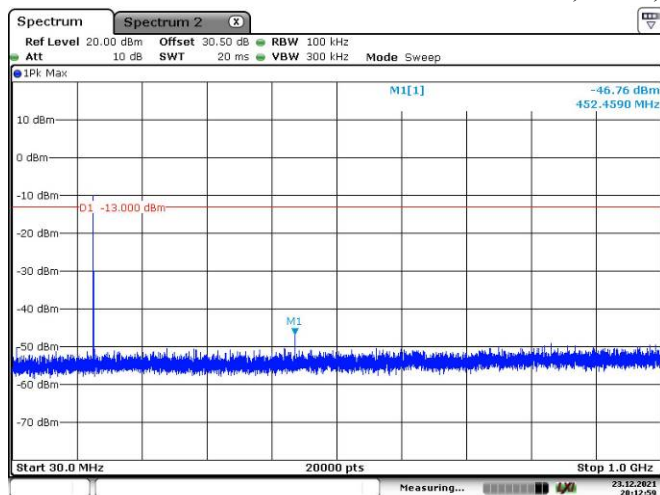

4FSK,12.5kHz, 150.8125 MHz

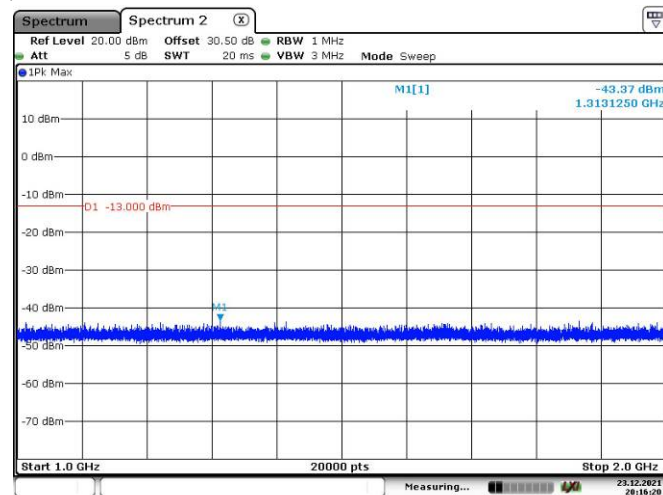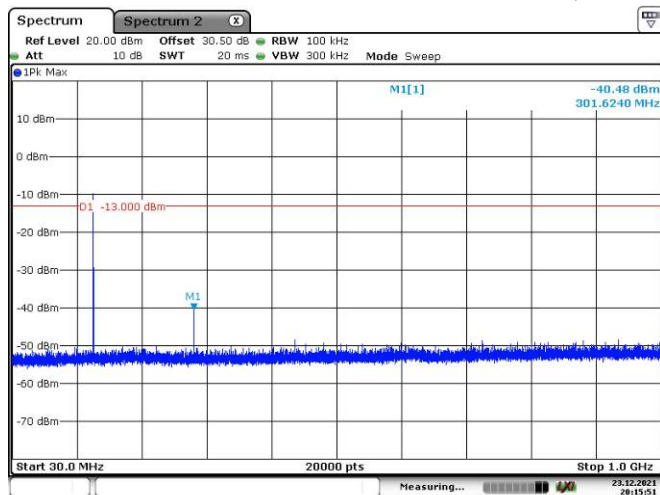

4.5 RADIATED SPURIOUS EMISSIONS:

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-07~2021-12-10
Test Site:	966-1/966-2	Test Mode:	Transmitting (High power was tested)
Tester:	Great Qiao, Carl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	17.8~21.3	Relative Humidity: (%)	35~50	ATM Pressure: (kPa)	101.6
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2021-07-25	2022-07-24
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021-10-18	2024-10-17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2021-07-25	2022-07-24
Agilent	Signal Generator	E8247C	MY43321352	2021-04-25	2022-04-24

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note:

1. Test performed at high power level with Band Rejector Filter, *please refer to the following table.*
2. Two models had been tested, and the worst case is BP562 VHF.

30MHz - 2GHz:**Part 90**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	40.73	-39.44	0.00	0.31	-39.75	-20.00	19.75
272.03	V	36.23	-42.64	0.00	0.31	-42.95	-20.00	22.95
408.04	H	18.16	-59.55	0.00	0.40	-59.95	-20.00	39.95
408.04	V	19.34	-55.89	0.00	0.40	-56.29	-20.00	36.29
544.05	H	19.69	-55.28	0.00	0.47	-55.75	-20.00	35.75
544.05	V	18.76	-52.89	0.00	0.47	-53.36	-20.00	33.36
680.06	H	17.95	-55.48	0.00	0.52	-56.00	-20.00	36.00
680.06	V	18.67	-51.61	0.00	0.52	-52.13	-20.00	32.13
816.08	H	19.86	-51.03	0.00	0.55	-51.58	-20.00	31.58
816.08	V	19.35	-48.13	0.00	0.55	-48.68	-20.00	28.68
952.09	H	20.11	-47.38	0.00	0.59	-47.97	-20.00	27.97
952.09	V	20.57	-44.54	0.00	0.59	-45.13	-20.00	25.13
1088.10	H	36.59	-65.32	7.35	0.67	-58.64	-20.00	38.64
1088.10	V	36.20	-66.16	7.35	0.67	-59.48	-20.00	39.48
1224.11	H	36.12	-66.71	7.73	0.69	-59.67	-20.00	39.67
1224.11	V	36.04	-67.46	7.73	0.69	-60.42	-20.00	40.42
1360.13	H	37.21	-66.11	8.11	0.77	-58.77	-20.00	38.77
1360.13	V	36.89	-66.64	8.11	0.77	-59.30	-20.00	39.30
4FSK, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	41.62	-38.55	0.00	0.31	-38.86	-20.00	18.86
272.03	V	36.74	-42.13	0.00	0.31	-42.44	-20.00	22.44
408.04	H	18.64	-59.07	0.00	0.40	-59.47	-20.00	39.47
408.04	V	17.35	-57.88	0.00	0.40	-58.28	-20.00	38.28
544.05	H	18.59	-56.37	0.00	0.47	-56.84	-20.00	36.84
544.05	V	19.36	-52.29	0.00	0.47	-52.76	-20.00	32.76
680.06	H	19.55	-53.88	0.00	0.52	-54.40	-20.00	34.40
680.06	V	18.79	-51.49	0.00	0.52	-52.01	-20.00	32.01
816.08	H	19.34	-51.55	0.00	0.55	-52.10	-20.00	32.10
816.08	V	19.84	-47.64	0.00	0.55	-48.19	-20.00	28.19
952.09	H	20.34	-47.15	0.00	0.59	-47.74	-20.00	27.74
952.09	V	20.59	-44.52	0.00	0.59	-45.11	-20.00	25.11
1088.10	H	37.81	-64.10	7.35	0.67	-57.42	-20.00	37.42
1088.10	V	37.19	-65.17	7.35	0.67	-58.49	-20.00	38.49
1224.11	H	42.85	-59.98	7.73	0.69	-52.94	-20.00	32.94
1224.11	V	43.65	-59.85	7.73	0.69	-52.81	-20.00	32.81
1360.13	H	38.17	-65.15	8.11	0.77	-57.81	-20.00	37.81
1360.13	V	36.75	-66.78	8.11	0.77	-59.44	-20.00	39.44

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 155.7525MHz-12.5 kHz								
311.51	H	37.26	-41.96	0.00	0.34	-42.30	-20.00	22.30
311.51	V	30.69	-46.64	0.00	0.34	-46.98	-20.00	26.98
467.26	H	18.37	-58.13	0.00	0.42	-58.55	-20.00	38.55
467.26	V	18.55	-54.33	0.00	0.42	-54.75	-20.00	34.75
623.01	H	19.34	-54.40	0.00	0.48	-54.88	-20.00	34.88
623.01	V	19.52	-51.79	0.00	0.48	-52.27	-20.00	32.27
778.76	H	19.46	-52.27	0.00	0.54	-52.81	-20.00	32.81
778.76	V	19.34	-48.86	0.00	0.54	-49.40	-20.00	29.40
934.52	H	19.75	-48.17	0.00	0.66	-48.83	-20.00	28.83
934.52	V	18.68	-46.77	0.00	0.66	-47.43	-20.00	27.43
1090.27	H	37.13	-64.73	7.35	0.67	-58.05	-20.00	38.05
1090.27	V	36.82	-65.50	7.35	0.67	-58.82	-20.00	38.82
1246.02	H	37.31	-65.49	7.79	0.68	-58.38	-20.00	38.38
1246.02	V	35.83	-67.58	7.79	0.68	-60.47	-20.00	40.47
1401.77	H	37.20	-66.51	8.22	0.71	-59.00	-20.00	39.00
1401.77	V	37.07	-66.68	8.22	0.71	-59.17	-20.00	39.17
1557.53	H	35.38	-68.59	8.57	0.80	-60.82	-20.00	40.82
1557.53	V	36.38	-67.65	8.57	0.80	-59.88	-20.00	39.88
4FSK, Frequency: 155.7525MHz-12.5 kHz								
311.51	H	32.95	-46.27	0.00	0.34	-46.61	-20.00	26.61
311.51	V	30.87	-46.46	0.00	0.34	-46.80	-20.00	26.80
467.26	H	18.94	-57.56	0.00	0.42	-57.98	-20.00	37.98
467.26	V	18.35	-54.53	0.00	0.42	-54.95	-20.00	34.95
623.01	H	18.26	-55.48	0.00	0.48	-55.96	-20.00	35.96
623.01	V	19.21	-52.10	0.00	0.48	-52.58	-20.00	32.58
778.76	H	19.55	-52.18	0.00	0.54	-52.72	-20.00	32.72
778.76	V	19.34	-48.86	0.00	0.54	-49.40	-20.00	29.40
934.52	H	19.78	-48.14	0.00	0.66	-48.80	-20.00	28.80
934.52	V	20.35	-45.10	0.00	0.66	-45.76	-20.00	25.76
1090.27	H	50.55	-51.31	7.35	0.67	-44.63	-20.00	24.63
1090.27	V	50.29	-52.03	7.35	0.67	-45.35	-20.00	25.35
1246.02	H	41.61	-61.19	7.79	0.68	-54.08	-20.00	34.08
1246.02	V	41.03	-62.38	7.79	0.68	-55.27	-20.00	35.27
1401.77	H	45.56	-58.15	8.22	0.71	-50.64	-20.00	30.64
1401.77	V	47.34	-56.41	8.22	0.71	-48.90	-20.00	28.90
1557.53	H	36.07	-67.90	8.57	0.80	-60.13	-20.00	40.13
1557.53	V	36.48	-67.55	8.57	0.80	-59.78	-20.00	39.78

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	18.42	-60.25	0.00	0.36	-60.61	-20.00	40.61
347.98	V	17.98	-58.62	0.00	0.36	-58.98	-20.00	38.98
521.96	H	18.37	-57.03	0.00	0.41	-57.44	-20.00	37.44
521.96	V	18.39	-53.22	0.00	0.41	-53.63	-20.00	33.63
695.95	H	19.26	-54.08	0.00	0.55	-54.63	-20.00	34.63
695.95	V	19.12	-50.87	0.00	0.55	-51.42	-20.00	31.42
869.94	H	20.34	-49.19	0.00	0.58	-49.77	-20.00	29.77
869.94	V	20.59	-46.02	0.00	0.58	-46.60	-20.00	26.60
1043.93	H	34.80	-68.02	7.22	0.65	-61.45	-20.00	41.45
1043.93	V	35.37	-67.77	7.22	0.65	-61.20	-20.00	41.20
1217.91	H	37.31	-65.53	7.71	0.69	-58.51	-20.00	38.51
1217.91	V	36.88	-66.65	7.71	0.69	-59.63	-20.00	39.63
1391.90	H	35.69	-67.94	8.20	0.72	-60.46	-20.00	40.46
1391.90	V	36.03	-67.67	8.20	0.72	-60.19	-20.00	40.19
1565.89	H	36.36	-67.69	8.58	0.80	-59.91	-20.00	39.91
1565.89	V	36.88	-67.23	8.58	0.80	-59.45	-20.00	39.45
1739.88	H	36.44	-67.53	8.79	0.85	-59.59	-20.00	39.59
1739.88	V	35.24	-68.89	8.79	0.85	-60.95	-20.00	40.95
4FSK, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	17.68	-60.99	0.00	0.36	-61.35	-20.00	41.35
347.98	V	21.12	-55.48	0.00	0.36	-55.84	-20.00	35.84
521.96	H	20.59	-54.81	0.00	0.41	-55.22	-20.00	35.22
521.96	V	21.56	-50.05	0.00	0.41	-50.46	-20.00	30.46
695.95	H	19.99	-53.35	0.00	0.55	-53.90	-20.00	33.90
695.95	V	18.35	-51.64	0.00	0.55	-52.19	-20.00	32.19
869.94	H	20.04	-49.49	0.00	0.58	-50.07	-20.00	30.07
869.94	V	19.04	-47.57	0.00	0.58	-48.15	-20.00	28.15
1043.93	H	37.81	-65.01	7.22	0.65	-58.44	-20.00	38.44
1043.93	V	38.18	-64.96	7.22	0.65	-58.39	-20.00	38.39
1217.91	H	49.66	-53.18	7.71	0.69	-46.16	-20.00	26.16
1217.91	V	48.28	-55.25	7.71	0.69	-48.23	-20.00	28.23
1391.90	H	37.79	-65.84	8.20	0.72	-58.36	-20.00	38.36
1391.90	V	38.59	-65.11	8.20	0.72	-57.63	-20.00	37.63
1565.89	H	40.89	-63.16	8.58	0.80	-55.38	-20.00	35.38
1565.89	V	39.88	-64.23	8.58	0.80	-56.45	-20.00	36.45
1739.88	H	36.81	-67.16	8.79	0.85	-59.22	-20.00	39.22
1739.88	V	36.98	-67.15	8.79	0.85	-59.21	-20.00	39.21

Part 80

Part 66

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 154.0125MHz-25 kHz								
308.03	H	26.33	-52.95	0.00	0.34	-53.29	-13.00	40.29
308.03	V	25.76	-51.64	0.00	0.34	-51.98	-13.00	38.98
462.04	H	17.96	-58.64	0.00	0.41	-59.05	-13.00	46.05
462.04	V	18.39	-54.70	0.00	0.41	-55.11	-13.00	42.11
616.05	H	19.13	-54.64	0.00	0.48	-55.12	-13.00	42.12
616.05	V	19.22	-52.22	0.00	0.48	-52.70	-13.00	39.70
770.06	H	18.65	-53.25	0.00	0.55	-53.80	-13.00	40.80
770.06	V	19.63	-48.76	0.00	0.55	-49.31	-13.00	36.31
1078.09	H	47.67	-54.44	7.32	0.66	-47.78	-13.00	34.78
1078.09	V	49.96	-52.58	7.32	0.66	-45.92	-13.00	32.92
1232.10	H	41.89	-60.93	7.75	0.68	-53.86	-13.00	40.86
1232.10	V	41.79	-61.68	7.75	0.68	-54.61	-13.00	41.61
1386.11	H	43.16	-60.41	8.18	0.73	-52.96	-13.00	39.96
1386.11	V	44.97	-58.70	8.18	0.73	-51.25	-13.00	38.25
1540.13	H	36.72	-67.09	8.55	0.78	-59.32	-13.00	46.32
1540.13	V	35.63	-68.26	8.55	0.78	-60.49	-13.00	47.49

Part 74

art 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 161.1MHz-12.5 kHz								
322.20	H	25.94	-53.12	0.00	0.34	-53.46	-20.00	33.46
322.20	V	23.69	-53.42	0.00	0.34	-53.76	-20.00	33.76
483.30	H	18.59	-57.58	0.00	0.42	-58.00	-20.00	38.00
483.30	V	18.65	-53.59	0.00	0.42	-54.01	-20.00	34.01
644.40	H	18.43	-55.19	0.00	0.52	-55.71	-20.00	35.71
644.40	V	18.69	-52.24	0.00	0.52	-52.76	-20.00	32.76
805.50	H	19.12	-52.04	0.00	0.56	-52.60	-20.00	32.60
805.50	V	19.52	-48.13	0.00	0.56	-48.69	-20.00	28.69
966.60	H	20.62	-46.52	0.00	0.59	-47.11	-20.00	27.11
966.60	V	19.63	-45.19	0.00	0.59	-45.78	-20.00	25.78
1127.70	H	36.63	-65.36	7.46	0.64	-58.54	-20.00	38.54
1127.70	V	36.23	-66.32	7.46	0.64	-59.50	-20.00	39.50
1288.80	H	36.98	-65.76	7.91	0.70	-58.55	-20.00	38.55
1288.80	V	37.20	-66.04	7.91	0.70	-58.83	-20.00	38.83
1449.90	H	36.78	-66.80	8.36	0.75	-59.19	-20.00	39.19
1449.90	V	36.71	-66.94	8.36	0.75	-59.33	-20.00	39.33
1611.00	H	36.27	-68.09	8.63	0.82	-60.28	-20.00	40.28
1611.00	V	36.03	-68.37	8.63	0.82	-60.56	-20.00	40.56
FM, Frequency: 161.1MHz-25 kHz								
322.20	H	24.85	-54.21	0.00	0.34	-54.55	-13.00	41.55
322.20	V	24.83	-52.28	0.00	0.34	-52.62	-13.00	39.62
483.30	H	18.15	-58.02	0.00	0.42	-58.44	-13.00	45.44
483.30	V	18.65	-53.59	0.00	0.42	-54.01	-13.00	41.01
644.40	H	19.38	-54.24	0.00	0.52	-54.76	-13.00	41.76
644.40	V	19.16	-51.77	0.00	0.52	-52.29	-13.00	39.29
805.50	H	18.64	-52.52	0.00	0.56	-53.08	-13.00	40.08
805.50	V	18.97	-48.68	0.00	0.56	-49.24	-13.00	36.24
966.60	H	19.47	-47.67	0.00	0.59	-48.26	-13.00	35.26
966.60	V	19.56	-45.26	0.00	0.59	-45.85	-13.00	32.85
1127.70	H	35.65	-66.34	7.46	0.64	-59.52	-13.00	46.52
1127.70	V	36.43	-66.12	7.46	0.64	-59.30	-13.00	46.30
1288.80	H	36.25	-66.49	7.91	0.70	-59.28	-13.00	46.28
1288.80	V	36.86	-66.38	7.91	0.70	-59.17	-13.00	46.17
1449.90	H	37.10	-66.48	8.36	0.75	-58.87	-13.00	45.87
1449.90	V	36.10	-67.55	8.36	0.75	-59.94	-13.00	46.94
1611.00	H	35.81	-68.55	8.63	0.82	-60.74	-13.00	47.74
1611.00	V	35.81	-68.59	8.63	0.82	-60.78	-13.00	47.78

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 161.1MHz-12.5 kHz								
322.20	H	24.33	-54.73	0.00	0.34	-55.07	-20.00	35.07
322.20	V	24.98	-52.13	0.00	0.34	-52.47	-20.00	32.47
483.30	H	19.37	-56.80	0.00	0.42	-57.22	-20.00	37.22
483.30	V	18.97	-53.27	0.00	0.42	-53.69	-20.00	33.69
644.40	H	18.57	-55.05	0.00	0.52	-55.57	-20.00	35.57
644.40	V	19.90	-51.03	0.00	0.52	-51.55	-20.00	31.55
805.50	H	18.66	-52.50	0.00	0.56	-53.06	-20.00	33.06
805.50	V	17.86	-49.79	0.00	0.56	-50.35	-20.00	30.35
966.60	H	19.78	-47.36	0.00	0.59	-47.95	-20.00	27.95
966.60	V	18.38	-46.44	0.00	0.59	-47.03	-20.00	27.03
1127.70	H	62.28	-39.71	7.46	0.64	-32.89	-20.00	12.89
1127.70	V	56.77	-45.78	7.46	0.64	-38.96	-20.00	18.96
1288.80	H	41.04	-61.70	7.91	0.70	-54.49	-20.00	34.49
1288.80	V	39.70	-63.54	7.91	0.70	-56.33	-20.00	36.33
1449.90	H	46.85	-56.73	8.36	0.75	-49.12	-20.00	29.12
1449.90	V	43.72	-59.93	8.36	0.75	-52.32	-20.00	32.32
1611.00	H	36.58	-67.78	8.63	0.82	-59.97	-20.00	39.97
1611.00	V	36.20	-68.20	8.63	0.82	-60.39	-20.00	40.39

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 150.8125MHz-12.5 kHz								
301.63	H	26.77	-52.61	0.00	0.34	-52.95	-13.00	39.95
301.63	V	22.45	-55.08	0.00	0.34	-55.42	-13.00	42.42
452.44	H	18.72	-58.08	0.00	0.43	-58.51	-13.00	45.51
452.44	V	17.93	-55.54	0.00	0.43	-55.97	-13.00	42.97
603.25	H	18.75	-55.09	0.00	0.50	-55.59	-13.00	42.59
603.25	V	18.62	-53.05	0.00	0.50	-53.55	-13.00	40.55
754.06	H	17.53	-54.70	0.00	0.52	-55.22	-13.00	42.22
754.06	V	18.69	-50.05	0.00	0.52	-50.57	-13.00	37.57
904.88	H	19.35	-49.30	0.00	0.55	-49.85	-13.00	36.85
904.88	V	19.88	-46.15	0.00	0.55	-46.70	-13.00	33.7
1055.69	H	35.94	-66.63	7.26	0.65	-60.02	-13.00	47.02
1055.69	V	36.23	-66.70	7.26	0.65	-60.09	-13.00	47.09
1206.50	H	36.13	-66.72	7.68	0.69	-59.73	-13.00	46.73
1206.50	V	36.23	-67.34	7.68	0.69	-60.35	-13.00	47.35
1357.31	H	35.90	-67.39	8.10	0.78	-60.07	-13.00	47.07
1357.31	V	35.92	-67.59	8.10	0.78	-60.27	-13.00	47.27
1508.13	H	35.16	-68.36	8.51	0.76	-60.61	-13.00	47.61
1508.13	V	35.42	-68.19	8.51	0.76	-60.44	-13.00	47.44
FM, Frequency: 150.8125MHz-25 kHz								
301.63	H	28.44	-50.94	0.00	0.34	-51.28	-13.00	38.28
301.63	V	22.36	-55.17	0.00	0.34	-55.51	-13.00	42.51
452.44	H	17.69	-59.11	0.00	0.43	-59.54	-13.00	46.54
452.44	V	18.35	-55.12	0.00	0.43	-55.55	-13.00	42.55
603.25	H	18.82	-55.02	0.00	0.50	-55.52	-13.00	42.52
603.25	V	19.15	-52.52	0.00	0.50	-53.02	-13.00	40.02
754.06	H	18.96	-53.27	0.00	0.52	-53.79	-13.00	40.79
754.06	V	19.38	-49.36	0.00	0.52	-49.88	-13.00	36.88
904.88	H	19.59	-49.06	0.00	0.55	-49.61	-13.00	36.61
904.88	V	19.17	-46.86	0.00	0.55	-47.41	-13.00	34.41
1055.69	H	46.37	-56.20	7.26	0.65	-49.59	-13.00	36.59
1055.69	V	45.68	-57.25	7.26	0.65	-50.64	-13.00	37.64
1206.50	H	42.68	-60.17	7.68	0.69	-53.18	-13.00	40.18
1206.50	V	42.23	-61.34	7.68	0.69	-54.35	-13.00	41.35
1357.31	H	41.62	-61.67	8.10	0.78	-54.35	-13.00	41.35
1357.31	V	42.94	-60.57	8.10	0.78	-53.25	-13.00	40.25
1508.13	H	38.13	-65.39	8.51	0.76	-57.64	-13.00	44.64
1508.13	V	36.65	-66.96	8.51	0.76	-59.21	-13.00	46.21

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 150.8125MHz-12.5 kHz								
301.63	H	26.43	-52.95	0.00	0.34	-53.29	-13.00	40.29
301.63	V	22.71	-54.82	0.00	0.34	-55.16	-13.00	42.16
452.44	H	18.37	-58.43	0.00	0.43	-58.86	-13.00	45.86
452.44	V	17.64	-55.83	0.00	0.43	-56.26	-13.00	43.26
603.25	H	18.83	-55.01	0.00	0.50	-55.51	-13.00	42.51
603.25	V	18.16	-53.51	0.00	0.50	-54.01	-13.00	41.01
754.06	H	19.63	-52.60	0.00	0.52	-53.12	-13.00	40.12
754.06	V	19.32	-49.42	0.00	0.52	-49.94	-13.00	36.94
904.88	H	19.97	-48.68	0.00	0.55	-49.23	-13.00	36.23
904.88	V	19.01	-47.02	0.00	0.55	-47.57	-13.00	34.57
1055.69	H	46.18	-56.39	7.26	0.65	-49.78	-13.00	36.78
1055.69	V	50.30	-52.63	7.26	0.65	-46.02	-13.00	33.02
1206.50	H	42.65	-60.20	7.68	0.69	-53.21	-13.00	40.21
1206.50	V	43.46	-60.11	7.68	0.69	-53.12	-13.00	40.12
1357.31	H	42.50	-60.79	8.10	0.78	-53.47	-13.00	40.47
1357.31	V	44.31	-59.20	8.10	0.78	-51.88	-13.00	38.88
1508.13	H	38.22	-65.30	8.51	0.76	-57.55	-13.00	44.55
1508.13	V	37.34	-66.27	8.51	0.76	-58.52	-13.00	45.52

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

4.6 FREQUENCY STABILITY:

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.8
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554404	2021-08-08	2022-08-07
BEW	Coaxial Attenuator	TS300-6-40	213311	2021-08-08	2022-08-07
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
UNI-T	Multimeter	UT39A+	C210582554	2021-09-30	2022-09-29
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**FCC Part 90:**

FM,12.5kHz, Reference Frequency: 155.7525 MHz, Limit: ± 2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	155.7526847	1.19
-20		155.7525491	0.32
-10		155.7524135	-0.56
0		155.7526211	0.78
10		155.7525441	0.28
20		155.7525000	0.00
30		155.7524990	-0.01
40		155.7525425	0.27
50		155.7525383	0.25
20	6.4	155.7526098	0.70
20	8.4	155.7525368	0.24

4FSK, 12.5kHz, Reference Frequency: 155.7525MHz, Limit: ± 2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	155.7524654	-0.22
-20		155.7524584	-0.27
-10		155.7524660	-0.22
0		155.7524630	-0.24
10		155.7525405	0.26
20		155.7525000	0.00
30		155.7525715	0.46
40		155.7526060	0.68
50		155.7524118	-0.57
20	6.4	155.7526039	0.67
20	8.4	155.7525723	0.46

FCC Part 80:

FM, 25kHz, Reference Frequency: 154.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	154.012561	0.40
-20		154.012742	1.57
-10		154.012535	0.23
0		154.012674	1.13
10		154.012674	1.13
20		154.012500	0.00
30		154.012506	0.04
40		154.012762	1.70
50		154.012674	1.13
20	6.4	154.012715	1.39
20	8.4	154.012507	0.04

FCC Part 74:

FM, 12.5kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	161.1002527	1.57
-20		161.1001486	0.92
-10		161.1002322	1.44
0		161.1002195	1.36
10		161.1002727	1.69
20		161.1000000	0.00
30		161.1001729	1.07
40		161.1001888	1.17
50		161.1001571	0.98
20	6.4	161.1001363	0.85
20	8.4	161.1002617	1.62

4FSK, 12.5kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	161.1001061	0.66
-20		161.1002701	1.68
-10		161.1001692	1.05
0		161.1000390	0.24
10		161.1000158	0.10
20		161.1000500	0.31
30		161.1000723	0.45
40		161.1001597	0.99
50		161.1001813	1.13
20	6.4	161.1000102	0.06
20	8.4	161.1001021	0.63

FM, 25kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	161.1001340	0.83
-20		161.1000890	0.55
-10		161.1000219	0.14
0		161.1000784	0.49
10		161.1001822	1.13
20		161.1000000	0.00
30		161.1000830	0.52
40		161.1001476	0.92
50		161.1001944	1.21
20	6.4	161.1002311	1.43
20	8.4	161.1000914	0.57

FCC Part 22:

FM, 12.5kHz, Reference Frequency: 150.8125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	150.8126832	1.21
-20		150.8126774	1.18
-10		150.8124773	-0.15
0		150.8126358	0.90
10		150.8125380	0.25
20		150.8125000	0.00
30		150.8126107	0.73
40		150.8126340	0.89
50		150.8124210	-0.52
20	6.4	150.8125431	0.29
20	8.4	150.8124845	-0.10

4FSK,12.5kHz, Reference Frequency: 150.8125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	150.8125424	0.28
-20		150.8126539	1.02
-10		150.8125388	0.26
0		150.8126464	0.97
10		150.8125814	0.54
20		150.8125500	0.33
30		150.8125600	0.40
40		150.8126236	0.82
50		150.8124670	-0.22
20	6.4	150.8126977	1.31
20	8.4	150.8126141	0.76

FM, 25kHz, Reference Frequency: 150.8125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	150.8124132	-0.58
-20		150.8124829	-0.11
-10		150.8124371	-0.42
0		150.8126437	0.95
10		150.8126637	1.09
20		150.8125000	0.00
30		150.8125849	0.56
40		150.8124348	-0.43
50		150.8126488	0.99
20	6.4	150.8125312	0.21
20	8.4	150.8126683	1.12

4.7 TRANSIENT FREQUENCY BEHAVIOR

Serial Number:	CR21110027-RF-S1	Test Date:	2021-12-02~2021-12-27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.1~22.1	Relative Humidity: (%)	26~30	ATM Pressure: (kPa)	101.7~101.8

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554404	2021-08-08	2022-08-07
BEW	Coaxial Attenuator	TS300-6-40	213311	2021-08-08	2022-08-07
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21



* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5(t ₁)	±12.5 kHz	Pass
	20(t ₂)	±6.25 kHz	
	5(t ₃)	±12.5 kHz	

Note: During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213:

For 155.7525 MHz 12.5kHz mode, limit is: 155.7525 MHz * 5ppm = 0.78kHz

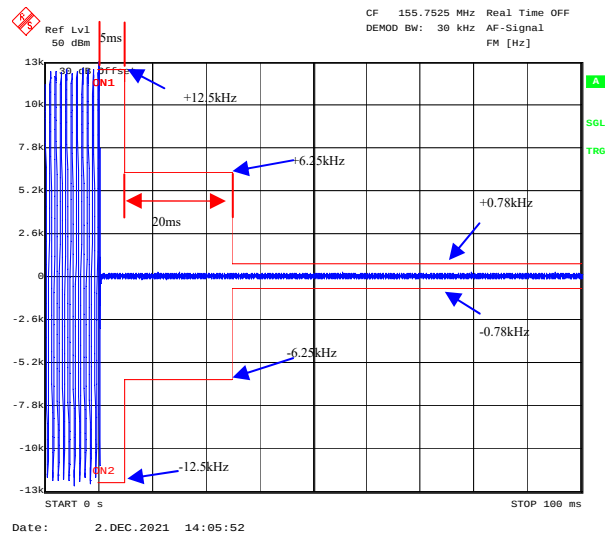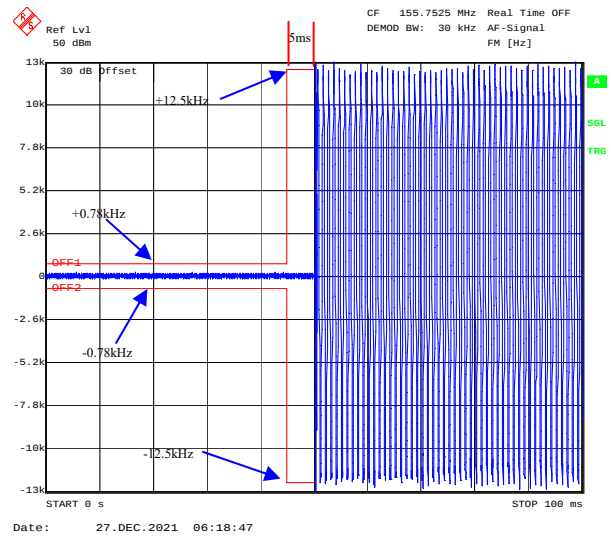Turn On**Turn Off**

***** END OF REPORT *****