

## TEST REPORT

**Applicant:** FJ Dynamics Technology Academy (Changzhou)Co., Ltd.  
Shenzhen Branch

**Address:** Room 401, Building 2, Nangang Second Industrial Park, Nanshan  
District, Shenzhen, China

**Product Name:** FJDynamics AT2 Max Auto Steer System


**FCC ID:** 2BLLH-AT2MAX

**Standard(s):** 47 CFR Part 15, Subpart C (15.247)  
ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02


**Report Number:** 2402A108252E-RF-00B

**Report Date:** 2025/1/16

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



**Reviewed By:** Pedro Yun  
Title: **Project Engineer**



**Approved By:** Gavin Xu  
Title: **RF Supervisor**

---

**Bay Area Compliance Laboratories Corp. (Dongguan)**  
No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

## CONTENTS

|   |           |
|---|-----------|
| <b>DOCUMENT REVISION HISTORY</b>                  | <b>4</b>  |
| <b>1. GENERAL INFORMATION</b>                     | <b>5</b>  |
| 1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST   | 5         |
| 1.2 ACCESSORY INFORMATION                         | 5         |
| 1.3 ANTENNA INFORMATION DETAIL ▲                  | 5         |
| 1.4 EQUIPMENT MODIFICATIONS                       | 5         |
| <b>2. SUMMARY OF TEST RESULTS</b>                 | <b>6</b>  |
| <b>3. DESCRIPTION OF TEST CONFIGURATION</b>       | <b>7</b>  |
| 3.1 OPERATION FREQUENCY DETAIL                    | 7         |
| 3.2 EUT OPERATION CONDITION                       | 7         |
| 3.3 SUPPORT EQUIPMENT LIST AND DETAILS            | 7         |
| 3.4 SUPPORT CABLE LIST AND DETAILS                | 8         |
| 3.5 BLOCK DIAGRAM OF TEST SETUP                   | 8         |
| 3.6 TEST FACILITY                                 | 9         |
| 3.7 MEASUREMENT UNCERTAINTY                       | 9         |
| <b>4. REQUIREMENTS AND TEST PROCEDURES</b>        | <b>10</b> |
| 4.1 AC LINE CONDUCTED EMISSIONS                   | 10        |
| 4.1.1 Applicable Standard                         | 10        |
| 4.1.2 EUT Setup                                   | 11        |
| 4.1.3 EMI Test Receiver Setup                     | 11        |
| 4.1.4 Test Procedure                              | 12        |
| 4.1.5 Corrected Amplitude & Margin Calculation    | 12        |
| 4.1.6 Test Result                                 | 12        |
| 4.2 RADIATED SPURIOUS EMISSIONS                   | 13        |
| 4.2.1 Applicable Standard                         | 13        |
| 4.2.2 EUT Setup                                   | 13        |
| 4.2.3 EMI Test Receiver & Spectrum Analyzer Setup | 15        |
| 4.2.4 Test Procedure                              | 15        |
| 4.2.5 Corrected Result & Margin Calculation       | 15        |
| 4.2.6 Test Result                                 | 15        |
| 4.3 20 DB EMISSION BANDWIDTH                      | 16        |
| 4.3.1 Applicable Standard                         | 16        |
| 4.3.2 EUT Setup                                   | 16        |
| 4.3.3 Test Procedure                              | 16        |
| 4.3.4 Test Result                                 | 17        |
| 4.4 CHANNEL SEPARATION                            | 18        |
| 4.4.1 Applicable Standard                         | 18        |
| 4.4.2 EUT Setup                                   | 18        |
| 4.4.3 Test Procedure                              | 18        |
| 4.4.4 Test Result                                 | 18        |
| 4.5 NUMBER OF HOPPING FREQUENCY                   | 19        |

|   |           |
|---|-----------|
| 4.5.1 Applicable Standard .....                           | 19        |
| 4.5.2 EUT Setup .....                                     | 19        |
| 4.5.3 Test Procedure .....                                | 19        |
| 4.5.4 Test Result .....                                   | 19        |
| <b>4.6 TIME OF OCCUPANCY (DWELL TIME) .....</b>           | <b>20</b> |
| 4.6.1 Applicable Standard .....                           | 20        |
| 4.6.2 EUT Setup .....                                     | 20        |
| 4.6.3 Test Procedure .....                                | 20        |
| 4.6.4 Test Result .....                                   | 20        |
| <b>4.7 MAXIMUM CONDUCTED OUTPUT POWER .....</b>           | <b>21</b> |
| 4.7.1 Applicable Standard .....                           | 21        |
| 4.7.2 EUT Setup .....                                     | 21        |
| 4.7.3 Test Procedure .....                                | 21        |
| 4.7.4 Test Result .....                                   | 21        |
| <b>4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b> | <b>22</b> |
| 4.8.1 Applicable Standard .....                           | 22        |
| 4.8.2 EUT Setup .....                                     | 22        |
| 4.8.3 Test Procedure .....                                | 22        |
| 4.8.4 Test Result .....                                   | 22        |
| <b>4.9 ANTENNA REQUIREMENT .....</b>                      | <b>23</b> |
| 4.9.1 Applicable Standard .....                           | 23        |
| 4.9.2 Judgment .....                                      | 23        |
| <b>5. TEST DATA AND RESULTS .....</b>                     | <b>24</b> |
| <b>5.1 AC LINE CONDUCTED EMISSIONS .....</b>              | <b>24</b> |
| <b>5.2 RADIATED SPURIOUS EMISSIONS .....</b>              | <b>25</b> |
| <b>5.3 20 dB EMISSION BANDWIDTH .....</b>                 | <b>36</b> |
| <b>5.4 CHANNEL SEPARATION .....</b>                       | <b>39</b> |
| <b>5.5 NUMBER OF HOPPING FREQUENCY .....</b>              | <b>41</b> |
| <b>5.6 TIME OF OCCUPANCY (DWELL TIME) .....</b>           | <b>43</b> |
| <b>5.7 MAXIMUM CONDUCTED OUTPUT POWER .....</b>           | <b>46</b> |
| <b>5.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b> | <b>49</b> |
| <b>EXHIBIT A - EUT PHOTOGRAPHS .....</b>                  | <b>52</b> |
| <b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>           | <b>53</b> |

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number       | Description of Revision | Date of Revision |
|-----------------|---------------------|-------------------------|------------------|
| 1.0             | 2402A108252E-RF-00B | Original Report         | 2025/1/16        |

## 1. GENERAL INFORMATION

### 1.1 General Description of Equipment under Test

|   |  |
|---|--|
| <b>EUT Name:</b>                              | FJDynamics AT2 Max Auto Steer System                                 |
| <b>Trade Name</b>                             | FJDynamics   |
| <b>EUT Model:</b>                             | AT2 Max  |
| <b>Operation Frequency:</b>                   | 2402-2480 MHz  |
| <b>Maximum Peak Output Power (Conducted):</b> | 3.20dBm  |
| <b>Modulation Type:</b>                       | GFSK, $\pi/4$ -DQPSK, 8DPSK  |
| <b>Rated Input Voltage:</b>                   | DC 9-36V, Typical Voltage: DC 12V                                    |
| <b>Serial Number:</b>                         | 2VH2-1(for Radiated Emissions Test)<br>2VH2-2(for RF Conducted Test) |
| <b>EUT Received Date:</b>                     | 2024/12/3  |
| <b>EUT Received Status:</b>                   | Good   |

### 1.2 Accessory Information

| Accessory Description                    | Manufacturer | Model   | Parameters                           |
|--|--------------|---------|--------------------------------------|
| Control Terminal                         | FJDynamics   | AT2 Max | Power Supply: 9~36VDC                |
| GNSS Receiver                            | FJDynamics   | /       | Operating Voltage: 9~36VDC           |
| Electric Steering Wheel                  | FJDynamics   | /       | Power Supply: 12VDC or 24VDC         |
| Power Wiring Harness (With Switch Key)   | FJDynamics   | /       | Unshielded without ferrite, 4.5Meter |
| Main Wiring Harness                      | FJDynamics   | /       | Unshielded without ferrite, 2.0Meter |
| Spare Main Wiring Harness                | FJDynamics   | /       | Unshielded without ferrite, 2.5Meter |
| GNSS Receiver Wiring Harness             | FJDynamics   | /       | Unshielded without ferrite, 4.0Meter |
| Attitude Sensor (With Wiring Harness)    | FJDynamics   | /       | Unshielded without ferrite, 3.0Meter |
| Attitude Sensor Extension Wiring Harness | FJDynamics   | /       | Unshielded without ferrite, 2.0Meter |
| Radio Antenna (With Coaxial Harness)     | FJDynamics   | /       | Unshielded without ferrite, 4.0Meter |

### 1.3 Antenna Information Detail<sup>▲</sup>

| Antenna Type   | input impedance (Ohm) | Frequency Range | Antenna Gain |
|--|-----------------------|-----------------|--------------|
| FPC  | 50                    | 2.4-2.5GHz      | 4.3dBi       |
| <b>The design of compliance with §15.203:</b>  |                       |                 |              |
| <input checked="" type="checkbox"/> Unit uses a permanently attached antenna.  |                       |                 |              |
| <input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.  |                       |                 |              |
| <input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. |                       |                 |              |

### 1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

## 2. SUMMARY OF TEST RESULTS

| FCC Rules   | Description of Test                      | Result         |
|---|--|----------------|
| FCC §15.207(a)  | AC Line Conducted Emissions              | Not Applicable |
| FCC §15.205, §15.209,<br>§15.247(d)   | Radiated Spurious Emissions              | Compliant      |
| FCC §15.247(a)(1)   | 20 dB Emission Bandwidth                 | Compliant      |
| FCC §15.247(a)(1)   | Channel Separation                       | Compliant      |
| FCC §15.247(a)(1)(iii)  | Number of Hopping Frequency              | Compliant      |
| FCC §15.247(a)(1)(iii)  | Time of Occupancy (dwell time)           | Compliant      |
| FCC §15.247(b)(1)   | Maximum Conducted Output Power           | Compliant      |
| FCC §15.247(d)  | 100 kHz Bandwidth of Frequency Band Edge | Compliant      |
| FCC §15.203   | Antenna Requirement                      | Compliant      |
| Not Applicable: The EUT is a vehicle-mounted device, not applicable for this test item.<br>Note 1: For Radiated Spurious Emissions 9kHz~1GHz and 18GHz~25GHz, the maximum output power mode and channel was tested. |  |                |

### 3. DESCRIPTION OF TEST CONFIGURATION

#### 3.1 Operation Frequency Detail

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | <b>2402</b>     | 40      | 2442            |
| 1       | 2404            | 41      | 2443            |
| ...     | ...             | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | 78      | <b>2480</b>     |
| 39      | <b>2441</b>     | /       | /               |

Note: The above frequency in boldface were tested.

#### 3.2 EUT Operation Condition

The EUT was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration as below:

The EUT Configuration is as follows:

|   |                     |                |                 |
|---|---------------------|----------------|-----------------|
| <b>EUT Exercise Software:</b>   | ADB.exe             |                |                 |
| The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲: |                     |                |                 |
| Test Modes  | Power Level Setting |                |                 |
|   | Lowest Channel      | Middle Channel | Highest Channel |
| GFSK  | 1                   | 1              | 1               |
| $\pi/4$ -DQPSK  | 1                   | 1              | 1               |
| 8DPSK   | 1                   | 1              | 1               |

#### 3.3 Support Equipment List and Details


| Manufacturer | Description    | Model     | Serial Number |
|--------------|----------------|-----------|---------------|
| DK           | DC Source      | DK-60V50A | T-08-EE140    |
| SANDisk      | USB Flash Disk | 16G       | BL201026115 B |
| FJDynamics   | Wired Camera   | FJ-WC01   | Unknown       |

### 3.4 Support Cable List and Details

| Cable Description                        | Shielding Cable | Ferrite Core | Length (m) | From Port                                | To  |
|--|-----------------|--------------|------------|--|---|
| Power Wiring Harness (With Switch Key)   | No              | No           | 4.5        | DC Source                                | Main Wiring Harness   |
| Main Wiring Harness                      | No              | No           | 2          | Main Wiring Harness                      | EUT1 (Control Terminal)   |
| Main Wiring Harness                      | No              | No           | 2.0        | Main wiring Harness                      | GNSS Receiver Wiring Harness  |
| GNSS Receiver Wiring Harness             | No              | No           | 4          | GNSS Receiver Wiring Harness             | EUT2 (GNSS Receiver)  |
| Spare Main Wiring Harness                | No              | No           | 2.5        | EUT1 (Control Terminal)                  | Electric Steering Wheel Wiring Harness / Attitude Sensor Extension Wiring Harness / Camera Wiring Harness / Electric Steering Wheel |
| Attitude Sensor Extension Wiring Harness | No              | No           | 2          | Spare Main Wiring Harness                | Attitude Sensor Wiring Harness  |
| Attitude Sensor Wiring Harness           | No              | No           | 3          | Attitude Sensor Extension Wiring Harness | Attitude Sensor   |
| Camera Wiring Harness                    | No              | No           | 2          | Spare Main Wiring Harness                | Wired Camera  |
| Radio Antenna Coaxial Harness            | Yes             | No           | 4.5        | EUT1 (Control Terminal)                  | Radio Antenna   |

### 3.5 Block Diagram of Test Setup

Spurious Emissions:

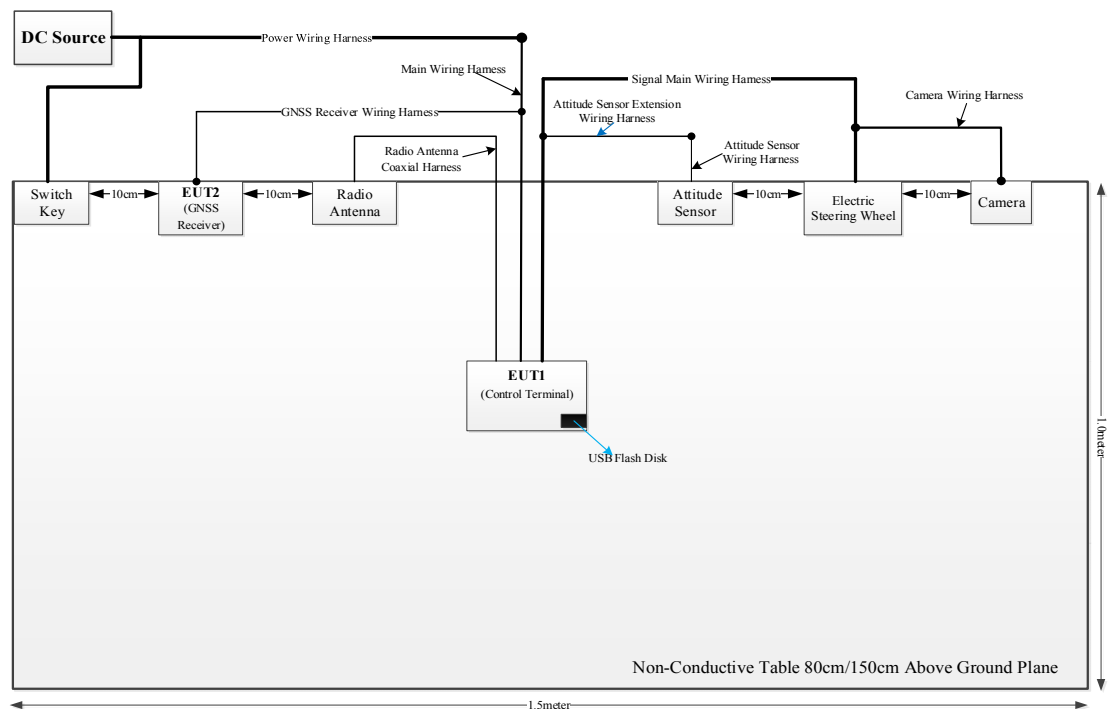



### 3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

### 3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty   |
|-----------------------------------|---|
| Occupied Channel Bandwidth        | ±5 %  |
| RF output power, conducted        | ±0.61dB   |
| Power Spectral Density, conducted | ±0.61 dB  |
| Unwanted Emissions, radiated      | 9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB,<br>200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz:<br>5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB |
| Unwanted Emissions, conducted     | ±2.47 dB  |
| Temperature                       | ±1 °C   |
| Humidity                          | ±5%   |
| DC and low frequency voltages     | ±0.4%   |
| Duty Cycle                        | 1%  |
| AC Power Lines Conducted Emission | 3.11 dB (150 kHz to 30 MHz)   |

## 4. REQUIREMENTS AND TEST PROCEDURES

### 4.1 AC Line Conducted Emissions

#### 4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

#### 4.1.2 EUT Setup



The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

#### 4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

#### 4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

#### 4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.1.6 Test Result

Please refer to section 5.1.

## 4.2 Radiated Spurious Emissions


### 4.2.1 Applicable Standard



FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 4.2.2 EUT Setup

9kHz~30MHz:



**30MHz~1GHz:****Above 1GHz:**

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

#### 4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

| Frequency Range | Measurement | RBW     | Video B/W | IF B/W  | Detector |
|-----------------|-------------|---------|-----------|---------|----------|
| 9 kHz-150 kHz   | QP/AV       | 200 Hz  | 1 kHz     | 200 Hz  | QP/AV    |
| 150 kHz-30 MHz  | QP/AV       | 9 kHz   | 30 kHz    | 9 kHz   | QP/AV    |
| 30 MHz-1000 MHz | Peak        | 100 kHz | 300 kHz   | /       | PK       |
|                 | QP          | /       | /         | 120 kHz | QP       |

Above 1GHz:

Pre-scan:

| Frequency Range | Measurement | RBW  | Video B/W | Detector |
|-----------------|-------------|------|-----------|----------|
| Above 1 GHz     | Peak        | 1MHz | 3 MHz     | PK       |
|                 | AV          | 1MHz | 5kHz      | PK       |

Final measurement for emission identified during the pre-scan:

| Frequency Range | Measurement | RBW  | Video B/W | Detector |
|-----------------|-------------|------|-----------|----------|
| Above 1 GHz     | Peak        | 1MHz | 3 MHz     | PK       |
|                 | AV          | 1MHz | 10 Hz     | PK       |

#### 4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

#### 4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

For the spurious emission below 30MHz, the limit was converted from dBμA/m to dBμV/m by adding 51.5 dB.

#### 4.2.6 Test Result

Please refer to section 5.2.


### 4.3 20 dB Emission Bandwidth

#### 4.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### 4.3.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

#### 4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).



- h) Determine the “-xx dB down amplitude” using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

#### **4.3.4 Test Result**

Please refer to section 5.3.


## 4.4 Channel Separation

### 4.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 4.4.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

### 4.4.4 Test Result

Please refer to section 5.4.


## 4.5 Number of Hopping Frequency

### 4.5.1 Applicable Standard

FCC §15.247 (a)(1)(iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 4.5.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### 4.5.4 Test Result


Please refer to section 5.5.

## 4.6 Time of Occupancy (Dwell Time)

### 4.6.1 Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 4.6.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.6.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Zero span, centered on a hopping channel.
- RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where  $T$  is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = \\ & \text{(number of hops on spectrum analyzer)} \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

### 4.6.4 Test Result

Please refer to section 5.6.


## 4.7 Maximum Conducted Output Power

### 4.7.1 Applicable Standard

FCC §15.247 (b)(1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### 4.7.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.7.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation, Offset the Insertion loss of the RF cable, DC Block/ Attenuator into the spectrum analyzer. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW  $\geq$  RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

### 4.7.4 Test Result

Please refer to section 5.7.


## 4.8 100 kHz Bandwidth of Frequency Band Edge

### 4.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 4.8.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.8.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.6

For band-edge measurements, use the band-edge procedure in 6.10. Band-edge measurements shall be tested both on single channels, and with the EUT hopping.

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

### 4.8.4 Test Result

Please refer to section 5.8.

## **4.9 Antenna Requirement**

### **4.9.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **4.9.2 Judgment**

**Compliant.** Please refer to the Antenna Information detail in Section 1.3.

---

## **5. TEST DATA AND RESULTS**

---

### **5.1 AC Line Conducted Emissions**

**Not Applicable.**



## 5.2 Radiated Spurious Emissions

### 1) 9kHz - 1GHz

|                |            |              |              |
|----------------|------------|--------------|--------------|
| Serial Number: | 2VH2-1     | Test Date:   | 2024/12/19   |
| Test Site:     | Chamber A  | Test Mode:   | Transmitting |
| Tester:        | Jayce Wang | Test Result: | Pass         |

| Environmental Conditions: |      |                           |    |                           |       |
|---------------------------|------|---------------------------|----|---------------------------|-------|
| Temperature:<br>(°C)      | 20.9 | Relative Humidity:<br>(%) | 30 | ATM<br>Pressure:<br>(kPa) | 102.5 |

#### Test Equipment List and Details:

| Manufacturer   | Description          | Model     | Serial Number | Calibration Date | Calibration Due Date |
|----------------|----------------------|-----------|---------------|------------------|----------------------|
| EMCO           | Passive Loop Antenna | 6512      | 9706-1206     | 2023/10/25       | 2026/10/24           |
| Sunol Sciences | Hybrid Antenna       | JB3       | A060611-2     | 2024/4/16        | 2027/4/15            |
| Narda          | Coaxial Attenuator   | 757C-6dB  | 34010         | 2024/4/16        | 2027/4/15            |
| Unknown        | Coaxial Cable        | C-NJNJ-50 | C-0075-01     | 2024/7/1         | 2025/6/30            |
| Unknown        | Coaxial Cable        | C-NJNJ-50 | C-0400-01     | 2024/7/1         | 2025/6/30            |
| Unknown        | Coaxial Cable        | C-NJNJ-50 | C-1400-01     | 2024/7/1         | 2025/6/30            |
| Sonoma         | Amplifier            | 310N      | 372193        | 2024/8/16        | 2025/8/15            |
| R&S            | EMI Test Receiver    | ESR3      | 102453        | 2024/8/26        | 2025/8/25            |
| Audix          | Test Software        | E3        | 191218 V9     | N/A              | N/A                  |

*\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

#### Test Data:

Please refer to the below table and plots.


After pre-scan in the X, Y and Z axes of orientation, the worst case is referred to table and plots.

*Note: The maximum output power mode and channel: 3EDR(3DH1) mode Low Channel was tested.*

**9kHz~30MHz**

Three antenna orientations (parallel, perpendicular, and ground-parallel) were measured, the worst orientations were below:

Project No.: 2402A108252E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
Serial No.: 2VH2-1  
Tester: Jayce Wang  
: RBW:300Hz,VBW:1kHz




| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 0.010              | 9.70              | 51.56            | 61.26              | 127.62            | 66.36          | Peak     |
| 2   | 0.018              | 10.31             | 49.40            | 59.71              | 122.29            | 62.58          | Peak     |
| 3   | 0.021              | 9.38              | 48.77            | 58.15              | 121.17            | 63.02          | Peak     |
| 4   | 0.050              | 11.41             | 43.41            | 54.82              | 113.60            | 58.78          | Peak     |
| 5   | 0.064              | 11.55             | 41.15            | 52.70              | 111.48            | 58.78          | Peak     |
| 6   | 0.075              | 9.66              | 39.24            | 48.90              | 110.09            | 61.19          | Peak     |

Project No.: 2402A108252E-RF  
Polarization: Parallel  
Test Mode: Transmitting  
: RBW:10kHz,VBW:30kHz

Serial No.: 2VH2-1  
Tester: Jayce Wang

Date: 2024-12-19




| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 5.112              | 41.84             | 5.63             | 47.47              | 69.54             | 22.07          | Peak     |
| 2   | 5.362              | 39.30             | 5.46             | 44.76              | 69.54             | 24.78          | Peak     |
| 3   | 6.056              | 38.01             | 5.04             | 43.05              | 69.54             | 26.49          | Peak     |
| 4   | 18.426             | 36.66             | 3.62             | 40.28              | 69.54             | 29.26          | Peak     |
| 5   | 18.820             | 36.19             | 3.45             | 39.64              | 69.54             | 29.90          | Peak     |
| 6   | 28.755             | 32.13             | 3.47             | 35.60              | 69.54             | 33.94          | Peak     |

## 30MHz-1GHz

Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
: RBW:100kHz,VBW:300kHz

Serial No.: 2VH2-1  
Tester: Jayce Wang

Date: 2024-12-19




| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 197.81             | 51.54             | -11.44           | 40.10              | 43.50             | 3.40           | QP       |
| 2   | 207.51             | 52.09             | -11.09           | 41.00              | 43.50             | 2.50           | QP       |
| 3   | 215.27             | 53.00             | -10.98           | 42.02              | 43.50             | 1.48           | QP       |
| 4   | 233.70             | 53.28             | -11.18           | 42.10              | 46.00             | 3.90           | QP       |
| 5   | 242.43             | 53.08             | -11.28           | 41.80              | 46.00             | 4.20           | QP       |
| 6   | 251.16             | 53.63             | -11.23           | 42.40              | 46.00             | 3.60           | QP       |
| 7   | 278.32             | 51.89             | -10.29           | 41.60              | 46.00             | 4.40           | QP       |
| 8   | 296.75             | 50.21             | -9.41            | 40.80              | 46.00             | 5.20           | QP       |
| 9   | 306.45             | 50.03             | -9.03            | 41.00              | 46.00             | 5.00           | QP       |
| 10  | 323.91             | 50.95             | -8.45            | 42.50              | 46.00             | 3.50           | QP       |
| 11  | 507.24             | 46.40             | -4.20            | 42.20              | 46.00             | 3.80           | QP       |

Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
: RBW:100kHz,VBW:300kHz

Serial No.: 2VH2-1  
Tester: Jayce Wang

Date: 2024-12-19



| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 33.88              | 42.74             | -6.34            | 36.40              | 40.00             | 3.60           | QP       |
| 2   | 197.81             | 50.64             | -11.44           | 39.20              | 43.50             | 4.30           | QP       |
| 3   | 204.60             | 51.32             | -11.12           | 40.20              | 43.50             | 3.30           | QP       |
| 4   | 215.99             | 53.51             | -10.98           | 42.53              | 43.50             | 0.97           | QP       |
| 5   | 224.00             | 52.19             | -10.99           | 41.20              | 46.00             | 4.80           | QP       |
| 6   | 233.70             | 47.48             | -11.18           | 36.30              | 46.00             | 9.70           | QP       |
| 7   | 251.16             | 49.83             | -11.23           | 38.60              | 46.00             | 7.40           | QP       |
| 8   | 296.75             | 53.51             | -9.41            | 44.10              | 46.00             | 1.90           | QP       |
| 9   | 305.48             | 52.47             | -9.07            | 43.40              | 46.00             | 2.60           | QP       |
| 10  | 315.18             | 47.15             | -8.75            | 38.40              | 46.00             | 7.60           | QP       |

**2) 1-25GHz:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2VH2-1    | Test Date:   | 2025/1/2     |
| Test Site:     | Chamber B | Test Mode:   | Transmitting |
| Tester:        | Nat Zhou  | Test Result: | Pass         |

**Environmental Conditions:**

|                      |      |                           |    |                           |       |
|----------------------|------|---------------------------|----|---------------------------|-------|
| Temperature:<br>(°C) | 21.1 | Relative Humidity:<br>(%) | 37 | ATM<br>Pressure:<br>(kPa) | 101.2 |
|----------------------|------|---------------------------|----|---------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer          | Description  | Model                     | Serial Number     | Calibration Date | Calibration Due Date |
|-----------------------|--|---------------------------|-------------------|------------------|----------------------|
| ETS-Lindgren          | Horn Antenna   | 3115                      | 000 527 35        | 2023/9/7         | 2026/9/6             |
| Ducommun Technologies | Horn Antenna   | ARH-4223-02               | 1007726-02 1304   | 2023/2/22        | 2026/2/21            |
| Xinhang Macrowave     | Coaxial Cable  | XH750A-N/J-SMA/J-10M      | 20231117004 #0001 | 2024/11/17       | 2025/11/16           |
| Xinhang Macrowave     | Coaxial Cable  | XH360A-2.92/J-2.92/J-6M-A | 20231208001 #0001 | 2024/12/9        | 2025/12/8            |
| AH                    | Preamplifier   | PAM-0118P                 | 469               | 2024/4/15        | 2025/4/14            |
| AH                    | Preamplifier   | PAM-1840VH                | 191               | 2024/9/5         | 2025/9/4             |
| R&S                   | Spectrum Analyzer                                      | FSV40                     | 101944            | 2024/9/6         | 2025/9/5             |
| Audix                 | Test Software  | E3                        | 191218 V9         | N/A              | N/A                  |
| Decentest             | Multiplex Switch Test Control Set & Filter Switch Unit | DT7220SCU & DT7220FCU     | DC79902 & DC79905 | 2024/8/27        | 2025/8/26            |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is referred to table and plots.

**Test plots for 1GHz~18GHz:***Note: The maximum output power mode: 3EDR(3DHI) mode was tested.***8DPSK, Low Channel, Horizontal**


Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3EDR Mode Low Channel 2402MHz  
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2VHZ-1  
Tester: Nat Zhou

**8DPSK, Low Channel, Vertical**


Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3EDR Mode Low Channel 2402MHz  
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2VHZ-1  
Tester: Nat Zhou




Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3EDR Mode Low Channel 2402MHz  
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2VHZ-1  
Tester: Nat Zhou



Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3EDR Mode Low Channel 2402MHz  
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2VHZ-1  
Tester: Nat Zhou




**8DPSK, Middle Channel, Horizontal**

Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3EDR Mode middle Channel 2441MHz  
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2VM2-1  
Tester: Nat Zhou

Date: 2025-01-02




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 1997.80         | 50.20          | -11.20        | 39.00           | 74.00          | 35.00       | Peak     |
| 2   | 3878.80         | 49.98          | -3.93         | 46.05           | 74.00          | 27.95       | Peak     |

**8DPSK, Middle Channel, Vertical**

Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3EDR Mode middle Channel 2441MHz  
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2VM2-1  
Tester: Nat Zhou

Date: 2025-01-02




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 1860.40         | 53.47          | -11.66        | 41.81           | 74.00          | 32.19       | Peak     |
| 2   | 2124.40         | 54.19          | -10.54        | 43.65           | 74.00          | 30.35       | Peak     |

Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3EDR Mode middle Channel 2441MHz  
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2VM2-1  
Tester: Nat Zhou

Date: 2025-01-02




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 4882.00         | 50.67          | -8.47         | 42.20           | 74.00          | 31.80       | Peak     |
| 2   | 7323.00         | 49.99          | -3.19         | 46.80           | 74.00          | 27.20       | Peak     |
| 3   | 17572.00        | 47.71          | 11.24         | 58.95           | 74.00          | 15.05       | Peak     |
| 4   | 17972.00        | 36.65          | 11.24         | 47.89           | 54.00          | 6.11        | Average  |

Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3EDR Mode middle Channel 2441MHz  
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2VM2-1  
Tester: Nat Zhou

Date: 2025-01-02




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 4882.00         | 50.41          | -8.47         | 41.94           | 74.00          | 32.06       | Peak     |
| 2   | 7323.00         | 49.79          | -3.19         | 46.60           | 74.00          | 27.40       | Peak     |
| 3   | 17983.20        | 47.33          | 11.32         | 58.65           | 74.00          | 15.35       | Peak     |
| 4   | 17983.20        | 36.40          | 11.32         | 47.72           | 54.00          | 6.28        | Average  |



## 8DPSK, High Channel, Horizontal

Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3E0R Mode high Channel 2400MHz  
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 2VH2-1  
Tester: Nat Zhou



## 8DPSK, High Channel, Vertical


Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3E0R Mode high Channel 2400MHz  
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 2VH2-1  
Tester: Nat Zhou




Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3E0R Mode high Channel 2400MHz  
Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2VH2-1  
Tester: Nat Zhou



Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3E0R Mode high Channel 2400MHz  
Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2VH2-1  
Tester: Nat Zhou




**Test Plots for 18GHz~25GHz:**

*Note: The maximum output power mode and channel: 3EDR(3DH1) mode Low Channel was tested.*

**8DPSK, Low Channel, Horizontal**

Project No.: 2402A108252E-RF  
Polarization: Horizontal  
Test Mode: Transmitting  
Note: 3EDR Mode Low Channel 2402MHz  
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2VM2-1  
Tester: Nat Zhou




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 19481.20        | 48.00          | 5.89          | 53.89           | 74.00          | 20.11       | Peak     |
| 2   | 19481.20        | 37.42          | 5.89          | 43.31           | 54.00          | 10.69       | Average  |

**8DPSK, Low Channel, Vertical**

Project No.: 2402A108252E-RF  
Polarization: Vertical  
Test Mode: Transmitting  
Note: 3EDR Mode Low Channel 2402MHz  
Peak: RBW:1MHz, VBW:3MHz





Serial No.: 2VM2-1  
Tester: Nat Zhou



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 24139.00        | 44.49          | 8.85          | 53.34           | 74.00          | 20.66       | Peak     |
| 2   | 24139.00        | 34.79          | 8.85          | 43.64           | 54.00          | 10.36       | Average  |

**Test Plots for Bandedge:**

Note: The maximum output power mode: 3EDR(3DH1) mode was tested.

**8DPSK, Low Channel, Bandedge, Horizontal****8DPSK, Low Channel, Bandedge, Vertical****8DPSK, High Channel, Bandedge, Horizontal****8DPSK, High Channel, Bandedge, Vertical**

5.3 20 dB Emission Bandwidth

Test Information:

|             |            |              |              |
|-------------|------------|--------------|--------------|
| Serial No.: | 2VH2-2     | Test Date:   | 2024/12/20   |
| Test Site:  | RF         | Test Mode:   | Transmitting |
| Tester:     | Karl Liang | Test Result: | N/A          |

Environmental Conditions:

|                       |      |                              |    |                        |       |
|-----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C): | 20.4 | Relative<br>Humidity:<br>(%) | 28 | ATM Pressure:<br>(kPa) | 102.3 |
|-----------------------|------|------------------------------|----|------------------------|-------|

Test Equipment List and Details:


| Manufacturer | Description           | Model               | Serial<br>Number | Calibration<br>Date | Calibration<br>Due Date |
|--------------|-----------------------|---------------------|------------------|---------------------|-------------------------|
| Eastsheep    | Coaxial<br>Attenuator | 5W-N-JK-6G-<br>10dB | F-08-EM502       | 2024/06/07          | 2025/06/06              |
| R&S          | Spectrum<br>Analyzer  | FSV40               | 101589           | 2024/09/05          | 2025/09/04              |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


| Mode | Channel | Result<br>(MHz) |
|------|---------|-----------------|
| DH1  | Low     | 0.904           |
|      | Middle  | 0.970           |
|      | High    | 0.976           |
| 2DH1 | Low     | 1.273           |
|      | Middle  | 1.273           |
|      | High    | 1.270           |
| 3DH1 | Low     | 1.264           |
|      | Middle  | 1.264           |
|      | High    | 1.264           |

## DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:40:12

## DH1\_Middle




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:50:22

## DH1\_High




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:51:10

## 2DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:53:03

## 2DH1\_Middle




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:53:55

## 2DH1\_High



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:54:42


3DH1\_Low



ProjectNo.:2402A108252E-RF Tester:Karl Liang

Date: 20.DEC.2024 09:55:54


3DH1\_Middle



ProjectNo.:2402A108252E-RF Tester:Karl Liang

Date: 20.DEC.2024 09:56:22

3DH1\_High



ProjectNo.:2402A108252E-RF Tester:Karl Liang

Date: 20.DEC.2024 09:58:13

## 5.4 Channel Separation

### Test Information:

|             |            |              |              |
|-------------|------------|--------------|--------------|
| Serial No.: | 2VH2-2     | Test Date:   | 2024/12/20   |
| Test Site:  | RF         | Test Mode:   | Transmitting |
| Tester:     | Karl Liang | Test Result: | Pass         |

### Environmental Conditions:

|                       |      |                              |    |                        |       |
|-----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C): | 20.4 | Relative<br>Humidity:<br>(%) | 28 | ATM Pressure:<br>(kPa) | 102.3 |
|-----------------------|------|------------------------------|----|------------------------|-------|

### Test Equipment List and Details:

| Manufacturer | Description        | Model           | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------------|---------------|------------------|----------------------|
| Eastsheep    | Coaxial Attenuator | 5W-N-JK-6G-10dB | F-08-EM502    | 2024/06/07       | 2025/06/06           |
| R&S          | Spectrum Analyzer  | FSV40           | 101589        | 2024/09/05       | 2025/09/04           |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


### Test Data:

| Mode | Channel | Result (MHz) | Limit (MHz) | Verdict |
|------|---------|--------------|-------------|---------|
| DH1  | Low     | 1.001        | 0.849       | Pass    |
|      | Middle  | 1.005        | 0.849       | Pass    |
|      | High    | 1.006        | 0.849       | Pass    |

#### Note:

- Only BDR (GFSK) mode result is reported since EDR ( $\pi/4$ -DQPSK, 8DPSK) has the exact same channel plan.
- The limit is maximum 20dB bandwidth\*2/3.


DH1\_Low



ProjectNo.:2402A108252E-RF Tester:Karl Liang

Date: 20.DEC.2024 11:49:11


DH1\_Middle



ProjectNo.:2402A108252E-RF Tester:Karl Liang

Date: 20.DEC.2024 11:56:07

DH1\_High



ProjectNo.:2402A108252E-RF Tester:Karl Liang

Date: 20.DEC.2024 11:59:27



5.5 Number of Hopping Frequency

Test Information:

|             |            |              |              |
|-------------|------------|--------------|--------------|
| Serial No.: | 2VH2-2     | Test Date:   | 2024/12/20   |
| Test Site:  | RF         | Test Mode:   | Transmitting |
| Tester:     | Karl Liang | Test Result: | Pass         |

Environmental Conditions:

|                       |      |                           |    |                        |       |
|-----------------------|------|---------------------------|----|------------------------|-------|
| Temperature:<br>(°C): | 20.4 | Relative Humidity:<br>(%) | 28 | ATM Pressure:<br>(kPa) | 102.3 |
|-----------------------|------|---------------------------|----|------------------------|-------|

Test Equipment List and Details:


| Manufacturer | Description        | Model           | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------------|---------------|------------------|----------------------|
| Eastsheep    | Coaxial Attenuator | 5W-N-JK-6G-10dB | F-08-EM502    | 2024/06/07       | 2025/06/06           |
| R&S          | Spectrum Analyzer  | FSV40           | 101589        | 2024/09/05       | 2025/09/04           |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


| Mode | Channel | Result | Limit | Verdict |
|------|---------|--------|-------|---------|
| DH1  | Hopping | 79     | 15    | Pass    |
| 2DH1 | Hopping | 79     | 15    | Pass    |
| 3DH1 | Hopping | 79     | 15    | Pass    |

DH1\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 18:47:52

2DH1\_Hopping



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 18:49:00

3DH1\_Hopping



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 18:50:01

## 5.6 Time of Occupancy (Dwell Time)

### Test Information:

|             |            |              |              |
|-------------|------------|--------------|--------------|
| Serial No.: | 2VH2-2     | Test Date:   | 2024/12/20   |
| Test Site:  | RF         | Test Mode:   | Transmitting |
| Tester:     | Karl Liang | Test Result: | Pass         |

### Environmental Conditions:

|                       |      |                              |    |                        |       |
|-----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C): | 20.4 | Relative<br>Humidity:<br>(%) | 28 | ATM Pressure:<br>(kPa) | 102.3 |
|-----------------------|------|------------------------------|----|------------------------|-------|

### Test Equipment List and Details:

| Manufacturer | Description        | Model           | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------------|---------------|------------------|----------------------|
| Eastsheep    | Coaxial Attenuator | 5W-N-JK-6G-10dB | F-08-EM502    | 2024/06/07       | 2025/06/06           |
| R&S          | Spectrum Analyzer  | FSV40           | 101589        | 2024/09/05       | 2025/09/04           |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data:

| Mode | Channel | Pulse width (ms) | Dwell time (s) | Limit (s) | Verdict |
|------|---------|------------------|----------------|-----------|---------|
| DH1  | Hopping | 0.390            | 0.125          | 0.400     | Pass    |
| DH3  | Hopping | 1.652            | 0.264          | 0.400     | Pass    |
| DH5  | Hopping | 2.908            | 0.310          | 0.400     | Pass    |
| 2DH1 | Hopping | 0.397            | 0.127          | 0.400     | Pass    |
| 2DH3 | Hopping | 1.658            | 0.265          | 0.400     | Pass    |
| 2DH5 | Hopping | 2.913            | 0.311          | 0.400     | Pass    |
| 3DH1 | Hopping | 0.400            | 0.128          | 0.400     | Pass    |
| 3DH3 | Hopping | 1.658            | 0.265          | 0.400     | Pass    |
| 3DH5 | Hopping | 2.913            | 0.311          | 0.400     | Pass    |

#### Note:

DH1:Dwell time=Pulse width (ms) × (1600/2/79) ×31.6 s

DH3:Dwell time=Pulse width (ms) × (1600/4/79) ×31.6 s

DH5:Dwell time=Pulse width (ms) × (1600/6/79) ×31.6 s

2DH1: Dwell time=Pulse width (ms) × (1600/2/79) ×31.6 s

2DH3: Dwell time=Pulse width (ms) × (1600/4/79) ×31.6 s


2DH5: Dwell time=Pulse width (ms) × (1600/6/79) ×31.6 s

3DH1: Dwell time=Pulse width (ms) × (1600/2/79) ×31.6 s

3DH3: Dwell time=Pulse width (ms) × (1600/4/79) ×31.6 s


3DH5: Dwell time=Pulse width (ms) × (1600/6/79) ×31.6 s

## DH1\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:08:27

## DH3\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:42:37

## DH5\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:18:19

## 2DH1\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:38:10

## 2DH3\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:39:24

## 2DH5\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:43:51

3DH1\_Hopping




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:44:52

3DH3\_Hopping



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:45:47

3DH5\_Hopping



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 13:46:43

5.7 Maximum Conducted Output Power

Test Information:

|             |            |              |              |
|-------------|------------|--------------|--------------|
| Serial No.: | 2VH2-2     | Test Date:   | 2024/12/20   |
| Test Site:  | RF         | Test Mode:   | Transmitting |
| Tester:     | Karl Liang | Test Result: | Pass         |

Environmental Conditions:

|                       |      |                              |    |                        |       |
|-----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C): | 20.4 | Relative<br>Humidity:<br>(%) | 28 | ATM Pressure:<br>(kPa) | 102.3 |
|-----------------------|------|------------------------------|----|------------------------|-------|

Test Equipment List and Details:


| Manufacturer | Description        | Model           | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------------|---------------|------------------|----------------------|
| Eastsheep    | Coaxial Attenuator | 5W-N-JK-6G-10dB | F-08-EM502    | 2024/06/07       | 2025/06/06           |
| R&S          | Spectrum Analyzer  | FSV40           | 101589        | 2024/09/05       | 2025/09/04           |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


| Mode | Channel | Test Frequency (MHz) | Result (dBm) | Limit (dBm) | Verdict |
|------|---------|----------------------|--------------|-------------|---------|
| DH1  | Low     | 2402                 | 0.52         | 21.00       | Pass    |
|      | Middle  | 2441                 | -1.74        | 21.00       | Pass    |
|      | High    | 2480                 | -0.47        | 21.00       | Pass    |
| 2DH1 | Low     | 2402                 | 3.11         | 21.00       | Pass    |
|      | Middle  | 2441                 | 1.35         | 21.00       | Pass    |
|      | High    | 2480                 | 1.32         | 21.00       | Pass    |
| 3DH1 | Low     | 2402                 | 3.20         | 21.00       | Pass    |
|      | Middle  | 2441                 | 1.62         | 21.00       | Pass    |
|      | High    | 2480                 | 1.52         | 21.00       | Pass    |

DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:33:05

DH1\_Middle




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:56:56

DH1\_High




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 09:59:31

2DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:02:49

2DH1\_Middle




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 17:16:47

2DH1\_High




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:06:05

3DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:06:50

3DH1\_Middle



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 17:16:17

3DH1\_High



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:07:57



**5.8 100 kHz Bandwidth of Frequency Band Edge****Test Information:**

|                    |            |                     |              |
|--------------------|------------|---------------------|--------------|
| <b>Serial No.:</b> | 2VH2-2     | <b>Test Date:</b>   | 2024/12/20   |
| <b>Test Site:</b>  | RF         | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Karl Liang | <b>Test Result:</b> | Pass         |

**Environmental Conditions:**

|                               |      |                                       |    |                                |       |
|-------------------------------|------|---------------------------------------|----|--------------------------------|-------|
| <b>Temperature:<br/>(°C):</b> | 20.4 | <b>Relative<br/>Humidity:<br/>(%)</b> | 28 | <b>ATM Pressure:<br/>(kPa)</b> | 102.3 |
|-------------------------------|------|---------------------------------------|----|--------------------------------|-------|


**Test Equipment List and Details:**

| Manufacturer | Description        | Model           | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------------|---------------|------------------|----------------------|
| Eastsheep    | Coaxial Attenuator | 5W-N-JK-6G-10dB | F-08-EM502    | 2024/06/07       | 2025/06/06           |
| R&S          | Spectrum Analyzer  | FSV40           | 101589        | 2024/09/05       | 2025/09/04           |

*\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


**Test Data:**

## DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:10:17

## DH1\_High




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:11:42

## DH1\_Hopping\_Lower




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 08:47:58

## DH1\_Hopping\_Upper




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 08:48:33

## 2DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:12:42

## 2DH1\_High




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:14:28

2DH1\_Hopping\_Lower




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 08:51:08

2DH1\_Hopping\_Upper




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 08:51:46

3DH1\_Low




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:15:33

3DH1\_High




ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 10:16:19

3DH1\_Hopping\_Lower



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 08:52:54

3DH1\_Hopping\_Upper



ProjectNo.:2402A108252E-RF Tester:Karl Liang  
Date: 20.DEC.2024 08:53:29

## **EXHIBIT A - EUT PHOTOGRAPHS**

---

Please refer to the attachment 2402A108252E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402A108252E-RF-INP EUT INTERNAL PHOTOGRAPHS.

---

## **EXHIBIT B - TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2402A108252E-RF-00B-TSP TEST SETUP PHOTOGRAPHS.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***