


TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

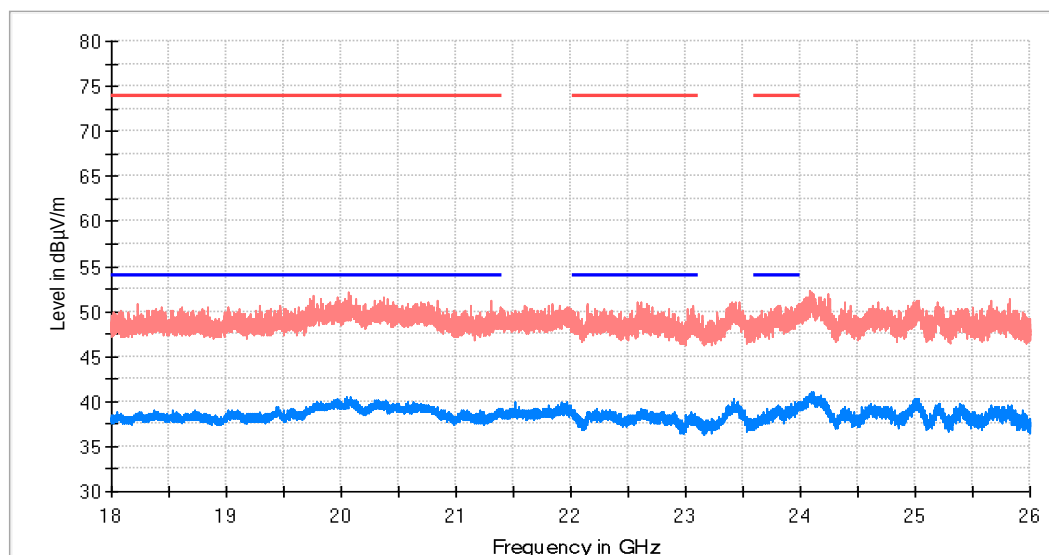


— AVG_MAXH
 — PK+_MAXH
 — TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
 — TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):

RESTRICTED BAND 2.31 GHz – 2.5 GHz (PI4DQPSK)


CHANNEL: Lowest (2402 MHz)

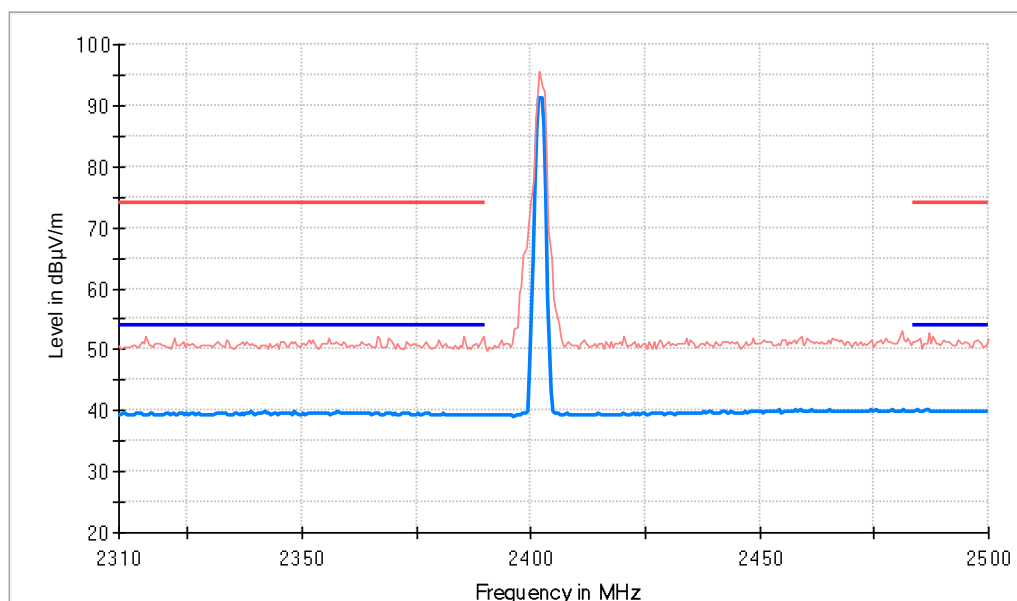

— AVG_MAXH
 — PK+_MAXH
 — TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
 — TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

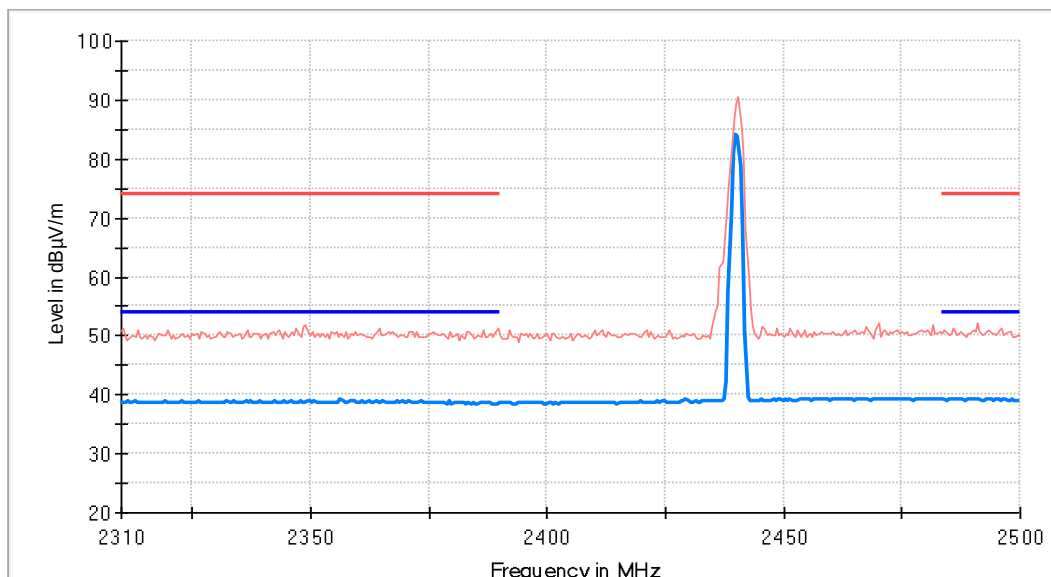

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.2 47 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.2 47 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2480 MHz)

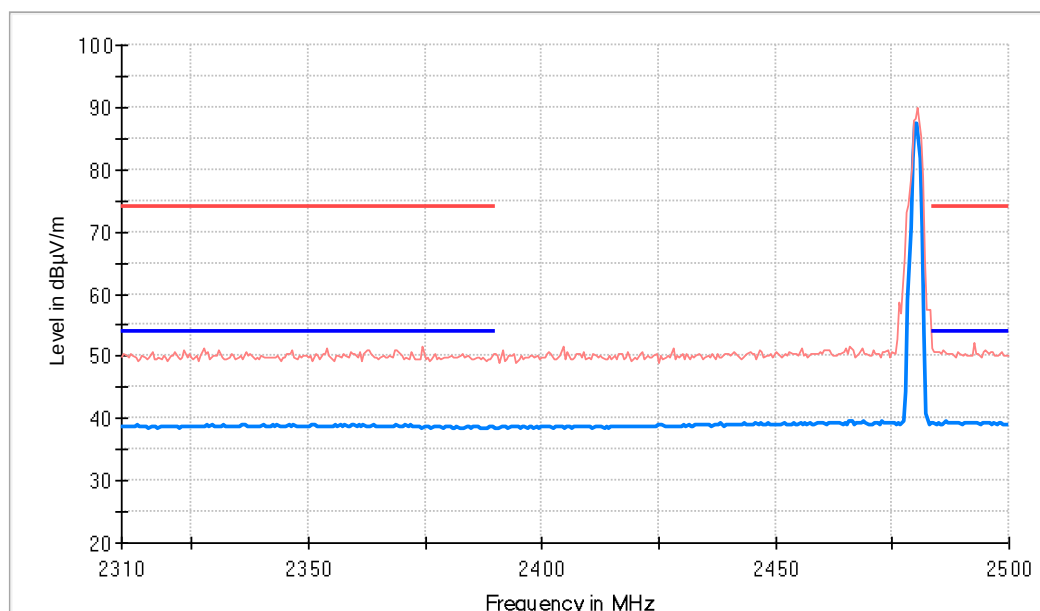

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.2 47 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.2 47 (1GHz to 26 GHz) Restricted Bands AVG Limit

TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS

Frequency range 30 MHz – 1000 MHz


The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT. GFSK modulation was selected as a worst case.

Frequency range 1 GHz – 26 GHz

The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31 - 2.39 GHz and 2.4835 - 2.5 GHz.

TEST RESULTS (Cont.)	1 GHz – 18 GHz (8DPSK)
-----------------------------	-------------------------------

CHANNEL: Lowest (2402 MHz)

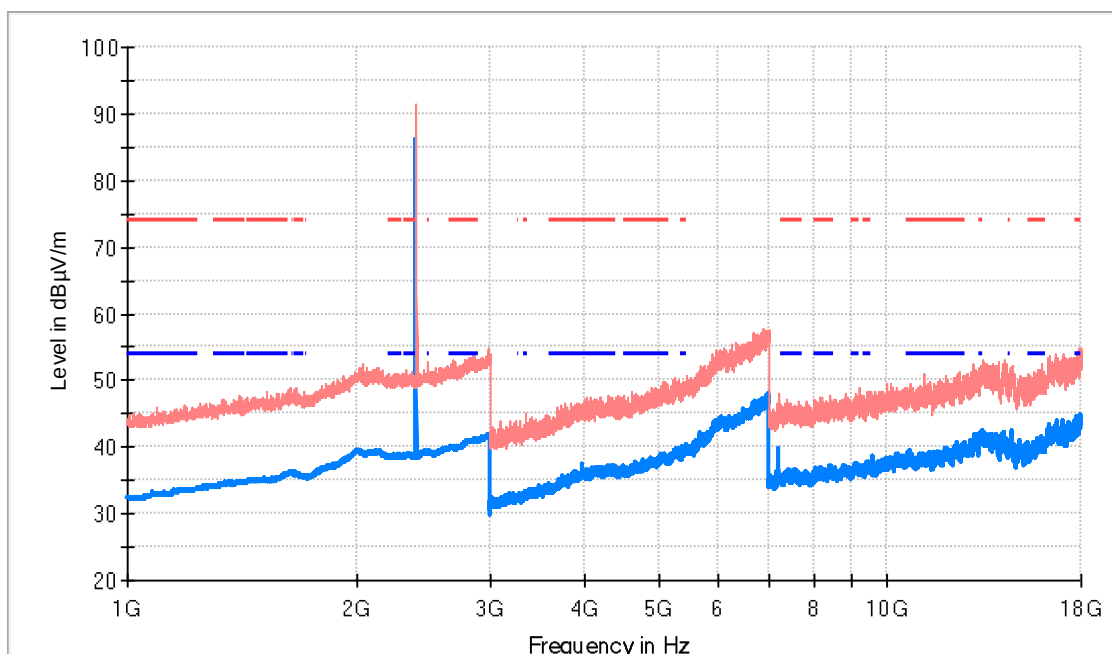


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	Pol	Comment
2402.000000	91.3	86.2	H	Fundamental
7206.000000	48.0	39.7	V	
9609.000000	46.2	38.6	V	

TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

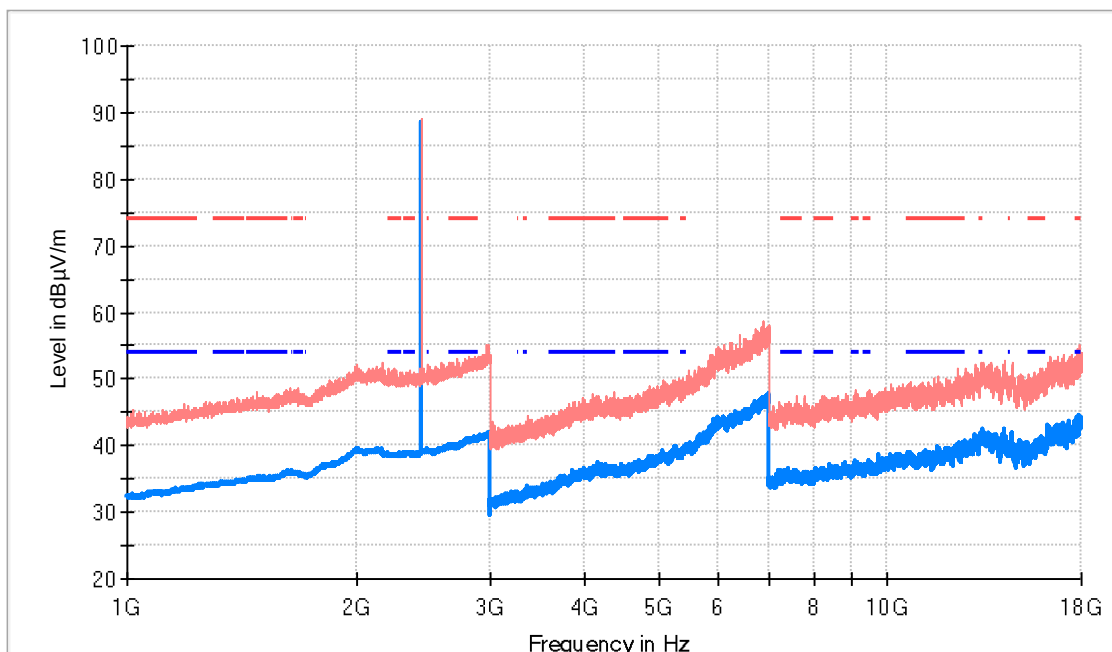


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	Pol	Comment
2440.000000	89.1	88.6	H	Fundamental
7320.000000	44.2	35.9	H	

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

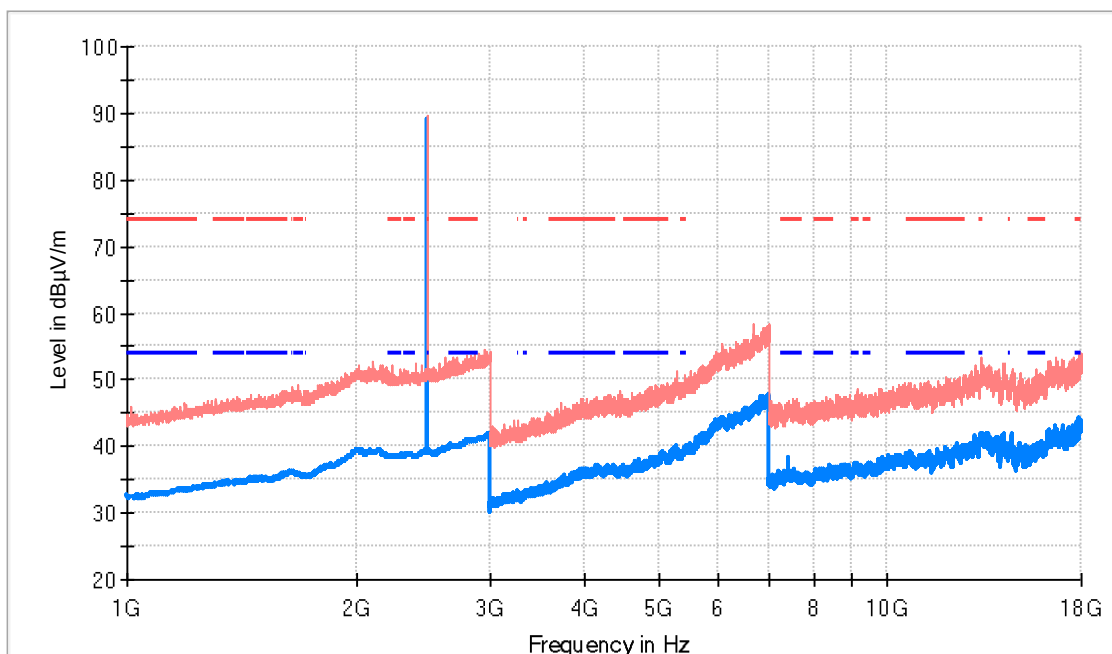

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	Pol	Comment
2480.000000	89.7	89.2	H	Fundamental
7440.000000	45.3	38.2	V	

TEST RESULTS (Cont.)


18 GHz – 26 GHz (8DPSK)

CHANNEL: Lowest (2402 MHz)

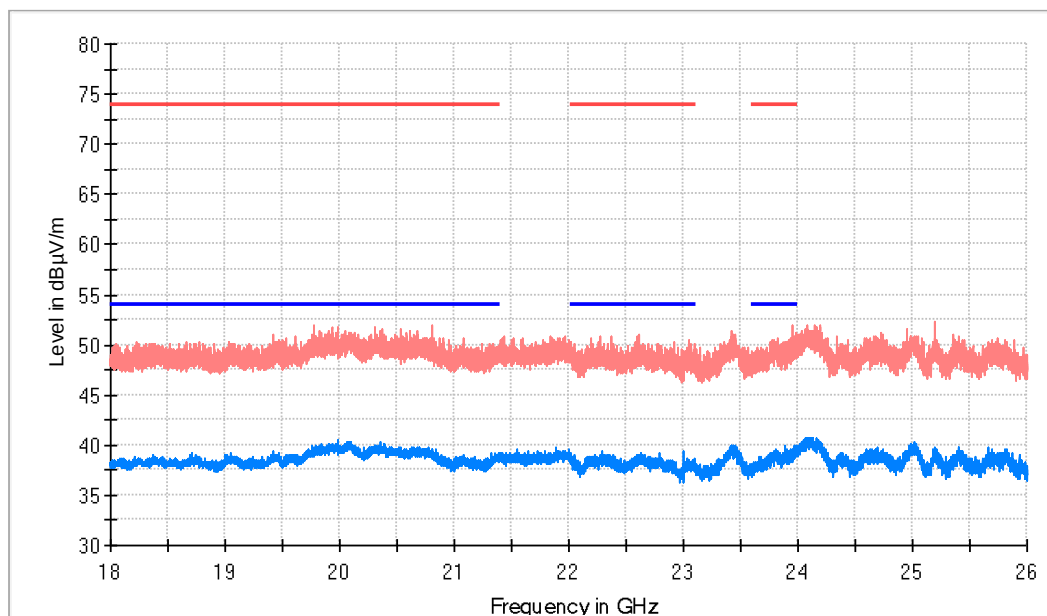

— AVG_ MAXH
— PK+ _MAXH
— TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
— TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


CHANNEL: Middle (2440 MHz)

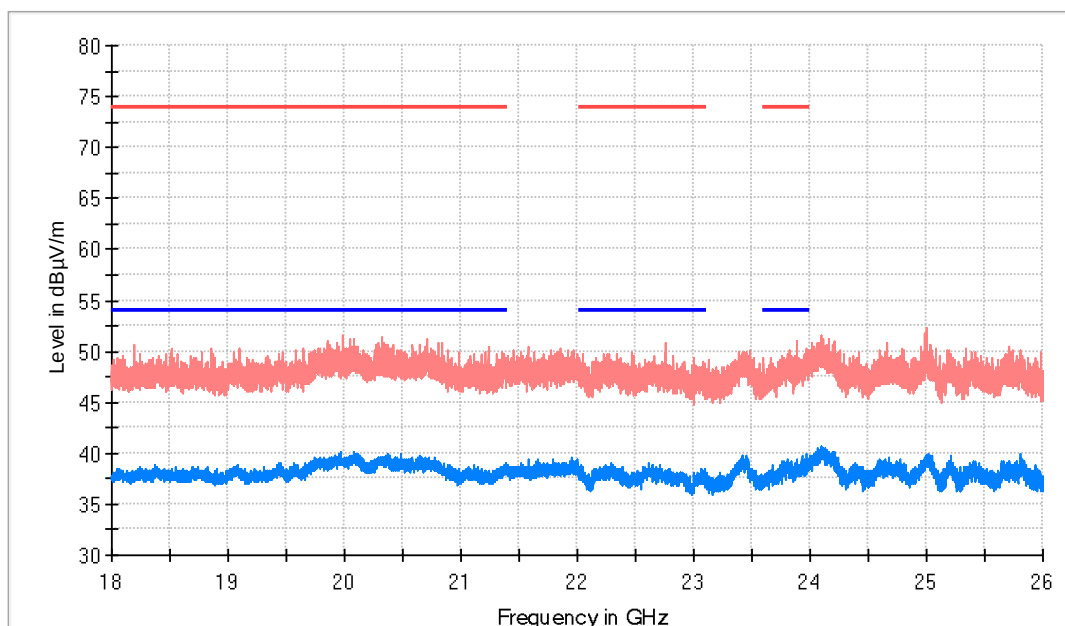

— AVG_ MAXH
— PK+ _MAXH
— TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
— TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

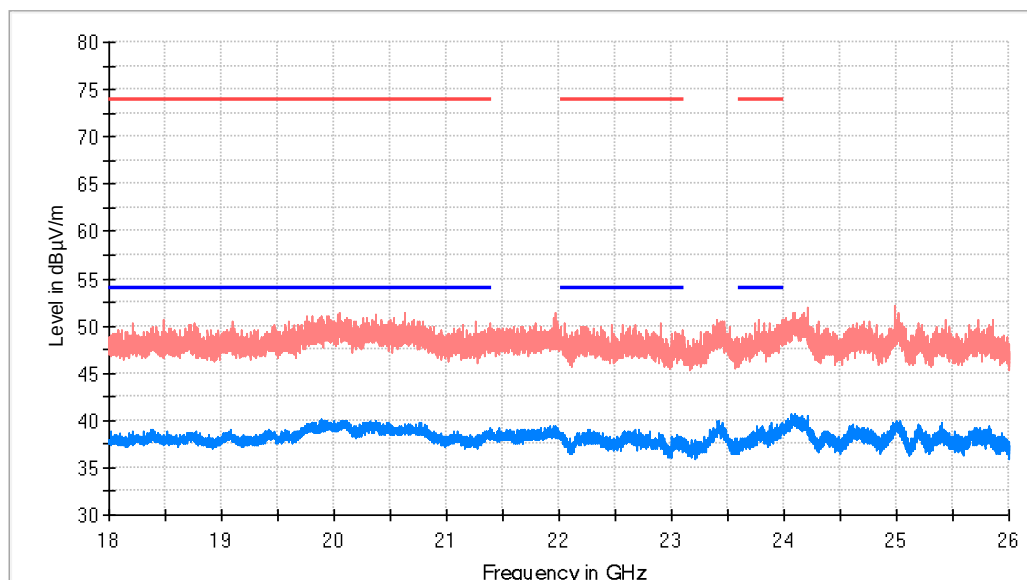


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

RESTRICTED BANDS

2.31 GHz – 2.5 GHz (8DPSK)


CHANNEL: Lowest (2402 MHz)

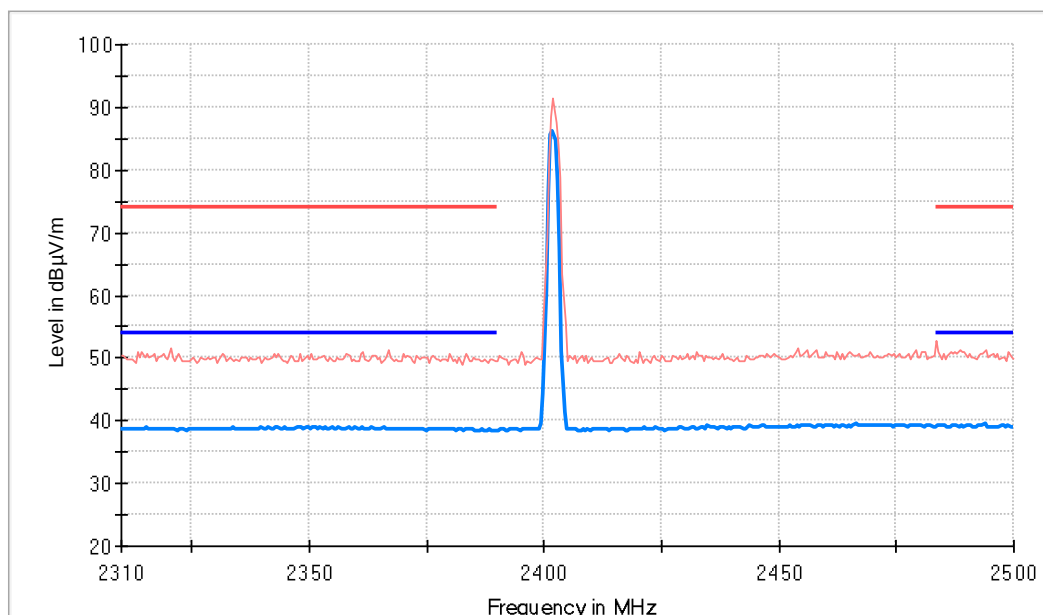

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

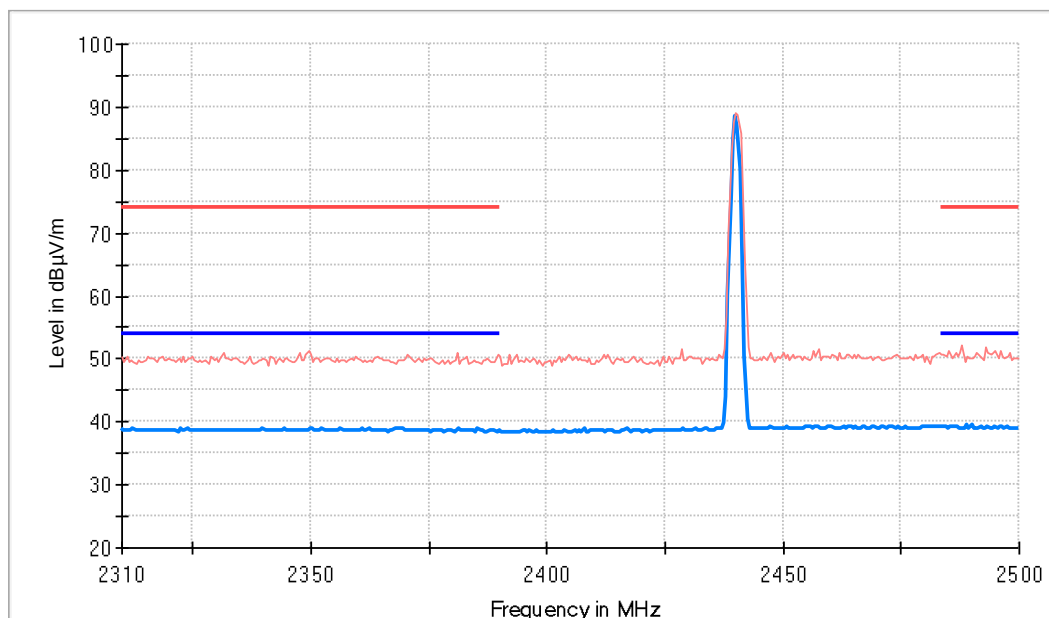

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2480 MHz)

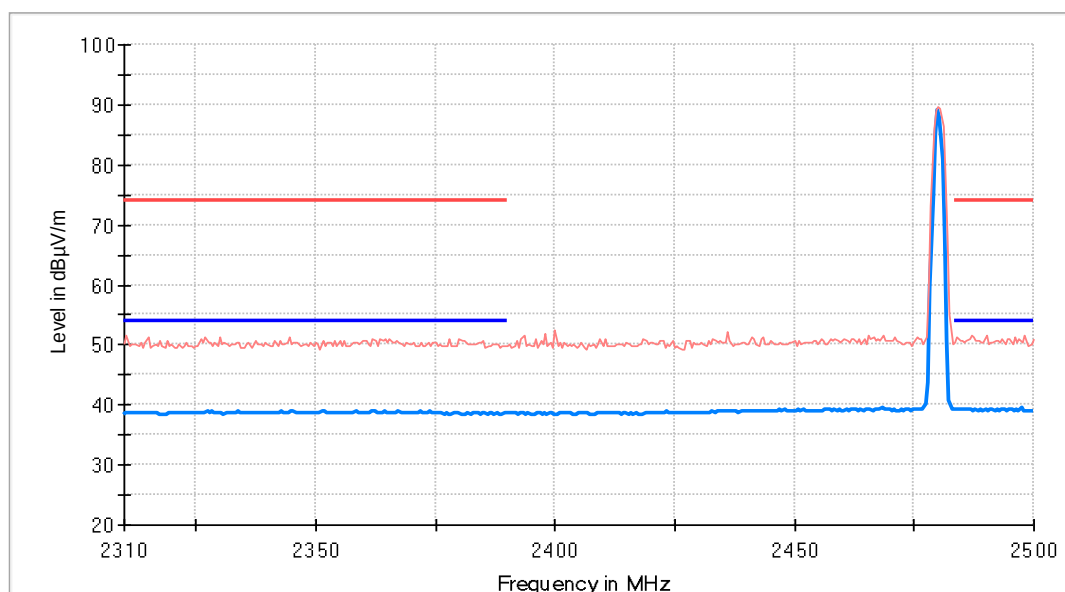

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Appendix B: Test results (Wi-Fi 2.4GHz)

Appendix B Content

PRODUCT INFORMATION86

DESCRIPTION OF TEST CONDITIONS87

TEST B.1: 99% OCCUPIED BANDWIDTH AND 6DB BANDWIDTH.....88

TEST B.2: MAXIMUM CONDUCTED OUTPUT POWER AND ANTENNA GAIN101

TEST B.3: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....108

TEST B.4: POWER SPECTRAL DENSITY121

TEST B.5: EMISSION LIMITATIONS RADIATED (TRANSMITTER).....128

PRODUCT INFORMATION

The following information is provided by the supplier, in accordance with clause 5.4.1:

Information	Description
Modulation	DSSS/CCK, OFDM, BPSK, DBPSK, QPSK, DQPSK, 8PSK, 16QAM, 64QAM
Adaptive	Adaptive equipment without the possibility to switch to a non-adaptive mode.
Maximum RF Output Power	32.2 mW
Operating Frequency Range	2401 – 2483.5 MHz
Nominal Channel Bandwidth	20 MHz
Extreme operating conditions	
- Temperature range	-30 °C to +85 °C
Antenna type	Integral antenna
Antenna gain	+0.38 dBi
Nominal Voltage	
- Supply Voltage	12 Vdc
- Type of power source	DC voltage
Equipment type	Wi-Fi 2.4GHz b/g/n20
Geo-location capability	No

DESCRIPTION OF TEST CONDITIONS

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

TEST CONDITIONS	DESCRIPTION
TC#01 ⁽¹⁾ (b mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz
TC#02 ⁽¹⁾ (g mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz
TC#03 ⁽¹⁾ (n mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz

Note (1): For spurious emissions for OFDM modes 802.11g and 802.11n20 a preliminary scan was performed to determine the worst case. The following tables and plots show the results for DSSS modulation (802.11b) and the worst case in OFDM modulation (802.11g).

The data rates of 1Mb/s for 802.11b, 6Mb/s for 802.11g, MCS0 for 802.11n20 were selected based on the preliminary testing that identified those rates corresponding to the worst cases.


TEST B.1: 99% OCCUPIED BANDWIDTH AND 6DB BANDWIDTH

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	§2.1049, Part 15 Subpart C §15.247(a)(2) and RSS-247 5.2(a)

LIMITS

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 KHz.

TEST SETUP

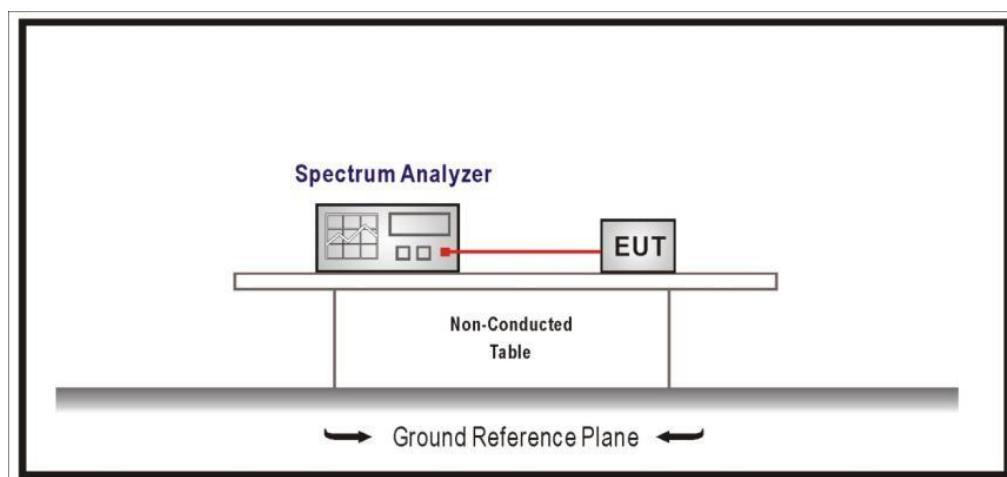

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (b mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB Bandwidth (MHz)	8.650	9.150	9.150
Occupied bandwidth (kHz)	13.400	13.400	13.300
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	12 / max. 150	9 / max. 150	11 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.15 dB	0.50 dB	0.17 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

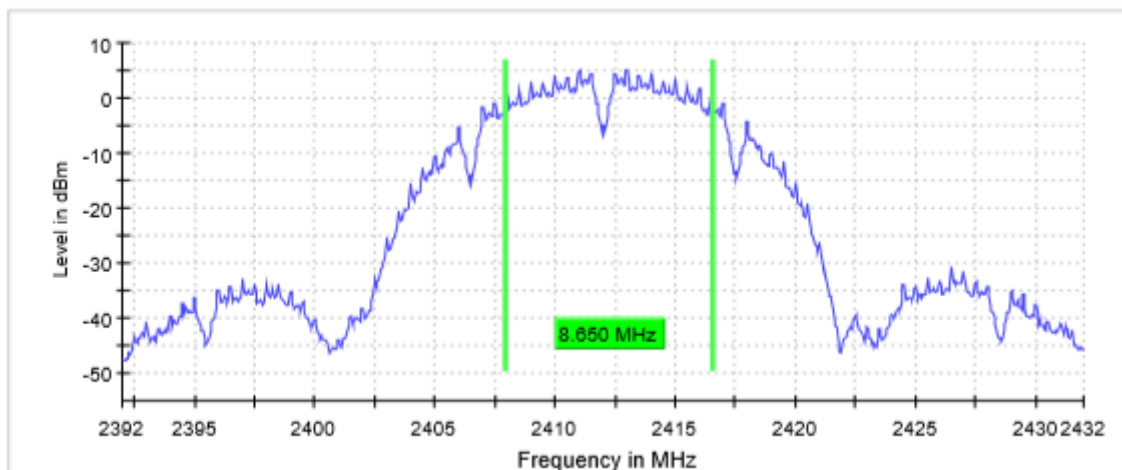

Middle Channel

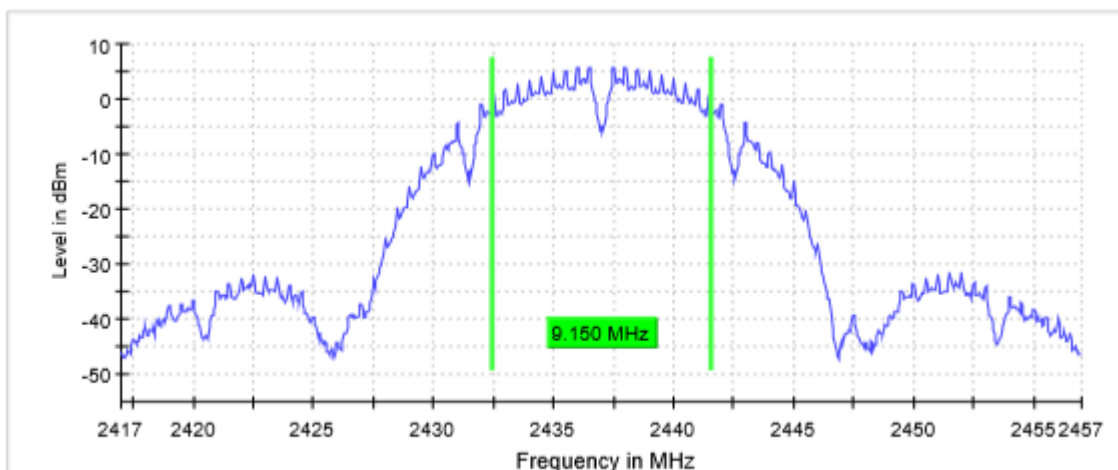

Highest Channel

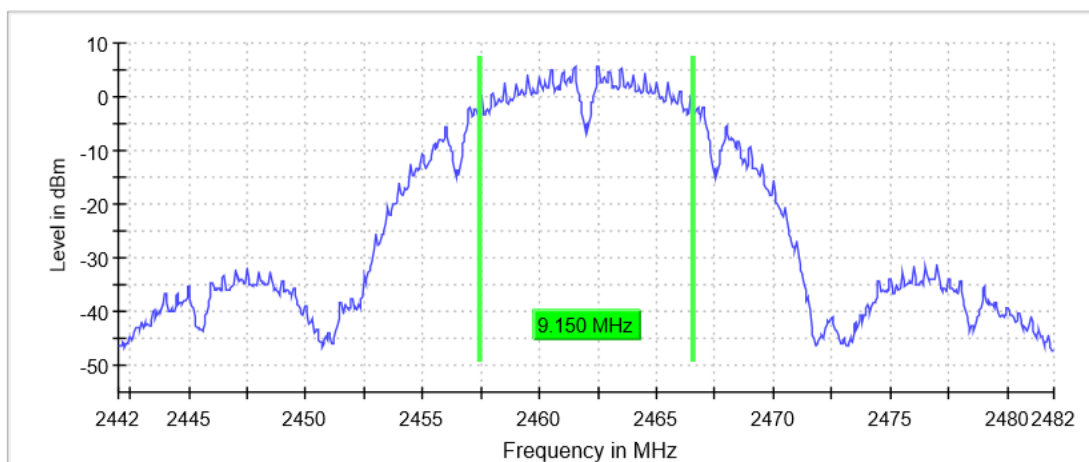

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	4 / max. 150	4 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.19 dB	0.15 dB	0.11 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

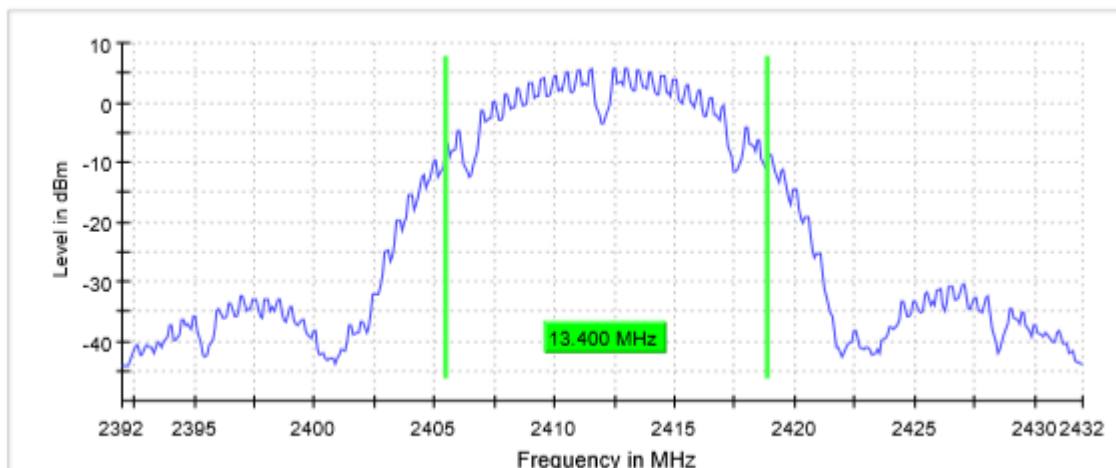

Middle Channel

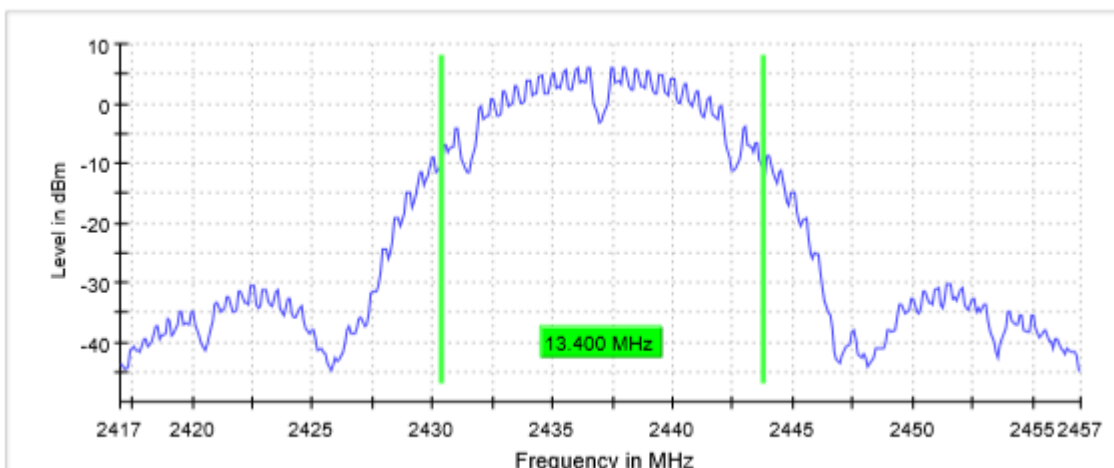

Highest Channel

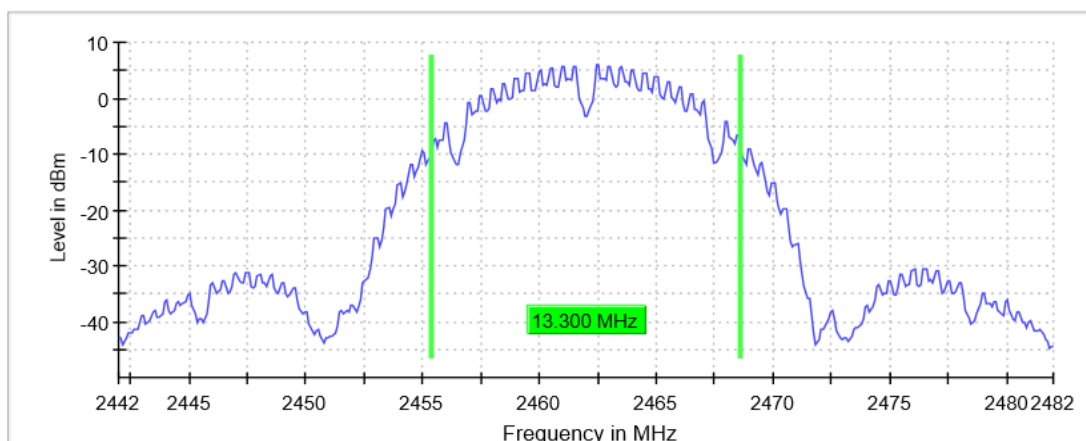

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB bandwidth (MHz)	9.150	9.150	9.150
Occupied bandwidth (MHz)	13.400	13.400	13.300
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	9 / max. 150	13 / max. 150	13 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.28 dB	0.14 dB	0.14 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

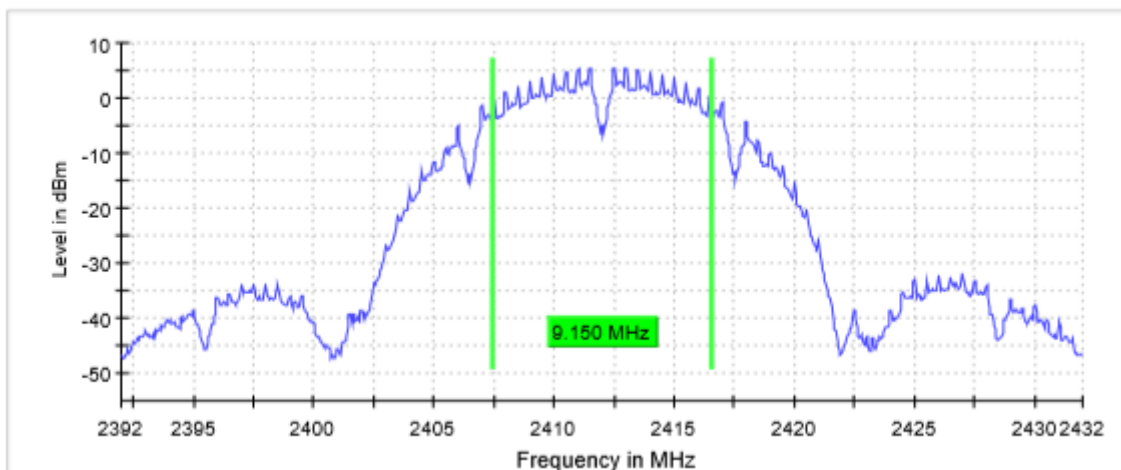

Middle Channel

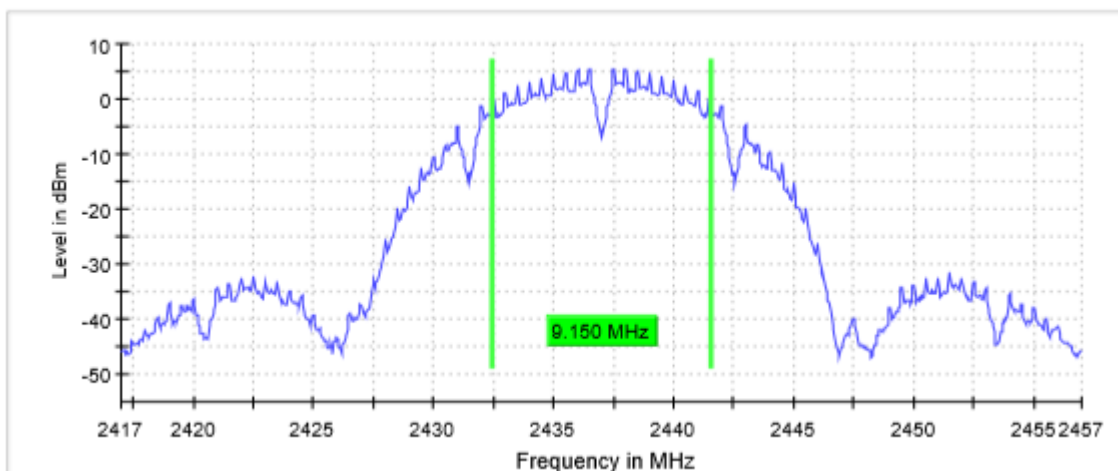

Highest Channel

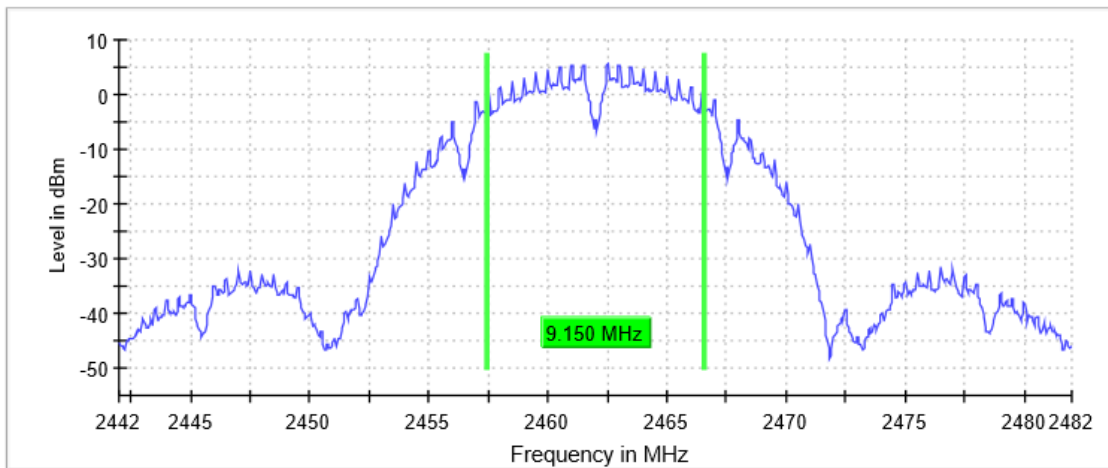

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	5 / max. 150	5 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.05 dB	0.06 dB	0.08 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

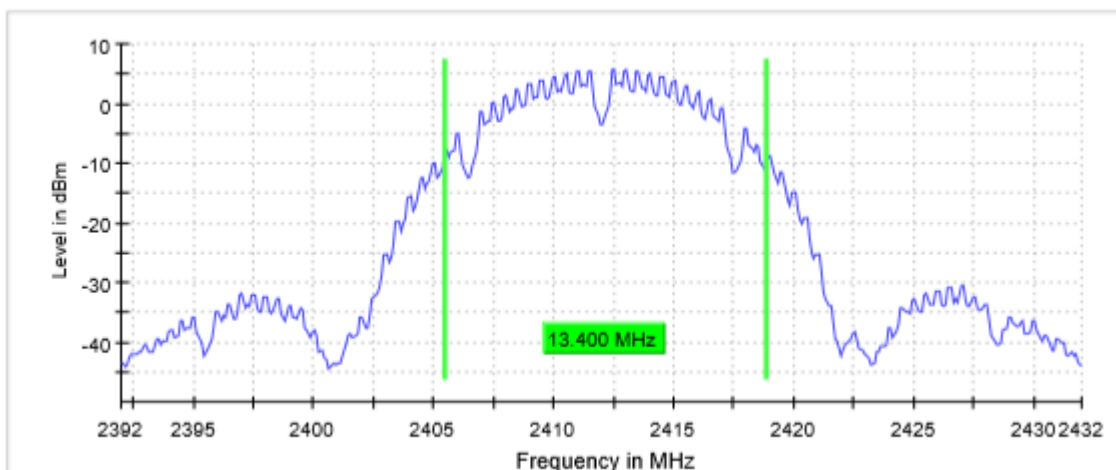

Middle Channel

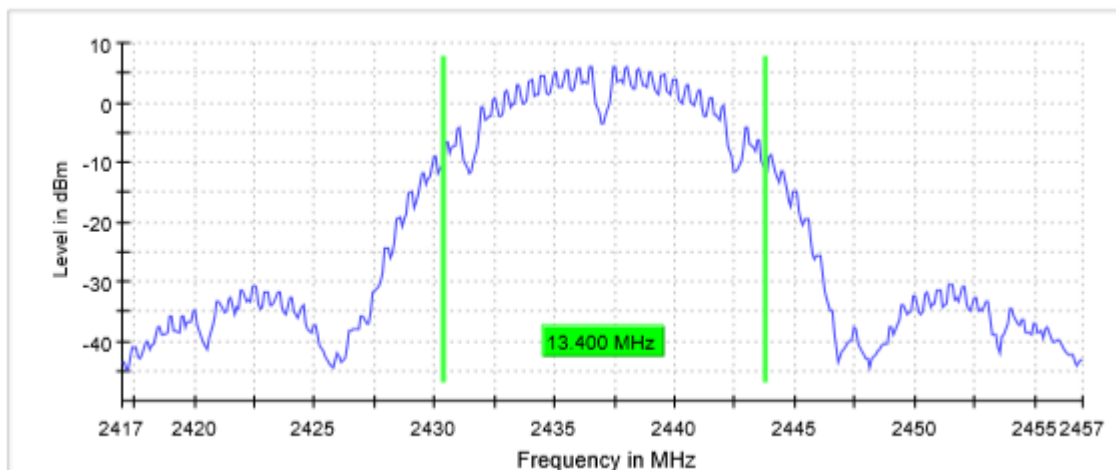

Highest Channel

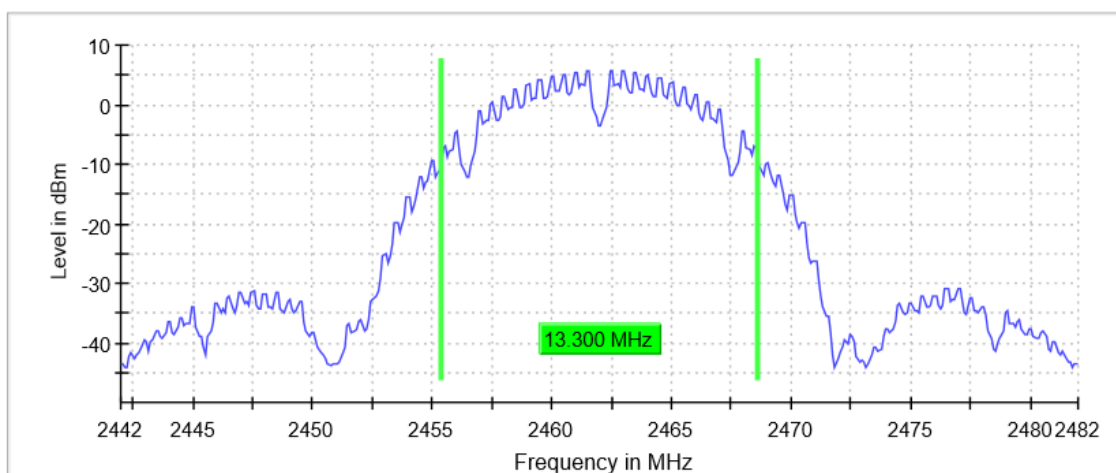

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (n20 mode 20 MHz)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB bandwidth (MHz)	9.150	9.150	9.150
Occupied bandwidth (MHz)	13.400	13.400	13.400
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	10 / max. 150	11 / max. 150	12 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.20 dB	0.42 dB	0.08 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

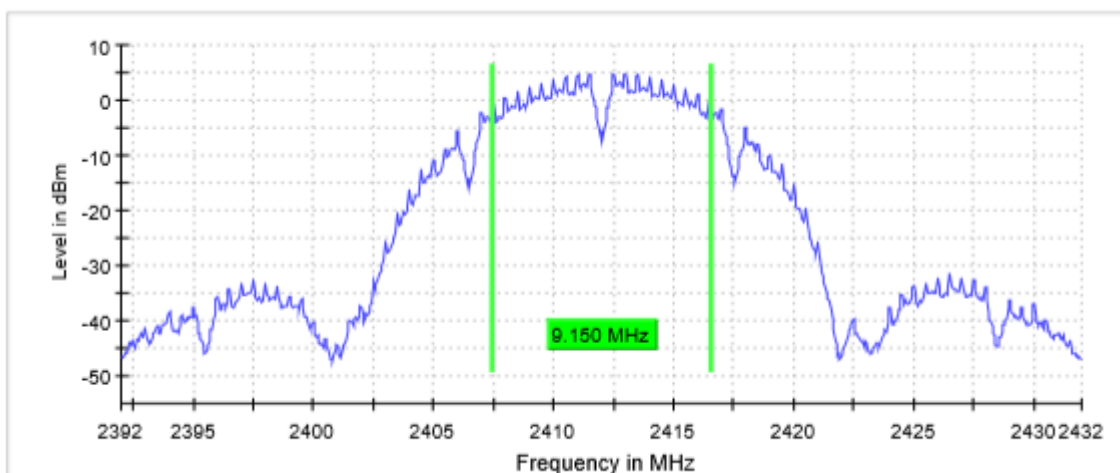

Middle Channel

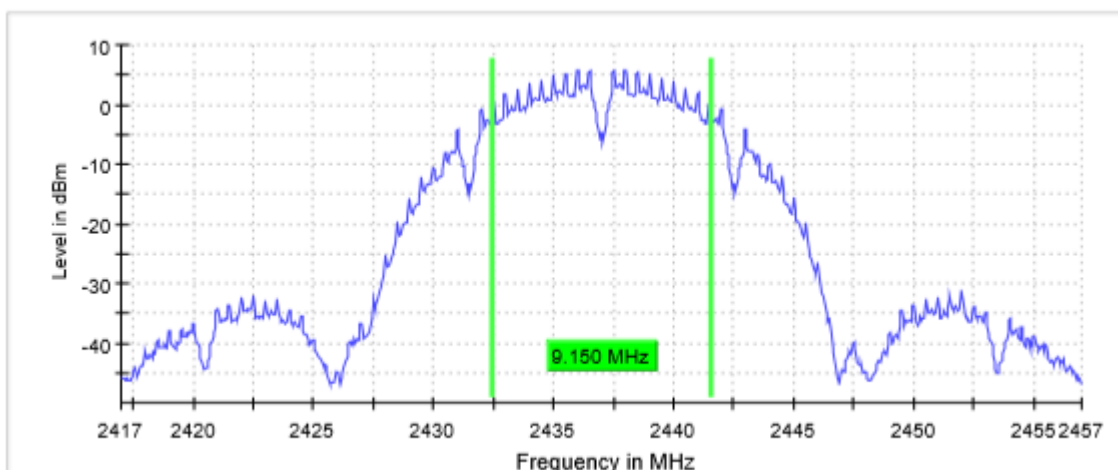

Highest Channel

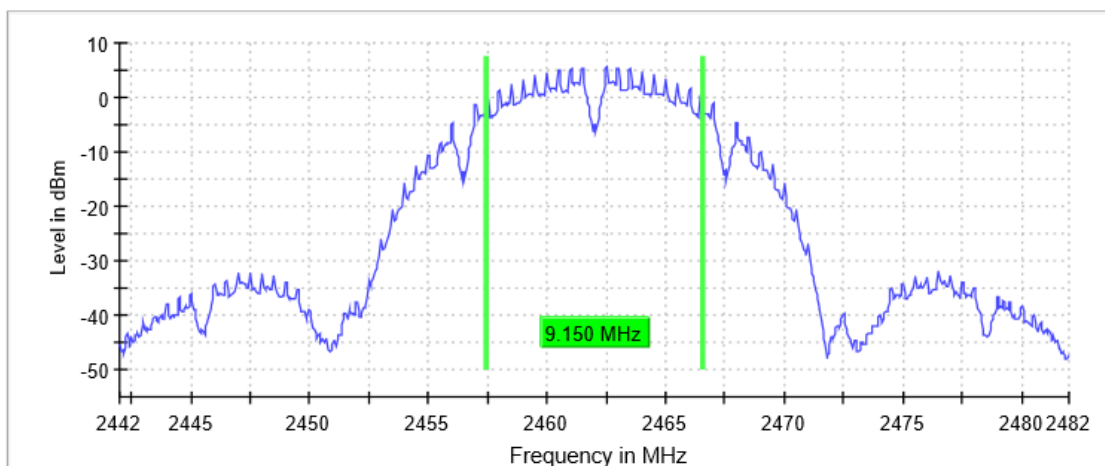

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	4 / max. 150	6 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.12 dB	0.07 dB	0.06 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

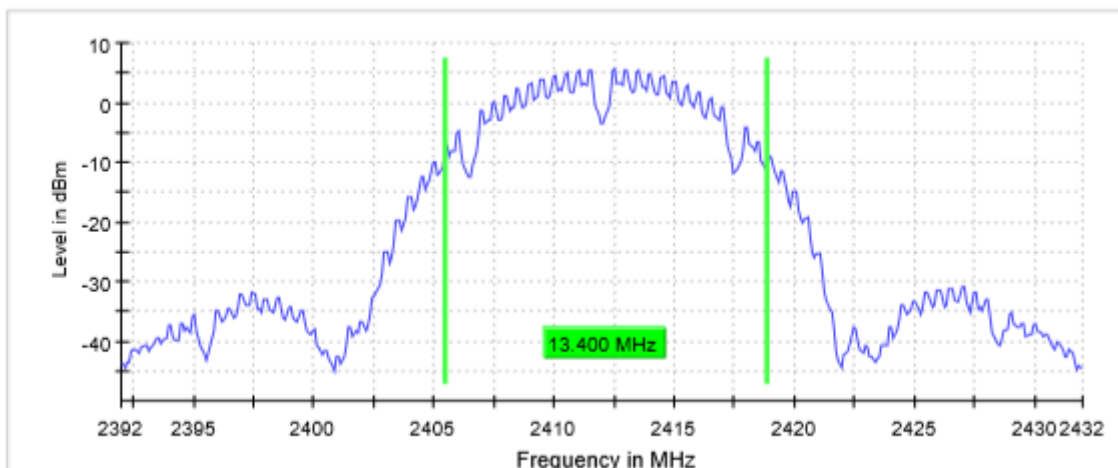

Middle Channel

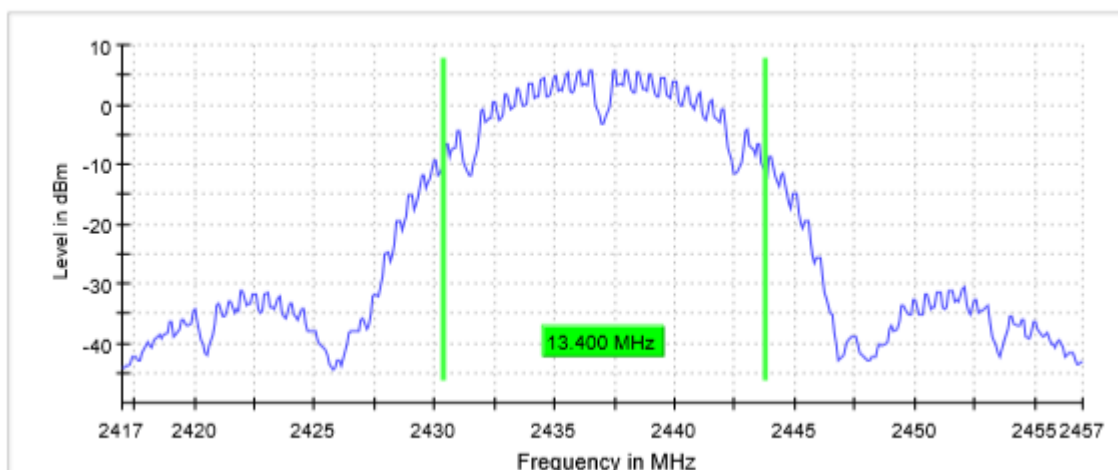

Highest Channel

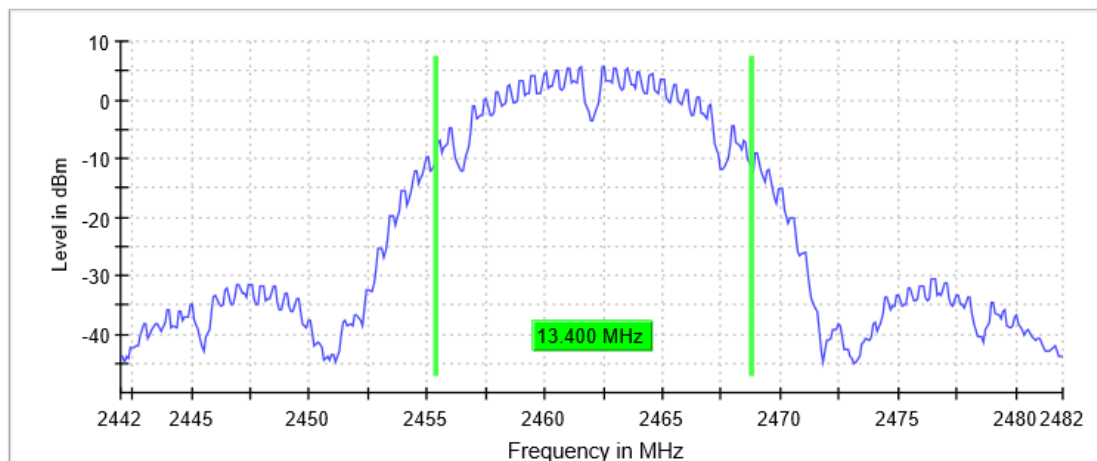

TEST B.2: MAXIMUM CONDUCTED OUTPUT POWER AND ANTENNA GAIN

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(b) and RSS-247 5.4(d)


LIMITS

For systems using digital modulation in the 2400 -2483.5 MHz band: 1 watt (30 dBm).

The e.i.r.p. shall not exceed 4 W (RSS-247).

TEST SETUP

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

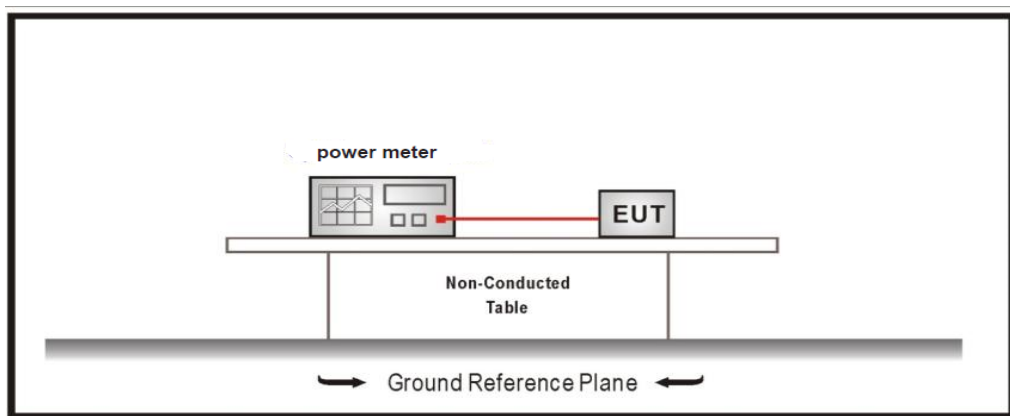


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (b mode)
TEST RESULTS:	PASS

Maximum declared antenna gain: 0.38 dBi

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Maximum conducted power (dBm)	13.89	14.33	14.33
Maximum EIRP power (dBm)	14.27	14.71	14.71
Measurement uncertainty (dB)	<±0.78		

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Lowest Channel

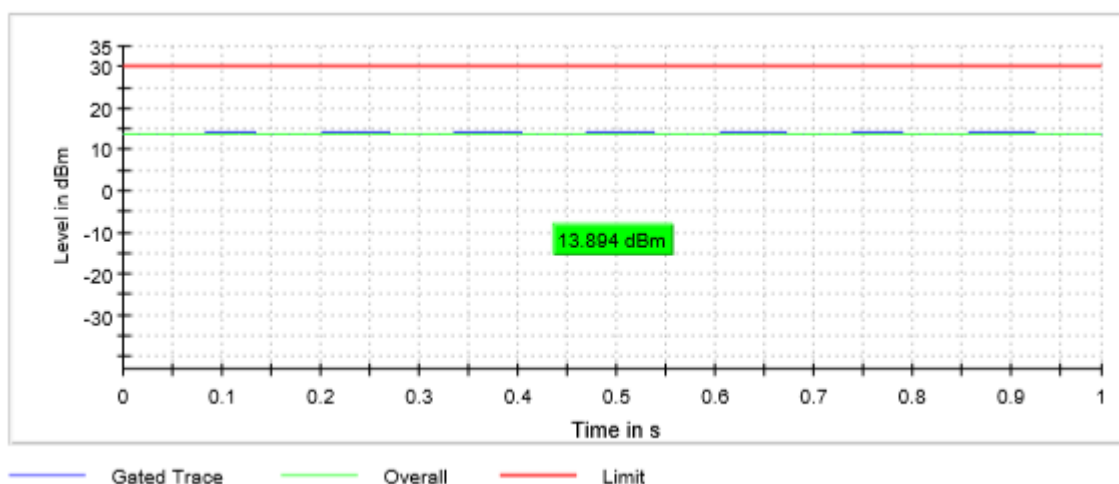


TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Middle Channel

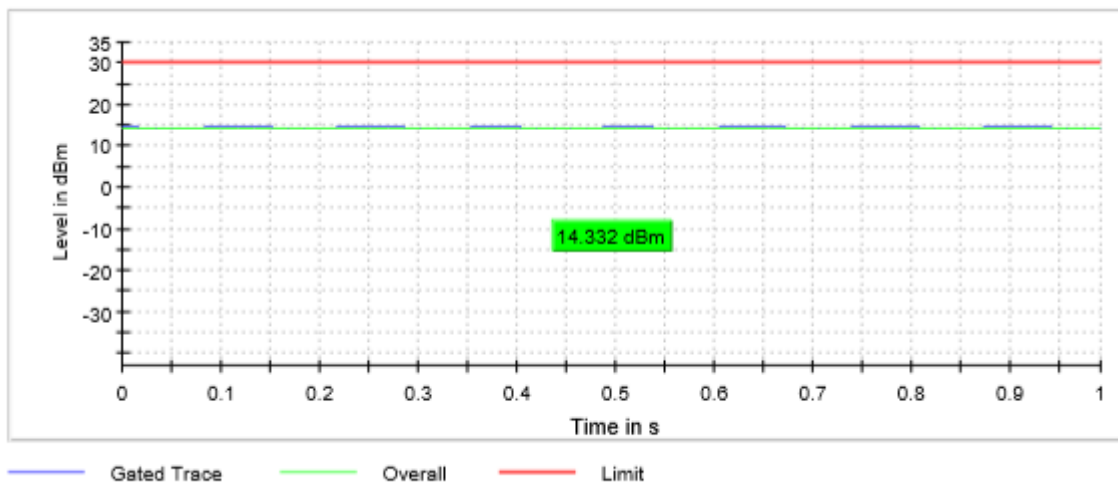

Highest Channel

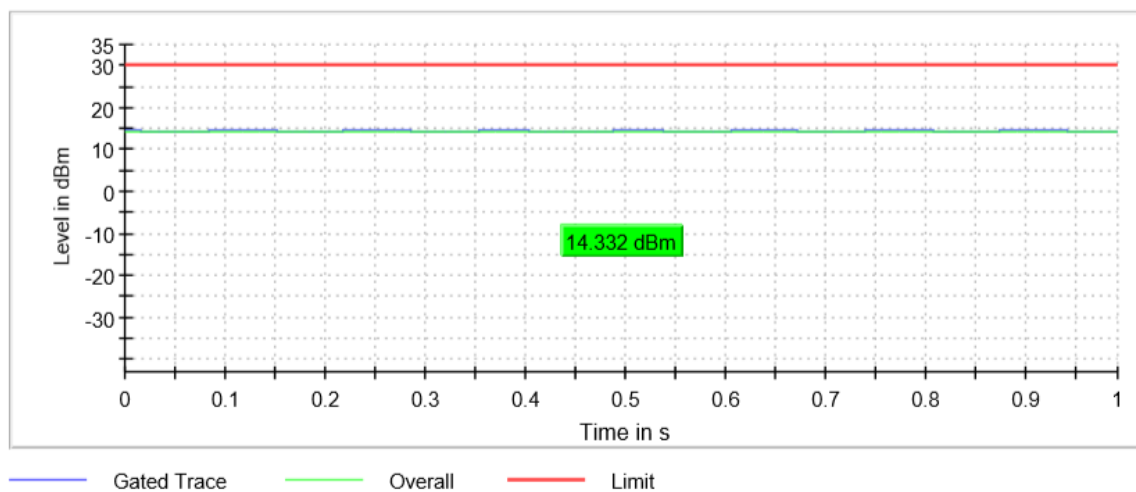


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

Maximum declared antenna gain: 0.38 dBi

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Maximum conducted power (dBm)	13.47	14.24	14.00
Maximum EIRP power (dBm)	13.87	14.62	14.37
Measurement uncertainty (dB)	<±0.78		

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Lowest Channel

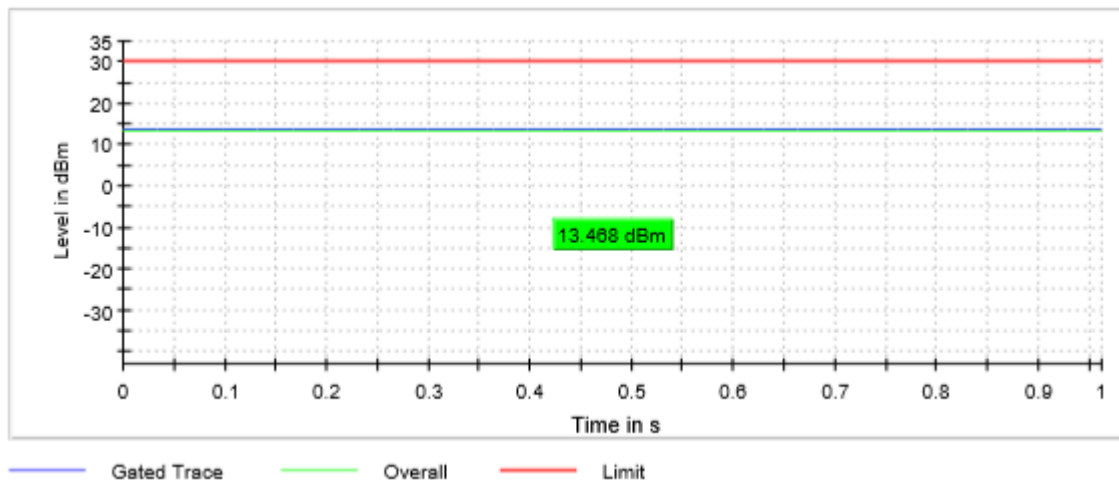


TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Middle Channel

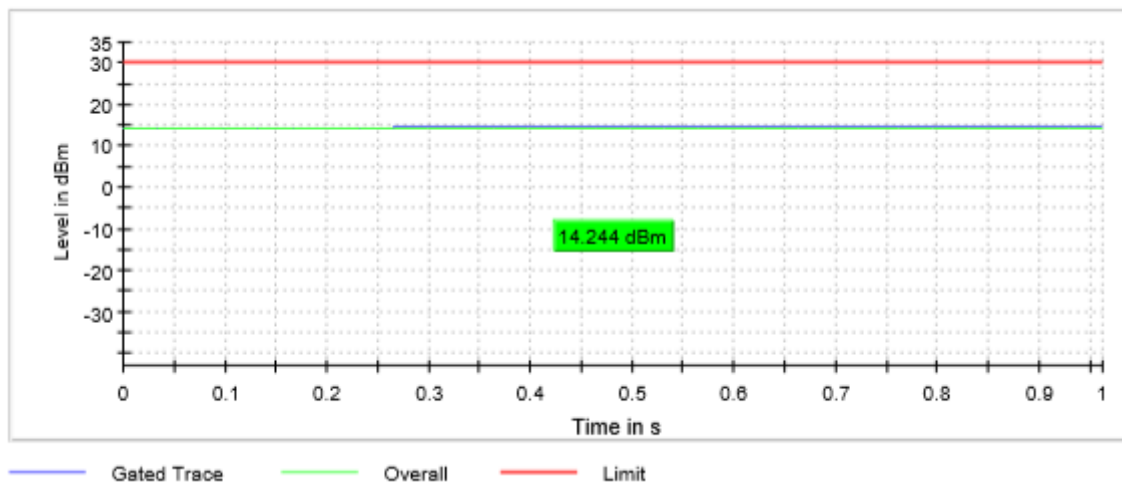

Highest Channel

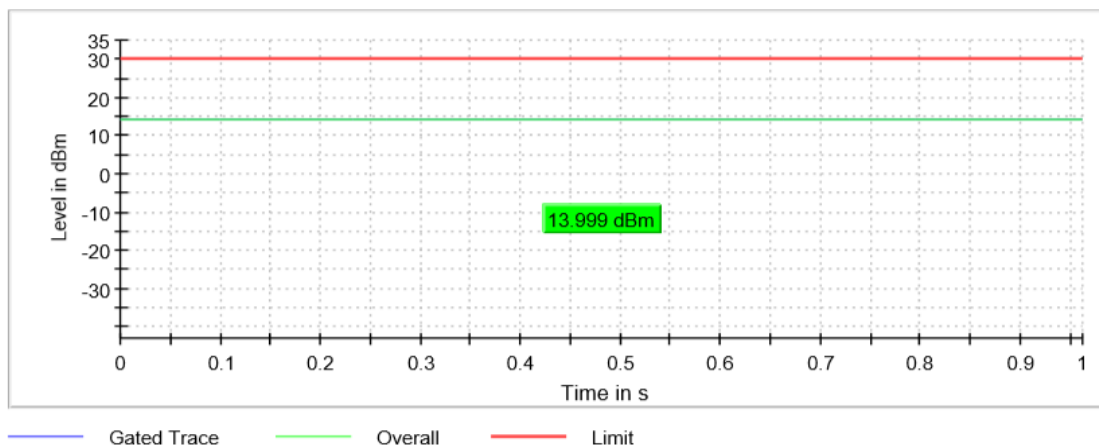


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (n20 mode 20 MHz)
TEST RESULTS:	PASS

Maximum declared antenna gain: 0.38 dBi

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Maximum conducted power (dBm)	13.45	14.16	13.51
Maximum EIRP power (dBm)	13.83	14.54	13.89
Measurement uncertainty (dB)	<±0.78		


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

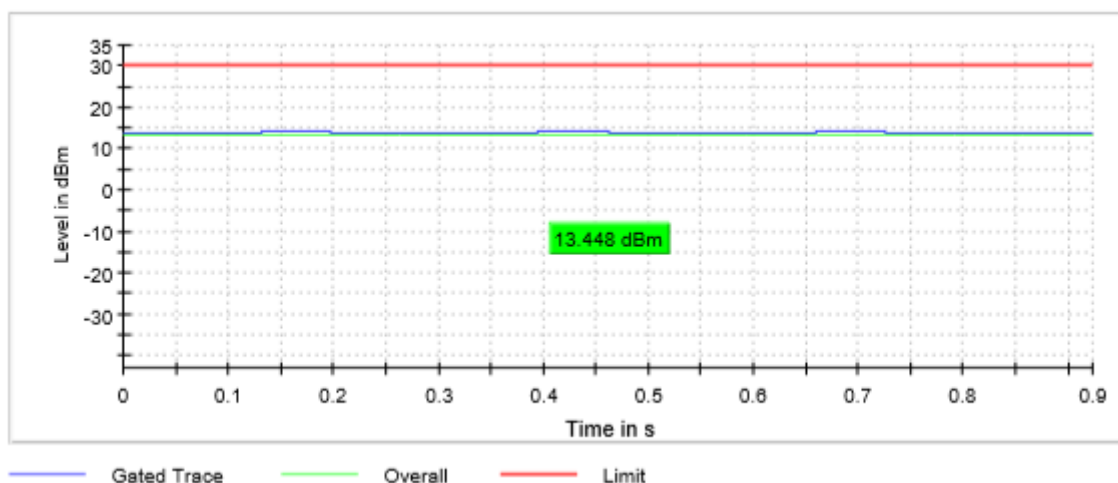


TEST RESULTS (Cont.)

Middle Channel

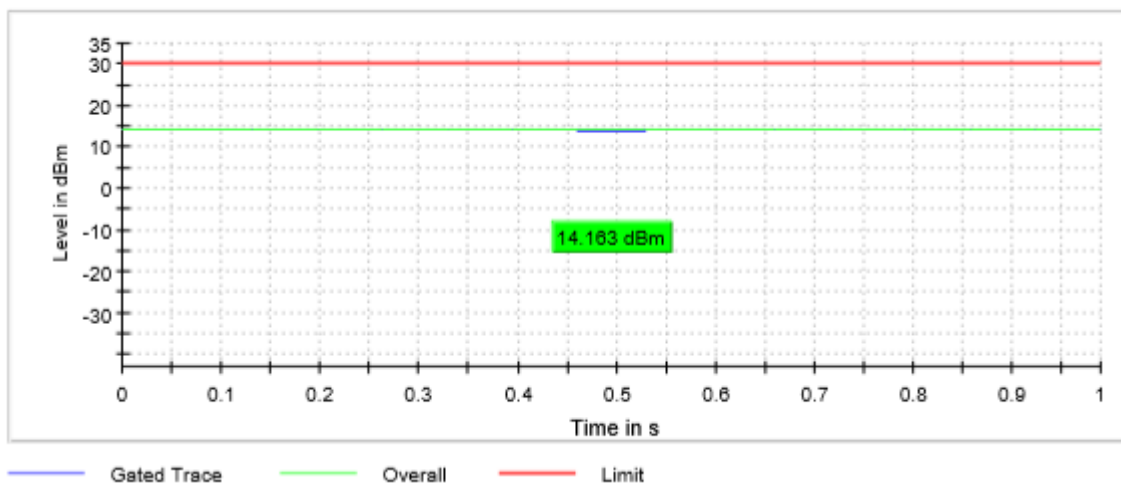

Highest Channel

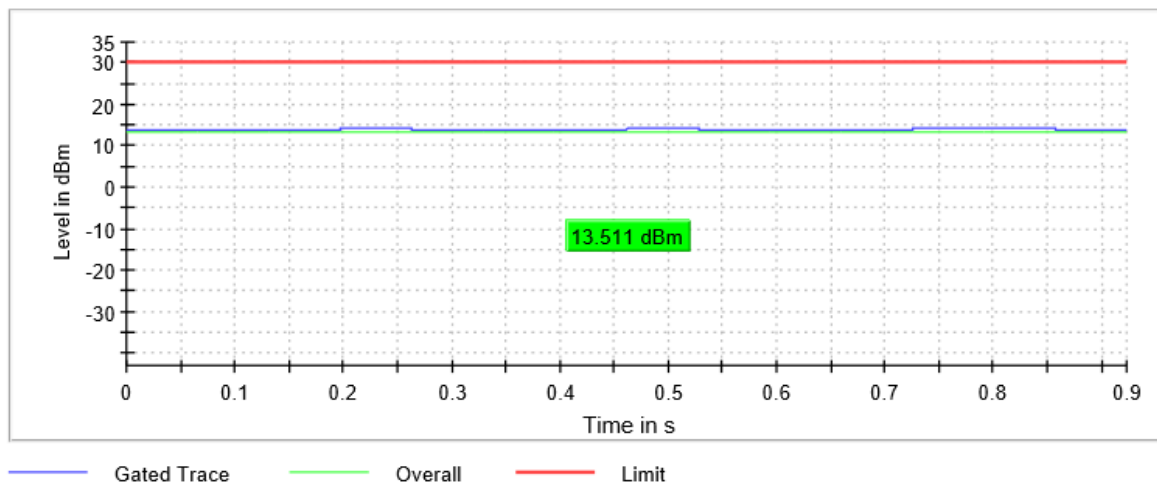


TEST B.3: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS



In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP

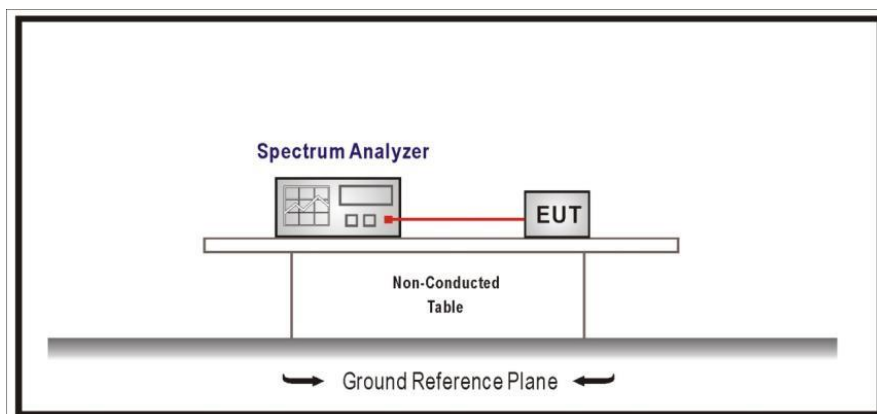


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (b mode)
TEST RESULTS:	PASS

Lowest Channel

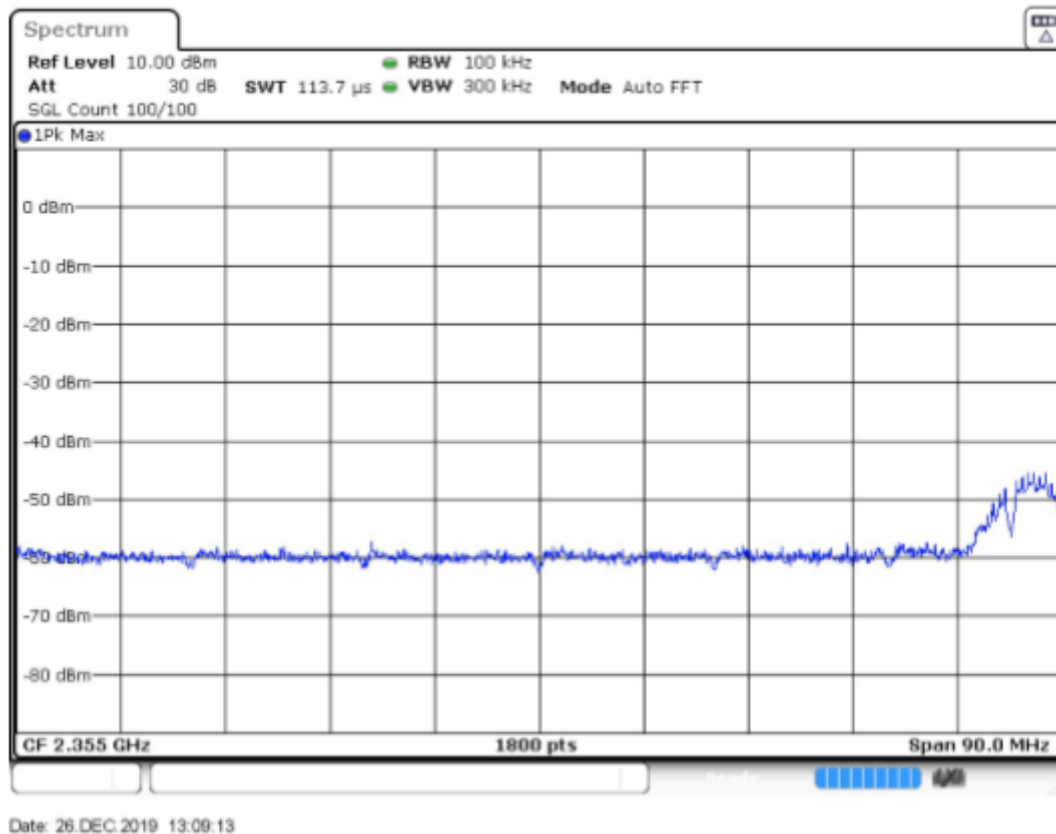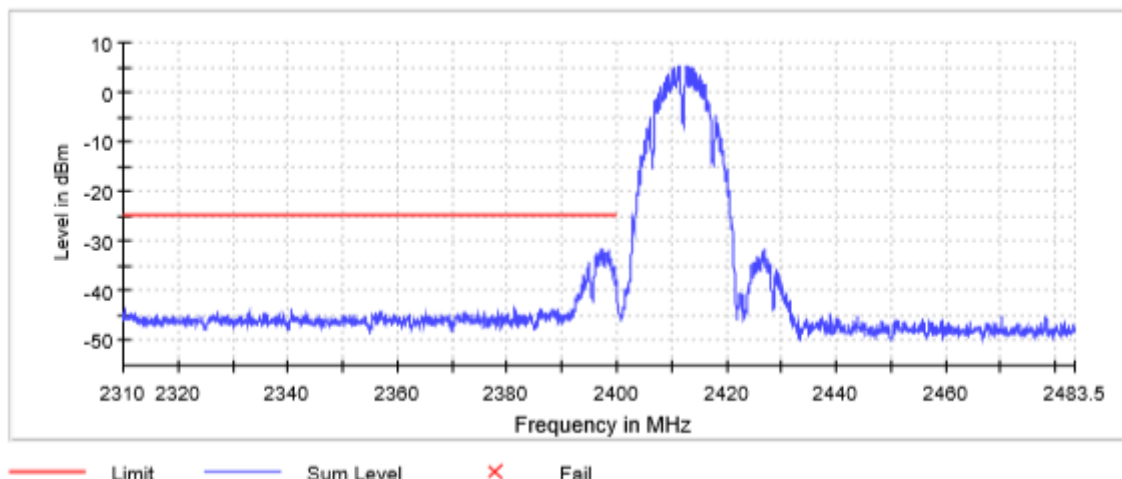

TEST RESULTS (Cont.):

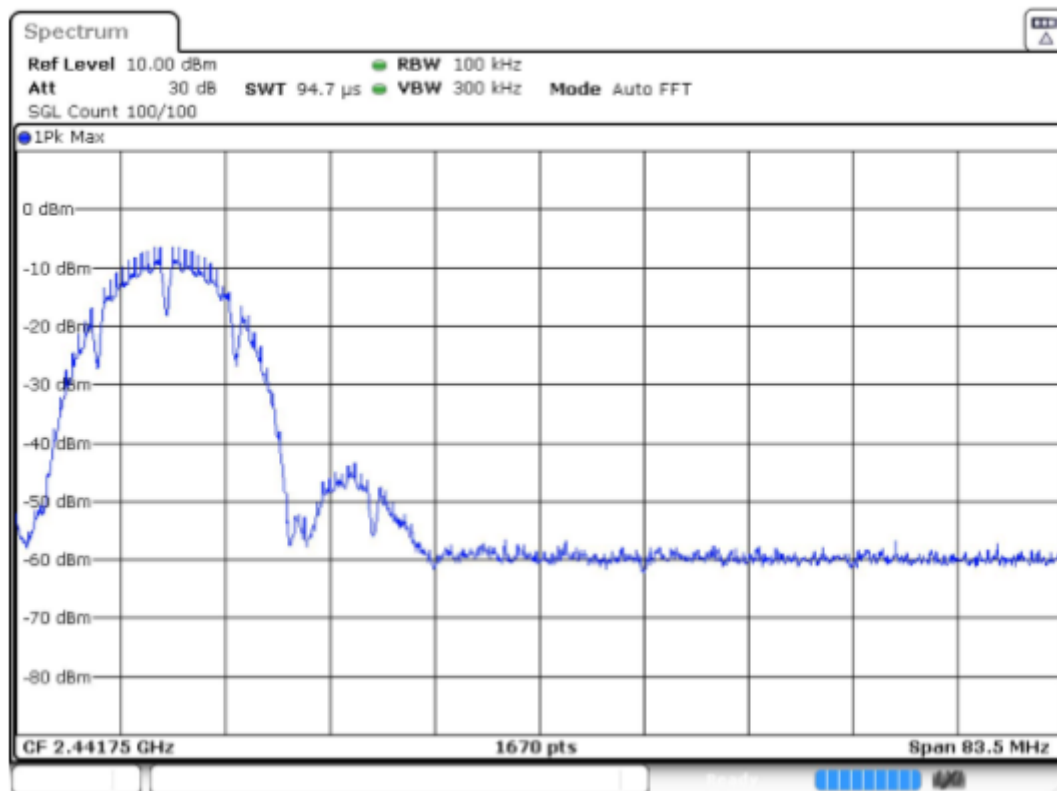

Date: 26.DEC.2019 13:09:33


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	32 / max. 150	13 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.24 dB	0.19 dB


TEST RESULTS (Cont.):

Highest Channel

Highest Channel

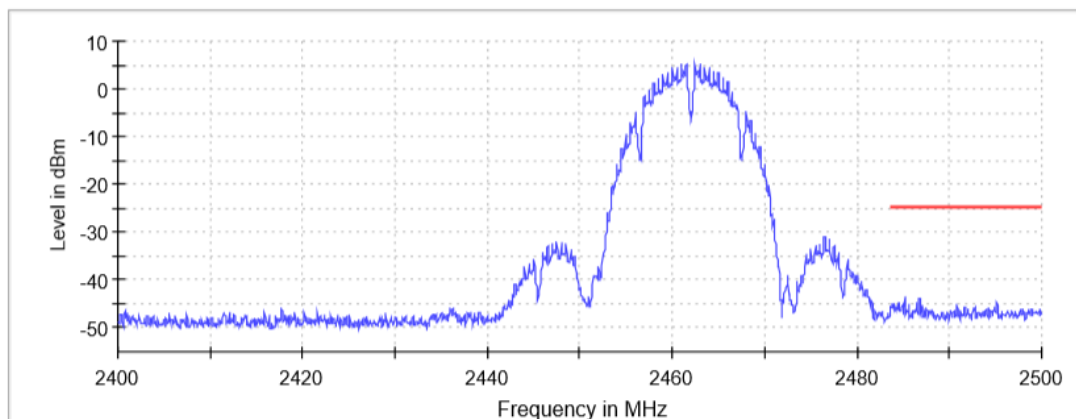


— Limit — Sum Level × Fail

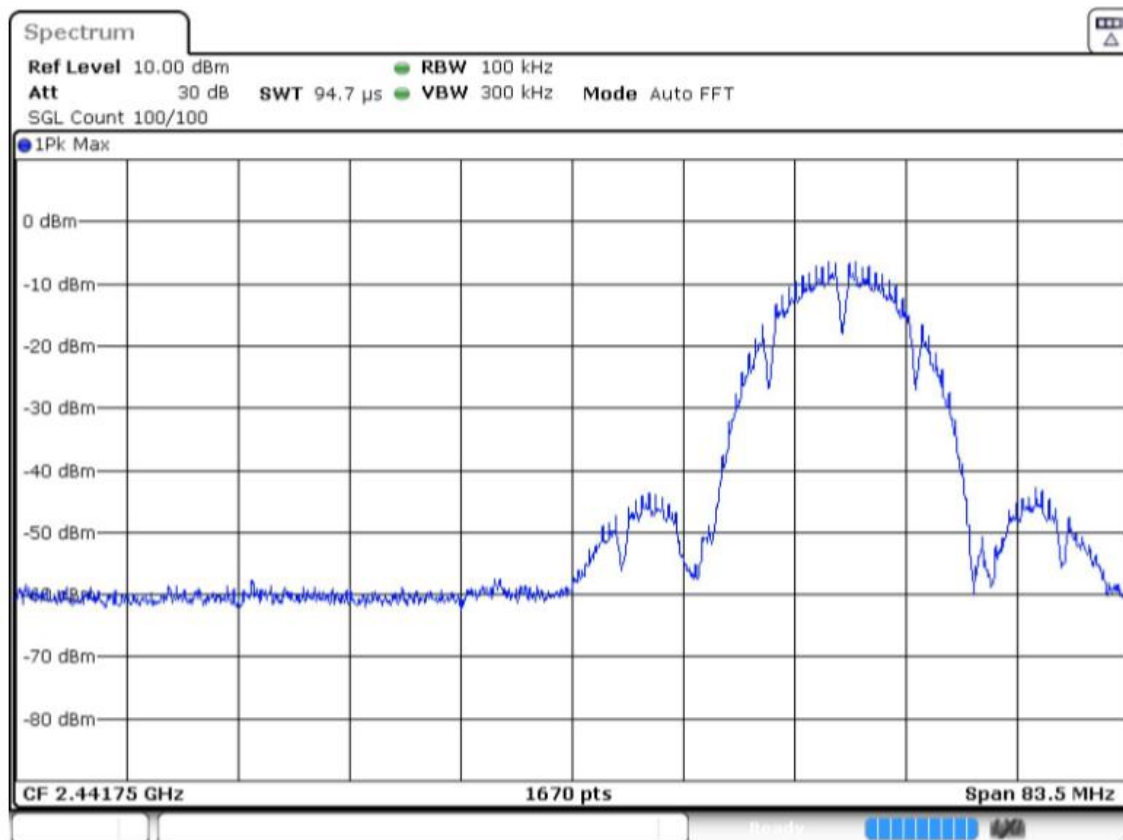

Date: 26.DEC.2019 13:16:47

TEST RESULTS (Cont.):

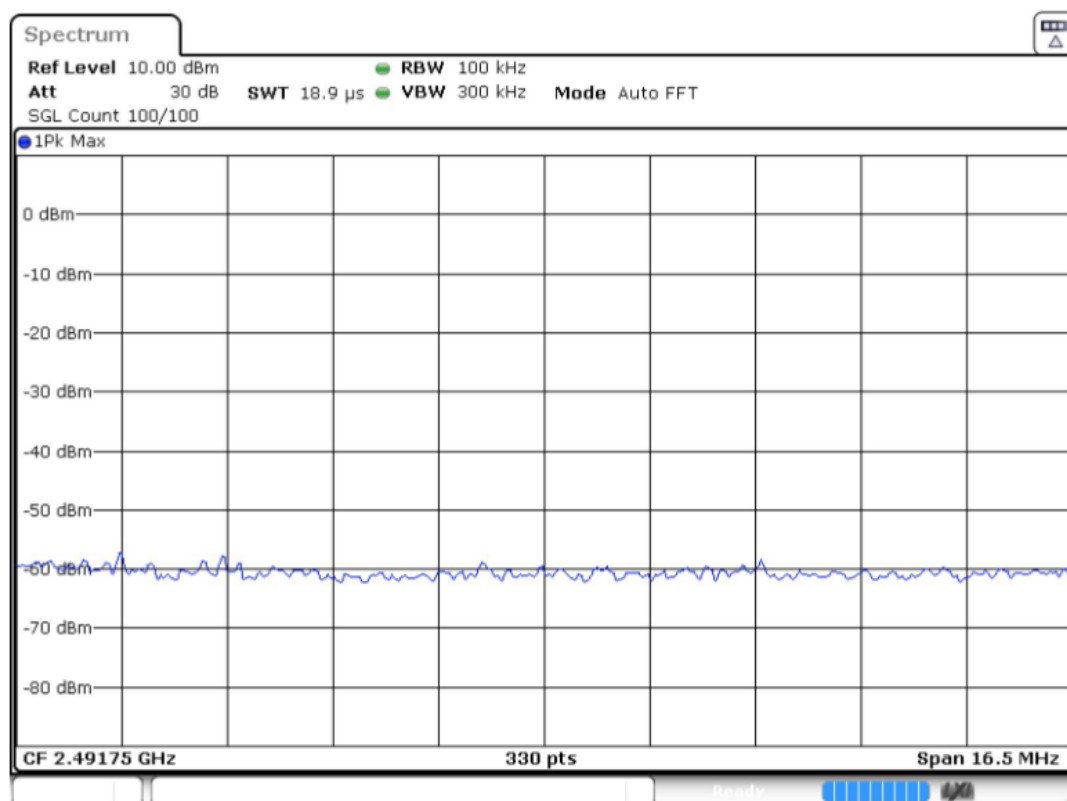


Date: 26.DEC.2019 13:16:52

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	9 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.25 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

Lowest Channel

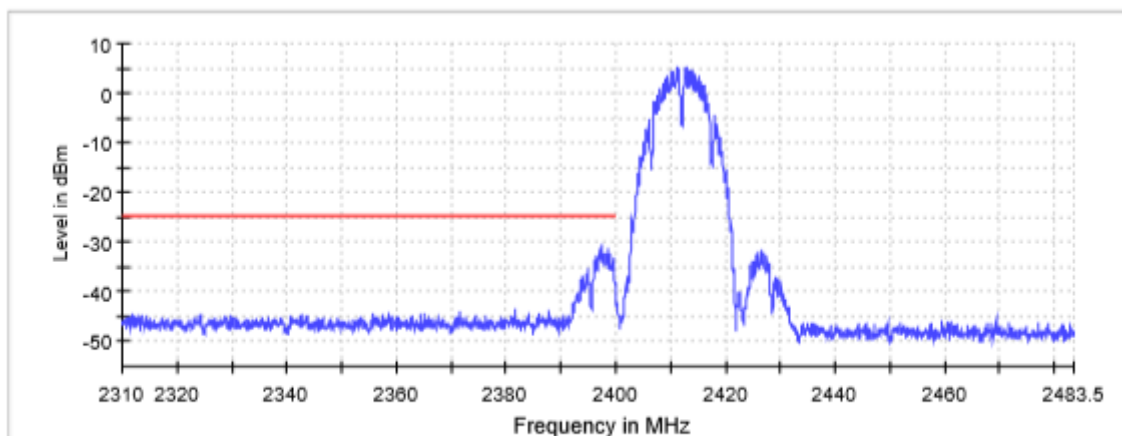


— Limit — Sum Level × Fail

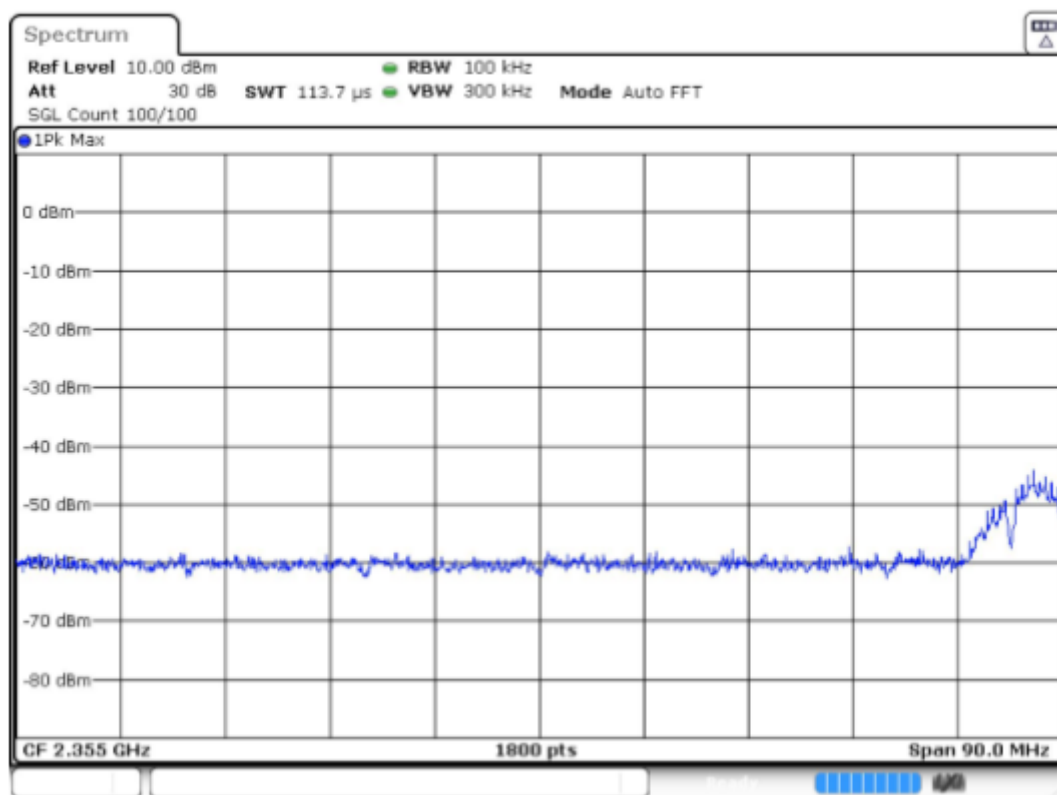

Date: 26.DEC.2019 14:00:21

TEST RESULTS (Cont.):

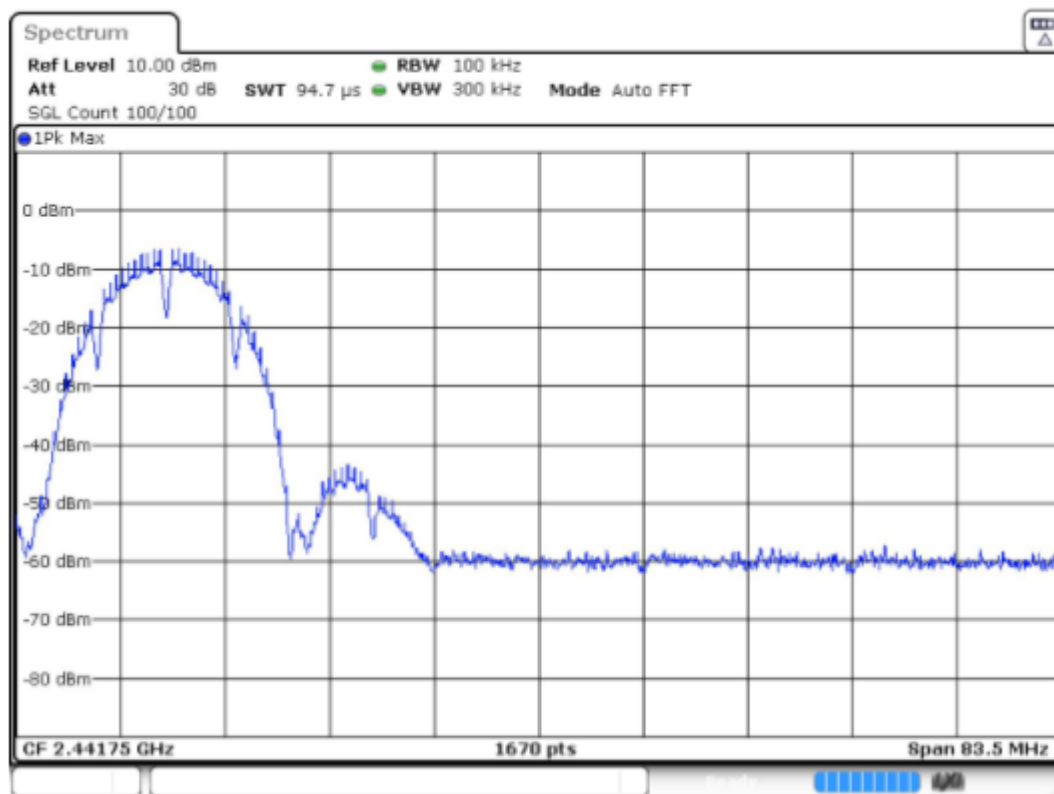

Date: 26.DEC.2019 14:00:34


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	13 / max. 150	8 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.19 dB	0.33 dB


TEST RESULTS (Cont.):

Highest Channel

Highest Channel

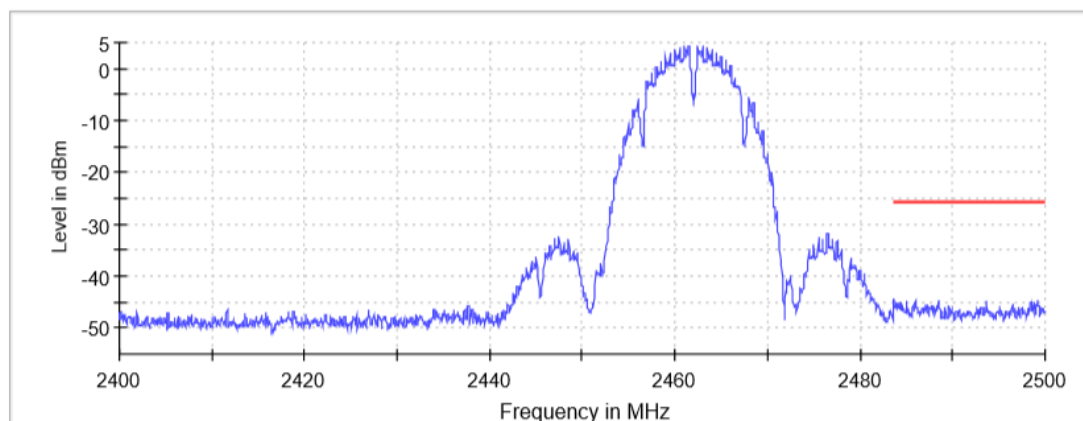


— Limit — Sum Level × Fail

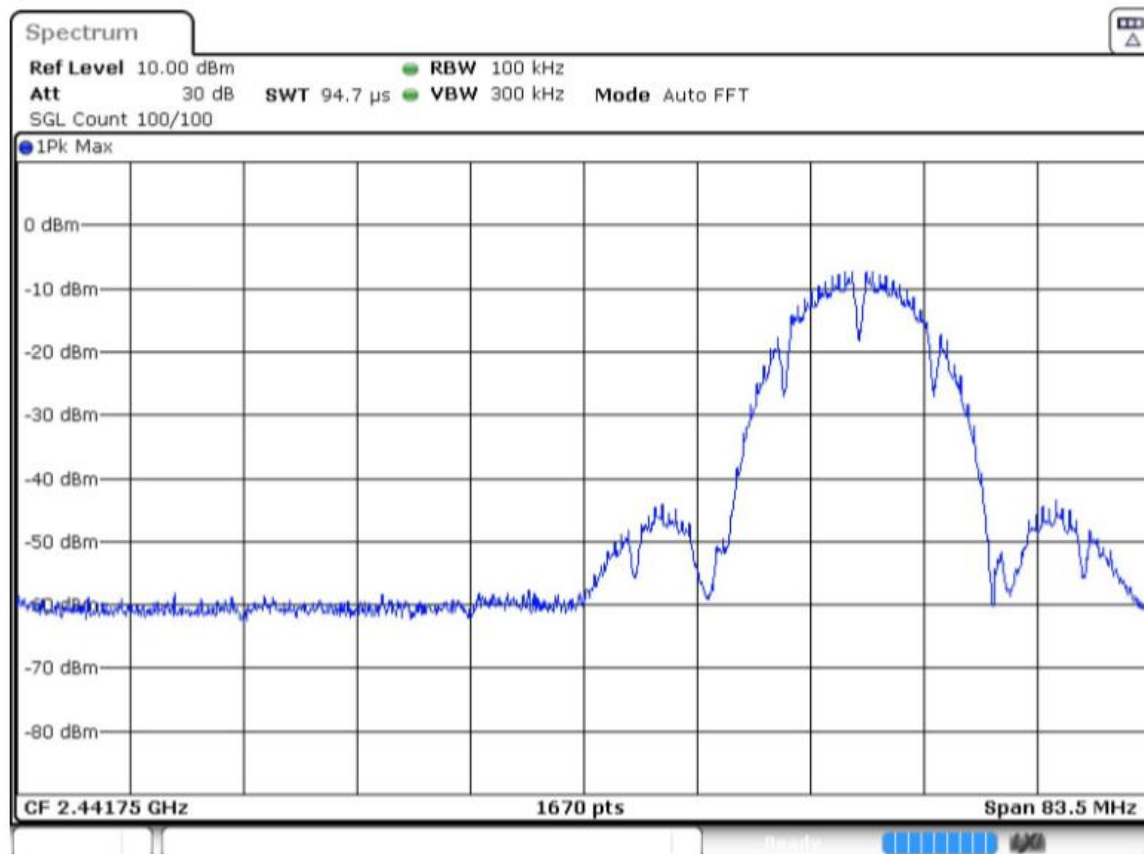

Date: 26.DEC.2019 14:14:13

TEST RESULTS (Cont.):

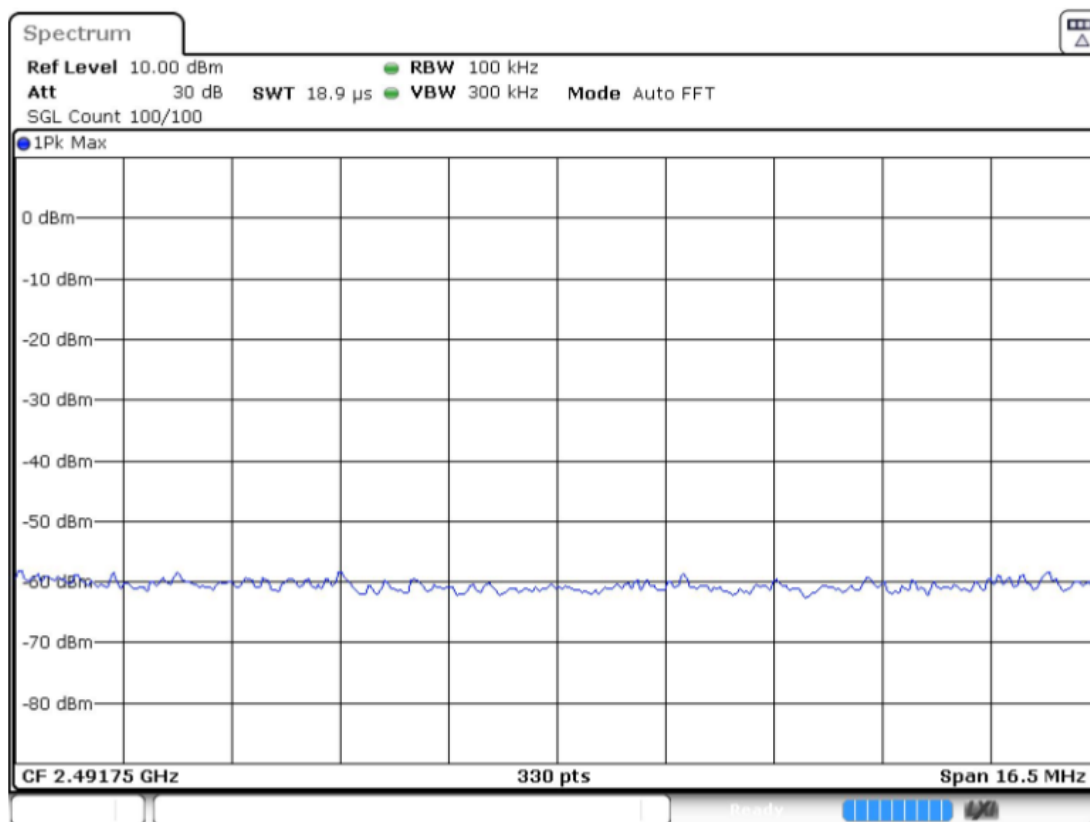


Date: 26.DEC.2019 14:14:18

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	9 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.25 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (n20 mode 20 MHz)
TEST RESULTS:	PASS

Lowest Channel

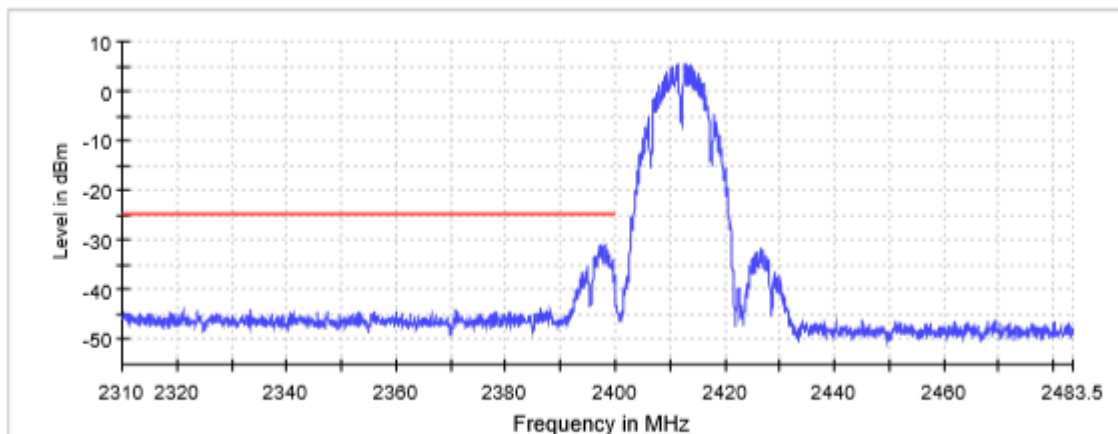


— Limit — Sum Level × Fail

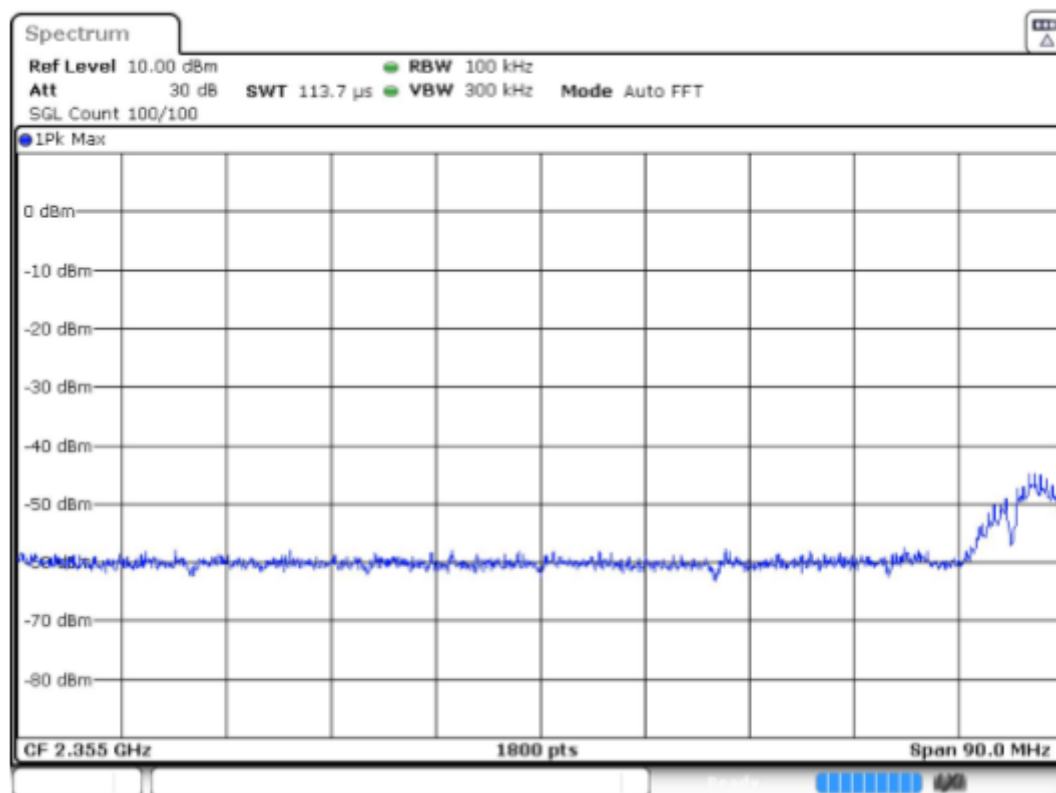

Date: 26 DEC 2019 14:29:52

TEST RESULTS (Cont.):

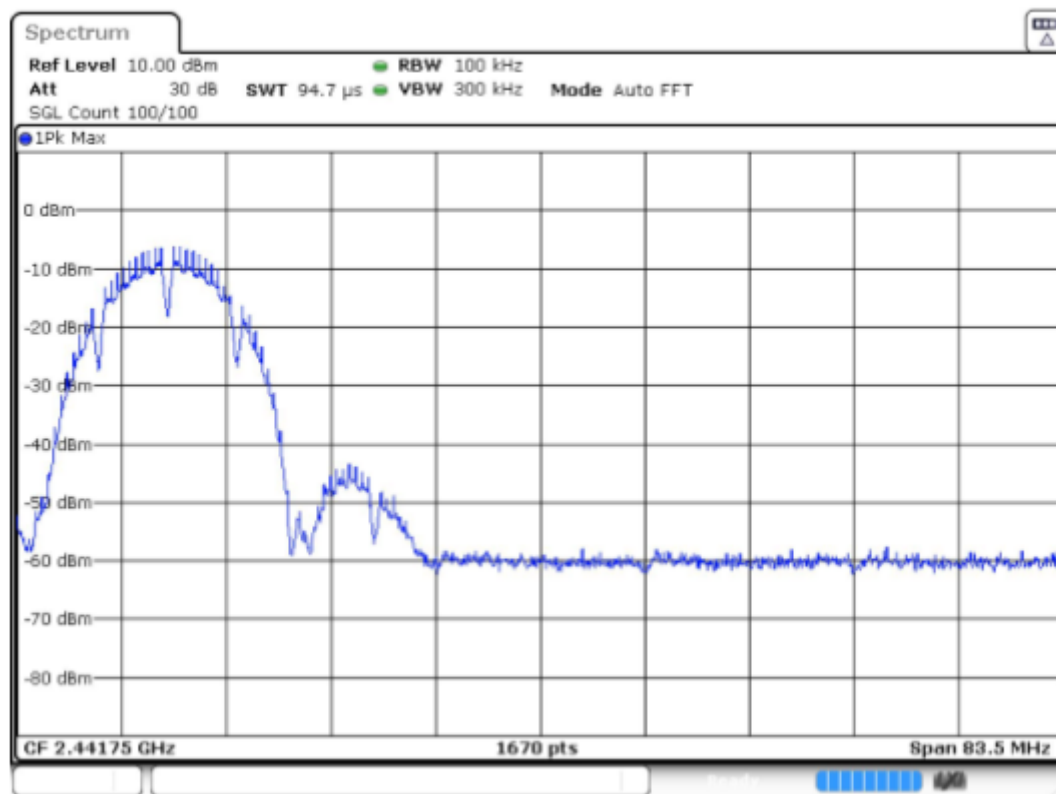


Date: 26.DEC.2019 14:30:05

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	17/ max. 150	7 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.32 dB	0.00 dB

TEST RESULTS (Cont.):

Highest Channel

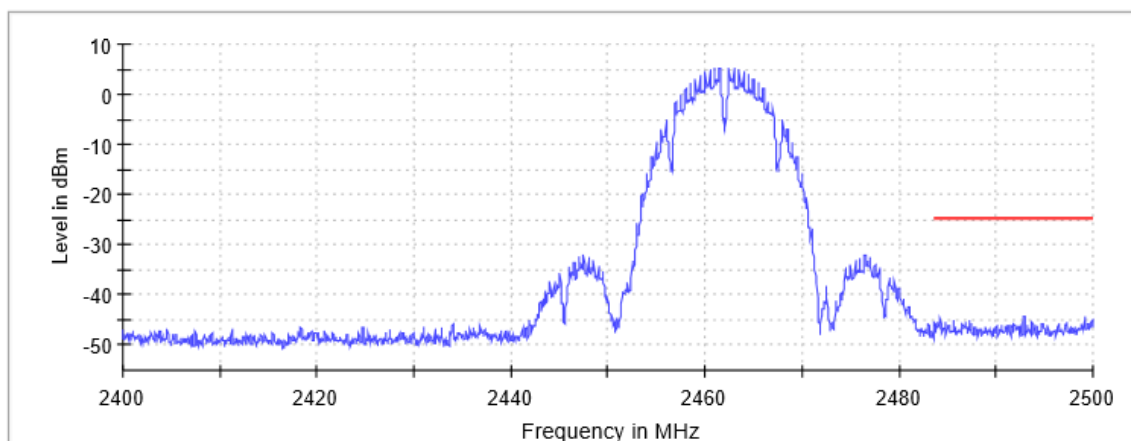


— Limit — Sum Level × Fail

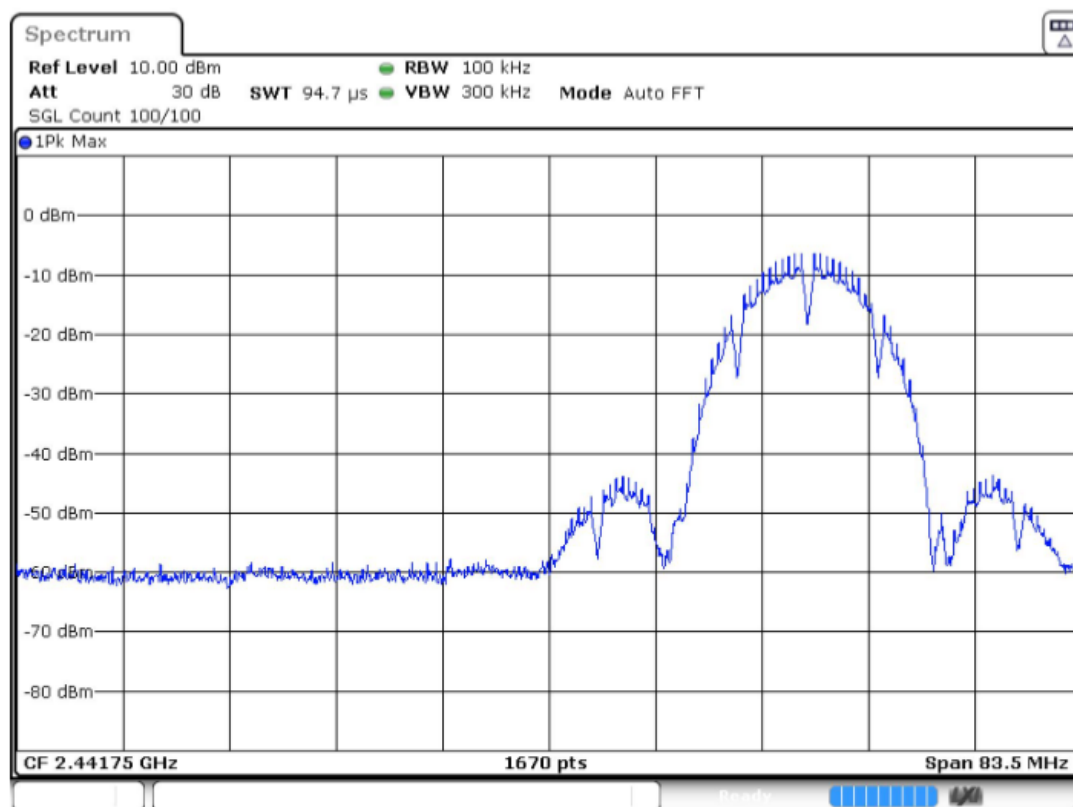

Date: 26.DEC.2019 14:39:28

TEST RESULTS (Cont.):

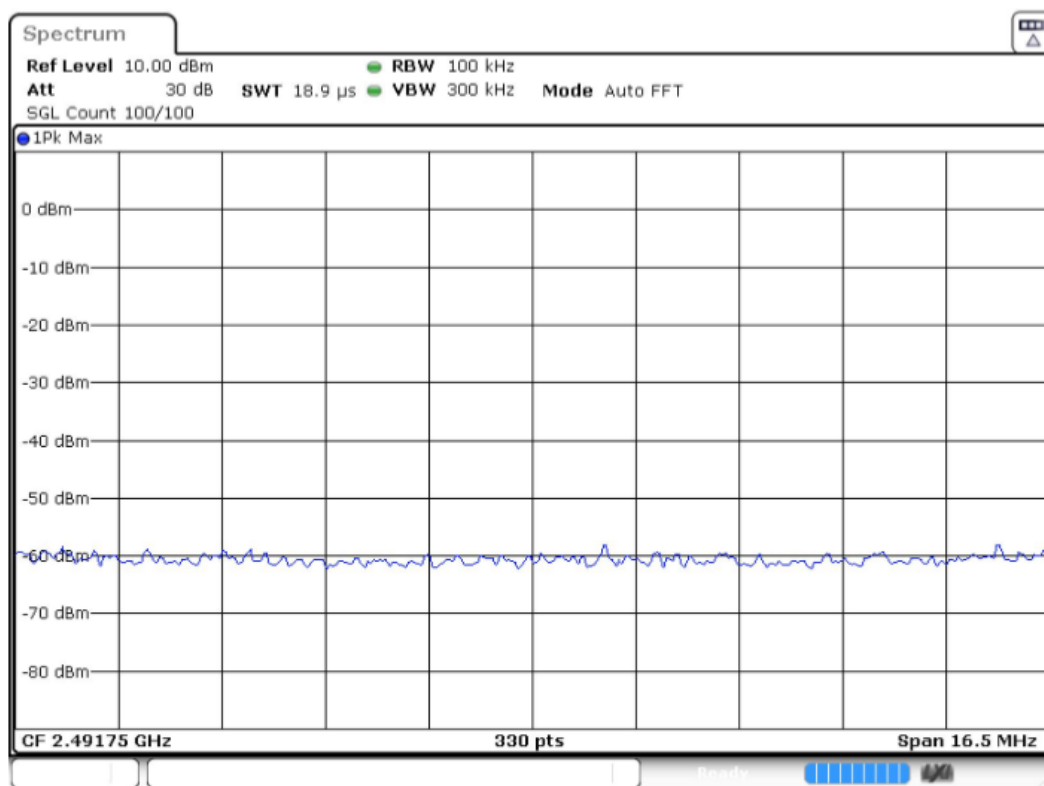

Date: 26.DEC.2019 14:39:33

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	9 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.26 dB	0.00 dB

TEST B.4: POWER SPECTRAL DENSITY


LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(e) and RSS-247 5.2 (b)

LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST SETUP


For all modes, the maximum power spectral density level in the fundamental emission was measured using the method AVGPSD-1 according to point 10.3. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

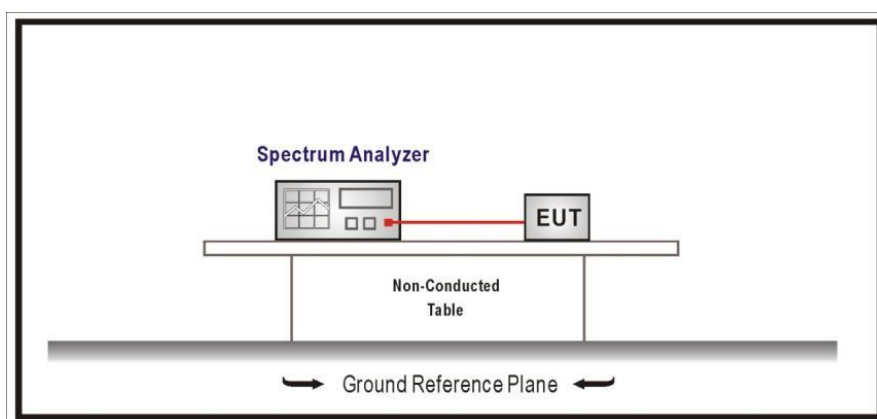


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (b mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Power spectral density (dBm)	1.335	2.094	2.669
Measurement uncertainty (dB)	<±0.78		

Lowes Channel

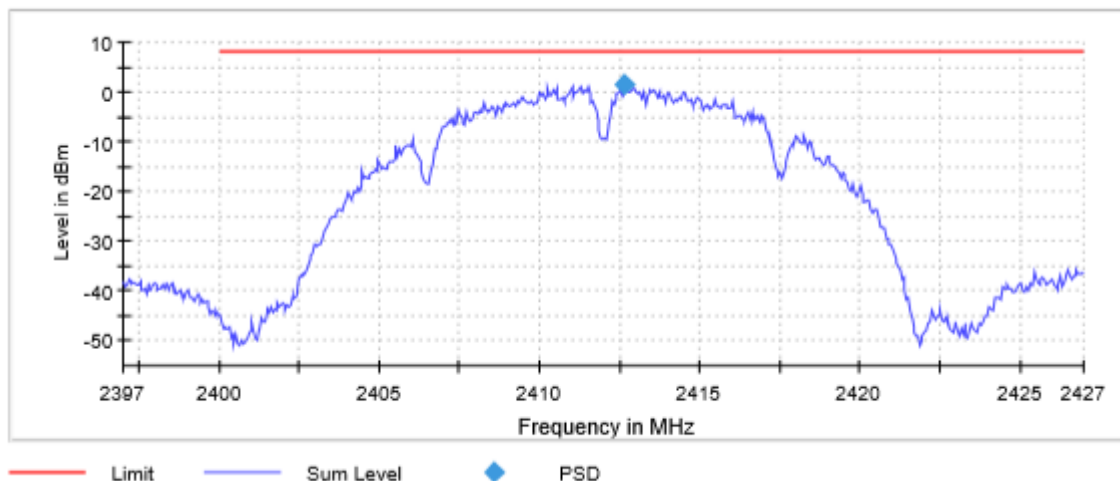


Middle Channel

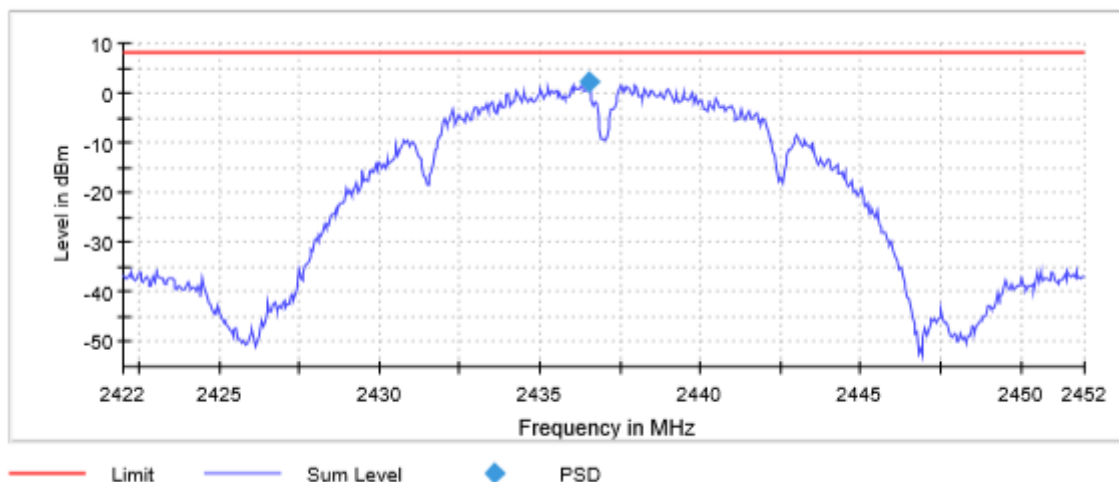

TEST RESULTS (Cont.):

Highest Channel

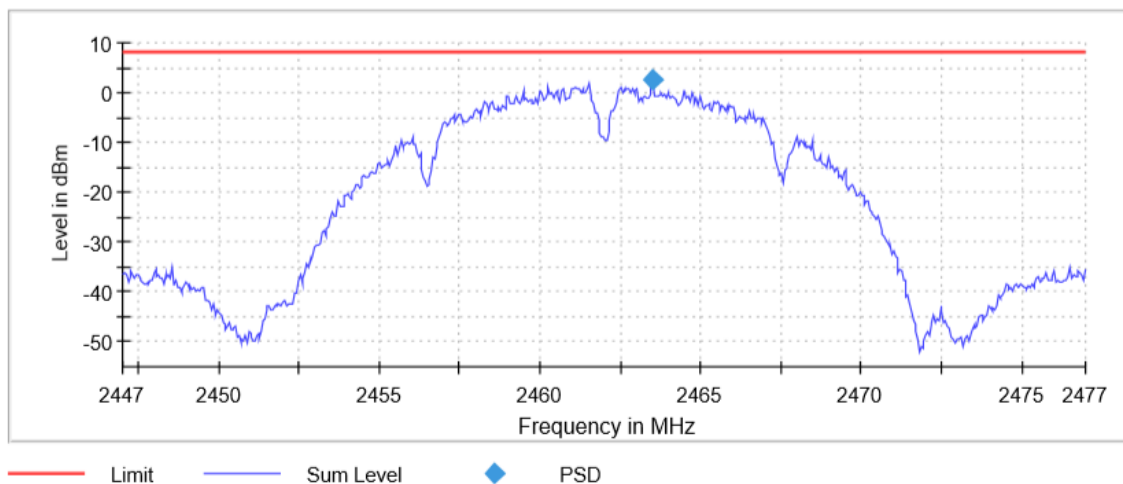


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39700 GHz	2.42200 GHz	2.44700 GHz
Stop Frequency	2.42700 GHz	2.45200 GHz	2.47700 GHz
Span	30.000 MHz	30.000 MHz	30.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	600	600	600
Sweep time	12.000 ms	12.000 ms	12.000 ms
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	RMS	RMS	RMS
Sweep Count	1	1	1
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamplifier	Off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	85 / max.150	83 / max. 150	56 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.31 dB	0.36 dB	0.46 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Power spectral density (dBm)	1.730	2.242	2.181
Measurement uncertainty (dB)	<±0.78		

Lowest Channel

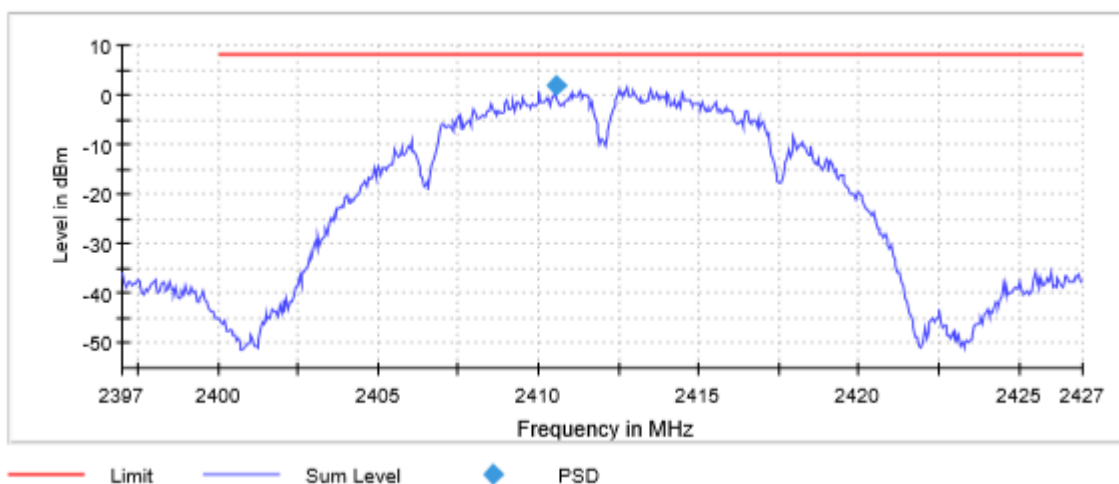


Middle Channel

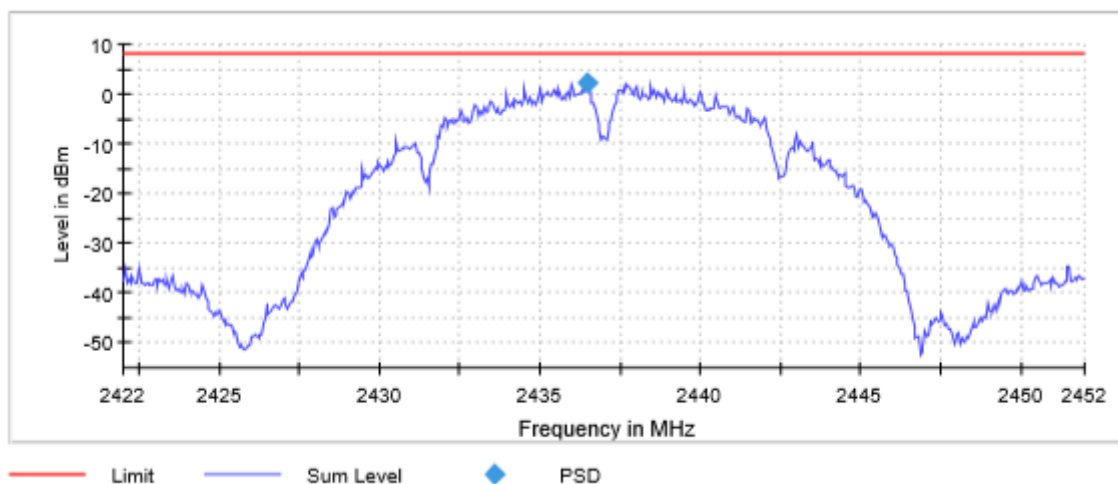

TEST RESULTS (Cont.):

Highest Channel

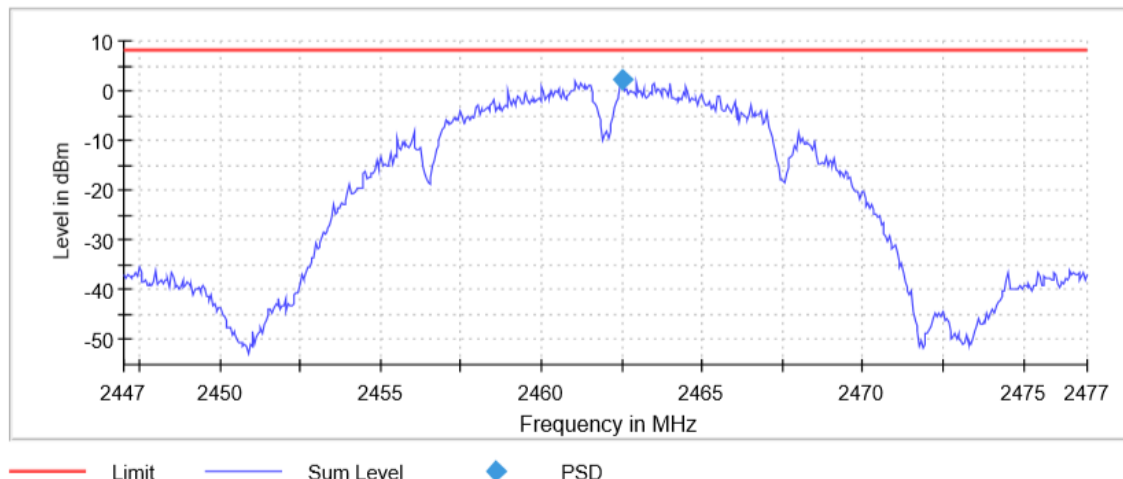


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39700 GHz	2.42200 GHz	2.44700 GHz
Stop Frequency	2.42700 GHz	2.45200 GHz	2.47700 GHz
Span	30.000 MHz	30.000 MHz	30.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	600	600	600
Sweep time	12.000 ms	12.000 ms	12.000 ms
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	RMS	RMS	RMS
Sweep Count	1	1	1
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	110 / max.150	110 / max. 150	78 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB	0.47 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (n20 mode 20 MHz)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Power spectral density (dBm)	1.714	2.548	1.983
Measurement uncertainty (dB)	<±0.78		

Lowest Channel

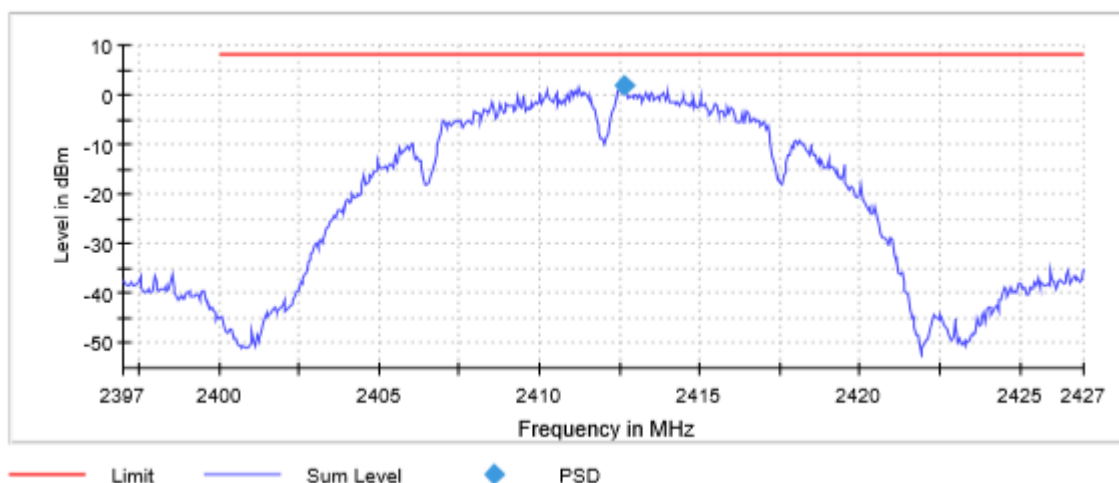


Middle Channel

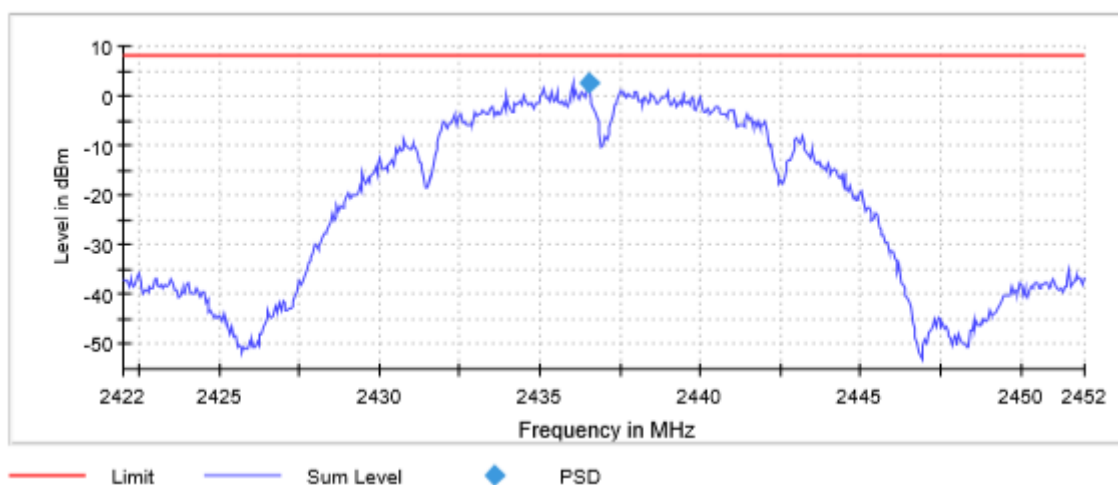

TEST RESULTS (Cont.):

Highest Channel

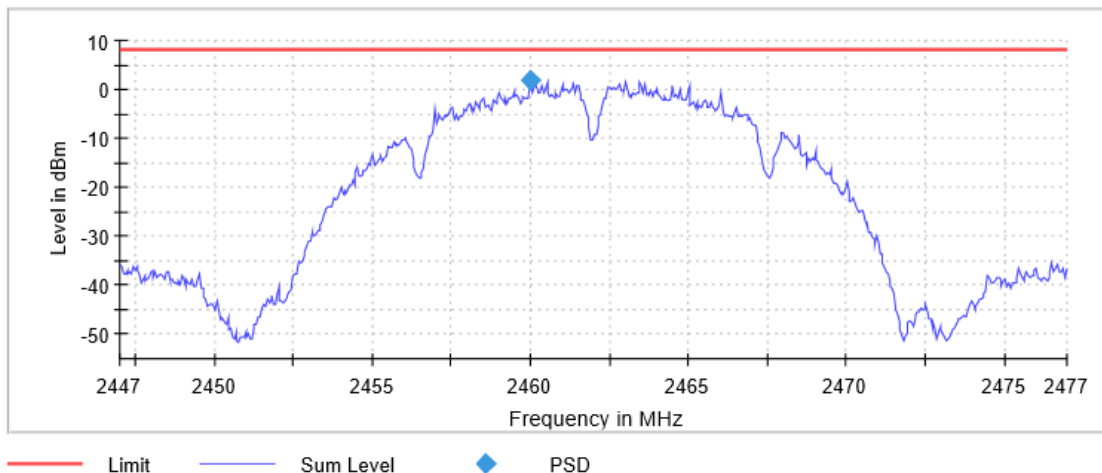

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39700 GHz	2.42200 GHz	2.44700 GHz
Stop Frequency	2.42700 GHz	2.45200 GHz	2.47700 GHz
Span	30.000 MHz	30.000 MHz	30.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	600	600	600
Sweep time	12.000 ms	12.000 ms	12.000 ms
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	RMS	RMS	RMS
Sweep Count	1	1	1
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamp	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	96 / max.150	66 / max. 150	54 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.27 dB	0.08 dB	0.48 dB

TEST B.5: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and at 1m for the frequency range 1-26 GHz (1 GHz-18 GHz and 18 GHz-26 GHz Double ridge horn antennas).

For radiated emissions in the range 1-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)

Radiated measurements Setup $f < 1$ GHz

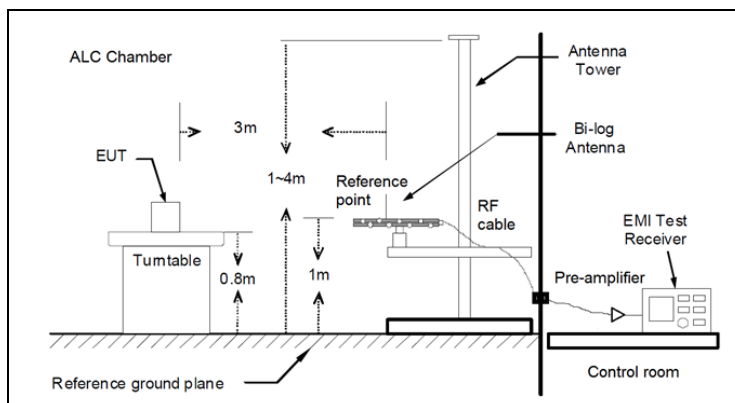

Radiated measurements setup $f > 1$ GHz

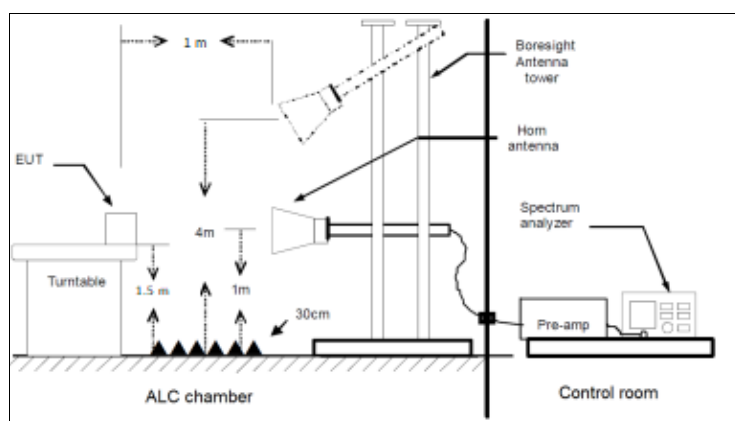

TESTED SAMPLES:

S/03

TESTED CONDITIONS MODES:

TC#01 (b mode)

TEST RESULTS:

PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel and mode selected in the EUT. The results in the following plots and tables show the maximum measured levels in the 30-1000 MHz range.

Frequency range 1 GHz – 26 GHz

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31 - 2.39 GHz and 2.4835 - 2.5 GHz.


(see next plots).

TEST RESULTS (Cont.)

30 MHz – 1 GHz

CHANNEL: Middle (2437 MHz).

RF_FCC_15.247_E Field_30MHz_1 GHz

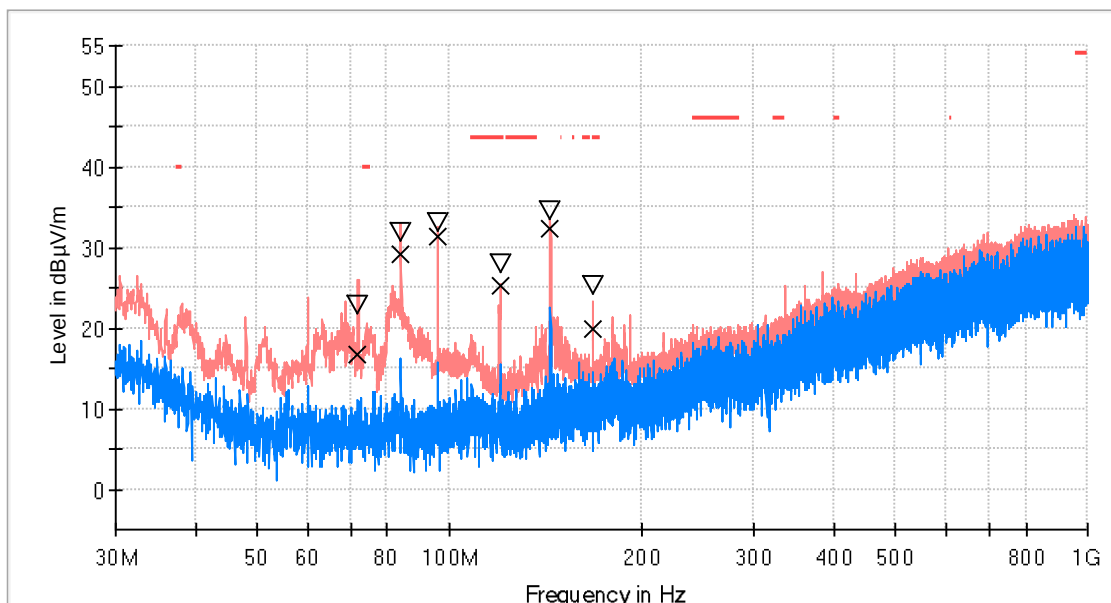

- PK+_MAXH
- PK+_CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ∇ MaxPeak-PK+ (Single)
- x QuasiPeak-QPK (Single)


Maximizations

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Pol	Azimuth (deg)
71.952500	22.7	16.8	V	-69.0
83.980500	31.9	29.2	V	-165.0
96.008500	33.1	31.4	V	180.0
120.016000	27.9	25.3	H	-75.0
144.023500	34.6	32.3	V	65.0
168.031000	25.2	19.9	V	-165.0

TEST RESULTS (Cont.)

1 – 18 GHz

CHANNEL: Low (2412 MHz).

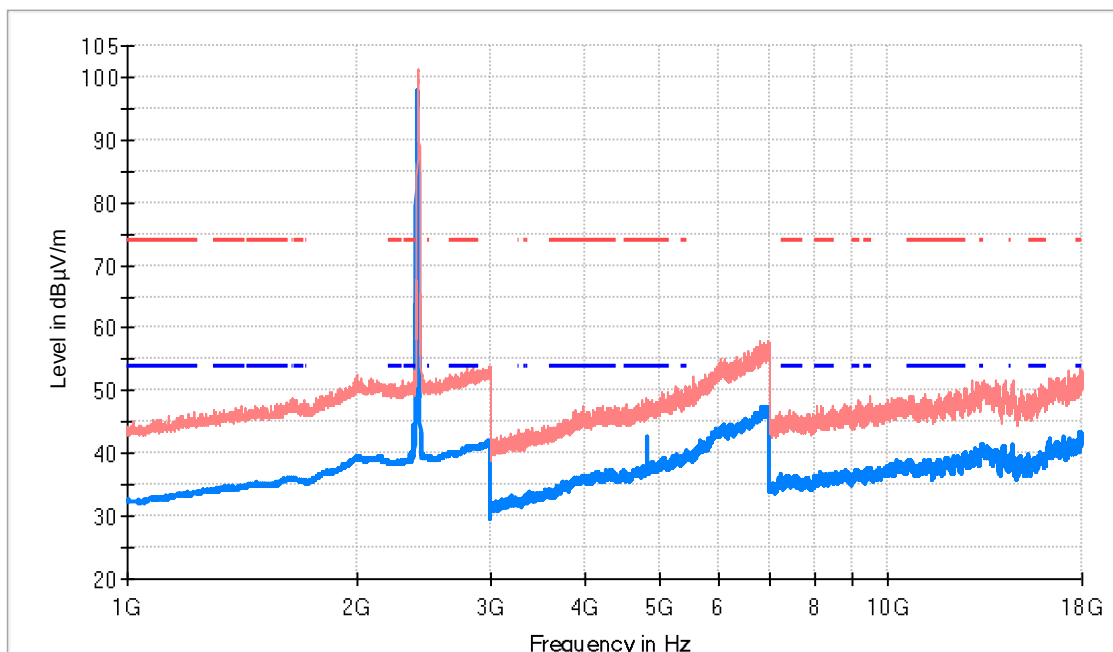

- AVG_ _MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+ _MAXH (dBµV/m)	AVG_ _MAXH (dBµV/m)	Pol	Comment
2411.000000	101.4	97.8	H	Fundamental
4824.000000	48.7	42.7	V	

TEST RESULTS (Cont.)

1 – 18 GHz

CHANNEL: Middle (2437 MHz).

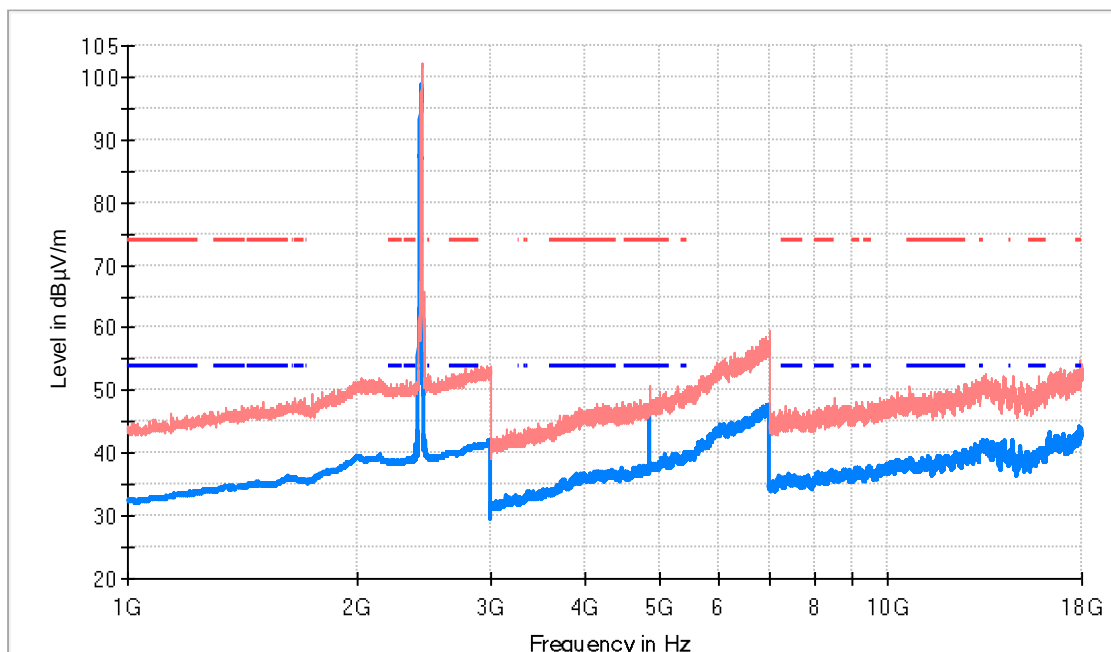

- AVG_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2438.000000	102.1	98.7	H	Fundamental
4874.000000	50.7	46.2	H	

TEST RESULTS (Cont.)

1 – 18 GHz

CHANNEL: Highest (2462 MHz).

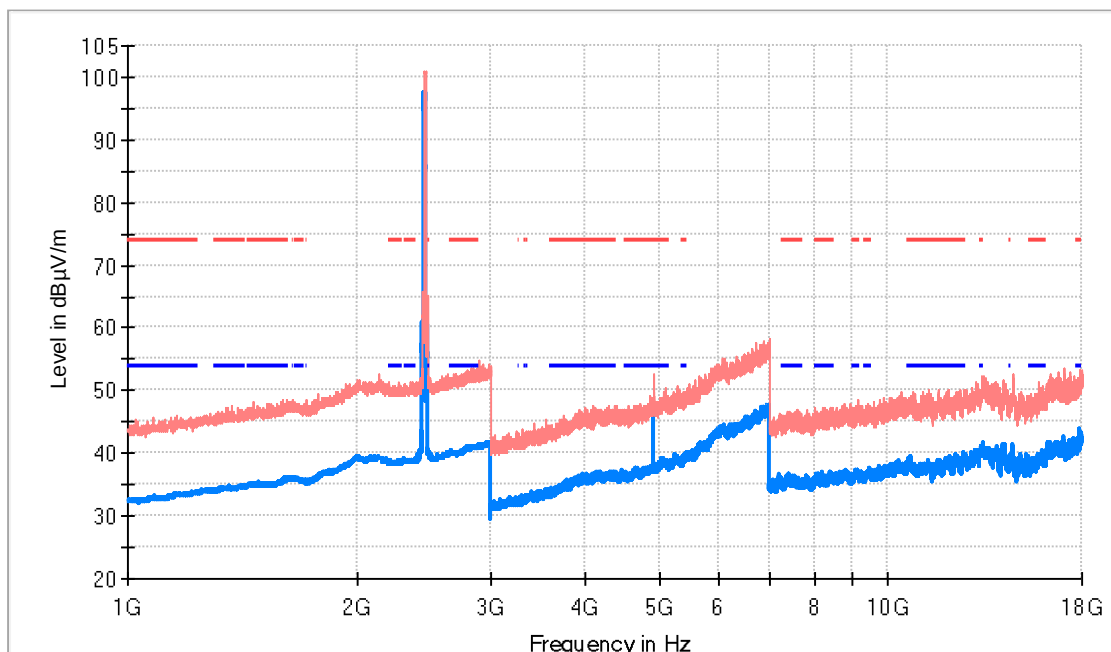

- AVG_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2463.000000	100.9	97.5	H	Fundamental
4924.000000	52.7	48.6	V	

TEST RESULTS (Cont.)


18 GHz – 26 GHz

CHANNEL: Lowest (2412 MHz).

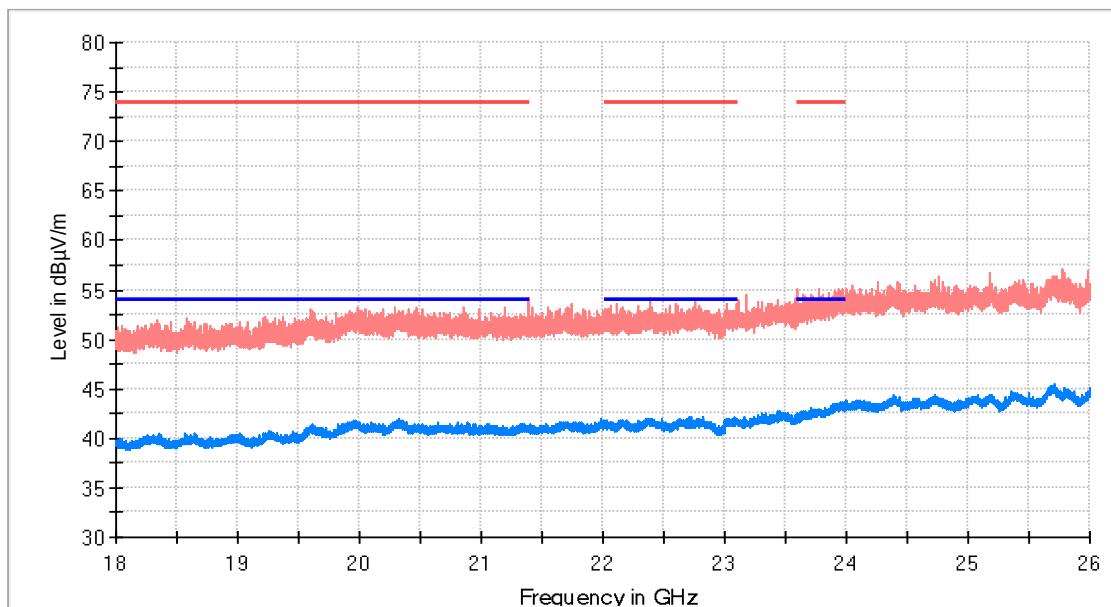

- AVG_MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Middle (2437 MHz).

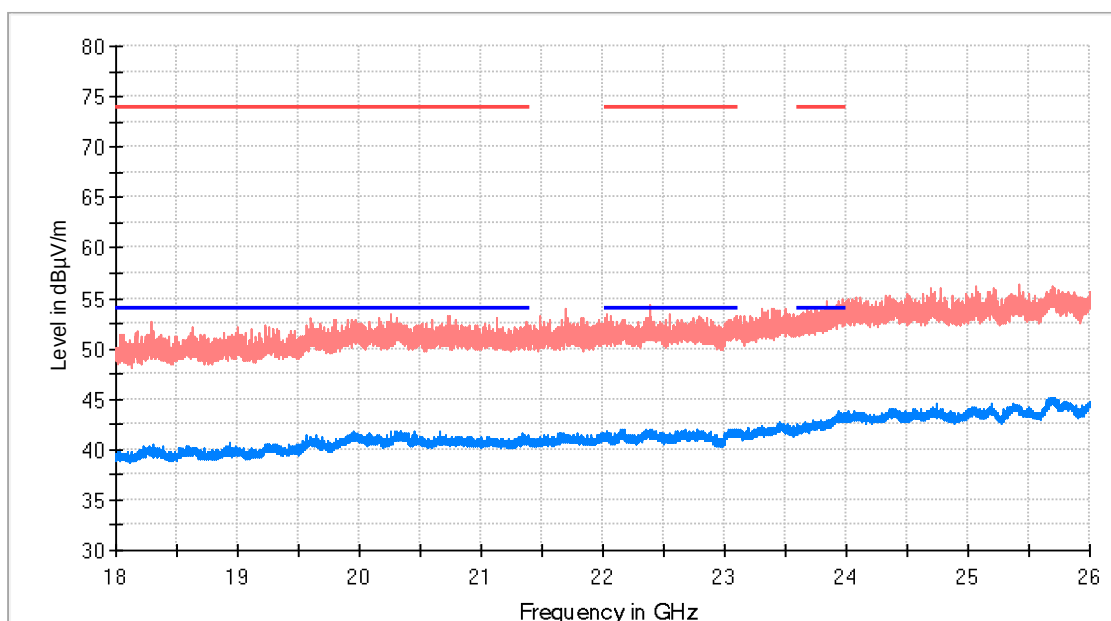


- AVG_MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

18 GHz – 26 GHz


CHANNEL: Highest (2462 MHz).

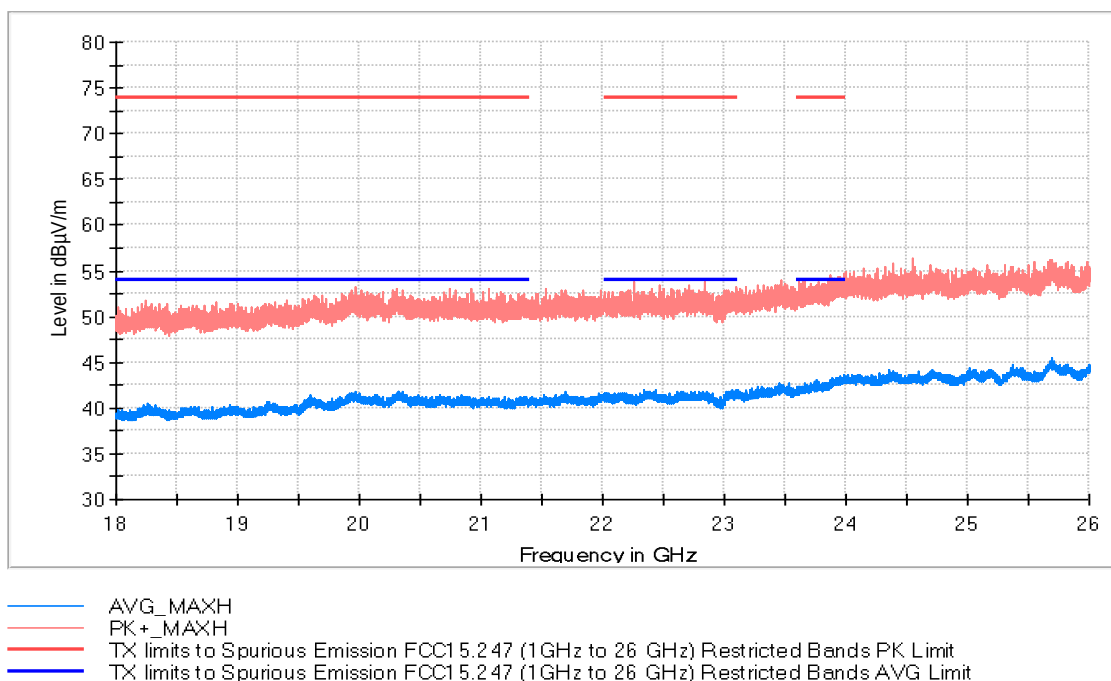

TEST RESULTS (Cont.)

2.31 GHz – 2.5 GHz


CHANNEL: Lowest (2412 MHz)

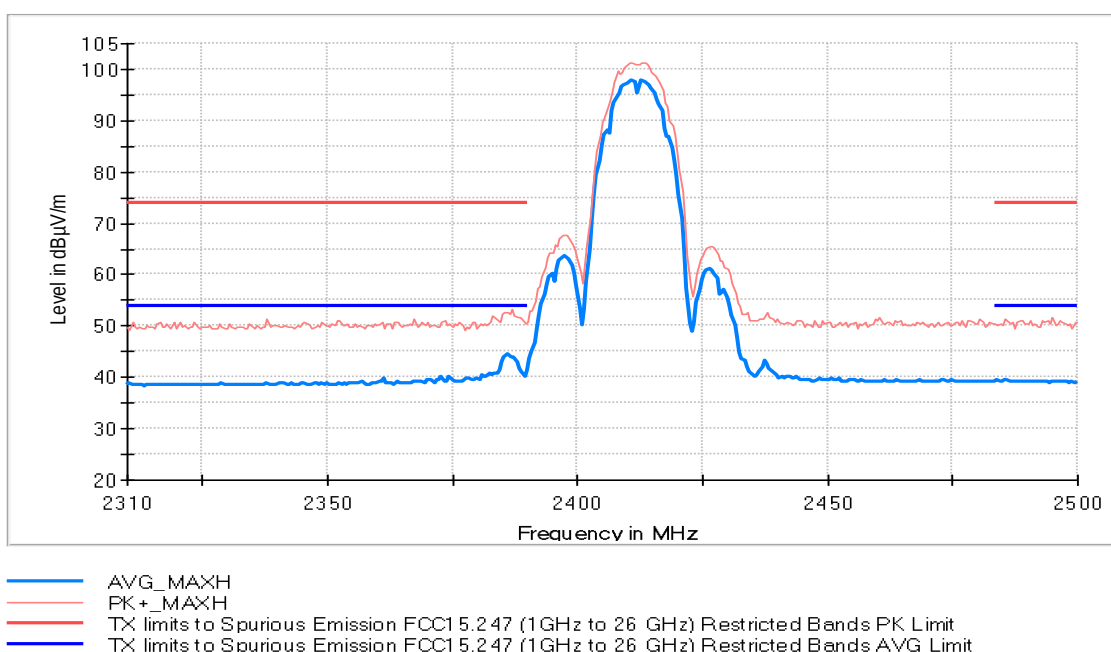

TEST RESULTS (Cont.)


2.31 GHz – 2.5 GHz

CHANNEL: Middle (2437 MHz)

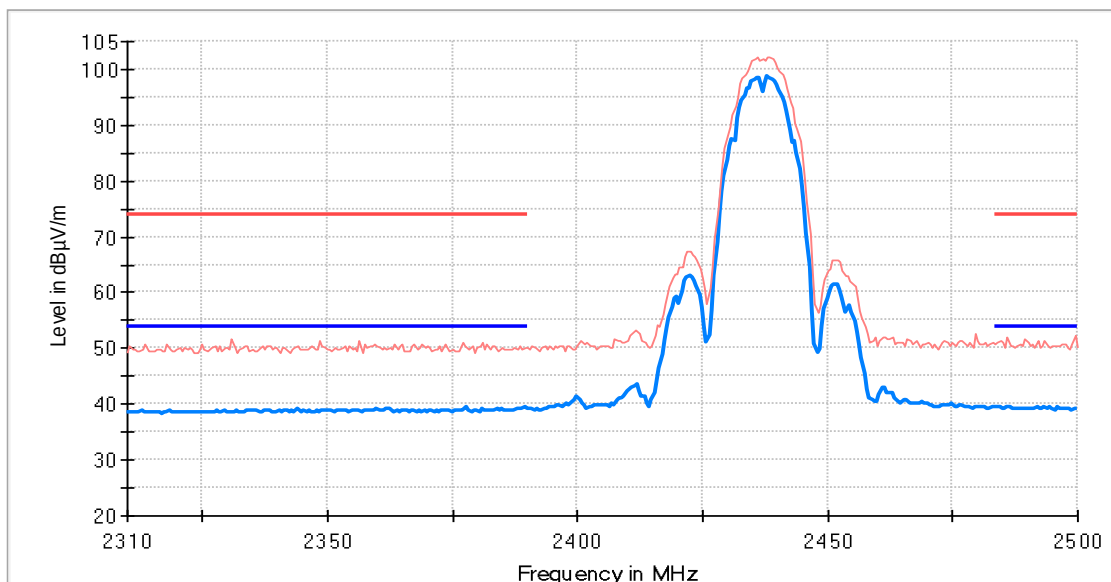

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2462 MHz).

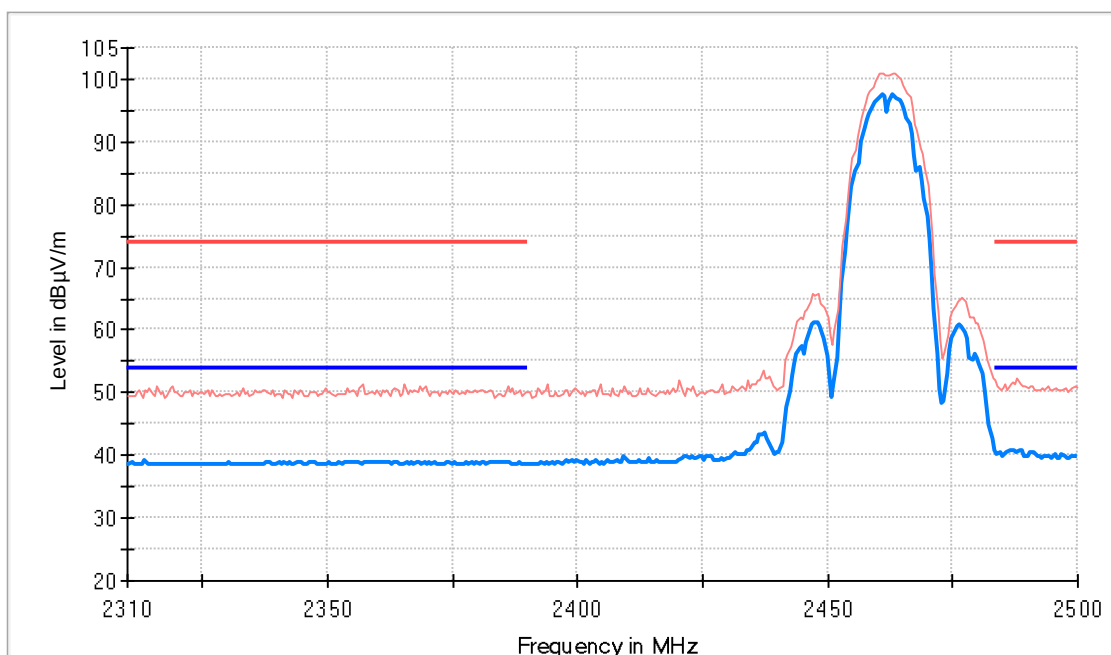

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TESTED SAMPLES:	S/03
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel and mode selected in the EUT.
The results in the following plots and tables show the maximum measured levels in the 30-1000 MHz range.

Frequency range 1 GHz – 26 GHz


The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31 - 2.39 GHz and 2.4835 - 2.5 GHz.

(see next plots).

TEST RESULTS (Cont.)	30 MHz – 1 GHz
----------------------	----------------

CHANNEL: Middle (2437 MHz).

RF_FCC_15.247_E Field_30MHz_1GHz

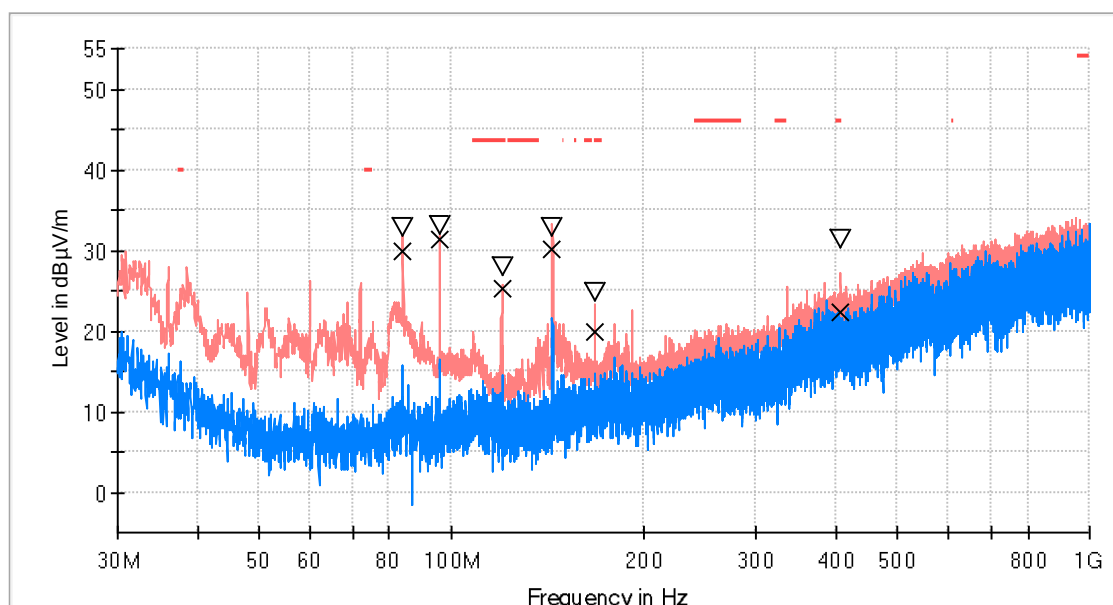

- PK+MAXH
- PK+CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ∇ MaxPeak-PK+ (Single)
- x QuasiPeak-QPK (Single)


Maximizations

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Pol	Azimuth (deg)
83.980500	32.7	30.0	V	180.0
96.008500	33.0	31.3	V	-180.0
120.016000	27.9	25.2	H	-58.0
143.975000	32.8	30.0	V	90.0
168.031000	24.8	19.9	V	-124.0
408.009000	31.4	22.3	H	-49.0

TEST RESULTS (Cont.)

1 – 18 GHz

CHANNEL: Low (2412 MHz).

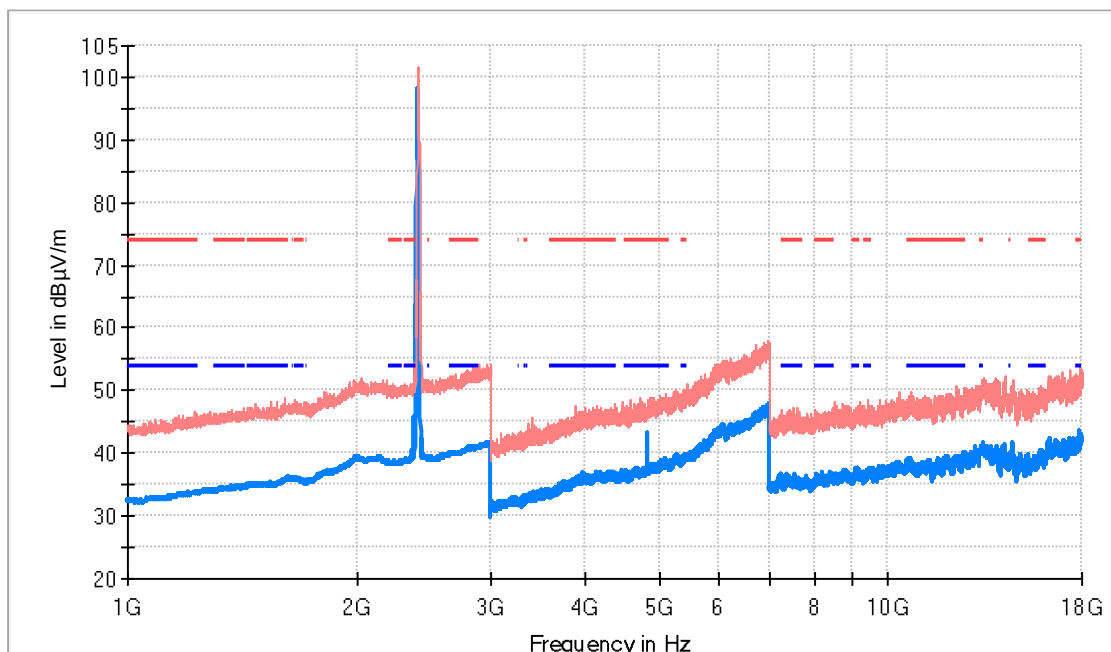

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2411.000000	101.7	98.1	H	Fundamental
4824.000000	48.3	43.1	V	

TEST RESULTS (Cont.)

1 – 18 GHz

CHANNEL: Middle (2437 MHz).

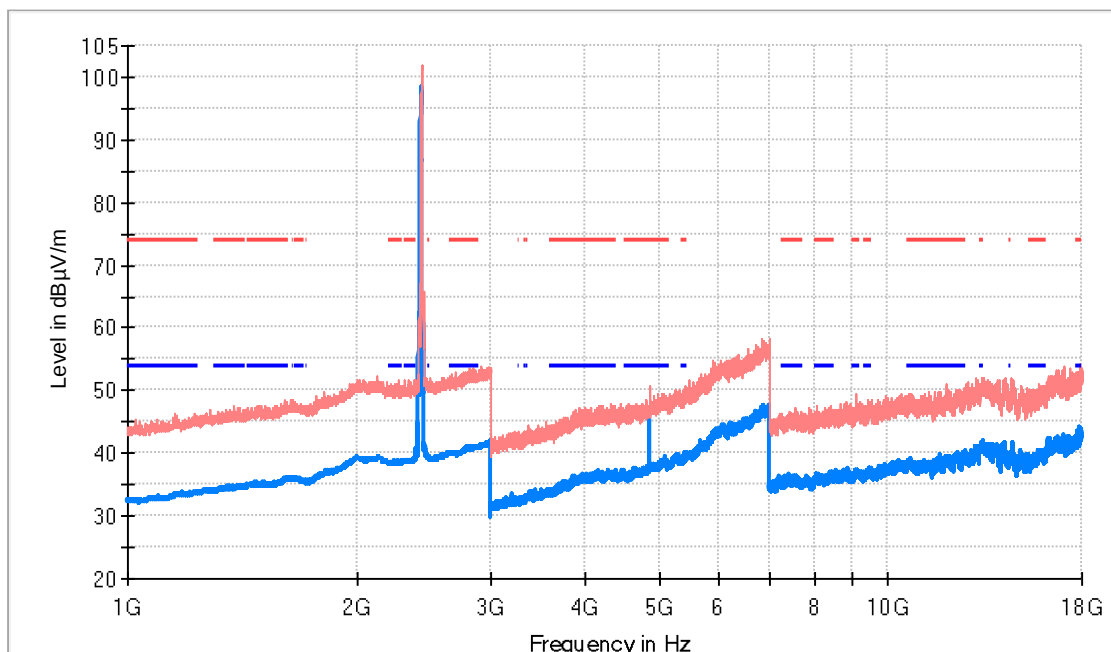

- AVG_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2438.000000	101.9	98.4	H	Fundamental
4874.000000	50.7	46.0	H	

TEST RESULTS (Cont.)

1 – 18 GHz

CHANNEL: Highest (2462 MHz).

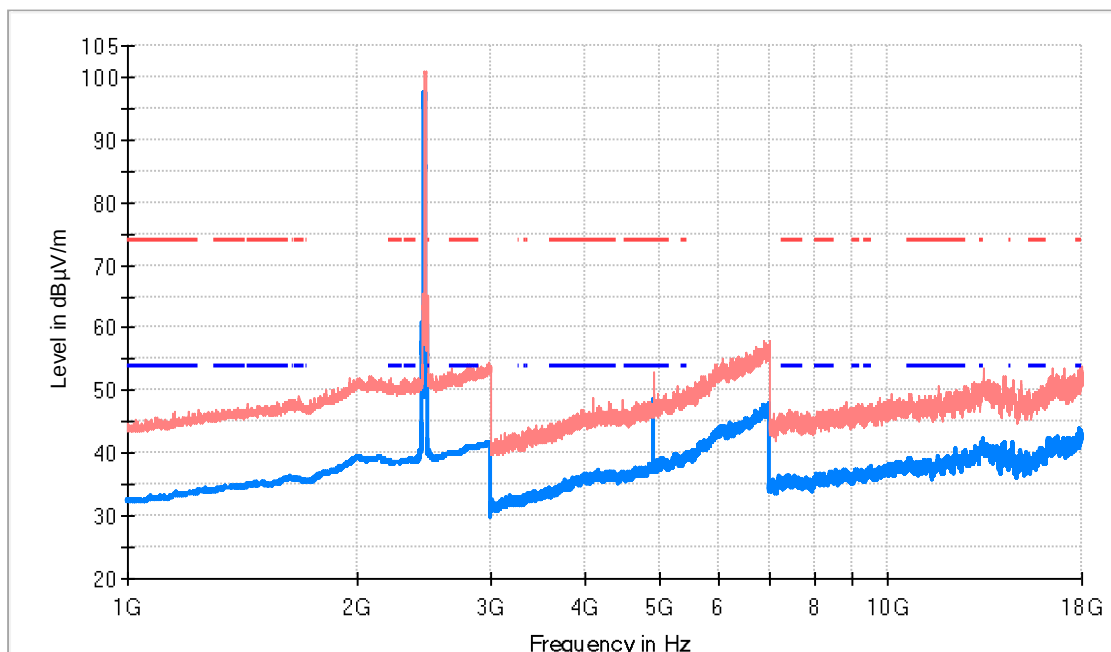

- AVG_ _MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+ _MAXH (dBµV/m)	AVG_ _MAXH (dBµV/m)	Pol	Comment
2463.000000	100.9	97.5	H	Fundamental
4924.000000	53.0	48.6	V	

TEST RESULTS (Cont.)


18 GHz – 26 GHz

CHANNEL: Lowest (2412 MHz).

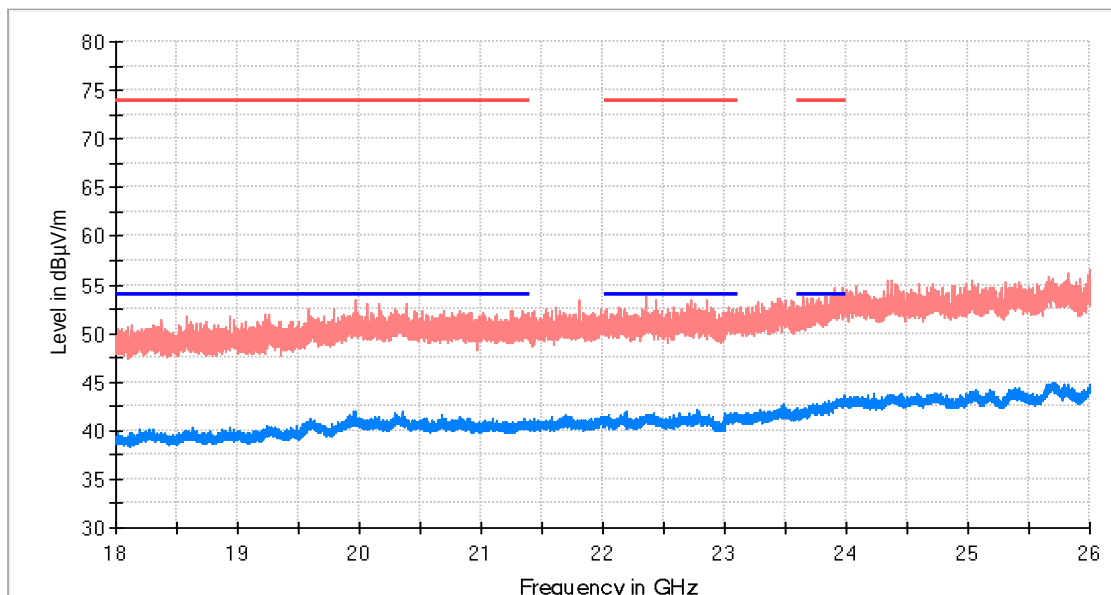

- AVG_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Middle (2437 MHz).

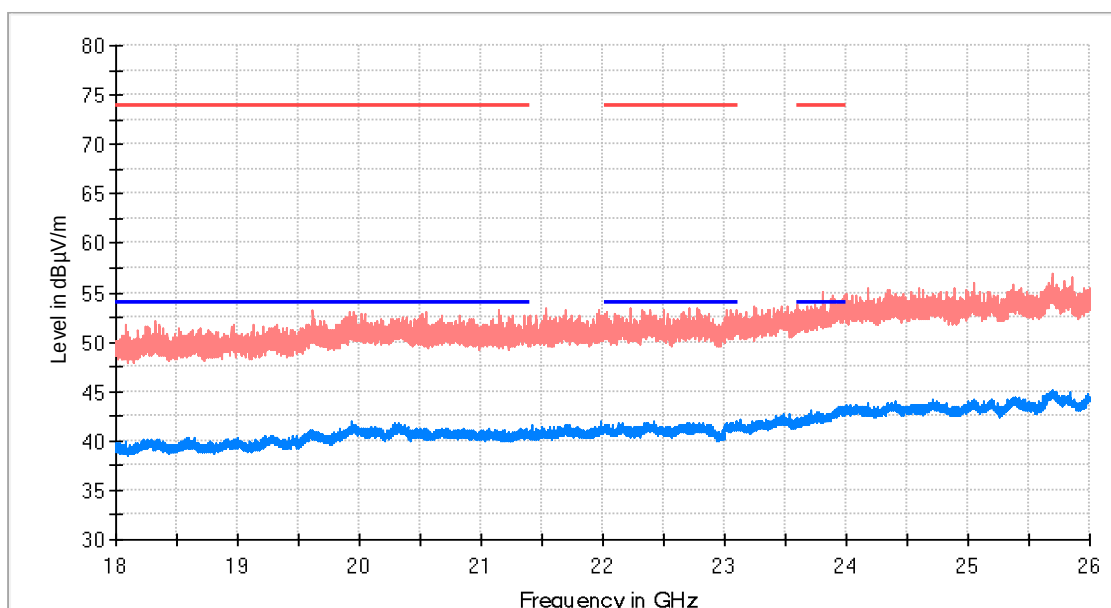


- AVG_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

18 GHz – 26 GHz

CHANNEL: Highest (2462 MHz).

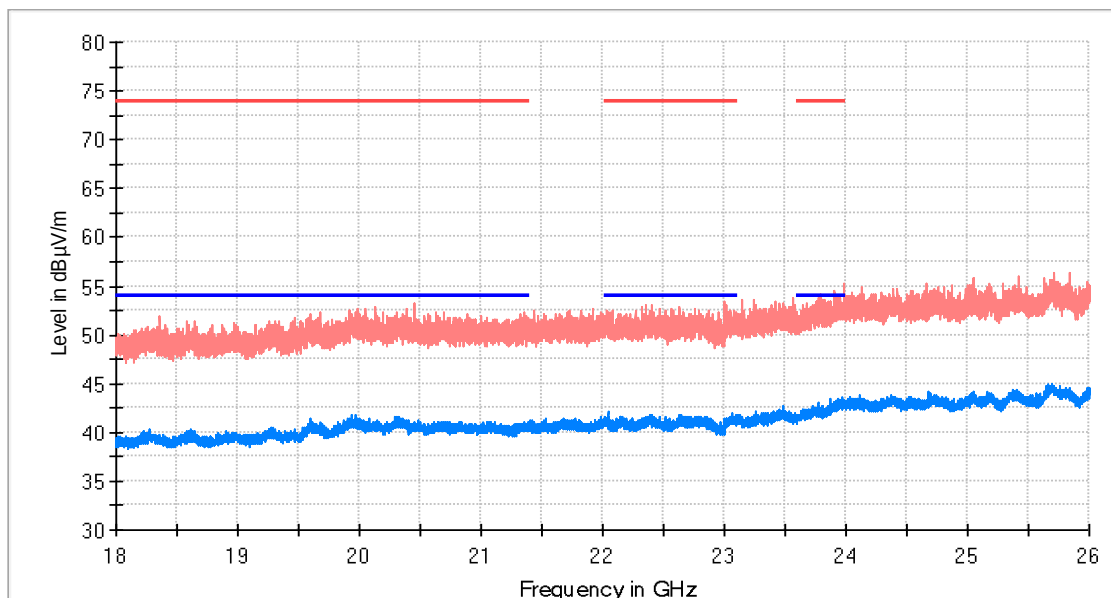


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

RESTRICTED BANDS

2.31 GHz – 2.5 GHz

CHANNEL: Lowest (2412 MHz)

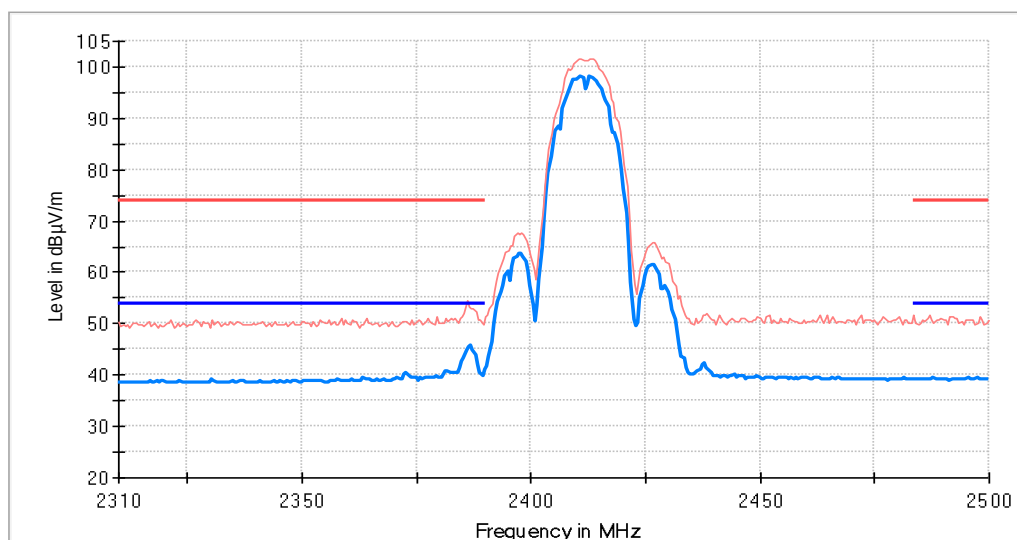


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)


2.31 GHz – 2.5 GHz

CHANNEL: Middle (2437 MHz)

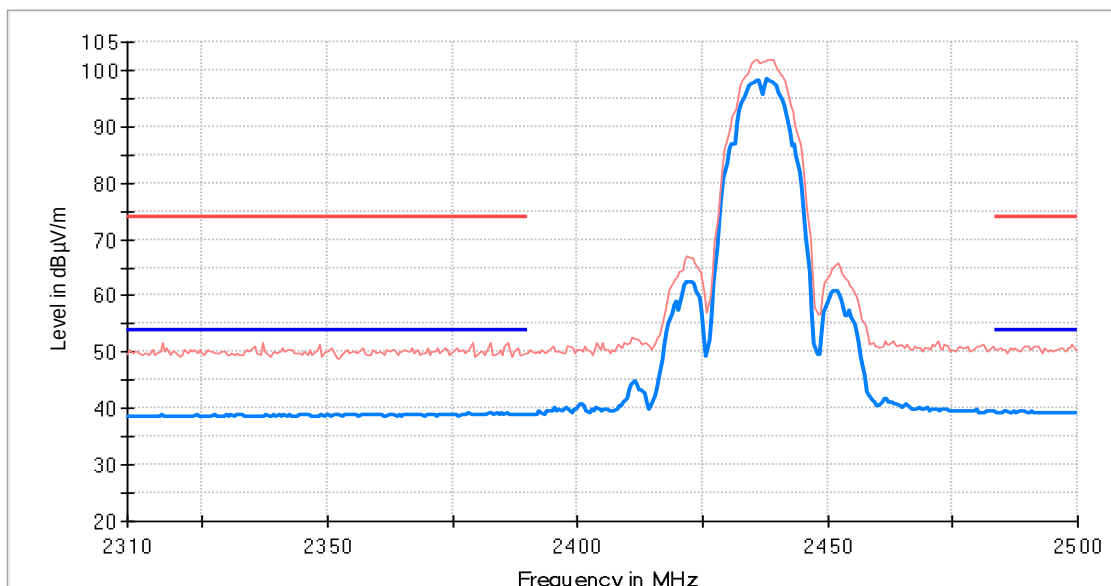

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2462 MHz)

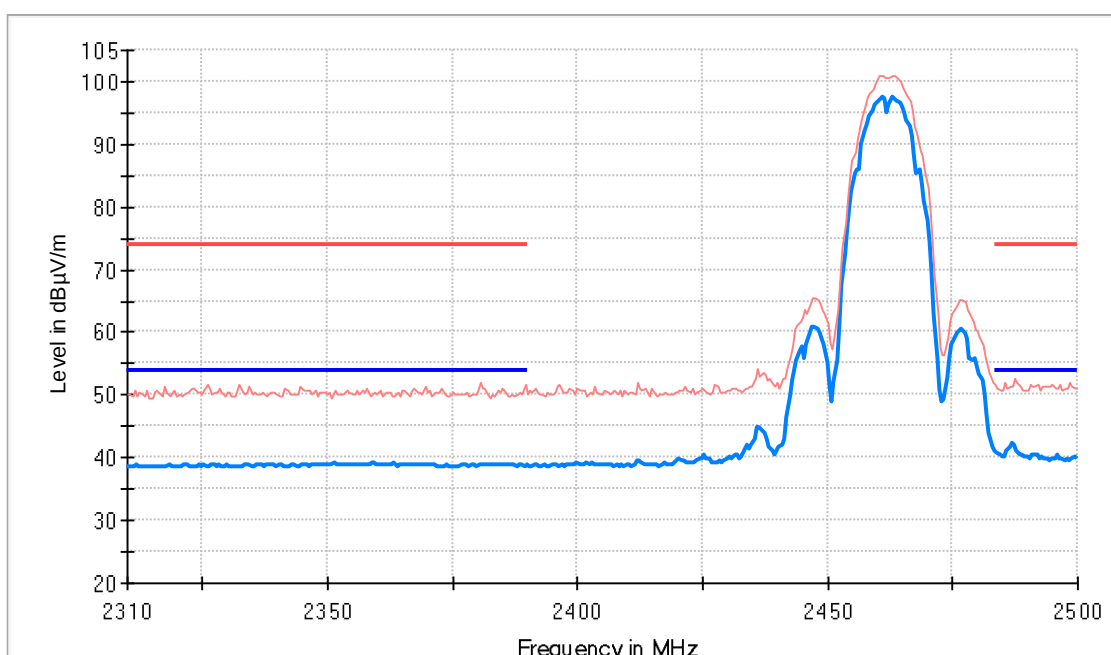

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1GHz to 26 GHz) Restricted Bands AVG Limit