單張式英文版
70磅雙交紙，W297*H210mm雙面印刷再彈簧折

折線 折線 折線

onn.

Multi-Device Keyboard and Mouse

Model: 100074483

PRODUCT GUIDE

November 25, 2021_V1

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement:
The product comply with the FCC portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Before Use

Notes:
All parts have to be unpacked and the packaging material has to be removed completely. Before use, verify the package contents are complete and undamaged.

BATTERY WARNING STATEMENT
Do not mix old and new batteries.
Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc) batteries.

Walmart Inc.,
Bentonville, AR 72716

Need help?
We're here for you every day from 7 a.m. – 9 p.m. CST.
Give us a call at 1-888-516-2630

We 'd love to hear from you.
Scan with your smartphone camera and let us know what you think.

100074483

正 面 折線 折線

System Requirements

* Windows 7/8/10/11 or newer version, Mac OS 10.5 or newer version and Chrome OS
* Available USB port or Bluetooth® on your laptop or computer

What's in the Box

1 Wireless Mouse
1 AA battery
1 Wireless Keyboard
2 AAA batteries
1 USB nano receiver

Specification

Keyboard
• Full keyboard layout with 100 keys and built-in phone/tablet stand
• Compatible with tablets up to 13 in (33 cm) long and 0.41 in (1 cm) thick
• 14.79 in L x 7.47 in W x 0.87 in H (37.5 cm x 18.9 cm x 2.2 cm)
Mouse
• 3 clickable buttons with scroll wheel and 1600 DPI sensitivity
• USB nano receiver (stores in battery compartment when not in use)
• 4.41 in L x 2.39 in W x 1.27 in H (11.2 cm x 6 cm x 3.2 cm)
Both
• 3 different wireless connection options available– 2 Bluetooth® channels and 1 2.4Ghz USB receiver
• Windows, MacOS, ChromeOS, Android, iOS compatible
• USB plug and play

Features



1. Left button
2. Right button
3. Scrolling wheel
4. LED indicator
5. USB nano receiver
6. Connect button
7. Battery cover
8. Easy-switch
9. ON / OFF switch

1



1. LED indicators
2. ON / OFF switch
3. Easy-switch keys
4. Phone/tablet stand
5. Battery cover



2



Function keys

Press F1 – F12 will perform as shortcut function keys below			
F1	Switch to wireless USB nano receiver channel	F7	Switch to previous media track
F2	Switch to Bluetooth channel 1	F8	Play media or pause current media track
F3	Switch to Bluetooth channel 2	F9	Switch to next media track
F4	Mutes (turns off) the device's sound	F10	Decrease display brightness
F5	Decrease the device's volume	F11	Increase display brightness
F6	Increase the device's volume	F12	Open Windows Search

Press and hold Fn + F1 – F12 will perform as standard function keys

3

Installing the batteries

Insert the battery with the correct position according to the instruction labeled on the mouse and keyboard





4

折線 折線 折線

折線 折線 折線

Switch Connection Channel

The mouse and keyboard can both connect up to 3 different computers, you can change connection channels between USB nano receiver and 2 other Bluetooth channels

Mouse
Use "Easy-switch" on the bottom to change connection channels

Keyboard
Use "Easy-switch keys" to change connection channels

The corresponding LED indicator will light up green when its channel is set
For example, when you press Bluetooth 1 (⁑1) its LED indicator will light up

Switch between different devices
For example, you can set
USB nano receiver ( ) on computer A
Bluetooth 1 (⁑1) on computer B
Bluetooth 2 (⁑2) on computer C
then use "Easy-switch and Easy-switch keys" to switch connection between these 3 computers



5

Connection Setup

Connect via USB nano receiver
It is plug and play with USB nano receiver, make sure to turn on power and set **both mouse and keyboard** connection channels on USB nano receiver ( ), plug USB nano receiver into an available USB A port on your computer and start surfing onn.

Connect via Bluetooth in Windows
Turn on your mouse and keyboard, set them to either Bluetooth 1 (⁑1) or Bluetooth 2 (⁑2)
Click on "Start" (bottom left corner on your screen)
Go to Settings
-> Device -> Bluetooth & other devices -> Turn on Bluetooth
-> Add Bluetooth or other device -> Add a device (Bluetooth)

Mouse
Press and HOLD "Connect" button to set mouse in Bluetooth pairing mode

Click on "BT5.1 Mouse or onn. Mouse" in the list on your computer to setup pairing, LED will stop flashing and light up for 3 seconds when complete

LED indicator underneath will start flashing green in pairing mode

Keyboard
Press and HOLD "Easy-switch keys" to set keyboard in Bluetooth pairing mode

The corresponding LED indicator will start flashing green in pairing mode, Click on "BT Keyboard or onn. KBD" in the list on your computer to setup pairing, LEDwill stop flashing and light up for 3 seconds when complete

6

7

8

折線 折線 折線

反 面 折線 折線

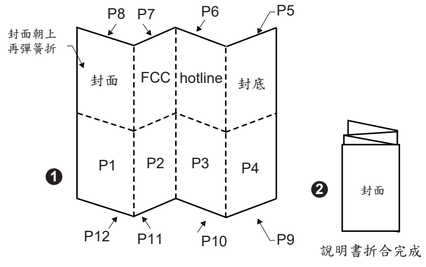

Connect via Bluetooth in Mac
Turn on your mouse and keyboard, set them to either Bluetooth 1 (⁑1) or Bluetooth 2 (⁑2)

Click on "Apple menu" (top left corner of your screen)
Go to System Preferences
-> Bluetooth
-> Turn Bluetooth on to set up Bluetooth device

Follow same steps as **Connect via Bluetooth in Windows** to set mouse and keyboard in pairing mode and complete Bluetooth pairing



9

OS - Manual Selection

fn + I = **iPhone OS Mac OS**

fn + P = **Windows OS Android™ Chrome OS™**

Keyboard will automatically detect your Operating System (OS) providing correct functions and shortcuts. To do this manually, select the proper OS by using the key combination above

10

Low Battery

If LED starts blinking, you need to change battery



Help with Setup

USB nano receiver
Mouse and keyboard are not working?
1. Are they powered on? Make sure both channels are set on ( )
2. Is the nano receiver securely plugged into a USB port? Try changing USB ports
3. If the nano receiver is plugged into a USB hub, try plugging it directly into a USB port on your computer
4. Check the orientation of the batterries inside
5. Try a different surface. Remove metallic objects between the mouse (keyboard) and the nano receiver

If it is still not working, try steps below to re-pair them with the nano receiver

Mouse
A. Re-plug receiver into USB port on computer, make sure channel is set on ( )
B. Press connect button on mouse (keep mouse close to receiver)
C. If it does not work after 10 seconds, repeat steps A and B



11

Keyboard
A. Re-plug receiver into USB port on computer, make sure channel is set on ( )
B. Press and hold "Easy-switch key" (keep keyboard close to receiver)
C. If it does not work after 10 seconds, repeat steps A and B



Press and hold this key until the corresponding LED indicator starts flashing green

Bluetooth®
Mouse and keyboard are not working?
1. Are they powered on? Make sure both channels are set on (⁑1 or ⁑2)
   Make sure to turn on Bluetooth function on your computer
2. Check the orientation of the batterries inside
3. Try a different surface. Remove metallic objects between them and the computer
4. Set them in pairing mode, make sure they are discoverable on your computer and then complete pairing
5. If it does not work after 10 seconds, repeat step 1 to 3

Reconnection
Under Bluetooth connection (either Bluetooth 1 or 2)
mouse and keyboard can automatically reconnect to their last connected computer. If it fails, you can always re-pair again

12

折線 折線 折線

Project Name: 100074483(KV7+B2F_2.4G-BT Wireless Mouse keyboard combo) for WMUSA-onn Manual(QR code)_Outline_20211126.ai		
REV. A	印刷順序：印單色，*雙面印刷再彈簧折	PROCESS COLORS
DATE: 2021.11.26	紙　　質：雙交紙，70磅	K
比例1:1 —— 裁切線 ----- 折線	尺　　寸： 未折合前-寬297mm x 長210mm 折合後-寬74.25mm x 長105mm	
簽　核：		製作者：Megan