

## Copyright & Trademark Information

Fujitsu Computer Systems Corporation has made every effort to ensure the accuracy and completeness of this document. However, as ongoing development efforts are continually improving the capabilities of our products, we cannot guarantee the accuracy of the contents of this document. We disclaim liability for errors, omissions, or future changes.

Fujitsu, the Fujitsu logo, and LifeBook are registered trademarks of Fujitsu Limited.

MS, MS-DOS, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

PCMCIA is a trademark of the Personal Computer Memory Card International Association.

Intel and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Adobe, Acrobat, and Acrobat Reader are either a registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

All other trademarks mentioned herein are the property of their respective owners.

© Copyright 2004 Fujitsu Computer Systems Corporation. All rights reserved. No part of this publication may be copied, reproduced, or translated, without prior written consent of Fujitsu Computer Systems Corporation. No part of this publication may be stored or transmitted in any electronic form without the written consent of Fujitsu Computer Systems Corporation.

B6FH-3071-01EN-00

---

---

### Warning



Handling the cord on this product or cords associated with accessories sold with this product, will expose you to lead, a chemical known to the State of California to cause birth defects or other reproductive harm.

**Wash hands after handling.**

---

---



### DECLARATION OF CONFORMITY

according to FCC Part 15

Responsible Party Name: Fujitsu Computer Systems Corporation

Address: 1250 E. Arques Avenue, MS 122  
Sunnyvale, CA 94085

Telephone: (408) 746-6000

Declares that product: Model Configuration:  
LifeBook T4010 Tablet PC  
LifeBook T4010D Tablet PC

Complies with Part 15 of the FCC Rules.

This device complies with Part 15 of the FCC rules. Operations are subject to the following two conditions:

(1) This device must not be allowed to cause harmful interference, (2) This device must accept any interference received, including interference that may cause undesired operation.



*LifeBook T Series Tablet PC*



# Fujitsu LifeBook® T Series Tablet PC

## Table of Contents

## 1

### PREFACE

#### Preface

|                                       |   |
|---------------------------------------|---|
| About This Guide . . . . .            | 3 |
| Fujitsu Contact Information . . . . . | 3 |
| Warranty . . . . .                    | 3 |

## 2

### GETTING TO KNOW YOUR TABLET PC

#### Overview

|                                |   |
|--------------------------------|---|
| Unpacking . . . . .            | 7 |
| Optional Accessories . . . . . | 8 |

#### Locating the Controls and Connectors

|                                       |    |
|---------------------------------------|----|
| Top and Front Components . . . . .    | 10 |
| Left-Side Panel Components . . . . .  | 11 |
| Right-Side Panel Components . . . . . | 12 |
| Rear Panel Components . . . . .       | 13 |
| Bottom Components . . . . .           | 14 |

#### Status Indicator Panel

|                                       |    |
|---------------------------------------|----|
| Power Indicator . . . . .             | 15 |
| AC Adapter Indicator . . . . .        | 15 |
| Battery Level Indicators . . . . .    | 15 |
| Battery Charging Indicator . . . . .  | 16 |
| Hard Drive Access Indicator . . . . . | 16 |
| NumLk Indicator . . . . .             | 16 |
| CapsLock Indicator . . . . .          | 16 |
| ScrLk Indicator . . . . .             | 16 |
| Security Indicator . . . . .          | 16 |

#### Display Panel

|                                              |    |
|----------------------------------------------|----|
| Opening the Display Panel . . . . .          | 17 |
| Using the System as a Tablet . . . . .       | 17 |
| Adjusting Display Panel Brightness . . . . . | 18 |

#### Keyboard

|                              |    |
|------------------------------|----|
| Using the Keyboard . . . . . | 19 |
| Numeric Keypad . . . . .     | 19 |
| Windows Keys . . . . .       | 19 |
| Cursor Keys . . . . .        | 20 |
| Function Keys . . . . .      | 20 |

#### LifeBook Security/Tablet PC Buttons

|                                                       |    |
|-------------------------------------------------------|----|
| Changing Tablet PC Button Functions . . . . .         | 22 |
| Setting up LifeBook Security Panel . . . . .          | 22 |
| Passwords . . . . .                                   | 22 |
| Using Your LifeBook Security Panel . . . . .          | 23 |
| Precautions . . . . .                                 | 23 |
| Uninstalling the Security Panel Application . . . . . | 24 |

#### Touchpad Pointing Device

|                                       |    |
|---------------------------------------|----|
| Clicking . . . . .                    | 25 |
| Double-Clicking . . . . .             | 25 |
| Dragging . . . . .                    | 26 |
| Scrolling . . . . .                   | 26 |
| Touchpad Control Adjustment . . . . . | 26 |

#### Pen and Active Digitizer

|                                      |    |
|--------------------------------------|----|
| Using the Pen . . . . .              | 27 |
| Calibrating the Pen . . . . .        | 27 |
| Replacing the Pen Tip . . . . .      | 28 |
| Using the Active Digitizer . . . . . | 28 |

#### Volume Control

|                                  |    |
|----------------------------------|----|
| Controlling the Volume . . . . . | 29 |
|----------------------------------|----|

## 3

### USING YOUR TABLET PC

#### Power Sources

Connecting the Power Adapters. . . . . 33

#### Starting Your Tablet PC

Power On . . . . . 34

Boot Sequence . . . . . 34

BIOS Setup Utility . . . . . 34

Booting the System . . . . . 35

Activating Additional Utilities . . . . . 35

Registering Your LifeBook T Series Tablet PC . . . 35

#### Power Management

Suspend/Resume Button . . . . . 36

Standby Mode . . . . . 36

Hibernate Mode. . . . . 37

Display Timeout. . . . . 37

Hard Disk Timeout. . . . . 37

Windows Power Management. . . . . 37

Restarting the System. . . . . 37

Power Off . . . . . 38

## 4

### USER-INSTALLABLE FEATURES

#### Lithium ion Battery

Recharging the Battery. . . . . 41

Replacing the Battery . . . . . 42

#### Memory Upgrade Module

Installing Memory Upgrade Modules . . . . . 43

To Remove a Memory Upgrade Module . . . . . 43

Checking the Memory Capacity . . . . . 44

#### PC Cards

Installing PC Cards . . . . . 45

Removing PC Cards . . . . . 45

Smart Card Reader. . . . . 45

#### Port Replicator

Rear Panel Components. . . . . 46

Front Panel Components . . . . . 47

Attaching the Port Replicator . . . . . 47

Detaching the Port Replicator . . . . . 47

#### Device Ports

Modem (RJ-11) Jack . . . . . 48

Internal LAN (RJ-45) jack. . . . . 48

Docking Port . . . . . 48

Universal Serial Bus Ports . . . . . 48

Infrared Port . . . . . 48

Microphone Jack . . . . . 49

Headphone Jack . . . . . 49

External Monitor Port . . . . . 49

## 5

### TROUBLESHOOTING

#### Troubleshooting

Identifying the Problem . . . . . 53

Specific Problems. . . . . 53

Troubleshooting Table . . . . . 54

Power On Self Test Messages . . . . . 61

Modem Result Codes. . . . . 62

#### Restoring Your Software

Drive Image Special Edition (DISE) . . . . . 63

## 6

### CARING FOR YOUR TABLET PC

#### Care and Maintenance

Keyboard. . . . . 68

Batteries. . . . . 68

Optional Floppy Disk Drive and Floppy Disks. . . 68

Optional CD Drive and CDs. . . . . 68

PC Cards . . . . . 69

## 7 SPECIFICATIONS

### Specifications

|                                          |    |
|------------------------------------------|----|
| Configuration Label . . . . .            | 73 |
| Physical Specifications . . . . .        | 73 |
| Processing Specifications . . . . .      | 73 |
| Memory/Storage Specifications . . . . .  | 73 |
| Display Specifications . . . . .         | 73 |
| Interface Specifications . . . . .       | 73 |
| Power Specifications . . . . .           | 74 |
| Environmental Specifications . . . . .   | 74 |
| Agency Approval Specifications . . . . . | 74 |
| Additional Specifications . . . . .      | 74 |
| Regulatory Information . . . . .         | 75 |

## 8 GLOSSARY

|                    |    |
|--------------------|----|
| Glossary . . . . . | 81 |
|--------------------|----|

## APPENDIX: INTEGRATED WIRELESS LAN USER'S GUIDE

### Before Using the Wireless LAN

|                                                |    |
|------------------------------------------------|----|
| Wireless LAN Modes Using this Device . . . . . | 90 |
| Wireless Network Considerations . . . . .      | 91 |
| Deactivating the WLAN Device . . . . .         | 92 |
| Activating the WLAN Device . . . . .           | 92 |

### Configuration of the WLAN Device

|                                                                   |    |
|-------------------------------------------------------------------|----|
| Flow of Operations . . . . .                                      | 93 |
| Configuration Using Wireless<br>Zero Configuration Tool . . . . . | 93 |
| Configuration Using Intel PROSet Software . . . .                 | 94 |
| Configuration Using Atheros<br>Client Utility Software . . . . .  | 95 |
| Connection to the network . . . . .                               | 97 |

### Troubleshooting the WLAN

|                           |     |
|---------------------------|-----|
| Troubleshooting . . . . . | 101 |
|---------------------------|-----|

### Wireless LAN Glossary

|                    |     |
|--------------------|-----|
| Glossary . . . . . | 102 |
|--------------------|-----|

### IP address information

|                                  |     |
|----------------------------------|-----|
| Additional Information . . . . . | 103 |
|----------------------------------|-----|

### WLAN Specifications

|                         |     |
|-------------------------|-----|
| Specification . . . . . | 104 |
|-------------------------|-----|

### Using the Bluetooth Device

|                                               |     |
|-----------------------------------------------|-----|
| What is Bluetooth . . . . .                   | 109 |
| Where to Find Information About Bluetooth . . | 109 |





*LifeBook T Series Tablet PC*






# 1

## Preface





*LifeBook T Series Tablet PC*



# Preface

## ABOUT THIS GUIDE

The LifeBook® T Series Tablet PC from Fujitsu Computer Systems Corporation is a powerful convertible computer. It can be used either as a standard notebook using keyboard input, or in tablet configuration using pen input. It is powered by an Intel® microprocessor, has a built-in color display with an active digitizer, and brings the computing power of desktop personal computers (PCs) to a portable and versatile environment.

This manual explains how to operate your LifeBook T Series Tablet PC's hardware and built-in system software. Your LifeBook T Series Tablet PC comes with Windows® XP Tablet Edition pre-installed.

Your LifeBook T Series Tablet PC is a completely self-contained unit with an active-matrix (TFT) color LCD display. The display has a wide viewing angle and can be used indoors or outdoors. The tablet has a powerful interface that enables it to support a variety of optional features.

## Conventions Used in the Guide

Keyboard keys appear in brackets.

Example: [Fn], [F1], [Esc], [Enter] and [Ctrl].

Pages with additional information about a specific topic are cross-referenced within the text.

Example: (See page xx.)

On screen buttons or menu items appear in bold.

Example: Click **OK** to restart your Tablet PC.

DOS commands you enter appear in Courier type.

Example: Shutdown the computer?



The information icon highlights information that will enhance your understanding of the subject material.



The caution icon highlights information that is important to the safe operation of your computer, or to the integrity of your files. Please read all caution information carefully.



The warning icon highlights information that can be hazardous to either you, your system, or your files. Please read all warning information carefully.

## FUJITSU CONTACT INFORMATION

### Service and Support

You can contact Fujitsu Computer Systems Service and Support the following ways:

- Toll free: 1-800-8Fujitsu (1-800-838-5487)
- Fax: 1-408-764-2724
- E-mail: 8fujitsu@us.fujitsu.com
- Web site: <http://us.fujitsu.com/computers>

Before you place the call, you should have the following information ready so that the customer support representative can provide you with the fastest possible solution:

- Product name
- Product configuration number
- Product serial number
- Purchase date
- Conditions under which the problem occurred
- Any error messages that have occurred
- Type of device connected, if any

### Fujitsu Online

You can go directly to the online Fujitsu Product catalog for your Tablet PC. Go to Start -> All Programs -> Service & Support Software, and click on Pen Accessories Web site.

You can also reach Fujitsu Service and Support online by going to Start -> All Programs -> Service & Support Software, and clicking on Fujitsu Service & Support Web site.



You must have an active internet connection to use the online URL links.

## WARRANTY

Your LifeBook T Series Tablet PC is backed by an International Limited Warranty and includes toll-free technical support. Check the service kit that came with your Tablet PC for warranty terms and conditions.



*LifeBook T Series Tablet PC - Preface*



# 2

## Getting to Know Your Tablet PC



*LifeBook T Series Tablet PC*



TBD - NEW GRAPHIC



Figure 2-1. Fujitsu LifeBook T Series Tablet PC

## Overview

This section describes the components of your Fujitsu LifeBook T Series Tablet PC. We strongly recommend that you read it before using your Tablet PC, even if you are already familiar with mobile computers.

### UNPACKING

When you receive your LifeBook T Series Tablet PC, unpack it carefully, and compare the parts you have received with the items listed below.

For a pre-configured model you should have:

- LifeBook T Series Tablet PC (Figure 2-1)
- AC adapter with AC power cord (Figure 2-2)
- Phone/Modem (RJ-11) telephone cable
- Pen
- Driver and Application Restore (DAR) CD
- Getting Started Guide
- User's Guide (this document)
- International Limited Warranty Booklet
- Certificate of Authenticity
- Lithium ion battery (pre-installed)

You may also have one or more of the following optional devices in the box:

- Port Replicator (Figure 2-3)
- External USB Floppy Disk Drive

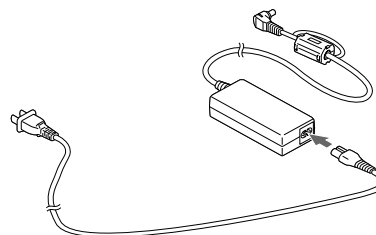


Figure 2-2. AC Adapter



Figure 2-3. Optional Port Replicator

## LifeBook T Series Tablet PC - Section 2

**OPTIONAL ACCESSORIES - TBD ALL**

The following optional accessories can be used with the LifeBook T Series Tablet PC. Refer to the instructions provided with these accessories for details on their use. For the latest list of accessories available for your LifeBook T Series Tablet PC, be sure to frequently check the Fujitsu Web site at: [us.fujitsu.com/computers](http://us.fujitsu.com/computers).

| Peripheral/Accessory                        | Fujitsu Part Number |
|---------------------------------------------|---------------------|
| <b>Docking Options</b>                      |                     |
| LifeBook T Series Tablet PC port replicator | FPCPR39AP           |
| <b>Carrying Cases</b>                       |                     |
| Duo Travel Bag                              | FPCCC16             |
| Director leather carrying case              | FPCCC22             |
| Diplomat carrying case                      | FPCCC02             |
| Propak backpack                             | FPCCC07             |
| <b>Storage Options</b>                      |                     |
| External USB floppy disk drive              | FPCFDD12            |
| External DVD/CD-RW combo drive              | FPCDVR26            |
| External CD-ROM drive                       | FPCCD33AP           |
| <b>Memory</b>                               |                     |
| 256 MB SDRAM, DDR266                        | FPCEM51AP           |
| 512 MB SDRAM, DDR 266                       | FPCEM55AP           |
| 1.0 GB SDRAM, DDR 266                       | FPCEM87AP           |
| 128 MB Compact Flash card                   | FPCEMC02            |
| 256 MB Compact Flash card                   | FPCEMC03            |
| 128 MB Secure Digital memory card           | FPCEMC01            |
| <b>Power Options</b>                        |                     |
| AC Adapter with US cord                     | FPCAC23             |
| Main battery                                | FPCBP73AP           |
| Auto/airline adapter                        | FPCAA02             |
| Battery charger                             | FPCBC06             |
| <b>Input Accessories</b>                    |                     |
| Replacement pen set (2-pack)                | FPCPN11AP           |
| USB optical mouse                           | FPCMO08AP           |
| <b>Additional Accessories</b>               |                     |
| Smart Card holder                           | FPCSCH01            |
| 4-in-1 PC Card Adapter                      | FPCPCC01            |
| Compact Flash card adapter                  | FPCCFA01            |
| Notebook Guardian Lock                      | FPCLCK02            |
| USB 2.0 and FireWire CardBus DV Kit         | FPCPCC02            |

Table 2-1. Optional Accessories for LifeBook T Series Tablet PC

## Locating the Controls and Connectors

Connectors and peripheral interfaces on the LifeBook T Series Tablet PC and the optional port replicator allow you to connect a variety of devices. Specific locations are illustrated in Figures 2-4 through 2-8. The table below

provides a short description of each icon on the LifeBook T Series Tablet PC. Each of the icons is either molded into or printed on the Tablet PC chassis.

| Connection            | Tablet PC Icon                                                                      | Purpose                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC in connector       |    | Connect an external power source such as the AC adapter or auto/airline adapter.                                                                                                                                                                                                                                                                                      |
| SD/Memory Stick Slot  |    | The Secure Digital (SD) card/Memory Stick slot allows you to install a flash memory card for data storage. Flash memory cards allow you to transfer data to and from a variety of different digital devices.                                                                                                                                                          |
| Smart Card Slot       | <b>tbd</b>                                                                          | The dedicated Smart Card slot allows you to install a Smart Card on which you can store such data as medical information or electronic "cash".                                                                                                                                                                                                                        |
| USB Port              |    | Connect Universal Serial Bus 2.0 or 1.1 compliant devices to the Tablet PC.                                                                                                                                                                                                                                                                                           |
| PCMCIA Card slot      |   | Install Type I, Type II, or Type III PC Cards.                                                                                                                                                                                                                                                                                                                        |
| Microphone jack       |  | Connect an external microphone. The internal microphone is disabled when you plug in an external microphone.                                                                                                                                                                                                                                                          |
| Headphone jack        |  | Connect stereo headphones or powered external speakers. The internal speaker is disabled when you plug in external headphones or powered speakers.                                                                                                                                                                                                                    |
| IrDA/FIR port         |  | An infrared transceiver built into the Tablet PC allows you to communicate with other devices that are compliant with IrDA Standard Rev. 1.1. Effective range for infrared communication is about 3 feet, and within 15 degrees off center. A clear line-of-sight path must exist between the IrDA port on the computer and the IrDA transceiver on the other device. |
| Modem                 |  | Connect a telephone line to the internal modem using a standard RJ-11 telephone plug.                                                                                                                                                                                                                                                                                 |
| Tablet Dock port      |  | Connect the Tablet PC port replicator or other approved docking device. Refer to documentation accompanying the dock for more information.                                                                                                                                                                                                                            |
| Security lock slot    |  | The security slot allows you to secure the Tablet PC using Kensington-compatible locking devices.                                                                                                                                                                                                                                                                     |
| Suspend/Resume button |  | The Suspend/Resume button allows you to suspend Tablet PC activity without powering off, resume your Tablet PC from suspend mode, and power on the system when it has been shut down from Windows.                                                                                                                                                                    |

**LifeBook T Series Tablet PC - Section 2**

| Connection                 | Tablet PC Icon                                                                    | Purpose                                                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Local Area Network (LAN)   |  | The LAN (RJ-45) jack is used to connect the internal Fast Ethernet (10/100 Base-T/TX) to a Local Area Network (LAN) in your office or home, or broadband devices such as a cable modem, DSL, or satellite Internet. |
| Battery Release Latch      |  | The battery release latch allows you to remove the battery from your system for storage or replacement.                                                                                                             |
| Wireless LAN On-Off Switch |  | The wireless LAN switch allows you to turn power to the optional wireless LAN device on and off.                                                                                                                    |
| Display Rotation           |  | This icon indicates the direction in which the display should be rotated when converting to tablet mode.                                                                                                            |

**Table 2-2. System icons**

## Getting to Know Your Tablet PC

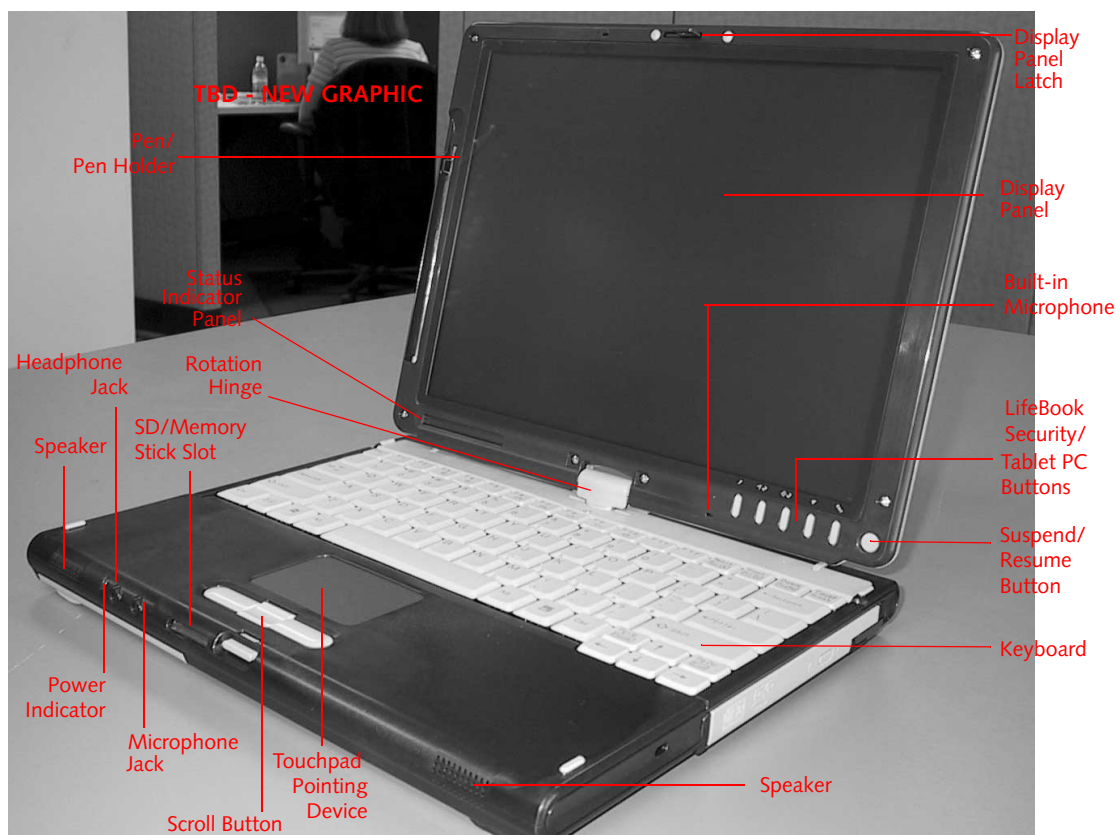


Figure 2-4. LifeBook T Series Tablet PC with display open

**TOP AND FRONT COMPONENTS**

The following is a brief description of the top and front features of the LifeBook T Series Tablet PC. (Figure 2-4)

**Pen/Pen Holder**

The pen is used as the interface with the active digitizer display.

**Built-in Microphone**

The built-in microphone allows you to input mono audio.

**Display Panel Latch**

The display panel latch locks and releases the display panel.

**Power Indicator**

The power indicator **TBD**

**Status Indicator Panel**

The Status Indicator Panel displays symbols that correspond to specific components of your LifeBook T Series Tablet PC. See "Status Indicator Panel" on page 15.

**LifeBook Security/Tablet PC Buttons**

The LifeBook T Series Tablet PC Security/Tablet PC Buttons provide hardware security and application launch capabilities. See "LifeBook Security/ Tablet PC Buttons" on page 21.

**Touchpad Pointing Device**

The Touchpad pointing device consists of two mouse-like buttons and one scroll button. See "Touchpad Pointing Device" on page 25.

**Keyboard**

A full-function keyboard with dedicated Windows keys. See "Keyboard" on page 19.

**SD Card/Memory Stick**

The Secure Digital (SD) card/Memory Stick slot allows you to install a flash memory card for data storage. Flash memory cards allow you to transfer data to and from a variety of different digital devices.

**Display Panel**

The display panel is a color LCD panel with back lighting for the display of text and graphics and active digitizer functionality.

---

*LifeBook T Series Tablet PC - Section 2***Dual Speakers**

The dual speakers allow you to listen to stereo sound from your system.

**Suspend/Resume Button**

The Suspend/Resume button allows you to suspend Tablet PC activity without powering off, resume your Tablet PC from standby mode, and power on your system when it has been shut down from the Windows operating system. See “Power On” on page 34.

**Rotation Hinge**

The rotation hinge allows you to transform your Tablet PC from a notebook configuration into a tablet configuration. For more information, see See “Using the System as a Tablet” on page 17.

**Headphone Jack**

The headphone jack allows you to connect headphones or powered external speakers. See “Headphone Jack” on page 53.

**Microphone Jack**

The microphone jack allows you to connect an external mono microphone. See “Microphone Jack” on page 53.