

---

## >>> 2.2 Removing the UB11B (MS-6823)

The UB11B (MS-6823) supports hot-plug function, so that you can remove it under Windows operating system without shutting down the system.



***DO NOT*** remove the UB11B (MS-6823) while transferring data (the LED is flashing). Please close the communication programs or stop the task before removing it.

# 3

## Software Installation


This section describes the procedures of installing the driver and utility. Follow the instruction step by step to finish the installation. If you use Windows® 98SE/ME, please prepare the Windows® Setup CD at hand before installing the driver; because the system will ask you to insert the Setup CD to copy files during the installation.

### >>> 3.1 Installing on Windows® 98SE/ME

**Step 1.** Insert the driver CD into your CD-ROM drive, and the Setup program should launch automatically.

If the Autorun program doesn't launch, click **Start** at the taskbar and select **Run**; type **E:\setup.exe** in the Open box and click **OK**, where **E** is your CD-drive.

*The card should be installed into your computer before installing the driver and utility.*

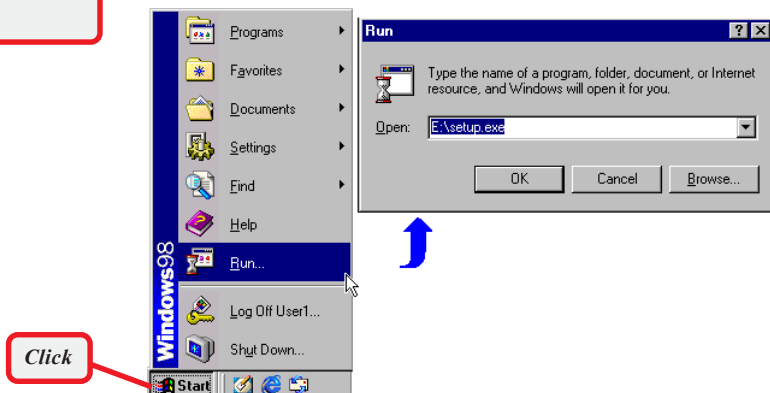

Windows 98SE



*The installation screen of Setup program*

Click the **Install Software** button.

Then, the system will detect a new device and start to configure the new device. Click **Restart** when prompted.

After rebooting, the system will search the new device again, click **Cancel** to continue the installation from the InstallShield Wizard.

**Step 2.** The welcome screen of InstallShield Wizard appears. click **Next**.

Read and accept the License Agreement, then click **Next**.

Enter the user's information (*User Name, Organization*) in the respective fields, then click **Next**.

---


**Step 3.** Click **Install** and the program will copy the necessary files to the system. The progress indicator shows the installing status.

*You may be asked to insert the Windows Setup CD during the installation. Please insert the Setup CD by the on-screen instruction to continue the installation.*

**Step 4.** When the installation is completed, click **Finish**.


The system will restart. Click **Yes** when prompted to reboot the system.

After rebooting, the **MSI Wireless LAN** icon\* appears in the status area.



*MSI Wireless LAN icon*

**\* The MSI Wireless LAN icon**



Not connected to the network.

Connected to the network.


Receiving/transmitting data from/to the network.

## >>> 3.2 Installing on Windows® 2000/XP

**Step 1.** Insert the driver CD into your CD-ROM drive, and the Setup program should launch automatically.

If the Autorun program doesn't launch, click **Start** at the taskbar and select **Run**; type **E:\setup.exe** in the Open box and click **OK**, where **E** is your CD-drive.

*The card should be installed into your computer before installing the driver and utility.*

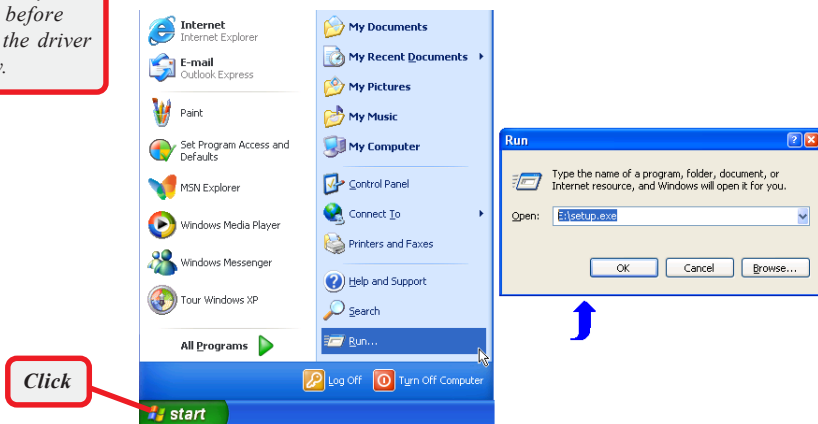

*Windows XP*

Click the **Install Software** button.



*The installation screen of Setup program*

---

**Step 2.** The welcome screen of InstallShield Wizard appears.  
Click **Next**.

Read and accept the License Agreement, then click **Next**.

**Step 3.** Enter the user's information (*User Name, Organization*)  
in the respective fields, then click **Next**.

Click **Install** and the program will copy the necessary files  
to the system. The progress indicator shows the in  
stalling status.


**Step 4.** When the installation is completed, click **Finish**.

The **MSI Wireless LAN** icon\* appears in the status area.



*MSI Wireless LAN icon*

**\* The MSI Wireless LAN icon**



Not connected to the network.

Connected to the network.

Receiving/transmitting data from/to the network.