



BL300天线尺寸




S11 Smith

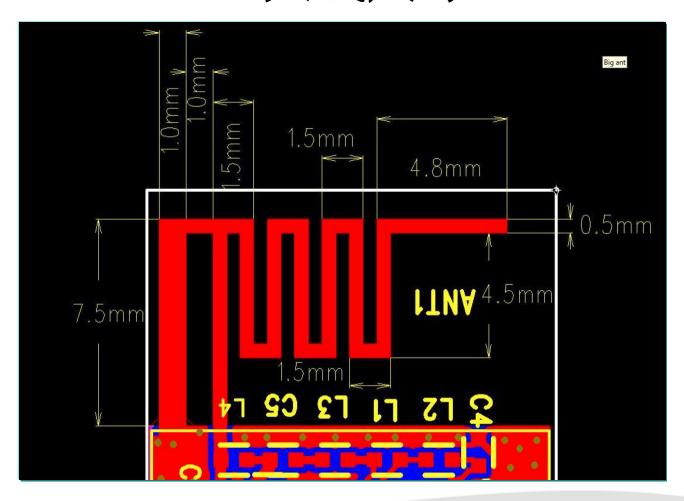


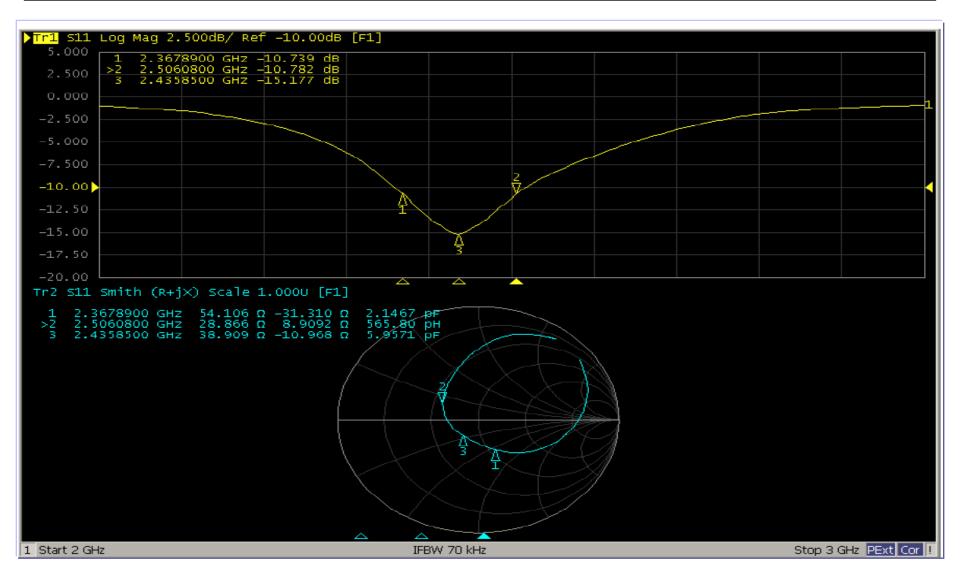



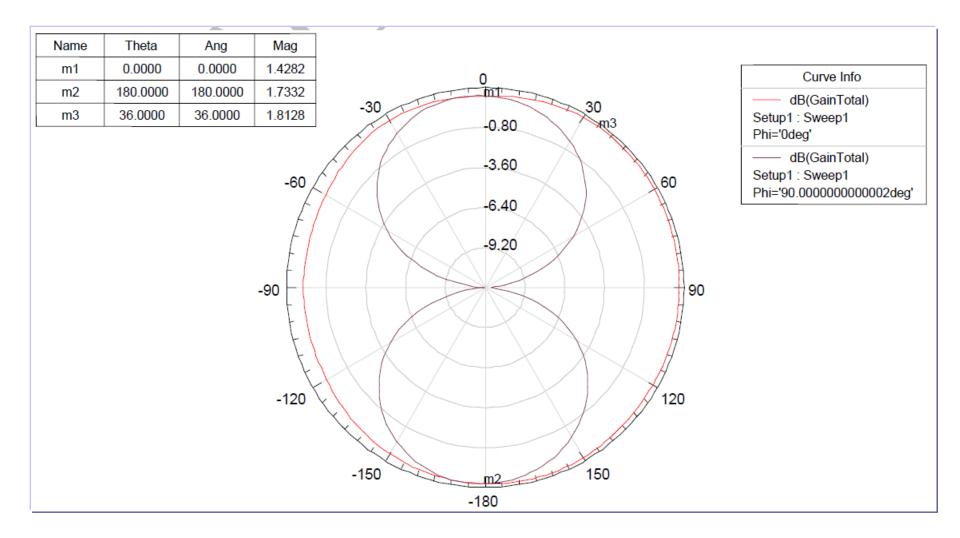



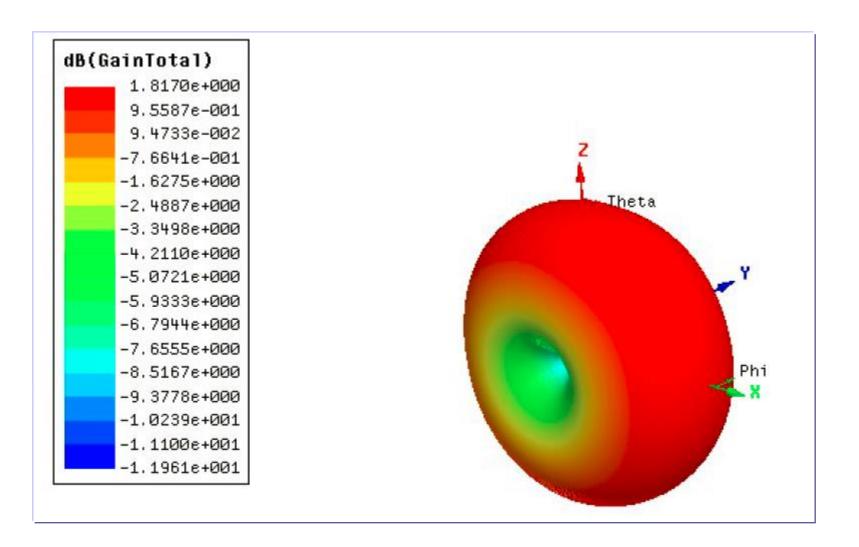

FETURED											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-0.70	-0.62	-0.82	-0.87	-1.30	-1.49	-1.50	-1.20	-1.38	-1.32	-1.26
Peak EIRP (dBm)	3.85	3.97	3.86	3.93	3.56	3.35	3.24	3.41	3.17	3.21	3.32
Directivity (dBi)	4.55	4.59	4.68	4.80	4.86	4.84	4.74	4.62	4.55	4.54	4.58
Efficiency (dB)	-0.70	-0.62	-0.82	-0.87	-1.30	-1.49	-1.50	-1.20	-1.38	-1.32	-1.26
Efficiency (%)	85.10	86.70	82.80	81.80	74.10	71.00	70.90	75.80	72.70	73.70	74.80
Gain (dBi)	3.85	3.97	3.86	3.93	3.56	3.35	3.24	3.41	3.17	3.21	3.32
NHPRP ±Pi/4 (dBm)	-1.21	-1.12	-1.32	-1.36	-1.78	-1.96	-1.98	-1.69	-1.88	-1.84	-1.78
NHPRP ±Pi/6 (dBm)	-1.66	-1.57	-1.75	-1.77	-2.18	-2.34	-2.35	-2.07	-2.27	-2.22	-2.16
NHPRP ±Pi/8 (dBm)	-1.94	-1.85	-2.02	-2.03	-2.42	-2.58	-2.59	-2.32	-2.53	-2.48	-2.41
Upper Hem. PRP (dBm)	-4.03	-3.90	-4.11	-4.19	-4.66	-4.87	-4.89	-4.58	-4.72	-4.63	-4.54
Lower Hem. PRP (dBm)	-3.42	-3.37	-3.57	-3.59	-3.99	-4.15	-4.15	-3.87	-4.09	-4.06	-4.02
Upper Hem. PRP (%)	39.58	40.72	38.84	38.11	34.20	32.55	32.43	34.83	33.69	34.45	35.17
Lower Hem. PRP (%)	45.48	45.98	43.92	43.71	39.88	38.46	38.44	40.98	39.02	39.27	39.67

