

W331 Antenna information

1 Antenna Type: **MONOPOLE – Antenna;**



2 Cable loss: 0.3dbm

3 Antenna peak gain: **-5.19dBi;**

Frequency (Mhz) Efficiency (dB) Efficiency (%) Gain (dBi)

2400	-10.19	9.58	-5.94
2410	-9.94	10.13	-5.68
2420	-9.96	10.10	-5.67
2430	-9.85	10.35	-5.63
2440	-9.71	10.69	-5.54
2450	-9.64	10.85	-5.33
2460	-9.66	10.80	-5.38
2470	-9.61	10.93	-5.19
2480	-9.62	10.92	-5.19
2490	-9.76	10.56	-5.26
2500	-9.94	10.14	-5.38

4 Antenna pattern: **As follow**

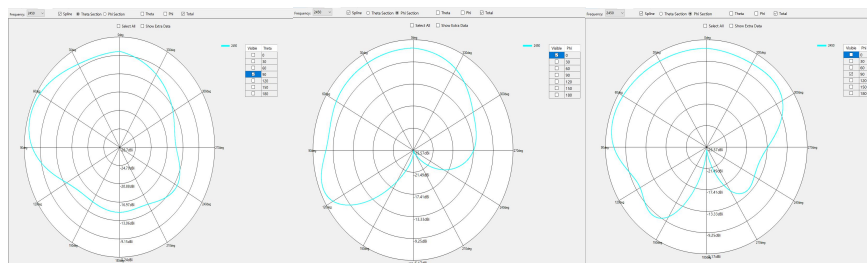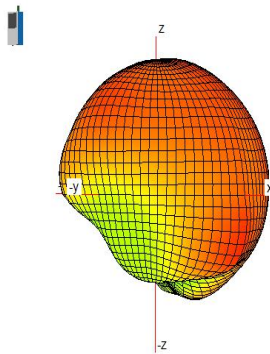


Theta90

Phi0

Phi90

5 Antenna size: 18.14mm*6.94mm

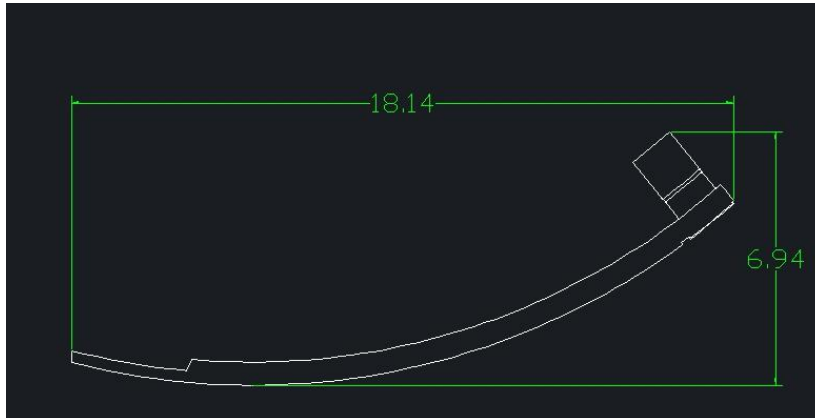

6 Manufacturer : Dongguan Guang Xun Shi Chuang Technology Co.,.Ltd

Address: No.12 Road Industrial High-Tech Industrial Development
Zone Songshan Lake,Dongguan,Guangdong Province,China