


Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

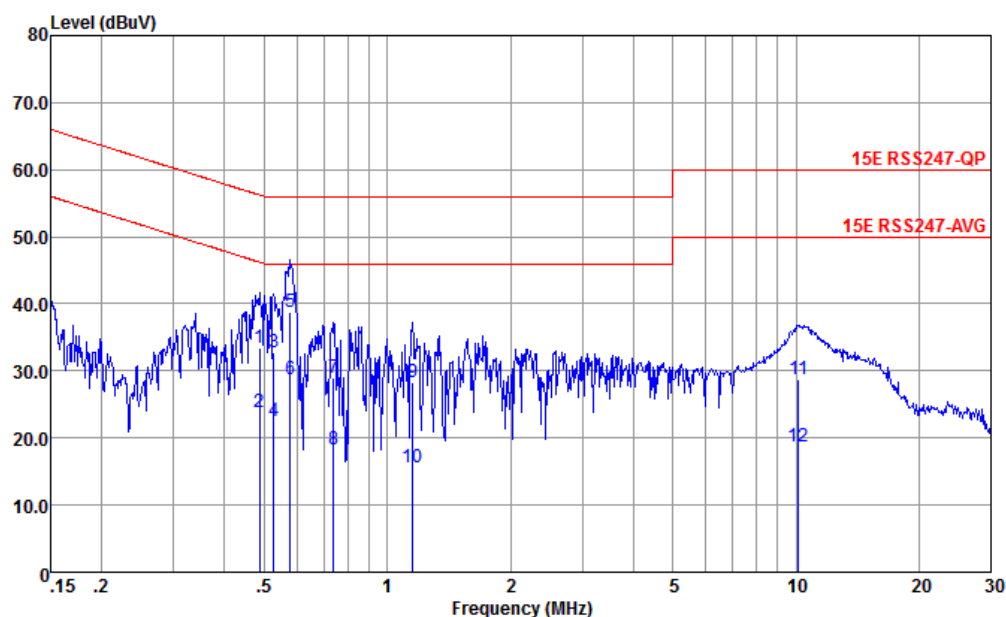


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.486	33.39	-22.84	56.23	23.20	-0.03	10.22	QP
2	0.486	23.79	-22.44	46.23	13.60	-0.03	10.22	Average
3	0.527	32.67	-23.33	56.00	22.51	-0.04	10.20	QP
4	0.527	22.47	-23.53	46.00	12.31	-0.04	10.20	Average
5 *	0.579	38.74	-17.26	56.00	28.60	-0.05	10.19	QP
6	0.579	28.64	-17.36	46.00	18.50	-0.05	10.19	Average
7	0.739	28.88	-27.12	56.00	18.80	-0.07	10.15	QP
8	0.739	18.28	-27.72	46.00	8.20	-0.07	10.15	Average
9	1.153	28.19	-27.81	56.00	18.20	-0.11	10.10	QP
10	1.153	15.59	-30.41	46.00	5.60	-0.11	10.10	Average
11	10.125	28.71	-31.29	60.00	18.21	-0.16	10.66	QP
12	10.125	18.81	-31.19	50.00	8.31	-0.16	10.66	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

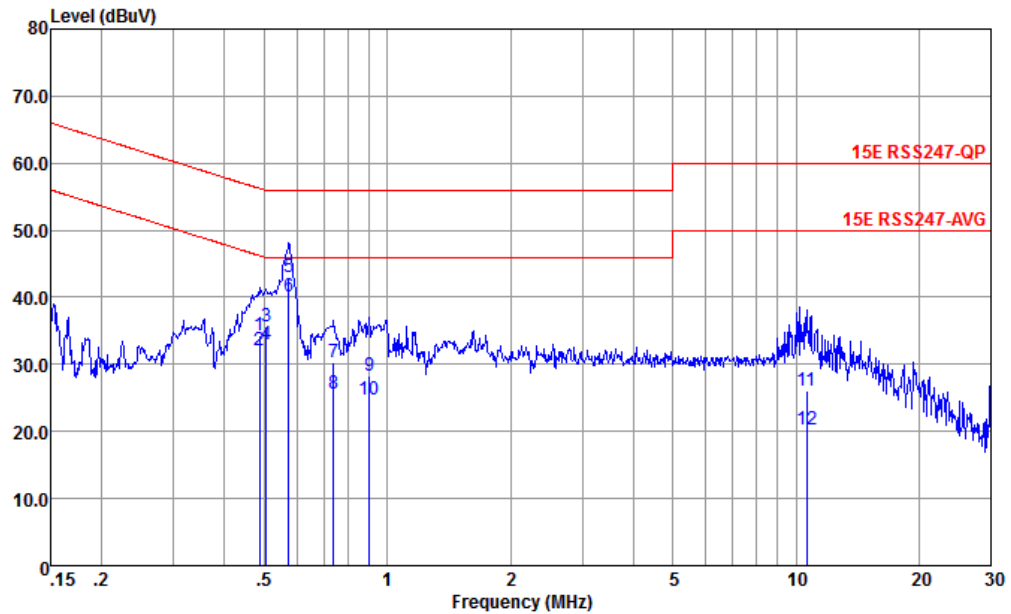

Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.486	34.35	-21.88	56.23	24.20	-0.07	10.22	QP
2	0.486	32.05	-14.18	46.23	21.90	-0.07	10.22	Average
3	0.505	35.64	-20.36	56.00	25.50	-0.07	10.21	QP
4	0.505	33.04	-12.96	46.00	22.90	-0.07	10.21	Average
5	0.573	43.02	-12.98	56.00	32.90	-0.07	10.19	QP
6 *	0.573	40.22	-5.78	46.00	30.10	-0.07	10.19	Average
7	0.739	30.28	-25.72	56.00	20.20	-0.07	10.15	QP
8	0.739	25.68	-20.32	46.00	15.60	-0.07	10.15	Average
9	0.904	28.23	-27.77	56.00	18.20	-0.09	10.12	QP
10	0.904	24.73	-21.27	46.00	14.70	-0.09	10.12	Average
11	10.620	26.07	-33.93	60.00	15.50	-0.19	10.76	QP
12	10.620	20.17	-29.83	50.00	9.60	-0.19	10.76	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry	Relative Humidity :	41~42%
		Temperature :	22~23 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	U-NII-1	5.15-5.25	0	802.11a	36	5180	6Mbps	-
Mode 2	U-NII-1	5.15-5.25	0	802.11a	44	5220	6Mbps	-
Mode 3	U-NII-1	5.15-5.25	0	802.11a	48	5240	6Mbps	-
Mode 4	U-NII-2A	5.25-5.35	0	802.11a	52	5280	6Mbps	-
Mode 5	U-NII-2A	5.25-5.35	0	802.11a	60	5300	6Mbps	-
Mode 6	U-NII-2A	5.25-5.35	0	802.11a	64	5320	6Mbps	-
Mode 7	U-NII-2C	5.47-5.725	0	802.11a	100	5500	6Mbps	-
Mode 8	U-NII-2C	5.47-5.725	0	802.11a	116	5580	6Mbps	-
Mode 9	U-NII-2C	5.47-5.725	0	802.11a	140	5700	6Mbps	-
Mode 10	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT20	36	5180	MCS0	-
Mode 11	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT20	44	5220	MCS0	-
Mode 12	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT20	48	5240	MCS0	-
Mode 13	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT20	52	5280	MCS0	-
Mode 14	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT20	60	5300	MCS0	-
Mode 15	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT20	64	5320	MCS0	-
Mode 16	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT20	100	5500	MCS0	-
Mode 17	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT20	116	5580	MCS0	-
Mode 18	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT20	140	5700	MCS0	-
Mode 19	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT40	38	5190	MCS0	-
Mode 20	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT40	46	5230	MCS0	-
Mode 21	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT40	54	5270	MCS0	-
Mode 22	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT40	62	5310	MCS0	-
Mode 23	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT40	102	5510	MCS0	-
Mode 24	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT40	110	5550	MCS0	-
Mode 25	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT40	134	5670	MCS0	-
Mode 26	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT80	42	5210	MCS0	-
Mode 27	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT80	58	5290	MCS0	-
Mode 28	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT80	106	5530	MCS0	-
Mode 30	U-NII-3	5.725-5.85	0	802.11a	149	5745	6Mbps	-
Mode 31	U-NII-3	5.725-5.85	0	802.11a	157	5785	6Mbps	-
Mode 32	U-NII-3	5.725-5.85	0	802.11a	165	5825	6Mbps	-
Mode 33	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT20	149	5745	MCS0	-
Mode 34	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT20	157	5785	MCS0	-
Mode 35	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT20	165	5825	MCS0	-
Mode 36	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT40	151	5755	MCS0	-
Mode 37	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT40	159	5795	MCS0	-
Mode 38	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT80	155	5775	MCS0	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.70	50.11	54.00	-3.89	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	49.47	68.20	-18.73	V	PEAK	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	15653.70	46.86	54.00	-7.14	V	Average	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	15720.00	48.68	54.00	-5.32	V	AVERAGE	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	15783.50	46.59	54.00	-7.41	V	Average	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	48.53	54.00	-5.47	V	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.20	50.70	54.00	-3.30	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	43.53	74.00	-30.47	H	PEAK	Pass	Harmonic
7	802.11a	100	5468.72	64.49	68.20	-3.71	H	PEAK	Pass	Band Edge
7	802.11a	100	11000.00	45.29	54.00	-8.71	H	AVERAGE	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	11160.00	47.85	54.00	-6.15	V	AVERAGE	Pass	Harmonic
9	802.11a	140	5725.56	64.53	68.20	-3.67	H	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	44.21	74.00	-29.79	H	PEAK	Pass	Harmonic
10	802.11ac VHT20	36	5150.00	50.79	54.00	-3.21	H	AVERAGE	Pass	Band Edge
10	802.11ac VHT20	36	10360.00	55.38	68.20	-12.82	V	PEAK	Pass	Harmonic
11	802.11ac VHT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ac VHT20	44	15660.00	50.62	54.00	-3.38	V	AVERAGE	Pass	Harmonic
12	802.11ac VHT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11ac VHT20	48	15714.20	50.87	54.00	-3.13	V	Average	Pass	Harmonic
13	802.11ac VHT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ac VHT20	52	15781.30	50.69	54.00	-3.31	V	Average	Pass	Harmonic
14	802.11ac VHT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ac VHT20	60	15900.00	50.41	54.00	-3.59	V	AVERAGE	Pass	Harmonic
15	802.11ac VHT20	64	5351.10	50.67	54.00	-3.33	H	AVERAGE	Pass	Band Edge
15	802.11ac VHT20	64	15960.00	47.03	54.00	-6.97	V	AVERAGE	Pass	Harmonic
16	802.11ac VHT20	100	5469.36	64.80	68.20	-3.40	H	Peak	Pass	Band Edge
16	802.11ac VHT20	100	16500.70	63.97	68.20	-4.23	V	Peak	Pass	Harmonic
17	802.11ac VHT20	116	5455.11	39.13	54.00	-14.87	H	AVERAGE	Pass	Band Edge
17	802.11ac VHT20	116	11160.00	49.67	54.00	-4.33	V	AVERAGE	Pass	Harmonic
18	802.11ac VHT20	140	5725.08	65.10	68.20	-3.10	H	PEAK	Pass	Band Edge
18	802.11ac VHT20	140	11400.00	42.16	54.00	-11.84	V	AVERAGE	Pass	Harmonic
19	802.11ac VHT40	38	5148.96	50.82	54.00	-3.18	H	AVERAGE	Pass	Band Edge
19	802.11ac VHT40	38	10380.00	47.51	68.20	-20.69	H	PEAK	Pass	Harmonic
20	802.11ac VHT40	46	5149.76	50.70	54.00	-3.30	H	AVERAGE	Pass	Band Edge
20	802.11ac VHT40	46	15690.00	50.57	54.00	-3.43	V	AVERAGE	Pass	Harmonic
21	802.11ac VHT40	54	5351.32	50.62	54.00	-3.38	H	AVERAGE	Pass	Band Edge
21	802.11ac VHT40	54	15810.00	50.66	54.00	-3.34	V	AVERAGE	Pass	Harmonic
22	802.11ac VHT40	62	5350.10	50.54	54.00	-3.46	H	AVERAGE	Pass	Band Edge
22	802.11ac VHT40	62	10620.00	45.13	74.00	-28.87	H	PEAK	Pass	Harmonic







23	802.11ac VHT40	102	5457.68	50.86	54.00	-3.14	H	AVERAGE	Pass	Band Edge
23	802.11ac VHT40	102	11020.00	43.13	54.00	-10.87	V	AVERAGE	Pass	Harmonic
24	802.11ac VHT40	110	5459.00	50.05	54.00	-3.95	H	AVERAGE	Pass	Band Edge
24	802.11ac VHT40	110	16653.60	63.77	68.20	-4.43	V	Peak	Pass	Harmonic
25	802.11ac VHT40	134	5727.72	63.44	68.20	-4.76	H	PEAK	Pass	Band Edge
25	802.11ac VHT40	134	11340.00	46.13	54.00	-7.87	V	AVERAGE	Pass	Harmonic
26	802.11ac VHT80	42	5146.88	50.50	54.00	-3.50	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	42	10420.00	46.39	68.20	-21.81	V	PEAK	Pass	Harmonic
27	802.11ac VHT80	58	5358.10	50.81	54.00	-3.19	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	58	10580.50	44.23	68.20	-23.97	V	Peak	Pass	Harmonic
28	802.11ac VHT80	106	5468.56	64.53	68.20	-3.67	H	PEAK	Pass	Band Edge
28	802.11ac VHT80	106	11060.00	45.09	74.00	-28.91	H	PEAK	Pass	Harmonic
30	802.11a	149	4594.00	51.99	54.00	-2.01	H	Average	Pass	Band Edge
30	802.11a	149	11490.00	42.10	54.00	-11.90	V	AVERAGE	Pass	Harmonic
31	802.11a	157	4630.00	52.00	54.00	-2.00	H	Average	Pass	Band Edge
31	802.11a	157	11570.00	41.31	54.00	-12.69	V	AVERAGE	Pass	Harmonic
32	802.11a	165	4660.00	50.88	54.00	-3.12	H	AVERAGE	Pass	Band Edge
32	802.11a	165	11650.00	36.53	54.00	-17.47	V	AVERAGE	Pass	Harmonic
33	802.11ac VHT20	149	4594.00	50.66	54.00	-3.34	H	Average	Pass	Band Edge
33	802.11ac VHT20	149	17235.00	61.50	68.20	-6.90	V	PEAK	Pass	Harmonic
34	802.11ac VHT20	157	4630.00	52.84	54.00	-1.16	H	Average	Pass	Band Edge
34	802.11ac VHT20	157	11570.00	44.63	54.00	-9.37	V	AVERAGE	Pass	Harmonic
35	802.11ac VHT20	165	4660.00	53.43	54.00	-0.57	H	Average	Pass	Band Edge
35	802.11ac VHT20	165	11650.00	42.94	54.00	-11.06	V	AVERAGE	Pass	Harmonic
36	802.11ac VHT40	151	4606.00	52.86	54.00	-1.14	H	AVERAGE	Pass	Band Edge
36	802.11ac VHT40	151	11510.00	42.86	54.00	-11.14	V	AVERAGE	Pass	Harmonic
37	802.11ac VHT40	159	4636.00	50.81	54.00	-3.19	H	AVERAGE	Pass	Band Edge
37	802.11ac VHT40	159	17382.53	54.04	68.20	-14.16	V	PEAK	Pass	Harmonic
38	802.11ac VHT80	155	4618.00	52.72	54.00	-1.28	H	AVERAGE	Pass	Band Edge
38	802.11ac VHT80	155	17307.73	51.72	68.20	-16.48	V	PEAK	Pass	Harmonic

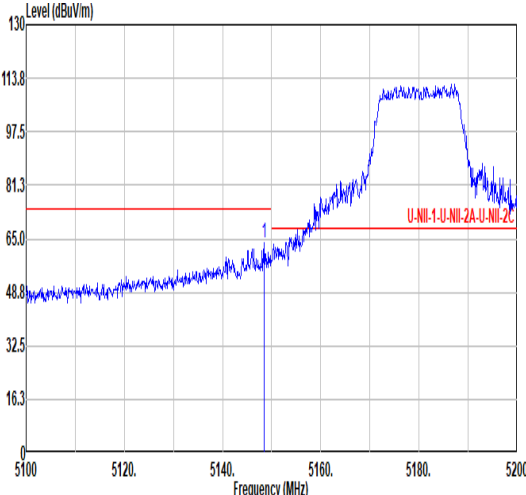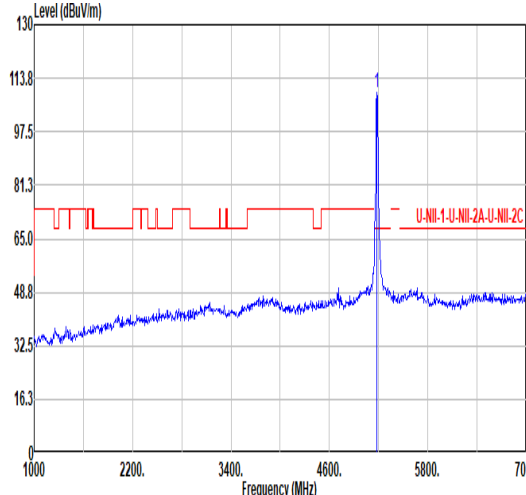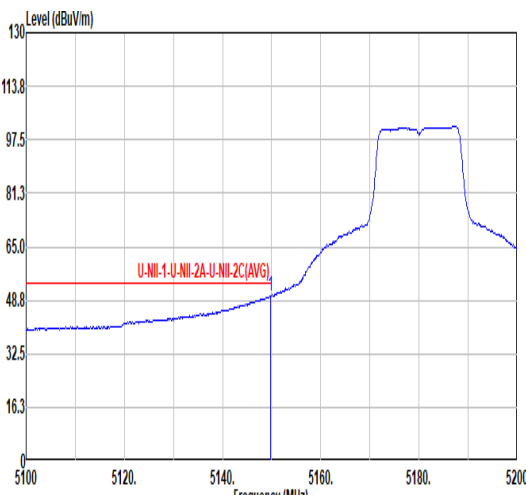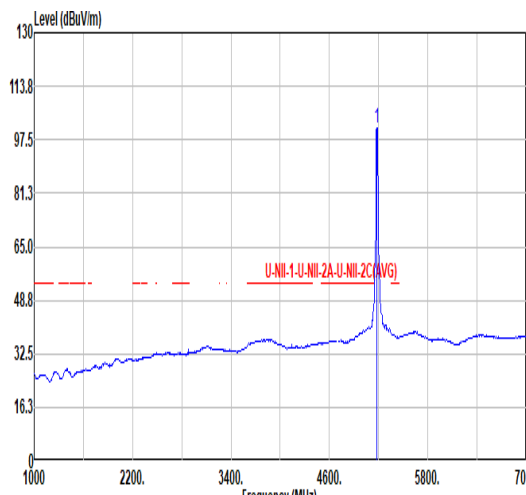

Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.40</td><td>63.85</td><td>74.00</td><td>-10.15</td><td>55.83</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.40	63.85	74.00	-10.15	55.83	34.15	10.61	36.74	0.00	100	180	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>109.54</td><td>-----</td><td>-----</td><td>101.31</td><td>34.25</td><td>10.64</td><td>36.66</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	109.54	-----	-----	101.31	34.25	10.64	36.66	0.00	100	180
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5148.40	63.85	74.00	-10.15	55.83	34.15	10.61	36.74	0.00	100	180	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	109.54	-----	-----	101.31	34.25	10.64	36.66	0.00	100	180	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.70</td><td>50.11</td><td>54.00</td><td>-3.89</td><td>42.09</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>100</td><td>180</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.70	50.11	54.00	-3.89	42.09	34.15	10.61	36.74	0.00	100	180	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.29</td><td>-----</td><td>-----</td><td>93.02</td><td>34.26</td><td>10.65</td><td>36.64</td><td>0.00</td><td>100</td><td>180</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	101.29	-----	-----	93.02	34.26	10.65	36.64	0.00	100	180
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5149.70	50.11	54.00	-3.89	42.09	34.15	10.61	36.74	0.00	100	180	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	101.29	-----	-----	93.02	34.26	10.65	36.64	0.00	100	180	AVERAGE																																																																																							

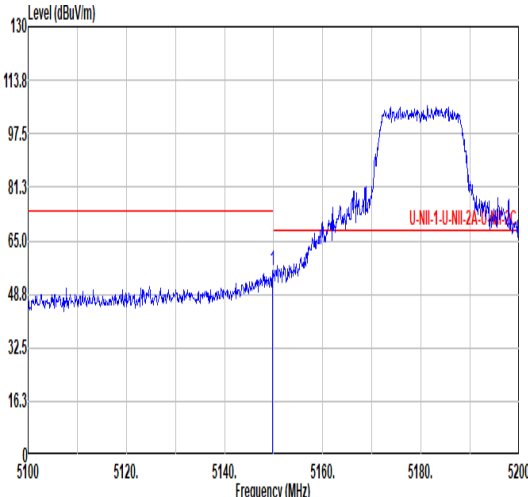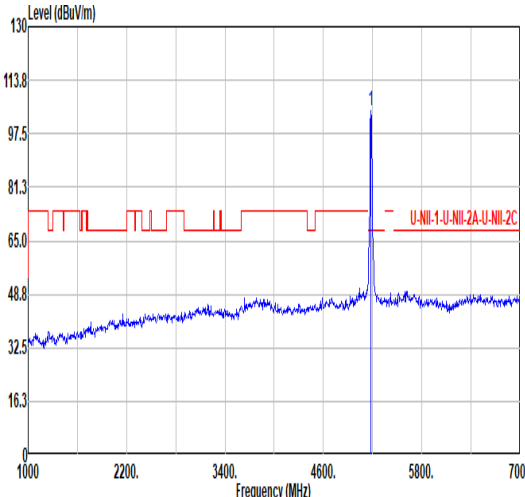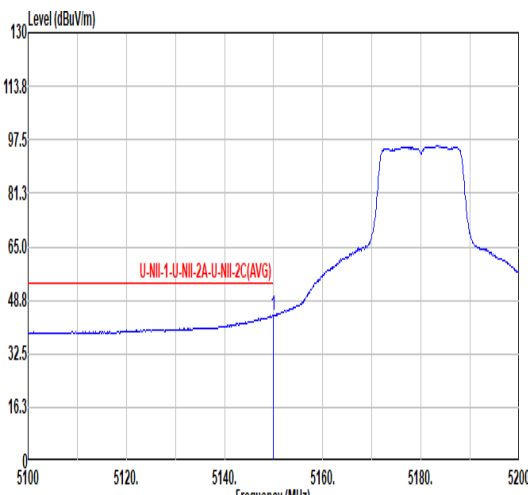
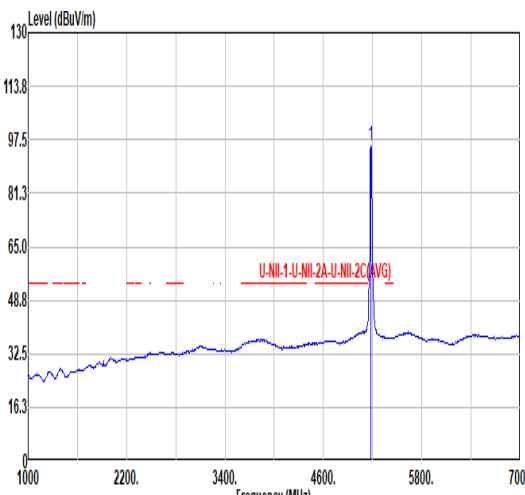


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.70</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>48.04</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>273</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.70	56.06	74.00	-17.94	48.04	34.15	10.61	36.74	0.00	273	225	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.33</td><td>-----</td><td>-----</td><td>96.10</td><td>34.25</td><td>10.64</td><td>36.66</td><td>0.00</td><td>273</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.33	-----	-----	96.10	34.25	10.64	36.66	0.00	273	225
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.70	56.06	74.00	-17.94	48.04	34.15	10.61	36.74	0.00	273	225	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	104.33	-----	-----	96.10	34.25	10.64	36.66	0.00	273	225	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>44.01</td><td>54.00</td><td>-9.99</td><td>35.98</td><td>34.15</td><td>10.61</td><td>36.73</td><td>0.00</td><td>273</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	44.01	54.00	-9.99	35.98	34.15	10.61	36.73	0.00	273	225	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.44</td><td>-----</td><td>-----</td><td>87.21</td><td>34.25</td><td>10.64</td><td>36.66</td><td>0.00</td><td>273</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.44	-----	-----	87.21	34.25	10.64	36.66	0.00	273	225
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5150.00	44.01	54.00	-9.99	35.98	34.15	10.61	36.73	0.00	273	225	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	95.44	-----	-----	87.21	34.25	10.64	36.66	0.00	273	225	AVERAGE																																																																																							



Mode	1																																																																																																		
	Harmonic																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.73</td><td>68.20</td><td>-22.47</td><td>59.57</td><td>37.45</td><td>15.45</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.73	68.20	-22.47	59.57	37.45	15.45	66.74	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>49.47</td><td>68.20</td><td>-18.73</td><td>63.31</td><td>37.45</td><td>15.45</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	49.47	68.20	-18.73	63.31	37.45	15.45	66.74	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10360.00	45.73	68.20	-22.47	59.57	37.45	15.45	66.74	0.00	---	---	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10360.00	49.47	68.20	-18.73	63.31	37.45	15.45	66.74	0.00	---	---	PEAK																																																																																							

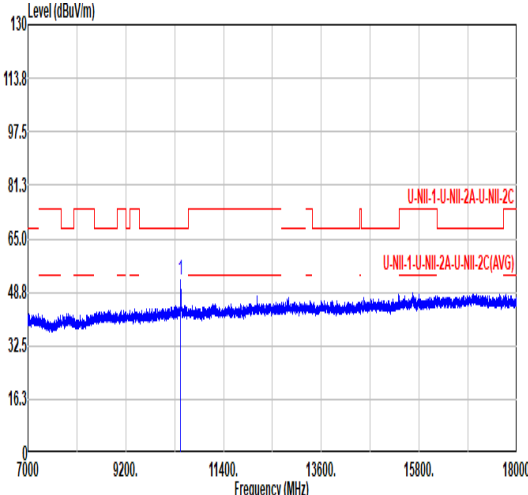
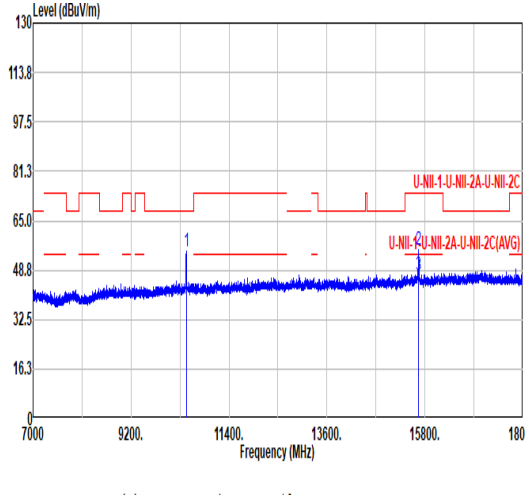


Mode	2																																																																																																																													
	Harmonic																																																																																																																													
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																													
ANT	0																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10437.50</td><td>52.35</td><td>68.20</td><td>-15.85</td><td>66.03</td><td>37.51</td><td>15.52</td><td>66.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10437.50	52.35	68.20	-15.85	66.03	37.51	15.52	66.71	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10439.70</td><td>55.19</td><td>68.20</td><td>-13.01</td><td>68.87</td><td>37.51</td><td>15.52</td><td>66.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15653.70</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>60.04</td><td>40.19</td><td>19.12</td><td>64.15</td><td>0.00</td><td>100</td><td>98</td><td>Peak</td></tr><tr><td>3</td><td>15653.70</td><td>46.86</td><td>54.00</td><td>-7.14</td><td>51.70</td><td>40.19</td><td>19.12</td><td>64.15</td><td>0.00</td><td>100</td><td>98</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10439.70	55.19	68.20	-13.01	68.87	37.51	15.52	66.71	0.00	---	---	Peak	2	15653.70	55.20	74.00	-18.80	60.04	40.19	19.12	64.15	0.00	100	98	Peak	3	15653.70	46.86	54.00	-7.14	51.70	40.19	19.12	64.15	0.00	100	98	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	10437.50	52.35	68.20	-15.85	66.03	37.51	15.52	66.71	0.00	---	---	Peak																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	10439.70	55.19	68.20	-13.01	68.87	37.51	15.52	66.71	0.00	---	---	Peak																																																																																																																		
2	15653.70	55.20	74.00	-18.80	60.04	40.19	19.12	64.15	0.00	100	98	Peak																																																																																																																		
3	15653.70	46.86	54.00	-7.14	51.70	40.19	19.12	64.15	0.00	100	98	Average																																																																																																																		





Mode	3																																																																																																																																																														
	Harmonic																																																																																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																																														
ANT	0																																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																																								
Peak Avg																																																																																																																																																															
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.24</td><td>68.20</td><td>-20.96</td><td>60.83</td><td>37.54</td><td>15.56</td><td>66.69</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>52.64</td><td>40.25</td><td>19.16</td><td>64.13</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>38.00</td><td>54.00</td><td>-16.00</td><td>42.72</td><td>40.25</td><td>19.16</td><td>64.13</td><td>0.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	47.24	68.20	-20.96	60.83	37.54	15.56	66.69	0.00	---	---	PEAK	2	15720.00	47.92	74.00	-26.08	52.64	40.25	19.16	64.13	0.00	100	360	PEAK	3	15720.00	38.00	54.00	-16.00	42.72	40.25	19.16	64.13	0.00	100	360	AVERAGE	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>49.27</td><td>68.20</td><td>-18.93</td><td>62.86</td><td>37.54</td><td>15.56</td><td>66.69</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>59.50</td><td>74.00</td><td>-14.50</td><td>64.22</td><td>40.25</td><td>19.16</td><td>64.13</td><td>0.00</td><td>195</td><td>108</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>48.68</td><td>54.00</td><td>-5.32</td><td>53.40</td><td>40.25</td><td>19.16</td><td>64.13</td><td>0.00</td><td>195</td><td>108</td><td>AVERAGE</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	49.27	68.20	-18.93	62.86	37.54	15.56	66.69	0.00	---	---	PEAK	2	15720.00	59.50	74.00	-14.50	64.22	40.25	19.16	64.13	0.00	195	108	PEAK	3	15720.00	48.68	54.00	-5.32	53.40	40.25	19.16	64.13	0.00	195	108
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																				
1	10480.00	47.24	68.20	-20.96	60.83	37.54	15.56	66.69	0.00	---	---	PEAK																																																																																																																																																			
2	15720.00	47.92	74.00	-26.08	52.64	40.25	19.16	64.13	0.00	100	360	PEAK																																																																																																																																																			
3	15720.00	38.00	54.00	-16.00	42.72	40.25	19.16	64.13	0.00	100	360	AVERAGE																																																																																																																																																			
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																				
1	10480.00	49.27	68.20	-18.93	62.86	37.54	15.56	66.69	0.00	---	---	PEAK																																																																																																																																																			
2	15720.00	59.50	74.00	-14.50	64.22	40.25	19.16	64.13	0.00	195	108	PEAK																																																																																																																																																			
3	15720.00	48.68	54.00	-5.32	53.40	40.25	19.16	64.13	0.00	195	108	AVERAGE																																																																																																																																																			

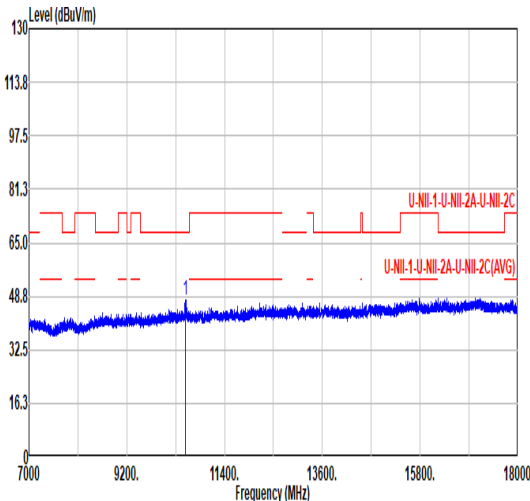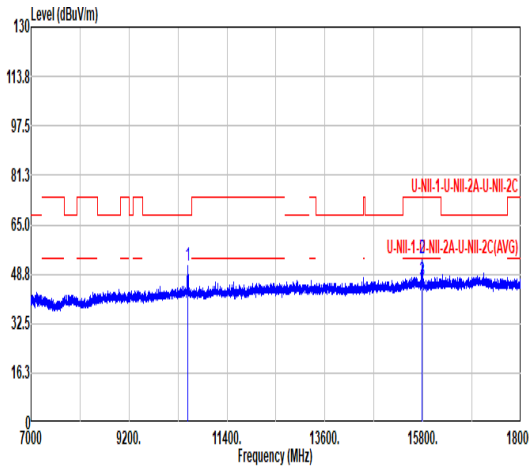

Mode	4																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH52_5280MHz																																																																																																																											
ANT	0																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																					
Peak Avg																																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>10518.90</td><td>47.71</td><td>68.20</td><td>-20.49</td><td>61.23</td><td>37.56</td><td>15.60</td><td>66.68</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	10518.90	47.71	68.20	-20.49	61.23	37.56	15.60	66.68	0.00	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>10516.70</td><td>51.71</td><td>68.20</td><td>-16.49</td><td>65.23</td><td>37.56</td><td>15.60</td><td>66.68</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15783.50</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>58.55</td><td>40.31</td><td>19.20</td><td>64.12</td><td>0.00</td><td>100</td><td>65</td><td>Peak</td></tr><tr><td>3</td><td>15783.50</td><td>46.59</td><td>54.00</td><td>-7.41</td><td>51.20</td><td>40.31</td><td>19.20</td><td>64.12</td><td>0.00</td><td>100</td><td>65</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	10516.70	51.71	68.20	-16.49	65.23	37.56	15.60	66.68	0.00	---	---	Peak	2	15783.50	53.94	74.00	-20.06	58.55	40.31	19.20	64.12	0.00	100	65	Peak	3	15783.50	46.59	54.00	-7.41	51.20	40.31	19.20	64.12	0.00	100	65	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																			
1	10518.90	47.71	68.20	-20.49	61.23	37.56	15.60	66.68	0.00	---	---	Peak																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																			
1	10516.70	51.71	68.20	-16.49	65.23	37.56	15.60	66.68	0.00	---	---	Peak																																																																																																																
2	15783.50	53.94	74.00	-20.06	58.55	40.31	19.20	64.12	0.00	100	65	Peak																																																																																																																
3	15783.50	46.59	54.00	-7.41	51.20	40.31	19.20	64.12	0.00	100	65	Average																																																																																																																



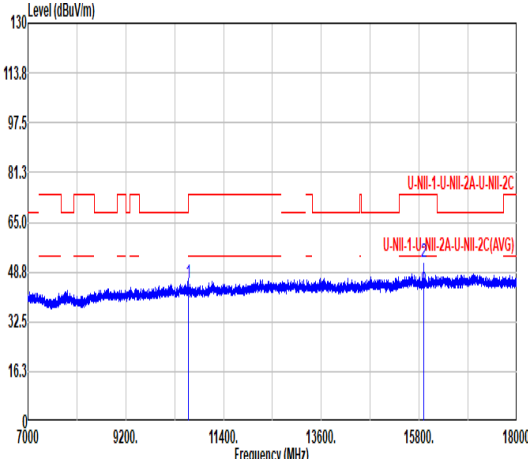
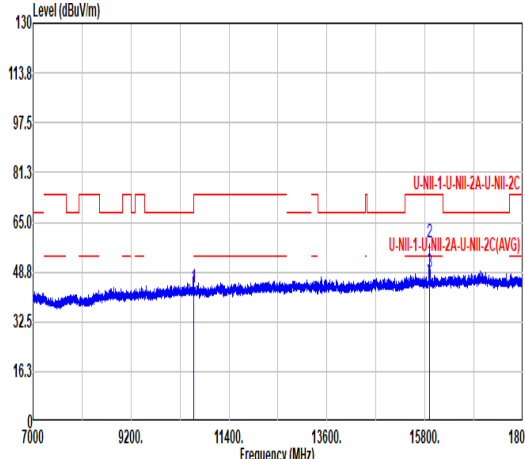


Mode	5																																																																																																																																																																					
	Harmonic																																																																																																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																																																					
ANT	0																																																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																																																															
Peak Avg																																																																																																																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10600.00</td><td>45.17</td><td>68.20</td><td>-23.03</td><td>58.52</td><td>37.62</td><td>15.67</td><td>66.64</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2 15900.00</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>56.44</td><td>40.41</td><td>19.28</td><td>64.09</td><td>0.00</td><td>199</td><td>304</td><td>---</td><td>PEAK</td></tr><tr><td>3 15900.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>47.12</td><td>40.41</td><td>19.28</td><td>64.09</td><td>0.00</td><td>199</td><td>304</td><td>---</td><td>AVERAGE</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 10600.00	45.17	68.20	-23.03	58.52	37.62	15.67	66.64	0.00	---	---	---	PEAK	2 15900.00	52.04	74.00	-21.96	56.44	40.41	19.28	64.09	0.00	199	304	---	PEAK	3 15900.00	42.72	54.00	-11.28	47.12	40.41	19.28	64.09	0.00	199	304	---	AVERAGE	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10600.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>57.13</td><td>37.62</td><td>15.67</td><td>66.64</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2 15900.00</td><td>58.41</td><td>74.00</td><td>-15.59</td><td>62.81</td><td>40.41</td><td>19.28</td><td>64.09</td><td>0.00</td><td>200</td><td>104</td><td>---</td><td>PEAK</td></tr><tr><td>3 15900.00</td><td>48.53</td><td>54.00</td><td>-5.47</td><td>52.93</td><td>40.41</td><td>19.28</td><td>64.09</td><td>0.00</td><td>200</td><td>104</td><td>---</td><td>AVERAGE</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 10600.00	43.78	74.00	-30.22	57.13	37.62	15.67	66.64	0.00	---	---	---	PEAK	2 15900.00	58.41	74.00	-15.59	62.81	40.41	19.28	64.09	0.00	200	104	---	PEAK	3 15900.00	48.53	54.00	-5.47	52.93	40.41	19.28	64.09	0.00	200	104	---	AVERAGE
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																											
1 10600.00	45.17	68.20	-23.03	58.52	37.62	15.67	66.64	0.00	---	---	---	PEAK																																																																																																																																																										
2 15900.00	52.04	74.00	-21.96	56.44	40.41	19.28	64.09	0.00	199	304	---	PEAK																																																																																																																																																										
3 15900.00	42.72	54.00	-11.28	47.12	40.41	19.28	64.09	0.00	199	304	---	AVERAGE																																																																																																																																																										
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																											
1 10600.00	43.78	74.00	-30.22	57.13	37.62	15.67	66.64	0.00	---	---	---	PEAK																																																																																																																																																										
2 15900.00	58.41	74.00	-15.59	62.81	40.41	19.28	64.09	0.00	200	104	---	PEAK																																																																																																																																																										
3 15900.00	48.53	54.00	-5.47	52.93	40.41	19.28	64.09	0.00	200	104	---	AVERAGE																																																																																																																																																										





Mode	6																																																																																																		
	Band Edge																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.80</td><td>62.47</td><td>74.00</td><td>-11.53</td><td>53.47</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>106</td><td>179</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.80	62.47	74.00	-11.53	53.47	34.50	10.75	36.25	0.00	106	179	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>111.79</td><td>-----</td><td>-----</td><td>102.90</td><td>34.50</td><td>10.73</td><td>36.34</td><td>0.00</td><td>106</td><td>179</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	111.79	-----	-----	102.90	34.50	10.73	36.34	0.00	106	179
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5351.80	62.47	74.00	-11.53	53.47	34.50	10.75	36.25	0.00	106	179	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5320.00	111.79	-----	-----	102.90	34.50	10.73	36.34	0.00	106	179	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.20</td><td>50.70</td><td>54.00</td><td>-3.30</td><td>41.70</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>106</td><td>179</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.20	50.70	54.00	-3.30	41.70	34.50	10.75	36.25	0.00	106	179	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>103.09</td><td>-----</td><td>-----</td><td>94.20</td><td>34.50</td><td>10.73</td><td>36.34</td><td>0.00</td><td>106</td><td>179</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.09	-----	-----	94.20	34.50	10.73	36.34	0.00	106	179
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5350.20	50.70	54.00	-3.30	41.70	34.50	10.75	36.25	0.00	106	179	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5320.00	103.09	-----	-----	94.20	34.50	10.73	36.34	0.00	106	179	AVERAGE																																																																																							

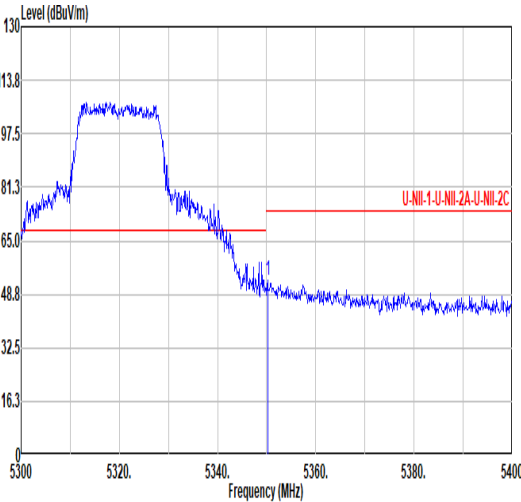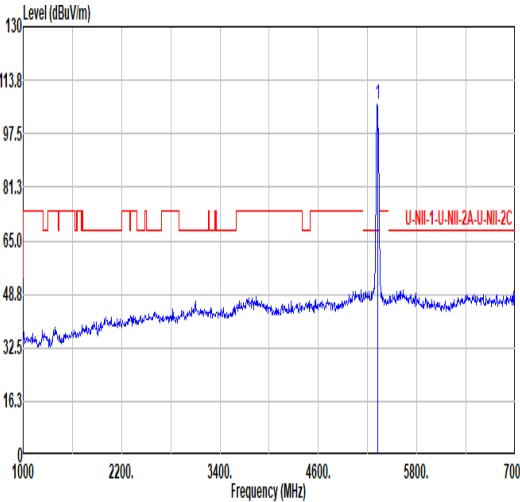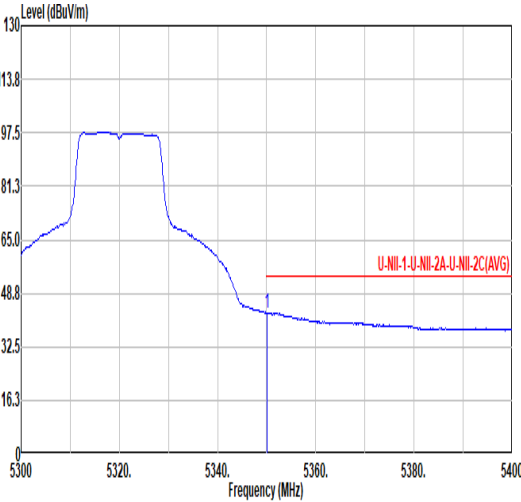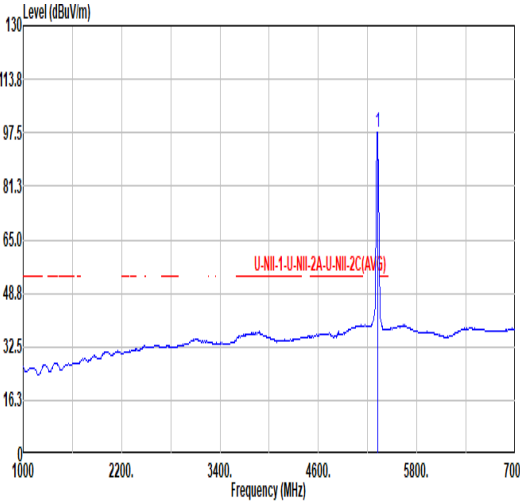

Mode	6																																																																																																			
	Band Edge																																																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.20</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>44.02</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>294</td><td>258</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.20	53.02	74.00	-20.98	44.02	34.50	10.75	36.25	0.00	294	258	PEAK	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>106.42</td><td>-----</td><td>-----</td><td>97.53</td><td>34.50</td><td>10.73</td><td>36.34</td><td>0.00</td><td>294</td><td>258</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	106.42	-----	-----	97.53	34.50	10.73	36.34	0.00	294	258	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5350.20	53.02	74.00	-20.98	44.02	34.50	10.75	36.25	0.00	294	258	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5320.00	106.42	-----	-----	97.53	34.50	10.73	36.34	0.00	294	258	PEAK																																																																																								
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.10</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>33.86</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>294</td><td>258</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.10	42.86	54.00	-11.14	33.86	34.50	10.75	36.25	0.00	294	258	AVERAGE	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>97.69</td><td>-----</td><td>-----</td><td>88.80</td><td>34.50</td><td>10.73</td><td>36.34</td><td>0.00</td><td>294</td><td>258</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	97.69	-----	-----	88.80	34.50	10.73	36.34	0.00	294	258	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5350.10	42.86	54.00	-11.14	33.86	34.50	10.75	36.25	0.00	294	258	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5320.00	97.69	-----	-----	88.80	34.50	10.73	36.34	0.00	294	258	AVERAGE																																																																																								

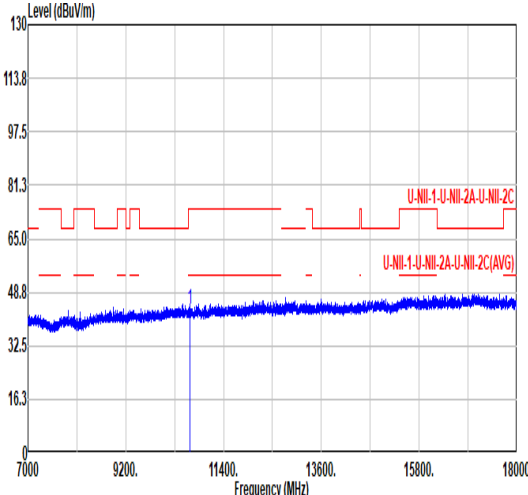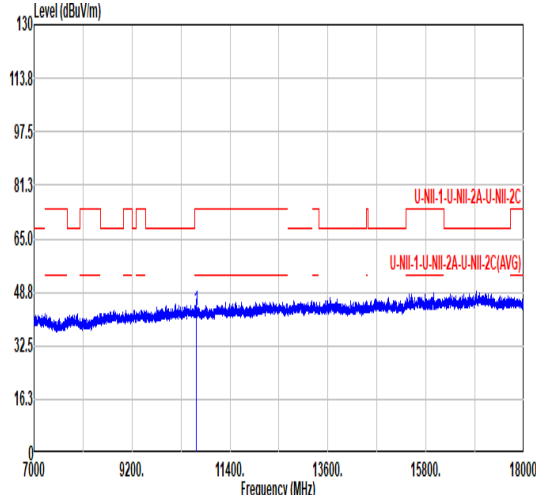

Mode	6																																																																																																		
	Harmonic																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>43.53</td><td>74.00</td><td>-30.47</td><td>56.79</td><td>37.65</td><td>15.71</td><td>66.62</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	43.53	74.00	-30.47	56.79	37.65	15.71	66.62	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>42.93</td><td>74.00</td><td>-31.07</td><td>56.19</td><td>37.65</td><td>15.71</td><td>66.62</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	42.93	74.00	-31.07	56.19	37.65	15.71	66.62	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10640.00	43.53	74.00	-30.47	56.79	37.65	15.71	66.62	0.00	---	---	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10640.00	42.93	74.00	-31.07	56.19	37.65	15.71	66.62	0.00	---	---	PEAK																																																																																							



Mode	7																																																																				
	Band Edge																																																																				
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																				
ANT	0																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.20</td><td>60.27</td><td>74.00</td><td>-13.73</td><td>50.87</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>2</td><td>5468.72</td><td>64.49</td><td>68.20</td><td>-3.71</td><td>55.04</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.20	60.27	74.00	-13.73	50.87	34.56	10.84	36.00	0.00	100	234	PEAK	2	5468.72	64.49	68.20	-3.71	55.04	34.57	10.85	35.97	0.00	100	234	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5457.20	60.27	74.00	-13.73	50.87	34.56	10.84	36.00	0.00	100	234	PEAK																																																									
2	5468.72	64.49	68.20	-3.71	55.04	34.57	10.85	35.97	0.00	100	234	PEAK																																																									
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>110.54</td><td>-----</td><td>-----</td><td>100.95</td><td>34.60</td><td>10.89</td><td>35.90</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.54	-----	-----	100.95	34.60	10.89	35.90	0.00	100	234	PEAK														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5500.00	110.54	-----	-----	100.95	34.60	10.89	35.90	0.00	100	234	PEAK																																																									
Avg																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>50.27</td><td>54.00</td><td>-3.73</td><td>40.86</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>100</td><td>234</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	50.27	54.00	-3.73	40.86	34.56	10.84	35.99	0.00	100	234	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5459.92	50.27	54.00	-3.73	40.86	34.56	10.84	35.99	0.00	100	234	AVERAGE																																																									
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>102.36</td><td>-----</td><td>-----</td><td>92.77</td><td>34.60</td><td>10.89</td><td>35.90</td><td>0.00</td><td>100</td><td>234</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.36	-----	-----	92.77	34.60	10.89	35.90	0.00	100	234	AVERAGE														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5500.00	102.36	-----	-----	92.77	34.60	10.89	35.90	0.00	100	234	AVERAGE																																																									





Mode	7																																																																				
	Band Edge																																																																				
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																				
ANT	0																																																																				
Pol.	Vertical						Fundamental																																																														
Peak																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.76</td><td>57.44</td><td>74.00</td><td>-16.56</td><td>48.44</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>338</td><td>246</td><td>PEAK</td></tr><tr><td>2</td><td>5469.52</td><td>61.52</td><td>68.20</td><td>-6.68</td><td>52.07</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>338</td><td>246</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.76	57.44	74.00	-16.56	48.44	34.50	10.75	36.25	0.00	338	246	PEAK	2	5469.52	61.52	68.20	-6.68	52.07	34.57	10.85	35.97	0.00	338	246	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5351.76	57.44	74.00	-16.56	48.44	34.50	10.75	36.25	0.00	338	246	PEAK																																																									
2	5469.52	61.52	68.20	-6.68	52.07	34.57	10.85	35.97	0.00	338	246	PEAK																																																									
Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.28</td><td>47.93</td><td>54.00</td><td>-6.07</td><td>38.52</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>338</td><td>246</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.28	47.93	54.00	-6.07	38.52	34.56	10.84	35.99	0.00	338	246	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5459.28	47.93	54.00	-6.07	38.52	34.56	10.84	35.99	0.00	338	246	AVERAGE																																																									
Peak																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>107.54</td><td>-----</td><td>-----</td><td>97.93</td><td>34.60</td><td>10.89</td><td>35.88</td><td>0.00</td><td>338</td><td>246</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	107.54	-----	-----	97.93	34.60	10.89	35.88	0.00	338	246	PEAK													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5500.00	107.54	-----	-----	97.93	34.60	10.89	35.88	0.00	338	246	PEAK																																																									
Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>99.02</td><td>-----</td><td>-----</td><td>89.41</td><td>34.60</td><td>10.89</td><td>35.88</td><td>0.00</td><td>338</td><td>246</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.02	-----	-----	89.41	34.60	10.89	35.88	0.00	338	246	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5500.00	99.02	-----	-----	89.41	34.60	10.89	35.88	0.00	338	246	AVERAGE																																																									






		7																																																																																							
Mode		Harmonic																																																																																							
		U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																							
ANT		0																																																																																							
Pol.		Horizontal																																																																																							
Peak Avg																																																																																									
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11000.00	54.60	74.00	-19.40	67.13	37.90	16.04	66.47	0.00	100	305	PEAK	2	11000.00	45.29	54.00	-8.71	57.82	37.90	16.04	66.47	0.00	100	305	AVERAGE	3	16500.00	49.52	68.20	-18.68	53.17	40.90	19.67	64.22	0.00	---	---	PEAK												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	11000.00	54.60	74.00	-19.40	67.13	37.90	16.04	66.47	0.00	100	305	PEAK																																																																													
2	11000.00	45.29	54.00	-8.71	57.82	37.90	16.04	66.47	0.00	100	305	AVERAGE																																																																													
3	16500.00	49.52	68.20	-18.68	53.17	40.90	19.67	64.22	0.00	---	---	PEAK																																																																													
		Vertical																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>52.49</td><td>74.00</td><td>-21.51</td><td>65.02</td><td>37.90</td><td>16.04</td><td>66.47</td><td>0.00</td><td>100</td><td>85</td><td>PEAK</td></tr><tr><td>2</td><td>11000.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>55.34</td><td>37.90</td><td>16.04</td><td>66.47</td><td>0.00</td><td>100</td><td>85</td><td>AVERAGE</td></tr><tr><td>3</td><td>16500.00</td><td>48.68</td><td>68.20</td><td>-19.52</td><td>52.33</td><td>40.90</td><td>19.67</td><td>64.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11000.00	52.49	74.00	-21.51	65.02	37.90	16.04	66.47	0.00	100	85	PEAK	2	11000.00	42.81	54.00	-11.19	55.34	37.90	16.04	66.47	0.00	100	85	AVERAGE	3	16500.00	48.68	68.20	-19.52	52.33	40.90	19.67	64.22	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	11000.00	52.49	74.00	-21.51	65.02	37.90	16.04	66.47	0.00	100	85	PEAK																																																																													
2	11000.00	42.81	54.00	-11.19	55.34	37.90	16.04	66.47	0.00	100	85	AVERAGE																																																																													
3	16500.00	48.68	68.20	-19.52	52.33	40.90	19.67	64.22	0.00	---	---	PEAK																																																																													


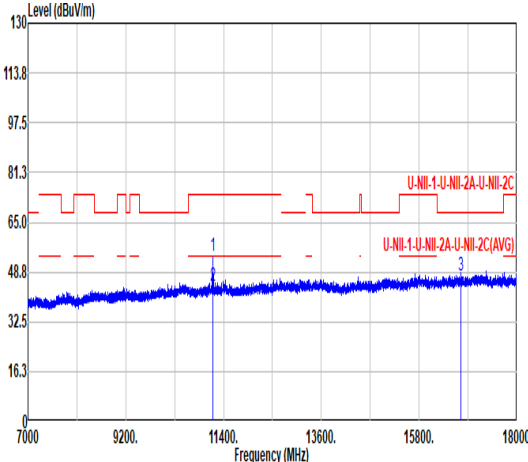
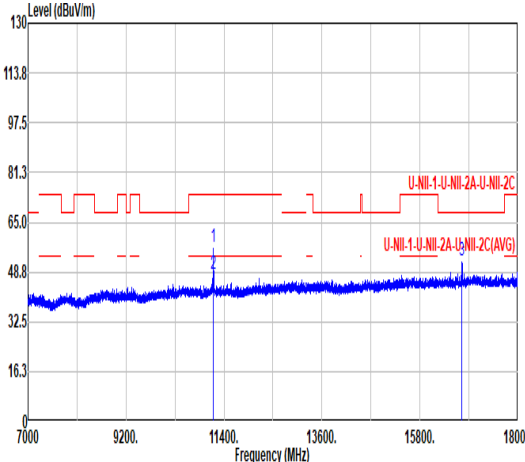


Mode	8																																																																																																																																																																					
	Harmonic																																																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																																																					
ANT	0																																																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																																																															
Peak Avg																																																																																																																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>54.00</td><td>74.00</td><td>-20.00</td><td>66.22</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>104</td><td>299</td><td>PEAK</td></tr><tr><td>2</td><td>11160.00</td><td>43.99</td><td>54.00</td><td>-10.01</td><td>56.21</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>104</td><td>299</td><td>AVERAGE</td></tr><tr><td>3</td><td>16740.00</td><td>47.59</td><td>68.20</td><td>-20.61</td><td>50.97</td><td>41.09</td><td>19.83</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	11160.00	54.00	74.00	-20.00	66.22	38.03	16.15	66.40	0.00	104	299	PEAK	2	11160.00	43.99	54.00	-10.01	56.21	38.03	16.15	66.40	0.00	104	299	AVERAGE	3	16740.00	47.59	68.20	-20.61	50.97	41.09	19.83	64.30	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>69.03</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>199</td><td>91</td><td>PEAK</td></tr><tr><td>2</td><td>11160.00</td><td>47.85</td><td>54.00</td><td>-6.15</td><td>60.07</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>199</td><td>91</td><td>AVERAGE</td></tr><tr><td>3</td><td>16740.00</td><td>52.34</td><td>68.20</td><td>-15.86</td><td>55.72</td><td>41.09</td><td>19.83</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	11160.00	56.81	74.00	-17.19	69.03	38.03	16.15	66.40	0.00	199	91	PEAK	2	11160.00	47.85	54.00	-6.15	60.07	38.03	16.15	66.40	0.00	199	91	AVERAGE	3	16740.00	52.34	68.20	-15.86	55.72	41.09	19.83	64.30	0.00	---	---	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																											
1	11160.00	54.00	74.00	-20.00	66.22	38.03	16.15	66.40	0.00	104	299	PEAK																																																																																																																																																										
2	11160.00	43.99	54.00	-10.01	56.21	38.03	16.15	66.40	0.00	104	299	AVERAGE																																																																																																																																																										
3	16740.00	47.59	68.20	-20.61	50.97	41.09	19.83	64.30	0.00	---	---	PEAK																																																																																																																																																										
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																											
1	11160.00	56.81	74.00	-17.19	69.03	38.03	16.15	66.40	0.00	199	91	PEAK																																																																																																																																																										
2	11160.00	47.85	54.00	-6.15	60.07	38.03	16.15	66.40	0.00	199	91	AVERAGE																																																																																																																																																										
3	16740.00	52.34	68.20	-15.86	55.72	41.09	19.83	64.30	0.00	---	---	PEAK																																																																																																																																																										

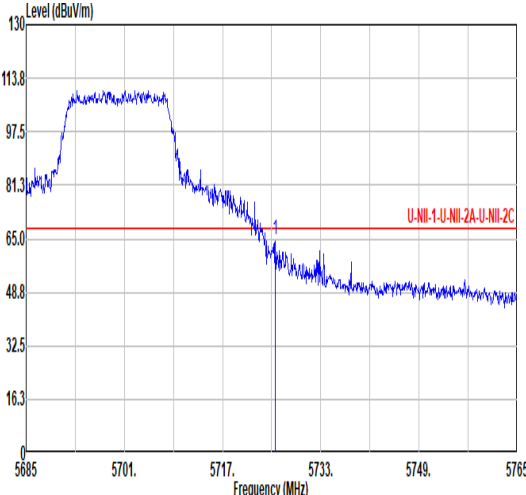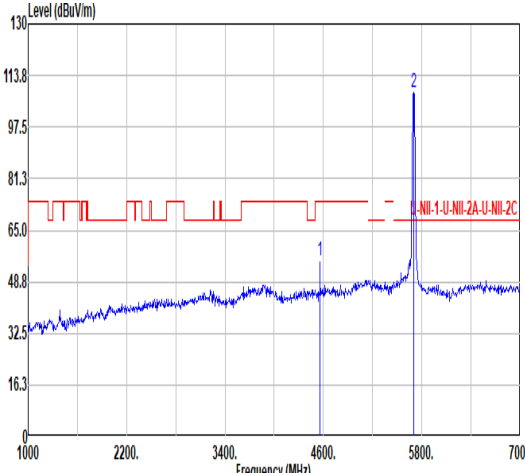
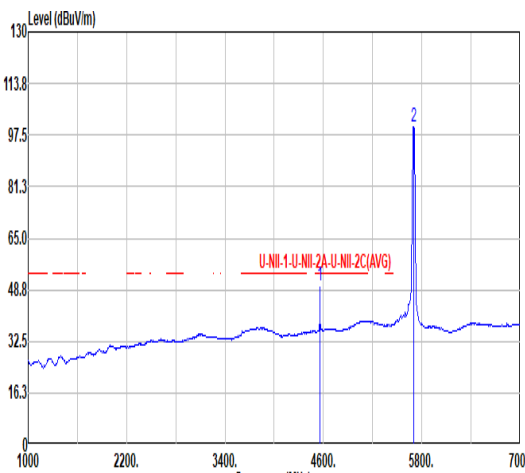


Mode	9																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																													
ANT	0																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																							
Peak																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5725.56</td><td>64.53</td><td>68.20</td><td>-3.67</td><td>55.88</td><td>34.68</td><td>11.18</td><td>37.21</td><td>0.00</td><td>102</td><td>226</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5725.56	64.53	68.20	-3.67	55.88	34.68	11.18	37.21	0.00	102	226	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4558.00</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>49.43</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>315</td><td>181</td><td>PEAK</td></tr><tr><td>2</td><td>5700.00</td><td>108.23</td><td>-----</td><td>-----</td><td>99.27</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>102</td><td>226</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	4558.00	55.26	74.00	-18.74	49.43	33.96	9.96	38.09	0.00	315	181	PEAK	2	5700.00	108.23	-----	-----	99.27	34.61	11.15	36.80	0.00	102	226
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																						
1	5725.56	64.53	68.20	-3.67	55.88	34.68	11.18	37.21	0.00	102	226	PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																						
1	4558.00	55.26	74.00	-18.74	49.43	33.96	9.96	38.09	0.00	315	181	PEAK																																																																																																		
2	5700.00	108.23	-----	-----	99.27	34.61	11.15	36.80	0.00	102	226	PEAK																																																																																																		
Avg	Blank																																																																																																													
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4558.00</td><td>50.14</td><td>54.00</td><td>-3.86</td><td>44.31</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>315</td><td>181</td><td>AVERAGE</td></tr><tr><td>2</td><td>5700.00</td><td>100.06</td><td>-----</td><td>-----</td><td>91.10</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>102</td><td>226</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	4558.00	50.14	54.00	-3.86	44.31	33.96	9.96	38.09	0.00	315	181	AVERAGE	2	5700.00	100.06	-----	-----	91.10	34.61	11.15	36.80	0.00	102	226	AVERAGE																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																						
1	4558.00	50.14	54.00	-3.86	44.31	33.96	9.96	38.09	0.00	315	181	AVERAGE																																																																																																		
2	5700.00	100.06	-----	-----	91.10	34.61	11.15	36.80	0.00	102	226	AVERAGE																																																																																																		


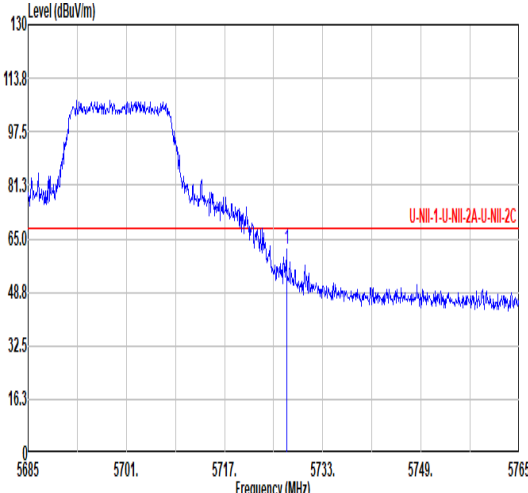
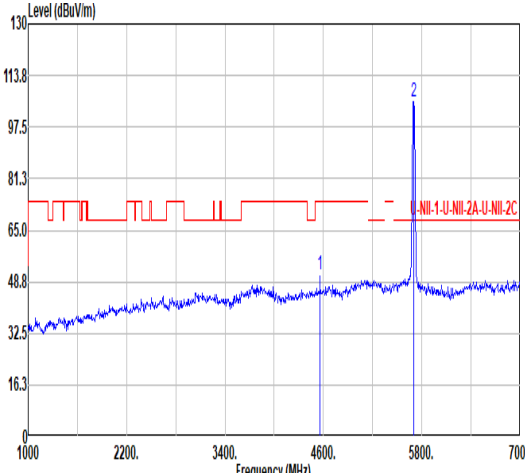
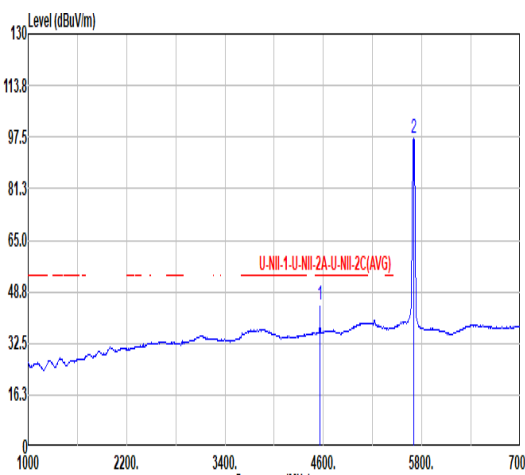


Mode	9																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5727.08</td><td>62.02</td><td>68.20</td><td>-6.18</td><td>53.40</td><td>34.68</td><td>11.18</td><td>37.24</td><td>0.00</td><td>369</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.08	62.02	68.20	-6.18	53.40	34.68	11.18	37.24	0.00	369	236	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4558.00</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>45.34</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>381</td><td>301</td><td>PEAK</td></tr><tr><td>2</td><td>5700.00</td><td>105.67</td><td>-----</td><td>-----</td><td>96.71</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>369</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4558.00	51.17	74.00	-22.83	45.34	33.96	9.96	38.09	0.00	381	301	PEAK	2	5700.00	105.67	-----	-----	96.71	34.61	11.15	36.80	0.00	369	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5727.08	62.02	68.20	-6.18	53.40	34.68	11.18	37.24	0.00	369	236	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4558.00	51.17	74.00	-22.83	45.34	33.96	9.96	38.09	0.00	381	301	PEAK																																																																																																				
2	5700.00	105.67	-----	-----	96.71	34.61	11.15	36.80	0.00	369	236	PEAK																																																																																																				
Avg	Blank																																																																																																															
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4558.00</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>38.96</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>381</td><td>301</td><td>AVERAGE</td></tr><tr><td>2</td><td>5700.00</td><td>96.95</td><td>-----</td><td>-----</td><td>87.99</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>369</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4558.00	44.79	54.00	-9.21	38.96	33.96	9.96	38.09	0.00	381	301	AVERAGE	2	5700.00	96.95	-----	-----	87.99	34.61	11.15	36.80	0.00	369	236	AVERAGE																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4558.00	44.79	54.00	-9.21	38.96	33.96	9.96	38.09	0.00	381	301	AVERAGE																																																																																																				
2	5700.00	96.95	-----	-----	87.99	34.61	11.15	36.80	0.00	369	236	AVERAGE																																																																																																				



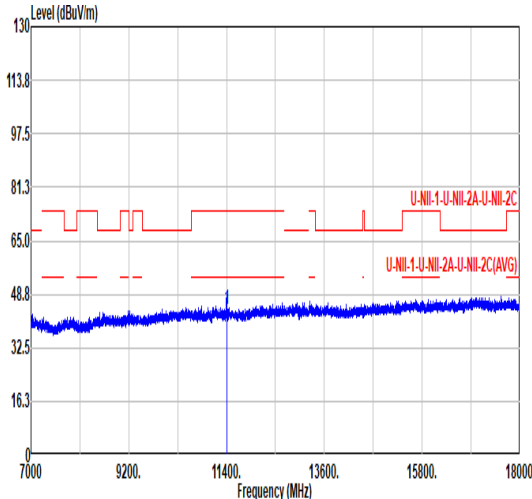
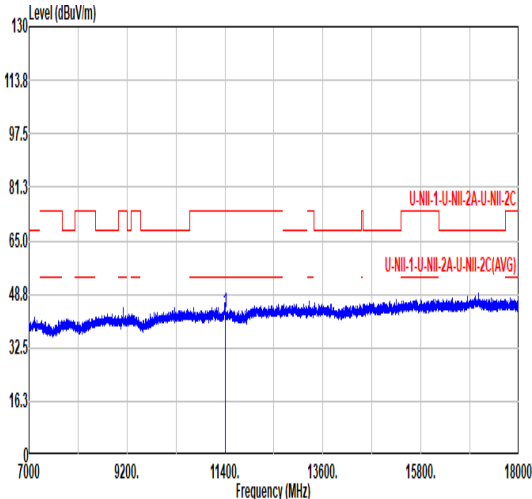


Mode	9																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																
ANT	0																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11400.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>55.98</td><td>38.22</td><td>16.30</td><td>66.29</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11400.00	44.21	74.00	-29.79	55.98	38.22	16.30	66.29	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11400.00</td><td>43.40</td><td>74.00</td><td>-30.60</td><td>55.17</td><td>38.22</td><td>16.30</td><td>66.29</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11400.00	43.40	74.00	-30.60	55.17	38.22	16.30	66.29	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 11400.00	44.21	74.00	-29.79	55.98	38.22	16.30	66.29	0.00	---	---	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 11400.00	43.40	74.00	-30.60	55.17	38.22	16.30	66.29	0.00	---	---	PEAK																																																																																						

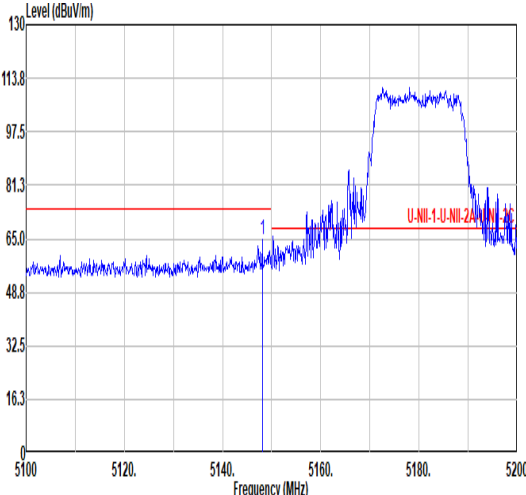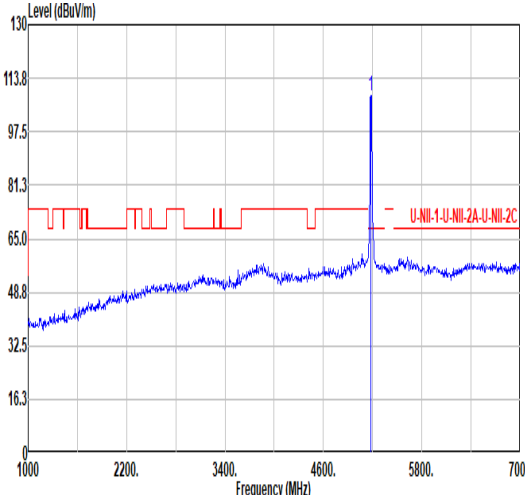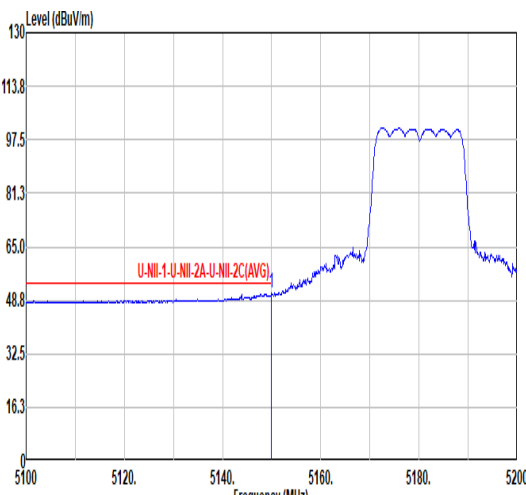
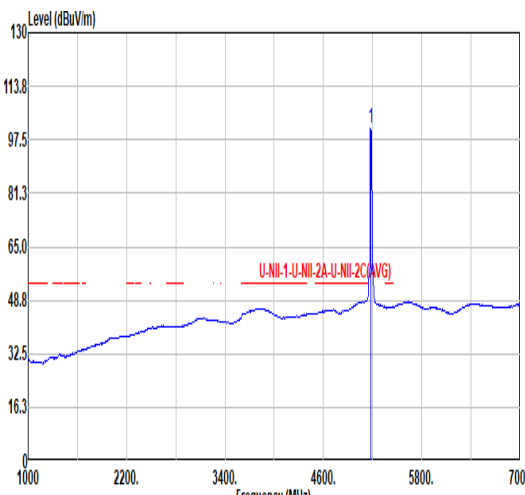


Mode	10																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.10</td><td>64.93</td><td>74.00</td><td>-9.07</td><td>56.92</td><td>34.14</td><td>10.61</td><td>36.74</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.10	64.93	74.00	-9.07	56.92	34.14	10.61	36.74	0.00	100	182	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>108.37</td><td>-----</td><td>-----</td><td>100.17</td><td>34.23</td><td>10.64</td><td>36.67</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	108.37	-----	-----	100.17	34.23	10.64	36.67	0.00	100	182
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.10	64.93	74.00	-9.07	56.92	34.14	10.61	36.74	0.00	100	182	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	108.37	-----	-----	100.17	34.23	10.64	36.67	0.00	100	182	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>50.79</td><td>54.00</td><td>-3.21</td><td>42.76</td><td>34.15</td><td>10.61</td><td>36.73</td><td>0.00</td><td>100</td><td>182</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	50.79	54.00	-3.21	42.76	34.15	10.61	36.73	0.00	100	182	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>108.85</td><td>-----</td><td>-----</td><td>92.70</td><td>34.21</td><td>10.63</td><td>36.69</td><td>0.00</td><td>100</td><td>182</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	108.85	-----	-----	92.70	34.21	10.63	36.69	0.00	100	182
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5150.00	50.79	54.00	-3.21	42.76	34.15	10.61	36.73	0.00	100	182	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	108.85	-----	-----	92.70	34.21	10.63	36.69	0.00	100	182	AVERAGE																																																																																							

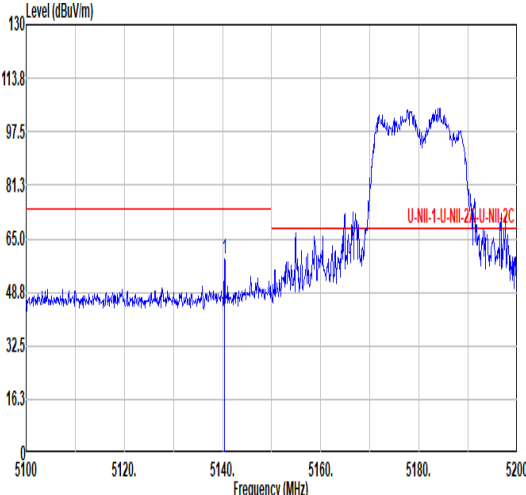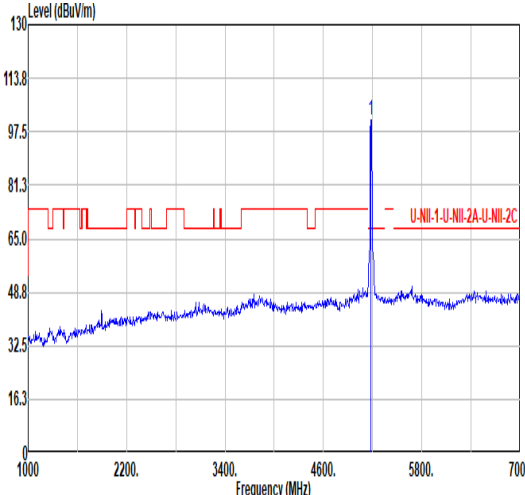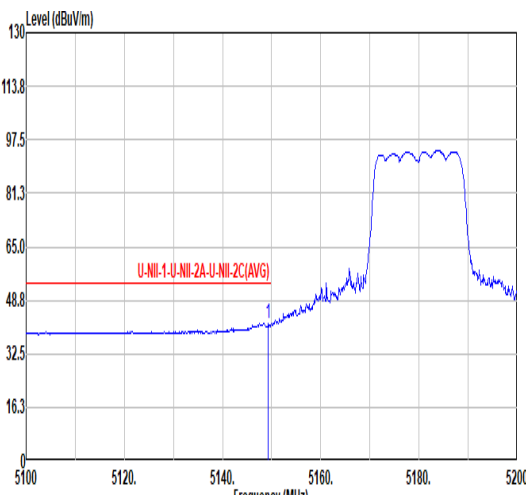
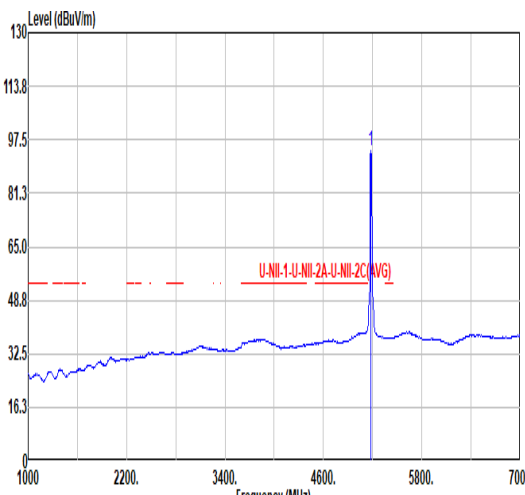


Mode	10																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5140.40</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>50.81</td><td>34.12</td><td>10.60</td><td>36.76</td><td>0.00</td><td>272</td><td>224</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.40	58.77	74.00	-15.23	50.81	34.12	10.60	36.76	0.00	272	224	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.10</td><td>-----</td><td>-----</td><td>92.83</td><td>34.26</td><td>10.65</td><td>36.64</td><td>0.00</td><td>272</td><td>224</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.10	-----	-----	92.83	34.26	10.65	36.64	0.00	272	224
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5140.40	58.77	74.00	-15.23	50.81	34.12	10.60	36.76	0.00	272	224	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	101.10	-----	-----	92.83	34.26	10.65	36.64	0.00	272	224	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.30</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>33.83</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>272</td><td>224</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.30	41.85	54.00	-12.15	33.83	34.15	10.61	36.74	0.00	272	224	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.07</td><td>-----</td><td>-----</td><td>85.84</td><td>34.25</td><td>10.64</td><td>36.66</td><td>0.00</td><td>272</td><td>224</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.07	-----	-----	85.84	34.25	10.64	36.66	0.00	272	224
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.30	41.85	54.00	-12.15	33.83	34.15	10.61	36.74	0.00	272	224	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	94.07	-----	-----	85.84	34.25	10.64	36.66	0.00	272	224	AVERAGE																																																																																							

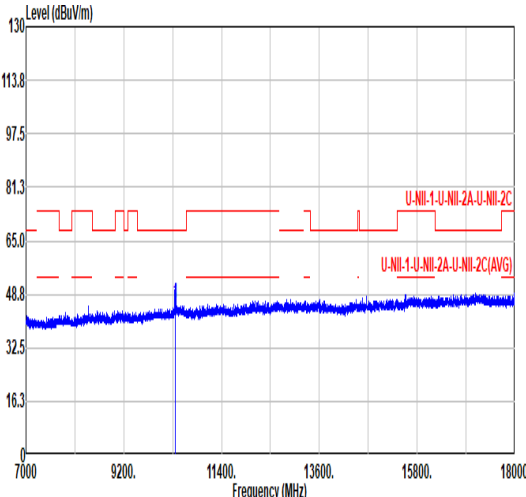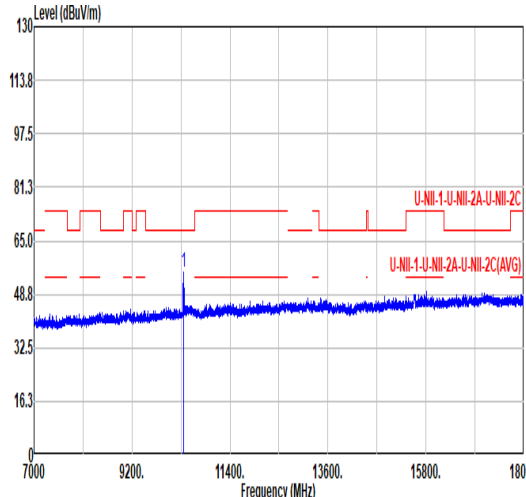

		10																																																							
Mode		Harmonic																																																							
		U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																							
ANT		CDD 0+1																																																							
Pol.		Horizontal						Vertical																																																	
Peak Avg																																																									
																																																									
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.31</td><td>68.20</td><td>-21.89</td><td>60.15</td><td>37.45</td><td>15.45</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.31	68.20	-21.89	60.15	37.45	15.45	66.74	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	10360.00	46.31	68.20	-21.89	60.15	37.45	15.45	66.74	0.00	---	---	PEAK																																													
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>55.38</td><td>68.20</td><td>-12.82</td><td>69.22</td><td>37.45</td><td>15.45</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	55.38	68.20	-12.82	69.22	37.45	15.45	66.74	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	10360.00	55.38	68.20	-12.82	69.22	37.45	15.45	66.74	0.00	---	---	PEAK																																													

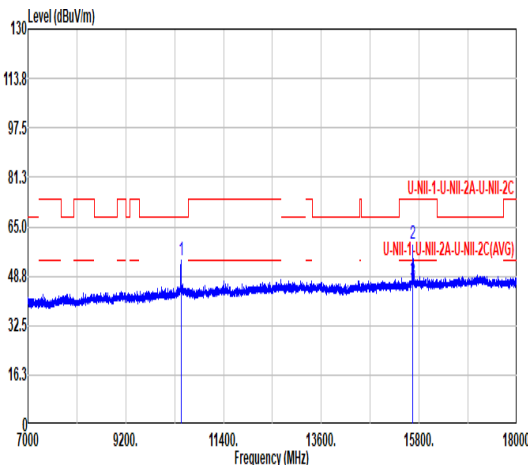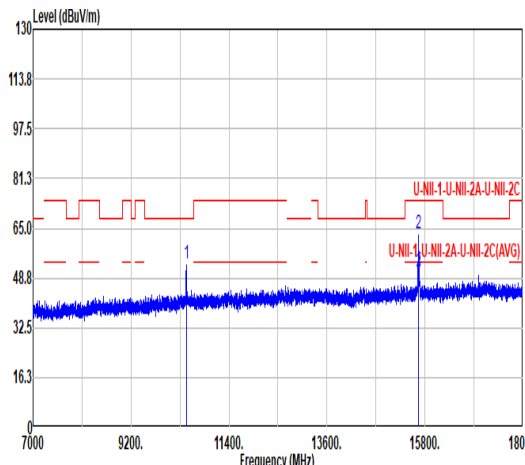

Mode	11																																																																																								
	Harmonic																																																																																								
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																																								
ANT	CDD 0+1																																																																																								
Pol.	Horizontal						Vertical																																																																																		
Peak Avg																																																																																									
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10439.70</td><td>53.83</td><td>68.20</td><td>-14.37</td><td>67.51</td><td>37.51</td><td>15.52</td><td>66.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15661.40</td><td>59.19</td><td>74.00</td><td>-14.81</td><td>64.02</td><td>40.20</td><td>19.12</td><td>64.15</td><td>0.00</td><td>300</td><td>148</td><td>Peak</td></tr><tr><td>3</td><td>15661.40</td><td>47.27</td><td>54.00</td><td>-6.73</td><td>52.10</td><td>40.20</td><td>19.12</td><td>64.15</td><td>0.00</td><td>300</td><td>148</td><td>Average</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	10439.70	53.83	68.20	-14.37	67.51	37.51	15.52	66.71	0.00	---	---	Peak	2	15661.40	59.19	74.00	-14.81	64.02	40.20	19.12	64.15	0.00	300	148	Peak	3	15661.40	47.27	54.00	-6.73	52.10	40.20	19.12	64.15	0.00	300	148	Average
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																														
1	10439.70	53.83	68.20	-14.37	67.51	37.51	15.52	66.71	0.00	---	---	Peak																																																																													
2	15661.40	59.19	74.00	-14.81	64.02	40.20	19.12	64.15	0.00	300	148	Peak																																																																													
3	15661.40	47.27	54.00	-6.73	52.10	40.20	19.12	64.15	0.00	300	148	Average																																																																													
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10440.00</td><td>53.24</td><td>68.20</td><td>-14.96</td><td>66.92</td><td>37.51</td><td>15.52</td><td>66.71</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>63.18</td><td>74.00</td><td>-10.82</td><td>68.02</td><td>40.19</td><td>19.12</td><td>64.15</td><td>0.00</td><td>291</td><td>218</td><td>PEAK</td></tr><tr><td>3</td><td>15660.00</td><td>50.62</td><td>54.00</td><td>-3.38</td><td>55.46</td><td>40.19</td><td>19.12</td><td>64.15</td><td>0.00</td><td>291</td><td>218</td><td>AVERAGE</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	10440.00	53.24	68.20	-14.96	66.92	37.51	15.52	66.71	0.00	---	---	PEAK	2	15660.00	63.18	74.00	-10.82	68.02	40.19	19.12	64.15	0.00	291	218	PEAK	3	15660.00	50.62	54.00	-3.38	55.46	40.19	19.12	64.15	0.00	291	218	AVERAGE	
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																														
1	10440.00	53.24	68.20	-14.96	66.92	37.51	15.52	66.71	0.00	---	---	PEAK																																																																													
2	15660.00	63.18	74.00	-10.82	68.02	40.19	19.12	64.15	0.00	291	218	PEAK																																																																													
3	15660.00	50.62	54.00	-3.38	55.46	40.19	19.12	64.15	0.00	291	218	AVERAGE																																																																													





		12																																																																																	
Mode		Harmonic																																																																																	
		U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																	
ANT		CDD 0+1																																																																																	
Pol.		Horizontal						Vertical																																																																											
Peak Avg																																																																																			
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10488.10</td><td>52.91</td><td>68.20</td><td>-15.29</td><td>66.49</td><td>37.54</td><td>15.57</td><td>66.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>57.07</td><td>74.00</td><td>-16.93</td><td>61.79</td><td>40.25</td><td>19.16</td><td>64.13</td><td>0.00</td><td>396</td><td>218</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>48.08</td><td>54.00</td><td>-5.92</td><td>52.80</td><td>40.25</td><td>19.16</td><td>64.13</td><td>0.00</td><td>396</td><td>218</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10488.10	52.91	68.20	-15.29	66.49	37.54	15.57	66.69	0.00	---	---	Peak	2	15720.00	57.07	74.00	-16.93	61.79	40.25	19.16	64.13	0.00	396	218	PEAK	3	15720.00	48.08	54.00	-5.92	52.80	40.25	19.16	64.13	0.00	396	218	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10488.10	52.91	68.20	-15.29	66.49	37.54	15.57	66.69	0.00	---	---	Peak																																																																							
2	15720.00	57.07	74.00	-16.93	61.79	40.25	19.16	64.13	0.00	396	218	PEAK																																																																							
3	15720.00	48.08	54.00	-5.92	52.80	40.25	19.16	64.13	0.00	396	218	AVERAGE																																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10476.00</td><td>54.36</td><td>68.20</td><td>-13.84</td><td>67.96</td><td>37.53</td><td>15.56</td><td>66.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15714.20</td><td>59.94</td><td>74.00</td><td>-14.06</td><td>64.67</td><td>40.24</td><td>19.16</td><td>64.13</td><td>0.00</td><td>252</td><td>82</td><td>Peak</td></tr><tr><td>3</td><td>15714.20</td><td>50.87</td><td>54.00</td><td>-3.13</td><td>55.60</td><td>40.24</td><td>19.16</td><td>64.13</td><td>0.00</td><td>252</td><td>82</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10476.00	54.36	68.20	-13.84	67.96	37.53	15.56	66.69	0.00	---	---	Peak	2	15714.20	59.94	74.00	-14.06	64.67	40.24	19.16	64.13	0.00	252	82	Peak	3	15714.20	50.87	54.00	-3.13	55.60	40.24	19.16	64.13	0.00	252	82	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10476.00	54.36	68.20	-13.84	67.96	37.53	15.56	66.69	0.00	---	---	Peak																																																																							
2	15714.20	59.94	74.00	-14.06	64.67	40.24	19.16	64.13	0.00	252	82	Peak																																																																							
3	15714.20	50.87	54.00	-3.13	55.60	40.24	19.16	64.13	0.00	252	82	Average																																																																							



		13																																																																					
Mode		Harmonic																																																																					
		U-NII-2A_5.25-5.35_802.11ac VHT20_CH52_5280MHz																																																																					
ANT		CDD 0+1																																																																					
Pol.		Horizontal					Vertical																																																																
Peak Avg																																																																							
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>10516.70</td><td>50.28</td><td>68.20</td><td>-17.92</td><td>63.80</td><td>37.56</td><td>15.60</td><td>66.68</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>15785.70</td><td>56.30</td><td>74.00</td><td>-17.70</td><td>60.91</td><td>40.31</td><td>19.20</td><td>64.12</td><td>0.00 300 23 Peak</td></tr><tr><td>3</td><td>15785.70</td><td>46.20</td><td>54.00</td><td>-7.80</td><td>50.81</td><td>40.31</td><td>19.20</td><td>64.12</td><td>0.00 300 23 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10516.70	50.28	68.20	-17.92	63.80	37.56	15.60	66.68	0.00 --- --- Peak	2	15785.70	56.30	74.00	-17.70	60.91	40.31	19.20	64.12	0.00 300 23 Peak	3	15785.70	46.20	54.00	-7.80	50.81	40.31	19.20	64.12	0.00 300 23 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	10516.70	50.28	68.20	-17.92	63.80	37.56	15.60	66.68	0.00 --- --- Peak																																																														
2	15785.70	56.30	74.00	-17.70	60.91	40.31	19.20	64.12	0.00 300 23 Peak																																																														
3	15785.70	46.20	54.00	-7.80	50.81	40.31	19.20	64.12	0.00 300 23 Average																																																														
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>10514.50</td><td>52.86</td><td>68.20</td><td>-15.34</td><td>66.39</td><td>37.56</td><td>15.59</td><td>66.68</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>15781.30</td><td>59.25</td><td>74.00</td><td>-14.75</td><td>63.87</td><td>40.30</td><td>19.20</td><td>64.12</td><td>0.00 259 81 Peak</td></tr><tr><td>3</td><td>15781.30</td><td>50.69</td><td>54.00</td><td>-3.31</td><td>55.31</td><td>40.30</td><td>19.20</td><td>64.12</td><td>0.00 259 81 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10514.50	52.86	68.20	-15.34	66.39	37.56	15.59	66.68	0.00 --- --- Peak	2	15781.30	59.25	74.00	-14.75	63.87	40.30	19.20	64.12	0.00 259 81 Peak	3	15781.30	50.69	54.00	-3.31	55.31	40.30	19.20	64.12	0.00 259 81 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	10514.50	52.86	68.20	-15.34	66.39	37.56	15.59	66.68	0.00 --- --- Peak																																																														
2	15781.30	59.25	74.00	-14.75	63.87	40.30	19.20	64.12	0.00 259 81 Peak																																																														
3	15781.30	50.69	54.00	-3.31	55.31	40.30	19.20	64.12	0.00 259 81 Average																																																														

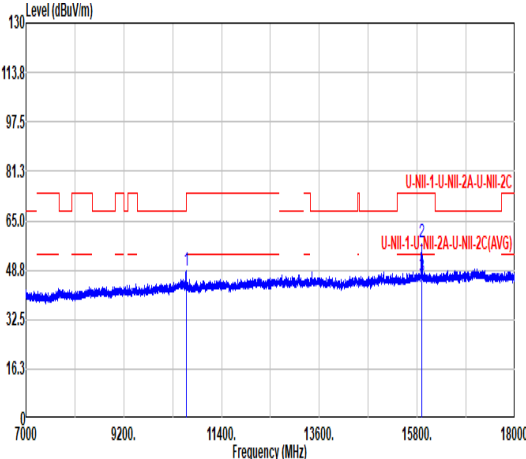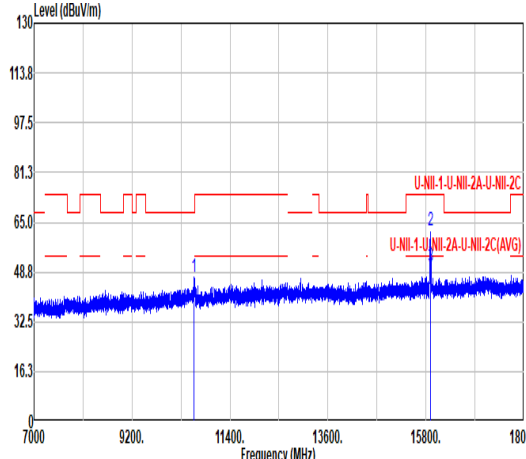

		14																																																																					
Mode		Harmonic																																																																					
		U-NII-2A_5.25-5.35_802.11ac VHT20_CH60_5300MHz																																																																					
ANT		CDD 0+1																																																																					
Pol.		Horizontal					Vertical																																																																
Peak Avg																																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10604.70</td><td>48.33</td><td>74.00</td><td>-25.67</td><td>61.67</td><td>37.62</td><td>15.68</td><td>66.64</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>15911.10</td><td>57.92</td><td>74.00</td><td>-16.08</td><td>62.29</td><td>40.42</td><td>19.29</td><td>64.08</td><td>0.00 300 22 Peak</td></tr><tr><td>3</td><td>15911.10</td><td>46.82</td><td>54.00</td><td>-7.18</td><td>51.19</td><td>40.42</td><td>19.29</td><td>64.08</td><td>0.00 300 22 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10604.70	48.33	74.00	-25.67	61.67	37.62	15.68	66.64	0.00 --- --- Peak	2	15911.10	57.92	74.00	-16.08	62.29	40.42	19.29	64.08	0.00 300 22 Peak	3	15911.10	46.82	54.00	-7.18	51.19	40.42	19.29	64.08	0.00 300 22 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	10604.70	48.33	74.00	-25.67	61.67	37.62	15.68	66.64	0.00 --- --- Peak																																																														
2	15911.10	57.92	74.00	-16.08	62.29	40.42	19.29	64.08	0.00 300 22 Peak																																																														
3	15911.10	46.82	54.00	-7.18	51.19	40.42	19.29	64.08	0.00 300 22 Average																																																														
																																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10594.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>60.57</td><td>37.62</td><td>15.67</td><td>66.64</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>15900.00</td><td>62.50</td><td>74.00</td><td>-11.50</td><td>66.90</td><td>40.41</td><td>19.28</td><td>64.09</td><td>0.00 227 75 PEAK</td></tr><tr><td>3</td><td>15900.00</td><td>50.41</td><td>54.00</td><td>-3.59</td><td>54.81</td><td>40.41</td><td>19.28</td><td>64.09</td><td>0.00 227 75 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10594.00	47.22	74.00	-26.78	60.57	37.62	15.67	66.64	0.00 --- --- Peak	2	15900.00	62.50	74.00	-11.50	66.90	40.41	19.28	64.09	0.00 227 75 PEAK	3	15900.00	50.41	54.00	-3.59	54.81	40.41	19.28	64.09	0.00 227 75 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	10594.00	47.22	74.00	-26.78	60.57	37.62	15.67	66.64	0.00 --- --- Peak																																																														
2	15900.00	62.50	74.00	-11.50	66.90	40.41	19.28	64.09	0.00 227 75 PEAK																																																														
3	15900.00	50.41	54.00	-3.59	54.81	40.41	19.28	64.09	0.00 227 75 AVERAGE																																																														

Mode

15

Band Edge

U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz

ANT


CDD 0+1

Pol.


Horizontal

Fundamental

Peak

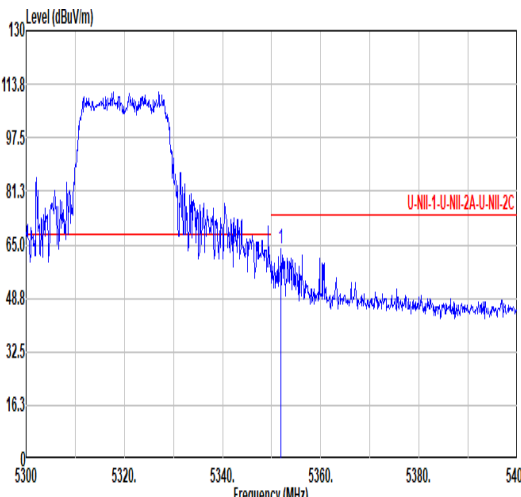


	Limit	Read	Ant	Cable	Aux	APos	TPos
Freq	Level	Line	Margin	Level	Factor	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB
1	5351.90	63.80	74.00	-10.20	54.80	34.50	10.75

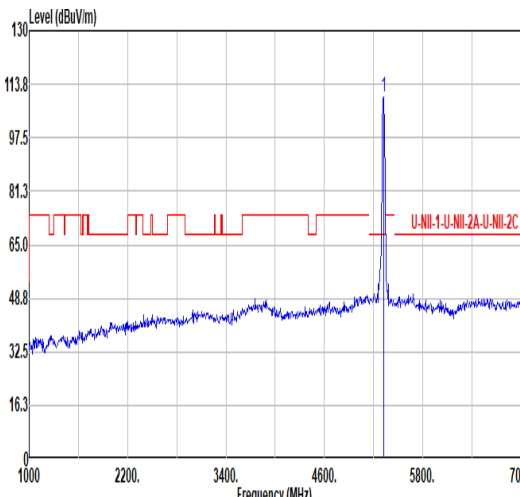


	Limit	Read	Ant	Cable	Aux	APos	TPos
Freq	Level	Line	Margin	Level	Factor	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB
1	5320.00	109.69	-----	100.79	34.50	10.73	36.33

Avg

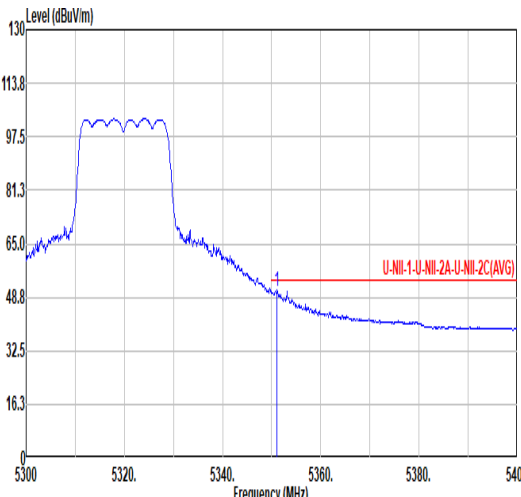

	Limit	Read	Ant	Cable	Aux	APos	TPos
Freq	Level	Line	Margin	Level	Factor	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB
1	5351.10	50.67	54.00	-3.33	41.67	34.50	10.75


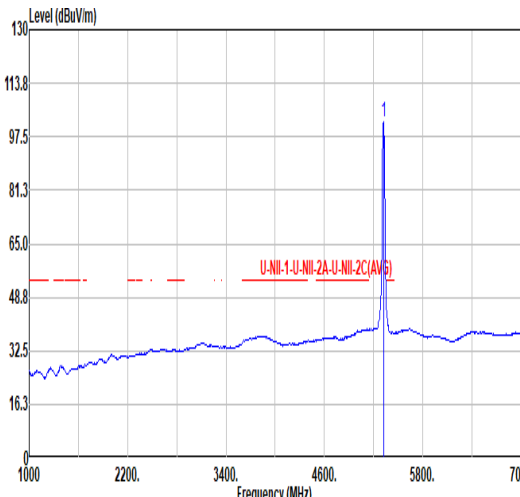


	Limit	Read	Ant	Cable	Aux	APos	TPos
Freq	Level	Line	Margin	Level	Factor	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB
1	5320.00	102.08	-----	93.16	34.50	10.73	36.31







Mode	15																																																																																																													
	Band Edge																																																																																																													
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																																																													
ANT	CDD 0+1																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5354.00</td><td>63.51</td><td>74.00</td><td>-10.49</td><td>54.51</td><td>34.50</td><td>10.75</td><td>36.25</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>326</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>262 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5354.00	63.51	74.00	-10.49	54.51	34.50	10.75	36.25								0.00	326									262 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>104.27</td><td>-----</td><td>-----</td><td>95.37</td><td>34.50</td><td>10.73</td><td>36.33</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>326</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>262 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	104.27	-----	-----	95.37	34.50	10.73	36.33								0.00	326									262 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																						
1	5354.00	63.51	74.00	-10.49	54.51	34.50	10.75	36.25																																																																																																						
							0.00	326																																																																																																						
								262 PEAK																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																						
1	5320.00	104.27	-----	-----	95.37	34.50	10.73	36.33																																																																																																						
							0.00	326																																																																																																						
								262 PEAK																																																																																																						
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>46.94</td><td>54.00</td><td>-7.06</td><td>37.95</td><td>34.50</td><td>10.75</td><td>36.26</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>326</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>262 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.00	46.94	54.00	-7.06	37.95	34.50	10.75	36.26								0.00	326									262 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>97.61</td><td>-----</td><td>-----</td><td>88.71</td><td>34.50</td><td>10.73</td><td>36.33</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>326</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>262 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	97.61	-----	-----	88.71	34.50	10.73	36.33								0.00	326									262 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																						
1	5350.00	46.94	54.00	-7.06	37.95	34.50	10.75	36.26																																																																																																						
							0.00	326																																																																																																						
								262 AVERAGE																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																						
1	5320.00	97.61	-----	-----	88.71	34.50	10.73	36.33																																																																																																						
							0.00	326																																																																																																						
								262 AVERAGE																																																																																																						



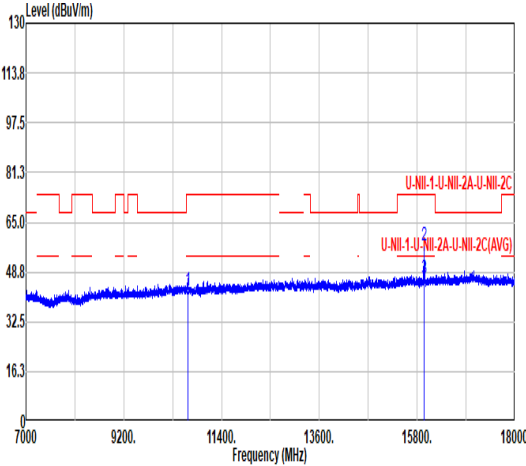
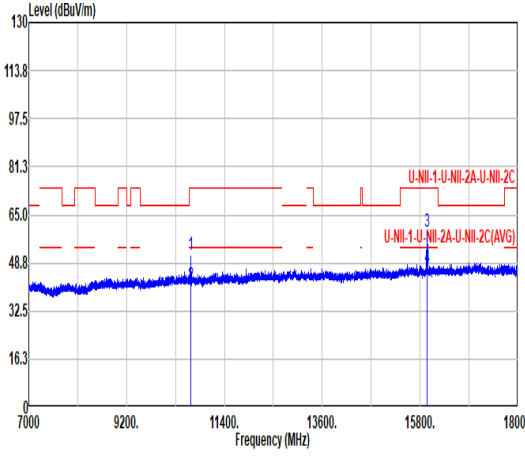


		15																																																																																																																																										
Mode		Harmonic																																																																																																																																										
		U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																																																																																										
ANT		CDD 0+1																																																																																																																																										
Pol.		Horizontal										Vertical																																																																																																																																
Peak Avg																																																																																																																																												
	<table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1 10640.00</td><td>42.84</td><td>74.00</td><td>-31.16</td><td>56.10</td><td>37.65</td><td>15.71</td><td>66.62</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td colspan="4"></td><td>PEAK</td></tr><tr><td>2 15960.00</td><td>57.34</td><td>74.00</td><td>-16.66</td><td>61.63</td><td>40.46</td><td>19.32</td><td>64.07</td><td>0.00</td><td>341</td><td>110</td><td>341</td><td>110</td><td colspan="4"></td><td>PEAK</td></tr><tr><td>3 15960.00</td><td>46.47</td><td>54.00</td><td>-7.53</td><td>50.76</td><td>40.46</td><td>19.32</td><td>64.07</td><td>0.00</td><td>341</td><td>110</td><td>341</td><td>110</td><td colspan="4"></td><td>AVERAGE</td></tr></table>																	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg						1 10640.00	42.84	74.00	-31.16	56.10	37.65	15.71	66.62	0.00	---	---	---	---					PEAK	2 15960.00	57.34	74.00	-16.66	61.63	40.46	19.32	64.07	0.00	341	110	341	110					PEAK	3 15960.00	46.47	54.00	-7.53	50.76	40.46	19.32	64.07	0.00	341	110	341	110					AVERAGE																	
	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg																																																																																																																																
1 10640.00	42.84	74.00	-31.16	56.10	37.65	15.71	66.62	0.00	---	---	---	---					PEAK																																																																																																																											
2 15960.00	57.34	74.00	-16.66	61.63	40.46	19.32	64.07	0.00	341	110	341	110					PEAK																																																																																																																											
3 15960.00	46.47	54.00	-7.53	50.76	40.46	19.32	64.07	0.00	341	110	341	110					AVERAGE																																																																																																																											
																																																																																																																																												
<table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1 10640.00</td><td>51.57</td><td>74.00</td><td>-22.43</td><td>64.83</td><td>37.65</td><td>15.71</td><td>66.62</td><td>0.00</td><td>236</td><td>100</td><td>236</td><td>100</td><td colspan="4"></td><td>PEAK</td></tr><tr><td>2 10640.00</td><td>41.40</td><td>54.00</td><td>-12.60</td><td>54.66</td><td>37.65</td><td>15.71</td><td>66.62</td><td>0.00</td><td>236</td><td>100</td><td>236</td><td>100</td><td colspan="4"></td><td>AVERAGE</td></tr><tr><td>3 15960.00</td><td>59.16</td><td>74.00</td><td>-14.84</td><td>63.45</td><td>40.46</td><td>19.32</td><td>64.07</td><td>0.00</td><td>298</td><td>204</td><td>298</td><td>204</td><td colspan="4"></td><td>PEAK</td></tr><tr><td>4 15960.00</td><td>47.03</td><td>54.00</td><td>-6.97</td><td>51.32</td><td>40.46</td><td>19.32</td><td>64.07</td><td>0.00</td><td>298</td><td>204</td><td>298</td><td>204</td><td colspan="4"></td><td>AVERAGE</td></tr></table>																	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg						1 10640.00	51.57	74.00	-22.43	64.83	37.65	15.71	66.62	0.00	236	100	236	100					PEAK	2 10640.00	41.40	54.00	-12.60	54.66	37.65	15.71	66.62	0.00	236	100	236	100					AVERAGE	3 15960.00	59.16	74.00	-14.84	63.45	40.46	19.32	64.07	0.00	298	204	298	204					PEAK	4 15960.00	47.03	54.00	-6.97	51.32	40.46	19.32	64.07	0.00	298	204	298	204					AVERAGE
Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg																																																																																																																																
1 10640.00	51.57	74.00	-22.43	64.83	37.65	15.71	66.62	0.00	236	100	236	100					PEAK																																																																																																																											
2 10640.00	41.40	54.00	-12.60	54.66	37.65	15.71	66.62	0.00	236	100	236	100					AVERAGE																																																																																																																											
3 15960.00	59.16	74.00	-14.84	63.45	40.46	19.32	64.07	0.00	298	204	298	204					PEAK																																																																																																																											
4 15960.00	47.03	54.00	-6.97	51.32	40.46	19.32	64.07	0.00	298	204	298	204					AVERAGE																																																																																																																											

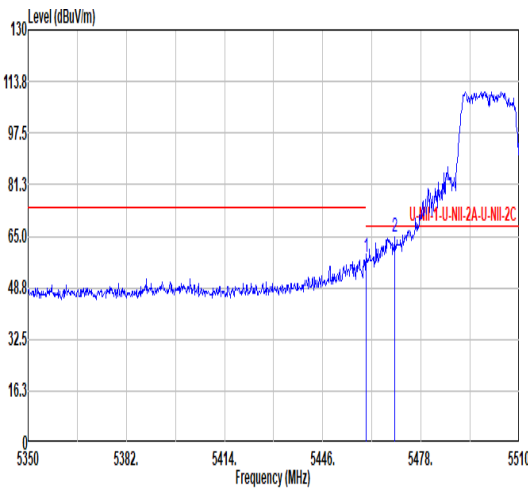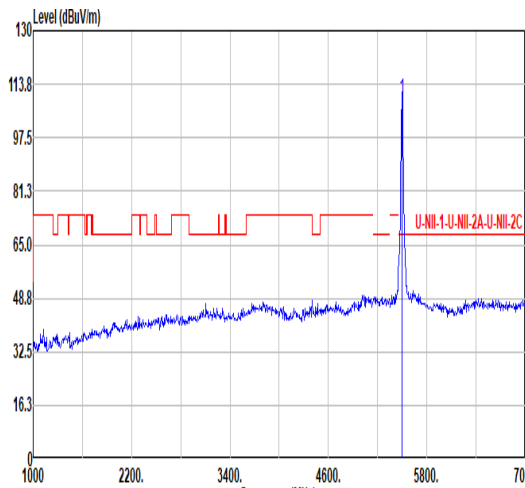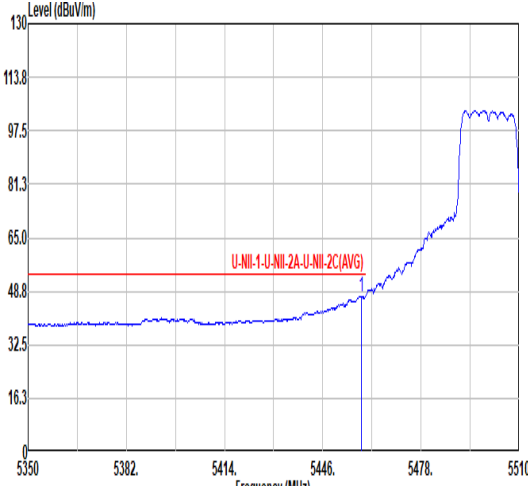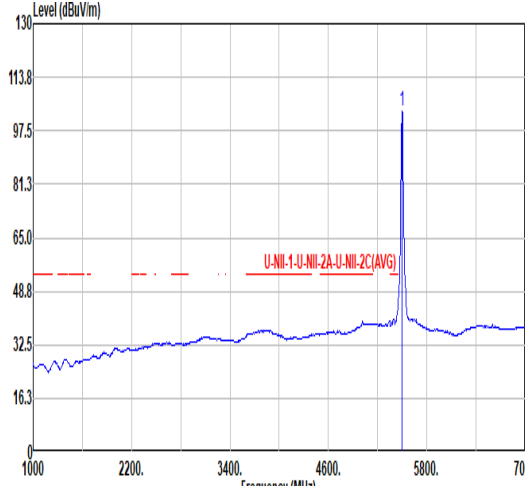

		16																																																																																																														
Mode	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																																																															
ANT	CDD 0+1																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>58.53</td><td>68.20</td><td>-9.67</td><td>49.12</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>103</td><td>300</td><td>Peak</td></tr><tr><td>2</td><td>5469.36</td><td>64.80</td><td>68.20</td><td>-3.40</td><td>55.35</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>103</td><td>300</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5460.00	58.53	68.20	-9.67	49.12	34.56	10.84	35.99	0.00	103	300	Peak	2	5469.36	64.80	68.20	-3.40	55.35	34.57	10.85	35.97	0.00	103	300	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>109.28</td><td>-----</td><td>-----</td><td>99.69</td><td>34.60</td><td>10.89</td><td>35.90</td><td>0.00</td><td>103</td><td>300</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	109.28	-----	-----	99.69	34.60	10.89	35.90	0.00	103	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5460.00	58.53	68.20	-9.67	49.12	34.56	10.84	35.99	0.00	103	300	Peak																																																																																																				
2	5469.36	64.80	68.20	-3.40	55.35	34.57	10.85	35.97	0.00	103	300	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5500.00	109.28	-----	-----	99.69	34.60	10.89	35.90	0.00	103	300	PEAK																																																																																																				
Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.48</td><td>47.31</td><td>54.00</td><td>-6.69</td><td>37.91</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>103</td><td>300</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.48	47.31	54.00	-6.69	37.91	34.56	10.84	36.00	0.00	103	300	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>103.49</td><td>-----</td><td>-----</td><td>93.90</td><td>34.60</td><td>10.89</td><td>35.90</td><td>0.00</td><td>103</td><td>300</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.49	-----	-----	93.90	34.60	10.89	35.90	0.00	103	300	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5458.48	47.31	54.00	-6.69	37.91	34.56	10.84	36.00	0.00	103	300	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5500.00	103.49	-----	-----	93.90	34.60	10.89	35.90	0.00	103	300	AVERAGE																																																																																																				

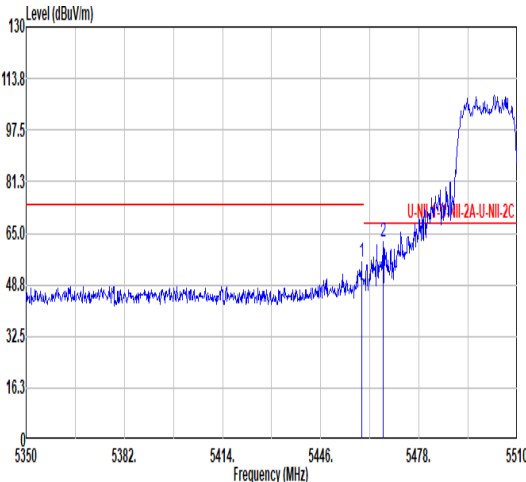
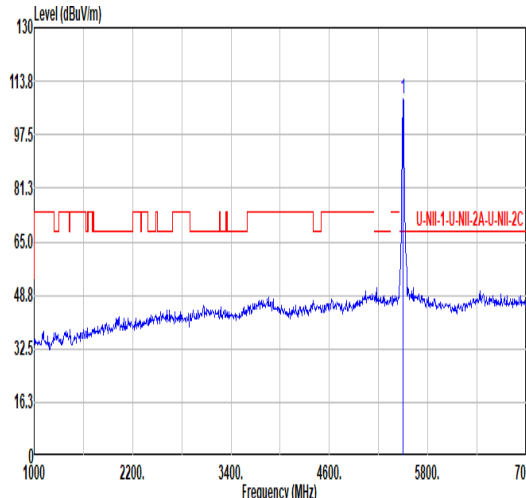
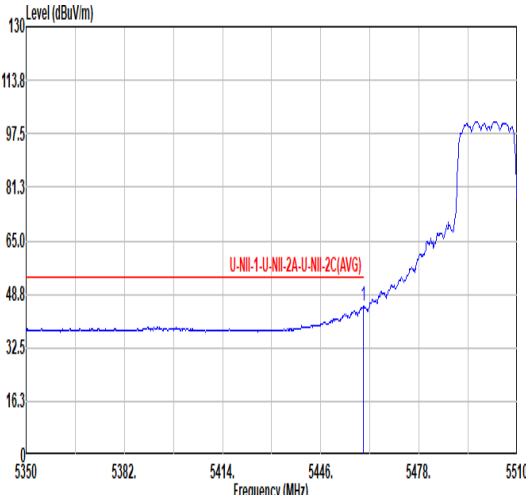
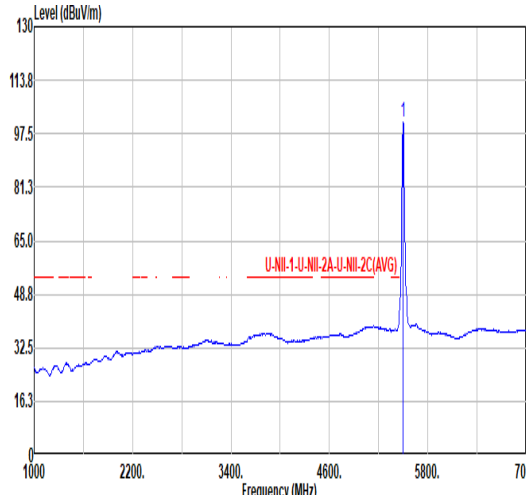


		16																																																																																																			
Mode		Band Edge - L																																																																																																			
		U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																																																			
ANT		CDD 0+1																																																																																																			
Pol.	Vertical										Fundamental																																																																																										
Peak																																																																																																					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.28	55.71	74.00	-18.29	46.30	34.56	10.84	35.99	0.00	342	274	PEAK	2	5466.32	62.35	68.20	-5.85	52.91	34.57	10.85	35.98	0.00	342	274	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>108.41</td><td>-----</td><td>-----</td><td>98.82</td><td>34.60</td><td>10.89</td><td>35.90</td><td>0.00</td><td>342</td><td>274</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	108.41	-----	-----	98.82	34.60	10.89	35.90	0.00	342	274
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5459.28	55.71	74.00	-18.29	46.30	34.56	10.84	35.99	0.00	342	274	PEAK																																																																																									
2	5466.32	62.35	68.20	-5.85	52.91	34.57	10.85	35.98	0.00	342	274	PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5500.00	108.41	-----	-----	98.82	34.60	10.89	35.90	0.00	342	274	PEAK																																																																																									
Avg																																																																																																					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	45.10	54.00	-8.90	35.69	34.56	10.84	35.99	0.00	342	274	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>101.08</td><td>-----</td><td>-----</td><td>91.52</td><td>34.59</td><td>10.88</td><td>35.91</td><td>0.00</td><td>342</td><td>274</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	101.08	-----	-----	91.52	34.59	10.88	35.91	0.00	342	274	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5459.76	45.10	54.00	-8.90	35.69	34.56	10.84	35.99	0.00	342	274	AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5500.00	101.08	-----	-----	91.52	34.59	10.88	35.91	0.00	342	274	AVERAGE																																																																																									




		16																																																																
Mode		Harmonic																																																																
		U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																
ANT		CDD 0+1																																																																
Pol.		Horizontal																																																																
Peak Avg																																																																		
		Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	11000.00	52.60	74.00	-21.40	65.13	37.90	16.04	66.47	0.00	391	29	PEAK	2	11000.00	43.98	54.00	-10.02	56.51	37.90	16.04	66.47	0.00	391	29	AVERAGE	3	16500.00	57.96	68.20	-10.24	61.61	40.90	19.67	64.22	0.00	---	---
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																						
1	11000.00	52.60	74.00	-21.40	65.13	37.90	16.04	66.47	0.00	391	29	PEAK																																																						
2	11000.00	43.98	54.00	-10.02	56.51	37.90	16.04	66.47	0.00	391	29	AVERAGE																																																						
3	16500.00	57.96	68.20	-10.24	61.61	40.90	19.67	64.22	0.00	---	---	PEAK																																																						
		Vertical																																																																
Peak Avg																																																																		
		Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	10995.20	54.34	74.00	-19.66	66.87	37.90	16.04	66.47	0.00	100	350	Peak	2	10995.20	44.95	54.00	-9.05	57.48	37.90	16.04	66.47	0.00	100	350	Average	3	16500.70	63.97	68.20	-4.23	67.63	40.90	19.67	64.23	0.00	---	---
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																						
1	10995.20	54.34	74.00	-19.66	66.87	37.90	16.04	66.47	0.00	100	350	Peak																																																						
2	10995.20	44.95	54.00	-9.05	57.48	37.90	16.04	66.47	0.00	100	350	Average																																																						
3	16500.70	63.97	68.20	-4.23	67.63	40.90	19.67	64.23	0.00	---	---	Peak																																																						

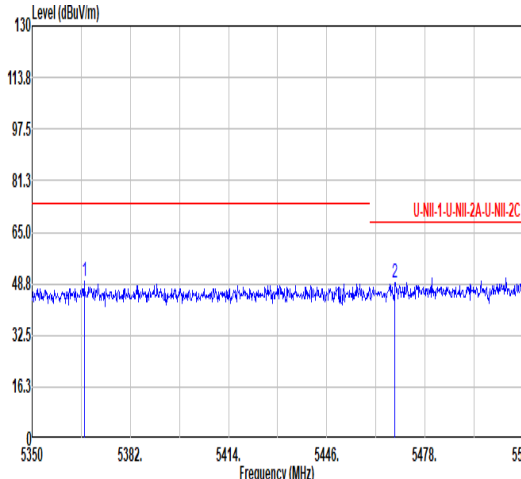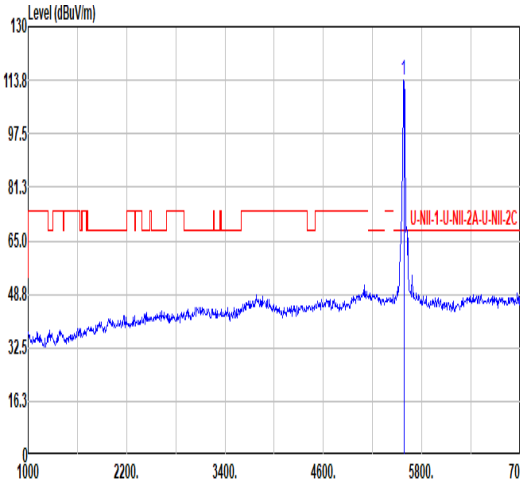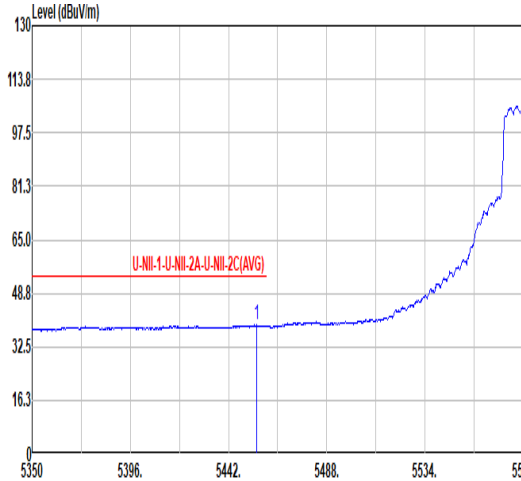
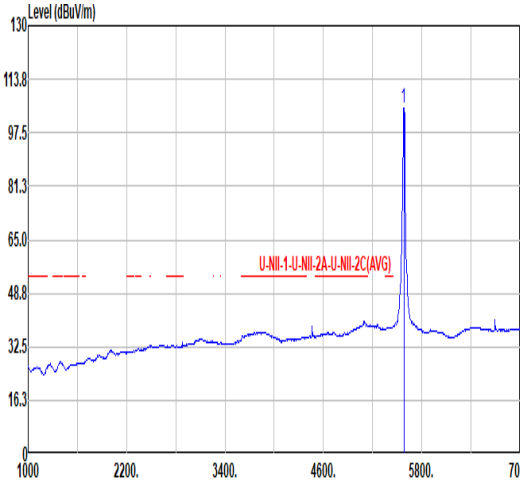


Mode	17																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH116_5580MHz																																																																																																																
ANT	CDD 0+1																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5366.96</td><td>49.48</td><td>74.00</td><td>-24.52</td><td>40.43</td><td>34.50</td><td>10.76</td><td>36.21</td><td>0.00</td><td>100</td><td>235</td><td>PEAK</td></tr><tr><td>2</td><td>5468.24</td><td>49.24</td><td>68.20</td><td>-18.96</td><td>39.79</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>100</td><td>235</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5366.96	49.48	74.00	-24.52	40.43	34.50	10.76	36.21	0.00	100	235	PEAK	2	5468.24	49.24	68.20	-18.96	39.79	34.57	10.85	35.97	0.00	100	235	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>113.98</td><td>-----</td><td>-----</td><td>104.11</td><td>34.60</td><td>10.98</td><td>35.71</td><td>0.00</td><td>100</td><td>235</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	113.98	-----	-----	104.11	34.60	10.98	35.71	0.00	100	235	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5366.96	49.48	74.00	-24.52	40.43	34.50	10.76	36.21	0.00	100	235	PEAK																																																																																																					
2	5468.24	49.24	68.20	-18.96	39.79	34.57	10.85	35.97	0.00	100	235	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5580.00	113.98	-----	-----	104.11	34.60	10.98	35.71	0.00	100	235	PEAK																																																																																																					
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.11</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>29.74</td><td>34.56</td><td>10.83</td><td>36.00</td><td>0.00</td><td>100</td><td>235</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.11	39.13	54.00	-14.87	29.74	34.56	10.83	36.00	0.00	100	235	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>105.11</td><td>-----</td><td>-----</td><td>95.22</td><td>34.60</td><td>10.98</td><td>35.69</td><td>0.00</td><td>100</td><td>235</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	105.11	-----	-----	95.22	34.60	10.98	35.69	0.00	100	235	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5455.11	39.13	54.00	-14.87	29.74	34.56	10.83	36.00	0.00	100	235	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5580.00	105.11	-----	-----	95.22	34.60	10.98	35.69	0.00	100	235	AVERAGE																																																																																																					



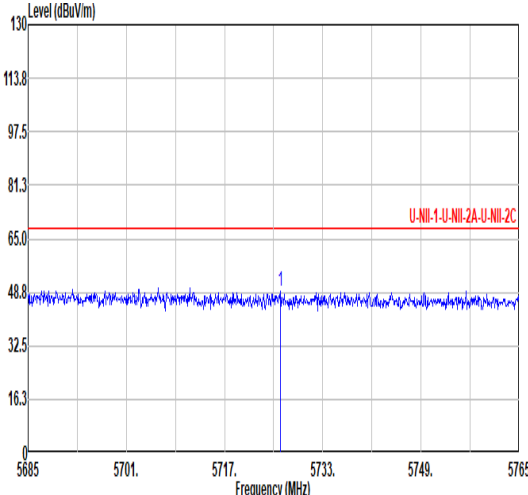


Mode	17																																																				
	Band Edge - R																																																				
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH116_5580MHz																																																				
ANT	CDD 0+1																																																				
Pol.	Horizontal						Fundamental																																														
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5726.04</td><td>49.08</td><td>68.20</td><td>-19.12</td><td>40.44</td><td>34.68</td><td>11.18</td><td>37.22</td><td>0.00</td><td>100</td><td>235 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5726.04	49.08	68.20	-19.12	40.44	34.68	11.18	37.22	0.00	100	235 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5726.04	49.08	68.20	-19.12	40.44	34.68	11.18	37.22	0.00	100	235 PEAK																																										

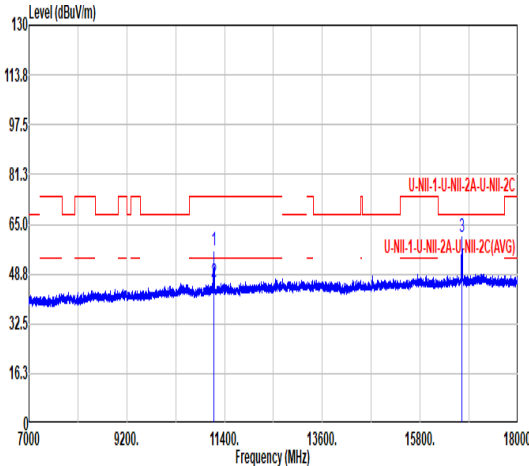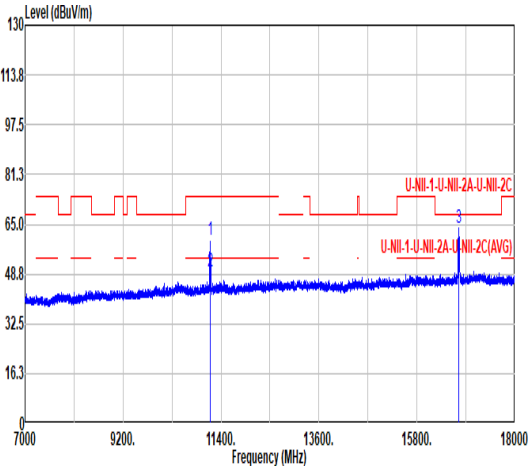

		17																																																																																																																																																																																												
Mode		Harmonic																																																																																																																																																																																												
		U-NII-2C_5.47-5.725_802.11ac VHT20_CH116_5580MHz																																																																																																																																																																																												
ANT		CDD 0+1																																																																																																																																																																																												
Pol.		Horizontal												Vertical																																																																																																																																																																																
Peak Avg																																																																																																																																																																																														
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="4">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>56.29</td><td>74.00</td><td>-17.71</td><td>68.51</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>104</td><td>236</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>11160.00</td><td>46.13</td><td>54.00</td><td>-7.87</td><td>58.35</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>104</td><td>236</td><td>AVERAGE</td><td></td></tr><tr><td>3</td><td>16732.80</td><td>60.75</td><td>68.20</td><td>-7.45</td><td>64.13</td><td>41.09</td><td>19.83</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	11160.00	56.29	74.00	-17.71	68.51	38.03	16.15	66.40	0.00	104	236	PEAK		2	11160.00	46.13	54.00	-7.87	58.35	38.03	16.15	66.40	0.00	104	236	AVERAGE		3	16732.80	60.75	68.20	-7.45	64.13	41.09	19.83	64.30	0.00	---	---	Peak		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="4">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>59.75</td><td>74.00</td><td>-14.25</td><td>71.97</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>286</td><td>75</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>11160.00</td><td>49.67</td><td>54.00</td><td>-4.33</td><td>61.89</td><td>38.03</td><td>16.15</td><td>66.40</td><td>0.00</td><td>286</td><td>75</td><td>AVERAGE</td><td></td></tr><tr><td>3</td><td>16737.20</td><td>63.57</td><td>68.20</td><td>-4.63</td><td>66.95</td><td>41.09</td><td>19.83</td><td>64.30</td><td>0.00</td><td>300</td><td>120</td><td>Peak</td><td></td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	11160.00	59.75	74.00	-14.25	71.97	38.03	16.15	66.40	0.00	286	75	PEAK		2	11160.00	49.67	54.00	-4.33	61.89	38.03	16.15	66.40	0.00	286	75	AVERAGE		3	16737.20	63.57	68.20	-4.63	66.95	41.09	19.83	64.30	0.00	300	120	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
1	11160.00	56.29	74.00	-17.71	68.51	38.03	16.15	66.40	0.00	104	236	PEAK																																																																																																																																																																																		
2	11160.00	46.13	54.00	-7.87	58.35	38.03	16.15	66.40	0.00	104	236	AVERAGE																																																																																																																																																																																		
3	16732.80	60.75	68.20	-7.45	64.13	41.09	19.83	64.30	0.00	---	---	Peak																																																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
1	11160.00	59.75	74.00	-14.25	71.97	38.03	16.15	66.40	0.00	286	75	PEAK																																																																																																																																																																																		
2	11160.00	49.67	54.00	-4.33	61.89	38.03	16.15	66.40	0.00	286	75	AVERAGE																																																																																																																																																																																		
3	16737.20	63.57	68.20	-4.63	66.95	41.09	19.83	64.30	0.00	300	120	Peak																																																																																																																																																																																		

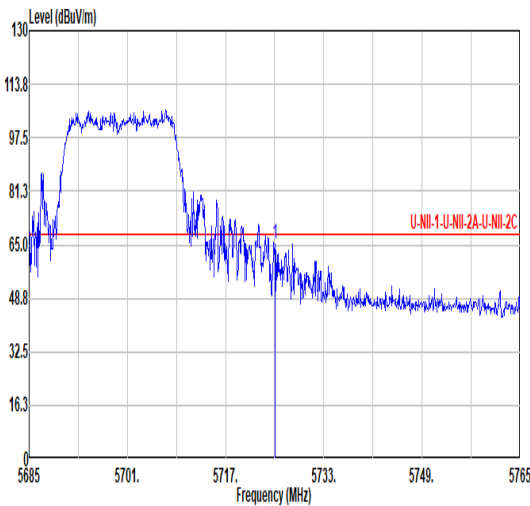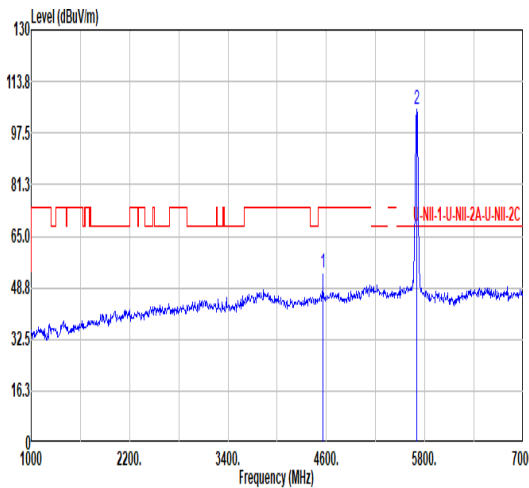
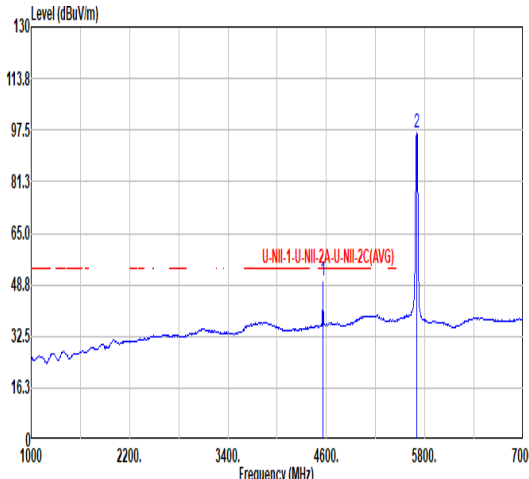


Mode	18																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																																																															
ANT	CDD 0+1																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5725.08</td><td>65.10</td><td>68.20</td><td>-3.10</td><td>56.44</td><td>34.68</td><td>11.18</td><td>37.20</td><td>0.00</td><td>100</td><td>344</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.08	65.10	68.20	-3.10	56.44	34.68	11.18	37.20	0.00	100	344	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4558.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>47.54</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>127</td><td>179</td><td>PEAK</td></tr><tr><td>2</td><td>5700.00</td><td>104.89</td><td>-----</td><td>-----</td><td>95.93</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>100</td><td>344</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4558.00	53.37	74.00	-20.63	47.54	33.96	9.96	38.09	0.00	127	179	PEAK	2	5700.00	104.89	-----	-----	95.93	34.61	11.15	36.80	0.00	100	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5725.08	65.10	68.20	-3.10	56.44	34.68	11.18	37.20	0.00	100	344	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4558.00	53.37	74.00	-20.63	47.54	33.96	9.96	38.09	0.00	127	179	PEAK																																																																																																				
2	5700.00	104.89	-----	-----	95.93	34.61	11.15	36.80	0.00	100	344	PEAK																																																																																																				
Avg	Blank																																																																																																															
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4558.00</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>44.32</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>127</td><td>179</td><td>AVERAGE</td></tr><tr><td>2</td><td>5700.00</td><td>96.52</td><td>-----</td><td>-----</td><td>87.56</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>100</td><td>344</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4558.00	50.15	54.00	-3.85	44.32	33.96	9.96	38.09	0.00	127	179	AVERAGE	2	5700.00	96.52	-----	-----	87.56	34.61	11.15	36.80	0.00	100	344	AVERAGE																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4558.00	50.15	54.00	-3.85	44.32	33.96	9.96	38.09	0.00	127	179	AVERAGE																																																																																																				
2	5700.00	96.52	-----	-----	87.56	34.61	11.15	36.80	0.00	100	344	AVERAGE																																																																																																				





Mode	18																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																																																													
ANT	CDD 0+1																																																																																																													
Pol.	Vertical						Fundamental																																																																																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5729.48</td><td>62.07</td><td>68.20</td><td>-6.13</td><td>53.49</td><td>34.69</td><td>11.18</td><td>37.29</td><td>0.00</td><td>100</td><td>85 PEAK</td></tr></table> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4558.00</td><td>51.64</td><td>74.00</td><td>-22.36</td><td>45.81</td><td>33.96</td><td>9.96</td><td>38.09</td><td>0.00</td><td>100</td><td>97 PEAK</td></tr><tr><td>2</td><td>5700.00</td><td>100.15</td><td>-----</td><td>-----</td><td>91.19</td><td>34.61</td><td>11.15</td><td>36.80</td><td>0.00</td><td>100</td><td>85 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5729.48	62.07	68.20	-6.13	53.49	34.69	11.18	37.29	0.00	100	85 PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4558.00	51.64	74.00	-22.36	45.81	33.96	9.96	38.09	0.00	100	97 PEAK	2	5700.00	100.15	-----	-----	91.19	34.61	11.15	36.80	0.00	100	85 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5729.48	62.07	68.20	-6.13	53.49	34.69	11.18	37.29	0.00	100	85 PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	4558.00	51.64	74.00	-22.36	45.81	33.96	9.96	38.09	0.00	100	97 PEAK																																																																																																			
2	5700.00	100.15	-----	-----	91.19	34.61	11.15	36.80	0.00	100	85 PEAK																																																																																																			

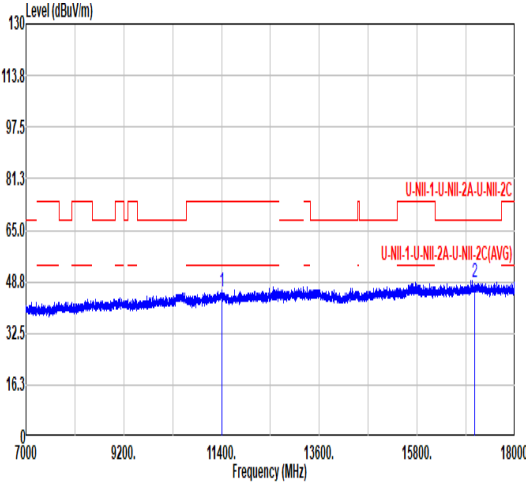
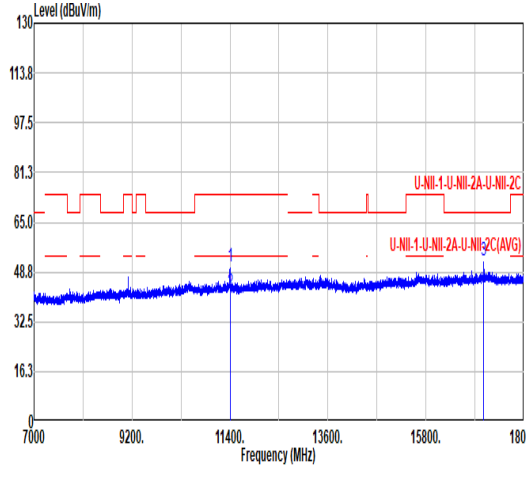


		18																																																																																	
Mode		Harmonic																																																																																	
		U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																																	
ANT		CDD 0+1																																																																																	
Pol.		Horizontal						Vertical																																																																											
Peak Avg																																																																																			
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>45.69</td><td>74.00</td><td>-28.31</td><td>57.46</td><td>38.22</td><td>16.30</td><td>66.29</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17100.00</td><td>48.58</td><td>68.20</td><td>-19.62</td><td>51.70</td><td>41.28</td><td>20.07</td><td>64.47</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	45.69	74.00	-28.31	57.46	38.22	16.30	66.29	0.00	---	---	PEAK	2	17100.00	48.58	68.20	-19.62	51.70	41.28	20.07	64.47	0.00	---	---	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	11400.00	45.69	74.00	-28.31	57.46	38.22	16.30	66.29	0.00	---	---	PEAK																																																																							
2	17100.00	48.58	68.20	-19.62	51.70	41.28	20.07	64.47	0.00	---	---	PEAK																																																																							
																																																																																			
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>50.67</td><td>74.00</td><td>-23.33</td><td>62.44</td><td>38.22</td><td>16.30</td><td>66.29</td><td>0.00</td><td>256</td><td>87</td><td>PEAK</td></tr><tr><td>2</td><td>11400.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>53.93</td><td>38.22</td><td>16.30</td><td>66.29</td><td>0.00</td><td>256</td><td>87</td><td>AVERAGE</td></tr><tr><td>3</td><td>17100.00</td><td>52.62</td><td>68.20</td><td>-15.58</td><td>55.74</td><td>41.28</td><td>20.07</td><td>64.47</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	50.67	74.00	-23.33	62.44	38.22	16.30	66.29	0.00	256	87	PEAK	2	11400.00	42.16	54.00	-11.84	53.93	38.22	16.30	66.29	0.00	256	87	AVERAGE	3	17100.00	52.62	68.20	-15.58	55.74	41.28	20.07	64.47	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	11400.00	50.67	74.00	-23.33	62.44	38.22	16.30	66.29	0.00	256	87	PEAK																																																																							
2	11400.00	42.16	54.00	-11.84	53.93	38.22	16.30	66.29	0.00	256	87	AVERAGE																																																																							
3	17100.00	52.62	68.20	-15.58	55.74	41.28	20.07	64.47	0.00	---	---	PEAK																																																																							

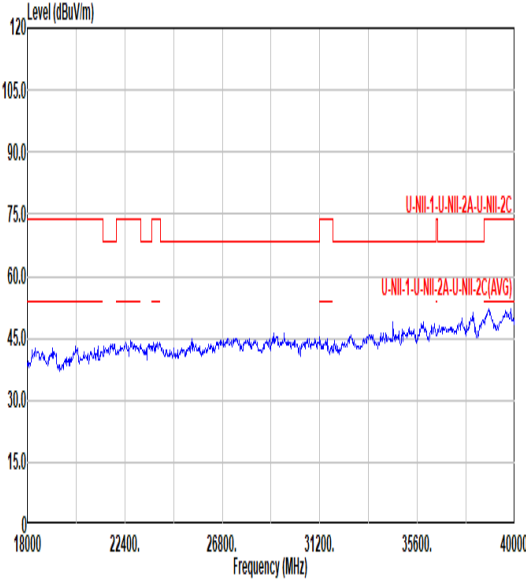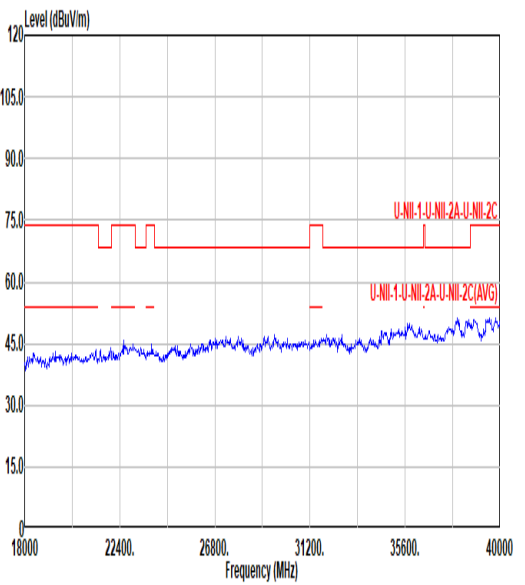

Mode	18	
	18G-40G	
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz	
ANT	CDD 0+1	
Pol.	Horizontal	Vertical
Peak Avg		

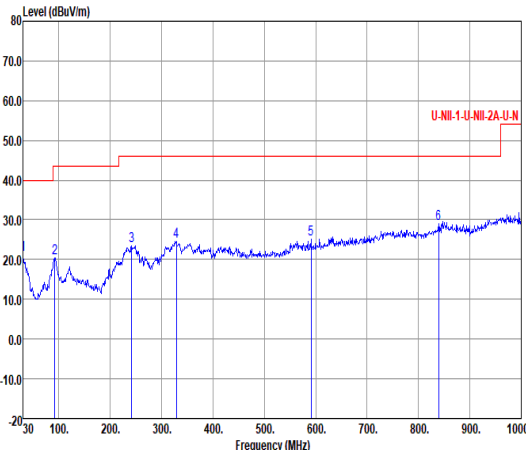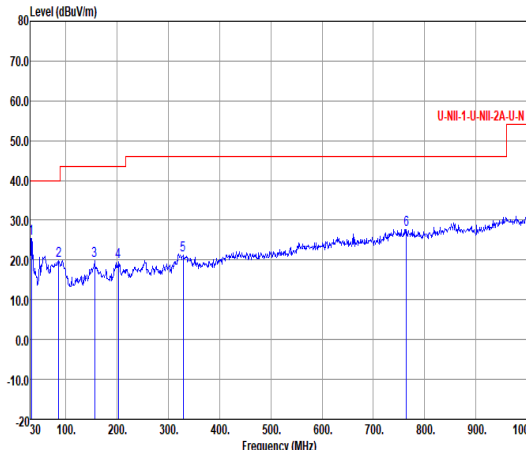

Mode	18																																																																																																																																																																																																						
	30-1G																																																																																																																																																																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																																																																																																																																																						
ANT	CDD 0+1																																																																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																																																																
QP																																																																																																																																																																																																							
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>CableAntenna Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>21.29</td><td>-18.71</td><td>40.00</td><td>29.03</td><td>0.71</td><td>24.57</td><td>33.02</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>92.08</td><td>20.40</td><td>-23.10</td><td>43.50</td><td>36.28</td><td>1.44</td><td>15.54</td><td>32.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>241.46</td><td>23.59</td><td>-22.41</td><td>46.00</td><td>36.10</td><td>2.37</td><td>17.90</td><td>32.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>328.76</td><td>24.64</td><td>-21.36</td><td>46.00</td><td>34.80</td><td>2.76</td><td>19.96</td><td>32.88</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>590.66</td><td>25.21</td><td>-20.79</td><td>46.00</td><td>29.62</td><td>3.71</td><td>24.97</td><td>33.09</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>838.98</td><td>28.91</td><td>-17.09</td><td>46.00</td><td>30.43</td><td>4.42</td><td>26.52</td><td>32.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	1	30.00	21.29	-18.71	40.00	29.03	0.71	24.57	33.02	---	---	Peak	2	92.08	20.40	-23.10	43.50	36.28	1.44	15.54	32.86	---	---	Peak	3	241.46	23.59	-22.41	46.00	36.10	2.37	17.90	32.78	---	---	Peak	4	328.76	24.64	-21.36	46.00	34.80	2.76	19.96	32.88	---	---	Peak	5	590.66	25.21	-20.79	46.00	29.62	3.71	24.97	33.09	---	---	Peak	6	838.98	28.91	-17.09	46.00	30.43	4.42	26.52	32.46	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>CableAntenna Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>32.91</td><td>25.50</td><td>-14.50</td><td>40.00</td><td>34.62</td><td>0.76</td><td>23.06</td><td>32.94</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>86.26</td><td>19.80</td><td>-20.20</td><td>40.00</td><td>36.85</td><td>1.39</td><td>14.39</td><td>32.83</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>156.10</td><td>19.97</td><td>-23.53</td><td>43.50</td><td>34.60</td><td>1.89</td><td>16.30</td><td>32.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>202.66</td><td>19.44</td><td>-24.06</td><td>43.50</td><td>34.53</td><td>2.17</td><td>15.58</td><td>32.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>328.76</td><td>21.29</td><td>-24.71</td><td>46.00</td><td>31.45</td><td>2.76</td><td>19.96</td><td>32.88</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>764.29</td><td>27.59</td><td>-18.41</td><td>46.00</td><td>30.19</td><td>4.23</td><td>25.95</td><td>32.78</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	1	32.91	25.50	-14.50	40.00	34.62	0.76	23.06	32.94	---	---	Peak	2	86.26	19.80	-20.20	40.00	36.85	1.39	14.39	32.83	---	---	Peak	3	156.10	19.97	-23.53	43.50	34.60	1.89	16.30	32.82	---	---	Peak	4	202.66	19.44	-24.06	43.50	34.53	2.17	15.58	32.84	---	---	Peak	5	328.76	21.29	-24.71	46.00	31.45	2.76	19.96	32.88	---	---	Peak	6	764.29	27.59	-18.41	46.00	30.19	4.23	25.95	32.78	---	---	Peak
		Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																												
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																																																																																																																												
	1	30.00	21.29	-18.71	40.00	29.03	0.71	24.57	33.02	---	---	Peak																																																																																																																																																																																											
	2	92.08	20.40	-23.10	43.50	36.28	1.44	15.54	32.86	---	---	Peak																																																																																																																																																																																											
	3	241.46	23.59	-22.41	46.00	36.10	2.37	17.90	32.78	---	---	Peak																																																																																																																																																																																											
	4	328.76	24.64	-21.36	46.00	34.80	2.76	19.96	32.88	---	---	Peak																																																																																																																																																																																											
	5	590.66	25.21	-20.79	46.00	29.62	3.71	24.97	33.09	---	---	Peak																																																																																																																																																																																											
	6	838.98	28.91	-17.09	46.00	30.43	4.42	26.52	32.46	---	---	Peak																																																																																																																																																																																											
	Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																																																																																																																													
1	32.91	25.50	-14.50	40.00	34.62	0.76	23.06	32.94	---	---	Peak																																																																																																																																																																																												
2	86.26	19.80	-20.20	40.00	36.85	1.39	14.39	32.83	---	---	Peak																																																																																																																																																																																												
3	156.10	19.97	-23.53	43.50	34.60	1.89	16.30	32.82	---	---	Peak																																																																																																																																																																																												
4	202.66	19.44	-24.06	43.50	34.53	2.17	15.58	32.84	---	---	Peak																																																																																																																																																																																												
5	328.76	21.29	-24.71	46.00	31.45	2.76	19.96	32.88	---	---	Peak																																																																																																																																																																																												
6	764.29	27.59	-18.41	46.00	30.19	4.23	25.95	32.78	---	---	Peak																																																																																																																																																																																												

Mode

19

Band Edge - L

U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz

ANT


CDD 0+1

Pol.


Horizontal

Fundamental

Peak

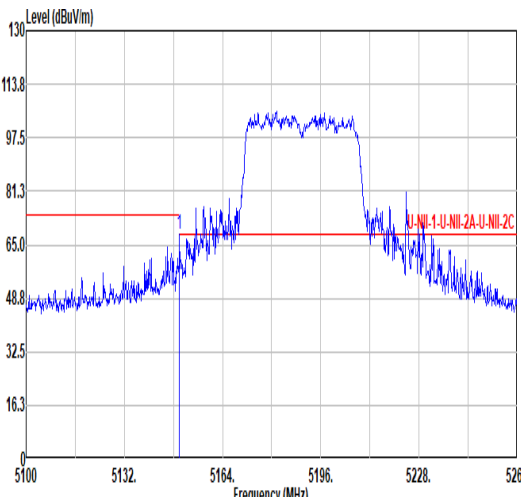


	Limit	Read	Ant	Cable	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB
1	5149.92	68.18	74.00	-5.82	60.15	34.15	10.61	36.73

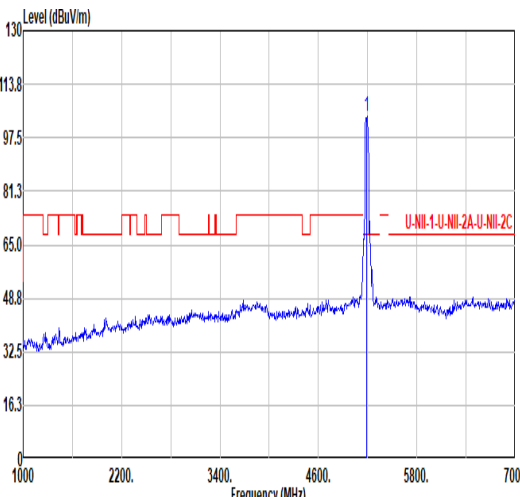


	Limit	Read	Ant	Cable	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB
1	5190.00	104.11	-----	-----	95.81	34.28	10.65	36.63

Avg

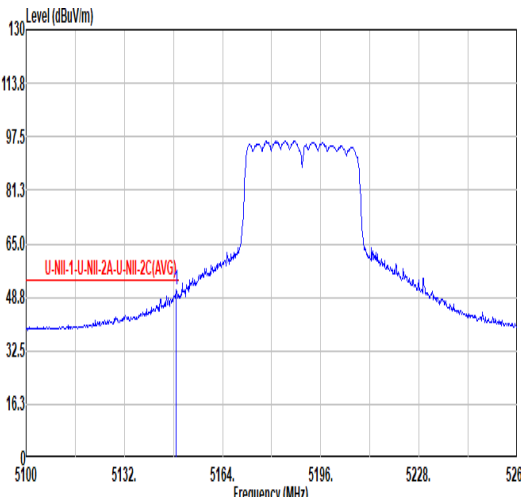

	Limit	Read	Ant	Cable	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB
1	5148.96	50.82	54.00	-3.18	42.80	34.15	10.61	36.74




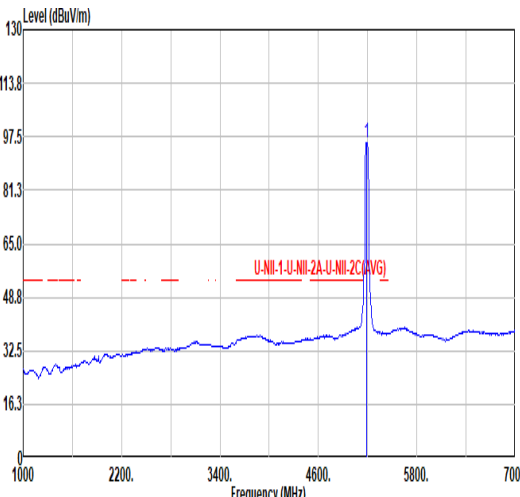


	Limit	Read	Ant	Cable	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB
1	5190.00	95.75	-----	-----	87.52	34.25	10.64	36.66





Mode	19																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5376.03</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>38.66</td><td>34.50</td><td>10.76</td><td>36.19</td><td>0.00</td><td>143</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5376.03	47.73	74.00	-26.27	38.66	34.50	10.76	36.19	0.00	143	360	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5376.03	47.73	74.00	-26.27	38.66	34.50	10.76	36.19	0.00	143	360	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5366.85</td><td>38.45</td><td>54.00</td><td>-15.55</td><td>29.40</td><td>34.50</td><td>10.76</td><td>36.21</td><td>0.00</td><td>143</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5366.85	38.45	54.00	-15.55	29.40	34.50	10.76	36.21	0.00	143	360	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5366.85	38.45	54.00	-15.55	29.40	34.50	10.76	36.21	0.00	143	360	AVERAGE																																											

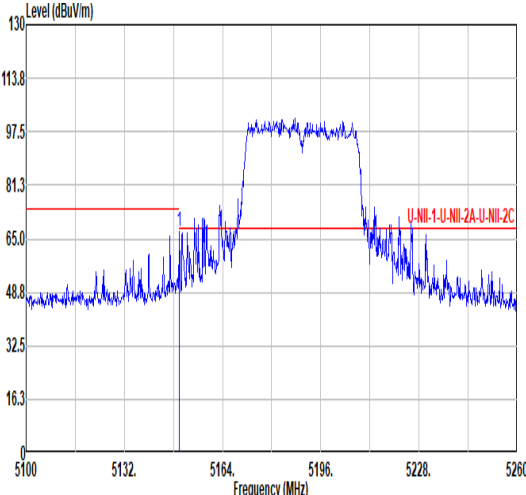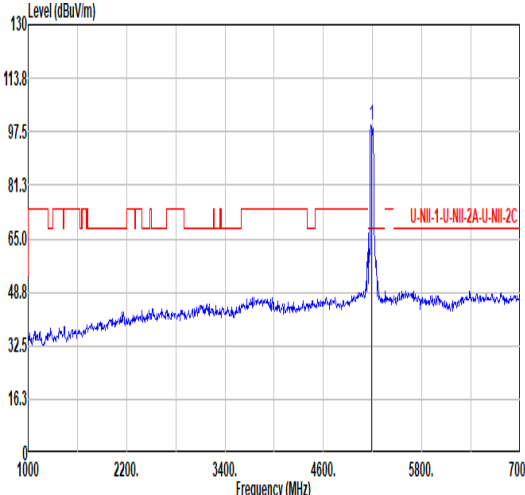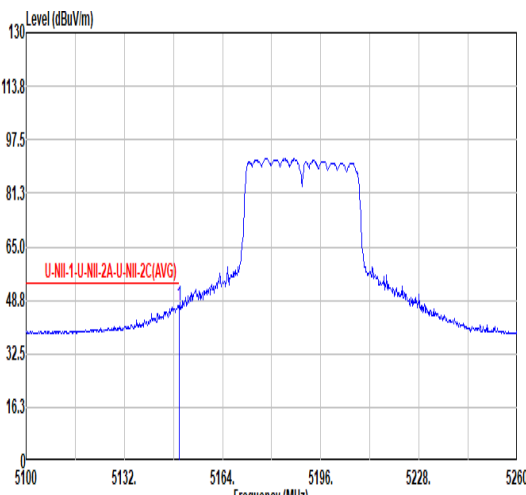
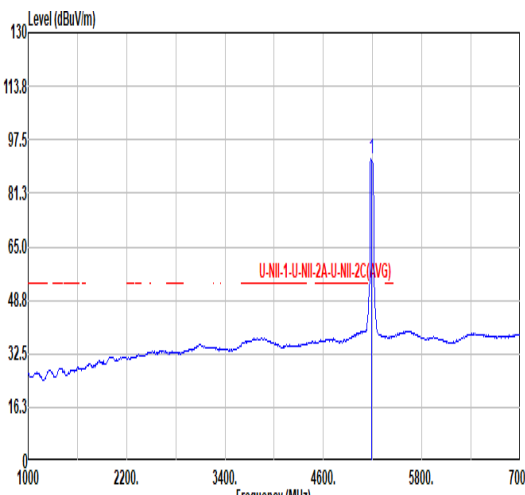


Mode	19																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																																														
ANT	CDD 0+1																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.92</td><td>67.03</td><td>74.00</td><td>-6.97</td><td>59.00</td><td>34.15</td><td>10.61</td><td>36.73</td><td>0.00</td><td>306</td><td>228</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.92	67.03	74.00	-6.97	59.00	34.15	10.61	36.73	0.00	306	228	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>99.62</td><td>-----</td><td>-----</td><td>91.39</td><td>34.25</td><td>10.64</td><td>36.66</td><td>0.00</td><td>306</td><td>228</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	99.62	-----	-----	91.39	34.25	10.64	36.66	0.00	306	228
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.92	67.03	74.00	-6.97	59.00	34.15	10.61	36.73	0.00	306	228	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5190.00	99.62	-----	-----	91.39	34.25	10.64	36.66	0.00	306	228	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.92</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>39.19</td><td>34.15</td><td>10.61</td><td>36.73</td><td>0.00</td><td>306</td><td>228</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.92	47.22	54.00	-6.78	39.19	34.15	10.61	36.73	0.00	306	228	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>91.58</td><td>-----</td><td>-----</td><td>83.38</td><td>34.23</td><td>10.64</td><td>36.67</td><td>0.00</td><td>306</td><td>228</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	91.58	-----	-----	83.38	34.23	10.64	36.67	0.00	306	228
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.92	47.22	54.00	-6.78	39.19	34.15	10.61	36.73	0.00	306	228	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5190.00	91.58	-----	-----	83.38	34.23	10.64	36.67	0.00	306	228	AVERAGE																																																																																																			



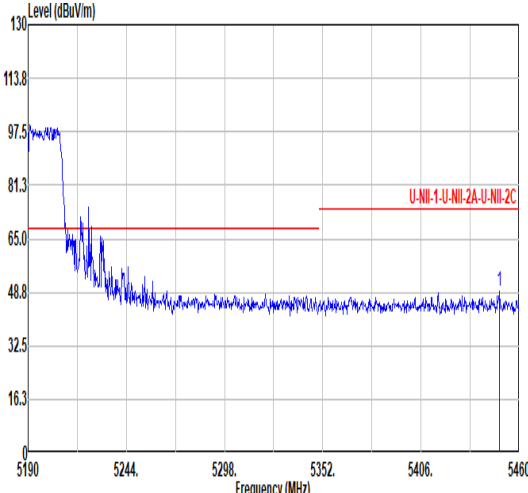
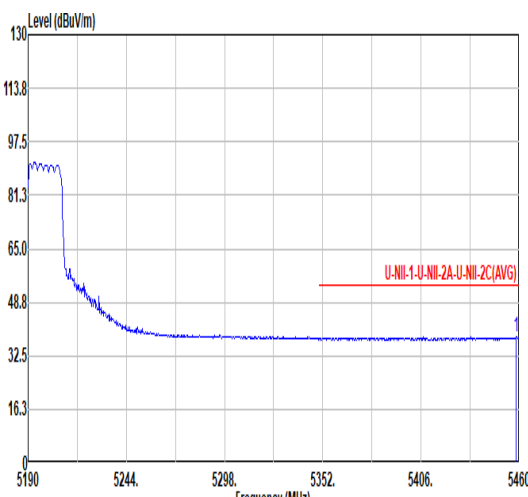


Mode	19																																																											
	Band Edge - R																																																											
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																											
ANT	CDD 0+1																																																											
Pol.	Vertical																																																											
Peak	Level (dBuV/m)  U-NII-1-U-NII-2A-U-NII-2C <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5448.93</td><td>49.17</td><td>74.00</td><td>-24.83</td><td>39.81</td><td>34.55</td><td>10.83</td><td>36.02</td><td>0.00</td><td>306</td><td>228 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5448.93	49.17	74.00	-24.83	39.81	34.55	10.83	36.02	0.00	306	228 PEAK	Fundamental
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5448.93	49.17	74.00	-24.83	39.81	34.55	10.83	36.02	0.00	306	228 PEAK																																																	
Blank																																																												
Avg	Level (dBuV/m)  U-NII-1-U-NII-2A-U-NII-2C(AVG) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.38</td><td>38.14</td><td>54.00</td><td>-15.86</td><td>28.74</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>306</td><td>228 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5458.38	38.14	54.00	-15.86	28.74	34.56	10.84	36.00	0.00	306	228 AVERAGE	Fundamental
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5458.38	38.14	54.00	-15.86	28.74	34.56	10.84	36.00	0.00	306	228 AVERAGE																																																	
Blank																																																												

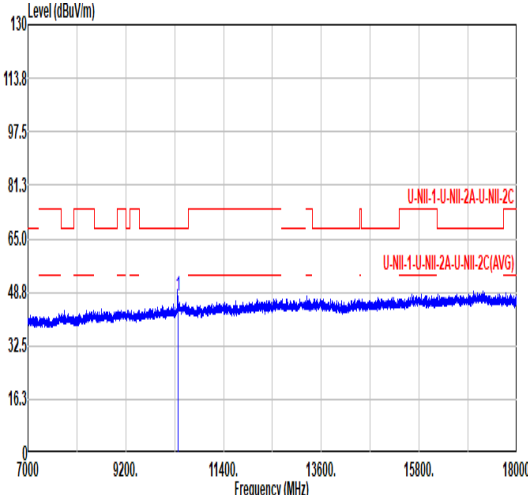
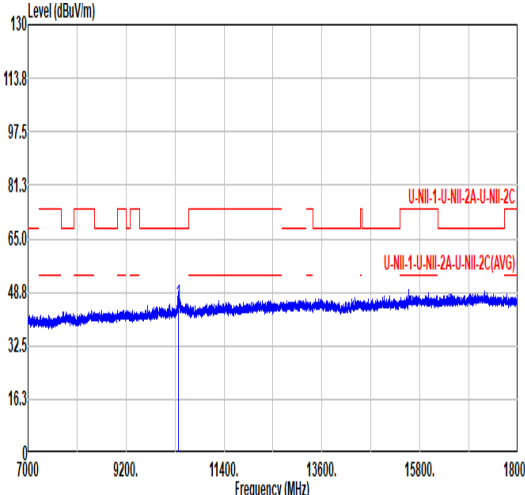


Mode	19																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																																					
ANT	CDD 0+1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>47.51</td><td>68.20</td><td>-20.69</td><td>61.31</td><td>37.47</td><td>15.47</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10380.00	47.51	68.20	-20.69	61.31	37.47	15.47	66.74	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>45.12</td><td>68.20</td><td>-23.08</td><td>58.92</td><td>37.47</td><td>15.47</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10380.00	45.12	68.20	-23.08	58.92	37.47	15.47	66.74	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	10380.00	47.51	68.20	-20.69	61.31	37.47	15.47	66.74	0.00	---	---	PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	10380.00	45.12	68.20	-23.08	58.92	37.47	15.47	66.74	0.00	---	---	PEAK																																																																																										

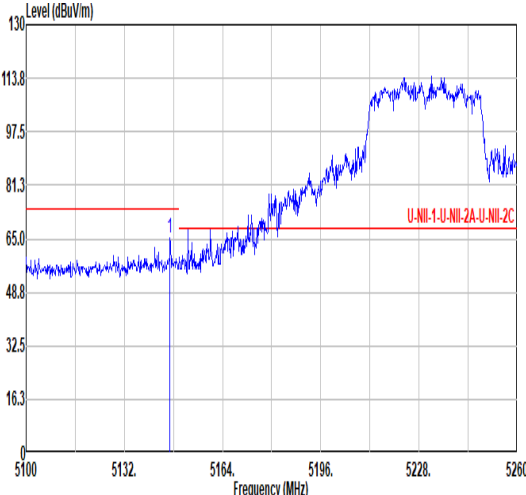
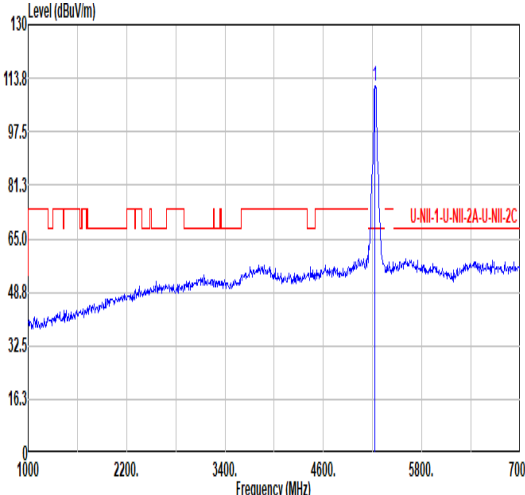
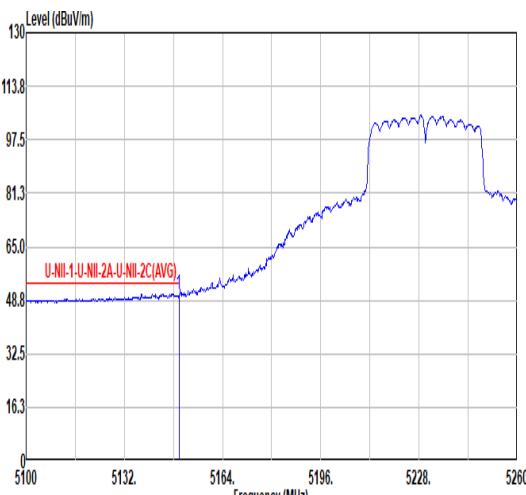
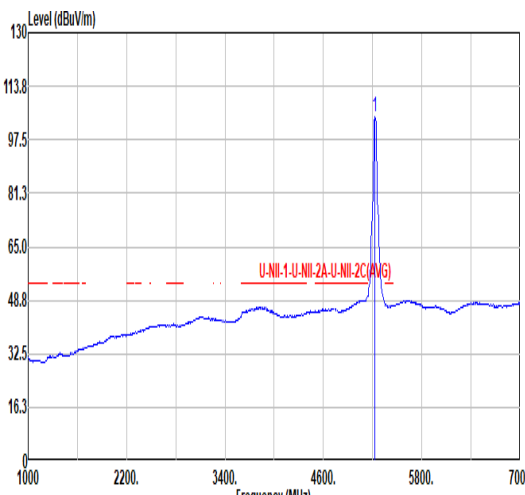


Mode	20																																																																																																																																		
	Band Edge - L																																																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																																																																		
ANT	CDD 0+1																																																																																																																																		
Pol.	Horizontal						Fundamental																																																																																																																												
Peak																																																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr></thead><tbody><tr><td>1</td><td>5146.88</td><td>65.34</td><td>74.00</td><td>-8.66</td><td>57.33</td><td>34.14</td><td>10.61</td><td>36.74</td><td>0.00</td><td>160</td><td>182</td><td colspan="3">PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	5146.88	65.34	74.00	-8.66	57.33	34.14	10.61	36.74	0.00	160	182	PEAK			<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>111.57</td><td>-----</td><td>-----</td><td>103.05</td><td>34.37</td><td>10.68</td><td>36.53</td><td>0.00</td><td>160</td><td>182</td><td colspan="3">PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	5230.00	111.57	-----	-----	103.05	34.37	10.68	36.53	0.00	160	182	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5146.88	65.34	74.00	-8.66	57.33	34.14	10.61	36.74	0.00	160	182	PEAK																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5230.00	111.57	-----	-----	103.05	34.37	10.68	36.53	0.00	160	182	PEAK																																																																																																																							
Avg																																																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>50.70</td><td>54.00</td><td>-3.30</td><td>42.68</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>160</td><td>182</td><td colspan="3">AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	5149.76	50.70	54.00	-3.30	42.68	34.15	10.61	36.74	0.00	160	182	AVERAGE			<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>104.30</td><td>-----</td><td>-----</td><td>95.80</td><td>34.36</td><td>10.68</td><td>36.54</td><td>0.00</td><td>160</td><td>182</td><td colspan="3">AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	5230.00	104.30	-----	-----	95.80	34.36	10.68	36.54	0.00	160	182	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5149.76	50.70	54.00	-3.30	42.68	34.15	10.61	36.74	0.00	160	182	AVERAGE																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	5230.00	104.30	-----	-----	95.80	34.36	10.68	36.54	0.00	160	182	AVERAGE																																																																																																																							

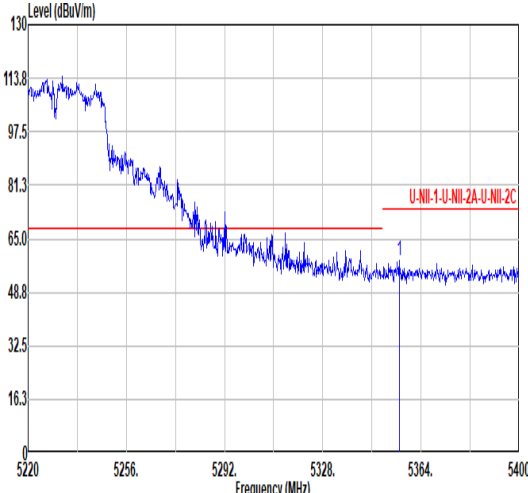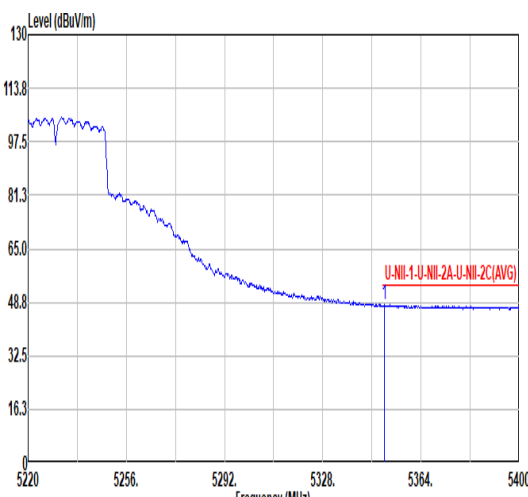

Mode	20																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																					
ANT	CDD 0+1																																																					
Pol.	Horizontal										Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.00</td><td>58.52</td><td>74.00</td><td>-15.48</td><td>49.51</td><td>34.50</td><td>10.75</td><td>36.24</td><td>0.00</td><td>160</td><td>182</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.00	58.52	74.00	-15.48	49.51	34.50	10.75	36.24	0.00	160	182	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5356.00	58.52	74.00	-15.48	49.51	34.50	10.75	36.24	0.00	160	182	PEAK																																										
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.68</td><td>47.86</td><td>54.00</td><td>-6.14</td><td>38.86</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>160</td><td>182</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.68	47.86	54.00	-6.14	38.86	34.50	10.75	36.25	0.00	160	182	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5350.68	47.86	54.00	-6.14	38.86	34.50	10.75	36.25	0.00	160	182	AVERAGE																																										

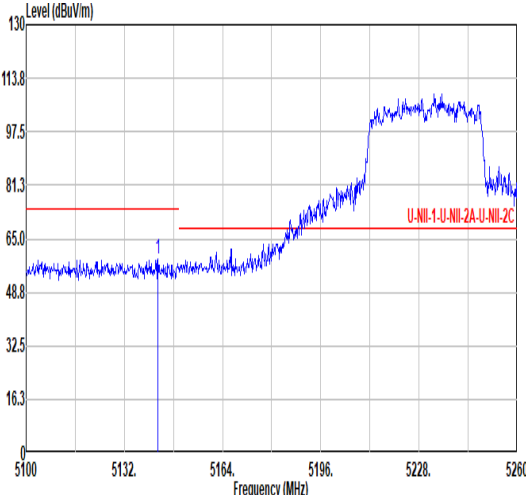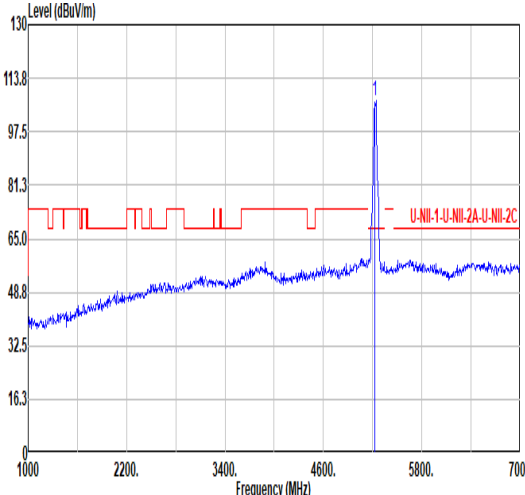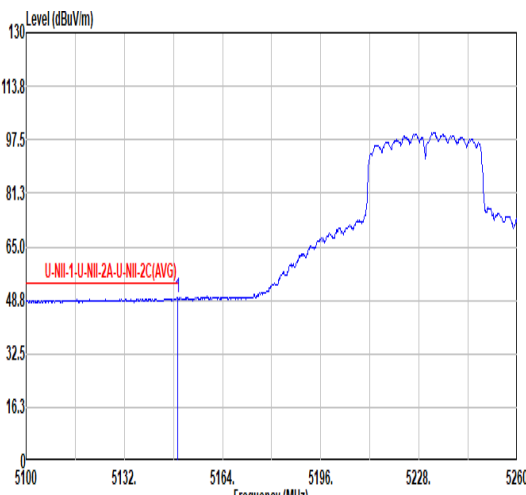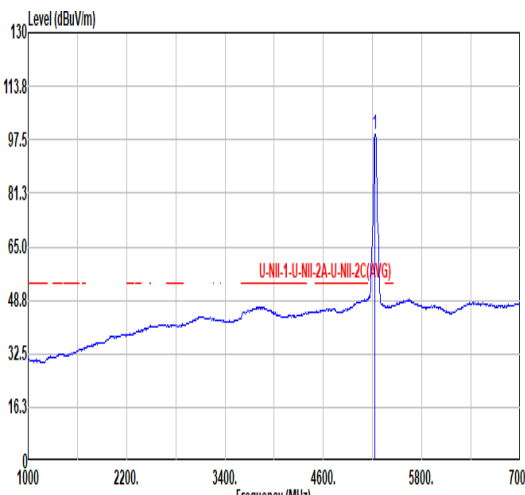

Mode	20																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.88</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>50.79</td><td>34.13</td><td>10.60</td><td>36.75</td><td>0.00</td><td>380</td><td>276</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.88	58.77	74.00	-15.23	50.79	34.13	10.60	36.75	0.00	380	276	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>106.71</td><td>-----</td><td>-----</td><td>98.16</td><td>34.38</td><td>10.68</td><td>36.51</td><td>0.00</td><td>380</td><td>276</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	106.71	-----	-----	98.16	34.38	10.68	36.51	0.00	380	276
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5142.88	58.77	74.00	-15.23	50.79	34.13	10.60	36.75	0.00	380	276	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	106.71	-----	-----	98.16	34.38	10.68	36.51	0.00	380	276	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.28</td><td>49.44</td><td>54.00</td><td>-4.56</td><td>41.42</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>380</td><td>276</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.28	49.44	54.00	-4.56	41.42	34.15	10.61	36.74	0.00	380	276	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>99.27</td><td>-----</td><td>-----</td><td>90.77</td><td>34.36</td><td>10.68</td><td>36.54</td><td>0.00</td><td>380</td><td>276</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	99.27	-----	-----	90.77	34.36	10.68	36.54	0.00	380	276
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.28	49.44	54.00	-4.56	41.42	34.15	10.61	36.74	0.00	380	276	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	99.27	-----	-----	90.77	34.36	10.68	36.54	0.00	380	276	AVERAGE																																																																																							







Mode	20																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5362.38</td><td>58.57</td><td>74.00</td><td>-15.43</td><td>49.55</td><td>34.50</td><td>10.75</td><td>36.23</td><td>0.00</td><td>300</td><td>276</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5362.38	58.57	74.00	-15.43	49.55	34.50	10.75	36.23	0.00	300	276	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5362.38	58.57	74.00	-15.43	49.55	34.50	10.75	36.23	0.00	300	276	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.74</td><td>47.43</td><td>54.00</td><td>-6.57</td><td>38.43</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>300</td><td>276</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.74	47.43	54.00	-6.57	38.43	34.50	10.75	36.25	0.00	300	276	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5353.74	47.43	54.00	-6.57	38.43	34.50	10.75	36.25	0.00	300	276	AVERAGE																																											





Mode	20																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																																																								
ANT	CDD 0+1																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																							
Peak Avg																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10449.60</td><td>51.93</td><td>68.20</td><td>-16.27</td><td>65.60</td><td>37.51</td><td>15.53</td><td>66.71</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>15692.20</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>60.03</td><td>40.22</td><td>19.14</td><td>64.14</td><td>0.00 300 286 Peak</td></tr><tr><td>3</td><td>15692.20</td><td>46.23</td><td>54.00</td><td>-7.77</td><td>51.01</td><td>40.22</td><td>19.14</td><td>64.14</td><td>0.00 300 286 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10449.60	51.93	68.20	-16.27	65.60	37.51	15.53	66.71	0.00 --- --- Peak	2	15692.20	55.25	74.00	-18.75	60.03	40.22	19.14	64.14	0.00 300 286 Peak	3	15692.20	46.23	54.00	-7.77	51.01	40.22	19.14	64.14	0.00 300 286 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10452.90</td><td>51.74</td><td>68.20</td><td>-16.46</td><td>65.38</td><td>37.52</td><td>15.54</td><td>66.70</td><td>0.00 --- --- Peak</td></tr><tr><td>2</td><td>15690.00</td><td>60.71</td><td>74.00</td><td>-13.29</td><td>65.49</td><td>40.22</td><td>19.14</td><td>64.14</td><td>0.00 214 68 PEAK</td></tr><tr><td>3</td><td>15690.00</td><td>50.57</td><td>54.00</td><td>-3.43</td><td>55.36</td><td>40.21</td><td>19.14</td><td>64.14</td><td>0.00 214 68 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10452.90	51.74	68.20	-16.46	65.38	37.52	15.54	66.70	0.00 --- --- Peak	2	15690.00	60.71	74.00	-13.29	65.49	40.22	19.14	64.14	0.00 214 68 PEAK	3	15690.00	50.57	54.00	-3.43	55.36	40.21	19.14	64.14
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	10449.60	51.93	68.20	-16.27	65.60	37.51	15.53	66.71	0.00 --- --- Peak																																																																																																																
2	15692.20	55.25	74.00	-18.75	60.03	40.22	19.14	64.14	0.00 300 286 Peak																																																																																																																
3	15692.20	46.23	54.00	-7.77	51.01	40.22	19.14	64.14	0.00 300 286 Average																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	10452.90	51.74	68.20	-16.46	65.38	37.52	15.54	66.70	0.00 --- --- Peak																																																																																																																
2	15690.00	60.71	74.00	-13.29	65.49	40.22	19.14	64.14	0.00 214 68 PEAK																																																																																																																
3	15690.00	50.57	54.00	-3.43	55.36	40.21	19.14	64.14	0.00 214 68 AVERAGE																																																																																																																

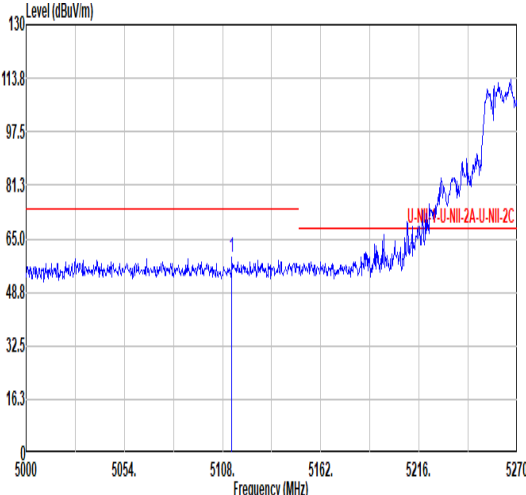
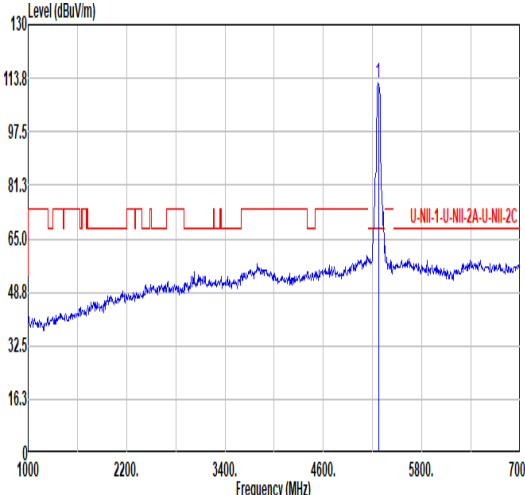
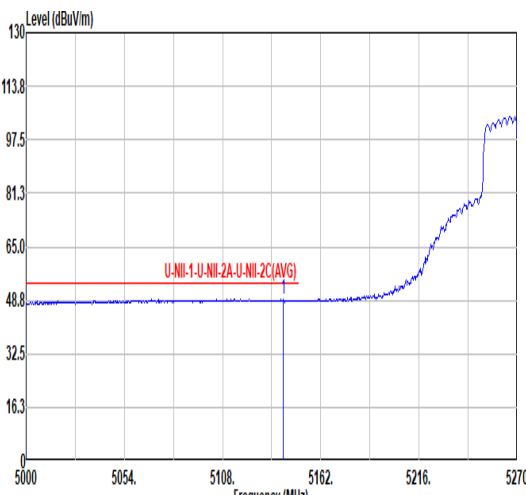
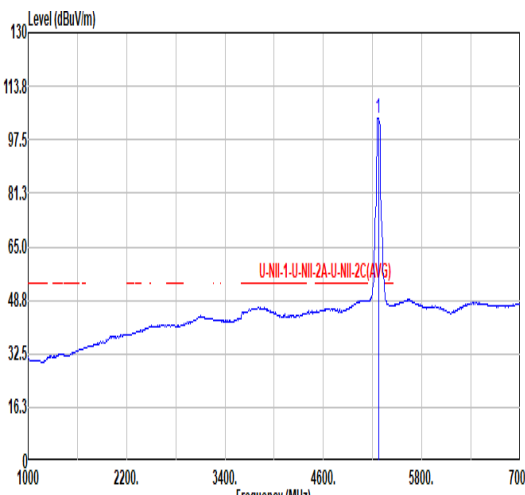


Mode	21																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																																																																																														
ANT	CDD 0+1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5113.13</td><td>59.19</td><td>74.00</td><td>-14.81</td><td>51.40</td><td>34.04</td><td>10.57</td><td>36.82</td><td>0.00</td><td>128</td><td>178</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5113.13	59.19	74.00	-14.81	51.40	34.04	10.57	36.82	0.00	128	178	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>112.26</td><td>-----</td><td>-----</td><td>103.59</td><td>34.43</td><td>10.70</td><td>36.46</td><td>0.00</td><td>128</td><td>178</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	112.26	-----	-----	103.59	34.43	10.70	36.46	0.00	128	178
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5113.13	59.19	74.00	-14.81	51.40	34.04	10.57	36.82	0.00	128	178	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5270.00	112.26	-----	-----	103.59	34.43	10.70	36.46	0.00	128	178	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.21</td><td>48.88</td><td>54.00</td><td>-5.12</td><td>40.92</td><td>34.12</td><td>10.60</td><td>36.76</td><td>0.00</td><td>128</td><td>178</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.21	48.88	54.00	-5.12	40.92	34.12	10.60	36.76	0.00	128	178	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>104.23</td><td>-----</td><td>-----</td><td>95.56</td><td>34.43</td><td>10.70</td><td>36.46</td><td>0.00</td><td>128</td><td>178</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	104.23	-----	-----	95.56	34.43	10.70	36.46	0.00	128	178
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5141.21	48.88	54.00	-5.12	40.92	34.12	10.60	36.76	0.00	128	178	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5270.00	104.23	-----	-----	95.56	34.43	10.70	36.46	0.00	128	178	AVERAGE																																																																																																			

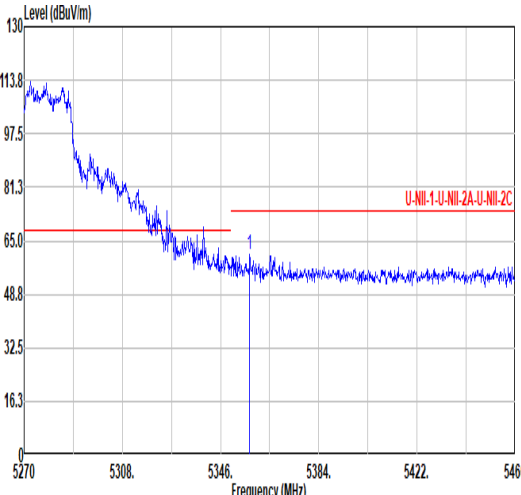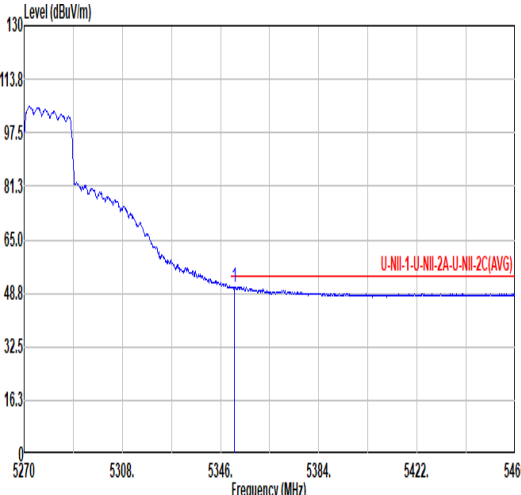

Mode	21																																															
	Band Edge - R																																															
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																															
ANT	CDD 0+1																																															
Pol.	Horizontal						Fundamental																																									
Peak							Blank																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5357.21</td><td>60.89</td><td>74.00</td><td>-13.11</td><td>51.88</td><td>34.50</td><td>10.75</td><td>36.24</td><td>0.00</td><td>128</td><td>178</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5357.21	60.89	74.00	-13.11	51.88	34.50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																						
1	5357.21	60.89	74.00	-13.11	51.88	34.50	10.75	36.24	0.00	128	178	PEAK																																				
Avg							Blank																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.32</td><td>50.62</td><td>54.00</td><td>-3.38</td><td>41.62</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>128</td><td>178</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.32	50.62	54.00	-3.38	41.62	34.50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																						
1	5351.32	50.62	54.00	-3.38	41.62	34.50	10.75	36.25	0.00	128	178	AVERAGE																																				

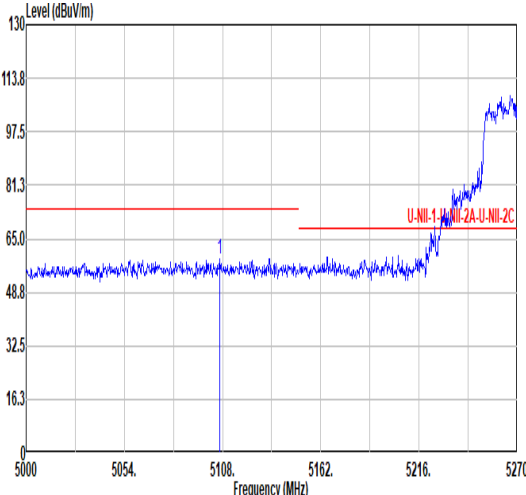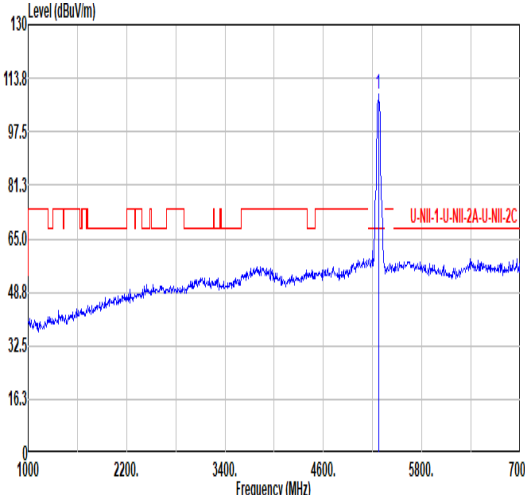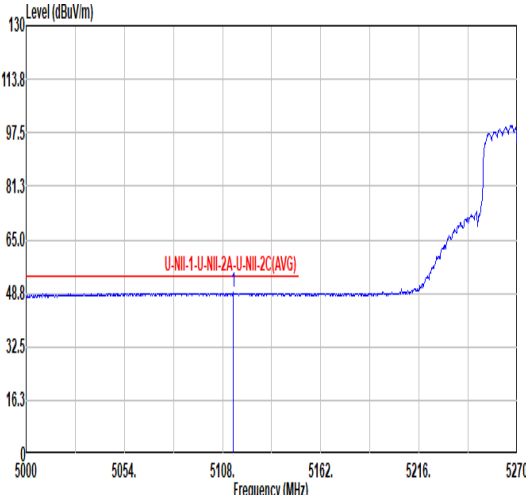
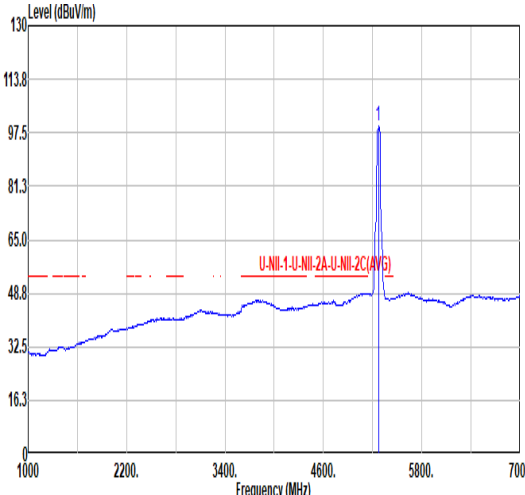


Mode	21																																																						
	Band Edge - L																																																						
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.38</td><td>58.79</td><td>74.00</td><td>-15.21</td><td>51.05</td><td>34.02</td><td>10.56</td><td>36.84</td><td>0.00</td><td>313</td><td>262</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5106.38	58.79	74.00	-15.21	51.05	34.02	10.56	36.84	0.00	313	262
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5106.38	58.79	74.00	-15.21	51.05	34.02	10.56	36.84	0.00	313	262	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>108.86</td><td>-----</td><td>-----</td><td>100.12</td><td>34.46</td><td>10.71</td><td>36.43</td><td>0.00</td><td>313</td><td>262</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	108.86	-----	-----	100.12	34.46	10.71	36.43	0.00	313	262
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5270.00	108.86	-----	-----	100.12	34.46	10.71	36.43	0.00	313	262	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5113.67</td><td>48.83</td><td>54.00</td><td>-5.17</td><td>41.04</td><td>34.04</td><td>10.57</td><td>36.82</td><td>0.00</td><td>313</td><td>262</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5113.67	48.83	54.00	-5.17	41.04	34.04	10.57	36.82	0.00	313	262
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5113.67	48.83	54.00	-5.17	41.04	34.04	10.57	36.82	0.00	313	262	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>99.64</td><td>-----</td><td>-----</td><td>90.90</td><td>34.46</td><td>10.71</td><td>36.43</td><td>0.00</td><td>313</td><td>262</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	99.64	-----	-----	90.90	34.46	10.71	36.43	0.00	313	262
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5270.00	99.64	-----	-----	90.90	34.46	10.71	36.43	0.00	313	262	AVERAGE																																											



Mode	21																																												
	Band Edge - R																																												
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																												
ANT	CDD 0+1																																												
Pol.	Vertical	Fundamental																																											
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5389.32</td><td>57.81</td><td>74.00</td><td>-16.19</td><td>48.70</td><td>34.50</td><td>10.77</td><td>36.16</td><td>0.00</td><td>313</td><td>262</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5389.32	57.81	74.00	-16.19	48.70	34.50	10.77	36.16	0.00	313	262	PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5389.32	57.81	74.00	-16.19	48.70	34.50	10.77	36.16	0.00	313	262	PEAK																																	
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.75</td><td>48.03</td><td>54.00</td><td>-5.97</td><td>39.03</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>313</td><td>262</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.75	48.03	54.00	-5.97	39.03	34.50	10.75	36.25	0.00	313	262	AVERAGE	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5350.75	48.03	54.00	-5.97	39.03	34.50	10.75	36.25	0.00	313	262	AVERAGE																																	

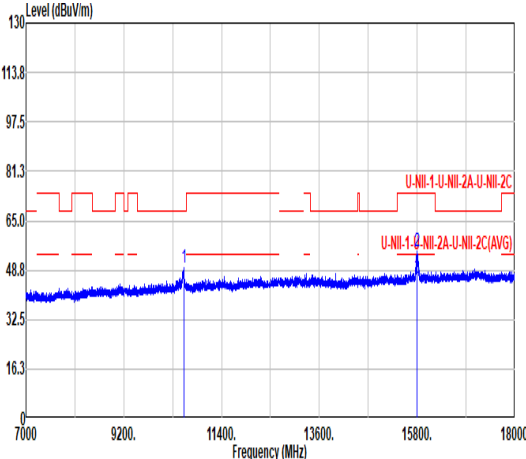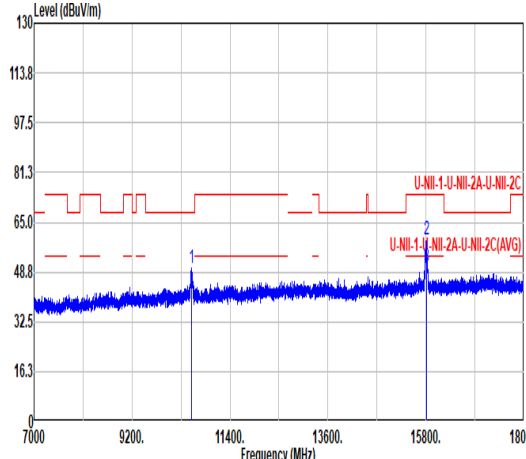

		21																																																																					
Mode		Harmonic																																																																					
		U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																																																					
ANT		CDD 0+1																																																																					
Pol.		Horizontal					Vertical																																																																
Peak Avg																																																																							
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>10548.60</td><td>49.45</td><td>68.20</td><td>-18.75</td><td>62.90</td><td>37.58</td><td>15.63</td><td>66.66</td><td>0.00 --- Peak</td></tr><tr><td>2</td><td>15790.10</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>59.71</td><td>40.31</td><td>19.21</td><td>64.11</td><td>0.00 300 17 Peak</td></tr><tr><td>3</td><td>15790.10</td><td>46.20</td><td>54.00</td><td>-7.80</td><td>50.79</td><td>40.31</td><td>19.21</td><td>64.11</td><td>0.00 300 17 Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10548.60	49.45	68.20	-18.75	62.90	37.58	15.63	66.66	0.00 --- Peak	2	15790.10	55.12	74.00	-18.88	59.71	40.31	19.21	64.11	0.00 300 17 Peak	3	15790.10	46.20	54.00	-7.80	50.79	40.31	19.21	64.11	0.00 300 17 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	10548.60	49.45	68.20	-18.75	62.90	37.58	15.63	66.66	0.00 --- Peak																																																														
2	15790.10	55.12	74.00	-18.88	59.71	40.31	19.21	64.11	0.00 300 17 Peak																																																														
3	15790.10	46.20	54.00	-7.80	50.79	40.31	19.21	64.11	0.00 300 17 Average																																																														
																																																																							
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>10531.00</td><td>50.05</td><td>68.20</td><td>-18.15</td><td>63.54</td><td>37.57</td><td>15.61</td><td>66.67</td><td>0.00 --- Peak</td></tr><tr><td>2</td><td>15810.00</td><td>59.44</td><td>74.00</td><td>-14.56</td><td>64.00</td><td>40.33</td><td>19.22</td><td>64.11</td><td>0.00 222 75 PEAK</td></tr><tr><td>3</td><td>15810.00</td><td>50.66</td><td>54.00</td><td>-3.34</td><td>55.22</td><td>40.33</td><td>19.22</td><td>64.11</td><td>0.00 222 75 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10531.00	50.05	68.20	-18.15	63.54	37.57	15.61	66.67	0.00 --- Peak	2	15810.00	59.44	74.00	-14.56	64.00	40.33	19.22	64.11	0.00 222 75 PEAK	3	15810.00	50.66	54.00	-3.34	55.22	40.33	19.22	64.11	0.00 222 75 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	10531.00	50.05	68.20	-18.15	63.54	37.57	15.61	66.67	0.00 --- Peak																																																														
2	15810.00	59.44	74.00	-14.56	64.00	40.33	19.22	64.11	0.00 222 75 PEAK																																																														
3	15810.00	50.66	54.00	-3.34	55.22	40.33	19.22	64.11	0.00 222 75 AVERAGE																																																														

Mode

22

Band Edge - L

U-NII-2A_5.25-5.35_802.11ac VHT40_CH62_5310MHz

ANT

CDD 0+1

Pol.

Horizontal

Fundamental

Peak

Level (dBuV/m)

130

113.8

97.5

81.3

65.0

48.8

32.5

16.3

0

5100

5132

5164

5196

5228

5260

U-NII-1-U-NII-2A-U-NII-2C

1

5112.16

49.51

74.00

-24.49

41.73

34.04

10.57

36.83

0.00

111

176

PEAK

Limit

Read

Ant

Cable

Preamp

Aux

APos

TPos

Remark

Freq

Level

Line

Margin

Level

Factor

Loss

Factor

Factor

cm

deg

MHz

dBuV/m

dBuV/m

dB

dBuV

dB/m

dB

dB

dB

cm

deg

1

5112.16

49.51

74.00

-24.49

41.73

34.04

10.57

36.83

0.00

111

176

PEAK

1

5310.00

104.39

95.50

34.50

10.73

36.34

0.00

111

176

PEAK

Avg

Level (dBuV/m)

130

113.8

97.5

81.3

65.0

48.8

32.5

16.3

0

5100

5132

5164

5196

5228

5260

U-NII-1-U-NII-2A-U-NII-2C(AVG)

1

5114.24

39.62

54.00

-14.38

31.83

34.04

10.57

36.82

0.00

111

176

AVERAGE

Limit

Read

Ant

Cable

Preamp

Aux

APos

TPos

Remark

Freq

Level

Line

Margin

Level

Factor

Loss

Factor

Factor

cm

deg

MHz

dBuV/m

dBuV/m

dB

dBuV

dB/m

dB

dB

dB

cm

deg

1

5114.24

39.62

54.00

-14.38

31.83

34.04

10.57

36.82

0.00

111

176

AVERAGE

1

5310.00

96.45

87.56

34.50

10.73

36.34



0.00

111





176

AVERAGE

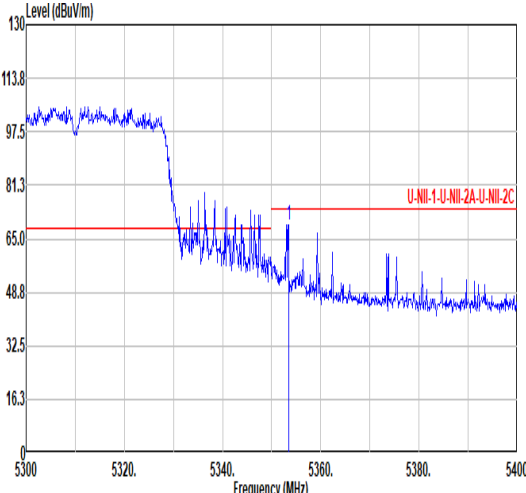
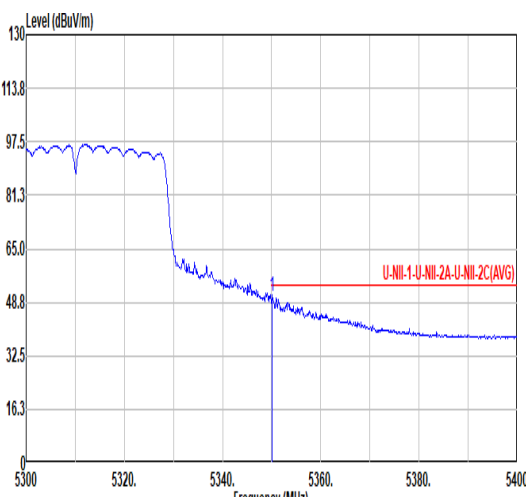


Mode	22																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH62_5310MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.40</td><td>69.37</td><td>74.00</td><td>-4.63</td><td>60.37</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>111</td><td>176</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.40	69.37	74.00	-4.63	60.37	34.50	10.75	36.25	0.00	111	176	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5353.40	69.37	74.00	-4.63	60.37	34.50	10.75	36.25	0.00	111	176	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>50.54</td><td>54.00</td><td>-3.46</td><td>41.54</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>111</td><td>176</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.10	50.54	54.00	-3.46	41.54	34.50	10.75	36.25	0.00	111	176	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5350.10	50.54	54.00	-3.46	41.54	34.50	10.75	36.25	0.00	111	176	AVERAGE																																											

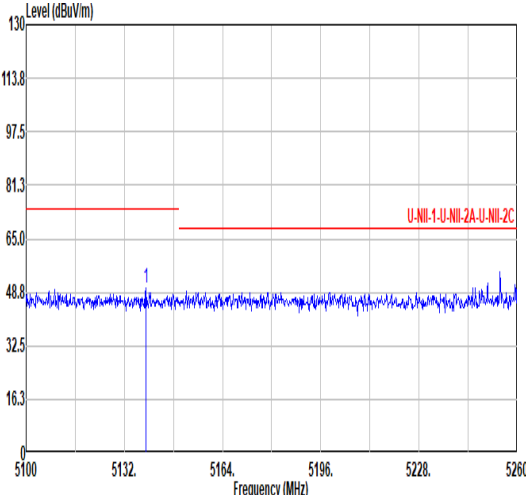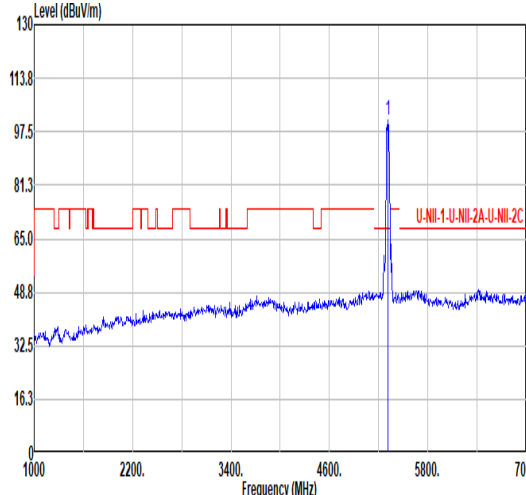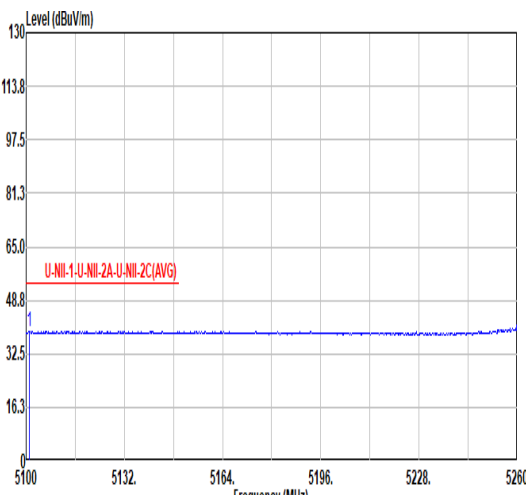
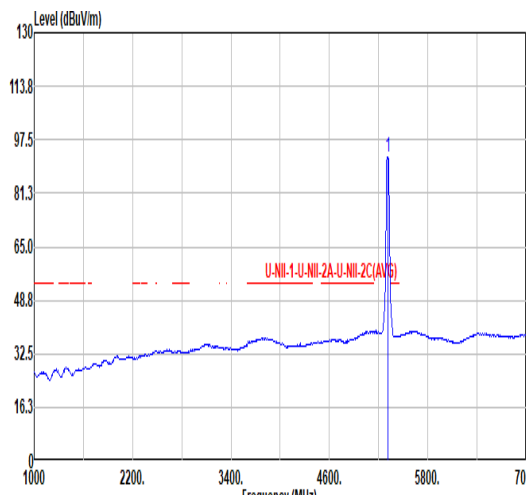


Mode	22																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH62_5310MHz																																																																																																														
ANT	CDD 0+1																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5139.04</td><td>49.83</td><td>74.00</td><td>-24.17</td><td>41.87</td><td>34.12</td><td>10.60</td><td>36.76</td><td>0.00</td><td>291</td><td>259</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5139.04	49.83	74.00	-24.17	41.87	34.12	10.60	36.76	0.00	291	259	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>100.98</td><td>-----</td><td>-----</td><td>92.09</td><td>34.50</td><td>10.73</td><td>36.34</td><td>0.00</td><td>291</td><td>259</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	100.98	-----	-----	92.09	34.50	10.73	36.34	0.00	291	259
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5139.04	49.83	74.00	-24.17	41.87	34.12	10.60	36.76	0.00	291	259	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5310.00	100.98	-----	-----	92.09	34.50	10.73	36.34	0.00	291	259	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5100.96</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>31.70</td><td>34.00</td><td>10.56</td><td>36.85</td><td>0.00</td><td>291</td><td>259</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5100.96	39.41	54.00	-14.59	31.70	34.00	10.56	36.85	0.00	291	259	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>92.02</td><td>-----</td><td>-----</td><td>83.13</td><td>34.50</td><td>10.73</td><td>36.34</td><td>0.00</td><td>291</td><td>259</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	92.02	-----	-----	83.13	34.50	10.73	36.34	0.00	291	259
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5100.96	39.41	54.00	-14.59	31.70	34.00	10.56	36.85	0.00	291	259	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5310.00	92.02	-----	-----	83.13	34.50	10.73	36.34	0.00	291	259	AVERAGE																																																																																																			



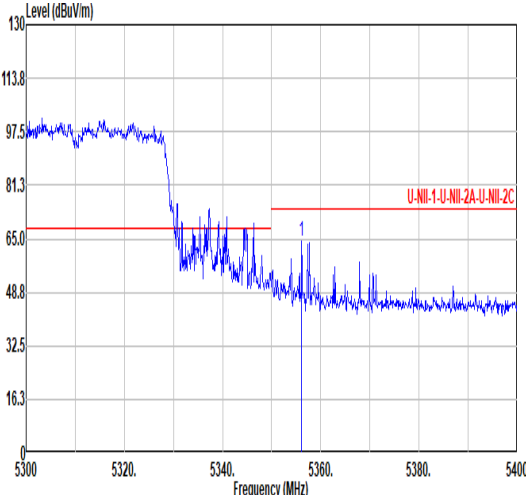
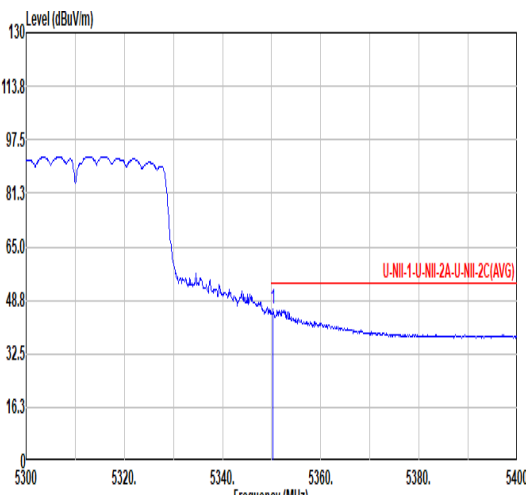


Mode	22																																												
	Band Edge - R																																												
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH62_5310MHz																																												
ANT	CDD 0+1																																												
Pol.	Vertical	Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.10</td><td>64.41</td><td>74.00</td><td>-9.59</td><td>55.40</td><td>34.50</td><td>10.75</td><td>36.24</td><td>0.00</td><td>291</td><td>259</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.10	64.41	74.00	-9.59	55.40	34.50	10.75	36.24	0.00	291	259	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5356.10	64.41	74.00	-9.59	55.40	34.50	10.75	36.24	0.00	291	259	PEAK																																	
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.30</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>36.90</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>291</td><td>259</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.30	45.90	54.00	-8.10	36.90	34.50	10.75	36.25	0.00	291	259	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5356.30	45.90	54.00	-8.10	36.90	34.50	10.75	36.25	0.00	291	259	AVERAGE																																	

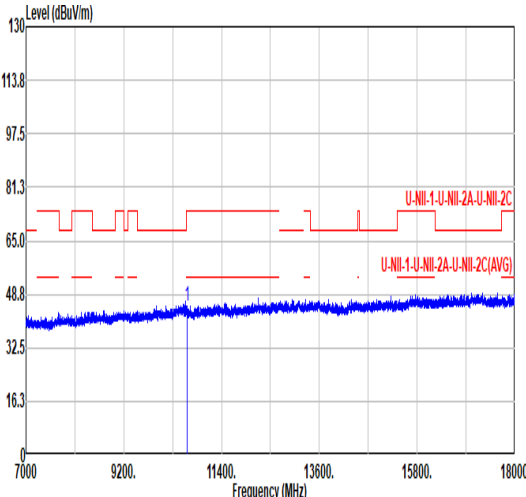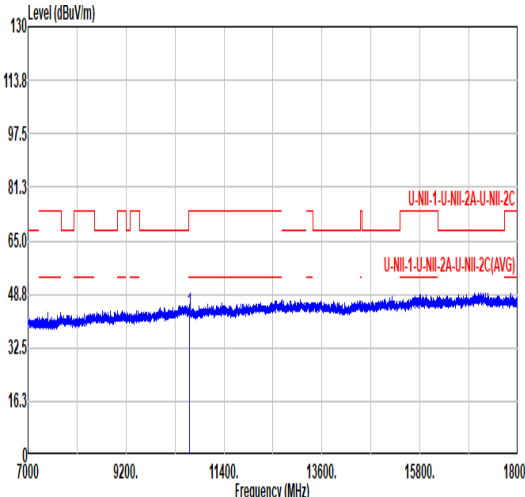


		22																																																												
Mode		Harmonic																																																												
		U-NII-2A_5.25-5.35_802.11ac VHT40_CH62_5310MHz																																																												
ANT		CDD 0+1																																																												
Pol.		Horizontal						Vertical																																																						
Peak Avg																																																														
																																																														
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10620.00</td><td>45.13</td><td>74.00</td><td>-28.87</td><td>58.44</td><td>37.63</td><td>15.69</td><td>66.63</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10620.00	45.13	74.00	-28.87	58.44	37.63	15.69	66.63	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	10620.00	45.13	74.00	-28.87	58.44	37.63	15.69	66.63	0.00	---	---	PEAK																																																		
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10620.00</td><td>43.25</td><td>74.00</td><td>-30.75</td><td>56.56</td><td>37.63</td><td>15.69</td><td>66.63</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10620.00	43.25	74.00	-30.75	56.56	37.63	15.69	66.63	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	10620.00	43.25	74.00	-30.75	56.56	37.63	15.69	66.63	0.00	---	---	PEAK																																																		

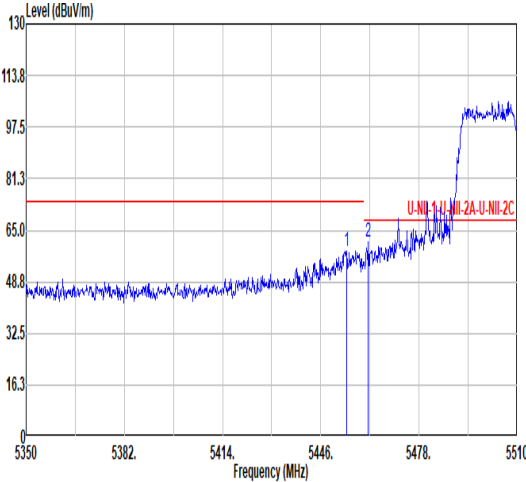
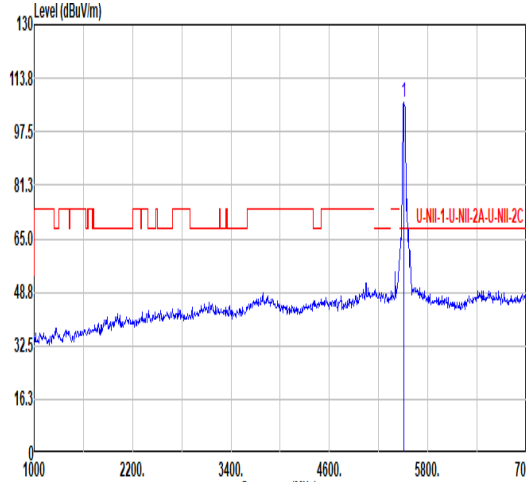
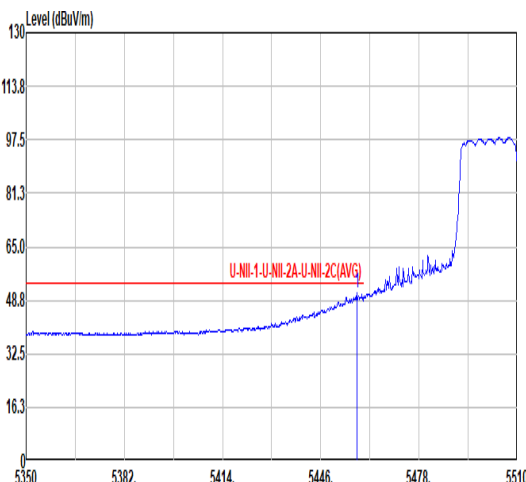
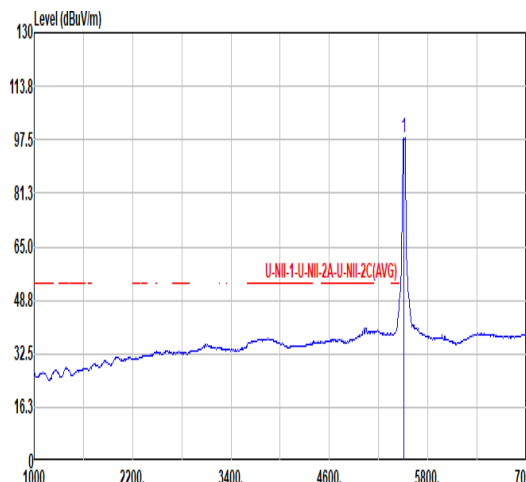


Mode	23																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																																																																																																
ANT	CDD 0+1																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.32</td><td>58.54</td><td>74.00</td><td>-15.46</td><td>49.17</td><td>34.55</td><td>10.83</td><td>36.01</td><td>0.00</td><td>107</td><td>231</td><td>PEAK</td></tr><tr><td>2</td><td>5461.36</td><td>61.47</td><td>68.20</td><td>-6.73</td><td>52.06</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>107</td><td>231</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.32	58.54	74.00	-15.46	49.17	34.55	10.83	36.01	0.00	107	231	PEAK	2	5461.36	61.47	68.20	-6.73	52.06	34.56	10.84	35.99	0.00	107	231	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>106.38</td><td>-----</td><td>-----</td><td>96.77</td><td>34.60</td><td>10.89</td><td>35.88</td><td>0.00</td><td>107</td><td>231</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	106.38	-----	-----	96.77	34.60	10.89	35.88	0.00	107	231	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5454.32	58.54	74.00	-15.46	49.17	34.55	10.83	36.01	0.00	107	231	PEAK																																																																																																					
2	5461.36	61.47	68.20	-6.73	52.06	34.56	10.84	35.99	0.00	107	231	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5510.00	106.38	-----	-----	96.77	34.60	10.89	35.88	0.00	107	231	PEAK																																																																																																					
Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.68</td><td>50.86</td><td>54.00</td><td>-3.14</td><td>41.46</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>107</td><td>231</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.68	50.86	54.00	-3.14	41.46	34.56	10.84	36.00	0.00	107	231	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>98.06</td><td>-----</td><td>-----</td><td>88.39</td><td>34.60</td><td>10.91</td><td>35.84</td><td>0.00</td><td>107</td><td>231</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	98.06	-----	-----	88.39	34.60	10.91	35.84	0.00	107	231	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5457.68	50.86	54.00	-3.14	41.46	34.56	10.84	36.00	0.00	107	231	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5510.00	98.06	-----	-----	88.39	34.60	10.91	35.84	0.00	107	231	AVERAGE																																																																																																					

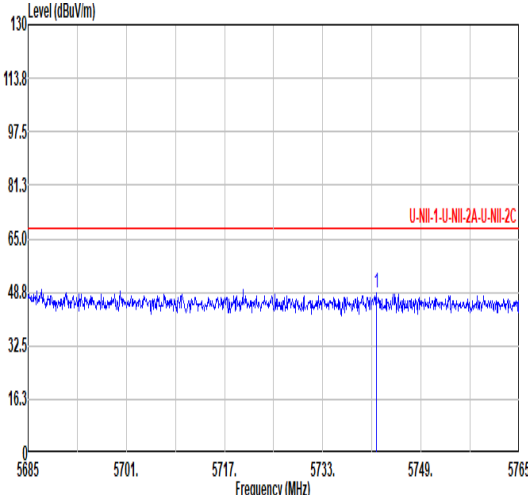


Mode	23																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																												
ANT	CDD 0+1																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5741.72</td><td>48.75</td><td>68.20</td><td>-19.45</td><td>40.35</td><td>34.73</td><td>11.20</td><td>37.53</td><td>0.00</td><td>107</td><td>231</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5741.72	48.75	68.20	-19.45	40.35	34.73	11.20	37.53	0.00	107	231	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5741.72	48.75	68.20	-19.45	40.35	34.73	11.20	37.53	0.00	107	231	PEAK																																	

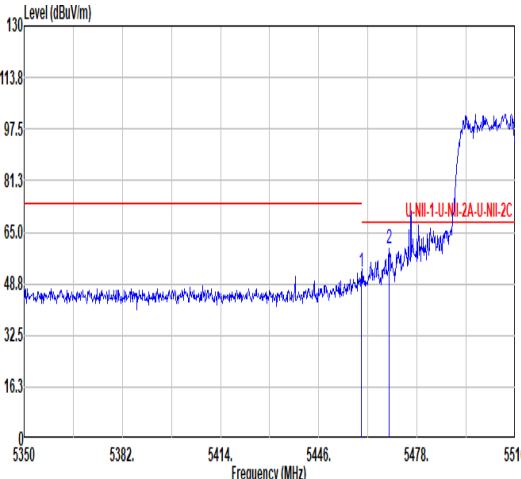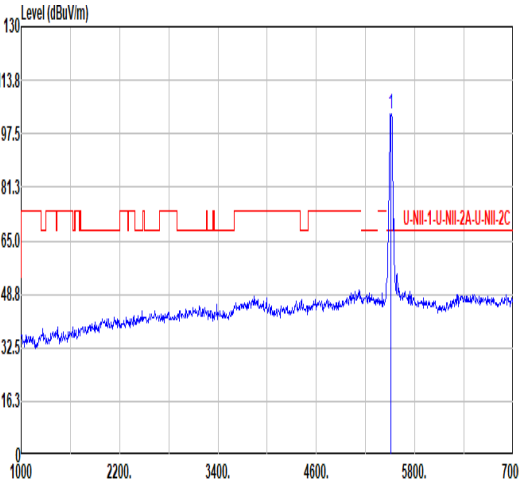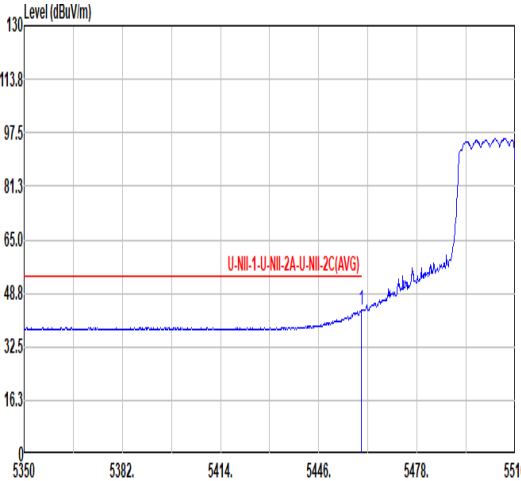
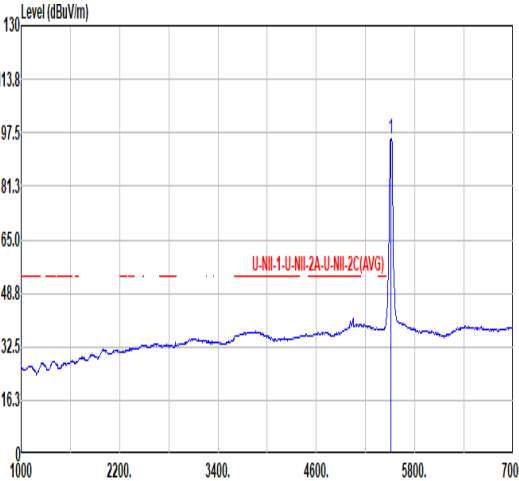


Mode	23																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																																																																																																
ANT	CDD 0+1																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>43.03</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>377</td><td>248</td><td>PEAK</td></tr><tr><td>2</td><td>5468.88</td><td>59.63</td><td>68.20</td><td>-8.57</td><td>50.18</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>377</td><td>248</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	52.44	74.00	-21.56	43.03	34.56	10.84	35.99	0.00	377	248	PEAK	2	5468.88	59.63	68.20	-8.57	50.18	34.57	10.85	35.97	0.00	377	248	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>103.48</td><td>-----</td><td>-----</td><td>93.82</td><td>34.60</td><td>10.91</td><td>35.85</td><td>0.00</td><td>377</td><td>248</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	103.48	-----	-----	93.82	34.60	10.91	35.85	0.00	377	248	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5459.92	52.44	74.00	-21.56	43.03	34.56	10.84	35.99	0.00	377	248	PEAK																																																																																																					
2	5468.88	59.63	68.20	-8.57	50.18	34.57	10.85	35.97	0.00	377	248	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5510.00	103.48	-----	-----	93.82	34.60	10.91	35.85	0.00	377	248	PEAK																																																																																																					
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>34.13</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>377</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	43.54	54.00	-10.46	34.13	34.56	10.84	35.99	0.00	377	248	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>95.88</td><td>-----</td><td>-----</td><td>86.25</td><td>34.60</td><td>10.90</td><td>35.87</td><td>0.00</td><td>377</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	95.88	-----	-----	86.25	34.60	10.90	35.87	0.00	377	248	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5459.92	43.54	54.00	-10.46	34.13	34.56	10.84	35.99	0.00	377	248	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5510.00	95.88	-----	-----	86.25	34.60	10.90	35.87	0.00	377	248	AVERAGE																																																																																																					




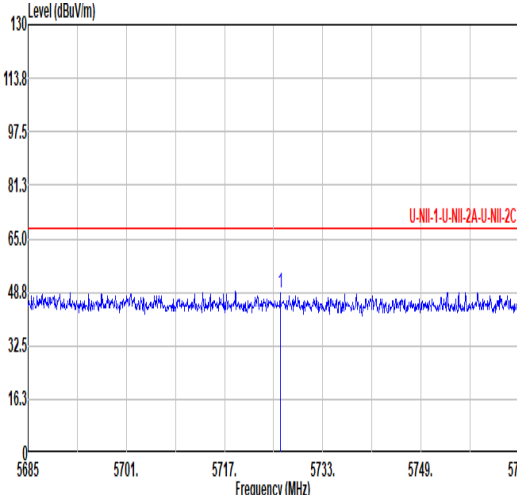


Mode	23																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																												
ANT	CDD 0+1																																												
Pol.	Vertical	Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.04</td><td>48.76</td><td>68.20</td><td>-19.44</td><td>40.12</td><td>34.68</td><td>11.18</td><td>37.22</td><td>0.00</td><td>377</td><td>248</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.04	48.76	68.20	-19.44	40.12	34.68	11.18	37.22	0.00	377	248	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5726.04	48.76	68.20	-19.44	40.12	34.68	11.18	37.22	0.00	377	248	PEAK																																	

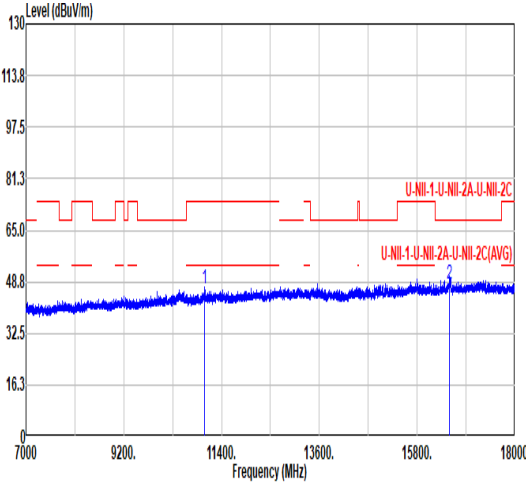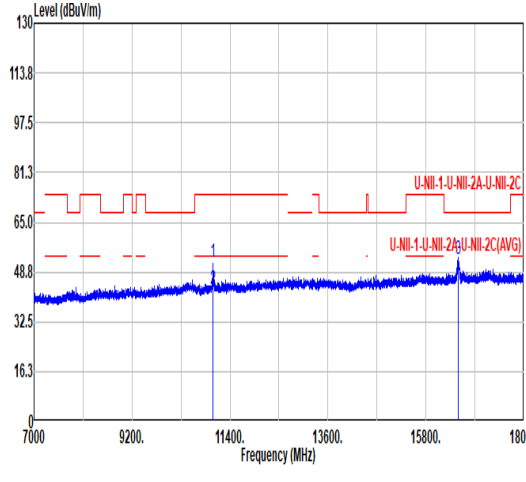


		23																																																																									
Mode		Harmonic																																																																									
		U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																																																									
ANT		CDD 0+1																																																																									
Pol.		Horizontal																																																																									
Peak Avg																																																																											
		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11020.00	46.70	74.00	-27.30	59.18	37.92	16.06	66.46	0.00	---	---	PEAK	2	16530.00	48.27	68.20	-19.93	51.89	40.92	19.69	64.23	0.00	---	---	PEAK																									
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1	11020.00	46.70	74.00	-27.30	59.18	37.92	16.06	66.46	0.00	---	---	PEAK																																																															
2	16530.00	48.27	68.20	-19.93	51.89	40.92	19.69	64.23	0.00	---	---	PEAK																																																															
		Vertical																																																																									
																																																																											
	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11020.00</td><td>51.96</td><td>74.00</td><td>-22.04</td><td>64.44</td><td>37.92</td><td>16.06</td><td>66.46</td><td>0.00</td><td>301</td><td>82</td><td>PEAK</td></tr><tr><td>2</td><td>11020.00</td><td>43.13</td><td>54.00</td><td>-10.87</td><td>55.61</td><td>37.92</td><td>16.06</td><td>66.46</td><td>0.00</td><td>301</td><td>82</td><td>AVERAGE</td></tr><tr><td>3</td><td>16530.00</td><td>52.86</td><td>68.20</td><td>-15.34</td><td>56.48</td><td>40.92</td><td>19.69</td><td>64.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11020.00	51.96	74.00	-22.04	64.44	37.92	16.06	66.46	0.00	301	82	PEAK	2	11020.00	43.13	54.00	-10.87	55.61	37.92	16.06	66.46	0.00	301	82	AVERAGE	3	16530.00	52.86	68.20	-15.34	56.48	40.92	19.69	64.23	0.00	---	---	PEAK
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1	11020.00	51.96	74.00	-22.04	64.44	37.92	16.06	66.46	0.00	301	82	PEAK																																																															
2	11020.00	43.13	54.00	-10.87	55.61	37.92	16.06	66.46	0.00	301	82	AVERAGE																																																															
3	16530.00	52.86	68.20	-15.34	56.48	40.92	19.69	64.23	0.00	---	---	PEAK																																																															

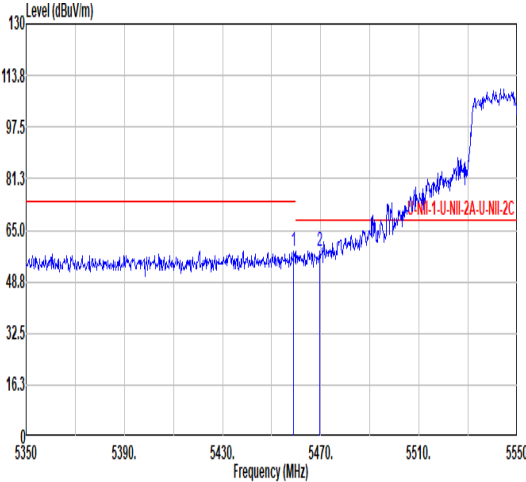
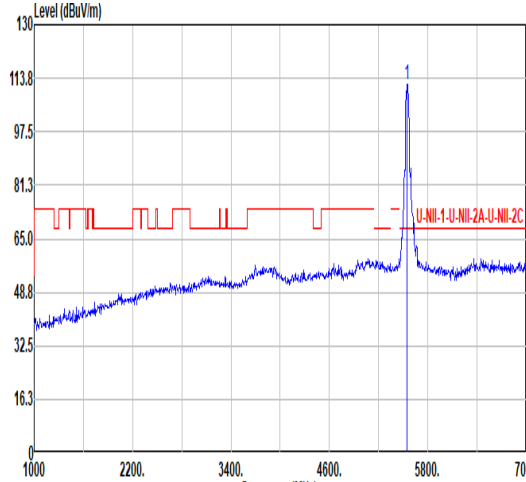
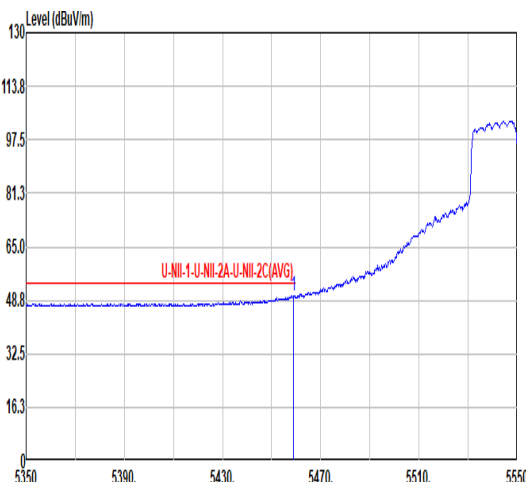
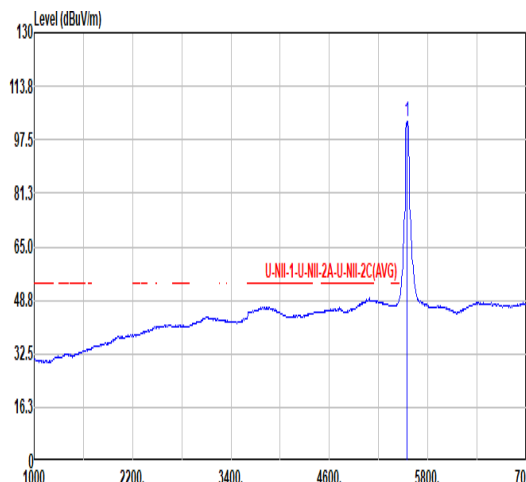


Mode	24																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH110_5550MHz																																																																																																																																			
ANT	CDD 0+1																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.00</td><td>58.60</td><td>74.00</td><td>-15.40</td><td>49.19</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>100</td><td>234 PEAK</td></tr><tr><td>2</td><td>5469.60</td><td>58.54</td><td>68.20</td><td>-9.66</td><td>49.09</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>100</td><td>234 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.00	58.60	74.00	-15.40	49.19	34.56	10.84	35.99	0.00	100	234 PEAK	2	5469.60	58.54	68.20	-9.66	49.09	34.57	10.85	35.97	0.00	100	234 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5550.00</td><td>111.94</td><td>-----</td><td>-----</td><td>102.16</td><td>34.60</td><td>10.95</td><td>35.77</td><td>0.00</td><td>100</td><td>234 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5550.00	111.94	-----	-----	102.16	34.60	10.95	35.77	0.00	100	234 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5459.00	58.60	74.00	-15.40	49.19	34.56	10.84	35.99	0.00	100	234 PEAK																																																																																																																									
2	5469.60	58.54	68.20	-9.66	49.09	34.57	10.85	35.97	0.00	100	234 PEAK																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5550.00	111.94	-----	-----	102.16	34.60	10.95	35.77	0.00	100	234 PEAK																																																																																																																									
Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.00</td><td>50.05</td><td>54.00</td><td>-3.95</td><td>40.64</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>100</td><td>234 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.00	50.05	54.00	-3.95	40.64	34.56	10.84	35.99	0.00	100	234 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5550.00</td><td>102.88</td><td>-----</td><td>-----</td><td>93.10</td><td>34.60</td><td>10.95</td><td>35.77</td><td>0.00</td><td>100</td><td>234 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5550.00	102.88	-----	-----	93.10	34.60	10.95	35.77	0.00	100	234 AVERAGE												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5459.00	50.05	54.00	-3.95	40.64	34.56	10.84	35.99	0.00	100	234 AVERAGE																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5550.00	102.88	-----	-----	93.10	34.60	10.95	35.77	0.00	100	234 AVERAGE																																																																																																																									

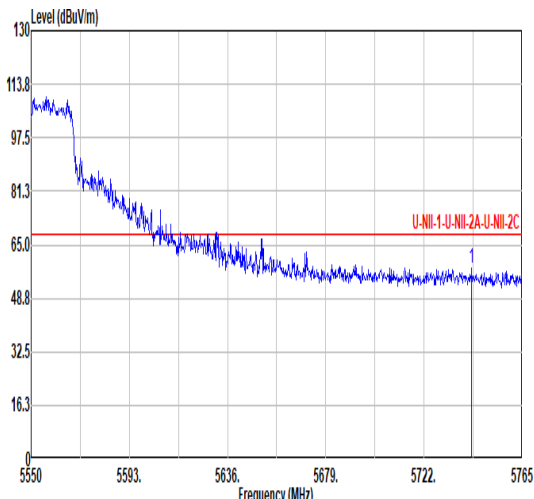

Mode	24																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH110_5550MHz																																					
ANT	CDD 0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5742.86</td><td>57.74</td><td>68.20</td><td>-10.46</td><td>49.36</td><td>34.73</td><td>11.20</td><td>37.55</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5742.86	57.74	68.20	-10.46	49.36	34.73	11.20	37.55	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5742.86	57.74	68.20	-10.46	49.36	34.73	11.20	37.55																														

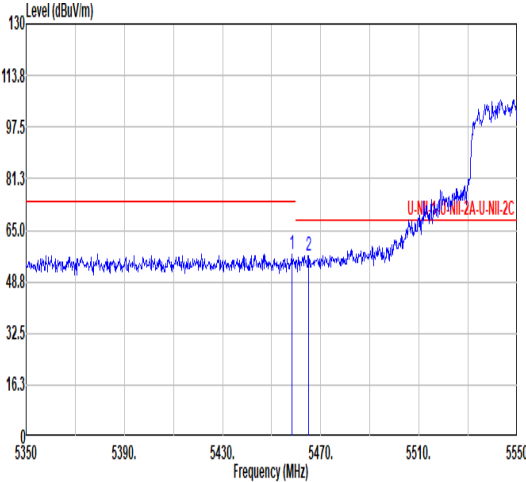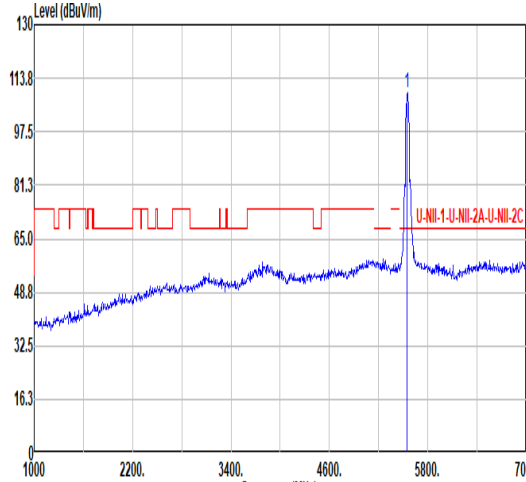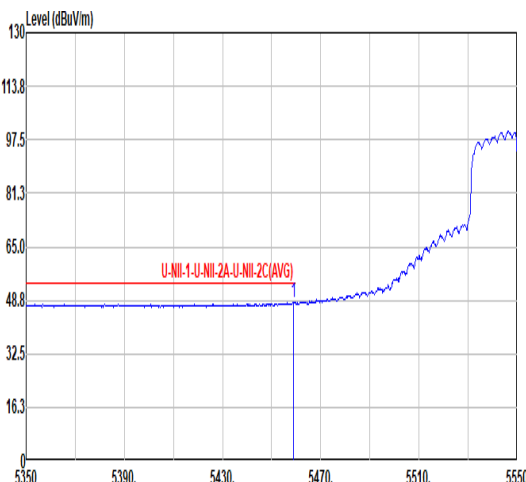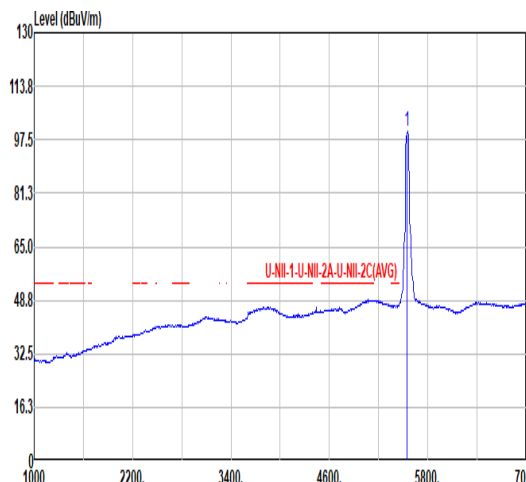

Mode	24																																																																																																																											
	Band Edge - L																																																																																																																											
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH110_5550MHz																																																																																																																											
ANT	CDD 0+1																																																																																																																											
Pol.	Vertical						Fundamental																																																																																																																					
Peak																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.20</td><td>57.50</td><td>74.00</td><td>-16.50</td><td>48.10</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>317</td><td>289</td><td>PEAK</td></tr><tr><td>2</td><td>5465.00</td><td>56.92</td><td>68.20</td><td>-11.28</td><td>47.49</td><td>34.56</td><td>10.85</td><td>35.98</td><td>0.00</td><td>317</td><td>289</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.20	57.50	74.00	-16.50	48.10	34.56	10.84	36.00	0.00	317	289	PEAK	2	5465.00	56.92	68.20	-11.28	47.49	34.56	10.85	35.98	0.00	317	289	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5550.00</td><td>109.41</td><td>-----</td><td>-----</td><td>99.63</td><td>34.60</td><td>10.95</td><td>35.77</td><td>0.00</td><td>317</td><td>289</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	109.41	-----	-----	99.63	34.60	10.95	35.77	0.00	317	289
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5458.20	57.50	74.00	-16.50	48.10	34.56	10.84	36.00	0.00	317	289	PEAK																																																																																																																
2	5465.00	56.92	68.20	-11.28	47.49	34.56	10.85	35.98	0.00	317	289	PEAK																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5550.00	109.41	-----	-----	99.63	34.60	10.95	35.77	0.00	317	289	PEAK																																																																																																																
Avg																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.00</td><td>47.89</td><td>54.00</td><td>-6.11</td><td>38.48</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>317</td><td>289</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.00	47.89	54.00	-6.11	38.48	34.56	10.84	35.99	0.00	317	289	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5550.00</td><td>100.24</td><td>-----</td><td>-----</td><td>90.46</td><td>34.60</td><td>10.95</td><td>35.77</td><td>0.00</td><td>317</td><td>289</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	100.24	-----	-----	90.46	34.60	10.95	35.77	0.00	317	289	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5459.00	47.89	54.00	-6.11	38.48	34.56	10.84	35.99	0.00	317	289	AVERAGE																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5550.00	100.24	-----	-----	90.46	34.60	10.95	35.77	0.00	317	289	AVERAGE																																																																																																																







Mode	24																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH110_5550MHz																																					
ANT	CDD 0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5751.46</td><td>57.99</td><td>68.20</td><td>-10.21</td><td>49.74</td><td>34.75</td><td>11.21</td><td>37.71</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5751.46	57.99	68.20	-10.21	49.74	34.75	11.21	37.71	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5751.46	57.99	68.20	-10.21	49.74	34.75	11.21	37.71																														




		24																																																																																																																																																																																																																									
Mode		Harmonic																																																																																																																																																																																																																									
		U-NII-2C_5.47-5.725_802.11ac VHT40_CH110_5550MHz																																																																																																																																																																																																																									
ANT		CDD 0+1																																																																																																																																																																																																																									
Pol.		Horizontal										Vertical																																																																																																																																																																																																															
Peak Avg																																																																																																																																																																																																																											
		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th colspan="19"></th></tr><tr><td>1</td><td>11099.70</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>61.70</td><td>37.98</td><td>16.11</td><td>66.42</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16650.00</td><td>60.59</td><td>68.20</td><td>-7.61</td><td>64.07</td><td>41.02</td><td>19.77</td><td>64.27</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	cm	deg																				1	11099.70	49.37	74.00	-24.63	61.70	37.98	16.11	66.42	0.00	---	---	---	---	---	---	---	---	Peak	2	16650.00	60.59	68.20	-7.61	64.07	41.02	19.77	64.27	0.00	---	---	---	---	---	---	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th colspan="19"></th></tr><tr><td>1</td><td>11100.00</td><td>57.17</td><td>74.00</td><td>-16.83</td><td>69.50</td><td>37.98</td><td>16.11</td><td>66.42</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>74 PEAK</td></tr><tr><td>2</td><td>11100.00</td><td>47.88</td><td>54.00</td><td>-6.12</td><td>60.21</td><td>37.98</td><td>16.11</td><td>66.42</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>AVERAGE</td></tr><tr><td>3</td><td>16653.60</td><td>63.77</td><td>68.20</td><td>-4.43</td><td>67.26</td><td>41.02</td><td>19.77</td><td>64.28</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	cm	deg																				1	11100.00	57.17	74.00	-16.83	69.50	37.98	16.11	66.42	0.00	---	---	---	---	---	---	---	---	74 PEAK	2	11100.00	47.88	54.00	-6.12	60.21	37.98	16.11	66.42	0.00	---	---	---	---	---	---	---	---	AVERAGE	3	16653.60	63.77	68.20	-4.43	67.26	41.02	19.77	64.28	0.00	---	---	---	---	---	---	---	---
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	cm	deg																																																																																																																																																																																																												
1	11099.70	49.37	74.00	-24.63	61.70	37.98	16.11	66.42	0.00	---	---	---	---	---	---	---	---	Peak																																																																																																																																																																																																									
2	16650.00	60.59	68.20	-7.61	64.07	41.02	19.77	64.27	0.00	---	---	---	---	---	---	---	---	PEAK																																																																																																																																																																																																									
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	cm	deg																																																																																																																																																																																																												
1	11100.00	57.17	74.00	-16.83	69.50	37.98	16.11	66.42	0.00	---	---	---	---	---	---	---	---	74 PEAK																																																																																																																																																																																																									
2	11100.00	47.88	54.00	-6.12	60.21	37.98	16.11	66.42	0.00	---	---	---	---	---	---	---	---	AVERAGE																																																																																																																																																																																																									
3	16653.60	63.77	68.20	-4.43	67.26	41.02	19.77	64.28	0.00	---	---	---	---	---	---	---	---	Peak																																																																																																																																																																																																									

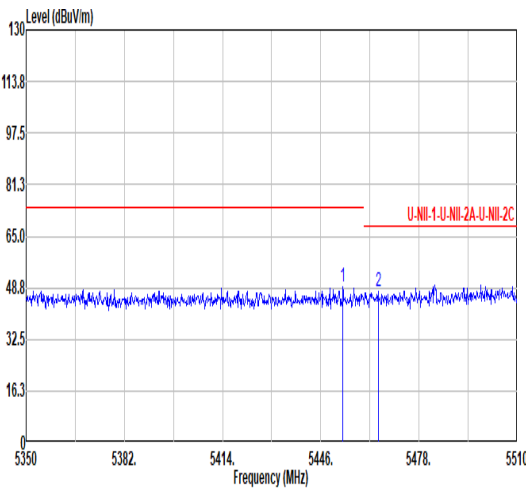
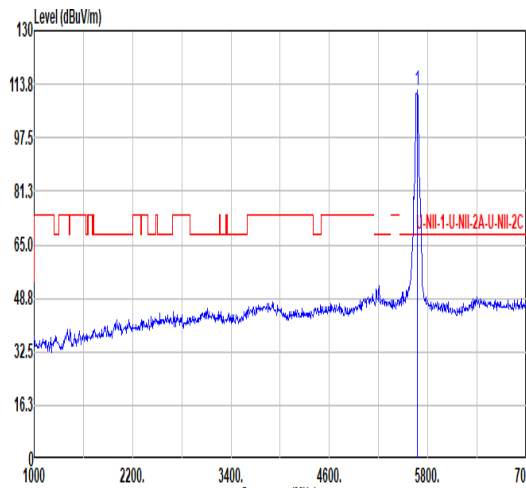
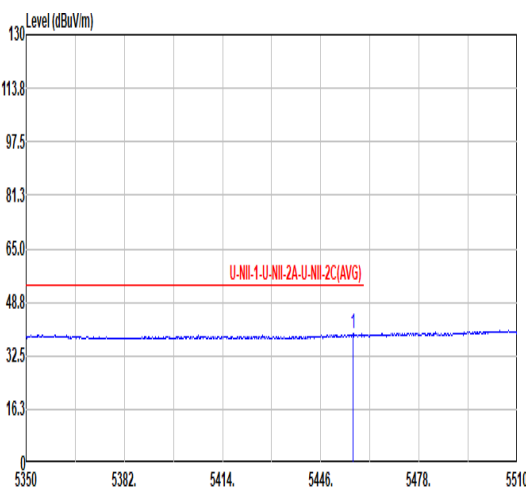
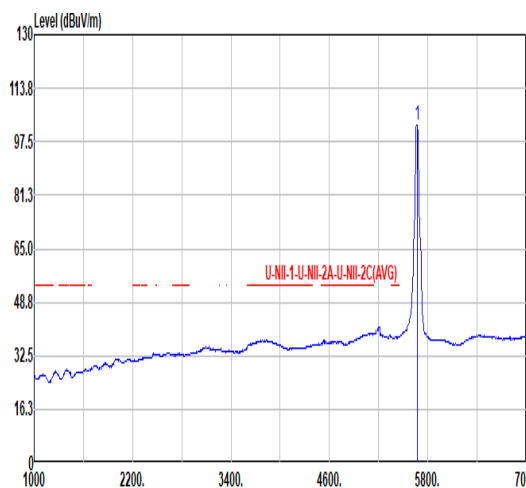


Mode	25																																																																																																																												
	Band Edge - L																																																																																																																												
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																																																																																																												
ANT	CDD 0+1																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.20</td><td>49.03</td><td>74.00</td><td>-24.97</td><td>39.66</td><td>34.55</td><td>10.83</td><td>36.01</td><td>0.00</td><td>100</td><td>231</td><td>PEAK</td></tr><tr><td>2</td><td>5464.72</td><td>47.51</td><td>68.20</td><td>-20.69</td><td>38.08</td><td>34.56</td><td>10.85</td><td>35.98</td><td>0.00</td><td>100</td><td>231</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.20	49.03	74.00	-24.97	39.66	34.55	10.83	36.01	0.00	100	231	PEAK	2	5464.72	47.51	68.20	-20.69	38.08	34.56	10.85	35.98	0.00	100	231	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>111.62</td><td>-----</td><td>-----</td><td>102.13</td><td>34.60</td><td>11.11</td><td>36.22</td><td>0.00</td><td>100</td><td>231</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	111.62	-----	-----	102.13	34.60	11.11	36.22	0.00	100	231	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5453.20	49.03	74.00	-24.97	39.66	34.55	10.83	36.01	0.00	100	231	PEAK																																																																																																																	
2	5464.72	47.51	68.20	-20.69	38.08	34.56	10.85	35.98	0.00	100	231	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5670.00	111.62	-----	-----	102.13	34.60	11.11	36.22	0.00	100	231	PEAK																																																																																																																	
Avg																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.56</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>29.82</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>100</td><td>231</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.56	39.22	54.00	-14.78	29.82	34.56	10.84	36.00	0.00	100	231	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>102.76</td><td>-----</td><td>-----</td><td>93.16</td><td>34.60</td><td>11.10</td><td>36.10</td><td>0.00</td><td>100</td><td>231</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	102.76	-----	-----	93.16	34.60	11.10	36.10	0.00	100	231	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5456.56	39.22	54.00	-14.78	29.82	34.56	10.84	36.00	0.00	100	231	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5670.00	102.76	-----	-----	93.16	34.60	11.10	36.10	0.00	100	231	AVERAGE																																																																																																																	

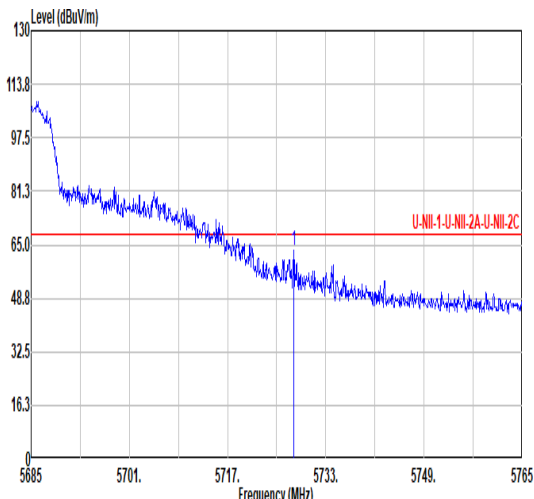

Mode	25																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																					
ANT	CDD 0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5727.72</td><td>63.44</td><td>68.20</td><td>-4.76</td><td>54.83</td><td>34.68</td><td>11.18</td><td>37.25</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5727.72	63.44	68.20	-4.76	54.83	34.68	11.18	37.25	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5727.72	63.44	68.20	-4.76	54.83	34.68	11.18	37.25																														

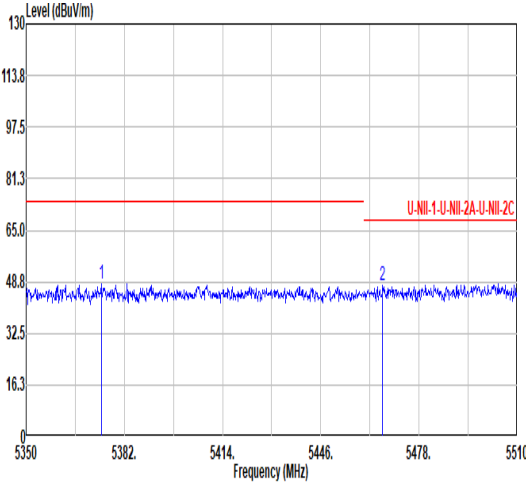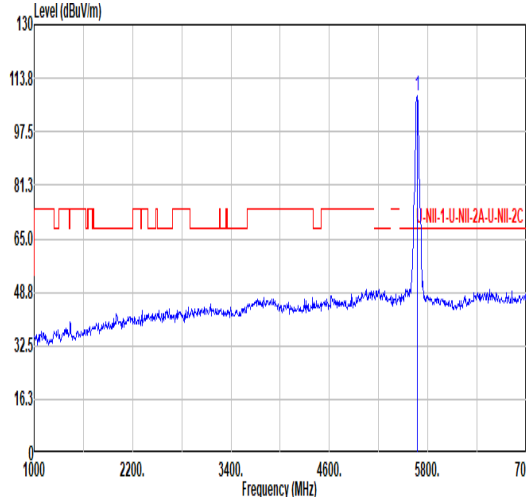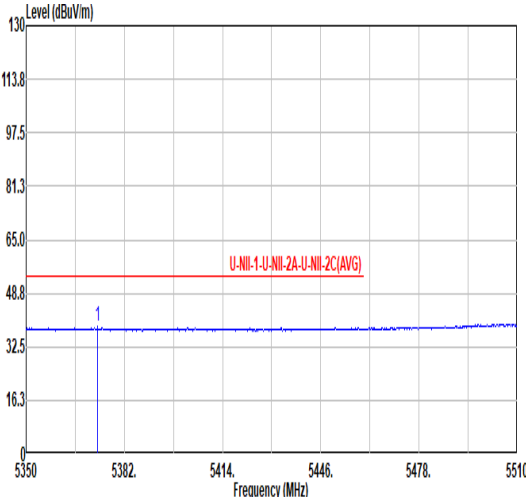
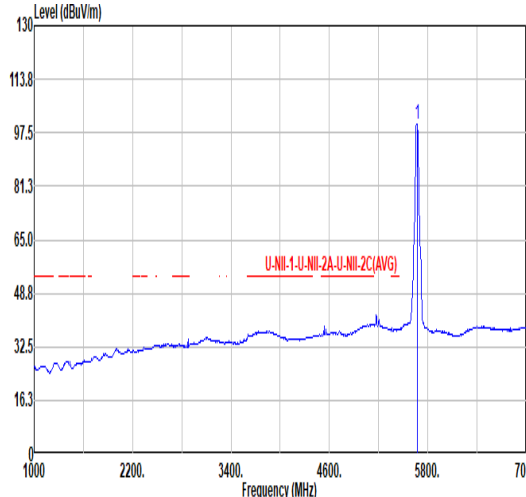


Mode	25																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																																																																																															
ANT	CDD 0+1																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5374.48</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>38.90</td><td>34.50</td><td>10.76</td><td>36.20</td><td>0.00</td><td>374</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>5466.16</td><td>47.51</td><td>68.20</td><td>-20.69</td><td>38.07</td><td>34.57</td><td>10.85</td><td>35.98</td><td>0.00</td><td>374</td><td>250</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5374.48	47.96	74.00	-26.04	38.90	34.50	10.76	36.20	0.00	374	250	PEAK	2	5466.16	47.51	68.20	-20.69	38.07	34.57	10.85	35.98	0.00	374	250	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>108.30</td><td>-----</td><td>-----</td><td>98.81</td><td>34.60</td><td>11.11</td><td>36.22</td><td>0.00</td><td>374</td><td>250</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	108.30	-----	-----	98.81	34.60	11.11	36.22	0.00	374	250
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5374.48	47.96	74.00	-26.04	38.90	34.50	10.76	36.20	0.00	374	250	PEAK																																																																																																				
2	5466.16	47.51	68.20	-20.69	38.07	34.57	10.85	35.98	0.00	374	250	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5670.00	108.30	-----	-----	98.81	34.60	11.11	36.22	0.00	374	250	PEAK																																																																																																				
Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5373.36</td><td>38.56</td><td>54.00</td><td>-15.44</td><td>29.50</td><td>34.50</td><td>10.76</td><td>36.20</td><td>0.00</td><td>374</td><td>250</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5373.36	38.56	54.00	-15.44	29.50	34.50	10.76	36.20	0.00	374	250	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>108.04</td><td>-----</td><td>-----</td><td>98.34</td><td>34.60</td><td>11.09</td><td>35.99</td><td>0.00</td><td>374</td><td>250</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	108.04	-----	-----	98.34	34.60	11.09	35.99	0.00	374	250	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5373.36	38.56	54.00	-15.44	29.50	34.50	10.76	36.20	0.00	374	250	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5670.00	108.04	-----	-----	98.34	34.60	11.09	35.99	0.00	374	250	AVERAGE																																																																																																				







Mode	25																																																						
	Band Edge - R																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5729.00</td><td>53.83</td><td>68.20</td><td>-14.37</td><td>45.24</td><td>34.69</td><td>11.18</td><td>37.28</td><td>0.00</td><td>374</td><td>250</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5729.00	53.83	68.20	-14.37	45.24	34.69	11.18	37.28	0.00	374	250	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5729.00	53.83	68.20	-14.37	45.24	34.69	11.18	37.28	0.00	374	250	PEAK																																											

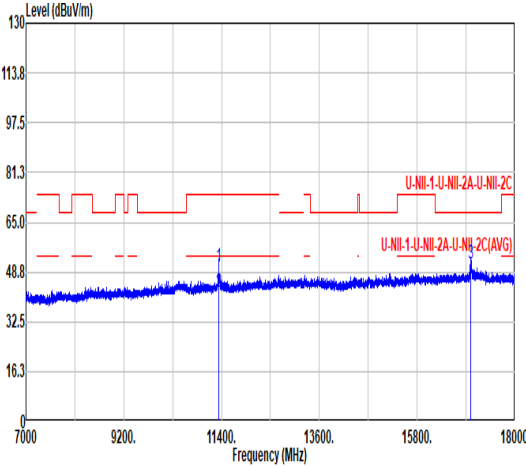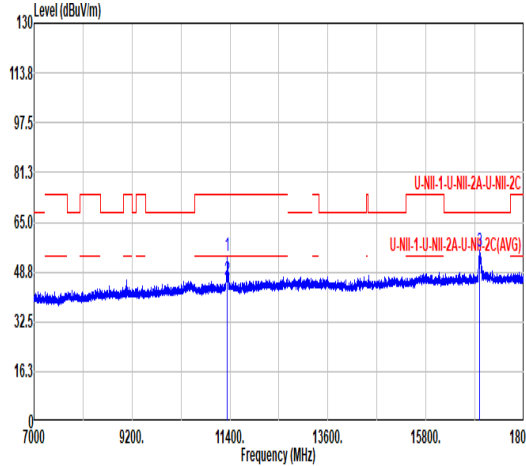

		25																																																																																	
Mode		Harmonic																																																																																	
		U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																																																																	
ANT		CDD 0+1																																																																																	
Pol.		Horizontal						Vertical																																																																											
Peak Avg																																																																																			
																																																																																			
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11340.00</td><td>50.59</td><td>74.00</td><td>-23.41</td><td>62.48</td><td>38.17</td><td>16.26</td><td>66.32</td><td>0.00</td><td>257</td><td>299</td><td>PEAK</td></tr><tr><td>2</td><td>11340.00</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>54.24</td><td>38.17</td><td>16.26</td><td>66.32</td><td>0.00</td><td>257</td><td>299</td><td>AVERAGE</td></tr><tr><td>3</td><td>17010.00</td><td>51.54</td><td>68.20</td><td>-16.66</td><td>54.63</td><td>41.30</td><td>20.01</td><td>64.40</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	50.59	74.00	-23.41	62.48	38.17	16.26	66.32	0.00	257	299	PEAK	2	11340.00	42.35	54.00	-11.65	54.24	38.17	16.26	66.32	0.00	257	299	AVERAGE	3	17010.00	51.54	68.20	-16.66	54.63	41.30	20.01	64.40	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	11340.00	50.59	74.00	-23.41	62.48	38.17	16.26	66.32	0.00	257	299	PEAK																																																																							
2	11340.00	42.35	54.00	-11.65	54.24	38.17	16.26	66.32	0.00	257	299	AVERAGE																																																																							
3	17010.00	51.54	68.20	-16.66	54.63	41.30	20.01	64.40	0.00	---	---	PEAK																																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11340.00</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>65.77</td><td>38.17</td><td>16.26</td><td>66.32</td><td>0.00</td><td>307</td><td>73</td><td>PEAK</td></tr><tr><td>2</td><td>11340.00</td><td>46.13</td><td>54.00</td><td>-7.87</td><td>58.02</td><td>38.17</td><td>16.26</td><td>66.32</td><td>0.00</td><td>307</td><td>73</td><td>AVERAGE</td></tr><tr><td>3</td><td>17010.00</td><td>55.57</td><td>68.20</td><td>-12.63</td><td>58.66</td><td>41.30</td><td>20.01</td><td>64.40</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	53.88	74.00	-20.12	65.77	38.17	16.26	66.32	0.00	307	73	PEAK	2	11340.00	46.13	54.00	-7.87	58.02	38.17	16.26	66.32	0.00	307	73	AVERAGE	3	17010.00	55.57	68.20	-12.63	58.66	41.30	20.01	64.40	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	11340.00	53.88	74.00	-20.12	65.77	38.17	16.26	66.32	0.00	307	73	PEAK																																																																							
2	11340.00	46.13	54.00	-7.87	58.02	38.17	16.26	66.32	0.00	307	73	AVERAGE																																																																							
3	17010.00	55.57	68.20	-12.63	58.66	41.30	20.01	64.40	0.00	---	---	PEAK																																																																							

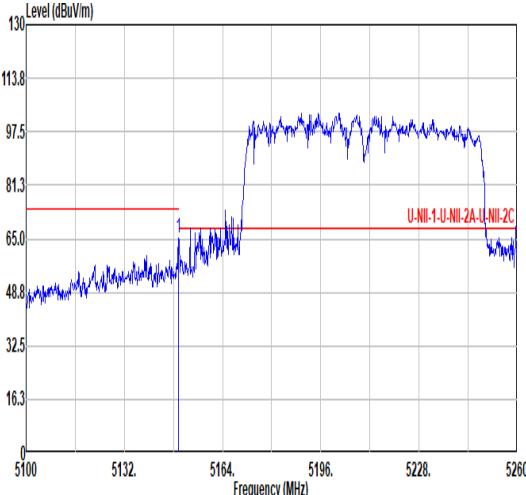
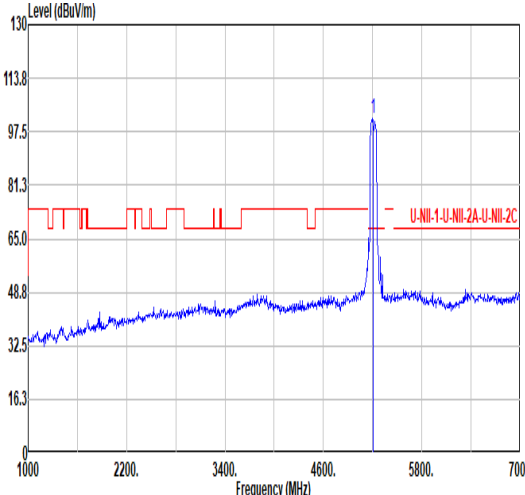
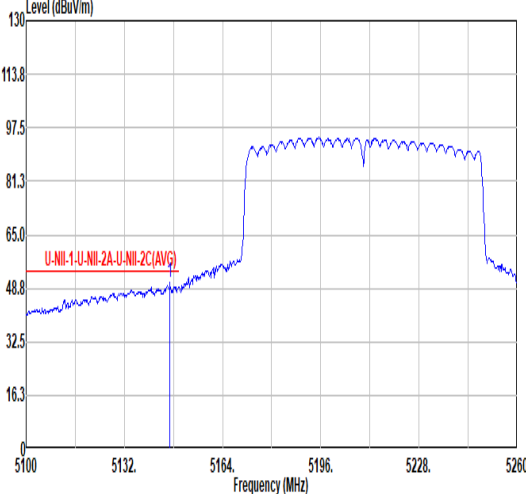
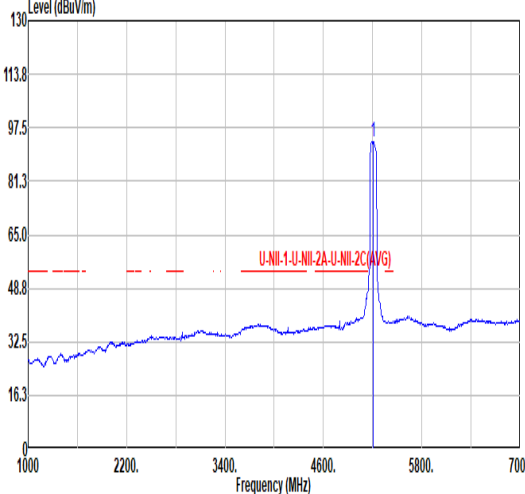


Mode	26																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.60</td><td>65.09</td><td>74.00</td><td>-8.91</td><td>57.07</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>100</td><td>355</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.60	65.09	74.00	-8.91	57.07	34.15	10.61	36.74	0.00	100	355	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>101.50</td><td>-----</td><td>-----</td><td>93.20</td><td>34.28</td><td>10.65</td><td>36.63</td><td>0.00</td><td>100</td><td>355</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	101.50	-----	-----	93.20	34.28	10.65	36.63	0.00	100	355
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.60	65.09	74.00	-8.91	57.07	34.15	10.61	36.74	0.00	100	355	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	101.50	-----	-----	93.20	34.28	10.65	36.63	0.00	100	355	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.08</td><td>50.50</td><td>54.00</td><td>-3.50</td><td>42.49</td><td>34.14</td><td>10.61</td><td>36.74</td><td>0.00</td><td>100</td><td>355</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.08	50.50	54.00	-3.50	42.49	34.14	10.61	36.74	0.00	100	355	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>93.32</td><td>-----</td><td>-----</td><td>85.02</td><td>34.28</td><td>10.65</td><td>36.63</td><td>0.00</td><td>100</td><td>355</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	93.32	-----	-----	85.02	34.28	10.65	36.63	0.00	100	355
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5146.08	50.50	54.00	-3.50	42.49	34.14	10.61	36.74	0.00	100	355	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	93.32	-----	-----	85.02	34.28	10.65	36.63	0.00	100	355	AVERAGE																																																																																							





Mode	26																																																																
	Band Edge - R																																																																
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																
ANT	CDD 0+1																																																																
Pol.	Horizontal	Fundamental																																																															
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5374.62</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>39.55</td><td>34.50</td><td>10.76</td><td>36.20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>355</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5374.62	48.61	74.00	-25.39	39.55	34.50	10.76	36.20								0.00	100									355									PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																									
1	5374.62	48.61	74.00	-25.39	39.55	34.50	10.76	36.20																																																									
							0.00	100																																																									
								355																																																									
								PEAK																																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5351.94</td><td>39.23</td><td>54.00</td><td>-14.77</td><td>30.23</td><td>34.50</td><td>10.75</td><td>36.25</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>355</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.94	39.23	54.00	-14.77	30.23	34.50	10.75	36.25								0.00	100									355									AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																									
1	5351.94	39.23	54.00	-14.77	30.23	34.50	10.75	36.25																																																									
							0.00	100																																																									
								355																																																									
								AVERAGE																																																									

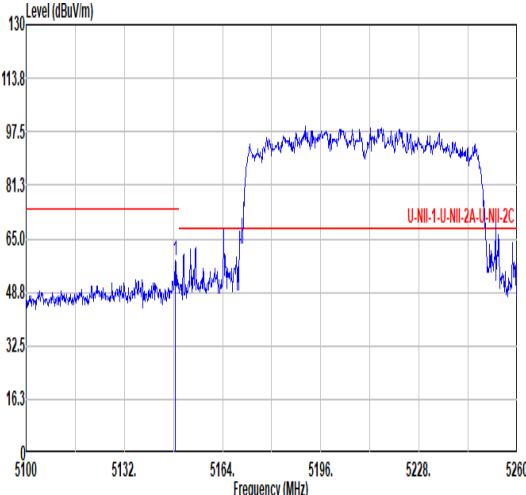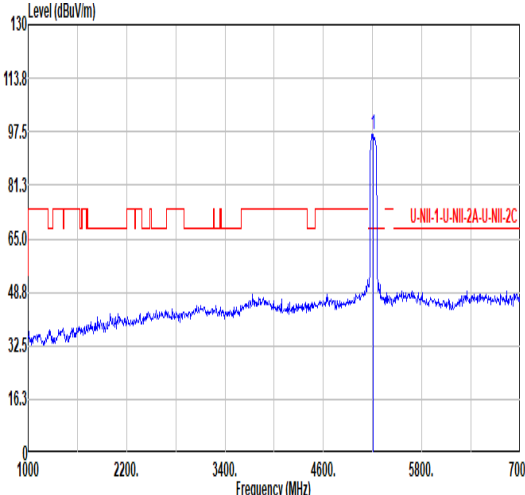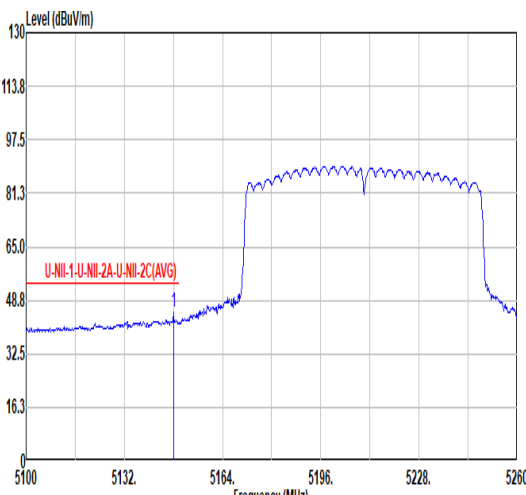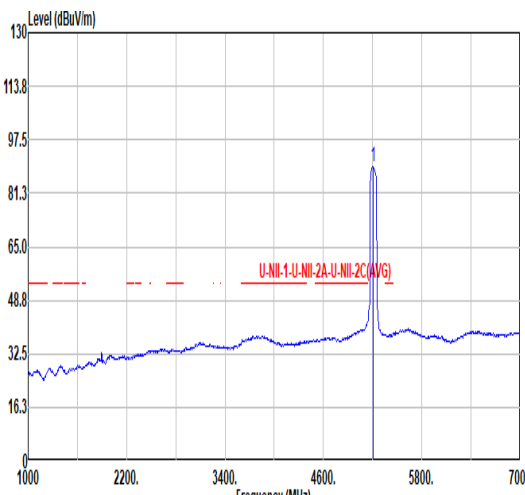

Mode	26																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.64</td><td>58.60</td><td>74.00</td><td>-15.40</td><td>50.58</td><td>34.15</td><td>10.61</td><td>36.74</td><td>0.00</td><td>255</td><td>268</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.64	58.60	74.00	-15.40	50.58	34.15	10.61	36.74	0.00	255	268	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>96.85</td><td>-----</td><td>-----</td><td>88.48</td><td>34.31</td><td>10.66</td><td>36.60</td><td>0.00</td><td>255</td><td>268</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	96.85	-----	-----	88.48	34.31	10.66	36.60	0.00	255	268
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.64	58.60	74.00	-15.40	50.58	34.15	10.61	36.74	0.00	255	268	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	96.85	-----	-----	88.48	34.31	10.66	36.60	0.00	255	268	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.00</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>36.94</td><td>34.14</td><td>10.61</td><td>36.74</td><td>0.00</td><td>255</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.00	44.95	54.00	-9.05	36.94	34.14	10.61	36.74	0.00	255	268	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>89.20</td><td>-----</td><td>-----</td><td>80.83</td><td>34.31</td><td>10.66</td><td>36.60</td><td>0.00</td><td>255</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	89.20	-----	-----	80.83	34.31	10.66	36.60	0.00	255	268
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.00	44.95	54.00	-9.05	36.94	34.14	10.61	36.74	0.00	255	268	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	89.20	-----	-----	80.83	34.31	10.66	36.60	0.00	255	268	AVERAGE																																																																																							



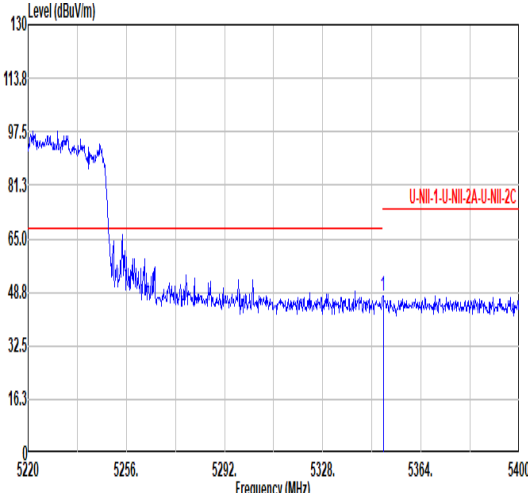
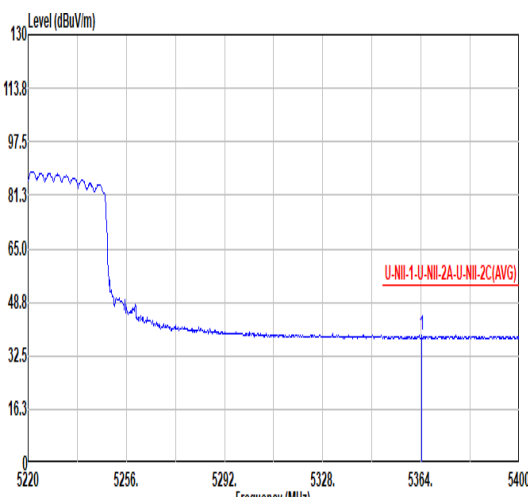


Mode	26																																																														
	Band Edge - R																																																														
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																														
ANT	CDD 0+1																																																														
Pol.	Vertical						Fundamental																																																								
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>5350.14</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>38.62</td><td>34.50</td><td>10.75</td><td>36.25</td><td>0.00</td><td>255</td><td>268</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	5350.14	47.62	74.00	-26.38	38.62	34.50	10.75	36.25	0.00	255	268	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																						
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5350.14	47.62	74.00	-26.38	38.62	34.50	10.75	36.25	0.00	255	268	PEAK																																																			
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>5364.36</td><td>38.61</td><td>54.00</td><td>-15.39</td><td>29.58</td><td>34.50</td><td>10.75</td><td>36.22</td><td>0.00</td><td>255</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	5364.36	38.61	54.00	-15.39	29.58	34.50	10.75	36.22	0.00	255	268	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																						
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5364.36	38.61	54.00	-15.39	29.58	34.50	10.75	36.22	0.00	255	268	AVERAGE																																																			



		26											
Mode		Harmonic											
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz											
ANT		CDD 0+1											
Pol.		Horizontal						Vertical					
Peak Avg													

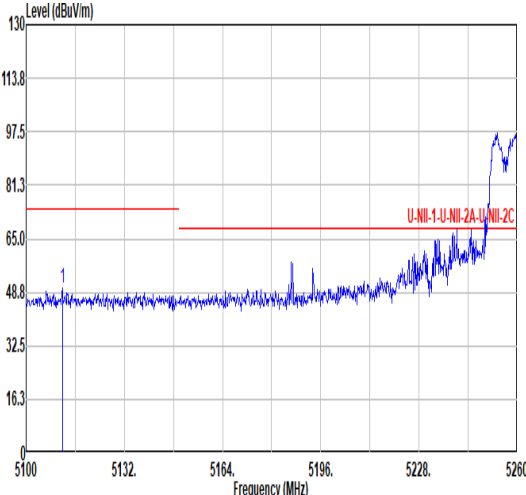
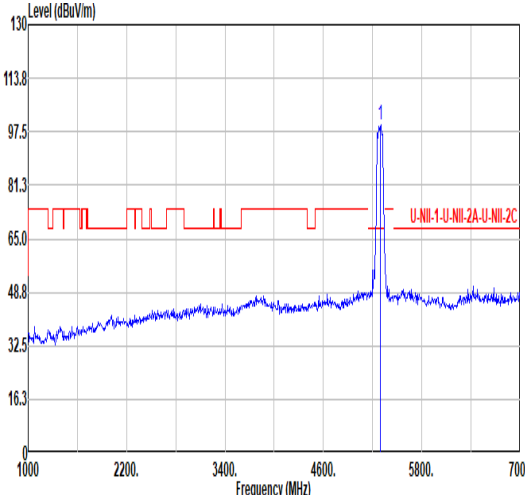
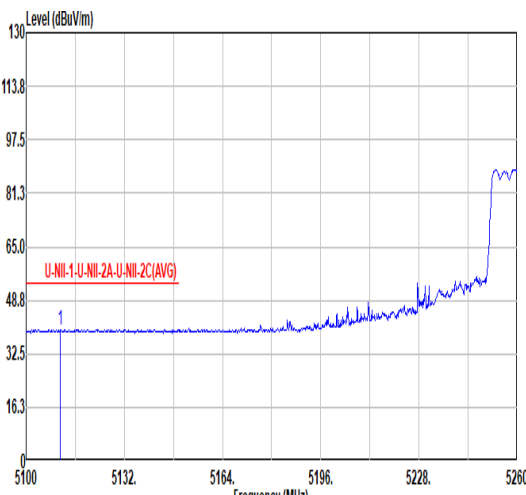
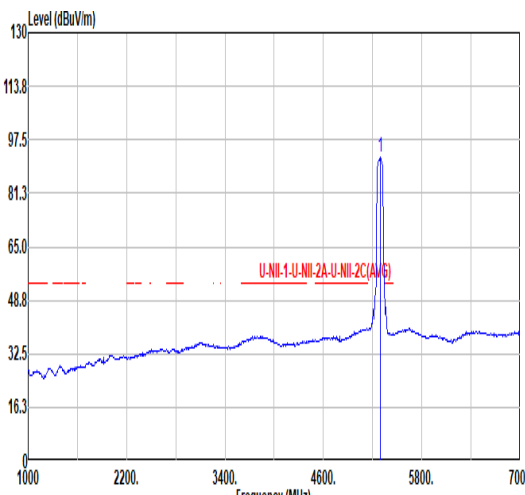


Mode	27																																																																																																																															
	Band Edge - L																																																																																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																																																															
ANT	CDD 0+1																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																														
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5111.84</td><td>50.11</td><td>74.00</td><td>-23.89</td><td>42.33</td><td>34.04</td><td>10.57</td><td>36.83</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>337 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5111.84	50.11	74.00	-23.89	42.33	34.04	10.57	36.83								0.00	100								cm	deg									337 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>99.67</td><td>-----</td><td>-----</td><td>90.82</td><td>34.50</td><td>10.72</td><td>36.37</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>337 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	99.67	-----	-----	90.82	34.50	10.72	36.37								0.00	100								cm	deg									337 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																								
1	5111.84	50.11	74.00	-23.89	42.33	34.04	10.57	36.83																																																																																																																								
							0.00	100																																																																																																																								
							cm	deg																																																																																																																								
								337 PEAK																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																								
1	5290.00	99.67	-----	-----	90.82	34.50	10.72	36.37																																																																																																																								
							0.00	100																																																																																																																								
							cm	deg																																																																																																																								
								337 PEAK																																																																																																																								
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5111.04</td><td>39.95</td><td>54.00</td><td>-14.05</td><td>32.18</td><td>34.03</td><td>10.57</td><td>36.83</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>337 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5111.04	39.95	54.00	-14.05	32.18	34.03	10.57	36.83								0.00	100								cm	deg									337 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>92.00</td><td>-----</td><td>-----</td><td>83.17</td><td>34.49</td><td>10.72</td><td>36.38</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>337 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	92.00	-----	-----	83.17	34.49	10.72	36.38								0.00	100								cm	deg									337 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																								
1	5111.04	39.95	54.00	-14.05	32.18	34.03	10.57	36.83																																																																																																																								
							0.00	100																																																																																																																								
							cm	deg																																																																																																																								
								337 AVERAGE																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																								
1	5290.00	92.00	-----	-----	83.17	34.49	10.72	36.38																																																																																																																								
							0.00	100																																																																																																																								
							cm	deg																																																																																																																								
								337 AVERAGE																																																																																																																								





Mode	27																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5370.90</td><td>59.00</td><td>74.00</td><td>-15.00</td><td>49.95</td><td>34.50</td><td>10.76</td><td>36.21</td><td>0.00</td><td>100</td><td>337</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5370.90	59.00	74.00	-15.00	49.95	34.50	10.76	36.21	0.00	100	337	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5370.90	59.00	74.00	-15.00	49.95	34.50	10.76	36.21	0.00	100	337	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.10</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>41.00</td><td>34.50</td><td>10.75</td><td>36.24</td><td>0.00</td><td>100</td><td>337</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5358.10	50.81	54.00	-3.19	41.00	34.50	10.75	36.24	0.00	100	337	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5358.10	50.81	54.00	-3.19	41.00	34.50	10.75	36.24	0.00	100	337	AVERAGE																																											

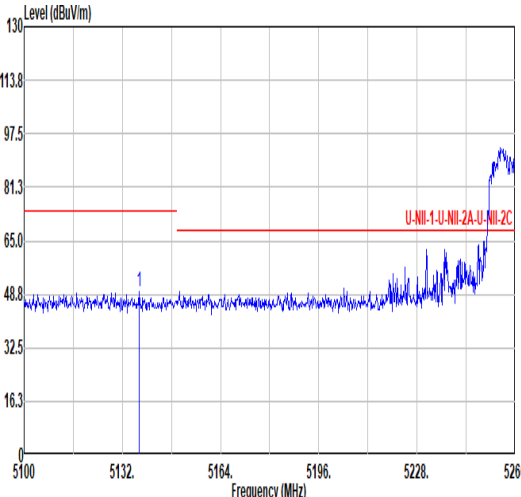
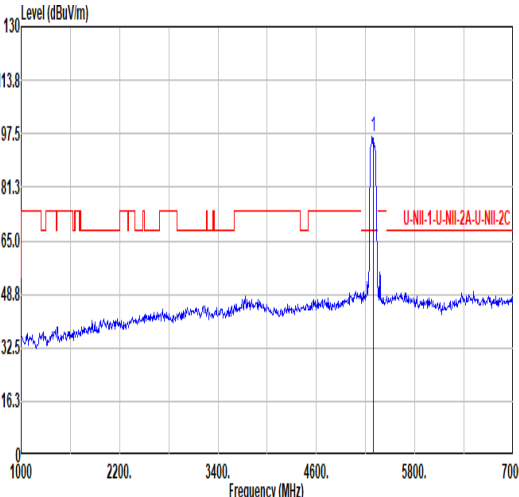
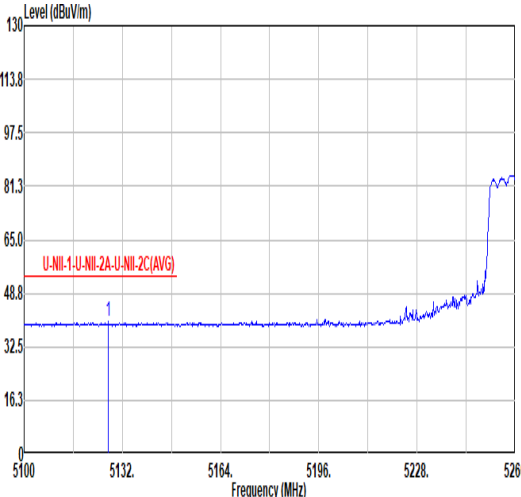
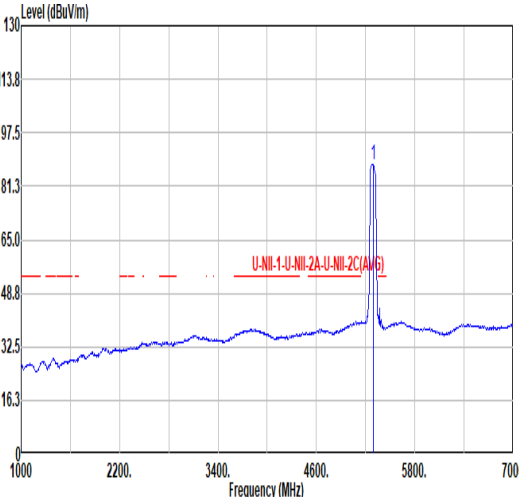


Mode	27																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5137.44</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>41.64</td><td>34.11</td><td>10.60</td><td>36.76</td><td>0.00</td><td>330</td><td>267</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5137.44	49.59	74.00	-24.41	41.64	34.11	10.60	36.76	0.00	330	267	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>96.45</td><td>-----</td><td>-----</td><td>87.71</td><td>34.46</td><td>10.71</td><td>36.43</td><td>0.00</td><td>330</td><td>267</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	96.45	-----	-----	87.71	34.46	10.71	36.43	0.00	330	267
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5137.44	49.59	74.00	-24.41	41.64	34.11	10.60	36.76	0.00	330	267	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5290.00	96.45	-----	-----	87.71	34.46	10.71	36.43	0.00	330	267	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5127.52</td><td>40.17</td><td>54.00</td><td>-13.83</td><td>32.30</td><td>34.00</td><td>10.58</td><td>36.79</td><td>0.00</td><td>330</td><td>267</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5127.52	40.17	54.00	-13.83	32.30	34.00	10.58	36.79	0.00	330	267	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>88.03</td><td>-----</td><td>-----</td><td>79.26</td><td>34.47</td><td>10.71</td><td>36.41</td><td>0.00</td><td>330</td><td>267</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	88.03	-----	-----	79.26	34.47	10.71	36.41	0.00	330	267
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5127.52	40.17	54.00	-13.83	32.30	34.00	10.58	36.79	0.00	330	267	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5290.00	88.03	-----	-----	79.26	34.47	10.71	36.41	0.00	330	267	AVERAGE																																																																																							



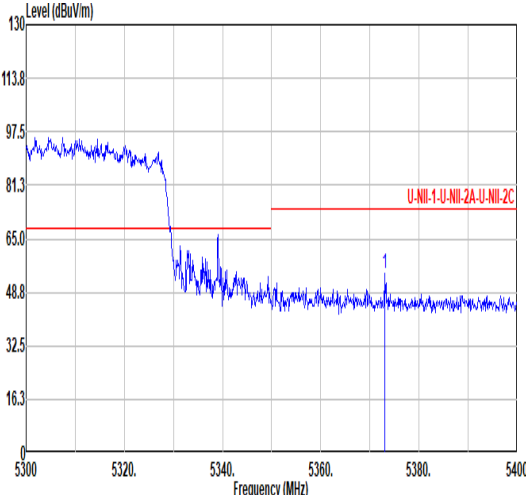
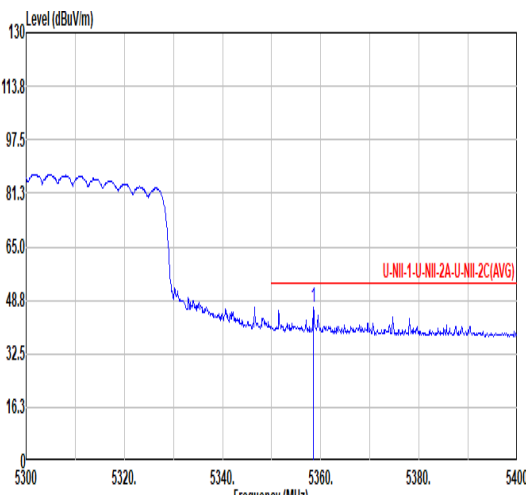


Mode	27																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5373.10</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>45.55</td><td>34.50</td><td>10.76</td><td>36.20</td><td>0.00</td><td>330</td><td>267</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5373.10	54.61	74.00	-19.39	45.55	34.50	10.76	36.20	0.00	330	267	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5373.10	54.61	74.00	-19.39	45.55	34.50	10.76	36.20	0.00	330	267	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.50</td><td>46.77</td><td>54.00</td><td>-7.23</td><td>37.75</td><td>34.50</td><td>10.75</td><td>36.23</td><td>0.00</td><td>330</td><td>267</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5358.50	46.77	54.00	-7.23	37.75	34.50	10.75	36.23	0.00	330	267	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5358.50	46.77	54.00	-7.23	37.75	34.50	10.75	36.23	0.00	330	267	AVERAGE																																											

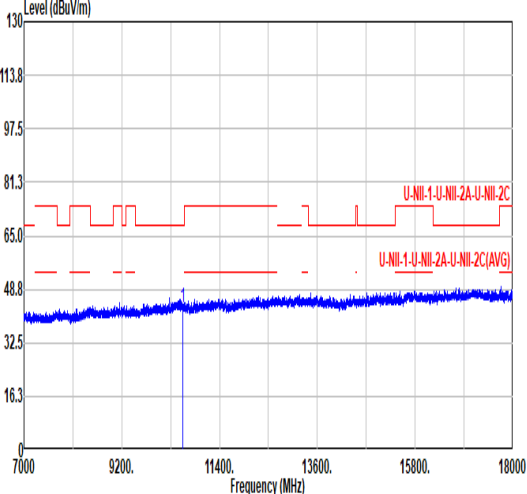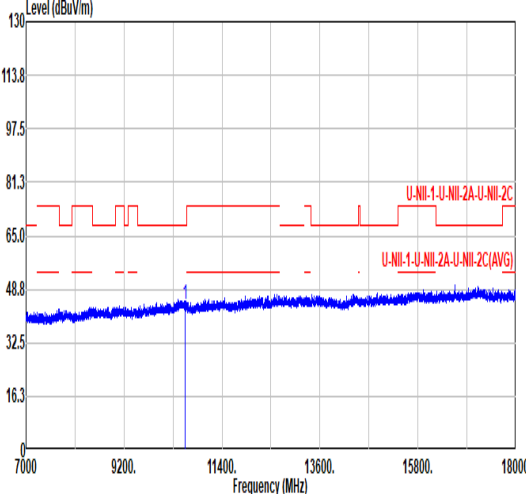


Mode	27	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	CDD 0+1	
Pol.	Horizontal	Vertical
Peak		
Avg		

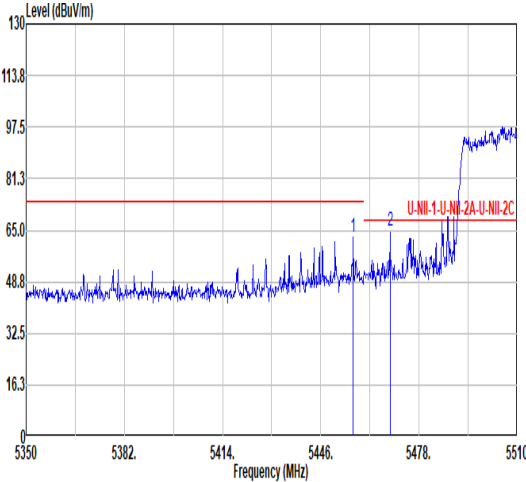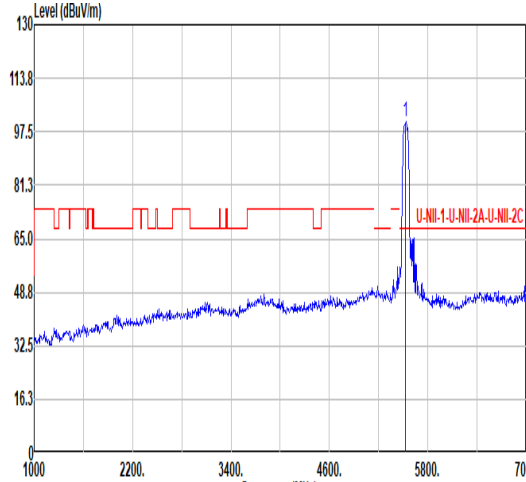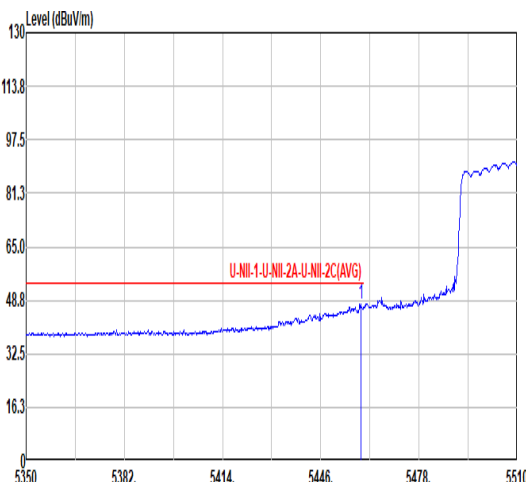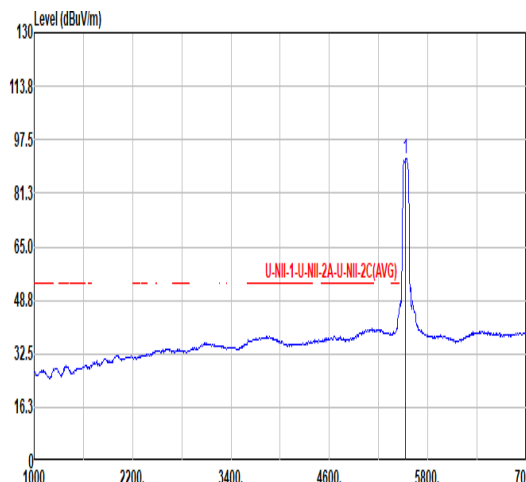

Mode	28																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																																
ANT	CDD 0+1																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.56</td><td>62.75</td><td>74.00</td><td>-11.25</td><td>53.35</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>100</td><td>233</td><td>PEAK</td></tr><tr><td>2</td><td>5468.56</td><td>64.53</td><td>68.20</td><td>-3.67</td><td>55.08</td><td>34.57</td><td>10.85</td><td>35.97</td><td>0.00</td><td>100</td><td>233</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.56	62.75	74.00	-11.25	53.35	34.56	10.84	36.00	0.00	100	233	PEAK	2	5468.56	64.53	68.20	-3.67	55.08	34.57	10.85	35.97	0.00	100	233	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>100.60</td><td>-----</td><td>-----</td><td>90.88</td><td>34.60</td><td>10.93</td><td>35.81</td><td>0.00</td><td>100</td><td>233</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	100.60	-----	-----	90.88	34.60	10.93	35.81	0.00	100	233	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5456.56	62.75	74.00	-11.25	53.35	34.56	10.84	36.00	0.00	100	233	PEAK																																																																																																					
2	5468.56	64.53	68.20	-3.67	55.08	34.57	10.85	35.97	0.00	100	233	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5530.00	100.60	-----	-----	90.88	34.60	10.93	35.81	0.00	100	233	PEAK																																																																																																					
Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.12</td><td>47.65</td><td>54.00</td><td>-6.35</td><td>38.24</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>100</td><td>233</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.12	47.65	54.00	-6.35	38.24	34.56	10.84	35.99	0.00	100	233	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>91.94</td><td>-----</td><td>-----</td><td>82.22</td><td>34.60</td><td>10.93</td><td>35.81</td><td>0.00</td><td>100</td><td>233</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	91.94	-----	-----	82.22	34.60	10.93	35.81	0.00	100	233	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5459.12	47.65	54.00	-6.35	38.24	34.56	10.84	35.99	0.00	100	233	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5530.00	91.94	-----	-----	82.22	34.60	10.93	35.81	0.00	100	233	AVERAGE																																																																																																					

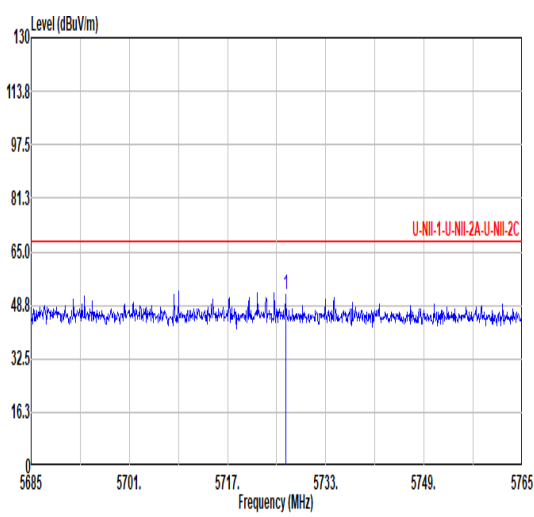


Mode	28																																																						
	Band Edge - R																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.44</td><td>51.83</td><td>68.20</td><td>-16.37</td><td>43.20</td><td>34.68</td><td>11.18</td><td>37.23</td><td>0.00</td><td>100</td><td>233</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.44	51.83	68.20	-16.37	43.20	34.68	11.18	37.23	0.00	100	233	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5726.44	51.83	68.20	-16.37	43.20	34.68	11.18	37.23	0.00	100	233	PEAK																																											







Mode	28																																																																																																																											
	Band Edge - L																																																																																																																											
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																																											
ANT	CDD 0+1																																																																																																																											
Pol.	Vertical						Fundamental																																																																																																																					
Peak																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.84</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>45.04</td><td>34.56</td><td>10.84</td><td>36.00</td><td>0.00</td><td>334</td><td>248</td><td>PEAK</td></tr><tr><td>2</td><td>5465.20</td><td>58.05</td><td>68.20</td><td>-10.15</td><td>48.61</td><td>34.57</td><td>10.85</td><td>35.98</td><td>0.00</td><td>334</td><td>248</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.84	54.44	74.00	-19.56	45.04	34.56	10.84	36.00	0.00	334	248	PEAK	2	5465.20	58.05	68.20	-10.15	48.61	34.57	10.85	35.98	0.00	334	248	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>97.70</td><td>-----</td><td>-----</td><td>88.00</td><td>34.60</td><td>10.92</td><td>35.82</td><td>0.00</td><td>334</td><td>248</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	97.70	-----	-----	88.00	34.60	10.92	35.82	0.00	334	248
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5457.84	54.44	74.00	-19.56	45.04	34.56	10.84	36.00	0.00	334	248	PEAK																																																																																																																
2	5465.20	58.05	68.20	-10.15	48.61	34.57	10.85	35.98	0.00	334	248	PEAK																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5530.00	97.70	-----	-----	88.00	34.60	10.92	35.82	0.00	334	248	PEAK																																																																																																																
Avg																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>32.30</td><td>34.56</td><td>10.84</td><td>35.99</td><td>0.00</td><td>334</td><td>248</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.00	41.71	54.00	-12.29	32.30	34.56	10.84	35.99	0.00	334	248	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>89.39</td><td>-----</td><td>-----</td><td>79.72</td><td>34.60</td><td>10.91</td><td>35.84</td><td>0.00</td><td>334</td><td>248</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	89.39	-----	-----	79.72	34.60	10.91	35.84	0.00	334	248	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5458.00	41.71	54.00	-12.29	32.30	34.56	10.84	35.99	0.00	334	248	AVERAGE																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5530.00	89.39	-----	-----	79.72	34.60	10.91	35.84	0.00	334	248	AVERAGE																																																																																																																



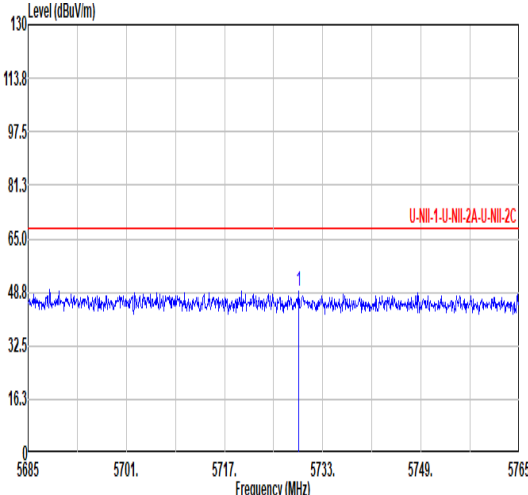


Mode	28																																																						
	Band Edge - R																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																						
ANT	CDD 0+1																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5729.08</td><td>48.96</td><td>68.20</td><td>-19.24</td><td>40.37</td><td>34.69</td><td>11.18</td><td>37.28</td><td>0.00</td><td>334</td><td>248</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5729.08	48.96	68.20	-19.24	40.37	34.69	11.18	37.28	0.00	334	248	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5729.08	48.96	68.20	-19.24	40.37	34.69	11.18	37.28	0.00	334	248	PEAK																																											

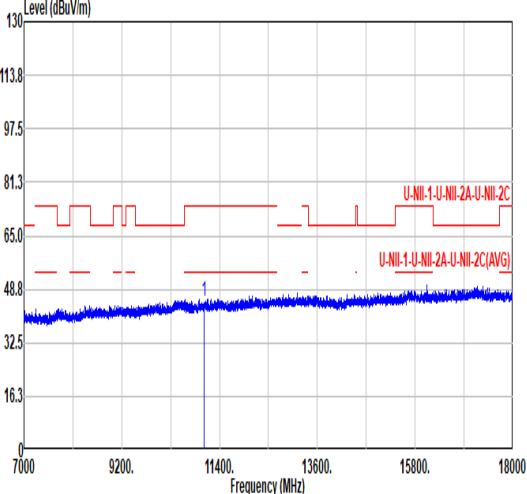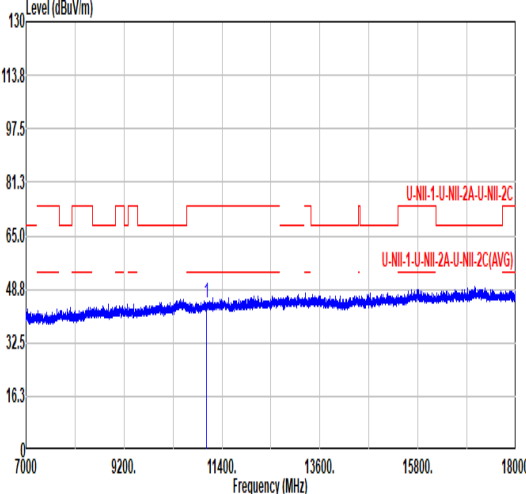




Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	CDD 0+1	
Pol.	Horizontal	Vertical
Peak		
Avg		

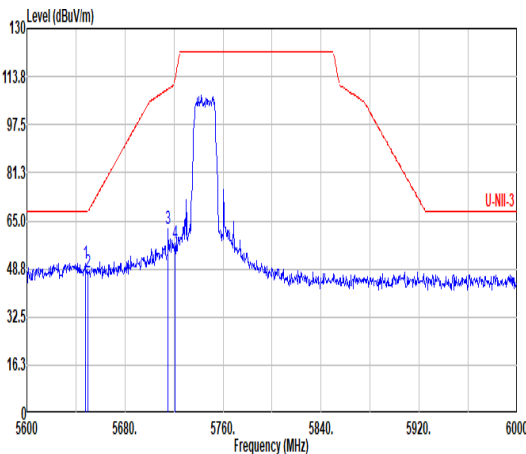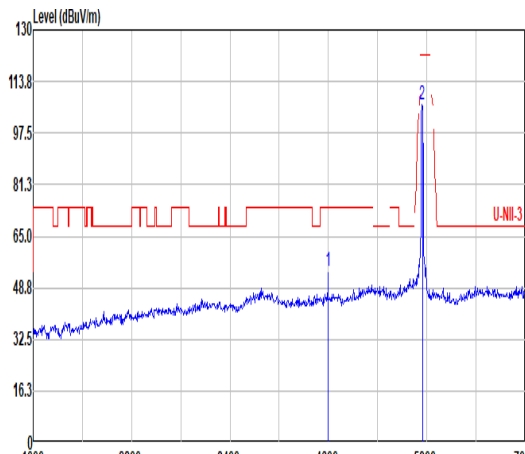
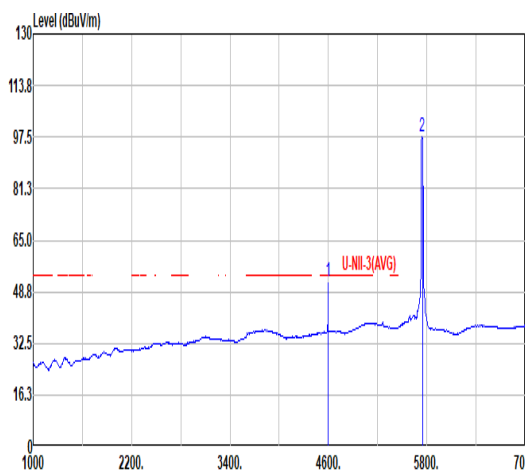


Mode	30																																																																																																																																																						
	Band Edge																																																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																						
ANT	0																																																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																																																
Peak																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5647.60</td><td>50.55</td><td>68.30</td><td>-17.75</td><td>40.59</td><td>34.60</td><td>11.07</td><td>35.71</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>47.62</td><td>68.30</td><td>-20.68</td><td>37.70</td><td>34.60</td><td>11.07</td><td>35.71</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>3</td><td>5715.20</td><td>62.38</td><td>109.56</td><td>-47.18</td><td>53.58</td><td>34.65</td><td>11.16</td><td>37.01</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>4</td><td>5720.80</td><td>57.20</td><td>112.72</td><td>-55.52</td><td>48.49</td><td>34.66</td><td>11.17</td><td>37.12</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5647.60	50.55	68.30	-17.75	40.59	34.60	11.07	35.71	0.00	100	234	PEAK	2	5650.00	47.62	68.30	-20.68	37.70	34.60	11.07	35.71	0.00	100	234	PEAK	3	5715.20	62.38	109.56	-47.18	53.58	34.65	11.16	37.01	0.00	100	234	PEAK	4	5720.80	57.20	112.72	-55.52	48.49	34.66	11.17	37.12	0.00	100	234	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4594.00</td><td>54.09</td><td>74.00</td><td>-19.91</td><td>48.11</td><td>33.99</td><td>10.00</td><td>38.01</td><td>0.00</td><td>100</td><td>234</td><td>Peak</td></tr><tr><td>2</td><td>5745.00</td><td>106.29</td><td>-----</td><td>-----</td><td>97.86</td><td>34.72</td><td>11.20</td><td>37.49</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4594.00	54.09	74.00	-19.91	48.11	33.99	10.00	38.01	0.00	100	234	Peak	2	5745.00	106.29	-----	-----	97.86	34.72	11.20	37.49	0.00	100	234
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	5647.60	50.55	68.30	-17.75	40.59	34.60	11.07	35.71	0.00	100	234	PEAK																																																																																																																																											
2	5650.00	47.62	68.30	-20.68	37.70	34.60	11.07	35.71	0.00	100	234	PEAK																																																																																																																																											
3	5715.20	62.38	109.56	-47.18	53.58	34.65	11.16	37.01	0.00	100	234	PEAK																																																																																																																																											
4	5720.80	57.20	112.72	-55.52	48.49	34.66	11.17	37.12	0.00	100	234	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4594.00	54.09	74.00	-19.91	48.11	33.99	10.00	38.01	0.00	100	234	Peak																																																																																																																																											
2	5745.00	106.29	-----	-----	97.86	34.72	11.20	37.49	0.00	100	234	PEAK																																																																																																																																											
Avg	Blank																																																																																																																																																						
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4594.00</td><td>51.99</td><td>54.00</td><td>-2.01</td><td>46.01</td><td>33.99</td><td>10.00</td><td>38.01</td><td>0.00</td><td>100</td><td>234</td><td>Average</td></tr><tr><td>2</td><td>5745.00</td><td>97.51</td><td>-----</td><td>-----</td><td>89.08</td><td>34.72</td><td>11.20</td><td>37.49</td><td>0.00</td><td>100</td><td>234</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4594.00	51.99	54.00	-2.01	46.01	33.99	10.00	38.01	0.00	100	234	Average	2	5745.00	97.51	-----	-----	89.08	34.72	11.20	37.49	0.00	100	234	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4594.00	51.99	54.00	-2.01	46.01	33.99	10.00	38.01	0.00	100	234	Average																																																																																																																																											
2	5745.00	97.51	-----	-----	89.08	34.72	11.20	37.49	0.00	100	234	AVERAGE																																																																																																																																											

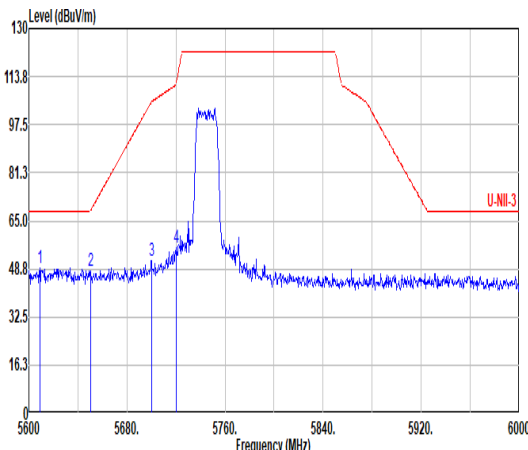
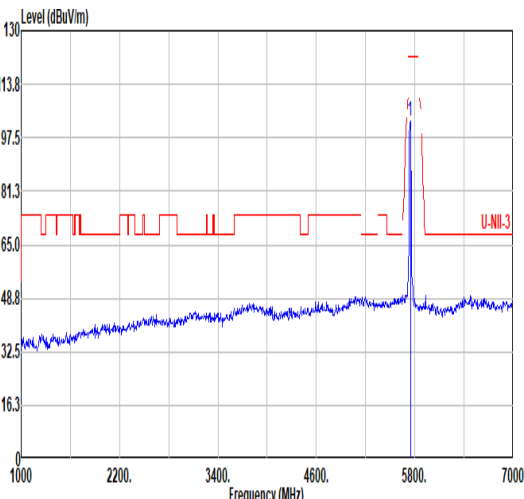
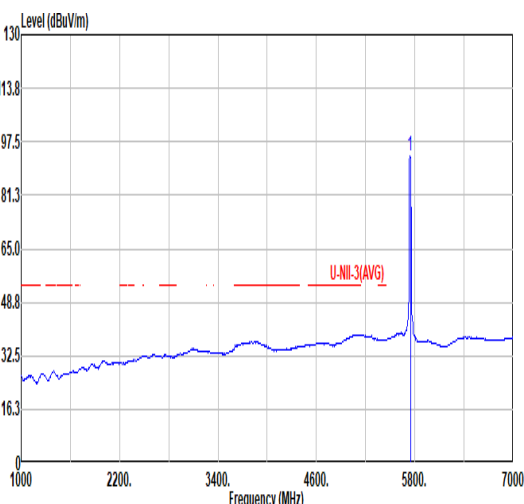


Mode	30																																																																																																																																									
	Band Edge																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																									
ANT	0																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5608.00</td><td>49.16</td><td>68.30</td><td>-19.14</td><td>39.18</td><td>34.60</td><td>11.01</td><td>35.63</td><td>0.00</td><td>327</td><td>238</td><td>PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>48.09</td><td>68.60</td><td>-20.51</td><td>38.18</td><td>34.60</td><td>11.07</td><td>35.76</td><td>0.00</td><td>327</td><td>238</td><td>PEAK</td></tr><tr><td>3</td><td>5700.00</td><td>51.60</td><td>105.30</td><td>-53.70</td><td>42.58</td><td>34.60</td><td>11.14</td><td>36.72</td><td>0.00</td><td>327</td><td>238</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>56.05</td><td>110.90</td><td>-54.85</td><td>47.33</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>327</td><td>238</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5608.00	49.16	68.30	-19.14	39.18	34.60	11.01	35.63	0.00	327	238	PEAK	2	5650.40	48.09	68.60	-20.51	38.18	34.60	11.07	35.76	0.00	327	238	PEAK	3	5700.00	51.60	105.30	-53.70	42.58	34.60	11.14	36.72	0.00	327	238	PEAK	4	5720.00	56.05	110.90	-54.85	47.33	34.66	11.17	37.11	0.00	327	238	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>102.41</td><td>-----</td><td>-----</td><td>94.07</td><td>34.74</td><td>11.21</td><td>37.61</td><td>0.00</td><td>327</td><td>238</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	102.41	-----	-----	94.07	34.74	11.21	37.61	0.00	327	238
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5608.00	49.16	68.30	-19.14	39.18	34.60	11.01	35.63	0.00	327	238	PEAK																																																																																																																														
2	5650.40	48.09	68.60	-20.51	38.18	34.60	11.07	35.76	0.00	327	238	PEAK																																																																																																																														
3	5700.00	51.60	105.30	-53.70	42.58	34.60	11.14	36.72	0.00	327	238	PEAK																																																																																																																														
4	5720.00	56.05	110.90	-54.85	47.33	34.66	11.17	37.11	0.00	327	238	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5745.00	102.41	-----	-----	94.07	34.74	11.21	37.61	0.00	327	238	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>93.21</td><td>-----</td><td>-----</td><td>84.78</td><td>34.72</td><td>11.20</td><td>37.49</td><td>0.00</td><td>327</td><td>238</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	93.21	-----	-----	84.78	34.72	11.20	37.49	0.00	327	238	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5745.00	93.21	-----	-----	84.78	34.72	11.20	37.49	0.00	327	238	AVERAGE																																																																																																																														

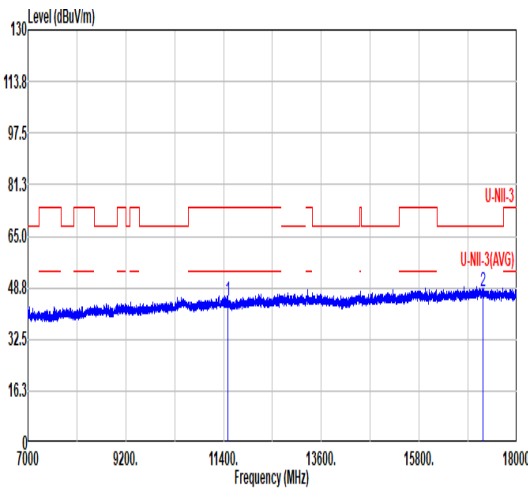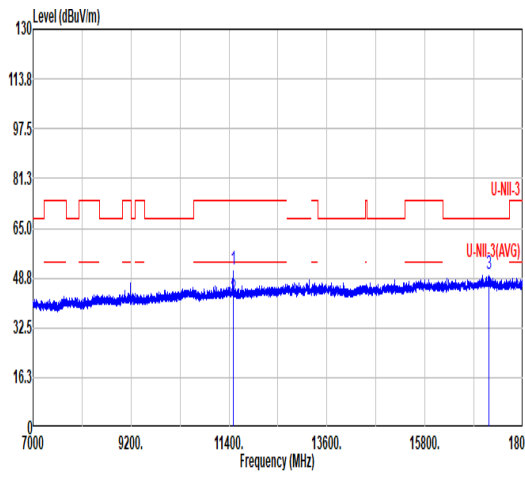


Mode	30																																																																																																																																																		
	Harmonic																																																																																																																																																		
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																		
ANT	0																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																												
Peak Avg																																																																																																																																																			
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>56.33</td><td>38.29</td><td>16.36</td><td>66.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17235.00</td><td>47.82</td><td>68.30</td><td>-20.48</td><td>50.99</td><td>41.25</td><td>20.16</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.00	44.73	74.00	-29.27	56.33	38.29	16.36	66.25	0.00	---	---	PEAK	2	17235.00	47.82	68.30	-20.48	50.99	41.25	20.16	64.58	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>63.00</td><td>38.29</td><td>16.36</td><td>66.25</td><td>0.00</td><td>249</td><td>82</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>53.70</td><td>38.29</td><td>16.36</td><td>66.25</td><td>0.00</td><td>249</td><td>82</td><td>AVERAGE</td></tr><tr><td>3</td><td>17235.00</td><td>50.27</td><td>68.30</td><td>-18.03</td><td>53.44</td><td>41.25</td><td>20.16</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.00	51.40	74.00	-22.60	63.00	38.29	16.36	66.25	0.00	249	82	PEAK	2	11490.00	42.10	54.00	-11.90	53.70	38.29	16.36	66.25	0.00	249	82	AVERAGE	3	17235.00	50.27	68.30	-18.03	53.44	41.25	20.16	64.58	0.00	---	---	PEAK
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1	11490.00	44.73	74.00	-29.27	56.33	38.29	16.36	66.25	0.00	---	---	PEAK																																																																																																																																							
2	17235.00	47.82	68.30	-20.48	50.99	41.25	20.16	64.58	0.00	---	---	PEAK																																																																																																																																							
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1	11490.00	51.40	74.00	-22.60	63.00	38.29	16.36	66.25	0.00	249	82	PEAK																																																																																																																																							
2	11490.00	42.10	54.00	-11.90	53.70	38.29	16.36	66.25	0.00	249	82	AVERAGE																																																																																																																																							
3	17235.00	50.27	68.30	-18.03	53.44	41.25	20.16	64.58	0.00	---	---	PEAK																																																																																																																																							

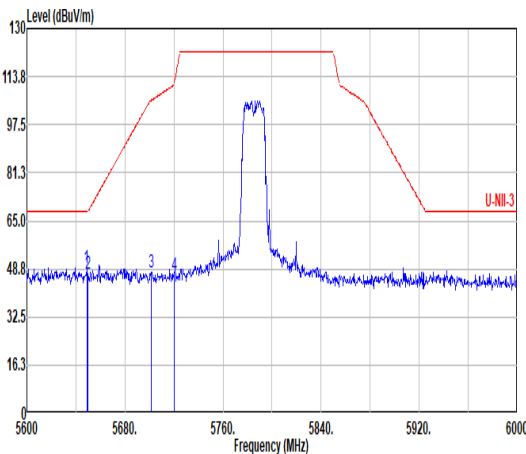
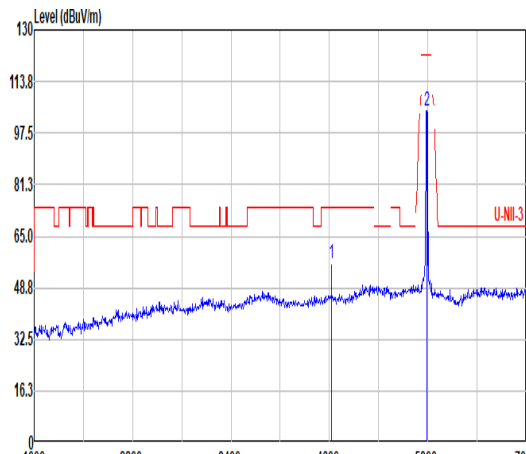
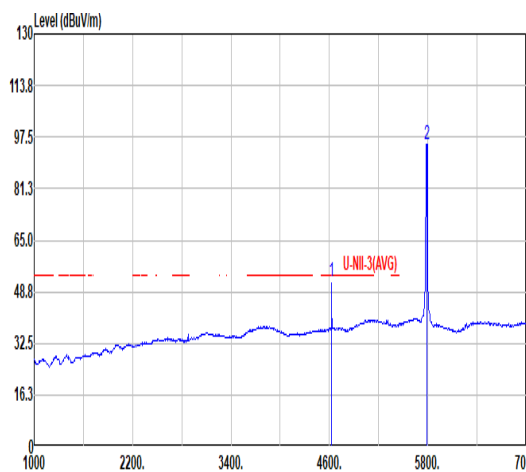


Mode	31																																																																																																																																																					
	Band Edge - L																																																																																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																																					
ANT	0																																																																																																																																																					
Pol.	Horizontal						Fundamental																																																																																																																																															
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a red limit line and a blue test signal. The signal is centered around 5785 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5600 to 6000 MHz. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.00</td><td>48.92</td><td>68.30</td><td>-19.38</td><td>38.98</td><td>34.60</td><td>11.07</td><td>35.73</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>47.31</td><td>68.30</td><td>-20.99</td><td>37.39</td><td>34.60</td><td>11.07</td><td>35.75</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr><tr><td>3</td><td>5701.20</td><td>47.62</td><td>105.64</td><td>-58.02</td><td>38.62</td><td>34.60</td><td>11.14</td><td>36.74</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>46.63</td><td>110.90</td><td>-64.27</td><td>37.91</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.00	48.92	68.30	-19.38	38.98	34.60	11.07	35.73	0.00	321	350	PEAK	2	5650.00	47.31	68.30	-20.99	37.39	34.60	11.07	35.75	0.00	321	350	PEAK	3	5701.20	47.62	105.64	-58.02	38.62	34.60	11.14	36.74	0.00	321	350	PEAK	4	5720.00	46.63	110.90	-64.27	37.91	34.66	11.17	37.11	0.00	321	350	PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a red limit line and a blue test signal. The signal is centered around 5785 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4630.00</td><td>56.61</td><td>74.00</td><td>-17.39</td><td>50.44</td><td>34.06</td><td>10.04</td><td>37.93</td><td>0.00</td><td>321</td><td>350</td><td>Peak</td></tr><tr><td>2</td><td>5788.00</td><td>104.58</td><td>-----</td><td>-----</td><td>96.88</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>321</td><td>350</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4630.00	56.61	74.00	-17.39	50.44	34.06	10.04	37.93	0.00	321	350	Peak	2	5788.00	104.58	-----	-----	96.88	34.86	11.26	38.42	0.00	321	350	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	5648.00	48.92	68.30	-19.38	38.98	34.60	11.07	35.73	0.00	321	350	PEAK																																																																																																																																										
2	5650.00	47.31	68.30	-20.99	37.39	34.60	11.07	35.75	0.00	321	350	PEAK																																																																																																																																										
3	5701.20	47.62	105.64	-58.02	38.62	34.60	11.14	36.74	0.00	321	350	PEAK																																																																																																																																										
4	5720.00	46.63	110.90	-64.27	37.91	34.66	11.17	37.11	0.00	321	350	PEAK																																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4630.00	56.61	74.00	-17.39	50.44	34.06	10.04	37.93	0.00	321	350	Peak																																																																																																																																										
2	5788.00	104.58	-----	-----	96.88	34.86	11.26	38.42	0.00	321	350	Peak																																																																																																																																										
Avg	Blank						 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a red limit line and a blue test signal. The signal is centered around 5785 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4630.00</td><td>52.00</td><td>54.00</td><td>-2.00</td><td>45.83</td><td>34.06</td><td>10.04</td><td>37.93</td><td>0.00</td><td>321</td><td>350</td><td>Average</td></tr><tr><td>2</td><td>5785.00</td><td>95.37</td><td>-----</td><td>-----</td><td>87.67</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>321</td><td>350</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4630.00	52.00	54.00	-2.00	45.83	34.06	10.04	37.93	0.00	321	350	Average	2	5785.00	95.37	-----	-----	87.67	34.86	11.26	38.42	0.00	321	350	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4630.00	52.00	54.00	-2.00	45.83	34.06	10.04	37.93	0.00	321	350	Average																																																																																																																																										
2	5785.00	95.37	-----	-----	87.67	34.86	11.26	38.42	0.00	321	350	AVERAGE																																																																																																																																										

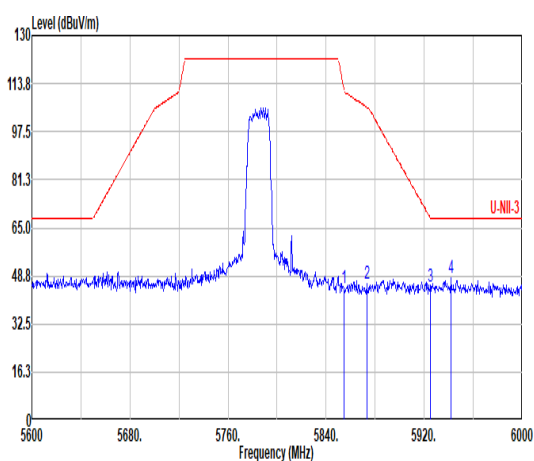

Mode	31																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																				
ANT	0																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>44.81</td><td>111.36</td><td>-66.55</td><td>38.17</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr><tr><td>2</td><td>5873.20</td><td>46.13</td><td>105.80</td><td>-59.67</td><td>39.41</td><td>35.05</td><td>11.35</td><td>39.68</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>45.20</td><td>68.45</td><td>-23.25</td><td>38.28</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr><tr><td>4</td><td>5942.00</td><td>47.98</td><td>68.30</td><td>-20.32</td><td>40.99</td><td>35.14</td><td>11.42</td><td>39.57</td><td>0.00</td><td>321</td><td>350</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	44.81	111.36	-66.55	38.17	35.01	11.34	39.71	0.00	321	350	PEAK	2	5873.20	46.13	105.80	-59.67	39.41	35.05	11.35	39.68	0.00	321	350	PEAK	3	5924.80	45.20	68.45	-23.25	38.28	35.12	11.40	39.60	0.00	321	350	PEAK	4	5942.00	47.98	68.30	-20.32	40.99	35.14	11.42	39.57	0.00	321	350	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	44.81	111.36	-66.55	38.17	35.01	11.34	39.71	0.00	321	350	PEAK																																																																									
2	5873.20	46.13	105.80	-59.67	39.41	35.05	11.35	39.68	0.00	321	350	PEAK																																																																									
3	5924.80	45.20	68.45	-23.25	38.28	35.12	11.40	39.60	0.00	321	350	PEAK																																																																									
4	5942.00	47.98	68.30	-20.32	40.99	35.14	11.42	39.57	0.00	321	350	PEAK																																																																									

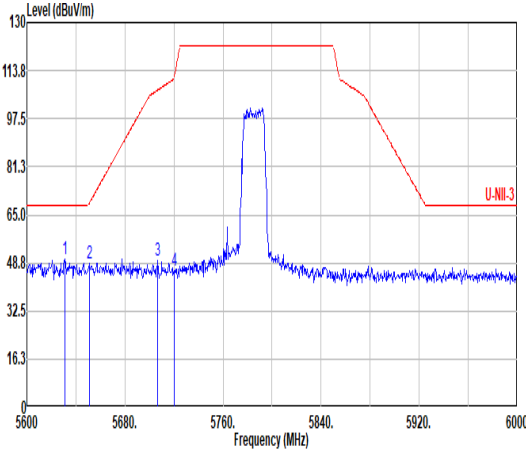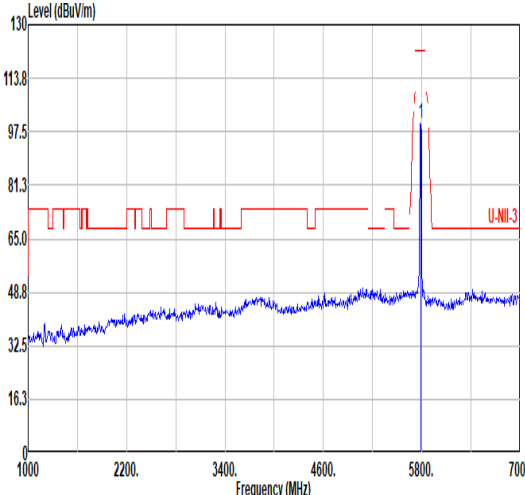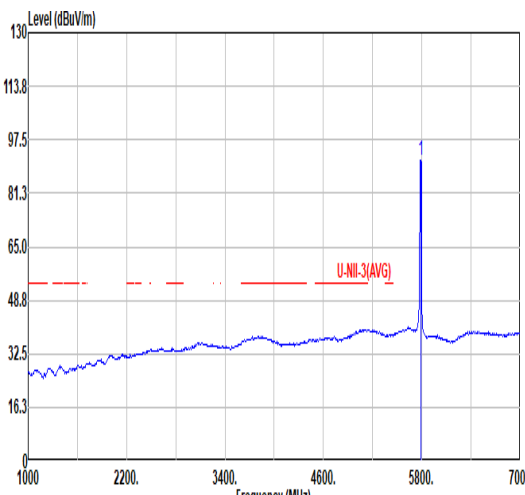

Mode	31																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																									
ANT	0																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5630.00</td><td>50.06</td><td>68.30</td><td>-18.24</td><td>39.99</td><td>34.60</td><td>11.05</td><td>35.58</td><td>0.00</td><td>400</td><td>81</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>48.35</td><td>68.89</td><td>-20.54</td><td>38.45</td><td>34.60</td><td>11.07</td><td>35.77</td><td>0.00</td><td>400</td><td>81</td><td>PEAK</td></tr><tr><td>3</td><td>5706.00</td><td>49.53</td><td>107.21</td><td>-57.68</td><td>40.61</td><td>34.62</td><td>11.15</td><td>36.85</td><td>0.00</td><td>400</td><td>81</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>46.34</td><td>110.90</td><td>-64.56</td><td>37.62</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>400</td><td>81</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5630.00	50.06	68.30	-18.24	39.99	34.60	11.05	35.58	0.00	400	81	PEAK	2	5650.00	48.35	68.89	-20.54	38.45	34.60	11.07	35.77	0.00	400	81	PEAK	3	5706.00	49.53	107.21	-57.68	40.61	34.62	11.15	36.85	0.00	400	81	PEAK	4	5720.00	46.34	110.90	-64.56	37.62	34.66	11.17	37.11	0.00	400	81	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5785.00</td><td>100.23</td><td>-----</td><td>-----</td><td>92.34</td><td>34.83</td><td>11.25</td><td>38.19</td><td>0.00</td><td>400</td><td>81</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5785.00	100.23	-----	-----	92.34	34.83	11.25	38.19	0.00	400	81
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5630.00	50.06	68.30	-18.24	39.99	34.60	11.05	35.58	0.00	400	81	PEAK																																																																																																																														
2	5650.00	48.35	68.89	-20.54	38.45	34.60	11.07	35.77	0.00	400	81	PEAK																																																																																																																														
3	5706.00	49.53	107.21	-57.68	40.61	34.62	11.15	36.85	0.00	400	81	PEAK																																																																																																																														
4	5720.00	46.34	110.90	-64.56	37.62	34.66	11.17	37.11	0.00	400	81	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5785.00	100.23	-----	-----	92.34	34.83	11.25	38.19	0.00	400	81	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5785.00</td><td>91.17</td><td>-----</td><td>-----</td><td>83.47</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>400</td><td>81</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5785.00	91.17	-----	-----	83.47	34.86	11.26	38.42	0.00	400	81	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5785.00	91.17	-----	-----	83.47	34.86	11.26	38.42	0.00	400	81	AVERAGE																																																																																																																														






Mode	31																																																																																									
	Band Edge - R																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>48.74</td><td>111.36</td><td>-62.62</td><td>42.10</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>243</td><td>81 Peak</td></tr><tr><td>2</td><td>5857.60</td><td>47.97</td><td>110.17</td><td>-62.20</td><td>41.32</td><td>35.02</td><td>11.34</td><td>39.71</td><td>0.00</td><td>243</td><td>81 Peak</td></tr><tr><td>3</td><td>5898.40</td><td>49.16</td><td>87.94</td><td>-38.78</td><td>42.32</td><td>35.10</td><td>11.38</td><td>39.64</td><td>0.00</td><td>243</td><td>81 Peak</td></tr><tr><td>4</td><td>5925.00</td><td>48.62</td><td>68.30</td><td>-19.68</td><td>41.70</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>243</td><td>81 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.00	48.74	111.36	-62.62	42.10	35.01	11.34	39.71	0.00	243	81 Peak	2	5857.60	47.97	110.17	-62.20	41.32	35.02	11.34	39.71	0.00	243	81 Peak	3	5898.40	49.16	87.94	-38.78	42.32	35.10	11.38	39.64	0.00	243	81 Peak	4	5925.00	48.62	68.30	-19.68	41.70	35.12	11.40	39.60	0.00	243	81 Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5854.00	48.74	111.36	-62.62	42.10	35.01	11.34	39.71	0.00	243	81 Peak																																																																															
2	5857.60	47.97	110.17	-62.20	41.32	35.02	11.34	39.71	0.00	243	81 Peak																																																																															
3	5898.40	49.16	87.94	-38.78	42.32	35.10	11.38	39.64	0.00	243	81 Peak																																																																															
4	5925.00	48.62	68.30	-19.68	41.70	35.12	11.40	39.60	0.00	243	81 Peak																																																																															





Mode	31																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																											
ANT	0																																																																																																																											
Pol.	Horizontal												Vertical																																																																																																															
Peak Avg																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>44.53</td><td>74.00</td><td>-29.47</td><td>55.99</td><td>38.36</td><td>16.41</td><td>66.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	44.53	74.00	-29.47	55.99	38.36	16.41	66.23	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>51.62</td><td>74.00</td><td>-22.38</td><td>63.08</td><td>38.36</td><td>16.41</td><td>66.23</td><td>0.00</td><td>279</td><td>73</td><td>PEAK</td></tr><tr><td>2</td><td>11570.00</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>52.77</td><td>38.36</td><td>16.41</td><td>66.23</td><td>0.00</td><td>279</td><td>73</td><td>AVERAGE</td></tr></table>				Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	51.62	74.00	-22.38	63.08	38.36	16.41	66.23	0.00	279	73	PEAK	2	11570.00	41.31	54.00	-12.69	52.77	38.36	16.41	66.23	0.00	279	73
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	11570.00	44.53	74.00	-29.47	55.99	38.36	16.41	66.23	0.00	---	---	PEAK																																																																																																																
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	11570.00	51.62	74.00	-22.38	63.08	38.36	16.41	66.23	0.00	279	73	PEAK																																																																																																																
2	11570.00	41.31	54.00	-12.69	52.77	38.36	16.41	66.23	0.00	279	73	AVERAGE																																																																																																																

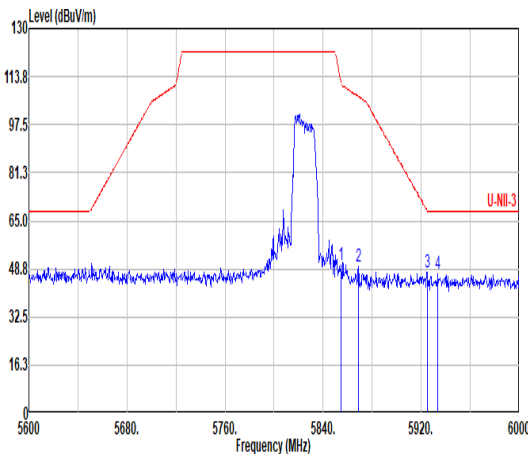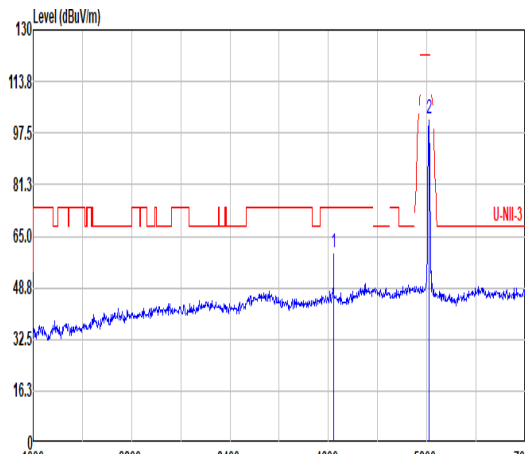
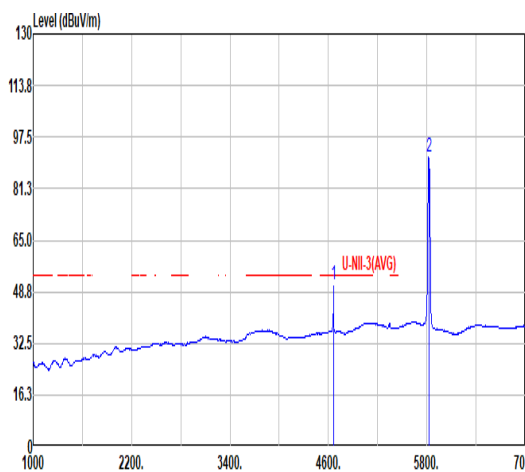


Mode	32																																																																																																																																																						
	Band Edge - L																																																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																																						
ANT	0																																																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																																																
Peak																																																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.00</td><td>50.21</td><td>111.36</td><td>-61.15</td><td>43.57</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>100</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>5868.00</td><td>49.56</td><td>107.03</td><td>-57.47</td><td>42.86</td><td>35.04</td><td>11.35</td><td>39.69</td><td>0.00</td><td>100</td><td>176</td><td>PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>47.52</td><td>68.45</td><td>-20.93</td><td>40.60</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>100</td><td>176</td><td>PEAK</td></tr><tr><td>4</td><td>5933.60</td><td>46.91</td><td>68.30</td><td>-21.39</td><td>39.95</td><td>35.13</td><td>11.41</td><td>39.58</td><td>0.00</td><td>100</td><td>176</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	50.21	111.36	-61.15	43.57	35.01	11.34	39.71	0.00	100	176	PEAK	2	5868.00	49.56	107.03	-57.47	42.86	35.04	11.35	39.69	0.00	100	176	PEAK	3	5924.00	47.52	68.45	-20.93	40.60	35.12	11.40	39.60	0.00	100	176	PEAK	4	5933.60	46.91	68.30	-21.39	39.95	35.13	11.41	39.58	0.00	100	176	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4660.00</td><td>59.81</td><td>74.00</td><td>-14.19</td><td>53.48</td><td>34.12</td><td>10.07</td><td>37.86</td><td>0.00</td><td>100</td><td>357</td><td>PEAK</td></tr><tr><td>2</td><td>5825.00</td><td>102.20</td><td>-----</td><td>95.07</td><td>34.95</td><td>11.31</td><td>39.13</td><td>0.00</td><td>100</td><td>100</td><td>176</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4660.00	59.81	74.00	-14.19	53.48	34.12	10.07	37.86	0.00	100	357	PEAK	2	5825.00	102.20	-----	95.07	34.95	11.31	39.13	0.00	100	100	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	5854.00	50.21	111.36	-61.15	43.57	35.01	11.34	39.71	0.00	100	176	PEAK																																																																																																																																											
2	5868.00	49.56	107.03	-57.47	42.86	35.04	11.35	39.69	0.00	100	176	PEAK																																																																																																																																											
3	5924.00	47.52	68.45	-20.93	40.60	35.12	11.40	39.60	0.00	100	176	PEAK																																																																																																																																											
4	5933.60	46.91	68.30	-21.39	39.95	35.13	11.41	39.58	0.00	100	176	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4660.00	59.81	74.00	-14.19	53.48	34.12	10.07	37.86	0.00	100	357	PEAK																																																																																																																																											
2	5825.00	102.20	-----	95.07	34.95	11.31	39.13	0.00	100	100	176	PEAK																																																																																																																																											
Avg	Blank																																																																																																																																																						
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4660.00</td><td>50.88</td><td>54.00</td><td>-3.12</td><td>44.55</td><td>34.12</td><td>10.07</td><td>37.86</td><td>0.00</td><td>100</td><td>357</td><td>AVERAGE</td></tr><tr><td>2</td><td>5825.00</td><td>91.09</td><td>-----</td><td>83.85</td><td>34.94</td><td>11.30</td><td>39.00</td><td>0.00</td><td>100</td><td>100</td><td>176</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4660.00	50.88	54.00	-3.12	44.55	34.12	10.07	37.86	0.00	100	357	AVERAGE	2	5825.00	91.09	-----	83.85	34.94	11.30	39.00	0.00	100	100	176	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4660.00	50.88	54.00	-3.12	44.55	34.12	10.07	37.86	0.00	100	357	AVERAGE																																																																																																																																											
2	5825.00	91.09	-----	83.85	34.94	11.30	39.00	0.00	100	100	176	AVERAGE																																																																																																																																											

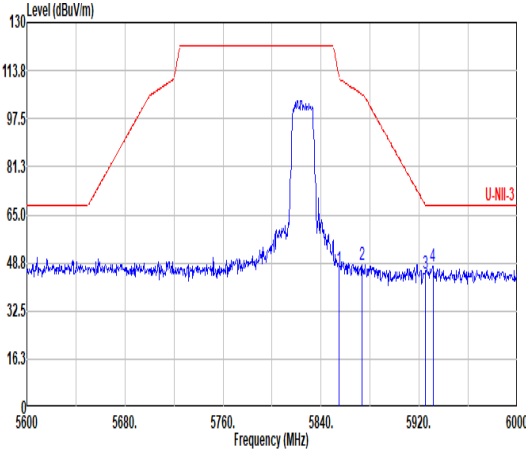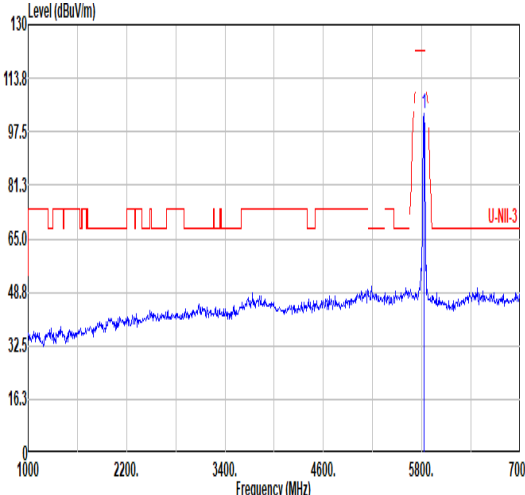

Mode	32																																																																																							
	Band Edge - L																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																							
ANT	0																																																																																							
Pol.	Vertical																																																																																							
Peak																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.00</td><td>46.78</td><td>111.36</td><td>-64.58</td><td>40.14</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>309</td><td>96 PEAK</td></tr><tr><td>2 5873.20</td><td>48.13</td><td>105.80</td><td>-57.67</td><td>41.41</td><td>35.05</td><td>11.35</td><td>39.68</td><td>0.00</td><td>309</td><td>96 PEAK</td></tr><tr><td>3 5924.80</td><td>44.98</td><td>68.45</td><td>-23.47</td><td>38.06</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>309</td><td>96 PEAK</td></tr><tr><td>4 5931.20</td><td>47.43</td><td>68.30</td><td>-20.87</td><td>40.48</td><td>35.13</td><td>11.41</td><td>39.59</td><td>0.00</td><td>309</td><td>96 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.00	46.78	111.36	-64.58	40.14	35.01	11.34	39.71	0.00	309	96 PEAK	2 5873.20	48.13	105.80	-57.67	41.41	35.05	11.35	39.68	0.00	309	96 PEAK	3 5924.80	44.98	68.45	-23.47	38.06	35.12	11.40	39.60	0.00	309	96 PEAK	4 5931.20	47.43	68.30	-20.87	40.48	35.13	11.41	39.59	0.00	309	96 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5854.00	46.78	111.36	-64.58	40.14	35.01	11.34	39.71	0.00	309	96 PEAK																																																																														
2 5873.20	48.13	105.80	-57.67	41.41	35.05	11.35	39.68	0.00	309	96 PEAK																																																																														
3 5924.80	44.98	68.45	-23.47	38.06	35.12	11.40	39.60	0.00	309	96 PEAK																																																																														
4 5931.20	47.43	68.30	-20.87	40.48	35.13	11.41	39.59	0.00	309	96 PEAK																																																																														
Avg	Blank																																																																																							
																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>103.16</td><td>-----</td><td>-----</td><td>96.01</td><td>34.95</td><td>11.31</td><td>39.11</td><td>0.00</td><td>309</td><td>96 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	103.16	-----	-----	96.01	34.95	11.31	39.11	0.00	309	96 PEAK																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5825.00	103.16	-----	-----	96.01	34.95	11.31	39.11	0.00	309	96 PEAK																																																																														


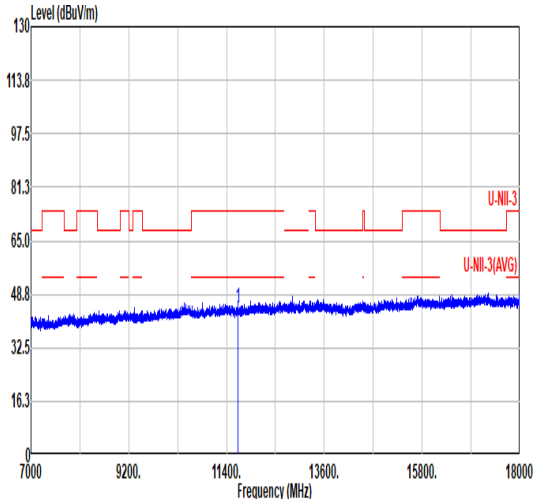
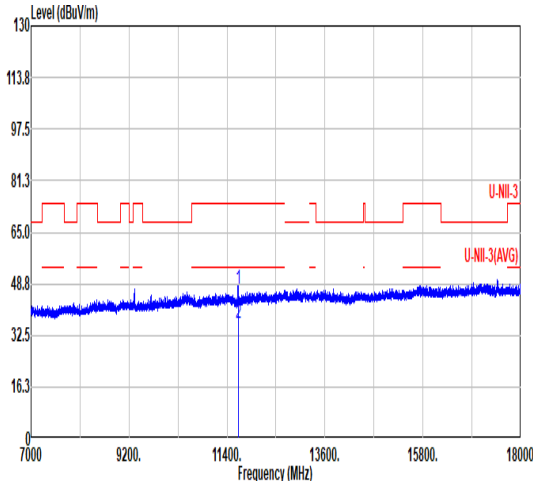


Mode	32																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																											
ANT	0																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak Avg																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11650.00</td><td>44.81</td><td>74.00</td><td>-29.19</td><td>56.13</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11650.00	44.81	74.00	-29.19	56.13	38.42	16.46	66.20	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11650.00</td><td>47.02</td><td>74.00</td><td>-26.98</td><td>58.34</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr><tr><td>2 11650.00</td><td>36.53</td><td>54.00</td><td>-17.47</td><td>47.85</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00</td><td>300</td><td>0</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11650.00	47.02	74.00	-26.98	58.34	38.42	16.46	66.20	0.00	300	0	PEAK	2 11650.00	36.53	54.00	-17.47	47.85	38.42	16.46	66.20	0.00	300	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 11650.00	44.81	74.00	-29.19	56.13	38.42	16.46	66.20	0.00	---	---	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 11650.00	47.02	74.00	-26.98	58.34	38.42	16.46	66.20	0.00	300	0	PEAK																																																																																																	
2 11650.00	36.53	54.00	-17.47	47.85	38.42	16.46	66.20	0.00	300	0	AVERAGE																																																																																																	





Mode	33																																																																																																																																																						
	Band Edge - L																																																																																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																																																						
ANT	CDD 0+1																																																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																																																
Peak																																																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5638.80</td><td>51.13</td><td>68.30</td><td>-17.17</td><td>41.03</td><td>34.60</td><td>11.06</td><td>35.56</td><td>0.00</td><td>111</td><td>174</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>47.19</td><td>68.30</td><td>-21.11</td><td>37.27</td><td>34.60</td><td>11.07</td><td>35.75</td><td>0.00</td><td>111</td><td>174</td><td>PEAK</td></tr><tr><td>3</td><td>5718.40</td><td>67.44</td><td>110.45</td><td>-43.01</td><td>58.68</td><td>34.66</td><td>11.17</td><td>37.07</td><td>0.00</td><td>111</td><td>174</td><td>PEAK</td></tr><tr><td>4</td><td>5721.20</td><td>72.72</td><td>113.64</td><td>-40.92</td><td>64.02</td><td>34.66</td><td>11.17</td><td>37.13</td><td>0.00</td><td>111</td><td>174</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5638.80	51.13	68.30	-17.17	41.03	34.60	11.06	35.56	0.00	111	174	PEAK	2	5650.00	47.19	68.30	-21.11	37.27	34.60	11.07	35.75	0.00	111	174	PEAK	3	5718.40	67.44	110.45	-43.01	58.68	34.66	11.17	37.07	0.00	111	174	PEAK	4	5721.20	72.72	113.64	-40.92	64.02	34.66	11.17	37.13	0.00	111	174	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4594.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>48.54</td><td>33.99</td><td>10.00</td><td>38.01</td><td>0.00</td><td>111</td><td>174</td><td>Peak</td></tr><tr><td>2</td><td>5745.00</td><td>110.84</td><td>-----</td><td>-----</td><td>102.49</td><td>34.74</td><td>11.20</td><td>37.59</td><td>0.00</td><td>111</td><td>174</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4594.00	54.52	74.00	-19.48	48.54	33.99	10.00	38.01	0.00	111	174	Peak	2	5745.00	110.84	-----	-----	102.49	34.74	11.20	37.59	0.00	111	174
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	5638.80	51.13	68.30	-17.17	41.03	34.60	11.06	35.56	0.00	111	174	PEAK																																																																																																																																											
2	5650.00	47.19	68.30	-21.11	37.27	34.60	11.07	35.75	0.00	111	174	PEAK																																																																																																																																											
3	5718.40	67.44	110.45	-43.01	58.68	34.66	11.17	37.07	0.00	111	174	PEAK																																																																																																																																											
4	5721.20	72.72	113.64	-40.92	64.02	34.66	11.17	37.13	0.00	111	174	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4594.00	54.52	74.00	-19.48	48.54	33.99	10.00	38.01	0.00	111	174	Peak																																																																																																																																											
2	5745.00	110.84	-----	-----	102.49	34.74	11.20	37.59	0.00	111	174	PEAK																																																																																																																																											
Avg	Blank																																																																																																																																																						
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4594.00</td><td>50.66</td><td>54.00</td><td>-3.34</td><td>44.68</td><td>33.99</td><td>10.00</td><td>38.01</td><td>0.00</td><td>111</td><td>174</td><td>Average</td></tr><tr><td>2</td><td>5745.00</td><td>102.35</td><td>-----</td><td>-----</td><td>94.00</td><td>34.74</td><td>11.20</td><td>37.59</td><td>0.00</td><td>111</td><td>174</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4594.00	50.66	54.00	-3.34	44.68	33.99	10.00	38.01	0.00	111	174	Average	2	5745.00	102.35	-----	-----	94.00	34.74	11.20	37.59	0.00	111	174	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4594.00	50.66	54.00	-3.34	44.68	33.99	10.00	38.01	0.00	111	174	Average																																																																																																																																											
2	5745.00	102.35	-----	-----	94.00	34.74	11.20	37.59	0.00	111	174	AVERAGE																																																																																																																																											


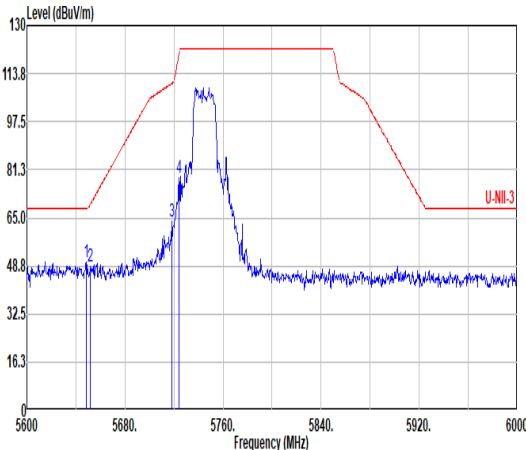
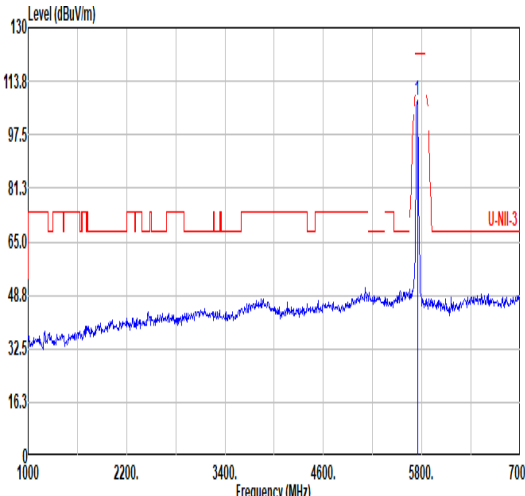
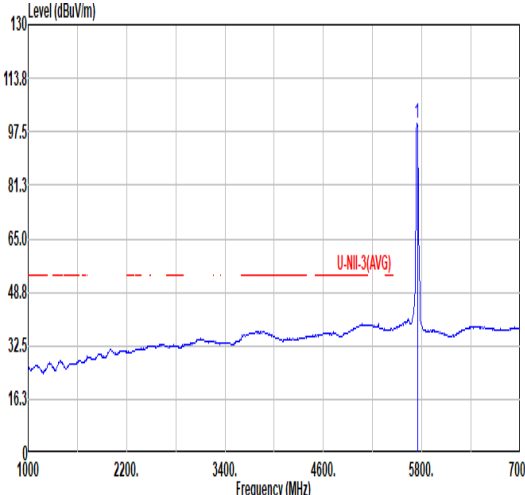


Mode	33																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																																								
ANT	CDD 0+1																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.40</td><td>50.06</td><td>68.30</td><td>-18.24</td><td>40.11</td><td>34.60</td><td>11.07</td><td>35.72</td><td>0.00</td><td>367</td><td>97</td><td>PEAK</td></tr><tr><td>2</td><td>5652.00</td><td>48.37</td><td>69.79</td><td>-21.42</td><td>38.49</td><td>34.60</td><td>11.07</td><td>35.79</td><td>0.00</td><td>367</td><td>97</td><td>PEAK</td></tr><tr><td>3</td><td>5718.00</td><td>63.54</td><td>110.34</td><td>-46.80</td><td>54.79</td><td>34.65</td><td>11.17</td><td>37.07</td><td>0.00</td><td>367</td><td>97</td><td>PEAK</td></tr><tr><td>4</td><td>5724.00</td><td>78.52</td><td>120.02</td><td>-41.50</td><td>69.86</td><td>34.67</td><td>11.17</td><td>37.18</td><td>0.00</td><td>367</td><td>97</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5648.40	50.06	68.30	-18.24	40.11	34.60	11.07	35.72	0.00	367	97	PEAK	2	5652.00	48.37	69.79	-21.42	38.49	34.60	11.07	35.79	0.00	367	97	PEAK	3	5718.00	63.54	110.34	-46.80	54.79	34.65	11.17	37.07	0.00	367	97	PEAK	4	5724.00	78.52	120.02	-41.50	69.86	34.67	11.17	37.18	0.00	367	97	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>107.85</td><td>-----</td><td>-----</td><td>99.51</td><td>34.74</td><td>11.21</td><td>37.61</td><td>0.00</td><td>367</td><td>97</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.85	-----	-----	99.51	34.74	11.21	37.61	0.00	367	97
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5648.40	50.06	68.30	-18.24	40.11	34.60	11.07	35.72	0.00	367	97	PEAK																																																																																																																													
2	5652.00	48.37	69.79	-21.42	38.49	34.60	11.07	35.79	0.00	367	97	PEAK																																																																																																																													
3	5718.00	63.54	110.34	-46.80	54.79	34.65	11.17	37.07	0.00	367	97	PEAK																																																																																																																													
4	5724.00	78.52	120.02	-41.50	69.86	34.67	11.17	37.18	0.00	367	97	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5745.00	107.85	-----	-----	99.51	34.74	11.21	37.61	0.00	367	97	PEAK																																																																																																																													
Avg	Blank																																																																																																																																								
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>100.06</td><td>-----</td><td>-----</td><td>91.63</td><td>34.72</td><td>11.20</td><td>37.49</td><td>0.00</td><td>367</td><td>97</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.06	-----	-----	91.63	34.72	11.20	37.49	0.00	367	97	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5745.00	100.06	-----	-----	91.63	34.72	11.20	37.49	0.00	367	97	AVERAGE																																																																																																																													

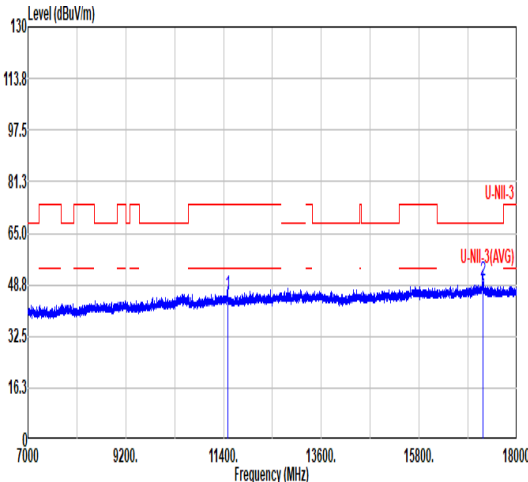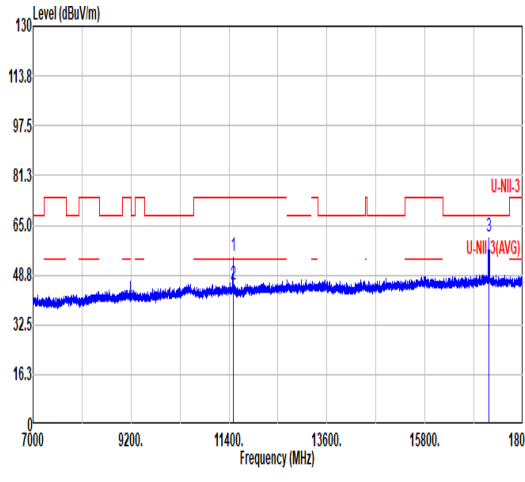


Mode	33																																																																																																																																										
	Harmonic																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																																										
ANT	CDD 0+1																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>45.64</td><td>74.00</td><td>-28.36</td><td>57.24</td><td>38.29</td><td>16.36</td><td>66.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17235.00</td><td>50.17</td><td>68.20</td><td>-18.13</td><td>53.34</td><td>41.25</td><td>20.16</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.64	74.00	-28.36	57.24	38.29	16.36	66.25	0.00	---	---	PEAK	2	17235.00	50.17	68.20	-18.13	53.34	41.25	20.16	64.58	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>66.54</td><td>38.29</td><td>16.36</td><td>66.25</td><td>0.00</td><td>273</td><td>83</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>45.72</td><td>54.00</td><td>-8.28</td><td>57.32</td><td>38.29</td><td>16.36</td><td>66.25</td><td>0.00</td><td>273</td><td>83</td><td>AVERAGE</td></tr><tr><td>3</td><td>17235.00</td><td>61.50</td><td>68.20</td><td>-6.90</td><td>64.67</td><td>41.25</td><td>20.16</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	54.94	74.00	-19.06	66.54	38.29	16.36	66.25	0.00	273	83	PEAK	2	11490.00	45.72	54.00	-8.28	57.32	38.29	16.36	66.25	0.00	273	83	AVERAGE	3	17235.00	61.50	68.20	-6.90	64.67	41.25	20.16	64.58	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	11490.00	45.64	74.00	-28.36	57.24	38.29	16.36	66.25	0.00	---	---	PEAK																																																																																																																															
2	17235.00	50.17	68.20	-18.13	53.34	41.25	20.16	64.58	0.00	---	---	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	11490.00	54.94	74.00	-19.06	66.54	38.29	16.36	66.25	0.00	273	83	PEAK																																																																																																																															
2	11490.00	45.72	54.00	-8.28	57.32	38.29	16.36	66.25	0.00	273	83	AVERAGE																																																																																																																															
3	17235.00	61.50	68.20	-6.90	64.67	41.25	20.16	64.58	0.00	---	---	PEAK																																																																																																																															

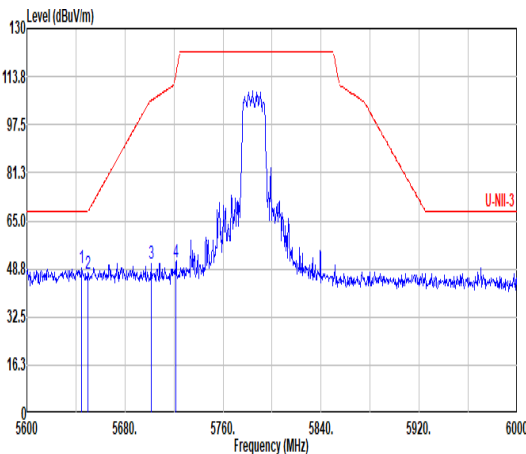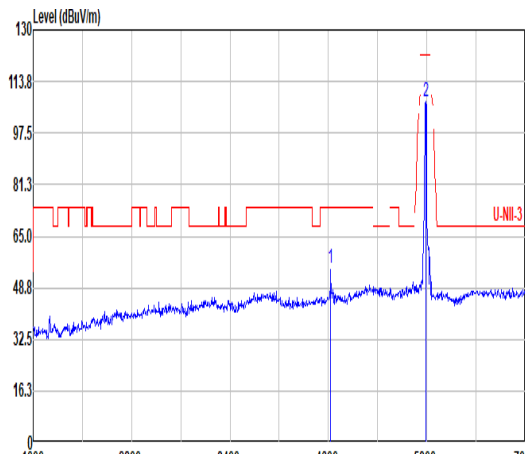
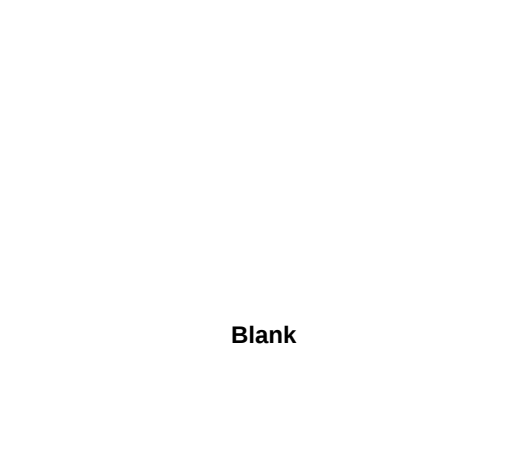
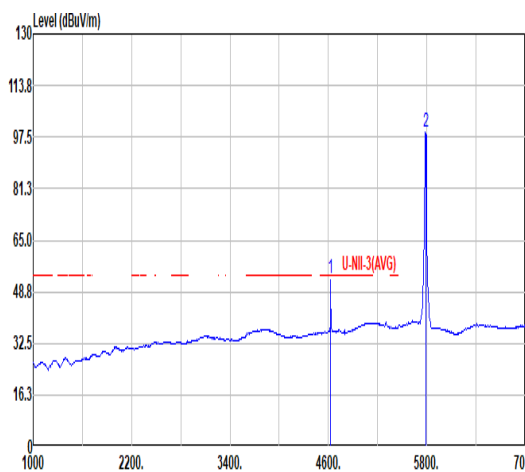


		34																																																																																													
Mode		Band Edge - L																																																																																													
		U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																													
ANT		CDD 0+1																																																																																													
Pol.		Horizontal						Fundamental																																																																																							
Peak																																																																																															
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5644.00</td><td>49.23</td><td>68.30</td><td>-19.07</td><td>39.22</td><td>34.60</td><td>11.06</td><td>35.65</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>46.85</td><td>68.30</td><td>-21.45</td><td>36.93</td><td>34.60</td><td>11.07</td><td>35.75</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr><tr><td>3</td><td>5701.20</td><td>50.65</td><td>105.64</td><td>-54.99</td><td>41.65</td><td>34.60</td><td>11.14</td><td>36.74</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr><tr><td>4</td><td>5721.60</td><td>51.19</td><td>114.55</td><td>-63.36</td><td>42.50</td><td>34.66</td><td>11.17</td><td>37.14</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5644.00	49.23	68.30	-19.07	39.22	34.60	11.06	35.65	0.00	100	194	PEAK	2	5650.00	46.85	68.30	-21.45	36.93	34.60	11.07	35.75	0.00	100	194	PEAK	3	5701.20	50.65	105.64	-54.99	41.65	34.60	11.14	36.74	0.00	100	194	PEAK	4	5721.60	51.19	114.55	-63.36	42.50	34.66	11.17	37.14	0.00	100	194
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5644.00	49.23	68.30	-19.07	39.22	34.60	11.06	35.65	0.00	100	194	PEAK																																																																																			
2	5650.00	46.85	68.30	-21.45	36.93	34.60	11.07	35.75	0.00	100	194	PEAK																																																																																			
3	5701.20	50.65	105.64	-54.99	41.65	34.60	11.14	36.74	0.00	100	194	PEAK																																																																																			
4	5721.60	51.19	114.55	-63.36	42.50	34.66	11.17	37.14	0.00	100	194	PEAK																																																																																			
Avg																																																																																															
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4630.00</td><td>54.87</td><td>74.00</td><td>-19.13</td><td>48.70</td><td>34.06</td><td>10.04</td><td>37.93</td><td>0.00</td><td>100</td><td>194</td><td>Peak</td></tr><tr><td>2</td><td>5785.00</td><td>107.34</td><td>-----</td><td>-----</td><td>99.64</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4630.00	54.87	74.00	-19.13	48.70	34.06	10.04	37.93	0.00	100	194	Peak	2	5785.00	107.34	-----	-----	99.64	34.86	11.26	38.42	0.00	100	194	PEAK																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4630.00	54.87	74.00	-19.13	48.70	34.06	10.04	37.93	0.00	100	194	Peak																																																																																			
2	5785.00	107.34	-----	-----	99.64	34.86	11.26	38.42	0.00	100	194	PEAK																																																																																			
Blank																																																																																															
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4630.00</td><td>52.84</td><td>54.00</td><td>-1.16</td><td>46.67</td><td>34.06</td><td>10.04</td><td>37.93</td><td>0.00</td><td>100</td><td>194</td><td>Average</td></tr><tr><td>2</td><td>5785.00</td><td>99.05</td><td>-----</td><td>-----</td><td>91.24</td><td>34.85</td><td>11.26</td><td>38.30</td><td>0.00</td><td>100</td><td>194</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4630.00	52.84	54.00	-1.16	46.67	34.06	10.04	37.93	0.00	100	194	Average	2	5785.00	99.05	-----	-----	91.24	34.85	11.26	38.30	0.00	100	194	AVERAGE																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4630.00	52.84	54.00	-1.16	46.67	34.06	10.04	37.93	0.00	100	194	Average																																																																																			
2	5785.00	99.05	-----	-----	91.24	34.85	11.26	38.30	0.00	100	194	AVERAGE																																																																																			
Avg																																																																																															
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4630.00</td><td>52.84</td><td>54.00</td><td>-1.16</td><td>46.67</td><td>34.06</td><td>10.04</td><td>37.93</td><td>0.00</td><td>100</td><td>194</td><td>Average</td></tr><tr><td>2</td><td>5785.00</td><td>99.05</td><td>-----</td><td>-----</td><td>91.24</td><td>34.85</td><td>11.26</td><td>38.30</td><td>0.00</td><td>100</td><td>194</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4630.00	52.84	54.00	-1.16	46.67	34.06	10.04	37.93	0.00	100	194	Average	2	5785.00	99.05	-----	-----	91.24	34.85	11.26	38.30	0.00	100	194	AVERAGE																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4630.00	52.84	54.00	-1.16	46.67	34.06	10.04	37.93	0.00	100	194	Average																																																																																			
2	5785.00	99.05	-----	-----	91.24	34.85	11.26	38.30	0.00	100	194	AVERAGE																																																																																			

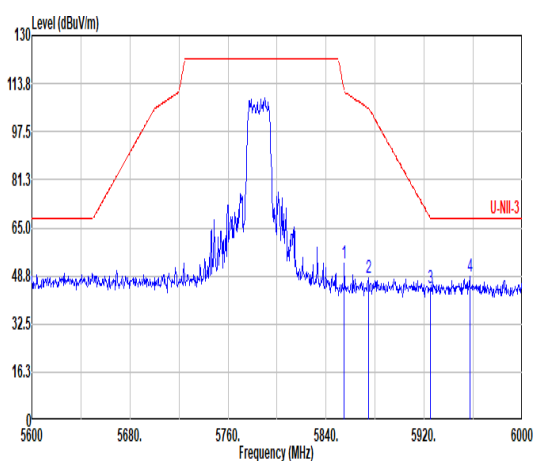


Mode	34																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>52.99</td><td>111.36</td><td>-58.37</td><td>46.35</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr><tr><td>2</td><td>5874.40</td><td>48.00</td><td>105.47</td><td>-57.39</td><td>41.36</td><td>35.05</td><td>11.35</td><td>39.68</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>44.71</td><td>68.45</td><td>-23.74</td><td>37.79</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr><tr><td>4</td><td>5957.20</td><td>48.46</td><td>68.30</td><td>-19.84</td><td>41.42</td><td>35.16</td><td>11.43</td><td>39.55</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	52.99	111.36	-58.37	46.35	35.01	11.34	39.71	0.00	100	194	PEAK	2	5874.40	48.00	105.47	-57.39	41.36	35.05	11.35	39.68	0.00	100	194	PEAK	3	5924.80	44.71	68.45	-23.74	37.79	35.12	11.40	39.60	0.00	100	194	PEAK	4	5957.20	48.46	68.30	-19.84	41.42	35.16	11.43	39.55	0.00	100	194	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	52.99	111.36	-58.37	46.35	35.01	11.34	39.71	0.00	100	194	PEAK																																																																									
2	5874.40	48.00	105.47	-57.39	41.36	35.05	11.35	39.68	0.00	100	194	PEAK																																																																									
3	5924.80	44.71	68.45	-23.74	37.79	35.12	11.40	39.60	0.00	100	194	PEAK																																																																									
4	5957.20	48.46	68.30	-19.84	41.42	35.16	11.43	39.55	0.00	100	194	PEAK																																																																									

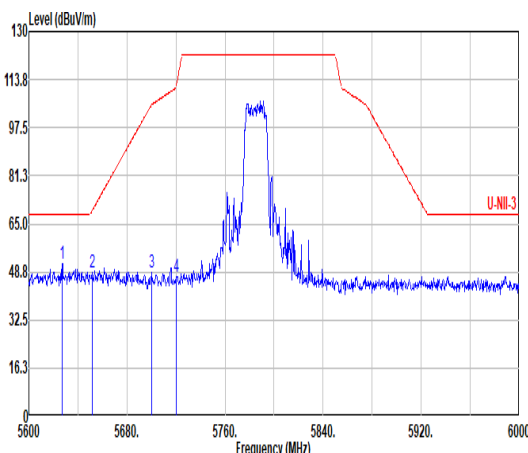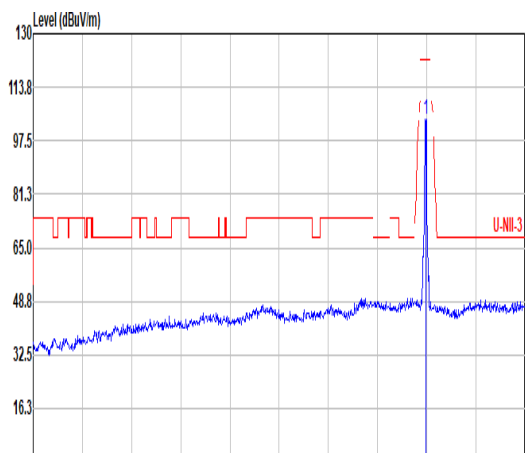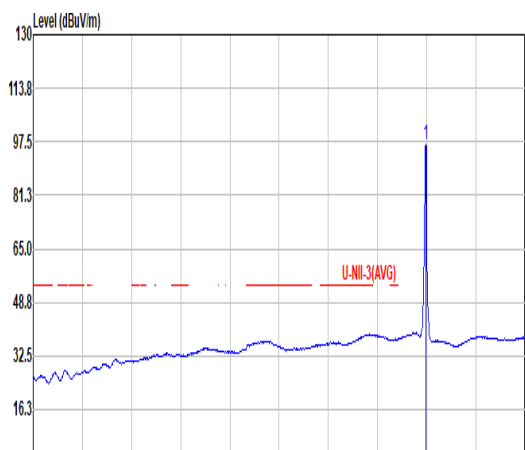

Mode	34																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5627.20</td><td>51.70</td><td>68.30</td><td>-16.60</td><td>41.65</td><td>34.60</td><td>11.04</td><td>35.59</td><td>0.00</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>2</td><td>5651.60</td><td>48.63</td><td>69.49</td><td>-20.86</td><td>38.74</td><td>34.60</td><td>11.07</td><td>35.78</td><td>0.00</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>3</td><td>5700.40</td><td>48.48</td><td>105.41</td><td>-56.93</td><td>39.47</td><td>34.60</td><td>11.14</td><td>36.73</td><td>0.00</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>47.08</td><td>110.90</td><td>-63.82</td><td>38.36</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>400</td><td>276</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5627.20	51.70	68.30	-16.60	41.65	34.60	11.04	35.59	0.00	400	276	PEAK	2	5651.60	48.63	69.49	-20.86	38.74	34.60	11.07	35.78	0.00	400	276	PEAK	3	5700.40	48.48	105.41	-56.93	39.47	34.60	11.14	36.73	0.00	400	276	PEAK	4	5720.00	47.08	110.90	-63.82	38.36	34.66	11.17	37.11	0.00	400	276	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5785.00</td><td>104.13</td><td>-----</td><td>-----</td><td>96.52</td><td>34.88</td><td>11.27</td><td>38.54</td><td>0.00</td><td>400</td><td>276</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5785.00	104.13	-----	-----	96.52	34.88	11.27	38.54	0.00	400	276
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5627.20	51.70	68.30	-16.60	41.65	34.60	11.04	35.59	0.00	400	276	PEAK																																																																																																																														
2	5651.60	48.63	69.49	-20.86	38.74	34.60	11.07	35.78	0.00	400	276	PEAK																																																																																																																														
3	5700.40	48.48	105.41	-56.93	39.47	34.60	11.14	36.73	0.00	400	276	PEAK																																																																																																																														
4	5720.00	47.08	110.90	-63.82	38.36	34.66	11.17	37.11	0.00	400	276	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5785.00	104.13	-----	-----	96.52	34.88	11.27	38.54	0.00	400	276	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5785.00</td><td>96.52</td><td>-----</td><td>-----</td><td>88.82</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>400</td><td>276</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5785.00	96.52	-----	-----	88.82	34.86	11.26	38.42	0.00	400	276	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5785.00	96.52	-----	-----	88.82	34.86	11.26	38.42	0.00	400	276	AVERAGE																																																																																																																														



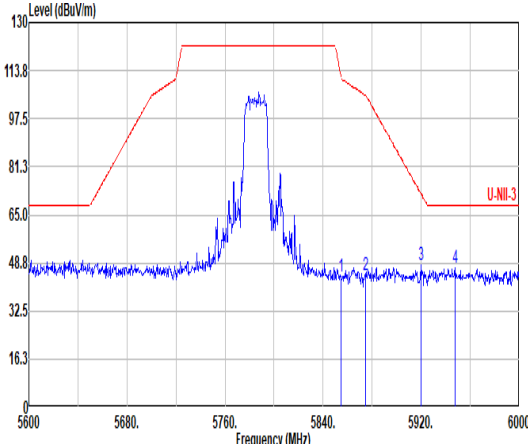


Mode	34																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																							
ANT	CDD 0+1																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5854.00</td><td>43.96</td><td>111.36</td><td>-67.40</td><td>37.32</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>400 276 PEAK</td></tr><tr><td>2 5874.00</td><td>44.41</td><td>105.36</td><td>-60.95</td><td>37.69</td><td>35.05</td><td>11.35</td><td>39.68</td><td>0.00</td><td>400 276 PEAK</td></tr><tr><td>3 5919.60</td><td>47.92</td><td>72.28</td><td>-24.36</td><td>41.01</td><td>35.12</td><td>11.40</td><td>39.61</td><td>0.00</td><td>400 276 PEAK</td></tr><tr><td>4 5947.60</td><td>47.22</td><td>68.30</td><td>-21.08</td><td>40.21</td><td>35.15</td><td>11.42</td><td>39.56</td><td>0.00</td><td>400 276 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.00	43.96	111.36	-67.40	37.32	35.01	11.34	39.71	0.00	400 276 PEAK	2 5874.00	44.41	105.36	-60.95	37.69	35.05	11.35	39.68	0.00	400 276 PEAK	3 5919.60	47.92	72.28	-24.36	41.01	35.12	11.40	39.61	0.00	400 276 PEAK	4 5947.60	47.22	68.30	-21.08	40.21	35.15	11.42	39.56	0.00	400 276 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5854.00	43.96	111.36	-67.40	37.32	35.01	11.34	39.71	0.00	400 276 PEAK																																																															
2 5874.00	44.41	105.36	-60.95	37.69	35.05	11.35	39.68	0.00	400 276 PEAK																																																															
3 5919.60	47.92	72.28	-24.36	41.01	35.12	11.40	39.61	0.00	400 276 PEAK																																																															
4 5947.60	47.22	68.30	-21.08	40.21	35.15	11.42	39.56	0.00	400 276 PEAK																																																															






Mode	34																																																																																																																																																		
	Harmonic																																																																																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																																																																		
ANT	CDD 0+1																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																												
Peak Avg																																																																																																																																																			
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11570.00</td><td>45.61</td><td>74.00</td><td>-28.39</td><td>57.07</td><td>38.36</td><td>16.41</td><td>66.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17355.00</td><td>50.45</td><td>68.20</td><td>-17.85</td><td>53.65</td><td>41.23</td><td>20.24</td><td>64.67</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11570.00	45.61	74.00	-28.39	57.07	38.36	16.41	66.23	0.00	---	---	PEAK	2	17355.00	50.45	68.20	-17.85	53.65	41.23	20.24	64.67	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11570.00</td><td>53.03</td><td>74.00</td><td>-20.97</td><td>64.49</td><td>38.36</td><td>16.41</td><td>66.23</td><td>0.00</td><td>278</td><td>79</td><td>PEAK</td></tr><tr><td>2</td><td>11570.00</td><td>44.63</td><td>54.00</td><td>-9.37</td><td>56.09</td><td>38.36</td><td>16.41</td><td>66.23</td><td>0.00</td><td>278</td><td>79</td><td>AVERAGE</td></tr><tr><td>3</td><td>17355.00</td><td>57.86</td><td>68.20</td><td>-10.44</td><td>61.06</td><td>41.23</td><td>20.24</td><td>64.67</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11570.00	53.03	74.00	-20.97	64.49	38.36	16.41	66.23	0.00	278	79	PEAK	2	11570.00	44.63	54.00	-9.37	56.09	38.36	16.41	66.23	0.00	278	79	AVERAGE	3	17355.00	57.86	68.20	-10.44	61.06	41.23	20.24	64.67	0.00	---	---	PEAK
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	11570.00	45.61	74.00	-28.39	57.07	38.36	16.41	66.23	0.00	---	---	PEAK																																																																																																																																							
2	17355.00	50.45	68.20	-17.85	53.65	41.23	20.24	64.67	0.00	---	---	PEAK																																																																																																																																							
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	11570.00	53.03	74.00	-20.97	64.49	38.36	16.41	66.23	0.00	278	79	PEAK																																																																																																																																							
2	11570.00	44.63	54.00	-9.37	56.09	38.36	16.41	66.23	0.00	278	79	AVERAGE																																																																																																																																							
3	17355.00	57.86	68.20	-10.44	61.06	41.23	20.24	64.67	0.00	---	---	PEAK																																																																																																																																							

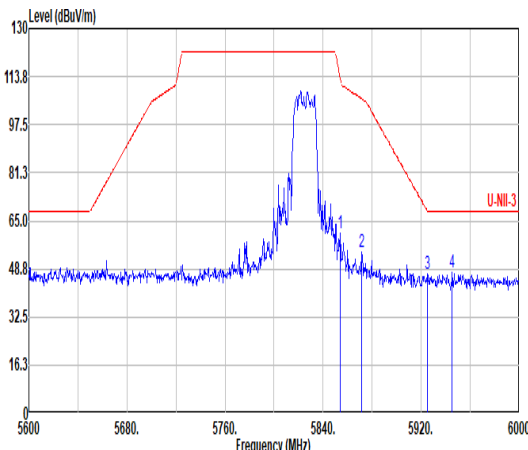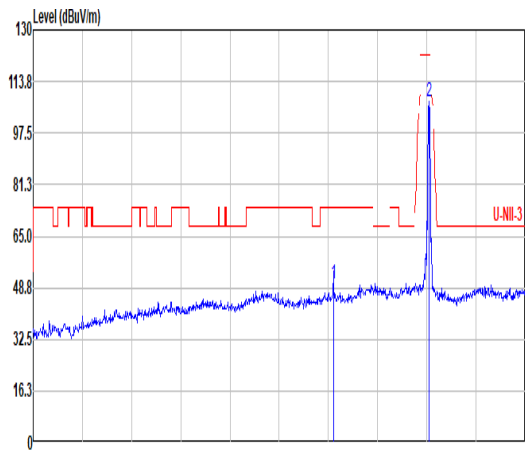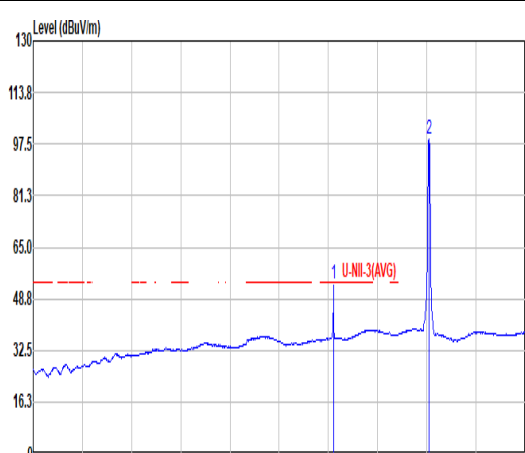

Mode	35																																																																																																																																																							
	Band Edge - L																																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																																							
ANT	CDD 0+1																																																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																																																	
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 5600 to 6000 MHz. The plot shows a red line for the limit and a blue line for the measured signal. The signal is below the limit across the entire frequency range. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>61.06</td><td>113.18</td><td>-52.12</td><td>54.41</td><td>35.01</td><td>11.33</td><td>39.69</td><td>0.00</td><td>100</td><td>192</td><td>PEAK</td></tr><tr><td>2</td><td>5871.20</td><td>54.43</td><td>106.36</td><td>-51.93</td><td>47.72</td><td>35.04</td><td>11.35</td><td>39.68</td><td>0.00</td><td>100</td><td>192</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>47.17</td><td>68.45</td><td>-21.28</td><td>40.25</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>100</td><td>192</td><td>PEAK</td></tr><tr><td>4</td><td>5945.20</td><td>47.40</td><td>68.30</td><td>-20.90</td><td>40.40</td><td>35.15</td><td>11.42</td><td>39.57</td><td>0.00</td><td>100</td><td>192</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	61.06	113.18	-52.12	54.41	35.01	11.33	39.69	0.00	100	192	PEAK	2	5871.20	54.43	106.36	-51.93	47.72	35.04	11.35	39.68	0.00	100	192	PEAK	3	5924.80	47.17	68.45	-21.28	40.25	35.12	11.40	39.60	0.00	100	192	PEAK	4	5945.20	47.40	68.30	-20.90	40.40	35.15	11.42	39.57	0.00	100	192	PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red line for the limit and a blue line for the measured signal. The signal is below the limit across the entire frequency range. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4660.00</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>43.49</td><td>34.12</td><td>10.07</td><td>37.86</td><td>0.00</td><td>100</td><td>192</td><td>Peak</td></tr><tr><td>2</td><td>5825.00</td><td>107.54</td><td>-----</td><td>-----</td><td>100.50</td><td>34.96</td><td>11.31</td><td>39.23</td><td>0.00</td><td>100</td><td>192</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4660.00	49.82	74.00	-24.18	43.49	34.12	10.07	37.86	0.00	100	192	Peak	2	5825.00	107.54	-----	-----	100.50	34.96	11.31	39.23	0.00	100	192	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	5854.00	61.06	113.18	-52.12	54.41	35.01	11.33	39.69	0.00	100	192	PEAK																																																																																																																																												
2	5871.20	54.43	106.36	-51.93	47.72	35.04	11.35	39.68	0.00	100	192	PEAK																																																																																																																																												
3	5924.80	47.17	68.45	-21.28	40.25	35.12	11.40	39.60	0.00	100	192	PEAK																																																																																																																																												
4	5945.20	47.40	68.30	-20.90	40.40	35.15	11.42	39.57	0.00	100	192	PEAK																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4660.00	49.82	74.00	-24.18	43.49	34.12	10.07	37.86	0.00	100	192	Peak																																																																																																																																												
2	5825.00	107.54	-----	-----	100.50	34.96	11.31	39.23	0.00	100	192	PEAK																																																																																																																																												
Avg	Blank						 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red line for the limit and a blue line for the measured signal. The signal is below the limit across the entire frequency range. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4660.00</td><td>53.43</td><td>54.00</td><td>-0.57</td><td>47.10</td><td>34.12</td><td>10.07</td><td>37.86</td><td>0.00</td><td>100</td><td>192</td><td>Average</td></tr><tr><td>2</td><td>5825.00</td><td>98.91</td><td>-----</td><td>-----</td><td>91.76</td><td>34.95</td><td>11.31</td><td>39.11</td><td>0.00</td><td>100</td><td>192</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4660.00	53.43	54.00	-0.57	47.10	34.12	10.07	37.86	0.00	100	192	Average	2	5825.00	98.91	-----	-----	91.76	34.95	11.31	39.11	0.00	100	192	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4660.00	53.43	54.00	-0.57	47.10	34.12	10.07	37.86	0.00	100	192	Average																																																																																																																																												
2	5825.00	98.91	-----	-----	91.76	34.95	11.31	39.11	0.00	100	192	AVERAGE																																																																																																																																												

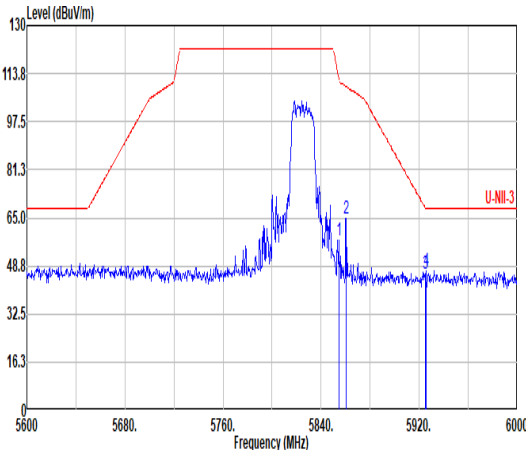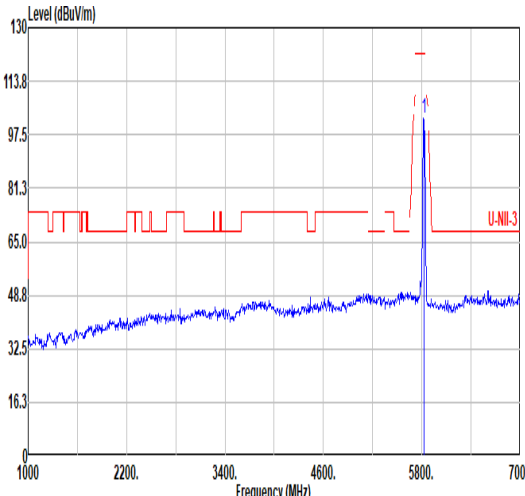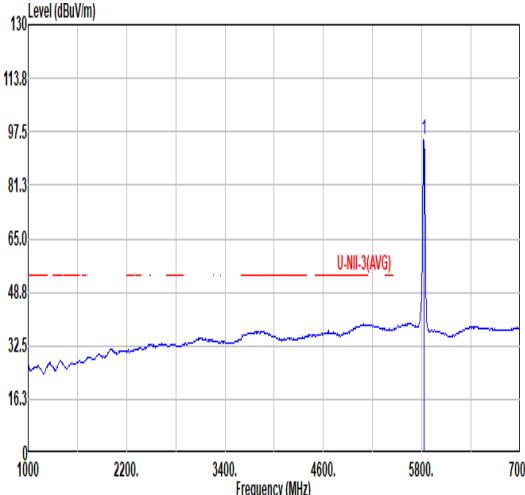

Mode	35																																																																																							
	Band Edge - L																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																							
ANT	CDD 0+1																																																																																							
Pol.	Vertical																																																																																							
Peak																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.40</td><td>57.30</td><td>112.27</td><td>-54.97</td><td>50.66</td><td>35.01</td><td>11.33</td><td>39.70</td><td>0.00</td><td>397</td><td>266 PEAK</td></tr><tr><td>2 5860.40</td><td>64.61</td><td>109.39</td><td>-44.78</td><td>57.95</td><td>35.02</td><td>11.34</td><td>39.70</td><td>0.00</td><td>397</td><td>266 PEAK</td></tr><tr><td>3 5924.80</td><td>46.21</td><td>68.45</td><td>-22.24</td><td>39.29</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>397</td><td>266 PEAK</td></tr><tr><td>4 5925.60</td><td>47.12</td><td>68.30</td><td>-21.18</td><td>40.19</td><td>35.13</td><td>11.40</td><td>39.60</td><td>0.00</td><td>397</td><td>266 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.40	57.30	112.27	-54.97	50.66	35.01	11.33	39.70	0.00	397	266 PEAK	2 5860.40	64.61	109.39	-44.78	57.95	35.02	11.34	39.70	0.00	397	266 PEAK	3 5924.80	46.21	68.45	-22.24	39.29	35.12	11.40	39.60	0.00	397	266 PEAK	4 5925.60	47.12	68.30	-21.18	40.19	35.13	11.40	39.60	0.00	397	266 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5854.40	57.30	112.27	-54.97	50.66	35.01	11.33	39.70	0.00	397	266 PEAK																																																																														
2 5860.40	64.61	109.39	-44.78	57.95	35.02	11.34	39.70	0.00	397	266 PEAK																																																																														
3 5924.80	46.21	68.45	-22.24	39.29	35.12	11.40	39.60	0.00	397	266 PEAK																																																																														
4 5925.60	47.12	68.30	-21.18	40.19	35.13	11.40	39.60	0.00	397	266 PEAK																																																																														
Avg	Blank																																																																																							
																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>102.29</td><td>-----</td><td>-----</td><td>95.05</td><td>34.94</td><td>11.30</td><td>39.00</td><td>0.00</td><td>397</td><td>266 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	102.29	-----	-----	95.05	34.94	11.30	39.00	0.00	397	266 PEAK																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5825.00	102.29	-----	-----	95.05	34.94	11.30	39.00	0.00	397	266 PEAK																																																																														
Avg	Blank																																																																																							
																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>95.02</td><td>-----</td><td>-----</td><td>87.78</td><td>34.94</td><td>11.30</td><td>39.00</td><td>0.00</td><td>397</td><td>266 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	95.02	-----	-----	87.78	34.94	11.30	39.00	0.00	397	266 AVERAGE																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5825.00	95.02	-----	-----	87.78	34.94	11.30	39.00	0.00	397	266 AVERAGE																																																																														



Mode	35																																																																																																																																																																																																																											
	Harmonic																																																																																																																																																																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																																																																																																											
ANT	CDD 0+1																																																																																																																																																																																																																											
Pol.	Horizontal								Vertical																																																																																																																																																																																																																			
Peak Avg																																																																																																																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><td>1</td><td>11650.00</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>56.11</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17475.00</td><td>48.77</td><td>68.20</td><td>-19.53</td><td>52.01</td><td>41.21</td><td>20.32</td><td>64.77</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr></table>										Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg				1	11650.00	44.79	74.00	-29.21	56.11	38.42	16.46	66.20	0.00	---	---	---	---	---	---	PEAK	2	17475.00	48.77	68.20	-19.53	52.01	41.21	20.32	64.77	0.00	---	---	---	---	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><td>1</td><td>9319.53</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>63.29</td><td>36.60</td><td>14.60</td><td>66.90</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>11650.00</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>63.53</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>11650.00</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>54.26</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>AVERAGE</td></tr><tr><td>4</td><td>17475.00</td><td>53.26</td><td>68.20</td><td>-15.04</td><td>56.50</td><td>41.21</td><td>20.32</td><td>64.77</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr></table>										Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg				1	9319.53	47.59	74.00	-26.41	63.29	36.60	14.60	66.90	0.00	---	---	---	---	---	---	PEAK	2	11650.00	52.21	74.00	-21.79	63.53	38.42	16.46	66.20	0.00	---	---	---	---	---	---	PEAK	3	11650.00	42.94	54.00	-11.06	54.26	38.42	16.46	66.20	0.00	---	---	---	---	---	---	AVERAGE	4	17475.00	53.26	68.20	-15.04	56.50	41.21	20.32	64.77	0.00	---	---	---	---	---	---	PEAK
			Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																															
1	11650.00	44.79	74.00	-29.21	56.11	38.42	16.46	66.20	0.00	---	---	---	---	---	---	PEAK																																																																																																																																																																																																												
2	17475.00	48.77	68.20	-19.53	52.01	41.21	20.32	64.77	0.00	---	---	---	---	---	---	PEAK																																																																																																																																																																																																												
		Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																															
1	9319.53	47.59	74.00	-26.41	63.29	36.60	14.60	66.90	0.00	---	---	---	---	---	---	PEAK																																																																																																																																																																																																												
2	11650.00	52.21	74.00	-21.79	63.53	38.42	16.46	66.20	0.00	---	---	---	---	---	---	PEAK																																																																																																																																																																																																												
3	11650.00	42.94	54.00	-11.06	54.26	38.42	16.46	66.20	0.00	---	---	---	---	---	---	AVERAGE																																																																																																																																																																																																												
4	17475.00	53.26	68.20	-15.04	56.50	41.21	20.32	64.77	0.00	---	---	---	---	---	---	PEAK																																																																																																																																																																																																												





		35																																																																															
Mode		Harmonic																																																																															
		U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																															
ANT		CDD 0+1																																																																															
Pol.		Horizontal					Vertical																																																																										
Peak Avg																																																																																	
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>11650.00</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>56.11</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00 --- --- PEAK</td></tr><tr><td>2</td><td>17475.00</td><td>48.77</td><td>68.20</td><td>-19.53</td><td>52.01</td><td>41.21</td><td>20.32</td><td>64.77</td><td>0.00 --- --- PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	11650.00	44.79	74.00	-29.21	56.11	38.42	16.46	66.20	0.00 --- --- PEAK	2	17475.00	48.77	68.20	-19.53	52.01	41.21	20.32	64.77	0.00 --- --- PEAK																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																								
1	11650.00	44.79	74.00	-29.21	56.11	38.42	16.46	66.20	0.00 --- --- PEAK																																																																								
2	17475.00	48.77	68.20	-19.53	52.01	41.21	20.32	64.77	0.00 --- --- PEAK																																																																								
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>9319.53</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>63.29</td><td>36.60</td><td>14.60</td><td>66.90</td><td>0.00 --- --- PEAK</td></tr><tr><td>2</td><td>11650.00</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>63.53</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00 286 77 PEAK</td></tr><tr><td>3</td><td>11650.00</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>54.26</td><td>38.42</td><td>16.46</td><td>66.20</td><td>0.00 286 77 AVERAGE</td></tr><tr><td>4</td><td>17475.00</td><td>53.26</td><td>68.20</td><td>-15.04</td><td>56.50</td><td>41.21</td><td>20.32</td><td>64.77</td><td>0.00 --- --- PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	9319.53	47.59	74.00	-26.41	63.29	36.60	14.60	66.90	0.00 --- --- PEAK	2	11650.00	52.21	74.00	-21.79	63.53	38.42	16.46	66.20	0.00 286 77 PEAK	3	11650.00	42.94	54.00	-11.06	54.26	38.42	16.46	66.20	0.00 286 77 AVERAGE	4	17475.00	53.26	68.20	-15.04	56.50	41.21	20.32	64.77	0.00 --- --- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																								
1	9319.53	47.59	74.00	-26.41	63.29	36.60	14.60	66.90	0.00 --- --- PEAK																																																																								
2	11650.00	52.21	74.00	-21.79	63.53	38.42	16.46	66.20	0.00 286 77 PEAK																																																																								
3	11650.00	42.94	54.00	-11.06	54.26	38.42	16.46	66.20	0.00 286 77 AVERAGE																																																																								
4	17475.00	53.26	68.20	-15.04	56.50	41.21	20.32	64.77	0.00 --- --- PEAK																																																																								






Mode	35	
	18-40G	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz	
ANT	CDD 0+1	
Pol.	Horizontal	Vertical
Peak Avg		

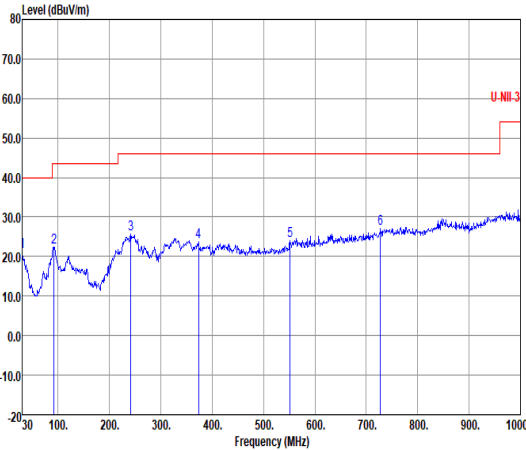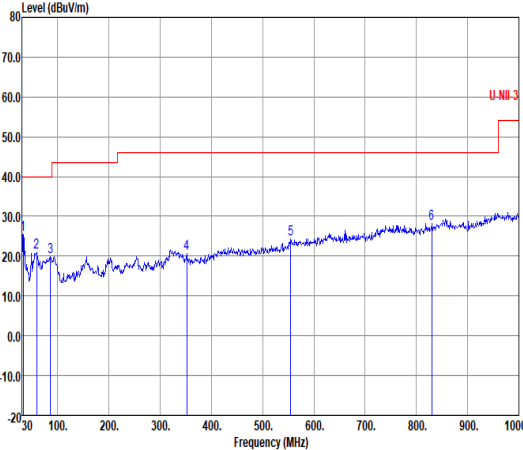


Mode	35																																																																																																																																																																																																						
	30-1G																																																																																																																																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																																																																																						
ANT	CDD 0+1																																																																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																																																																
QP																																																																																																																																																																																																							
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>CableAntenna Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>21.29</td><td>-18.71</td><td>40.00</td><td>29.03</td><td>0.71</td><td>24.57</td><td>33.02</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>92.08</td><td>22.40</td><td>-21.10</td><td>43.50</td><td>38.28</td><td>1.44</td><td>15.54</td><td>32.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>241.46</td><td>25.59</td><td>-20.41</td><td>46.00</td><td>38.10</td><td>2.37</td><td>17.90</td><td>32.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>373.38</td><td>23.67</td><td>-22.33</td><td>46.00</td><td>32.60</td><td>2.94</td><td>21.01</td><td>32.88</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>551.86</td><td>24.03</td><td>-21.97</td><td>46.00</td><td>28.45</td><td>3.59</td><td>25.10</td><td>33.11</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>727.43</td><td>27.10</td><td>-18.90</td><td>46.00</td><td>30.33</td><td>4.13</td><td>25.56</td><td>32.92</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	1	30.00	21.29	-18.71	40.00	29.03	0.71	24.57	33.02	---	---	Peak	2	92.08	22.40	-21.10	43.50	38.28	1.44	15.54	32.86	---	---	Peak	3	241.46	25.59	-20.41	46.00	38.10	2.37	17.90	32.78	---	---	Peak	4	373.38	23.67	-22.33	46.00	32.60	2.94	21.01	32.88	---	---	Peak	5	551.86	24.03	-21.97	46.00	28.45	3.59	25.10	33.11	---	---	Peak	6	727.43	27.10	-18.90	46.00	30.33	4.13	25.56	32.92	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>CableAntenna Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>32.91</td><td>25.50</td><td>-14.50</td><td>40.00</td><td>34.62</td><td>0.76</td><td>23.06</td><td>32.94</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>59.10</td><td>20.91</td><td>-19.09</td><td>40.00</td><td>39.91</td><td>1.14</td><td>12.76</td><td>32.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>86.26</td><td>19.80</td><td>-20.20</td><td>40.00</td><td>36.85</td><td>1.39</td><td>14.39</td><td>32.83</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>352.04</td><td>20.70</td><td>-25.30</td><td>46.00</td><td>30.29</td><td>2.86</td><td>20.48</td><td>32.93</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>554.77</td><td>24.40</td><td>-21.60</td><td>46.00</td><td>28.82</td><td>3.60</td><td>25.09</td><td>33.11</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>830.25</td><td>28.25</td><td>-17.75</td><td>46.00</td><td>29.91</td><td>4.40</td><td>26.46</td><td>32.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	1	32.91	25.50	-14.50	40.00	34.62	0.76	23.06	32.94	---	---	Peak	2	59.10	20.91	-19.09	40.00	39.91	1.14	12.76	32.90	---	---	Peak	3	86.26	19.80	-20.20	40.00	36.85	1.39	14.39	32.83	---	---	Peak	4	352.04	20.70	-25.30	46.00	30.29	2.86	20.48	32.93	---	---	Peak	5	554.77	24.40	-21.60	46.00	28.82	3.60	25.09	33.11	---	---	Peak	6	830.25	28.25	-17.75	46.00	29.91	4.40	26.46	32.52	---	---	Peak
		Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																												
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																																																																																																																													
1	30.00	21.29	-18.71	40.00	29.03	0.71	24.57	33.02	---	---	Peak																																																																																																																																																																																												
2	92.08	22.40	-21.10	43.50	38.28	1.44	15.54	32.86	---	---	Peak																																																																																																																																																																																												
3	241.46	25.59	-20.41	46.00	38.10	2.37	17.90	32.78	---	---	Peak																																																																																																																																																																																												
4	373.38	23.67	-22.33	46.00	32.60	2.94	21.01	32.88	---	---	Peak																																																																																																																																																																																												
5	551.86	24.03	-21.97	46.00	28.45	3.59	25.10	33.11	---	---	Peak																																																																																																																																																																																												
6	727.43	27.10	-18.90	46.00	30.33	4.13	25.56	32.92	---	---	Peak																																																																																																																																																																																												
	Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																																																																																																																													
1	32.91	25.50	-14.50	40.00	34.62	0.76	23.06	32.94	---	---	Peak																																																																																																																																																																																												
2	59.10	20.91	-19.09	40.00	39.91	1.14	12.76	32.90	---	---	Peak																																																																																																																																																																																												
3	86.26	19.80	-20.20	40.00	36.85	1.39	14.39	32.83	---	---	Peak																																																																																																																																																																																												
4	352.04	20.70	-25.30	46.00	30.29	2.86	20.48	32.93	---	---	Peak																																																																																																																																																																																												
5	554.77	24.40	-21.60	46.00	28.82	3.60	25.09	33.11	---	---	Peak																																																																																																																																																																																												
6	830.25	28.25	-17.75	46.00	29.91	4.40	26.46	32.52	---	---	Peak																																																																																																																																																																																												

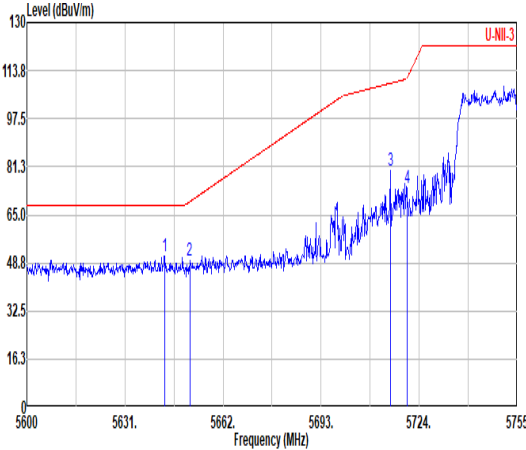
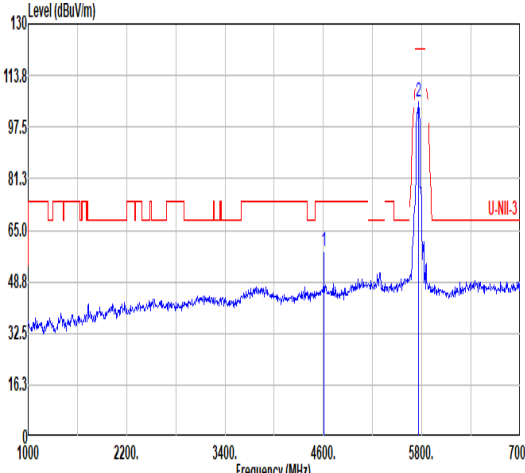
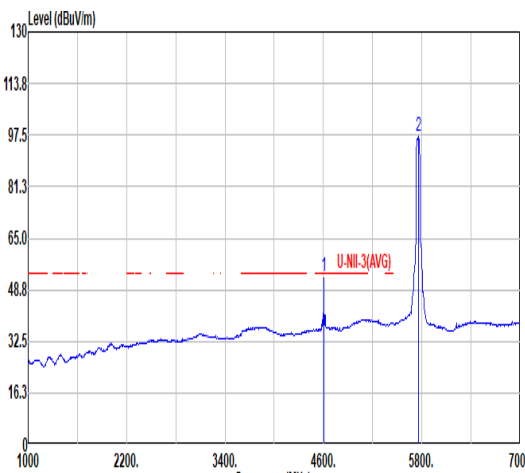


Mode	36																																																																																									
	Band Edge - L																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																									
ANT	CDD 0+1																																																																																									
Pol.	Horizontal																																																																																									
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5643.56</td><td>51.21</td><td>68.30</td><td>-17.09</td><td>41.18</td><td>34.60</td><td>11.06</td><td>35.63</td><td>0.00</td><td>100</td><td>13 PEAK</td></tr><tr><td>2</td><td>5651.46</td><td>49.33</td><td>69.39</td><td>-20.06</td><td>39.44</td><td>34.60</td><td>11.07</td><td>35.78</td><td>0.00</td><td>100</td><td>13 PEAK</td></tr><tr><td>3</td><td>5714.86</td><td>79.84</td><td>109.46</td><td>-29.62</td><td>71.05</td><td>34.64</td><td>11.16</td><td>37.01</td><td>0.00</td><td>100</td><td>13 PEAK</td></tr><tr><td>4</td><td>5720.13</td><td>73.95</td><td>111.19</td><td>-37.24</td><td>65.23</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>100</td><td>13 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5643.56	51.21	68.30	-17.09	41.18	34.60	11.06	35.63	0.00	100	13 PEAK	2	5651.46	49.33	69.39	-20.06	39.44	34.60	11.07	35.78	0.00	100	13 PEAK	3	5714.86	79.84	109.46	-29.62	71.05	34.64	11.16	37.01	0.00	100	13 PEAK	4	5720.13	73.95	111.19	-37.24	65.23	34.66	11.17	37.11	0.00	100	13 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5643.56	51.21	68.30	-17.09	41.18	34.60	11.06	35.63	0.00	100	13 PEAK																																																																															
2	5651.46	49.33	69.39	-20.06	39.44	34.60	11.07	35.78	0.00	100	13 PEAK																																																																															
3	5714.86	79.84	109.46	-29.62	71.05	34.64	11.16	37.01	0.00	100	13 PEAK																																																																															
4	5720.13	73.95	111.19	-37.24	65.23	34.66	11.17	37.11	0.00	100	13 PEAK																																																																															
Fundamental																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4606.00</td><td>58.62</td><td>74.00</td><td>-15.38</td><td>52.58</td><td>34.01</td><td>10.01</td><td>37.98</td><td>0.00</td><td>311</td><td>174 PEAK</td></tr><tr><td>2</td><td>5758.00</td><td>105.57</td><td>-----</td><td>-----</td><td>97.42</td><td>34.77</td><td>11.22</td><td>37.84</td><td>0.00</td><td>100</td><td>13 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4606.00	58.62	74.00	-15.38	52.58	34.01	10.01	37.98	0.00	311	174 PEAK	2	5758.00	105.57	-----	-----	97.42	34.77	11.22	37.84	0.00	100	13 PEAK																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	4606.00	58.62	74.00	-15.38	52.58	34.01	10.01	37.98	0.00	311	174 PEAK																																																																															
2	5758.00	105.57	-----	-----	97.42	34.77	11.22	37.84	0.00	100	13 PEAK																																																																															
Avg	Blank																																																																																									
																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4606.00</td><td>52.86</td><td>54.00</td><td>-1.14</td><td>46.82</td><td>34.01</td><td>10.01</td><td>37.98</td><td>0.00</td><td>311</td><td>174 AVERAGE</td></tr><tr><td>2</td><td>5758.00</td><td>96.89</td><td>-----</td><td>-----</td><td>88.74</td><td>34.77</td><td>11.22</td><td>37.84</td><td>0.00</td><td>100</td><td>13 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4606.00	52.86	54.00	-1.14	46.82	34.01	10.01	37.98	0.00	311	174 AVERAGE	2	5758.00	96.89	-----	-----	88.74	34.77	11.22	37.84	0.00	100	13 AVERAGE																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	4606.00	52.86	54.00	-1.14	46.82	34.01	10.01	37.98	0.00	311	174 AVERAGE																																																																															
2	5758.00	96.89	-----	-----	88.74	34.77	11.22	37.84	0.00	100	13 AVERAGE																																																																															

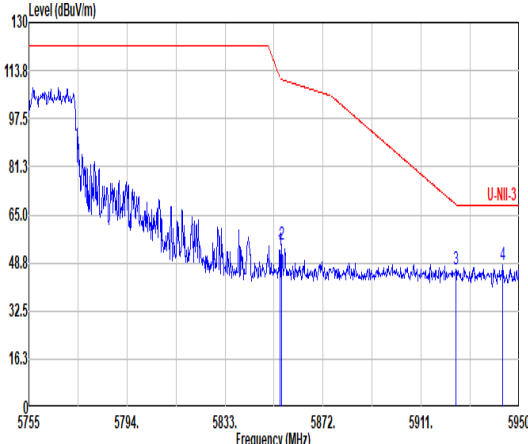


Mode	36																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>52.90</td><td>111.26</td><td>-58.36</td><td>46.26</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr><tr><td>2</td><td>5855.62</td><td>54.73</td><td>110.73</td><td>-56.00</td><td>48.09</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr><tr><td>3</td><td>5924.85</td><td>46.53</td><td>68.41</td><td>-21.88</td><td>39.61</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr><tr><td>4</td><td>5943.37</td><td>48.13</td><td>68.30</td><td>-20.17</td><td>41.14</td><td>35.14</td><td>11.42</td><td>39.57</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.84	52.90	111.26	-58.36	46.26	35.01	11.34	39.71	0.00	100	13	PEAK	2	5855.62	54.73	110.73	-56.00	48.09	35.01	11.34	39.71	0.00	100	13	PEAK	3	5924.85	46.53	68.41	-21.88	39.61	35.12	11.40	39.60	0.00	100	13	PEAK	4	5943.37	48.13	68.30	-20.17	41.14	35.14	11.42	39.57	0.00	100	13	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.84	52.90	111.26	-58.36	46.26	35.01	11.34	39.71	0.00	100	13	PEAK																																																																									
2	5855.62	54.73	110.73	-56.00	48.09	35.01	11.34	39.71	0.00	100	13	PEAK																																																																									
3	5924.85	46.53	68.41	-21.88	39.61	35.12	11.40	39.60	0.00	100	13	PEAK																																																																									
4	5943.37	48.13	68.30	-20.17	41.14	35.14	11.42	39.57	0.00	100	13	PEAK																																																																									

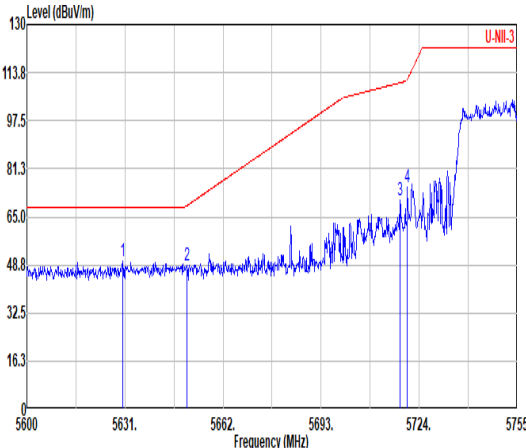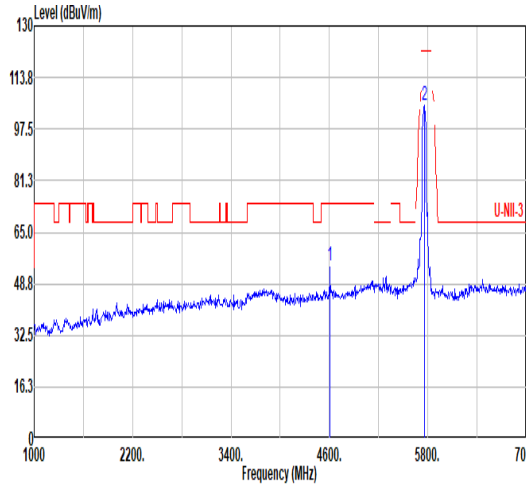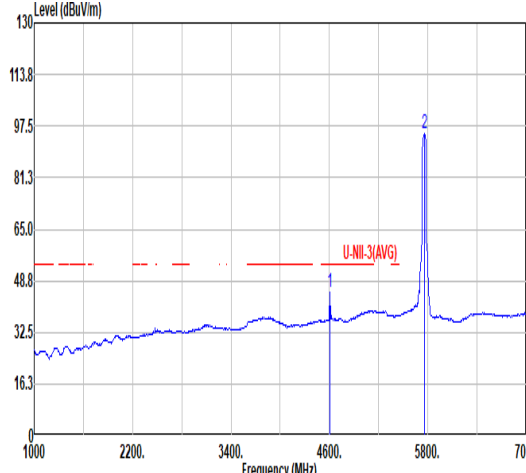

		36																																																																																									
Mode	Band Edge - L																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																										
ANT	CDD 0+1																																																																																										
Pol.	Vertical																																																																																										
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5630.38</td><td>50.20</td><td>68.30</td><td>-18.10</td><td>40.14</td><td>34.60</td><td>11.04</td><td>35.58</td><td>0.00</td><td>400</td><td>92 PEAK</td></tr><tr><td>2</td><td>5650.53</td><td>48.44</td><td>68.69</td><td>-20.25</td><td>38.53</td><td>34.60</td><td>11.07</td><td>35.76</td><td>0.00</td><td>400</td><td>92 PEAK</td></tr><tr><td>3</td><td>5717.96</td><td>70.50</td><td>110.33</td><td>-39.83</td><td>61.75</td><td>34.65</td><td>11.17</td><td>37.07</td><td>0.00</td><td>400</td><td>92 PEAK</td></tr><tr><td>4</td><td>5720.28</td><td>75.29</td><td>111.54</td><td>-36.25</td><td>66.57</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>400</td><td>92 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5630.38	50.20	68.30	-18.10	40.14	34.60	11.04	35.58	0.00	400	92 PEAK	2	5650.53	48.44	68.69	-20.25	38.53	34.60	11.07	35.76	0.00	400	92 PEAK	3	5717.96	70.50	110.33	-39.83	61.75	34.65	11.17	37.07	0.00	400	92 PEAK	4	5720.28	75.29	111.54	-36.25	66.57	34.66	11.17	37.11	0.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5630.38	50.20	68.30	-18.10	40.14	34.60	11.04	35.58	0.00	400	92 PEAK																																																																																
2	5650.53	48.44	68.69	-20.25	38.53	34.60	11.07	35.76	0.00	400	92 PEAK																																																																																
3	5717.96	70.50	110.33	-39.83	61.75	34.65	11.17	37.07	0.00	400	92 PEAK																																																																																
4	5720.28	75.29	111.54	-36.25	66.57	34.66	11.17	37.11	0.00	400	92 PEAK																																																																																
Fundamental																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4606.00</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>48.51</td><td>34.01</td><td>10.01</td><td>37.98</td><td>0.00</td><td>300</td><td>195 PEAK</td></tr><tr><td>2</td><td>5755.00</td><td>104.80</td><td>-----</td><td>-----</td><td>96.65</td><td>34.77</td><td>11.22</td><td>37.84</td><td>0.00</td><td>400</td><td>92 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4606.00	54.55	74.00	-19.45	48.51	34.01	10.01	37.98	0.00	300	195 PEAK	2	5755.00	104.80	-----	-----	96.65	34.77	11.22	37.84	0.00	400	92 PEAK																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4606.00	54.55	74.00	-19.45	48.51	34.01	10.01	37.98	0.00	300	195 PEAK																																																																																
2	5755.00	104.80	-----	-----	96.65	34.77	11.22	37.84	0.00	400	92 PEAK																																																																																
Avg	Blank																																																																																										
																																																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4606.00</td><td>45.20</td><td>54.00</td><td>-8.80</td><td>39.16</td><td>34.01</td><td>10.01</td><td>37.98</td><td>0.00</td><td>300</td><td>195 AVERAGE</td></tr><tr><td>2</td><td>5755.00</td><td>95.25</td><td>-----</td><td>-----</td><td>87.10</td><td>34.77</td><td>11.22</td><td>37.84</td><td>0.00</td><td>400</td><td>92 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4606.00	45.20	54.00	-8.80	39.16	34.01	10.01	37.98	0.00	300	195 AVERAGE	2	5755.00	95.25	-----	-----	87.10	34.77	11.22	37.84	0.00	400	92 AVERAGE																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4606.00	45.20	54.00	-8.80	39.16	34.01	10.01	37.98	0.00	300	195 AVERAGE																																																																																
2	5755.00	95.25	-----	-----	87.10	34.77	11.22	37.84	0.00	400	92 AVERAGE																																																																																






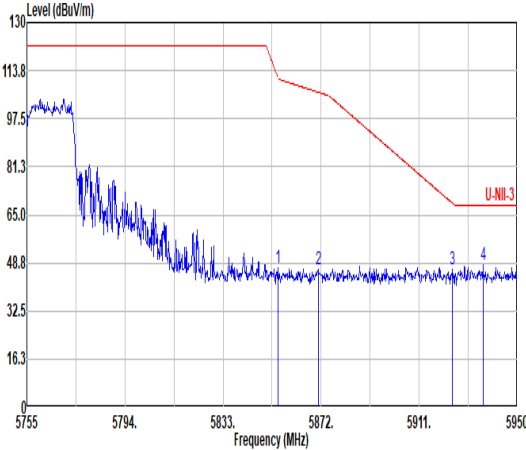


Mode	36																																																																																													
	Band Edge - R																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																													
ANT	CDD 0+1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>47.00</td><td>111.26</td><td>-64.26</td><td>40.36</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>400</td><td>92</td><td>PEAK</td></tr><tr><td>2</td><td>5870.83</td><td>46.40</td><td>106.47</td><td>-60.07</td><td>39.69</td><td>35.04</td><td>11.35</td><td>39.68</td><td>0.00</td><td>400</td><td>92</td><td>PEAK</td></tr><tr><td>3</td><td>5924.26</td><td>46.58</td><td>68.85</td><td>-22.27</td><td>39.66</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>400</td><td>92</td><td>PEAK</td></tr><tr><td>4</td><td>5936.35</td><td>47.85</td><td>68.30</td><td>-20.45</td><td>40.88</td><td>35.14</td><td>11.41</td><td>39.58</td><td>0.00</td><td>400</td><td>92</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.84	47.00	111.26	-64.26	40.36	35.01	11.34	39.71	0.00	400	92	PEAK	2	5870.83	46.40	106.47	-60.07	39.69	35.04	11.35	39.68	0.00	400	92	PEAK	3	5924.26	46.58	68.85	-22.27	39.66	35.12	11.40	39.60	0.00	400	92	PEAK	4	5936.35	47.85	68.30	-20.45	40.88	35.14	11.41	39.58	0.00	400	92	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5854.84	47.00	111.26	-64.26	40.36	35.01	11.34	39.71	0.00	400	92	PEAK																																																																																		
2	5870.83	46.40	106.47	-60.07	39.69	35.04	11.35	39.68	0.00	400	92	PEAK																																																																																		
3	5924.26	46.58	68.85	-22.27	39.66	35.12	11.40	39.60	0.00	400	92	PEAK																																																																																		
4	5936.35	47.85	68.30	-20.45	40.88	35.14	11.41	39.58	0.00	400	92	PEAK																																																																																		




Mode	36																																																																																																																																																																																																																																															
	Harmonic																																																																																																																																																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																																																																																																																															
ANT	CDD 0+1																																																																																																																																																																																																																																															
Pol.	Horizontal								Vertical																																																																																																																																																																																																																																							
Peak Avg																																																																																																																																																																																																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11507.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>59.21</td><td>38.31</td><td>16.37</td><td>66.25</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17250.53</td><td>52.54</td><td>68.20</td><td>-15.66</td><td>55.71</td><td>41.25</td><td>20.17</td><td>64.59</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr></table>										Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	11507.00	47.64	74.00	-26.36	59.21	38.31	16.37	66.25	0.00	---	---	---	---	---	---	---	---	PEAK	2	17250.53	52.54	68.20	-15.66	55.71	41.25	20.17	64.59	0.00	---	---	---	---	---	---	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>9207.33</td><td>47.66</td><td>68.30</td><td>-20.64</td><td>63.74</td><td>36.41</td><td>14.45</td><td>66.94</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>62.97</td><td>38.31</td><td>16.37</td><td>66.25</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>11510.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>54.43</td><td>38.31</td><td>16.37</td><td>66.25</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>AVERAGE</td></tr><tr><td>4</td><td>17265.00</td><td>55.60</td><td>68.20</td><td>-12.60</td><td>58.77</td><td>41.25</td><td>20.18</td><td>64.60</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>PEAK</td></tr></table>										Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	9207.33	47.66	68.30	-20.64	63.74	36.41	14.45	66.94	0.00	---	---	---	---	---	---	---	---	PEAK	2	11510.00	51.40	74.00	-22.60	62.97	38.31	16.37	66.25	0.00	---	---	---	---	---	---	---	---	PEAK	3	11510.00	42.86	54.00	-11.14	54.43	38.31	16.37	66.25	0.00	---	---	---	---	---	---	---	---	AVERAGE	4	17265.00	55.60	68.20	-12.60	58.77	41.25	20.18	64.60	0.00	---	---	---	---	---	---	---	---	PEAK
			Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor																																																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																
1	11507.00	47.64	74.00	-26.36	59.21	38.31	16.37	66.25	0.00	---	---	---	---	---	---	---	---	PEAK																																																																																																																																																																																																																														
2	17250.53	52.54	68.20	-15.66	55.71	41.25	20.17	64.59	0.00	---	---	---	---	---	---	---	---	PEAK																																																																																																																																																																																																																														
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor																																																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																
1	9207.33	47.66	68.30	-20.64	63.74	36.41	14.45	66.94	0.00	---	---	---	---	---	---	---	---	PEAK																																																																																																																																																																																																																														
2	11510.00	51.40	74.00	-22.60	62.97	38.31	16.37	66.25	0.00	---	---	---	---	---	---	---	---	PEAK																																																																																																																																																																																																																														
3	11510.00	42.86	54.00	-11.14	54.43	38.31	16.37	66.25	0.00	---	---	---	---	---	---	---	---	AVERAGE																																																																																																																																																																																																																														
4	17265.00	55.60	68.20	-12.60	58.77	41.25	20.18	64.60	0.00	---	---	---	---	---	---	---	---	PEAK																																																																																																																																																																																																																														

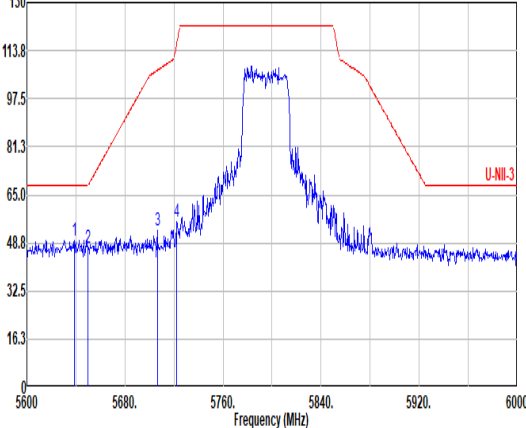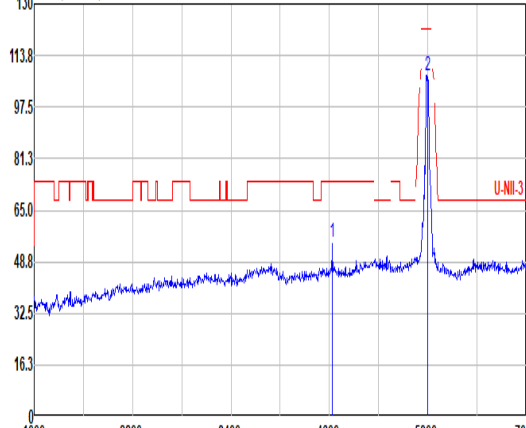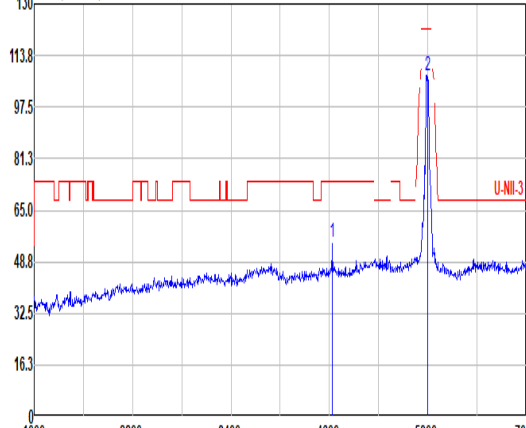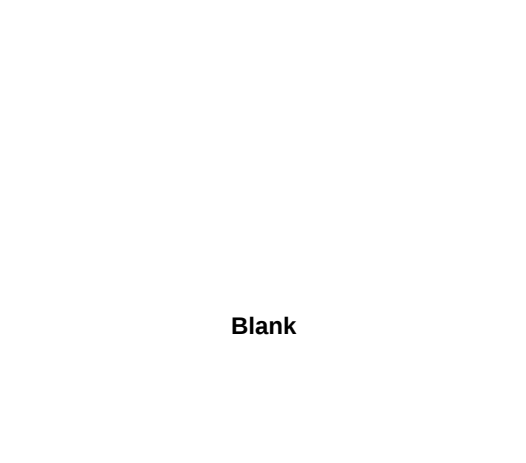
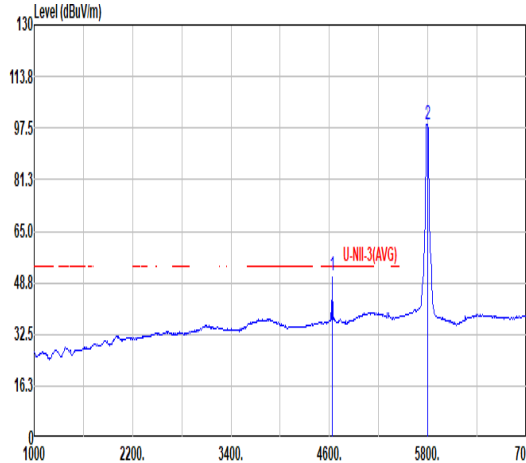
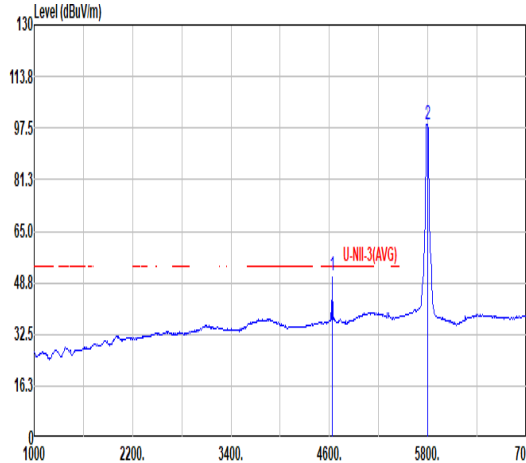


Mode	37																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Horizontal																																																																																																																																									
Peak	Horizontal Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5638.80</td><td>49.79</td><td>68.30</td><td>-18.51</td><td>39.69</td><td>34.60</td><td>11.06</td><td>35.56</td><td>0.00</td><td>116</td><td>170 PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>47.31</td><td>68.30</td><td>-20.99</td><td>37.39</td><td>34.60</td><td>11.07</td><td>35.75</td><td>0.00</td><td>116</td><td>170 PEAK</td></tr><tr><td>3</td><td>5706.40</td><td>53.15</td><td>107.09</td><td>-53.94</td><td>44.22</td><td>34.62</td><td>11.15</td><td>36.84</td><td>0.00</td><td>116</td><td>170 PEAK</td></tr><tr><td>4</td><td>5722.40</td><td>55.75</td><td>116.37</td><td>-60.62</td><td>47.06</td><td>34.67</td><td>11.17</td><td>37.15</td><td>0.00</td><td>116</td><td>170 PEAK</td></tr></tbody></table> <th colspan="11"> Fundamental Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4636.00</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>48.89</td><td>34.07</td><td>10.84</td><td>37.91</td><td>0.00</td><td>370</td><td>177 PEAK</td></tr><tr><td>2</td><td>5795.00</td><td>107.49</td><td>-----</td><td>-----</td><td>99.79</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>116</td><td>170 PEAK</td></tr></tbody></table> </th>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5638.80	49.79	68.30	-18.51	39.69	34.60	11.06	35.56	0.00	116	170 PEAK	2	5650.00	47.31	68.30	-20.99	37.39	34.60	11.07	35.75	0.00	116	170 PEAK	3	5706.40	53.15	107.09	-53.94	44.22	34.62	11.15	36.84	0.00	116	170 PEAK	4	5722.40	55.75	116.37	-60.62	47.06	34.67	11.17	37.15	0.00	116	170 PEAK	Fundamental Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4636.00</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>48.89</td><td>34.07</td><td>10.84</td><td>37.91</td><td>0.00</td><td>370</td><td>177 PEAK</td></tr><tr><td>2</td><td>5795.00</td><td>107.49</td><td>-----</td><td>-----</td><td>99.79</td><td>34.86</td><td>11.26</td><td>38.42</td><td>0.00</td><td>116</td><td>170 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	4636.00	55.09	74.00	-18.91	48.89	34.07	10.84	37.91	0.00	370	177 PEAK	2	5795.00	107.49	-----	-----	99.79	34.86	11.26	38.42	0.00	116	170 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																															
1	5638.80	49.79	68.30	-18.51	39.69	34.60	11.06	35.56	0.00	116	170 PEAK																																																																																																																															
2	5650.00	47.31	68.30	-20.99	37.39	34.60	11.07	35.75	0.00	116	170 PEAK																																																																																																																															
3	5706.40	53.15	107.09	-53.94	44.22	34.62	11.15	36.84	0.00	116	170 PEAK																																																																																																																															
4	5722.40	55.75	116.37	-60.62	47.06	34.67	11.17	37.15	0.00	116	170 PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																
1	4636.00	55.09	74.00	-18.91	48.89	34.07	10.84	37.91	0.00	370	177 PEAK																																																																																																																															
2	5795.00	107.49	-----	-----	99.79	34.86	11.26	38.42	0.00	116	170 PEAK																																																																																																																															
Avg	Blank																																																																																																																																									
	Blank Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4636.00</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>44.61</td><td>34.07</td><td>10.84</td><td>37.91</td><td>0.00</td><td>370</td><td>177 AVERAGE</td></tr><tr><td>2</td><td>5795.00</td><td>98.67</td><td>-----</td><td>-----</td><td>90.86</td><td>34.85</td><td>11.26</td><td>38.30</td><td>0.00</td><td>116</td><td>170 AVERAGE</td></tr></tbody></table> <th colspan="11"> Fundamental Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4636.00</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>44.61</td><td>34.07</td><td>10.84</td><td>37.91</td><td>0.00</td><td>370</td><td>177 AVERAGE</td></tr><tr><td>2</td><td>5795.00</td><td>98.67</td><td>-----</td><td>-----</td><td>90.86</td><td>34.85</td><td>11.26</td><td>38.30</td><td>0.00</td><td>116</td><td>170 AVERAGE</td></tr></tbody></table> </th>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	4636.00	50.81	54.00	-3.19	44.61	34.07	10.84	37.91	0.00	370	177 AVERAGE	2	5795.00	98.67	-----	-----	90.86	34.85	11.26	38.30	0.00	116	170 AVERAGE	Fundamental Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4636.00</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>44.61</td><td>34.07</td><td>10.84</td><td>37.91</td><td>0.00</td><td>370</td><td>177 AVERAGE</td></tr><tr><td>2</td><td>5795.00</td><td>98.67</td><td>-----</td><td>-----</td><td>90.86</td><td>34.85</td><td>11.26</td><td>38.30</td><td>0.00</td><td>116</td><td>170 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	4636.00	50.81	54.00	-3.19	44.61	34.07	10.84	37.91	0.00	370	177 AVERAGE	2	5795.00	98.67	-----	-----	90.86	34.85	11.26	38.30	0.00	116	170 AVERAGE																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																
1	4636.00	50.81	54.00	-3.19	44.61	34.07	10.84	37.91	0.00	370	177 AVERAGE																																																																																																																															
2	5795.00	98.67	-----	-----	90.86	34.85	11.26	38.30	0.00	116	170 AVERAGE																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																
1	4636.00	50.81	54.00	-3.19	44.61	34.07	10.84	37.91	0.00	370	177 AVERAGE																																																																																																																															
2	5795.00	98.67	-----	-----	90.86	34.85	11.26	38.30	0.00	116	170 AVERAGE																																																																																																																															

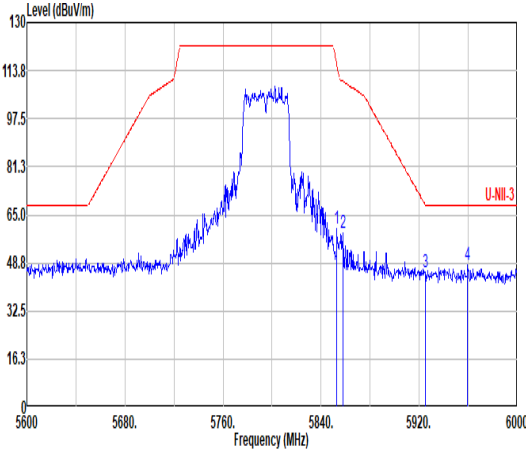


Mode	37																																																																																														
	Band Edge - R																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5852.80</td><td>60.46</td><td>115.92</td><td>-55.46</td><td>53.79</td><td>35.01</td><td>11.33</td><td>39.67</td><td>0.00</td><td>116</td><td>170</td><td>PEAK</td></tr><tr><td>2</td><td>5858.00</td><td>59.07</td><td>110.06</td><td>-50.99</td><td>52.41</td><td>35.02</td><td>11.34</td><td>39.70</td><td>0.00</td><td>116</td><td>170</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>45.48</td><td>68.45</td><td>-22.97</td><td>38.56</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>116</td><td>170</td><td>PEAK</td></tr><tr><td>4</td><td>5959.60</td><td>47.94</td><td>68.30</td><td>-20.36</td><td>40.89</td><td>35.16</td><td>11.43</td><td>39.54</td><td>0.00</td><td>116</td><td>170</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5852.80	60.46	115.92	-55.46	53.79	35.01	11.33	39.67	0.00	116	170	PEAK	2	5858.00	59.07	110.06	-50.99	52.41	35.02	11.34	39.70	0.00	116	170	PEAK	3	5924.80	45.48	68.45	-22.97	38.56	35.12	11.40	39.60	0.00	116	170	PEAK	4	5959.60	47.94	68.30	-20.36	40.89	35.16	11.43	39.54	0.00	116	170	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5852.80	60.46	115.92	-55.46	53.79	35.01	11.33	39.67	0.00	116	170	PEAK																																																																																			
2	5858.00	59.07	110.06	-50.99	52.41	35.02	11.34	39.70	0.00	116	170	PEAK																																																																																			
3	5924.80	45.48	68.45	-22.97	38.56	35.12	11.40	39.60	0.00	116	170	PEAK																																																																																			
4	5959.60	47.94	68.30	-20.36	40.89	35.16	11.43	39.54	0.00	116	170	PEAK																																																																																			

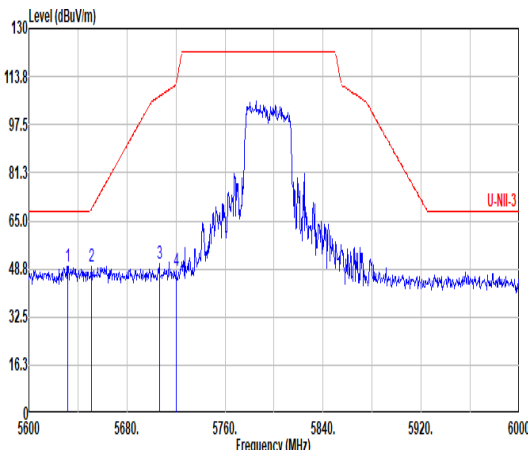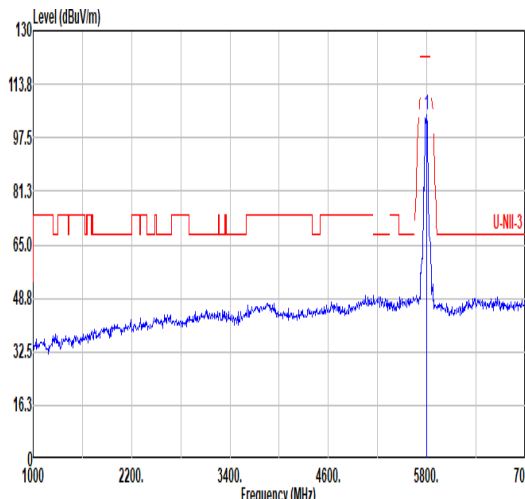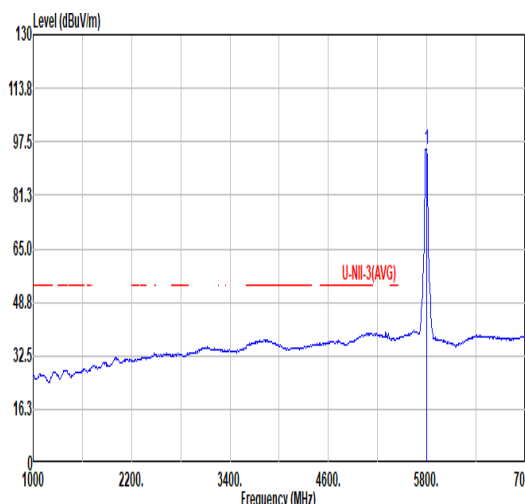

		37																																																																																													
Mode		Band Edge - L																																																																																													
		U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																													
ANT		CDD 0+1																																																																																													
Pol.		Fundamental																																																																																													
Peak	Vertical																																																																																														
																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5631.60</td><td>49.71</td><td>68.30</td><td>-18.59</td><td>39.64</td><td>34.60</td><td>11.05</td><td>35.58</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>49.33</td><td>68.89</td><td>-19.56</td><td>39.43</td><td>34.60</td><td>11.07</td><td>35.77</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr><tr><td>3</td><td>5706.40</td><td>50.55</td><td>107.09</td><td>-56.54</td><td>41.62</td><td>34.62</td><td>11.15</td><td>36.84</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>47.99</td><td>110.90</td><td>-62.91</td><td>39.27</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5631.60	49.71	68.30	-18.59	39.64	34.60	11.05	35.58	0.00	399	78	PEAK	2	5650.00	49.33	68.89	-19.56	39.43	34.60	11.07	35.77	0.00	399	78	PEAK	3	5706.40	50.55	107.09	-56.54	41.62	34.62	11.15	36.84	0.00	399	78	PEAK	4	5720.00	47.99	110.90	-62.91	39.27	34.66	11.17	37.11	0.00	399	78	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5631.60	49.71	68.30	-18.59	39.64	34.60	11.05	35.58	0.00	399	78	PEAK																																																																																			
2	5650.00	49.33	68.89	-19.56	39.43	34.60	11.07	35.77	0.00	399	78	PEAK																																																																																			
3	5706.40	50.55	107.09	-56.54	41.62	34.62	11.15	36.84	0.00	399	78	PEAK																																																																																			
4	5720.00	47.99	110.90	-62.91	39.27	34.66	11.17	37.11	0.00	399	78	PEAK																																																																																			
Avg	Blank																																																																																														
																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>104.60</td><td>-----</td><td>-----</td><td>96.99</td><td>34.88</td><td>11.27</td><td>38.54</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	104.60	-----	-----	96.99	34.88	11.27	38.54	0.00	399	78	PEAK																																							
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5795.00	104.60	-----	-----	96.99	34.88	11.27	38.54	0.00	399	78	PEAK																																																																																			
Avg	Blank																																																																																														
																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>95.32</td><td>-----</td><td>-----</td><td>87.51</td><td>34.85</td><td>11.26</td><td>38.30</td><td>0.00</td><td>399</td><td>78</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	95.32	-----	-----	87.51	34.85	11.26	38.30	0.00	399	78	AVERAGE																																							
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5795.00	95.32	-----	-----	87.51	34.85	11.26	38.30	0.00	399	78	AVERAGE																																																																																			


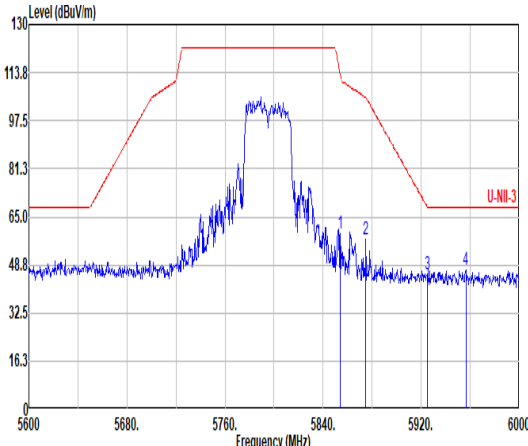


Mode	37																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>59.34</td><td>113.18</td><td>-53.84</td><td>52.69</td><td>35.01</td><td>11.33</td><td>39.69</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr><tr><td>2</td><td>5874.00</td><td>57.48</td><td>105.36</td><td>-47.88</td><td>50.76</td><td>35.05</td><td>11.35</td><td>39.68</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>45.56</td><td>68.45</td><td>-22.89</td><td>38.64</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr><tr><td>4</td><td>5956.40</td><td>47.32</td><td>68.30</td><td>-20.98</td><td>40.28</td><td>35.16</td><td>11.43</td><td>39.55</td><td>0.00</td><td>399</td><td>78</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	59.34	113.18	-53.84	52.69	35.01	11.33	39.69	0.00	399	78	PEAK	2	5874.00	57.48	105.36	-47.88	50.76	35.05	11.35	39.68	0.00	399	78	PEAK	3	5924.00	45.56	68.45	-22.89	38.64	35.12	11.40	39.60	0.00	399	78	PEAK	4	5956.40	47.32	68.30	-20.98	40.28	35.16	11.43	39.55	0.00	399	78	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	59.34	113.18	-53.84	52.69	35.01	11.33	39.69	0.00	399	78	PEAK																																																																									
2	5874.00	57.48	105.36	-47.88	50.76	35.05	11.35	39.68	0.00	399	78	PEAK																																																																									
3	5924.00	45.56	68.45	-22.89	38.64	35.12	11.40	39.60	0.00	399	78	PEAK																																																																									
4	5956.40	47.32	68.30	-20.98	40.28	35.16	11.43	39.55	0.00	399	78	PEAK																																																																									




Mode	37																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																												
ANT	CDD 0+1																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																						
Peak Avg																																																																																																																																													
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11590.00</td><td>44.57</td><td>74.00</td><td>-29.43</td><td>56.00</td><td>38.37</td><td>16.42</td><td>66.22</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>17377.40</td><td>51.84</td><td>68.20</td><td>-16.36</td><td>55.06</td><td>41.22</td><td>20.25</td><td>64.69</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11590.00	44.57	74.00	-29.43	56.00	38.37	16.42	66.22	0.00	---	PEAK	2	17377.40	51.84	68.20	-16.36	55.06	41.22	20.25	64.69	0.00	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>9272.60</td><td>47.21</td><td>68.20</td><td>-20.99</td><td>63.05</td><td>36.55</td><td>14.53</td><td>66.92</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>11595.80</td><td>48.09</td><td>74.00</td><td>-25.91</td><td>59.51</td><td>38.38</td><td>16.42</td><td>66.22</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>17382.53</td><td>54.04</td><td>68.20</td><td>-14.16</td><td>57.26</td><td>41.22</td><td>20.26</td><td>64.70</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	9272.60	47.21	68.20	-20.99	63.05	36.55	14.53	66.92	0.00	---	PEAK	2	11595.80	48.09	74.00	-25.91	59.51	38.38	16.42	66.22	0.00	---	PEAK	3	17382.53	54.04	68.20	-14.16	57.26	41.22	20.26	64.70	0.00	---	PEAK
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	11590.00	44.57	74.00	-29.43	56.00	38.37	16.42	66.22	0.00	---	PEAK																																																																																																																																		
2	17377.40	51.84	68.20	-16.36	55.06	41.22	20.25	64.69	0.00	---	PEAK																																																																																																																																		
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	9272.60	47.21	68.20	-20.99	63.05	36.55	14.53	66.92	0.00	---	PEAK																																																																																																																																		
2	11595.80	48.09	74.00	-25.91	59.51	38.38	16.42	66.22	0.00	---	PEAK																																																																																																																																		
3	17382.53	54.04	68.20	-14.16	57.26	41.22	20.26	64.70	0.00	---	PEAK																																																																																																																																		


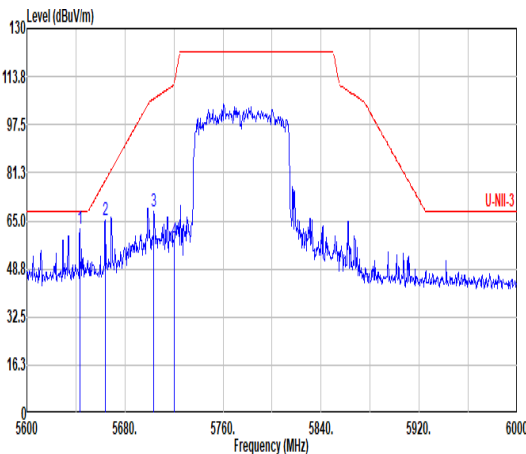
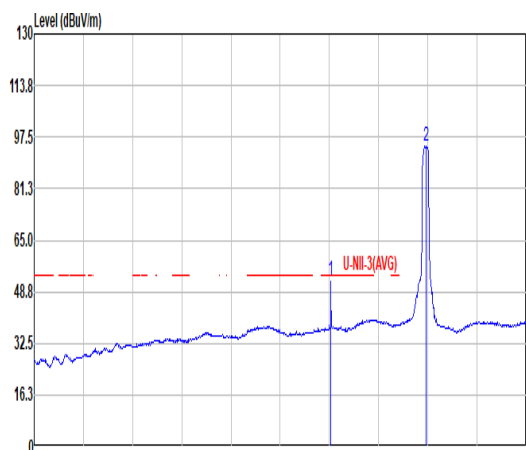


Mode	38																																																																																															
	Band Edge - L																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																															
ANT	CDD 0+1																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5643.20</td><td>62.17</td><td>68.30</td><td>-6.13</td><td>52.13</td><td>34.60</td><td>11.06</td><td>35.62</td><td>0.00</td><td>100</td><td>171 PEAK</td></tr><tr><td>2</td><td>5664.00</td><td>65.29</td><td>78.69</td><td>-13.40</td><td>55.62</td><td>34.60</td><td>11.09</td><td>36.02</td><td>0.00</td><td>100</td><td>171 PEAK</td></tr><tr><td>3</td><td>5703.60</td><td>68.12</td><td>106.31</td><td>-38.19</td><td>59.15</td><td>34.61</td><td>11.15</td><td>36.79</td><td>0.00</td><td>100</td><td>171 PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>58.42</td><td>110.90</td><td>-52.48</td><td>49.70</td><td>34.66</td><td>11.17</td><td>37.11</td><td>0.00</td><td>100</td><td>171 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5643.20	62.17	68.30	-6.13	52.13	34.60	11.06	35.62	0.00	100	171 PEAK	2	5664.00	65.29	78.69	-13.40	55.62	34.60	11.09	36.02	0.00	100	171 PEAK	3	5703.60	68.12	106.31	-38.19	59.15	34.61	11.15	36.79	0.00	100	171 PEAK	4	5720.00	58.42	110.90	-52.48	49.70	34.66	11.17	37.11	0.00	100	171 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	5643.20	62.17	68.30	-6.13	52.13	34.60	11.06	35.62	0.00	100	171 PEAK																																																																																					
2	5664.00	65.29	78.69	-13.40	55.62	34.60	11.09	36.02	0.00	100	171 PEAK																																																																																					
3	5703.60	68.12	106.31	-38.19	59.15	34.61	11.15	36.79	0.00	100	171 PEAK																																																																																					
4	5720.00	58.42	110.90	-52.48	49.70	34.66	11.17	37.11	0.00	100	171 PEAK																																																																																					
Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4618.00</td><td>52.72</td><td>54.00</td><td>-1.28</td><td>46.60</td><td>34.04</td><td>10.03</td><td>37.95</td><td>0.00</td><td>306</td><td>177 AVERAGE</td></tr><tr><td>2</td><td>5775.00</td><td>94.70</td><td>-----</td><td>-----</td><td>86.64</td><td>34.79</td><td>11.23</td><td>37.96</td><td>0.00</td><td>100</td><td>171 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4618.00	52.72	54.00	-1.28	46.60	34.04	10.03	37.95	0.00	306	177 AVERAGE	2	5775.00	94.70	-----	-----	86.64	34.79	11.23	37.96	0.00	100	171 AVERAGE																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	4618.00	52.72	54.00	-1.28	46.60	34.04	10.03	37.95	0.00	306	177 AVERAGE																																																																																					
2	5775.00	94.70	-----	-----	86.64	34.79	11.23	37.96	0.00	100	171 AVERAGE																																																																																					

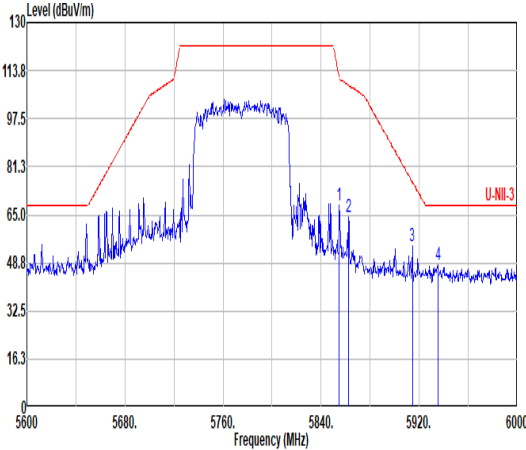


Mode	38																																																																																														
	Band Edge - R																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>68.11</td><td>111.36</td><td>-43.25</td><td>61.47</td><td>35.01</td><td>11.34</td><td>39.71</td><td>0.00</td><td>100</td><td>171</td><td>PEAK</td></tr><tr><td>2</td><td>5862.40</td><td>64.07</td><td>108.83</td><td>-44.76</td><td>57.41</td><td>35.02</td><td>11.34</td><td>39.70</td><td>0.00</td><td>100</td><td>171</td><td>PEAK</td></tr><tr><td>3</td><td>5914.40</td><td>54.44</td><td>76.12</td><td>-21.68</td><td>47.56</td><td>35.11</td><td>11.39</td><td>39.62</td><td>0.00</td><td>100</td><td>171</td><td>PEAK</td></tr><tr><td>4</td><td>5935.20</td><td>48.04</td><td>68.30</td><td>-20.26</td><td>41.07</td><td>35.14</td><td>11.41</td><td>39.58</td><td>0.00</td><td>100</td><td>171</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	68.11	111.36	-43.25	61.47	35.01	11.34	39.71	0.00	100	171	PEAK	2	5862.40	64.07	108.83	-44.76	57.41	35.02	11.34	39.70	0.00	100	171	PEAK	3	5914.40	54.44	76.12	-21.68	47.56	35.11	11.39	39.62	0.00	100	171	PEAK	4	5935.20	48.04	68.30	-20.26	41.07	35.14	11.41	39.58	0.00	100	171	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5854.00	68.11	111.36	-43.25	61.47	35.01	11.34	39.71	0.00	100	171	PEAK																																																																																			
2	5862.40	64.07	108.83	-44.76	57.41	35.02	11.34	39.70	0.00	100	171	PEAK																																																																																			
3	5914.40	54.44	76.12	-21.68	47.56	35.11	11.39	39.62	0.00	100	171	PEAK																																																																																			
4	5935.20	48.04	68.30	-20.26	41.07	35.14	11.41	39.58	0.00	100	171	PEAK																																																																																			

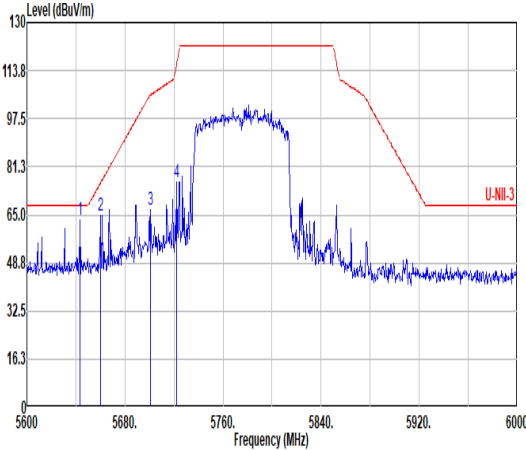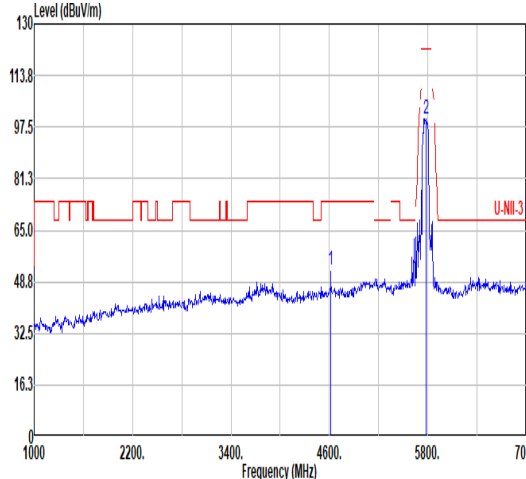
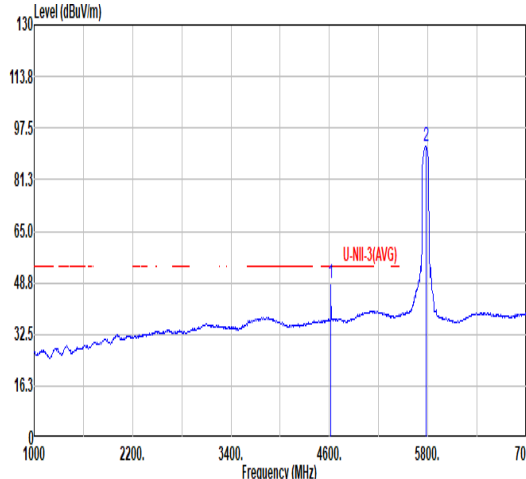


Mode	38																																																																																														
	Band Edge - L																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5643.60</td><td>63.43</td><td>68.30</td><td>-4.87</td><td>53.40</td><td>34.60</td><td>11.06</td><td>35.63</td><td>0.00</td><td>399</td><td>79 PEAK</td></tr><tr><td>2</td><td>5660.40</td><td>64.99</td><td>76.02</td><td>-11.03</td><td>55.25</td><td>34.60</td><td>11.09</td><td>35.95</td><td>0.00</td><td>399</td><td>79 PEAK</td></tr><tr><td>3</td><td>5700.80</td><td>66.49</td><td>105.52</td><td>-39.03</td><td>57.48</td><td>34.60</td><td>11.14</td><td>36.73</td><td>0.00</td><td>399</td><td>79 PEAK</td></tr><tr><td>4</td><td>5722.00</td><td>75.83</td><td>115.46</td><td>-39.63</td><td>67.13</td><td>34.67</td><td>11.17</td><td>37.14</td><td>0.00</td><td>399</td><td>79 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5643.60	63.43	68.30	-4.87	53.40	34.60	11.06	35.63	0.00	399	79 PEAK	2	5660.40	64.99	76.02	-11.03	55.25	34.60	11.09	35.95	0.00	399	79 PEAK	3	5700.80	66.49	105.52	-39.03	57.48	34.60	11.14	36.73	0.00	399	79 PEAK	4	5722.00	75.83	115.46	-39.63	67.13	34.67	11.17	37.14	0.00	399
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5643.60	63.43	68.30	-4.87	53.40	34.60	11.06	35.63	0.00	399	79 PEAK																																																																																				
2	5660.40	64.99	76.02	-11.03	55.25	34.60	11.09	35.95	0.00	399	79 PEAK																																																																																				
3	5700.80	66.49	105.52	-39.03	57.48	34.60	11.14	36.73	0.00	399	79 PEAK																																																																																				
4	5722.00	75.83	115.46	-39.63	67.13	34.67	11.17	37.14	0.00	399	79 PEAK																																																																																				
Avg																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4618.00</td><td>52.62</td><td>74.00</td><td>-21.38</td><td>46.50</td><td>34.04</td><td>10.03</td><td>37.95</td><td>0.00</td><td>159</td><td>357 PEAK</td></tr><tr><td>2</td><td>5775.00</td><td>100.28</td><td>-----</td><td>-----</td><td>92.13</td><td>34.77</td><td>11.22</td><td>37.84</td><td>0.00</td><td>399</td><td>79 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4618.00	52.62	74.00	-21.38	46.50	34.04	10.03	37.95	0.00	159	357 PEAK	2	5775.00	100.28	-----	-----	92.13	34.77	11.22	37.84	0.00	399	79 PEAK																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4618.00	52.62	74.00	-21.38	46.50	34.04	10.03	37.95	0.00	159	357 PEAK																																																																																				
2	5775.00	100.28	-----	-----	92.13	34.77	11.22	37.84	0.00	399	79 PEAK																																																																																				
Blank																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4618.00</td><td>48.69</td><td>54.00</td><td>-5.31</td><td>42.57</td><td>34.04</td><td>10.03</td><td>37.95</td><td>0.00</td><td>159</td><td>357 AVERAGE</td></tr><tr><td>2</td><td>5775.00</td><td>91.60</td><td>-----</td><td>-----</td><td>83.71</td><td>34.83</td><td>11.25</td><td>38.19</td><td>0.00</td><td>399</td><td>79 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4618.00	48.69	54.00	-5.31	42.57	34.04	10.03	37.95	0.00	159	357 AVERAGE	2	5775.00	91.60	-----	-----	83.71	34.83	11.25	38.19	0.00	399	79 AVERAGE																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4618.00	48.69	54.00	-5.31	42.57	34.04	10.03	37.95	0.00	159	357 AVERAGE																																																																																				
2	5775.00	91.60	-----	-----	83.71	34.83	11.25	38.19	0.00	399	79 AVERAGE																																																																																				

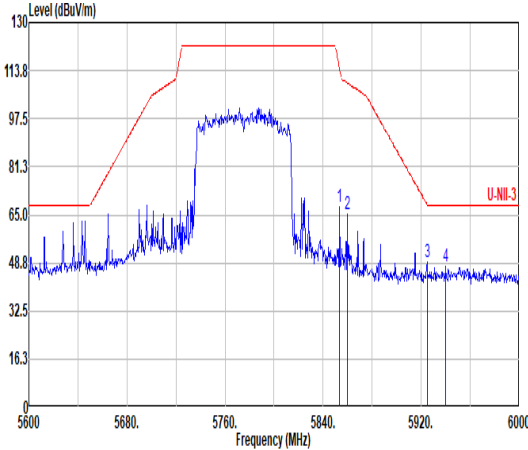

Mode	38																																																																																														
	Band Edge - R																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5853.60</td><td>67.94</td><td>114.09</td><td>-46.15</td><td>61.29</td><td>35.01</td><td>11.33</td><td>39.69</td><td>0.00</td><td>399</td><td>79</td><td>PEAK</td></tr><tr><td>2</td><td>5859.60</td><td>65.30</td><td>109.61</td><td>-44.31</td><td>58.64</td><td>35.02</td><td>11.34</td><td>39.70</td><td>0.00</td><td>399</td><td>79</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>49.16</td><td>68.45</td><td>-19.29</td><td>42.24</td><td>35.12</td><td>11.40</td><td>39.60</td><td>0.00</td><td>399</td><td>79</td><td>PEAK</td></tr><tr><td>4</td><td>5940.00</td><td>47.43</td><td>68.30</td><td>-20.87</td><td>40.44</td><td>35.14</td><td>11.42</td><td>39.57</td><td>0.00</td><td>399</td><td>79</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5853.60	67.94	114.09	-46.15	61.29	35.01	11.33	39.69	0.00	399	79	PEAK	2	5859.60	65.30	109.61	-44.31	58.64	35.02	11.34	39.70	0.00	399	79	PEAK	3	5924.80	49.16	68.45	-19.29	42.24	35.12	11.40	39.60	0.00	399	79	PEAK	4	5940.00	47.43	68.30	-20.87	40.44	35.14	11.42	39.57	0.00	399	79	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5853.60	67.94	114.09	-46.15	61.29	35.01	11.33	39.69	0.00	399	79	PEAK																																																																																			
2	5859.60	65.30	109.61	-44.31	58.64	35.02	11.34	39.70	0.00	399	79	PEAK																																																																																			
3	5924.80	49.16	68.45	-19.29	42.24	35.12	11.40	39.60	0.00	399	79	PEAK																																																																																			
4	5940.00	47.43	68.30	-20.87	40.44	35.14	11.42	39.57	0.00	399	79	PEAK																																																																																			

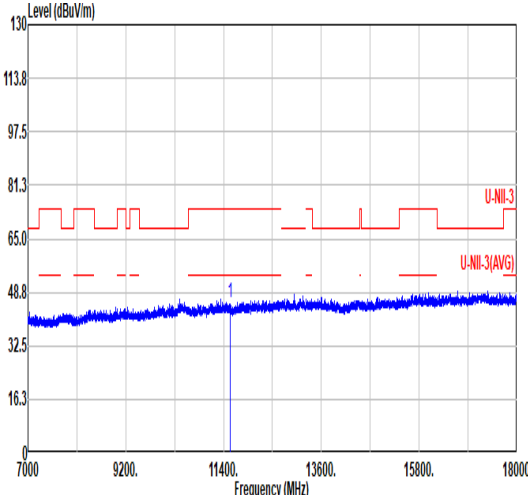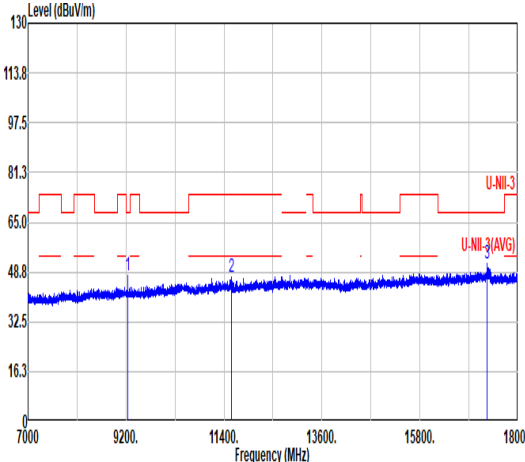


Mode	38																																																																																																																												
	Harmonic																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																												
ANT	CDD 0+1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11550.00</td><td>45.77</td><td>74.00</td><td>-28.23</td><td>57.27</td><td>38.34</td><td>16.39</td><td>66.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	45.77	74.00	-28.23	57.27	38.34	16.39	66.23	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>9239.60</td><td>47.67</td><td>68.20</td><td>-20.53</td><td>63.63</td><td>36.48</td><td>14.49</td><td>66.93</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>11561.33</td><td>47.21</td><td>74.00</td><td>-26.79</td><td>58.69</td><td>38.35</td><td>16.40</td><td>66.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>17307.73</td><td>51.72</td><td>68.20</td><td>-16.48</td><td>54.91</td><td>41.24</td><td>20.21</td><td>64.64</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	9239.60	47.67	68.20	-20.53	63.63	36.48	14.49	66.93	0.00	---	---	PEAK	2	11561.33	47.21	74.00	-26.79	58.69	38.35	16.40	66.23	0.00	---	---	PEAK	3	17307.73	51.72	68.20	-16.48	54.91	41.24	20.21	64.64	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	11550.00	45.77	74.00	-28.23	57.27	38.34	16.39	66.23	0.00	---	---	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	9239.60	47.67	68.20	-20.53	63.63	36.48	14.49	66.93	0.00	---	---	PEAK																																																																																																																	
2	11561.33	47.21	74.00	-26.79	58.69	38.35	16.40	66.23	0.00	---	---	PEAK																																																																																																																	
3	17307.73	51.72	68.20	-16.48	54.91	41.24	20.21	64.64	0.00	---	---	PEAK																																																																																																																	



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	92.61	1.362	0.734	0.75kHz
802.11ac VHT20	93.09	1.282	0.780	0.82kHz
802.11ac VHT40	87.70	0.641	1.561	1.6kHz
802.11ac VHT80	78.01	0.319	3.136	3.3kHz

802.11a

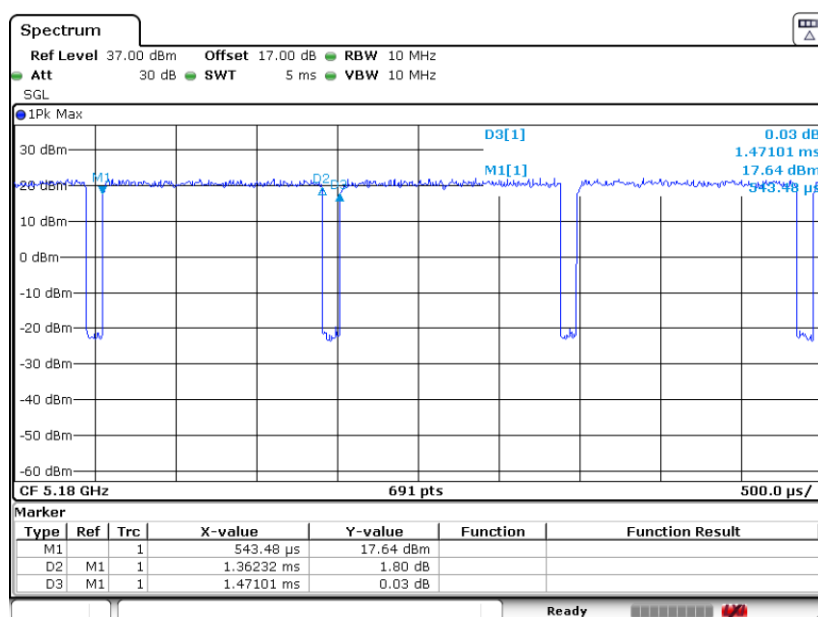




802.11ac VHT20

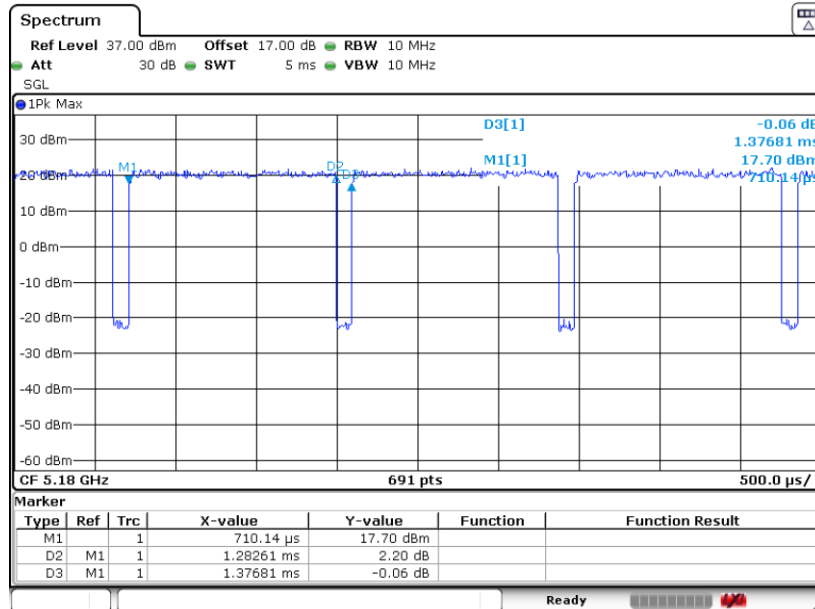

802.11ac VHT40

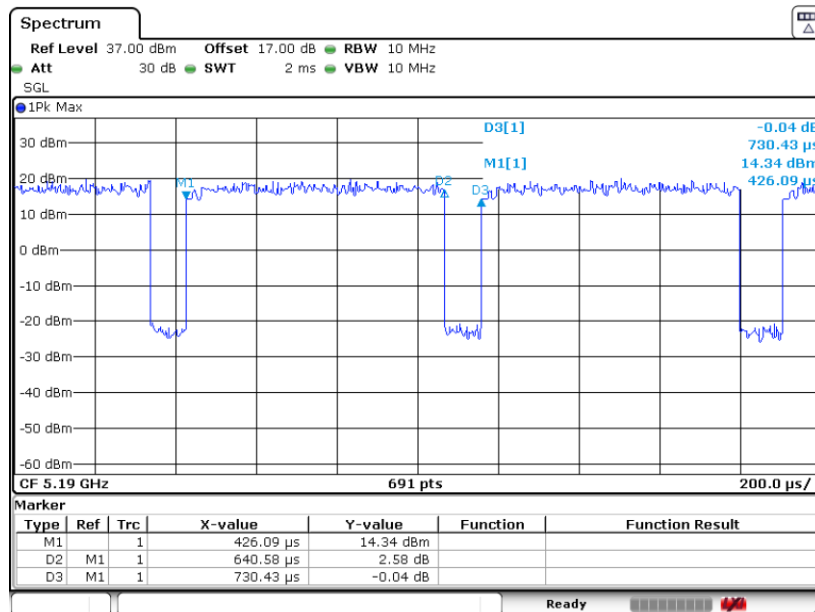



802.11ac VHT80

