

Radio Portable : SC782

Bluetooth Antenna model : BT-HT-A-7000


Antenna Gain:

Efficiency test results


Test equipment	Satimo SG24+R&X-ZVL
----------------	---------------------

BT			
Freq (MHz)	Effici (%)	Average gain(dB)	Max Gain (dBi)
2400	51.8	-2.9	2.5
2410	54.8	-2.6	2.7
2420	56.6	-2.5	2.8
2430	57.2	-2.4	2.8
2440	57.4	-2.4	2.7
2450	57.2	-2.4	2.7
2460	56.3	-2.5	2.7
2470	55.1	-2.6	2.6
2480	54.5	-2.6	2.4
2490	53.7	-2.7	2.2
2500	53.0	-2.8	2.2

Antenna Radiation Pattern :

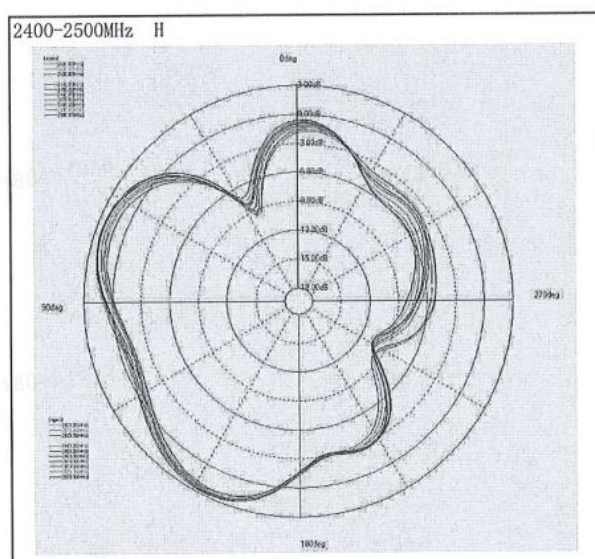

Dimension :

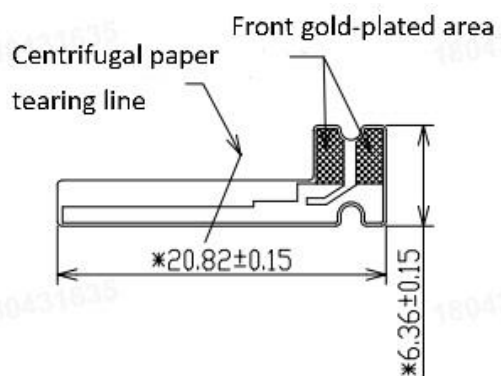

Radio Portable : SC582

Bluetooth Antenna model : BT-HT-A-5000


Antenna Gain :

Efficiency test results

Test equipment	Satimo SG24+R&X-ZVL
----------------	---------------------

BT			
Freq (MHz)	Effici (%)	Average gain(dB)	Max Gain (dBi)
2400	51.8	-2.9	2.5
2410	54.8	-2.6	2.7
2420	56.6	-2.5	2.8
2430	57.2	-2.4	2.8
2440	57.4	-2.4	2.7
2450	57.2	-2.4	2.7
2460	56.3	-2.5	2.7
2470	55.1	-2.6	2.6
2480	54.5	-2.6	2.4
2490	53.7	-2.7	2.2
2500	53.0	-2.8	2.2

Antenna Radiation Pattern:

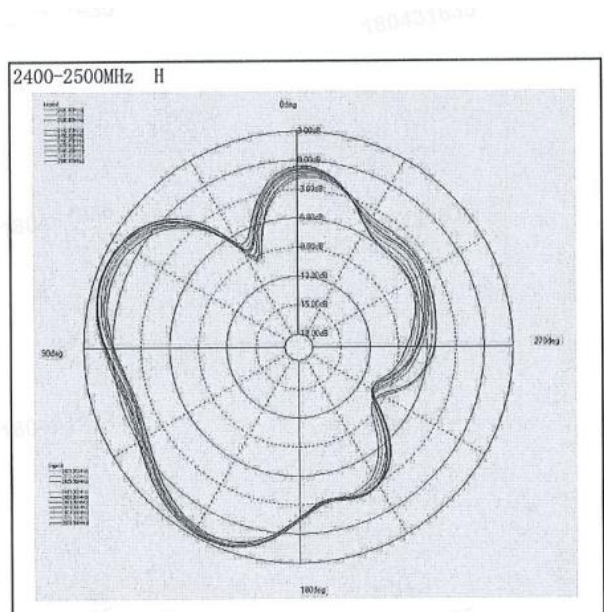

Dimension :

