

TOSHIBA FCC ID: CJ6DCE45380A -- Cellular CDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV6 - SN1560 -- Probe Cal Date 20/02/01

Med. Parameters 835 MHz Muscle: $\sigma = 0.97$ mho/m $\epsilon_r = 55.2$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.388 mW/g, SAR (10g): 0.273 mW/g

TOSHIBA TriMode phone Model:CDM-9155GPX

Cellular CDMA Mode, Ch.1013 [824.70MHz]; Flat Phantom; Standard Battery

Conducted Power = 24.5dBm; Spacing = 2.2cm from flat phantom to back of phone, w/BeltClip

Test Date -- 11/29/2001

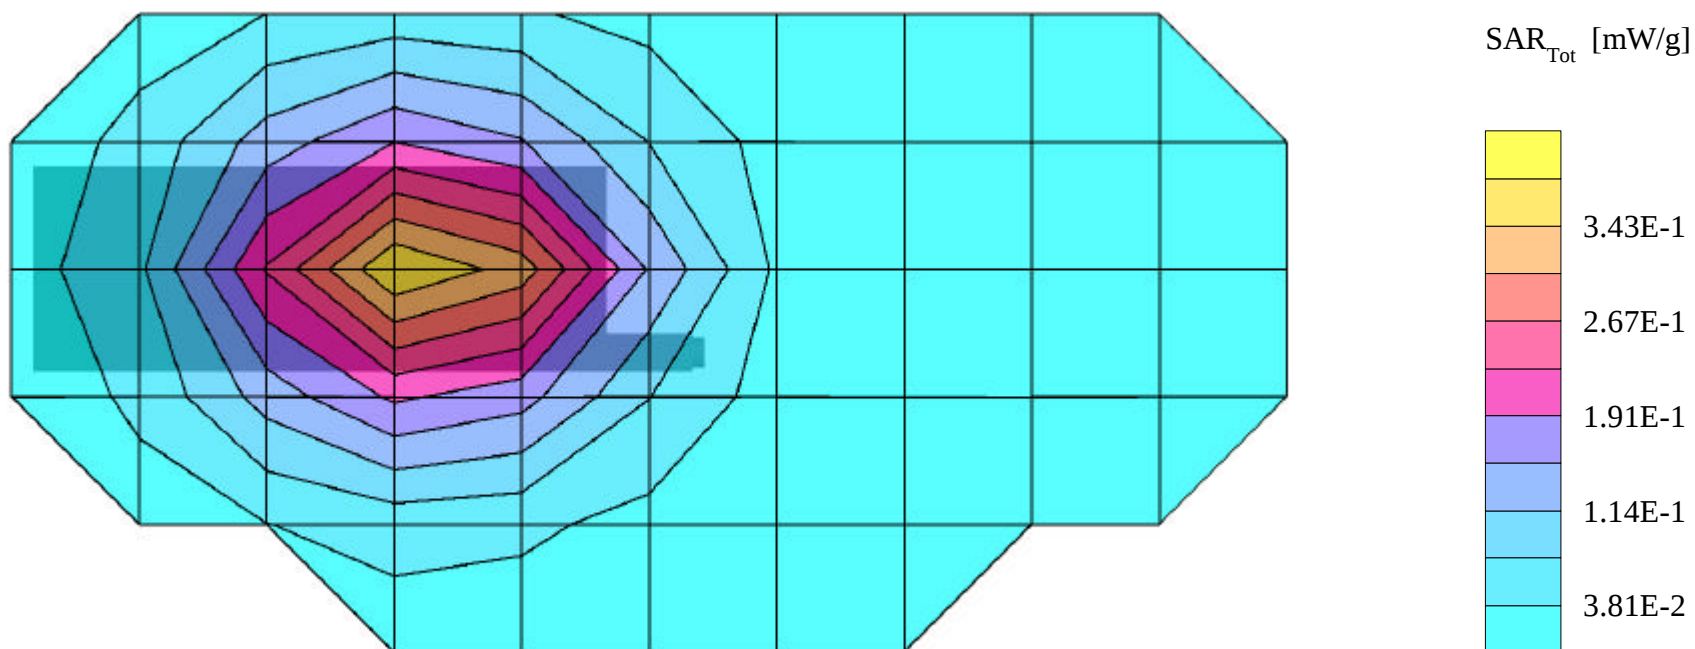

TOSHIBA FCC ID: CJ6DCE45380A -- Cellular CDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV6 - SN1560 -- Probe Cal Date 20/02/01

Med. Parameters 835 MHz Muscle: $\sigma = 0.97$ mho/m $\epsilon_r = 55.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.343 mW/g, SAR (10g): 0.241 mW/g

TOSHIBA TriMode phone Model:CDM-9155GPX

Cellular CDMA Mode, Ch.1013 [824.70MHz]; Flat Phantom; Standard Battery

Conducted Power = 24.5dBm; Spacing = 2.2cm from flat phantom to back of phone, w/BeltClip

Test Date -- 11/29/2001

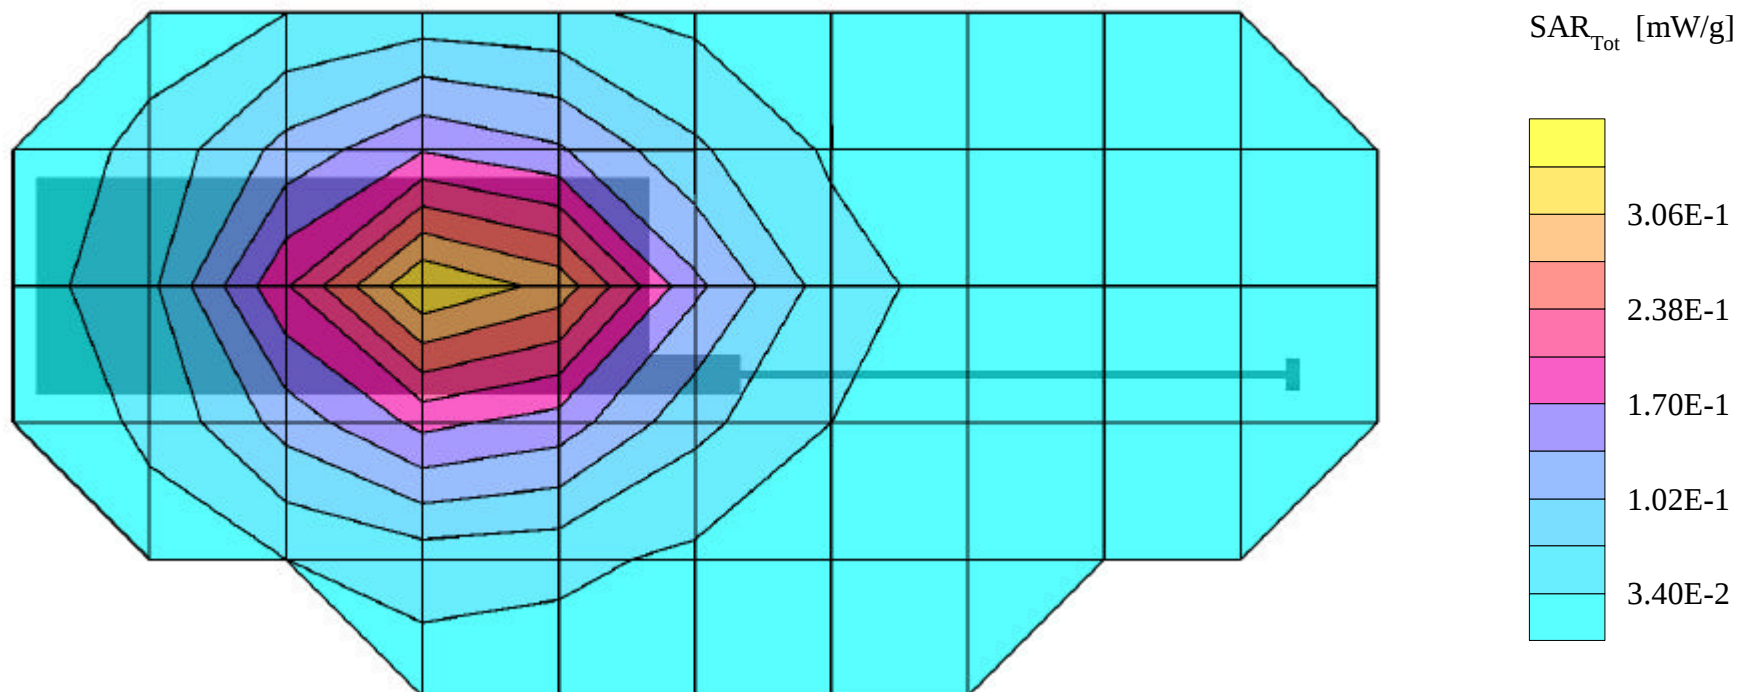

TOSHIBA FCC ID: CJ6DCE45380A -- Cellular CDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV6 - SN1560 -- Probe Cal Date 20/02/01

Med. Parameters 835 MHz Muscle: $\sigma = 0.97$ mho/m $\epsilon_r = 55.2$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.325 mW/g, SAR (10g): 0.228 mW/g

TOSHIBA TriMode phone Model:CDM-9155GPX

Cellular CDMA Mode, Ch.1013 [824.70MHz]; Flat Phantom; Standard Battery

Conducted Power = 24.5dBm; Spacing = 2.5cm from flat phantom to back of phone, w/Holster

Test Date -- 11/29/2001

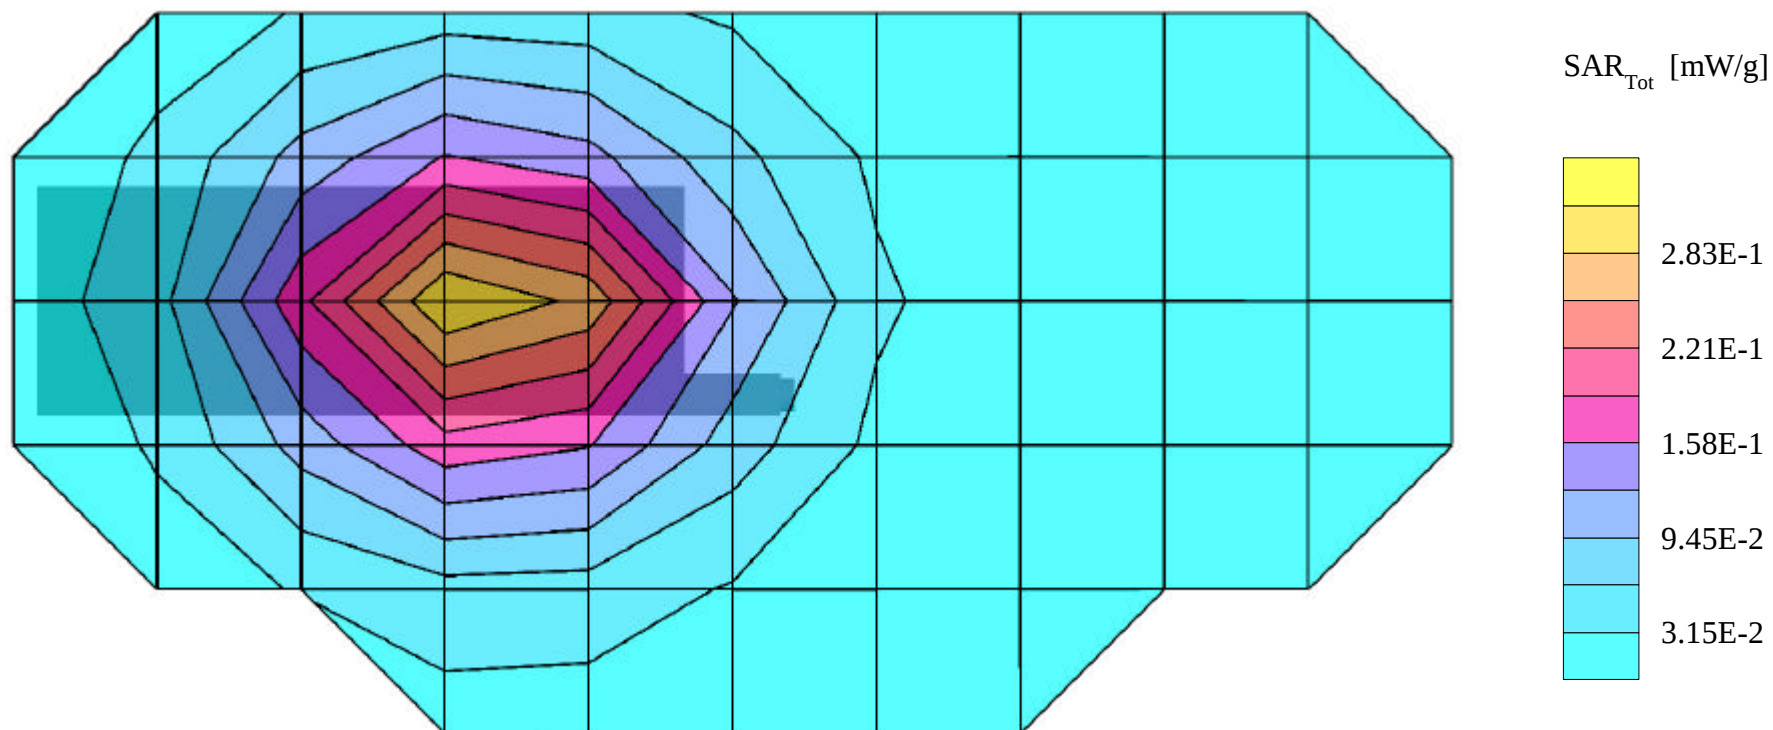

TOSHIBA FCC ID: CJ6DCE45380A -- Cellular CDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV6 - SN1560 -- Probe Cal Date 20/02/01

Med. Parameters 835 MHz Muscle: $\sigma = 0.97$ mho/m $\epsilon_r = 55.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.296 mW/g, SAR (10g): 0.208 mW/g

TOSHIBA TriMode phone Model:CDM-9155GPX

Cellular CDMA Mode, Ch.1013 [824.70MHz]; Flat Phantom; Standard Battery

Conducted Power = 24.5dBm; Spacing = 2.5cm from flat phantom to back of phone, w/Holster

Test Date -- 11/29/2001

