

# **FCC Test Report**

Report No.: AGC07307191003FE03

**FCC ID** 2ALU4DX513A11

**APPLICATION PURPOSE** Original Equipment

PRODUCT DESIGNATION WIRELESS CHARGER & PHONE HOLDER

**BRAND NAME AUTO DRIVE** 

**MODEL NAME** VCW-513

**APPLICANT** Huizhou Artsun Industrial Company Limited

**DATE OF ISSUE** Oct. 21, 2019

STANDARD(S)

FCC Part 15 Rules **TEST PROCEDURE(S)** 

REPORT VERSION V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

#### CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com Service Hotline: 400 089 2118




Page 2 of 24

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 21, 2019	Valid	Initial Release








## **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	C
2.1. PRODUCT DESCRIPTION	
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	9
7. RADIATED EMISSION	10
7.1TEST LIMIT	10
7.2. MEASUREMENT PROCEDURE	11
7.3. TEST SETUP	12
7.4. TEST RESULT	
8. 20DB BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE	16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
8.3. MEASUREMENT RESULTS	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	18
APPENDIX B. PHOTOGRAPHS OF FUT	G 2 19





#### 1. VERIFICATION OF CONFORMITY

Applicant Huizhou Artsun Industrial Company Limited		
Address	No.2, Floor 14th, Unit one, Ruihe Commercial Square, No.1 Yandayi Road, Henan'an District, Huizhou City 516007, Guangdong, China	
Manufacturer Huizhou Artsun Industrial Company Limited		
Address	No.2, Floor 14th, Unit one, Ruihe Commercial Square, No.1 Yandayi Road, Henan'an District, Huizhou City 516007, Guangdong, China	
Factory	VOLANT ROC ELECTRONICS TECH CO., LTD	
Address	A Building, QianLi Industrial Park, Sandong Town, Huizhou City 516025, Guangdong, China	
Product Designation	WIRELESS CHARGER & PHONE HOLDER	
Brand Name	AUTO DRIVE	
Test Model	VCW-513	
Date of test	Oct. 12, 2019 to Oct. 18, 2019	
Deviation	None	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BR/RF	

#### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with Section 15.207, 15.209, 15.203 of the FCC Part 15, Subpart C Rules. The results of testing in this report apply to the product/system which was tested only.

Prepared By	Erik Jeny	
	Erik Yang (Project Engineer)	Oct. 18, 2019
Reviewed By	Max Zhang	
	Max Zhang (Reviewer)	Oct. 21, 2019
Approved By	Forrest le	
C -	Forrest Lei ( Authorized Officer)	Oct. 21, 2019



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$ 

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Page 5 of 24


## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	110-205kHz			
Test Frequency	131.6kHz			
Maximum field strength	55.56dBuV/m(PK)@3m			
Modulation	FSK			
Number of channels	1			
Antenna Gain	OdBi			
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)			
Hardware Version	C800-V06			
Software Version	V1.0			
Power Supply DC 5V 2A or DC 9V 2A by adapter				







#### 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB





Page 7 of 24

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Wireless charging Mode(Full load)	
2	Wireless charging Mode(half load)	
3	Wireless charging Mode(Null load)	

#### Note:

1. The mode 1 was the worst case and only the data of the worst case record in this report.






Page 8 of 24

## 5. SYSTEM TEST CONFIGURATION

## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	WIRELESS CHARGER & PHONE HOLDER	VCW-513	2ALU4DX513A11	EUT
2	Load	N/A	10W	Accessory
3	Car charger	N/A	DC 5V 2A or DC 9V 2A	Accessory
4	USB Cable	N/A	1.0m, Unshielded	Accessory

## **5.3. SUMMARY OF TEST RESULTS**

		(a)
FCC RULES	DESCRIPTION OF TEST	RESULT
§15.209	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission N/A	

Note: N/A stands for not applicable.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service

Service Hotline: 400 089 2118



Page 9 of 24

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.12, 2019	Jun.11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun.12, 2019	Jun.11, 2020
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021





Page 10 of 24

## 7. RADIATED EMISSION

#### 7.1TEST LIMIT

#### Standard FCC 15.209

Frequency Distance		Field Strengths Limit		
(MHz)	Meters	μ <b>V/m</b>	dB(μV)/m	
0.009 ~ 0.490	300	2400/F(kHz)	GY 2G 2	
0.490 ~ 1.705	30	24000/F(kHz)		
1.705 ~ 30	30	30	0	
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500	54.0	
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average		

Remark:

- (1) Emission level  $dB\mu V = 20 \log Emission level \mu V/m$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 11 of 24

#### 7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP






#### 7.3. TEST SETUP

## Radiated Emission Test-Setup Frequency Below 30MHz

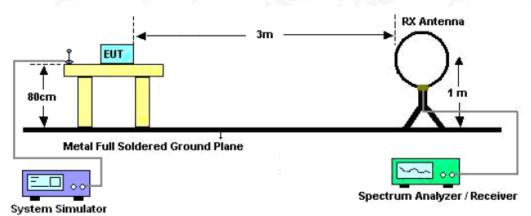

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

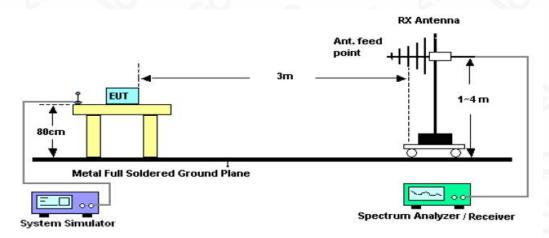



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$ 

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 13 of 24

#### 7.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**

F	requency MHz	Polarization	Reading dB(uV) PK	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail
	0.1316	Face	45.16	10.40	55.56	105.22	-49.66	Pass
	0.1316	Side	35.07	10.40	45.47	105.22	-59.75	Pass

Note1: No other emissions found between lowest internal used/generated frequencies to 30MHz. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.


Note 2: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)

Factor(dB/m)=Antenna Factor(dB/m)+Cable loss(dB)+Attenuation(dB)for Attenuator

Margin=Level-Limit

Limit(dBuV/m)=20log(2400/F(kHz))+40log(300/3)=105.22dBuV/m.








**RADIATED EMISSION 30MHz-1GHz** 

EUT:	WIRELESS CHARGER & PHONE HOLDER	Model Name. :	VCW-513
Temperature:	25℃	Relative Humidity:	55%
Pressure :	1010 hPa	Test Voltage :	DC 9V
Test Mode :	Mode 1	Polarization :	Horizontal

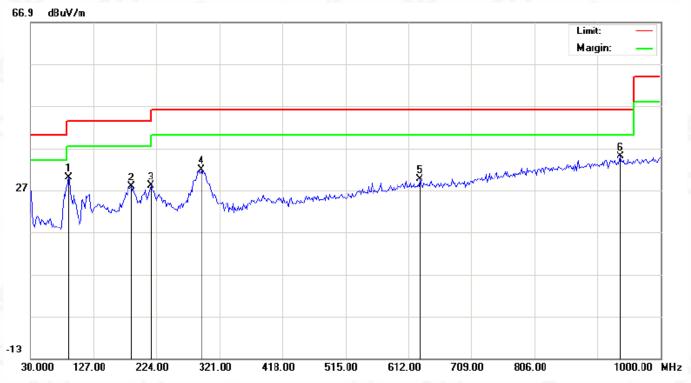


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	•	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		88.2000	15.09	14.97	30.06	43.50	-13.44	peak			
2		185.2000	10.97	16.85	27.82	43.50	-15.68	peak			
3		215.9167	11.10	17.00	28.10	43.50	-15.40	peak			
4		293.5167	12.12	19.62	31.74	46.00	-14.26	peak			
5		629.7833	2.38	27.31	29.69	46.00	-16.31	peak			
6	*	938.5667	2.89	32.03	34.92	46.00	-11.08	peak			

**RESULT: PASS** 



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,





EUT:	WIRELESS CHARGER & PHONE HOLDER	Model Name. :	VCW-513
Temperature:	25℃	Relative Humidity:	55%
Pressure:	1010 hPa	Test Voltage :	DC 9V
Test Mode :	Mode 1	Polarization :	Vertical

					Limit: —
					Margin: —
	_				
3 & X					6
	, "Å		5	March March March March	was hayland from the same
N. A/   💜   1	$\sqrt{1}$	myhaparaan	white was	Mark Colors	
, <b>W</b>	~	methods			
*					

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		30.0000	13.34	18.17	31.51	40.00	-8.49	peak			
2		131.8500	15.91	18.72	34.63	43.50	-8.87	peak			
3	*	183.5833	19.34	16.94	36.28	43.50	-7.22	peak			
4		296.7500	13.01	19.55	32.56	46.00	-13.44	peak			
5		560.2667	4.47	26.17	30.64	46.00	-15.36	peak			
6		925.6333	2.00	31.92	33.92	46.00	-12.08	peak			

#### **RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss, Margin=Limit-Level.


The "Factor" value can be calculated automatically by software of measurement system.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,

Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com Service Hotline:400 089 2118






#### 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2, Set the EUT Work on operation frequency.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

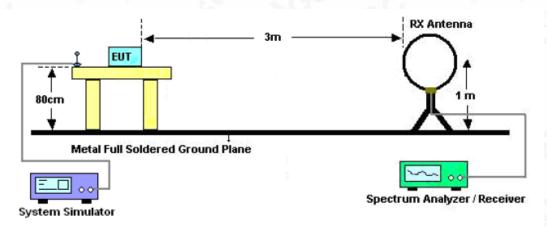



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China





#### 8.3. MEASUREMENT RESULTS


TEST ITEM	20DB BANDWIDTH	0	<0°C	-0		0	
TEST MODULATION	FSK	8		10	< G		-0

Test Data (Hz)	Criteria	
Operate Channel	867	PASS

#### **TEST PLOT OF BANDWIDTH**










## **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

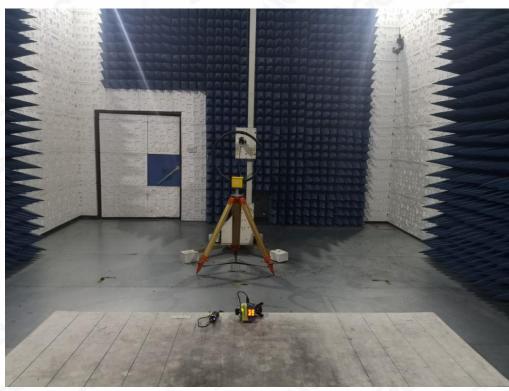





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,






## **APPENDIX B: PHOTOGRAPHS OF EUT**

ALL VIEW OF EUT



TOP VIEW OF EUT

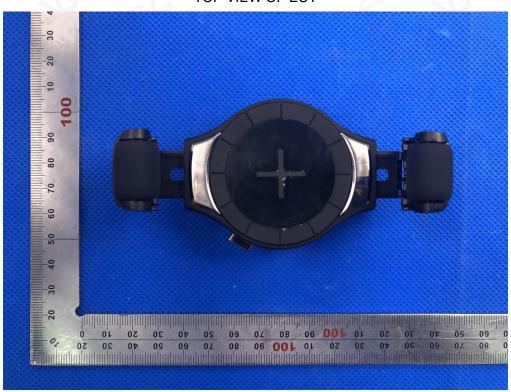



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



## **BOTTOM VIEW OF EUT**



FRONT VIEW OF EUT





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



## **BACK VIEW OF EUT**




LEFT VIEW OF EUT





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,






## **RIGHT VIEW OF EUT**



**OPEN VIEW OF EUT** 

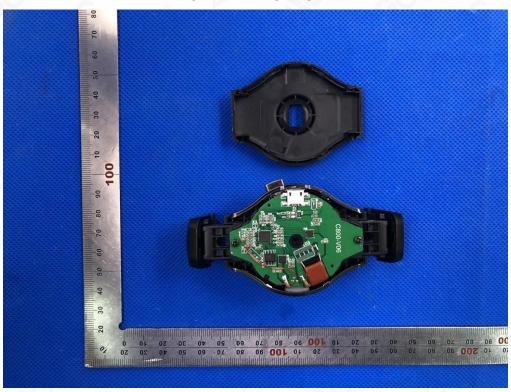




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



## **INTERNAL VIEW-1 OF EUT**

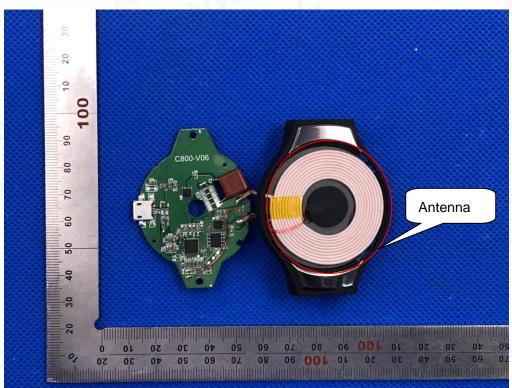

**INTERNAL VIEW-2 OF EUT** 

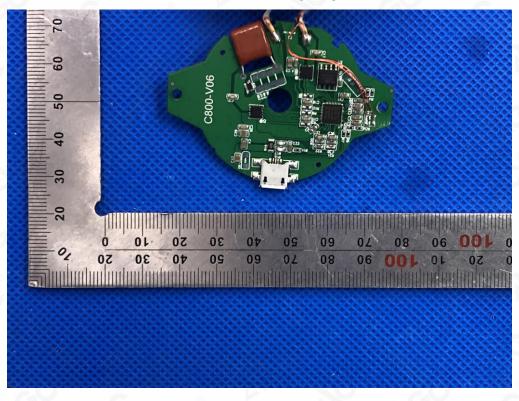




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



## **INTERNAL VIEW-3 OF EUT**

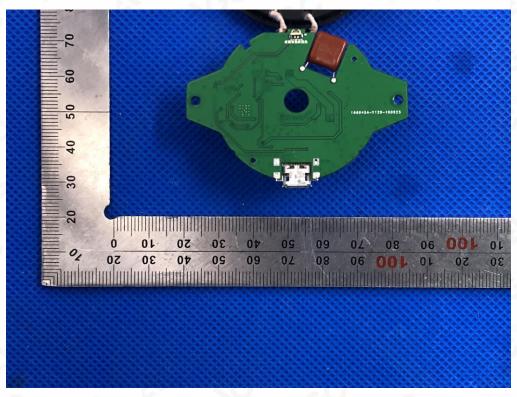

----END OF REPORT----



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,

Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118