

HelloBaby®

Ver: 1.1

User Manual

2.4GHz Digital Wireless Video Baby Monitor 2.4GHz Digital Wireless Video Baby Camera



Model: HB50

The pictures are for reference only, please subject to practicality.

www.hellobaby.net.cn
service@hellobaby.net.cn

Thank you for purchasing the HB50 Baby Monitor. With our baby monitor, you could see and hear your baby sleeping or playing in their room anytime.

Please retain your original dated sales receipt for your records. For warranty service of your product, you will need to provide a copy of your dated sales receipt to confirm warranty status. Registration is not required for warranty coverage.

PLEASE MAKE SURE THE FOLLOWING INCLUDED IN YOUR PACKAGE

Parent unit x 1 Camera unit x 1 Power adapter x 2
User manual x 1 Wall-mounting kit x 1

1. SAFETY INSTRUCTIONS

Caution: Keep the device away from children.

Strangulation hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3ft (0.9m) away). Never use extension cords with AC Adapters. Only use the AC Adapters provided.

Choking hazard: This product contains small parts, please be careful when unpack and assemble the product.

Read and keep to instructions: All the safety and operating in structions should be read before the video baby monitor is operated. This product cannot replace responsible adult supervision.

Water and moisture: The unit should not be exposed to rain, moisture, dripping or splashing. No objects filled with liquid should be placed on top of, or beside the product, such as a glass or vase. This item should not be used near water.

Do not: Use the appliance if the cord or plug is damaged. If your baby monitor is not operating properly or has suffered any damage, contact "service@hellobaby.net.cn" service center to request inspection and repair of the appliance in order to avoid any possible risk.

Do not: Attempt to repair or adjust any of the electrical or mechanical functions of the unit. Otherwise, the guarantee will be made void.

Ventilation: This baby monitor should not be used on a bed, sofa, rug or similar surface that may block the ventilation openings, or be placed in an enclosed area such as a bookcase or drawer that may impede air flow.

Keep away from sources of heat: This unit should not be exposed to direct heat sources such as a candle, radiator, heat register, stove or other appliance that emits heat. The unit should not be left in direct sunlight.

Power source: This unit should only be used with the AC power adapters included in this package (rated 5V DC 1A).

Damage requiring service: This unit should be serviced by qualified personnel only when:

1. Objects have fallen or liquid has been spilled into the product.
2. The units have been exposed to rain.
3. The units do not appear to operate normally or exhibits a distinct change in performance.
4. The units have been dropped or the enclosure damaged.

2. WARRANTY TERMS

We offer one-year warranty from the original purchase date against defects in workmanship and materials. If you have warranty or support issues, please contact our after-sales service via email.

3. INSTALLATION GUIDELINES

* To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions.

* Any large metal object, like a refrigerator, a mirror, a filling cabinet, metallic doors or reinforced concrete between the baby and parent unit may block the radio signal.

* The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescent lights or dimmer switches.

* Use of other 2.4GHz product, such as wireless networks (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away at least 5ft (1.5m) from such products, or turn them off if they cause interferences.

4. PLACEMENT OF THE BABY MONITOR

The camera can be placed on the desktop or mounted on the wall. Don't place baby monitor on soft quilts or blankets or in the corners of cupboards, shelves, etc; Keep the baby monitor away from heat sources such as radiators, chimneys, cookers and direct sunlight; Keep the baby unit away from TV sets, microwave oven and radios. If interference occurs, move the camera to elsewhere.

* Place the camera within 6 feet (2 meters) of the area being monitored for optimum performance.

5. GETTING STARTED

5.1 TURN ON THE BABY UNIT:

1. Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit.
2. Insert the other end of the power adapter into a suitable electrical outlet.
3. Once the adapter is connected, the power LED will light up.
4. Keep the baby unit plugging in.

5.2 TURN ON THE PARENT UNIT:

1. Insert the DC plug of the power adapter into the DC jack in the side of the parent unit.
2. Insert the other end of the power adapter into a suitable electrical outlet.
3. Press and hold the power key 3 seconds on the side of the parent unit.
4. Once parent unit is on, the power LED will light up and the image will display on the LCD.

Note: When the product is in use, the antenna needs to be pulled up, so that the signal is the best.


5.3 INFRARED NIGHT VISION (AUTOMATIC)

The infrared night vision function allows the camera to pick up images in dark or low


light conditions. In this mode, only black and white images will be displayed on the monitor, the optimum image lie in where baby unit is 6ft (2m) away from object. The camera is in night vision mode, the icon  will be displayed on the top of screen.

6. PRODUCT OVERVIEW


6.1 ICONS OVERVIEW:

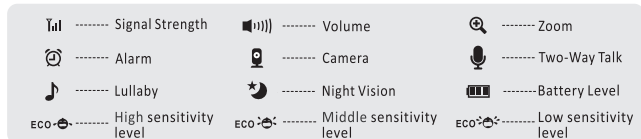

6.2 PARENT UNIT OVERVIEW:

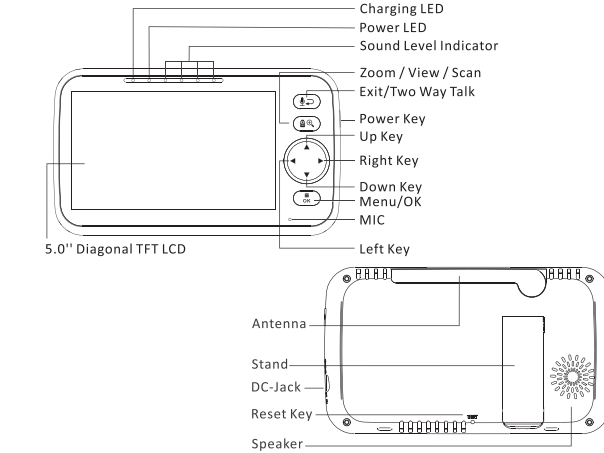

6.3 BABY UNIT OVERVIEW:

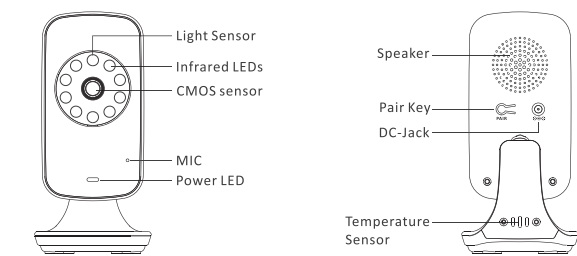

7. KEY OPERATION

7.1 POWER SAVE/SCREEN OFF

Short press the power  key to turn on / off the screen.

7.2 VOLUME ADJUSTMENT

Press the  key to increase the volume; Press the  key to decrease the volume.

7.3 BRIGHTNESS ADJUSTMENT

Press the  key to decrease the brightness; Press the  key to increase the brightness.

7.4 CAMERA VIEW/SCAN

Press scan  key to view/scan camera, during scan mode, the scan icon  will be displayed on the top of screen. Each camera's video will be stay on the LCD around 10 seconds then change to next camera.

7.5 DIGITAL ZOOM & PAN / TILT

Press and hold the  key around 2 seconds to operate Zoom in / out; At the Zoom mode, press the  key to Pan left; press  key to Pan right; press  key to tilt up; press  key to tilt down; During digital zoom mode, the zoom icon  will be displayed on the top of screen.

Warm reminder: If you want to adjust the volume/Brightness, you have to exit the Zoom mode before you operate it.

7.6 TWO WAY TALK

Press and hold  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.

Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8. MENU OPERATION

8.1 PAIRING THE CAMERA AND PARENT UNITS

The baby unit is pre-registered to your parent unit. You do not need to register it again unless the baby unit loses its link with the parent unit. To re-register your baby unit, or register a new baby unit, follow the procedure below:

Risk Group 1
WARNING IR emitted from this product. Do not stare at operating lamp
Product tested against EN62471

WARNING



Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9 m) away). Do not remove this tag.

AVERTISSEMENT

DANGER D'ÉTRANGLEMENT: Des enfants se sont ÉTRANGLÉS avec des cordons électriques. Garde le cordon électrique hors de la portée des enfants(à plus de 0.9m/3 pi du lit d'enfant). Ne pas enlever cette étiquette.



Made In China

Note: Camera icon with "  " means it is well registered. You should select and pair with the camera icon without "  " sign.

8.1.1 ADD CAMERA

1. Press the MENU  key then the menu will pop up.
2. Press the  /  /  /  key until the camera icon  is selected.
3. Press OK  key to enter into sub-menu, then press  /  key to select your desired camera.
4. Press  key enter into sub-menu; Press  /  key to select  then press  key.
5. While the icon ... displayed on the LCD screen, press the PAIR button on the back of camera.
6. Once paired, Successful pairing icon  shows on the LCD screen.
7. If fails, repeat the above steps.

8.1.2 DELETE CAMERA

1. Press the MENU  key and the menu will pop up.
2. Press the  /  /  /  key until the camera icon  is selected.
3. Press OK  key, to enter into sub-menu, then press  /  key to select the camera you want to delete.
4. Press  key enter into sub-menu; Press  /  key to select  then press  key.
5. Press  /  key to select  for deleting the camera.
6. Press OK  key to confirm the option.

8.2 TEMPERATURE UNIT SETTING

1. Press the MENU/OK  key and the menu will pop up.
2. Press the  /  /  /  key until the temperature icon  is selected.
3. Press  key enter into sub-menu.
4. Press the  /  key to select the  or  for setting temperature unit.
5. Press the  key to confirm.
6. Press the  key to exit.

Note: The temperature detection range is 0~40 °C .

8.2.1 TEMPERATURE ALARM SETTING

1. Press  /  /  /  key to select  for turning on alarm function; press  key to confirm.
2. Press  /  /  /  key to select  for turning off alarm function; press  key to confirm.

8.2.2 SET TEMPERATURE HI/LO ALERT LIMITS

1. Press  /  to select  (red) or  (green) for Hi/Lo limits settings.
2. Press  /  keys to adjust the Hi limit when  (red) is selected.
3. Press  /  keys to adjust the Lo limit when  (green) is selected.

Note: The high temperature alarm default setting is 36 °C, and the low temperature alarm default setting is 8 °C. When the temperature goes above or below the settings, the temperature icon  will display on the screen. It will alert user by beeps. Press any key on the parent unit to stop beeping and flashing.

8.3 LULLABY SETTING

You can soothe the baby to sleep by playing a gentle lullaby from the Camera unit.

1. Press the MENU  key then the menu will pop up.
2. Press the  /  /  /  key until the lullaby icon  is selected.
3. Press  key enter into sub-menu.
4. Press the  /  /  /  key to select one of the 8 available lullabies, and you can pick single playback, loop (all 8 lullabies) playback  or stop .
4. Press  key to confirm.

Note: The lullaby default setting is OFF.

8.4 ALARM SETTING

1. Press MENU  Key, the main menu will pop up.
2. Press the  /  /  /  key until the alarm icon  is selected.
5. Press  key enter into sub-menu, Press the  /  /  /  key to selected the alarm time you need.
6. Press  key to confirm.
7. Press  key to exit.

Note 1: The minimum unit is 0.5 hour. The maximum setting is 5 hours (7 levels).

Note 2: Once the alarm is turned on, alarm icon  will display on the screen.

Note 3: The alarm default setting is OFF.

Note 4: When the alarm is ringing, press any key on the parent unit to turn the alarm off.

Note 5: If you don't turn off the alarm, the alarm will ring for 1 minute. After three minutes the alarm will ring again for 1 minute. The alarm will ring for 3 times in total, after this the alarm goes off.

8.5 ENERGY SAVING

This mode allows you to control the sound activation of your baby unit. If there is no sound around the baby unit within 30 seconds, it will stop audio transmission and turn off the screen of the parent unit. When the baby unit detects any sounds louder than the sensitivity level, it will start transmitting the signal to the parent unit again and turn on the screen of the parent unit. To change the ECO level, please follow the below instructions.

1. Press the MENU  key then the menu will pop up.
2. Press the  /  /  /  key until the ECO icon  is selected.
3. Press  key enter into sub-menu, then press  /  key to select desired level.
4. Press  key to confirm.
5. Press  key to exit.

Note:  is Low sensitivity level; the baby have to make a lot of sound before the ECO function is activated.

Note:  is Middle sensitivity level.

Note:  is High sensitivity level; the baby don't have to make a lot of sound before the ECO function is activated.

8.6 LANGUAGE SETTING

1. Press the MENU  key then the menu will pop up.
2. Press the  /  /  /  key until the language icon  is selected.
3. Press  key enter into sub-menu, then press  /  /  /  key to select the language

- you need.
4. Press  key to confirm.
5. Press  key to exit.

9. TECHNICAL DATA

Frequency	2412MHz~2469MHz
Power Adapter	Parent Unit: Input: 100-240VAC 50/60Hz Output: 5V DC 1A Camera Unit: Input: 100-240VAC 50/60Hz Output: 5V DC 1A
Operating Range	Up to 1000ft (300m) outdoor (line of sight) Up to 165ft (50m) indoor
Display	5.0" Diagonal TFT LCD
Battery (Parent Unit)	Li-ion 3.7V 3500mAh (12.95Wh)
Battery Life	Up to 16 hours
Maximum power	<19dBm
Operation environment	Operation Temperature: +32F~+104F (0°C~40°C) Battery Charging Temperature: +50F~+104F (10°C~40°C) Relative Humidity : 15%-85%

10. TROUBLE SHOOTING

No Reception on The Monitor	* The power adapters may not be properly connected. * Confirm that the camera and monitor are ON. * Camera may be far away from the monitor. * Camera and monitor may not be properly paired; follow PAIRING instructions.
Interference or Poor Reception	* Move the monitor close to the camera. * The camera or monitor may be placed too close to many metal objects. * Other electronic devices may be interfering with the signal. * The battery power may be too low.
Audio Feedback (high pitched noise)	* The camera and monitor may be placed too closed. * The volume on the monitor may be set too high.
Frozen Picture on Screen	* Repower the baby unit (plug out the adapter, then plug it into the socket again). * Press the RESET key at the back of parent unit.

11. MAINTENANCE

- * Clean your baby monitor with a slightly damp or anti-static cloth.
- * Never use cleaning agents or solvents.

12. DISPOSAL GUIDE FOR BATTERY AND PRODUCT

- * Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit.
- * Remember to dispose of the product in an environmentally responsible way.
- * For proper collection and processing of these products, take them to the collection points designated by local authorities. You can also contact the store where you purchased the product.

Improper or incorrect use of batteries may cause corrosion or battery leakage, which could cause personal injury or damage to property. Use only the types of the batteries which are indicated in this manual.
CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 45 degree C or Incinerate. Follow Manufacturer's Instructions.

- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- The battery shall not be exposed to excessive heat such as sunshine, fire or the like.

FCC & ISDE Statement