7" Smart HD Pan & Tilt Video Monitor With Remote Access













Congratulations on purchasing your new VTech product.

Before using this HD video monitor, please read Important safety instructions For support, shopping, and everything new at VTech, visit our website at www.vtechphones.com. In Canada, visit www.vtechcanada.com.

/hat does this Video Monitor do?

VTech 7" Smart HD Pan & Tilt Video Monitor With Remote Access allows you to stay close to your baby when you are on the move or away

This monitor uses two connection methods to enhance your live video and audio streaming experience: a secure FHSS link for direct connection with the parent unit, and secure Wi-Fi for easy app monitoring on your mobile or tablet. Stay effortlessly connected to your baby at all times with these optimised connections

VTech 7" Smart HD Pan & Tilt Video Monitor With Remote Access uses MyVTech Baby Plus app to let you instantly see and hear what's happening with your baby from anywhere in the world. Download the app at the App Store or the Google PlayTM Store, directly from your smartphone or mobile tablet.

The full HD (1080p) resolution is visible in the app only.

IMPORTANT SAFETY INSTRUCTIONS

Do not use this product near water, for example, near to a

CAUTION: Use only the battery provided (if applicable). There

may be a risk of explosion if a wrong type of battery is used

during use, storage or transportation. Disposal of battery in

high temperature surrounding environment can result in an

xplosion or the leakage of flammable liquid of gas. Batter ubjected to extremely low air pressure may result in an

Use only the power adaptors included with this product. Incorrect power adaptor polarity or voltage can seriously damage the product.

explosion or the leakage of flammable liquid or gas. Dispose

d battery according to the information in **The RBRC seal**.

for the parent unit. The battery cannot be subjected to high o

fire or a hot oven, mechanically crushing or cutting the battery can result in an explosion. Leaving the battery in an extremely

ow extreme temperature and low air pressure at high altitude

bath, sink, swimming pool or shower.

Power adaptor informati

Rechargeable battery information: 3.7V 5000mAh, 18.5Wh Lithium-ion battery

The power adaptor is intended to be correctly oriented in a

should be installed near the equipment and should be easily

Do not use liquid or aerosol cleaners. Use a damp cloth fo

11. Unplug this product from the wall outlet before cleaning

12. Do not modify the power adaptors or replace with other

13. Do not allow anything to rest on the power cords. Do not

nstall this product where the cords may be walked on o

14. This product should be operated only from the type of pov

15. Do not overload wall outlets or use an extension cord.

source indicated on the marking label. If you are not sure of

16. Do not place this product on an unstable table, shelf, stand or

This product should not be placed in any area where prope

the type of power supply in your home, consult your dealer or

ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect

them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa

or rug. This product should never be placed near or over a

because they may touch dangerous voltage points or create a

adaptors, as this causes a hazardous situation.

Zhuhai Great Power Energy Co., Ltd. Model: GSP806090-5Ah-3.7V-1S1P

Baby Unit Output: 5V DC 1.5A

VTech Telecommunications Ltd.

Parent Unit Output: 5V DC 2A

odel: VT07EUS05200

the-table or cabinet outlet.

Model: VT07EUS05150

used as such.

he applied nameplate is located at the bottom of the baby unit's base. short circuit. Never spill liquid of any kind on the product 19. To reduce the risk of electric shock, do not disassemble When using your equipment, basic safety precautions should this product, but take it to an authorized service facility. Disassembling or removing parts of the product other than via always be followed to reduce the risk of fire, electric shock and njury, including the following: the battery door (if applicable) may expose you to dangerous Follow all warnings and instructions marked on the product Adult setup is required

roltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used. CAUTION: Do not install the baby unit at a height above 6.5 feet (2 metres). You should test the sound reception every time you turn on

the units or move one of the components 4. This product is intended as an aid. It is not a substitute fo eriodically examine all components for damage responsible and proper adult supervision and should not be This product is not intended for use as a medical monitor.

There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordles: telephones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby nonitor periodically by powering off and then powering

on the units, and power off the baby monitor if you are not hildren should be supervised to ensure that they do not play

24. The small parts of this monitor can be swallowed by babies or small children. Keep these parts out of reach of children. e product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilitie or lack of experience and knowledge, unless they have appliance by a person responsible for their safety.

SAVE THESE INSTRUCTIONS

Use and store the product at a temperature between 32°F (0°C) and 104°F (40°C) Mishandling batteries can cause burn, fire or explosion

Batteries should not be exposed to excessive heat such as Do not expose the product to extreme cold, heat or direct

nlight. Do not put the product close to a heating source. warning—Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of this cord on the cord of the

Do not remove warning label on the adaptor vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-Never place the camera unit(s) inside the baby's cot or laypen. Never cover the camera unit(s) or parent unit with For pluggable equipment, the socket-outlet (power adaptor)

nything such as a towel or a blanket. Other electronic products may cause interference with you amera unit. Try installing your camera unit as far away from hese electronic devices as possible: wireless routers, radios cellular telephones, intercoms, room monitors, televisions onal computers, kitchen appliances and cordless

Precautions for users of implanted cardiac pacemakers Cardiac pacemakers (applies only to digital cordless devices Wireless Technology Research, LLC (WTR), an independent ch entity, led a multidisciplinary evaluation of the ce between portable wireless devices and implant cardiac pacemakers. Supported by the U.S. Food and Drug

Pacemaker patients Should keep wireless devices at least six inches from the

Electromagnetic fields (EMF)

Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON WTR's evaluation did not identify any risk to bystanders with

This VTech product complies with all standards regarding 18. Never push objects of any kind into this product through the slots to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

pacemakers from other persons using wireless devices.

Your video monitor package contains the following items. Save your sales receipt and original packaging in the event warranty service is necessary. _____. Quick start guide

For mobile access:

MyVTech Baby Plus mobile app

WHAT'S IN THE BOX

y reem baby rias mobile app	
etwork	Wi-Fi


Wi-Fi router 2.4GHz 802.11 b/g/n 1.5 Mbps @ 720p or 2.5 Mbps @1080p upload Internet connection bandwidth per baby unit



Baby unit overview Light sensor 2 Camera lens







streaming. baby unit. In App Connect Mode: • Flashes when the link to the baby unit • Green is steadily on when the baby unit is

connected to Wi-Fi. **IIII** LED light

 Green flashes slowly during video streaming to Wi-Fi.

ON/OFF switch

9 Temperature sensor


10 Wall mount slots

• To enter pairing mode, press and hold the PAIR key for three seconds until you hear a beep sound. Then follow the app instructions to connect the camera to a 2.4GHz Wi-Fi network.

To reset the baby unit, press and hold the **PAIR** key until you hear a beep sound. Release the **PAIR** key, and then press it again five times until you hear another beep sound. The baby unit wil emit another beep when the reset is complete. After that, the baby unit will

Parent unit overview

LINK LED light



On when the parent unit is connected to

AC power, and the battery is charging.

Flashes when the parent unit battery is

low and needs charging.

3- level sound indicator light

detected from the baby unit.

sound level.

sound level.

TALK / 🗢

⊕ Zoom

Green light: low sound level.

Green and amber lights: moderate

Green, amber, and red lights: high

• Press and hold to talk through the baby

• Press to zoom in/out to different levels.

unit when ___ displays on screen.

• While in a sub-menu, press to exit.

• On when the parent unit is linked to the

<. **A.** > or **V**

 Press to move the baby unit camera leftward, rightward , upward or


MENU/SELECT

- While in a menu, press to choose an The lights indicate different sound levels
 - VOL/ VOL +
 - Increase, decrease or mute the parent

Press and hold to turn on/off the power.

11 Power jack

Antenna

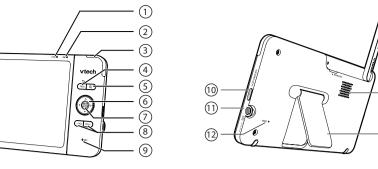

Arrow keys

· Press to navigate leftward, upward, rightward or downward, within the main menu and submenus.

downward.

- · Press to enter the main menu.
- item, or save a setting.
- unit volume.

You may experience reduced signal

baby unit are far apart, or there are

obstructing factors, such as internal

strength if your parent unit and

walls, between them. Move the

parent unit closer to the baby unit to

improve the signal strength. Ensure

the parent unit antenna is raised for

FHSS link

optimum reception

Microphone

10 POWER / LCD ON/OFF

Press to turn on/off the LCD screen.

12 RESET

Force reboot the parent unit.

14 Speaker

15 Stand

Go to Menu and select Camera Sharing.

with the app.

■ Note

Minimum requirement

iOS 14 or later.

Make sure your mobile device meets the

The mobile app is compatible with:

and **Location Service** on your device.

6. Input the Wi-Fi password.

sound to enter pairing mode.

go to Somet to Mobile App.

Once connected, it will display a live view preview.

camera. Repeat steps 7-9 for the second camera.)

Android[™] 9.0 or later; and

minimum requirement for the mobile app

2. Choose "Invite People" and enter the name and email address of the family member's app

3. The family member will receive a pop-up notification in the app and can accept the

Use **Camera Sharing** to instantly share access to the camera. Follow these steps:

CONNECT, CHARGE AND POWER ON THE BABY MONITOR

Connect the baby monitor

The rechargeable battery in the parent unit is built-in.


Use only the power adapters supplied with this product.

Make sure the parent unit and the baby unit are not connected to an electronically/timer controlled electric

Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children

Connect the power adapters in a vertical or floor mount position only. The adapter prongs are not designed to

hold the weight of the parent unit and the baby unit, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.

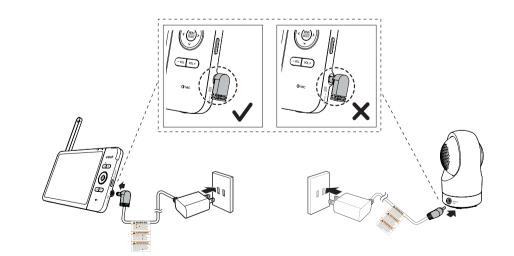



Slide the **ON** switch to power on or off your baby unit.

■ Notes

app (Setting > Camera Setting > LED status). When powering up, the baby unit's orange status LED turns on.

A steady orange light with no video or audio streaming can indicate a fault condition




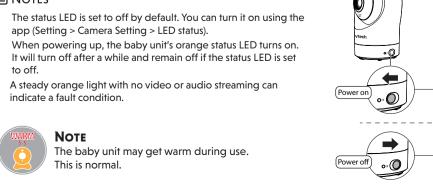

monitor your baby, keep the parent unit connected to AC power. When the parent unit is used on the internal batteries, the operating time will vary according to the initial state of charge and the

battery LED llight flashes during charging. When the parent unit battery is fully charged, the battery LED light and the battery icon segments are solid [IIII].

screen appears. You can press and hold POWER to turn the parent unit on or off.

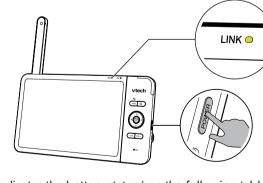

The battery icon indicates the battery status (see the following table)

The selection displays and i	ge without interruption (about
Charge and may be used for only a short time.	inutes).
The battery icon segments are solid . The battery is fully charged. To ke it to a	eep the battery charged, connect AC power when in use.


Charge the parent unit battery before use

The parent unit operates on an internal rechargeable battery or AC power. To continuously

diator or heat source.


• Before using the baby monitor for the first time, charge the parent unit battery for 12 hours. The red

The parent unit turns on automatically after connecting to the power socket, and the welcome

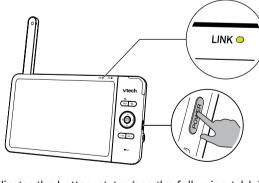

,	,	3 ,
Battery indicators	BATTERY STATUS	ACTION
The screen displays 🛄 and	The battery has very little charge and may be used for only a short time.	Charge without interruption (about 30 minutes).
The battery icon segments are solid	The battery is fully charged.	To keep the battery charged, connect it to AC power when in use.
		I

For optimum reception, raise the parent unit antenna.



■ PARENT UNIT ICONS

Main Sub-Menu menu Options Monitoring mode (For RM7764HDV2-2 only) View baby units in Single mode. View baby units in Patrol mode

View baby units in Split screen. Melodies and soothing sounds Play/Stop

Toggle between play and stop

(switch view every 10 seconds).

Select to play all melodies, or play one of the five melodies or five soothing sounds.

Camera Volume Adjusts baby unit speaker volume.

> Set the timer to stop playing after 15, 30 or 60 minutes, or play non-stop.

Connect to Mobile App Instructions for adding baby unit to the mobile app. **Camera Volume**

 Adjusts baby unit speaker volume. Screen Brightness Adjusts parent unit screen

brightness.

Screen Off Timer Turn the screen off timer OFF, or set the screen to turn off after 3

1 set for RM7764HDV2

2 sets for RM7764HDV2-2

 Select AUTO to set the Sound Sensitivity level for auto screen on when a sound is detected over the set level. The screen will turn off after

3 or 5 minutes when no sound is



Temperature Format Set the temperature display format between Celcius or Fahrenheit.

Main Sub-Menu menu Options

Adjust alerts volume level. Motion Detect Turn the motion detection alert on/

Adjust Motion Sensitivity level for

Temperature Turn the temperature alert on/off. Select the temperature alert

temperature limits.

maximum and minimum

Main Sub-Menu menu Option Low Battery Toggle the low battery alert on or

Toggle the lost link alert on or off. Help and info







icon(s) on the right. App Connect Mode

1 Direct Connect Mode

Status icons






Parent unit and baby unit are

 □ Parent unit is muted. 70° Temperature measured at baby unit. Battery level indicator

Direct Mode connected to each other directly. Signal strength is indicated by the signal The red bar(s) indicates no connection




Temperature alert is turned on.

Low battery indicator

Str TIP To receive product firmware updates, this baby monitor requires connecting to a 2.4GHz home Wi-Fi network.

HOW THE SYSTEM WORKS

Your baby monitor parent unit and baby unit connect to each other in Direct Mode by default, which allows you to immediately stream video out of the box

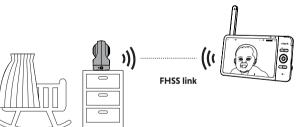

Wi-Fi Mode

To enhance your experience and enjoy seamless live video streaming via your mobile app, and to receive product software updates (when available), we highly recommend setting up your monitor's Wi-Fi connection.

to connect your video monitor. It

It uses your 2.4GHz home Wi-Fi network

supports live video streaming through the mobile app. To stream live video remotely with your mobile device, download and install the

MyVTech Baby Plus mobile app. With the mobile app, your Wi-Fi router (not included) provides Internet connectivity to your HD video monitor system. It serves as a communicating channel between your baby unit and mobile device, allowing you to monitor and/or control your baby unit wherever you are. For more details, see **Download app for mobile access** section in this quick start guide.



VTech cares about your privacy and peace of mind. That's why we've put together a list of industry-recommended best practices to help keep your wireless connection private and your devices protected when online. We recommend you carefully review and consider

complying with the following tips. Ensure your wireless connection is secure.

- Is at least 10 characters long.

 Before installing a device, ensure your router's wireless signal is encrypted by selecting the "WPA2-PSK with AES" setting in your router's wireless security menu.

Change default settings. Change your wireless router's default wireless network name (SSID) to something unique. • Change default passwords to unique, strong passwords. A strong password:

- Does not contain dictionary words or personal information.

Keep your devices up to date. • Download security patches from manufacturers as soon as they become available. This will ensure you always have the latest security updates.

• If the feature is available, enable automatic updates for future releases. Disable Universal Plug and Play (UPnP) on your router.

A virus or other malware program could use this function to compromise security for the For more information on wireless connections and protecting your data, please review the

network devices to open inbound ports without any intervention or approval from you.

UPnP enabled on a router can limit the effectiveness of your firewall by allowing other

Contains a mix of uppercase letters, lowercase letters, special characters and numbers.

following resources from industry experts 1. Federal Communications Commission: Wireless Connections and Bluetooth Security Tips

<u>www.fcc.gov/consumers/guides/how-protect-yourself-online</u>.

2. U.S. Department of Homeland Security: Before You Connect a New Computer to the Internet -<u>www.us-cert.gov/ncas/tips/ST15-003</u>.

3. Federal Trade Commission: Using IP Cameras Safely – https://www.consumer.ftc.gov/articles/0382-using-ip-cameras-safely.

4. Wi-Fi Alliance: Discover Wi-Fi Security -

http://www.wi-fi.org/discover-wi-fi/security.

DOWNLOAD APP FOR MOBILE ACCESS

Use the MyVTech Baby Plus on your mobile device to monitor your baby

or search "MyVTech Baby Plus" on App Store or Google Play Store. If you

have previously installed the app, ensure that you have the latest version.

2. Tap 💽 to launch the mobile app on your device and create an account

3. We recommend that you use common webmail services, such as Google Gmail, to

register your user account. Check your email (including the Spam folder) and activate

4. Ensure that you are connected to a 2.4GHz Wi-Fi network and have enabled Bluetooth

5. After signing in to the app, select **Camera(s) with Parent unit** and scan the QR code

7. Press and hold the pair key on the baby unit for 3 seconds until you hear the beep

8. Select the camera model that appears in the app and wait for the camera to connect.

2. Select "Continue" and create a profile for your baby (Optional). Now you can start

monitoring! (For models with 2 cameras, a pop-up will ask if you wish connect another

your new account by entering the email verification code. Then, sign in to your account.

displayed on the parent unit. To find the QR code, press the MENU/SELECT button and





