

Monster Airmars XKT30

True Wireless Bluetooth headphone instruction manual


Product parameters

Bluetooth version	V5.4
Transmission distance	> 10m
Driver diameter	φ13.6mm
Driver impedance	20Ω
Sensitivity	120 ± 3dB
Frequency response	20Hz-20kHz
Battery capacity (charging case)	300mAh 3.7V
Battery capacity (headphone)	30mAh 3.7V
Charging time (headphone)	≈ 1.5 hours
Music playtime (headphone)	≈ 4 hours
Music playtime with charging case	≈ 16 hours

Packing list


	Headphones *2		charging case *1
	Instructions Manual *1		Type-C charging cable *1

Product Schematic Description

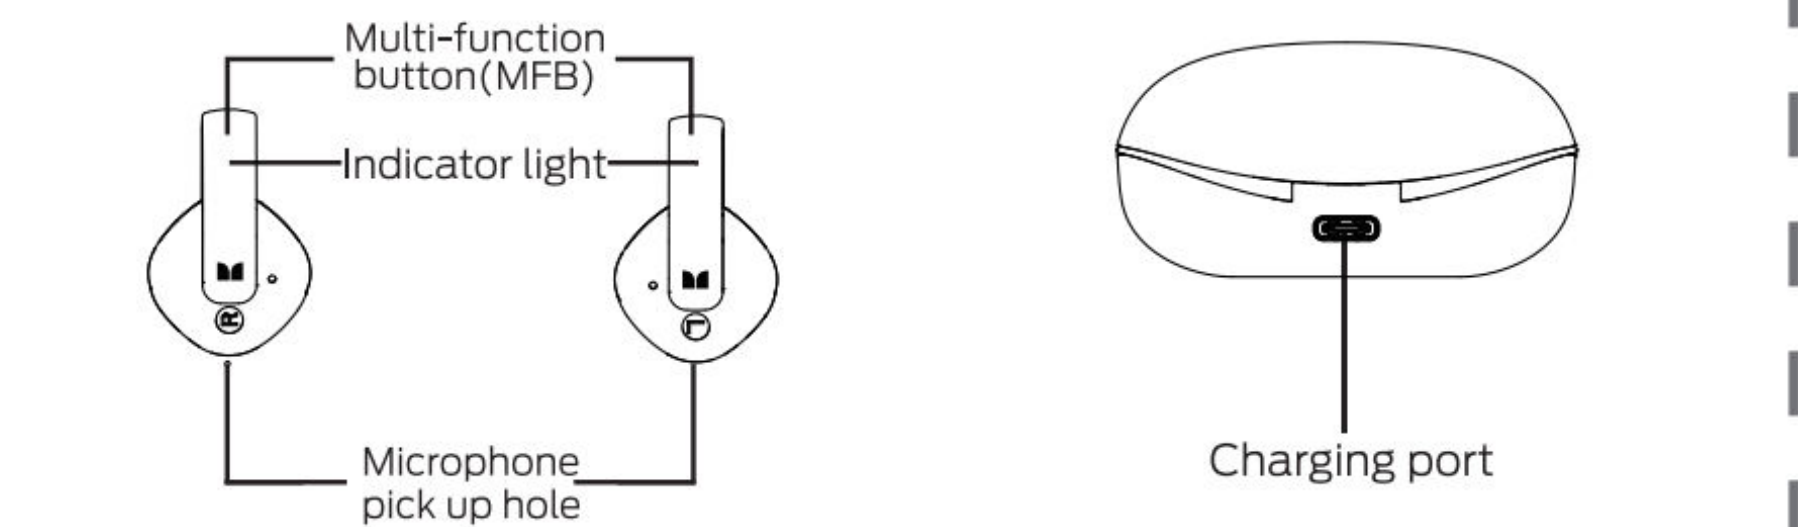

Charge the charging case

Connect the charging case to the 5V power adapter with Type-C charging cable.

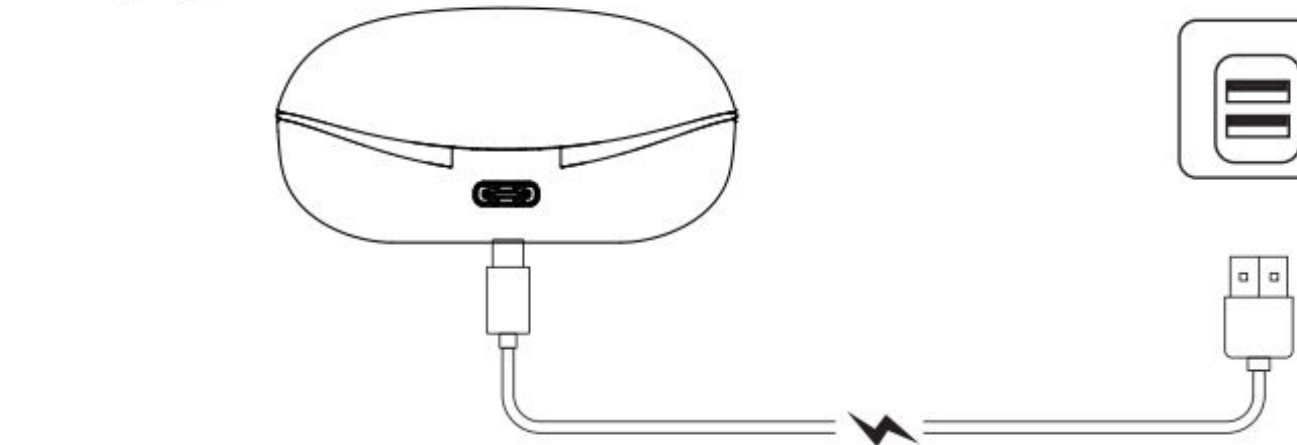

Rated input: 5V = 30mA (Headphone) Rated input: 5V = 300mA (charging case)

Tips: Close the charging box. When the ice blue light flashes, please charge the charging box in time.

Indicator guide


Mode	Description	Voice prompt
Power on	The ice blue indicator on the headset is on for 1 second	"Power on"
Power off	The ice blue light flashes three times	"Power off"
Pairing	Headphone ice blue light breathing flicker sub ear Light off	"Pairing"
Connected	Headphone light off	"Connected"
Disconnected	Headphone ice blue light breathing flicker sub ear Light off	"Disconnected"
Low Battery	Blink the ice blue light slowly every 3 seconds	"Battery Low"
Headphones placed in charging case	The ice blue indicator of the headset is steady on and full of indicators Extinguish	—
Charging case low power	The ice blue indicator of the charging case blinks	—
Charging case charged	The red indicator of the charging box blinks slowly	—
Charging case fully charged	The ice blue light of the charging case is off	—
Open the charging box cover	The ice blue light of the charging case is on for 8 seconds and then goes off	—
Close the cover of the charging case	The ice blue indicator of the charging case is steady on	—

Product operating instructions

- Power on
Method 1: Open the cover of the charging box, the headphones will turn on automatically.
Method 2: Long press MFB for 3 seconds.
- Power off
Method 1: Put the earphone back in the charging case close the cover and turn off the earphone.
Method 2: After disconnected from the bluetooth device for 3 minutes.

- Pairing
Method 1: Open the cover of the charging box, the headphones will start pairing automatically.
Method 2: Search and click for "Monster Airmars XKT30" on the bluetooth list of the smart device, and when connection is successful, "Connected" will be heard.

* If the distance is exceeded, return to the effective distance within 3 minutes after disconnection, and automatically connect the device.

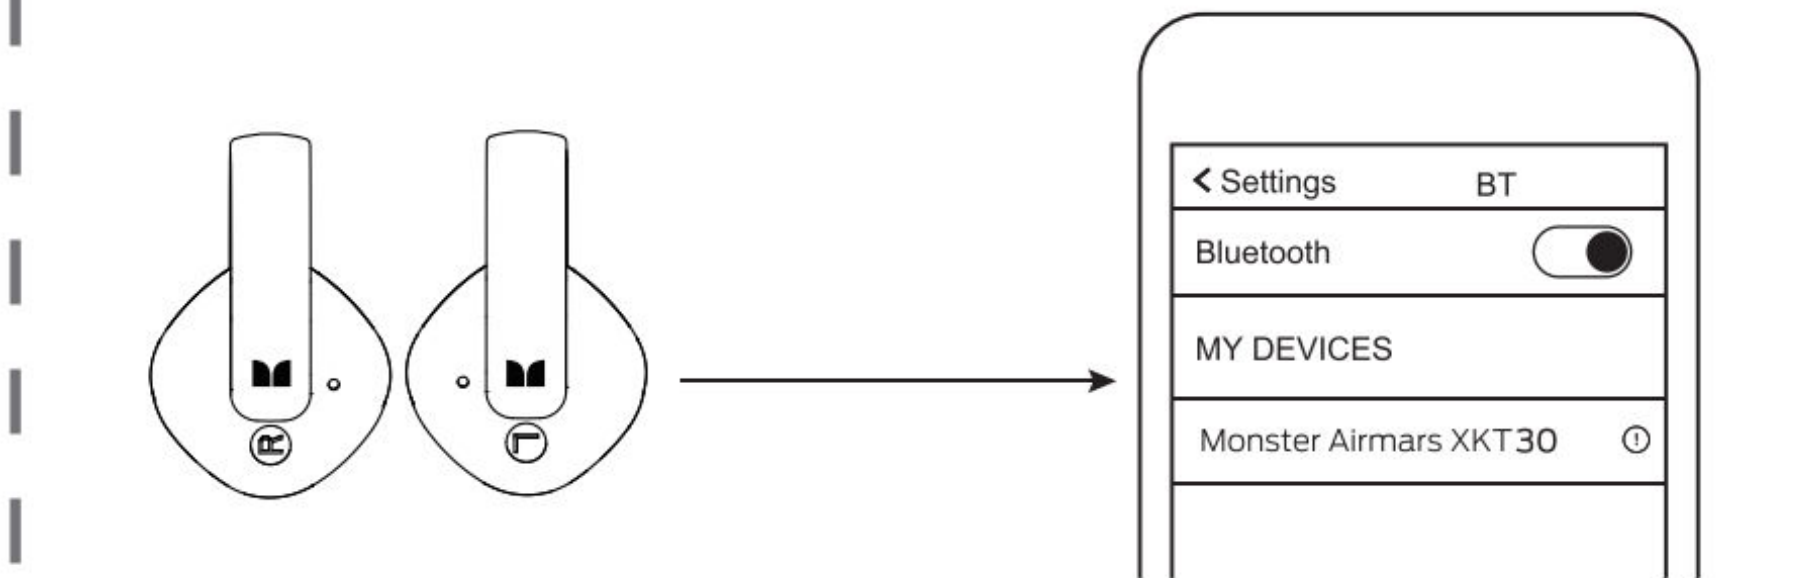


Note:


* If the product is not suitable for a long time, it should be fully charged and ensure that the device is in a shutdown state.

* After charging, please pull out the charging cable to avoid equipment damage caused by long-time charging.



Earphone wearing guide

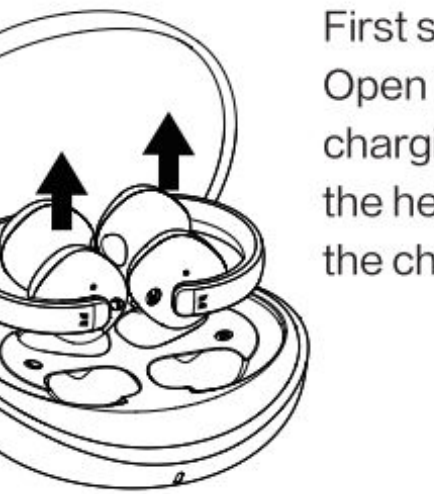

First step
Open the cover of the charging case and remove the headphones from the charging case

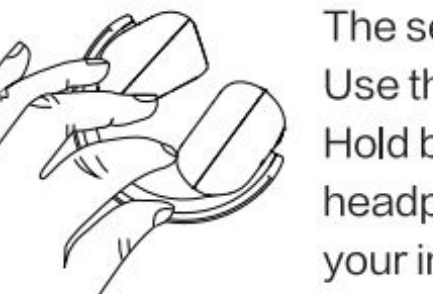

The second step
Use the icon. Thumb Hold both sides of the headphones stick with your index finger. Use your middle finger to push the front and back headphones. The cover section remains in this state

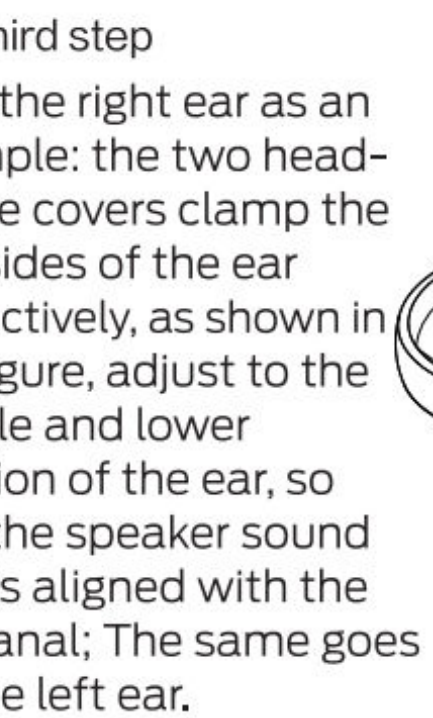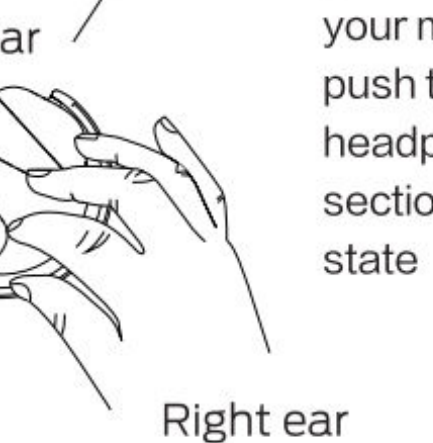

The third step
Take the right ear as an example: the two headphones covers clamp the two sides of the ear respectively, as shown in the figure, adjust to the middle and lower position of the ear, so that the speaker sound hole is aligned with the ear canal. The same goes for the left ear.

Step four
Keep your headphones in your left and right ears. Enjoy the music now.

Touch key operation

Normal

- Voice assistant: Press the left MFB for 2 seconds
- Volume +: Click right MFB
- Volume -: Click left MFB

Music mode

- Pause/Play: Double click Left/Right MFB
- Last song: Triple click left MFB
- Next song: Triple click right MFB

Phone

- Answer: Double click the left/right MFB
- Hang up: Double click the left/right MFB
- Reject: Press left/right MFB for 2 seconds

Game mode/Music mode switch: Device connected

- Press right MFB for 2 seconds to enter Game mode
- Press right MFB for 2 seconds to enter Music mode

Restore factory settings

If the headset is not paired with the Bluetooth device after the headset is turned on, the left/right headset is paired successfully. After clicking the left/right headset for 5 times, the left/right ear is turned off (all information about pairing and connection is cleared).

Precautions

- Open the charging box cover, and the headphones will automatically turn on, connect, or pair; Close the charging box cover and automatically turn off the headphones for charging.
- Charging every 15 days will extend battery life when not in use often. Cleaning off dirt on the charging contacts by cotton swabs with alcohol will maintain a good contact for charging.
- Keep battery (battery pack) away from inflammables or excessive heat such as direct sunlight.
- Due to the wireless connection mode of this product, in the daily use process, influenced by the environment, mobile phone brand, usage behavior and other factors, it is normal that there may be a brief and slight sound delay in the process of playing music.

Warnings

- Do not use headphones at high volume for an extended period of time.
- Keep the headphones away from dust and water.
- Do not disassemble the headphones and accessories, otherwise warranty will be voided.
- Keep headphones away from any impact or vibration.
- Do not use any chemical solvents or cleaning agent on the headphones.

Name of the Parts	Hazardous substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Housing	○	○	○	○	○	○
Loudspeakers	○	○	○	○	○	○
PCBA	X	○	○	○	○	○
Accessories	X	○	○	○	○	○

This table is compiled according to SJ/T 11364.

○: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.

X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

FCC ID: 2A8PV-QSMXKT30

10 Environment Friendly Use Period (EFUP)

The period of use of this symbol (10 years) is the period during which harmful substances in electronic and electrical products will not leak or mutate under normal use conditions, and users of electronic products will not cause serious pollution to the environment or serious damage to their personal and property when using this electronic product.

Warranty service

Dear user, this warranty card is the proof of your future warranty application with the seller to fill it out and keep it for future use!

User information

User name		Email	
Contact number		Postal code	
Mailing address			

Product information

Product name		Product number	
Product barcode/Serial number/Batch number			

Vendor information

Name			
Address			
Contact number		Postal code	
Sales date		Invoice number	
Remark			

