




VITURE One Neckband/V1218

Specifications

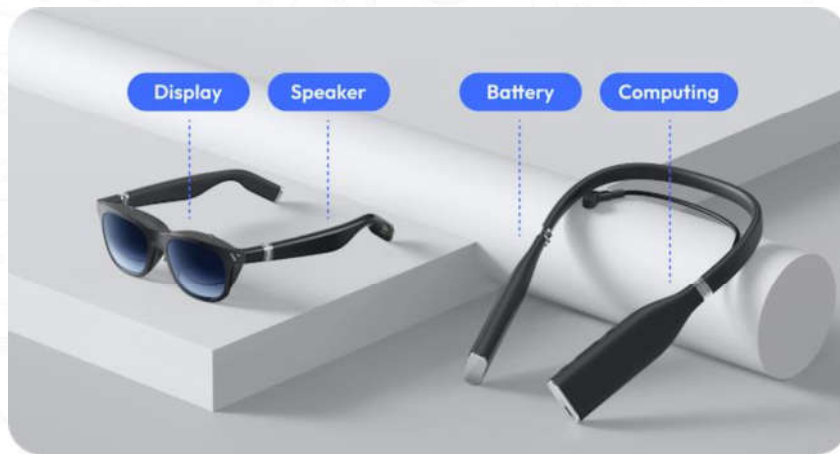

Amlogic S905Y4



2GB LPDDR4



eMMC 128GB Flash



4K



Bluetooth 5.0



HDMI 2.1




Wi-Fi 5



Specifications




Hardware Platform	
CPU Chipset	Amlogic S905Y4
DIMPS	16.5k DMIPS
GPU	ARM Mali-G31 MP2
RAM	2GB LPDDR4
Flash	eMMC 128GB
Network	
Wi-Fi	802.11 b/g/n/ac 2.4G/5G Wi-Fi 5
Ethernet	/
Bluetooth	Bluetooth 5.0

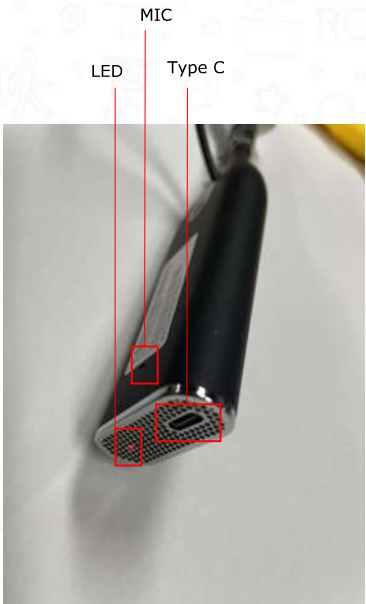

Specifications



DRM	
Widevine Level	Support, Level 1
PlayReady	Support, SL3000
Verimatrix Ultra CAS	
Audio	
Audio Decoding	Supports MP3, AAC, WMA, RM, FLAC, Ogg and programmable with 7.1/5.1 down-mixing
Audio Mode	Mono/Stereo/Left/Right
Dolby Digital Plus	Support

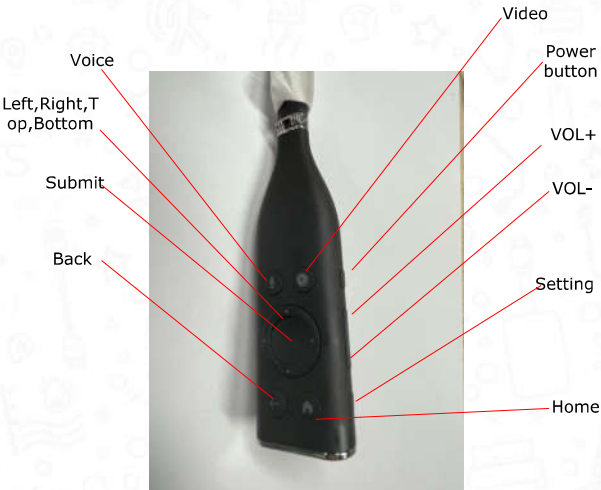

Specifications



Video	
Video Decoding	AV1 MP-10@L5.1 up to 4Kx2K@60fps VP9 Profile-2 up to 4Kx2K@60fps H.265 HEVC MP-10@L5.1 up to 4Kx2K@60fps AVS2-P2 Profile up to 4Kx2K@60fps H.264 AVC HP@L5.1 up to 4Kx2K@30fps MPEG-4 ASP@L5 up to 1080P@60fps (ISO-14496) WMV/VC-1 SP/MP/AP up to 1080P@60fps AVS-P16(AVS+) /AVS-P2 JiZhun Profile up to 1080P@60fps MPEG-2 MP/HL up to 1080P@60fps (ISO-13818) MPEG-1 MP/HL up to 1080P@60fps (ISO-11172) RealVideo 8/9/10 up to 1080P@60fps
Video File Format	Supports *.mkv,*.wmv,*.mpg, *.mpeg, *.dat, *.avi, *.mov, *.iso, *.mp4, *.rm and *.jpg file formats
Video Resolution	480i/p, 576i/p, 720p, 1080i/p and 4Kx2K
Dolby Vision	Support(optional)
Video Output	HDMI 2.1, HDCP2.2

Connect to 3D Glass



Specifications




Interface	
LED indicator light	Support
IR Control	NO
USB Port	Type C
DP Output	Support (To 3D glass)
User Button	Support

Specifications



3D glass	
Resolution	1080P/4K
Mode	2D/3D
Focus adjustment	Support
Dimming	Support

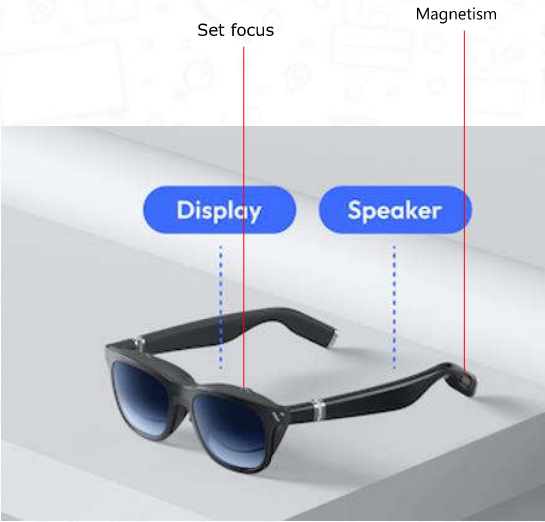

Specifications



Mechanical	
Dimension (W*D*H mm)	220*160*17 mm
Weight	< 1kg
Cover Color	Black/Blue/White

Specifications



Packing	
Type	Paper card packaging
Outline Size	Customization
Gift Box	Customization
Environment	
Operating Temperature	0°C - 40°C
Storage Temperature	-20°C - 70°C
Humidity	<95%



FCC statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a

Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement in portable exposure condition without restriction.

ISED statement

English:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes : (1) Cet appareil ne doit pas provoquer d'interférences. (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance. cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 0mm between the radiator & your body. L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.

The device is restricted for indoor use only when operating in the 5150-5250MHz frequency range in Canada

L'appareil est limité à une utilisation à l'intérieur seulement lorsqu'il fonctionne dans la gamme de fréquences 5150-5250MHz au Canada