


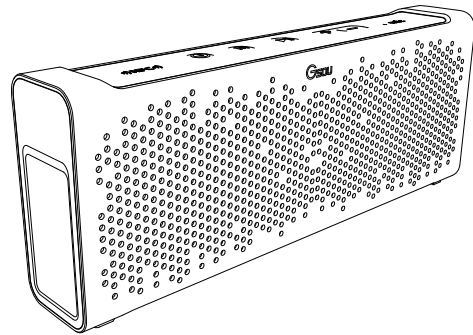


U221 User Manual

1. Preface


Thank you for purchasing the **Gsou U221** portable stereo Bluetooth® speaker. Please take the time to follow the instructions in this user manual carefully. If you have any questions , please call our national service hotline: 400-0985-400

2. Warnings and Cautions


1. To reduce the risk of fire or electric shock, be sure the electrical circuits are not overloaded.
2. To reduce the risk of electronic shock, be sure not plug the adapter with wet hands.
- 3.Unplug the power cable if your device is smoking or abnormal and seek professional help from your nearest service center, be sure not detach the device yourself.
- 4.To reduce the risk of fire or electric shock, do not expose this product to rain or moisture. Liquids can cause a failure and/or a fire hazard.
5. In order to prevent a short circuit , the power cable and audio cable should not be twisted or dragged in case of short circuit.
- 6.Do not place the speaker near any open flame sources, such as lighted candles.
7. The safety temperature of Lithium Battery should not exceed 80°C

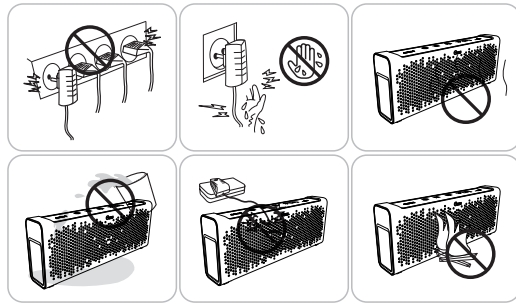

3. Standard Accessories

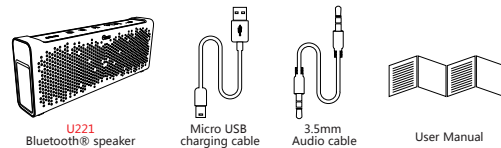

4. Structure Introduction

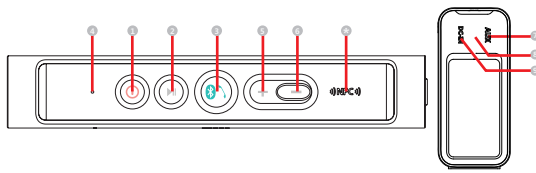

- ① Power on / Off: Red light flashes means your speaker needs to be charged , Red indicator is on when charging , and off when fully charged .
- ② Play / Pause button
- ③ Bluetooth status indicator , Answer/reject call
 - 1.Blue indicator flashes : Indicates that device is waiting for a connection
 - 2.blue indicator remains steadily on : Indicates that device is connected to an Aux in devices
 3. Short press the hand free key to answer an incoming call and short press it again to hang up
- ④ Mic
- ⑤ Previous / next track , Volume Up / down : short press is for next track , long press is for increasing volume
- ⑥ Previous / next track , Volume Up / down : short press is for previous track , long press is for decreasing volume
- ⑦ AUX in Jack : Connect the **U221** with your PC, MP3/mp4 player, Tablet, Mobile and other playback devices with 3.5mm jack by audio cable and **U221** will disconnect the Bluetooth® automatically
- ⑧ Reset Button : If the speaker is unresponsive, use 1.0mm pin or probe to press reset button .
- ⑨ DC IN

5. Structure Introduction

- | | |
|------------------------------------|--|
| Blue indicator flashes | status of waiting for connecting |
| Blue indicator remains steadily on | connected to Bluetooth® source or connected to aux in devices |
| Low power indicator flashes | battery voltage lower than 3.3V , Red light flashes means your speaker needs to be charged |
| Red charging indicator light | Red indicator is on when charging , and off when fully charged . |

6. Operation steps

1. How to connect your **U221** with Bluetooth-enabled playback devices?

- ① Be sure your speaker battery has sufficient power.
- ②Turn on your speaker and it will be in Bluetooth mode automatically and ready for connecting. The blue indicator flashes
- ③Open the Bluetooth® on your mobile, search the “**Gsou U221**” device and connect to it. No password is needed for most of Bluetooth playback devices, but due to varying Bluetooth versions, sometimes, you need to

input the default password “0000” (four zero) if required.

- ④ Blue light remains steadily on to indicate successfully connected.

⑤Run the music player of your mobile, and enjoy the loud but clear sound from your **U221**.

⑥You need to disconnect the previous pairing Bluetooth® device , then other mobiles can be available

2. How to connect the **U221** with your notebook PC by Bluetooth®? (1) connecting to a Bluetooth® enabled notebook.

①Start your notebook, and search for the Bluetooth® device by “Start—Setting—Control Panel” .

②Start the Bluetooth® searching function of your notebook, blue light flashes when searching the Audio-in devices.

③Blue indicator light remains steadily on after connecting successfully.

(2) Connecting to a notebook without Bluetooth® function.

Please buy a Bluetooth® adaptor separately. We suggest an adaptor with Bluetooth version 4.0 for the high quality audio experience. After installing please start the Bluetooth® from the “Control Panel” or the shortcut on your pc desktop, please search for connecting, and the instruction steps are the same as the first case.

3. How to play music via AUX-in?

- ①Make sure your speaker power on
- ②Your **U221** comes with a standard 3.5mm Aux in jack for connecting with other non-Bluetooth audio devices, eg mobile phones, mp3/mp4 players. pc. tablet pc and etc.
- ③Your speaker will disconnect the Bluetooth®, switches to the external source play, as the external source of AUX-in mode is prior
- ④Have connected the AUX model before you use the speaker , needs switch to other play mode . Please short press M key , turn the present mode to the other you wanted .
- ⑤Long press the Volume Up / Down to operate your speaker

7. How to charge

Using a USB cable to connect to a computer or buy USB charger

Contact Us

Gsou Technology (Shenzhen)Co.,LTD
Add:14c, Block A, First World plaza, No.7002 West Hongli Road, Futian District, Shenzhen, China.
Tel: 0086-755-8326 6570 Fax:0086-755-8325 5400
E-mail: sales@gsou.cn
Website: www.gsoutech.com

8. Specifications

Bluetooth version	4.0
Bluetooth profiles	A2DP,AVRCP,HFP,SPB,BAS,DIS,FMP,HRP,HRS,HTP, HTS,IAS,LSS
Working distance	about 33 feet
Loudspeaker	ø45mm 4Ω / 5W
Frequency response	100HZ - 20KHZ
RMS	5W x 2CH
Sensitivity	80db
S/N ratio	≥ 60db
Distortion	≤0.4%
Battery	Built-in 1000mAH rechargeable lithium battery
Working voltage	3.7V-4.2V
Charging voltage	DC 5V /1A
Charging current	400-500mA
Size	L160*W60*H28 mm
Net Weight	276g

9. Trouble shooting and FAQ

1. Bluetooth Pairing and Connecting

- Pairing occurs when two Bluetooth® devices communicate with each other and establish a Connection .
- Connecting occurs when two Bluetooth ®devices are matched and ready to share data .
- The two devices can be shared under the connecting status , pairing speaker can not work .

2. Your mobile search the **Gsou U221**, but the speaker it’ s not playing

- Make sure your speaker is in the Bluetooth mode
- Remove the speaker from the other pairing device then pair the mobile and the speaker again
- Make sure you have connected the two devices

3. After Installing the USB Bluetooth adapter on the PC , the PC still can not connect with the speaker

- Make sure your Bluetooth adapter is functioning properly .
- On the PC , right-click on the Bluetooth icon and select the option to add a new connection or device , which will make the computer search for available Bluetooth devices .

- Make sure your use “Bluetooth AV audio” instead of “ Realtek HD audio output” on your PC
- Restart your PC and search for connections again
- Turn your Bluetooth speaker off and back on

4. Audio is intermittent after establishing a Bluetooth connection

- Make sure your music file is not of poor quality
- Please make sure there is no barrier between the two devices, e.g. Metal objects , walls and other obstacles .
- Move your Bluetooth device and /or **Gsou U221** speaker from any device that generates electromagnetic interference, such as another Bluetooth device, cordless phone, microwave oven or wireless router.

* Kindly Reminder

1. In order to save electricity and protect the environment, the loudspeaker supports Intelligent sleep mode when the power is on. If the speaker still has not connected automatically within 15 minutes , please restart your speaker .
2. Compatibility: This speaker is compatible with most major brands and models of Bluetooth mobile phones. However, there may be a few individual Bluetooth mobile phones with which it is not compatible. If you experience any compatibility issues with this speaker, please call our customer service hotline for help.

10. Limited Warranty

Your **Gsou U221** Bluetooth® speaker is covered by a limited warranty. It is backed by 1 year performance warranty against any manufacturing defects in material or workmanship from the date of original purchase. This warranty entitles the purchaser to get the product repaired or replaced under the following conditions:

- The warranty applies to the original purchaser, Proof of original purchase is required
- The warranty does not cover the damage caused by misuse, abuse or improper storage.
- In no event shall **Gsou** be responsible for any direct, incidental, consequential or other damages of any kind.

11. Statement

The **Gsou** trademark and logo are registered trademarks of **Gsou Technology (Shenzhen)Co.,Ltd**. All Rights Reserved. All other trademarks, logos or service marks are the property of their respective owners.

12. FCC Warnings ⚠

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However,there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,which can be determined by turning the equipment off and

on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit differentfrom that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF warning statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

