



## XL-SBCONRS

### ROCKER SWITCH CONTROLLER for XL-xx50 SERIES SOUNDBARS

#### APPLICATION GUIDE

Please read through this manual to familiarize yourself with your new Rocker Switch Controller. Should your PowerBass Xtreme Rocker Switch Controller ever require service, you will need to have the original dated receipt.

#### FEATURES

- Fits standard Rocker Switch Carling Style Opening
- XL-xx50 Series Sound Bar Wireless RF Controller
- Compatible with XL-650 / XL-850 / XL-1250 Soundbars
- Adjustments: Power, Track Forward/Backward, Volume Up/Down, Pause
- Connections: 12V Power, 12V Switched, Ground-Pairs to XL-xx50 Soundbars for Wireless RF Control


#### PAIRING to XL-xx50 SERIES SOUNDBARS

1. Power up your XL-SBCONRS and XL-xx50 Series Soundbar.
2. Push and HOLD the -TRACK FORWARD\_ button on the soundbar until the lights begin to blink.
3. Push ANY BUTTON on the XL-SBCONRS
4. The Soundbar lights will blink fast, then solid to confirm pairing is successful.

#### WIRING

The XL-SBCONRS is designed to snap into a standard Carling Style switch opening which is commonly used in the dashboard of many automobiles and off-road vehicles.

1. Connect the YELLOW POWER WIRE to battery or a constant power source.
2. Connect the BLACK GROUND WIRE to either a chassis ground or directly to the battery (on most off-road, marine, motorcycles and recreation vehicles the battery ground will be the best location to get your grounding point from).
4. Connect the RED POWER WIRE to an ignition or switched power source.



1. YELLOW WIRE - 12V Battery Lead
2. RED WIRE - 12V Ignition/Switched Lead
3. BLACK WIRE - Ground Lead

#### CONTROLLER LAYOUT AND OPERATION

**A. TRACK BACKWARDS BUTTON** - Press the track back button momentarily to skip back to the previous track.

**B. TRACK FORWARDS BUTTON** - Press the track forward button to skip forward to the next track.

**C. PLAY / PAUSE BUTTON** - Push button to play or pause music (Bluetooth Mode only)

**D. VOLUME DOWN BUTTON** - Push or hold this button to decrease volume

**E. VOLUME UP BUTTON** - Push or hold this button to increase volume

#### POWERBASS XTREME LIMITED WARRANTY POLICY

PowerBass USA, Inc. offers limited warranty on PowerBass products under normal use on the following terms: PowerBass Xtreme Accessories are to be free of defects in material and workmanship for a period of one (1) year.

This warranty applies only to PowerBass products sold to consumers by Authorized PowerBass Dealers in the United States of America. Products purchased by consumers from a PowerBass dealer in another country are covered only by that country's Distributor and not by PowerBass USA.

This warranty covers only the original purchaser of PowerBass product. In order to receive service, the purchaser must provide PowerBass with the receipt stating the consumer name, dealer, product and date of purchase.

Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at PowerBass's discretion and will not be liable for incidental or consequential damages. PowerBass will not warranty this product under the following situations:

- Speakers received with bent/cracked frames or significant water damage
- Abuse such as holes in the cone, surround or ripped spider
- Voice coil damage due to amplifier clipping or distortion
- Amplifiers received with apparent rust or corrosion
- Any evidence of liquid damage or exposure to excessive heat
- Attempted repairs or alterations of any nature
- Product that has not been installed according to this owners manual

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for PowerBass any other liability in connection with the sale of this product.

Please call (909) 923-3868 for PowerBass Customer Service. You must obtain an RA# (Return Authorization Number) to return any product to PowerBass. The RA number must be prominently marked on the outside of the shipping carton or the delivery will be refused. Please pack your return carefully; we are not responsible for items damaged in shipping. Return the defective product along with a copy of the original dated retail sales receipt, plus \$12.00 for handling and diagnostic evaluation to:

PowerBass USA, Inc.,  
Attn: Returns (RA# \_\_\_\_\_)  
2133 S. Green Privado, Ontario, CA 91761

Residents of HI, AK and US territories will be charged for return shipping. All inquiries regarding service and warranty should be sent to the above address.

Removed or altered serial numbers will void this warranty




**PowerBass Xtreme**  
A division of PowerBass USA, Inc.

2133 S. Green Privado, Ontario, CA 91761  
Tel. (909) 923-3868 – Fax (909) 923-8048  
[www.powerbassusa.com](http://www.powerbassusa.com)

This manual is the exclusive property of PowerBass USA, Inc. Any reproduction of this manual, or use other than its intentions is strictly prohibited without the express consent of PowerBass USA, Inc.  
©2023 PowerBass USA, Inc.

**POWERBASS XTREME XL-SBCONRS  
DIMENSIONS & CUTOUT**

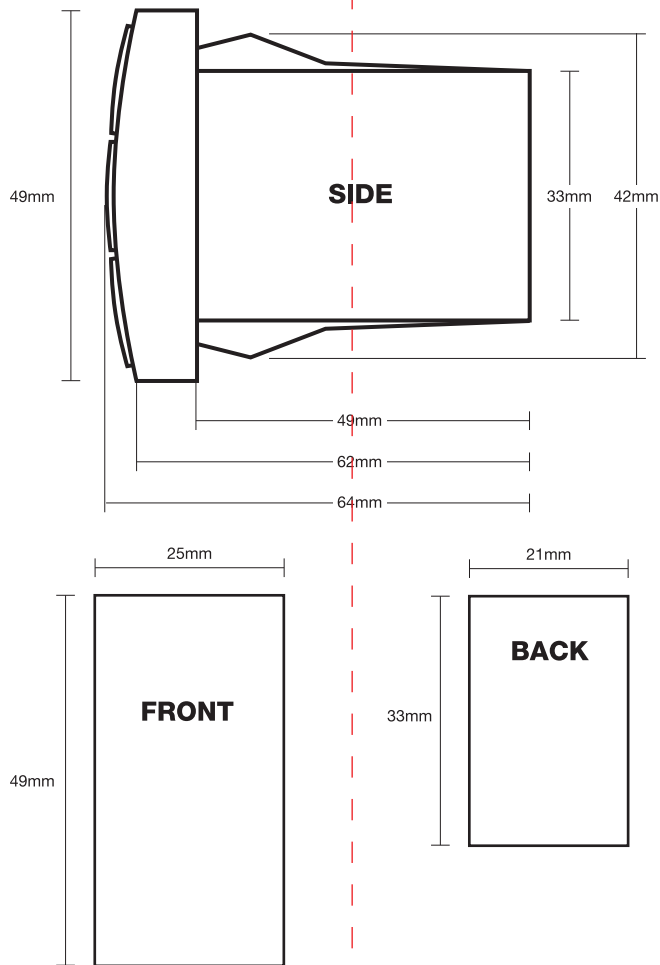

**FCC COMPLIANCE STATEMENT**

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this product not authorized by PowerBass USA could void the user's authority to operate the product.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

**CUTOUT**

37mm x 22mm  
0.830" x 1.45"