



7" High Definition Pan & Tilt Monitor



Need help?
Visit leapfrog.com/support

Parent Guide

This guide contains important information.
Please keep it for future reference.

Key Features

Color and B&W Automatic Night Vision

Thanks to the latest starlight sensor and noise suppression technology, you can check in on your baby 24/7 with the finest clarity. Night vision is no longer just black and white, you can choose to see your baby in color at night!

Night Light

Need some additional lighting near your baby for those bedtime stories? The built-in night light on the baby monitor can help with that. You can control the night light directly on the baby unit, or remotely from the parent unit.

Humidity and Temperature Sensor

Rest assured of the environment your baby is in with the built-in real-time temperature and humidity sensor. It lets you know when the room is outside a comfortable temperature range.

Motion and Sound Sensor

With adjustable alerts on noise or motion detected from the baby monitor, give yourself a peace of mind with an extra set of eyes.

360° Pan, Tilt, and Zoom

Watch as your curious little one moves around. The camera pans up to 360 degrees side-to-side and tilts as many as 52 degrees up and down. Need more detail? The camera zooms up to 8 times.

Lullabies and Soothing Sounds

Comforting and engaging your baby can be done easily and from a distance. Choose from 6 lullabies and 4 soothing sounds to help lull your baby back to sleep.

Technical Specifications

Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Baby unit: 2.406-2.475GHz
Channels	32
LCD	7" Color LCD (IPS 1200x800 pixels)
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Power requirements	Parent unit: 3.7V 5000mA Lithium-ion battery Baby unit power adapter: Output: 5V DC @ 1.5A Parent unit power adapter: Output: 5V DC @ 2A

Credits:
The Background Noise sound file was created by Caroline Ford, and is used under the Creative Commons license.
The Stream Noise sound file was created by Caroline Ford, and is used under the Creative Commons license.
The Crickets At Night sound file was created by Mike Koenig, and is used under the Creative Commons license.
The Heart Beat sound file was created by Zarabadeu, and is used under the Creative Commons license.

Leap Frog Enterprises, Inc. a subsidiary of Vtech Holdings Limited. TM and © 2021 Leap Frog Enterprises, Inc. All right reserved.

Read our complete warranty policy online at leapfrog.com/warranty.



Visit our website for more information about our products, downloads, resources and more.

Important Safety Instructions

The applied nameplate is located at the bottom of the baby unit's base. When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:


- Follow all warnings and instructions marked on the product.
- Adult setup is required.
- CAUTION:** Do not install the baby unit at a height above 2 meters.
- This product is not a substitute for adult supervision of the infant. Supervising the infant is the parent's or caregiver's responsibility. This product could cease operating, and therefore you should not assume it will continue working properly for any given period of time. Further, this is not a medical device and should not be used as such. This product is intended to assist you in supervising your baby.
- Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
- CAUTION:** Use only the battery provided. There may be a risk of explosion if a wrong type of battery is used for the parent unit. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of battery into fire or a hot oven, or mechanically crushing or cutting the battery can result in an explosion. Leaving the battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid of gas. Battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in **The RBRC seal**.
- Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product.
 - Power adapter information:
Baby unit output: ; VTech Telecommunications Ltd.; Model: VT07EUS05150
Parent unit output: ; VTech Telecommunications Ltd.; Model: VT07EUS05200
 - Rechargeable battery information:
Zhuhai Great Power Energy Co., Ltd.; Lithium battery, 3.7V 5000mA; Model: GSP806090

Get Started


1. Connect the baby monitor

Notes:

- The rechargeable battery in the parent unit is built-in.
- Use only the power adapters supplied with this product.
- Make sure the parent unit and the baby unit are not connected to the switch controlled electric outlets.
- Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of the parent unit and the baby unit, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.
- To maintain compliance with the FCC's RF exposure guidelines, place the baby unit at least 20cm from nearby persons.

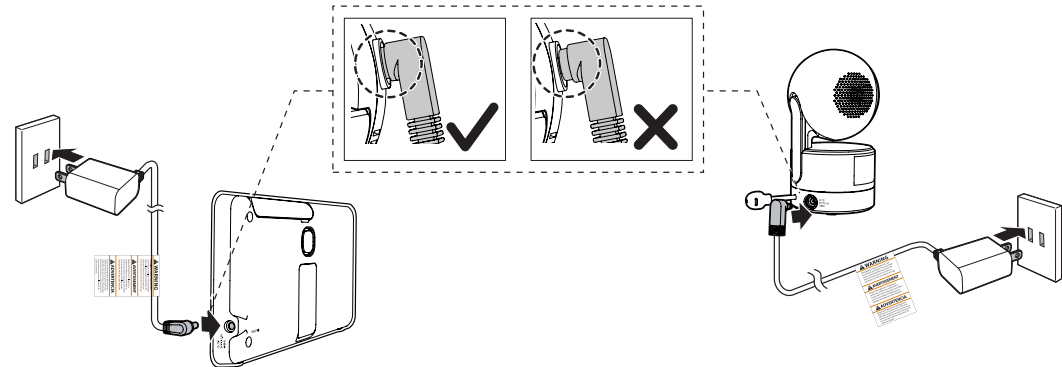


Overview - Parent Unit

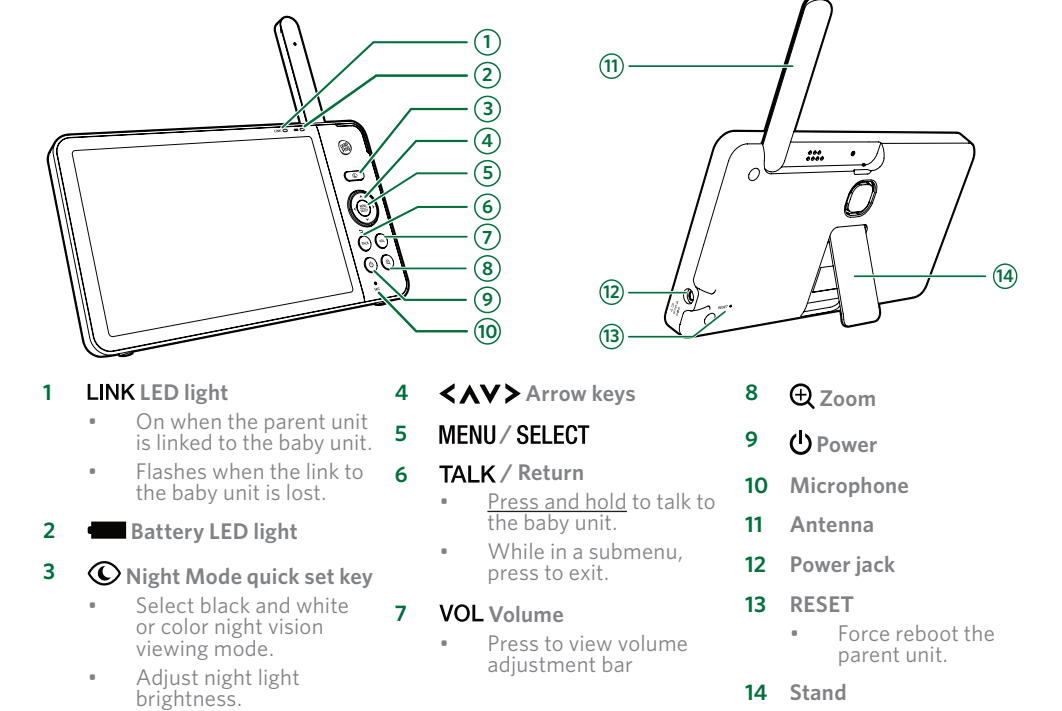

- LINK LED light**
 - On when the parent unit is linked to the baby unit.
 - Flashes when the link to the baby unit is lost.
- Battery LED light**
- Night Mode quick set key**
 - Select black and white or color night vision viewing mode.
 - Adjust night light brightness.
- <AV> Arrow keys**
- MENU / SELECT**
- TALK / Return**
 - Press and hold to talk to the baby unit.
 - While in a submenu, press to exit.
- VOL Volume**
 - Press to view volume adjustment bar
- Zoom**
 - Force reboot the parent unit.
- Power**
- Microphone**
- Antenna**
- Power jack**
- RESET**
- Stand**

Overview - Baby Unit

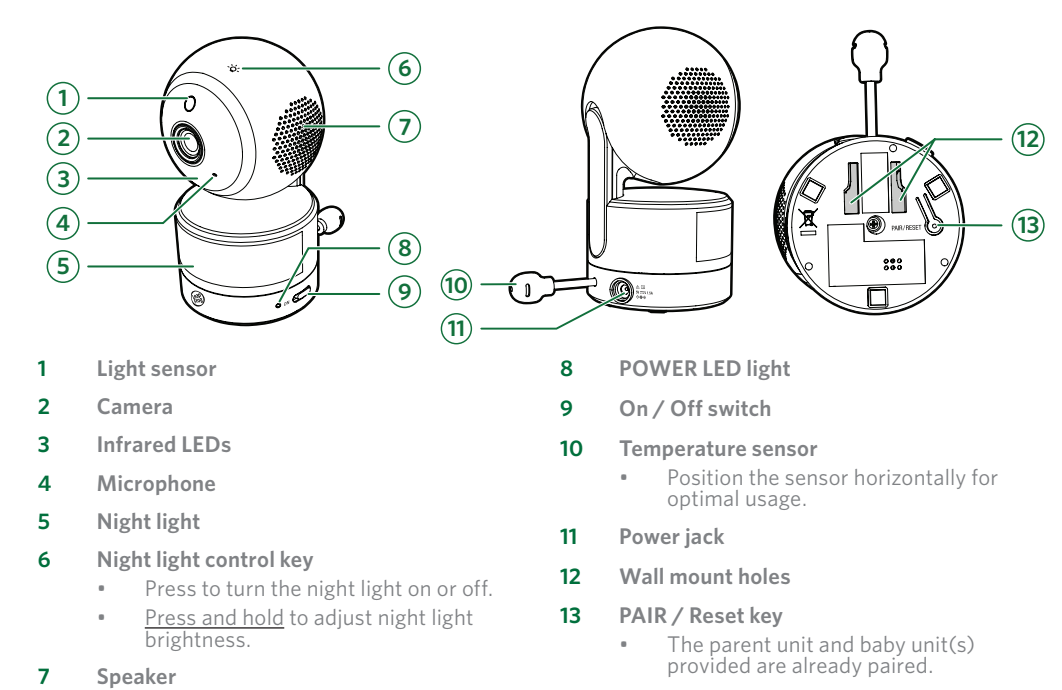

- Light sensor**
- Camera**
- Infrared LEDs**
- Microphone**
- Night light**
- Night light control key**
 - Press to turn the night light on or off.
 - Press and hold to adjust night light brightness.
- Speaker**
- POWER LED light**
- On / Off switch**
- Temperature sensor**
 - Position the sensor horizontally for optimal usage.
- Power jack**
- Wall mount holes**
- PAIR / Reset key**
 - The parent unit and baby unit(s) provided are already paired.

- The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.
- For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
- Unplug this product from the wall outlet before cleaning.
- Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning. Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation.
- Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped.
- This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
- Do not overload wall outlets or use an extension cord.
- Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
- This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register.
- Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
- To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the product is subsequently used.
- You should test the sound reception every time you turn on the units or move one of the components.
- Periodically examine all components for damage.
- There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordless telephones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you will not use it for some time.
- Children should be supervised to ensure that they do not play with the product.
- The product is not intended for use by persons (including children) with reduced physical, sensory or mental

Charge the parent unit battery before use

When you have connected and turned on the parent unit, the battery charges automatically.

Notes:

- Before using the baby monitor for the first time, charge the parent unit battery for 12 hours. When the parent unit battery is fully charged, the battery icon becomes solid .
- It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off while charging.
- The standby time varies depending on the sensitivity levels you set, your actual usage time and the age of the battery.


The battery icon on the screen indicates the battery status (see the following table).

Battery Indicators	Battery Status	Action
The screen displays . The light flashes.	The battery has very little power left and may only be used for a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid .	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.

Basic Operation - Parent Unit


Adjust parent unit's speaker volume

- Press **VOL** to open the volume adjustment bar.
- Press to increase the speaker volume and to decrease the speaker volume.

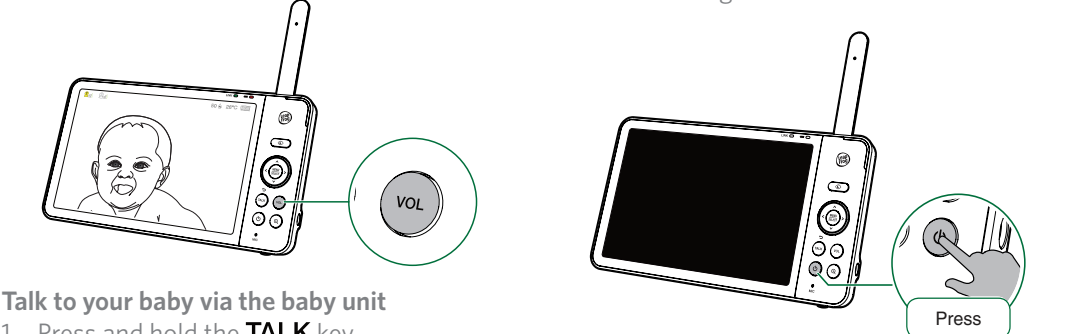

Talk to your baby via the baby unit

- Press and hold the **TALK** key.
- When the icon displays on screen, speak to your parent unit. Your voice is transmitted to the baby unit.
- When finished talking, release the **TALK** key and hear your baby again.

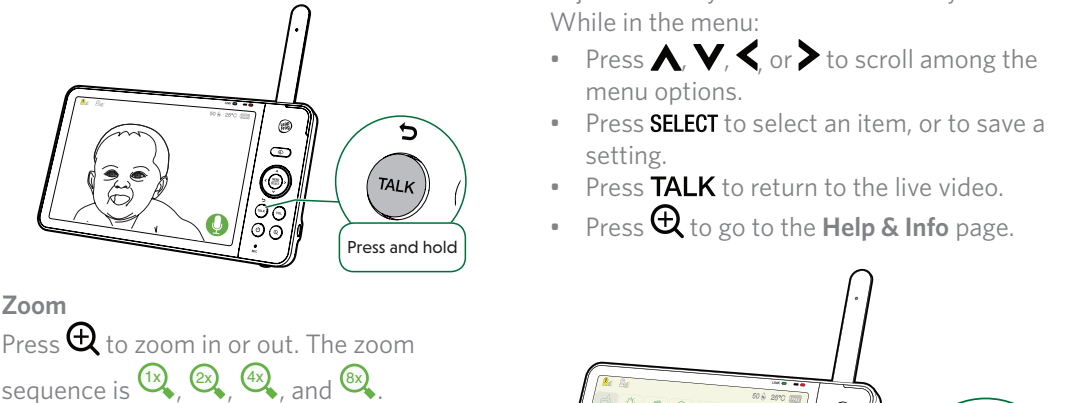


Zoom

Press to zoom in or out. The zoom sequence is , , , and .

Turn on/off the parent unit screen

You can turn on or off the parent unit screen without powering off the parent unit. You will still be able to hear sounds from the baby unit.

- Press on the parent unit to turn off the screen.
- Press any key on the parent unit to turn on the screen again.

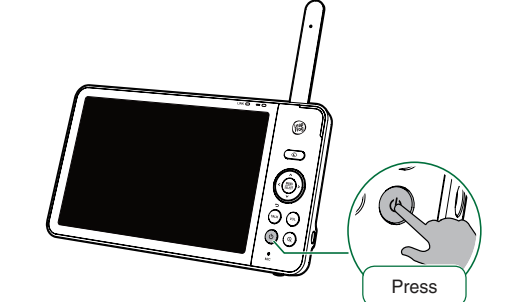

Use the menu

Press **MENU** to enter the menu, choose a menu item, or save a setting. You can use the parent unit for advanced settings or operations, such as to play or stop the baby unit lullaby, or to adjust the baby unit sound sensitivity. While in the menu:

- Press , , or to scroll among the menu options.
- Press **SELECT** to select an item, or to save a setting.
- Press **TALK** to return to the live video.
- Press to go to the **Help & Info** page.



capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SAVE THESE INSTRUCTIONS

Cautions

- Use and store the product at a temperature between 32oF and 104oF.
- Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source.
- Batteries should not be exposed to excessive heat such as bright sunshine or fire.
- Warning—Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9m) away). Do not remove this tag.
- Never place the baby unit(s) inside the baby's crib or playpen. Never cover the baby unit(s) or parent unit with anything such as a towel or a blanket.
- Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

Precautions for users of implanted cardiac pacemakers

Cardiac pacemakers (applies only to digital cordless devices): Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

Pacemaker patients


- Should keep wireless devices at least six inches from the pacemaker.
- Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices.

Electromagnetic fields (EMF)

This LeapFrog product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

2. Power on or off the Baby Monitor


- Slide the power switch to **ON** to power on your baby unit.
- After the parent unit is fully charged, press and hold until the welcoming screen appears.

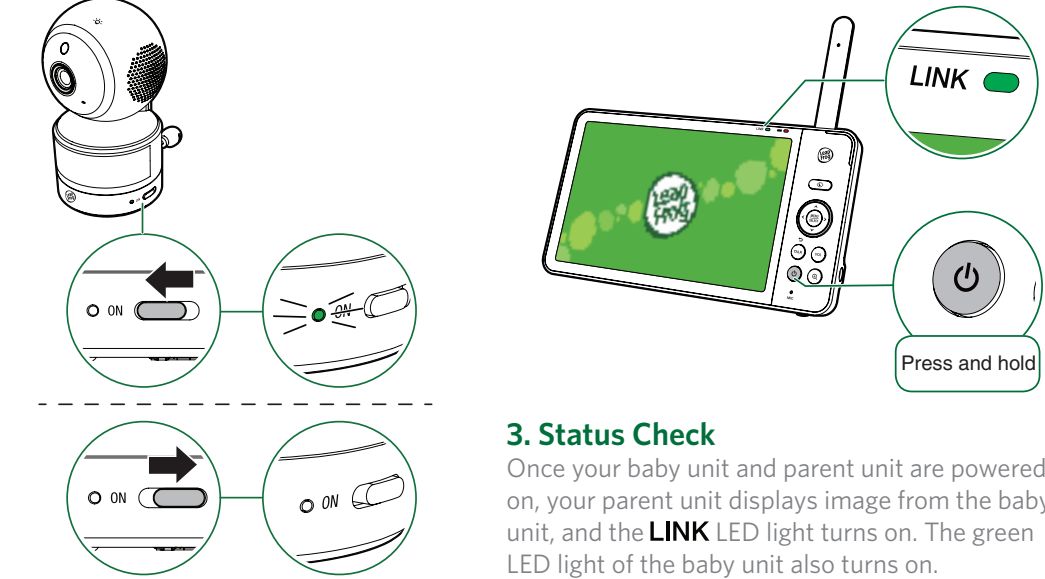

3. Status Check


Once your baby unit and parent unit are powered on, your parent unit displays image from the baby unit, and the **LINK** LED light turns on. The green LED light of the baby unit also turns on.

What's Included

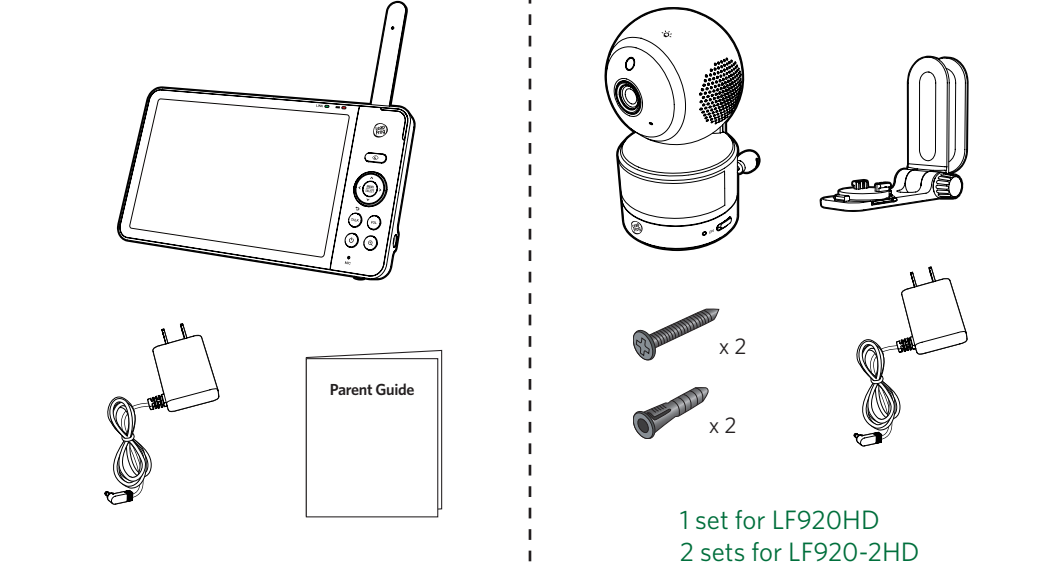

1 set for LF920HD
2 sets for LF920-2HD

4. Positioning the Baby Monitor

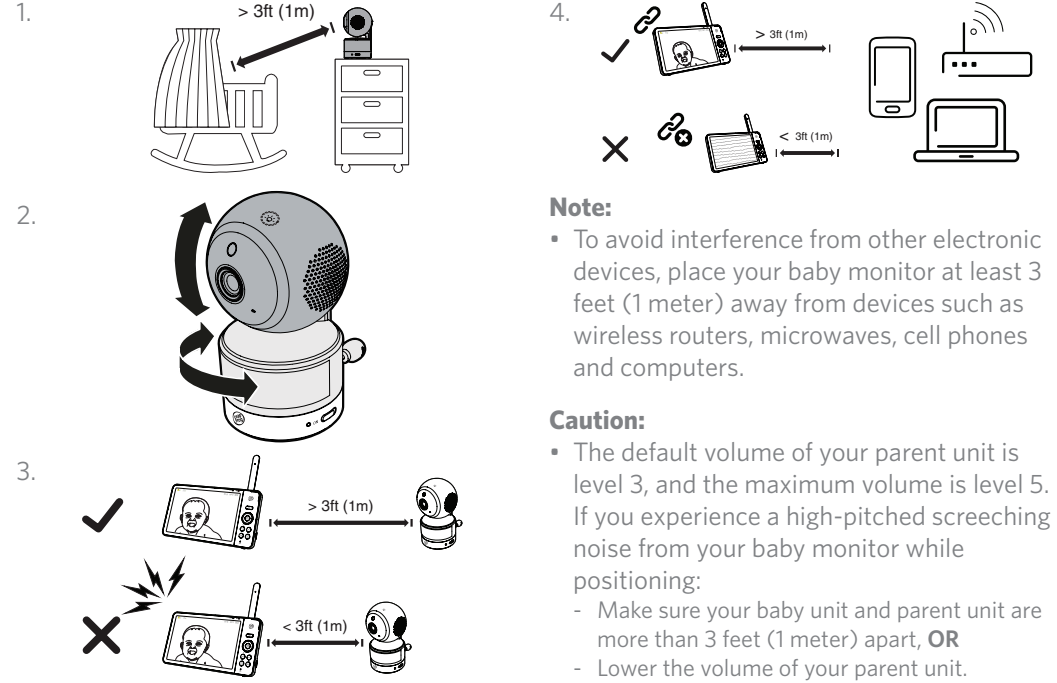

Note:

- To avoid interference from other electronic devices, place your baby monitor at least 3 feet (1 meter) away from devices such as wireless routers, microwaves, cell phones and computers.

Caution:

- The default volume of your parent unit is level 3, and the maximum volume is level 5. If you experience a high-pitched screeching noise from your baby monitor while positioning:
 - Make sure your baby unit and parent unit are more than 3 feet (1 meter) apart, **OR**
 - Lower the volume of your parent unit.

(See **Sound Detection and Auto Wake Up** sections)

Motion

- Turn on/off **Motion Alert**.
- Select motion **Sensitivity** level.

(See **Motion Detection** section)

Temperature

- Turn on/off **Temperature Alert**. Set the parent unit to beep whenever the room temperature detected by the baby unit falls outside the set temperature range.
- Select the **Minimum** temperature for alert range.
- Select **Maximum** temperature for alert range.
- Select temperature **Format**. Set temperature to display in Fahrenheit (°F) or Celsius (°C).

LCD settings

- Adjust parent unit screen **Brightness**.
- Turn on/off **Dim Mode**.

Camera settings

- Turn on/off **Status LED** indicator. Set the Link, Battery, and Sound Level Indication LED lights on the parent unit to turn on or flash to indicate unit conditions.
- Adjust baby unit's speaker **Volume**.

General settings

- Turn on/off **Low Battery Alert Tone**. Set the parent unit to beep when the battery is low.
- Turn on/off **No Link Alert Tone**. Set the parent unit to beep when the link between the parent unit and the baby unit is lost.

Status Bar Icons

- Current view status**
 - The baby unit number that is being viewed when in:
 - Single Baby Unit mode.
 - Patrol mode (* For LF920-2HD only).
 - Split mode (* For LF920-2HD only).
- Split mode (* For LF920-2HD only)
- Patrol mode (* For LF920-2HD only)
- Black and white night vision is activated.
- Color night vision is activated.
- Motion detection and alert is turned on.
- Sound detection and alert is turned on.
- Melodies or soothing sounds are playing.
- Night light is turned on and the automatic brightness setting is turned off.
- Night light is turned on and the automatic brightness setting is turned on.
- Parent unit speaker is muted.
- Temperature alert is turned on.
- Humidity
- Temperature
- Battery level indicator

Parent Unit Icons (continued)

Alert Icons

Displays when the parent unit's battery is low and needs charging.

Displays when motion is detected by a baby unit.

Displays when sound is detected by a baby unit.

Displays when the temperature detected by the baby unit exceeds the set maximum.

Displays when the temperature detected by the baby unit is lower than the set minimum.

Night Vision (B&W and Color)

Night Vision Mode	Description
	B&W night vision - Suitable for extremely dark or low light environments.
	Color night vision - Suitable for low-light room conditions with night light as an assisting light source.

Change your night vision viewing mode

1. Press the **Night mode quick set key** to view the Night mode menu.

2. Press or to choose for black and white night vision viewing or for color night vision viewing.

The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit being viewed detects low light levels, the infrared LEDs are switched on automatically. When the images from the baby unit are in black and white, and appears on the screen. When the images from the baby unit are in color, appears on the screen.

- Notes
- It is normal to see a short white glare on your parent unit screen as the baby unit is adapting to the dark environment.
 - When the infrared LEDs are on, it is normal for the images to be in black and white.
 - If night vision is not activated, newly saved settings will apply the next time night vision is activated.
- Tip
- The video quality may vary depending on the surrounding environment and interfering factors like lightings, objects, colors and backgrounds. Adjust the baby unit's angle or place the baby unit at a higher elevation to prevent glare and blurry displays.

Sound Detection and Auto Wake Up

Adjust Sound Detection Sensitivity
You can turn on **Sound Detection Alert** and adjust the **Sound Sensitivity** to only detect your desired level of sounds. When detected, the parent unit screen turns on if it has been switched off or dimmed.

When the baby unit detects sounds that exceed the chosen level, the parent unit screen turns on and the baby unit transmits the detected sounds to the parent unit. You will be able to see and hear your baby.

If you have turned on **Sound Detection Alert**, the parent unit beeps when the baby unit detect sounds.

Sound Sensitivity Level	Level 3 (Highest)	Level 2 (Medium)	Level 1 (Lowest)
Description	The parent unit screen and speaker turn on for very small sounds, including background noises from your baby's room.	The parent unit screen and speaker turn on for babbling and louder sounds from your baby. The parent unit remains quiet when your baby makes soft sounds.	The parent unit screen and speaker turn on only for loud crying or screaming sounds from your baby. The parent unit remains quiet when your baby makes soft sounds.

Sound Activated Screen and Audio - Auto Wake-Up

When **Auto Wake-Up** is turned on, the parent unit screen stays off to save power when the baby unit detects no sound. Once the baby unit detects sounds that are louder than the chosen sound sensitivity level, the parent unit screen and speaker turn on automatically. The parent unit will then turn off again after no sound has been detected for a while.

- Notes:
- If you have muted the parent unit speaker, only the parent unit screen will turn on when a sound is detected.
 - If you have turned on **Auto Wake Up** but turned off **Sound Detection Alert**, the parent unit will wake up when the baby unit detects sounds that are louder than the chosen sound sensitivity level.

The RBRC seal

The RBRC seal on the Li-ion battery indicates that LeapFrog Enterprises, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada. The program provides a convenient alternative to placing used Li-ion batteries into the trash or municipal waste, which may be illegal in your area. LeapFrog's participation makes it easy for you to drop off the spent battery at local retailers participating in the program or at authorized LeapFrog product service centers. Please call 1 (800) 8 BATTERY for information on Li-ion battery recycling and disposal bans/restrictions in your area. LeapFrog's involvement in this program is part of its commitment to protecting our environment and conserving natural resources. The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2recycle, Inc.

FCC and IC regulations

FCC Part 15
This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more. The transmitter and antenna of the parent unit shall be held at least 1 in (2.5 cm) from your face.

This Class B digital apparatus complies with Canadian requirement: CAN ICES-3 (B)/NMB-3(B)

Industry Canada
This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The term "IC" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

RF radiation exposure statement
The baby unit complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

California Energy Commission battery charging testing mode

This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to baby units, the CEC battery charging testing mode is activated while it is powered off and charging.

Motion Detection

Adjust Motion Detection Sensitivity
You can turn on **Motion Alert** and adjust the **Motion Sensitivity** to only detect your desired level of motion. When detected, the parent unit screen turns on if it has been switched off or dimmed.

When the baby unit detects motions that exceed the chosen level, the parent unit screen turns on and displays lives images from the baby unit. You will be able to see and hear your baby.

If you have turned on **Motion Alert**, the parent unit beeps when the baby unit detect movements.

Motion Sensitivity Level	Level 3 (Highest)	Level 2 (Medium)	Level 1 (Lowest)
Description	The parent unit screen and speaker turn on for small motions, such as yawning or stretching.	The parent unit screen and speaker turn on for normal daily motions, such as people walking around the house.	The parent unit screen and speaker only turn on for large motions, such as children running or jumping around.

Night Light

Want a softer hue from the baby unit's night light to relax your little one? You can control the brightness of its glow remotely from your parent unit, or directly on the baby unit.

Adjust the night light on the parent unit

1. Press the **Night mode quick set key** to view the Night mode menu.

2. Press to brighten the night light (or turn on the night light when it is switched off). Press to dim the night light (or turn off the night light when it is at the lowest brightness level).

- OR -

1. Press **MENU** to enter the main menu.

2. Press and to select , press **SELECT**.

3. Press and to select , press **SELECT**.

4. Press and to choose the desired brightness level, then press **SELECT** to confirm your selection.

Adjust the night light on the baby unit

- Tap the **Night light control key** located on the top of the baby unit to turn on/off the night light.
- Tap and hold the **Night light control key** to adjust the night light's brightness.

Notes

- If auto night light brightness has been selected, but the brightness was adjusted (either on the baby unit or the parent unit), auto brightness mode will automatically turn off and switch to the fixed level of brightness.

Dim Mode

The parent unit display will dim to conserve energy after 5 minutes of inactivity, in which there were neither any key pressed nor alert received from the baby unit.

5 minutes of inactivity

Press any button

For LF920-2HD Only

Monitoring mode

Change different views - Single CAM

Select baby unit 1 or baby unit 2 to view the image from the selected baby unit.

Change different views - Patrol

Select Patrol mode as your monitoring mode to alternately view the image from baby units and every 10 seconds.

Change different views - Split

Select Split mode as your monitoring mode to view the images from both baby units at once.

- Note
- While in Split mode, you can press or to highlight the view of the baby unit or baby unit 2 , and hear the sounds transmitted from the highlighted baby unit.

Disclaimer and Limitation of Liability

LeapFrog and its suppliers assume no responsibility for any damage or loss resulting from the use of this handbook. LeapFrog and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this software. LeapFrog and its suppliers assume no responsibility for any damage or loss caused by deletion of data as a result of malfunction, dead battery, or repairs. Be sure to make backup copies of important data on other media to protect against data loss.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRIED OPERATION.
CAN ICES-3 (B)/NMB-3(B)

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Warranty: Please visit our website at leapfrog.com/legal for full details of the warranty provided in your country.

Customer Support

Visit our Consumer Support website 24 hours a day at:
U.S.: leapfrog.com/support
C.A.: leapfrog.ca/support
Or call our **Customer Service number:** 1 (800) 701-5327 in the U.S. and Canada during Customer Service hours Monday to Friday, 7am - 2pm PST

Instructions for Care

FOR INDOOR, DRY-LOCATION USE ONLY.

To keep this product in good condition, follow these guidelines:

- Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps).
- Clean with a slightly damp cloth in cold water (do not use soap, detergent, or other chemicals).
- Make sure the product is dry before you connect it to the power source again.
- Avoid prolonged exposure to extreme temperatures and direct sunlight or moisture.

- Do not spill liquid of any kind on this product or immerse the product in water as it may render it inoperative.
- Keep food and beverages away from this product.
- Never try to dismantle the unit.
- Avoid dropping the product or treating it roughly.

Mount the baby unit on a dry wall (optional)

Notes

- Check for reception strength and the baby unit's viewing angle before drilling the holes.
- The types of screws and anchors you need depend on the composition of the wall. You may need to purchase the screws and anchors separately to mount your baby units.

1. Place the wall mount bracket on a wall and then use a pencil to mark the top and the bottom holes as shown. Remove the wall mount bracket and drill two holes in the wall (7/32 inch drill bit).

2. If you drill the holes into a stud, go to step 3.

- If you drill the holes into an object other than a stud, insert the wall anchors into the holes. Tap gently on the ends with a hammer until the wall anchors are flush with the wall.

3. Align the wall mount bracket and screws with the holes in the wall as shown. Tighten the screw in the middle hole first, so that the wall mount bracket position is fixed. You can tighten the other screw in the top hole.

OR

3. Insert the screws into the holes and tighten the screws until only 1/4 inch of the screws are exposed.

4. Place the baby unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the baby unit.

4. Place the baby unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the baby unit. Align the holes on the wall mount bracket with the screws on the wall, and slide the wall mount bracket down until it locks into place.

5. You can maximize your baby unit's viewing angles by tilting the wall mount bracket. Hold the baby unit, and then rotate the knob in an anti-clockwise direction. This will loosen the joint of the wall mount bracket. Tilt your baby unit up or down to adjust to your preferred angle. Then, rotate the knob in a clockwise direction to tighten the joint and secure the angle.

Troubleshooting	
Symptom	Try this
Why does the baby monitor not respond normally?	Try the following (in the order listed) for a common cure: 1. Disconnect the power to the baby unit(s) and the parent unit. 2. Wait a few seconds before connecting power back to the baby unit(s) and the parent unit. 3. Turn on the baby unit(s) and the parent unit. 4. Wait for the parent unit to synchronize with the baby unit(s). Allow up to one minute for this to take place.
Why doesn't the baby unit's and parent unit's power LED turn on when I switch on the units?	The parent unit may not be connected to power. Insert the appliance plug into the power jack of the parent unit and put the adapter in a wall socket. Then, press the Power button on the parent unit to establish connection with the baby unit. The baby unit may not be connected to power. Insert the appliance plug into the power jack of the baby unit and put the adapter in a wall socket. Then, slide the On/Off switch on the baby unit to establish connection with the parent unit.
Why doesn't my parent unit charge when connected to AC power?	Make sure your power source is not controlled by a wall switch.
Why are my images in black and white?	The images are in black white during night-time or in a dark room when night vision is automatically activated. You can also choose to view your baby at night in color, see Night Vision (B&W and Color) to learn how.
Why is the baby unit producing a high-pitched noise?	The parent unit and baby unit(s) may be too close to each other. - Move the parent unit away from the baby unit(s) until the noise stops; OR - Turn down the volume of your parent unit.
Why does the parent unit beep?	The baby unit(s) may be out of range. Move the parent unit closer to the baby unit(s) (but not less than 3 feet). The parent unit may not have enough battery for the parent unit to perform normally. Charge the parent unit until the battery icon becomes solid .
Why can't I hear any sounds from the parent unit? Why can't I hear my baby cry?	The parent unit speaker volume may be too low or muted. Press VOL to open the volume adjustment menu, then press to increase the speaker volume. Or you can use the parent unit menu to change the parent unit's sound sensitivity to the highest level (level 5), see Sound Detection and Auto Wake Up .
Why can't I establish a connection? Why does my connection cut off every now and then? Why are there sound interruptions?	The baby unit(s) may be out of range. Move the parent unit closer to the baby unit(s) (but not less than 3 feet). Other electronic and wireless products may cause interference with your baby monitor. Try installing your baby monitor as far away from these devices as possible. If you powered on only one baby unit but have two paired to the parent unit, your parent unit may display and the LINK LED light flashes. Switch to the baby unit you have turned on via the menu.