

GameSir Game controller

User Manual

Model No.: GameSir-G3s




※Product Introduction

GameSir Game controller Enhanced Edition (G3s) is connected by Bluetooth and 2.4G, it applies to Android devices (above 4.0 version), computers, and PlayStation3 consoles. This Game controller can identify all the devices automatically, no need driver installation, button mapping setting, or root.

※Product Specification

Product Name	Gamesir G3s Enhanced Edition	Model No.	GameSir-G3s
Working Platforms	Android / PC / PS3	Working Temp.	-20℃ ~ 65℃
		Working Humidity	20 ~ 80%
Working Modes	Android Standard / PS3/ Mouse Simulation/ Xinput/ Dinput	Connection Types	Bluetooth / 2.4G/ Wired
Charging Voltage	3.7V ~ 5.2V	Charging Time	2 ~ 3H
Charging Current	1A ~ 2A	Working Distance	Approx. 7m
Gift Box Size	187 X 122 X 78 mm	Battery capacity	600mA
Product Size	160 X 104 X 59 mm	Net Weight	189g

※Product Overview

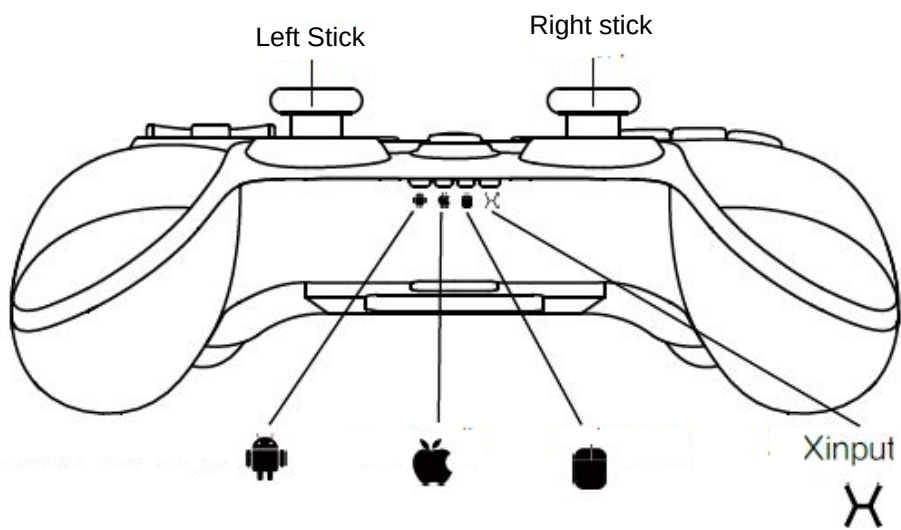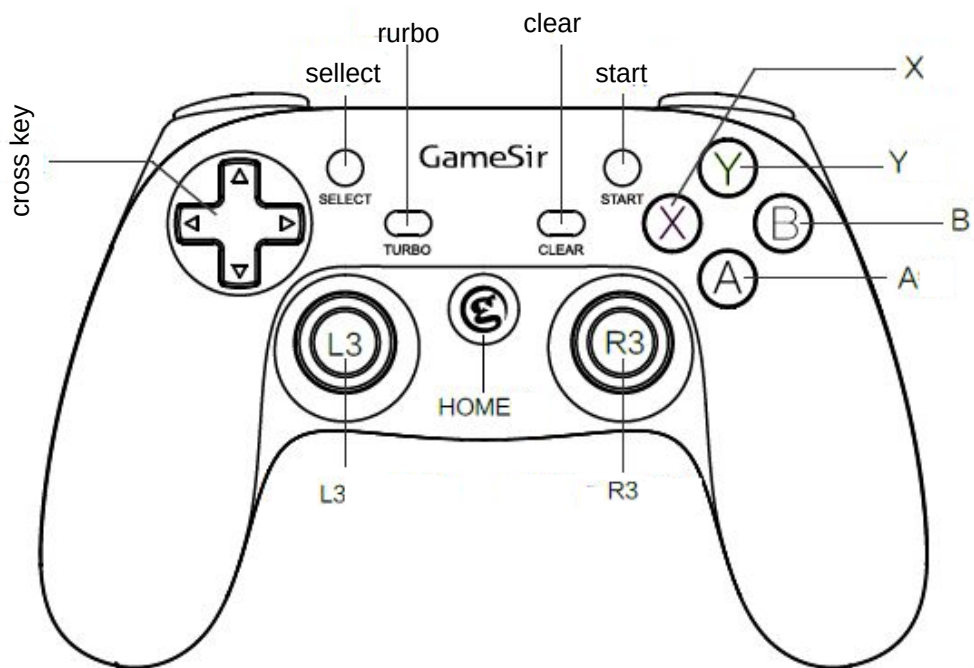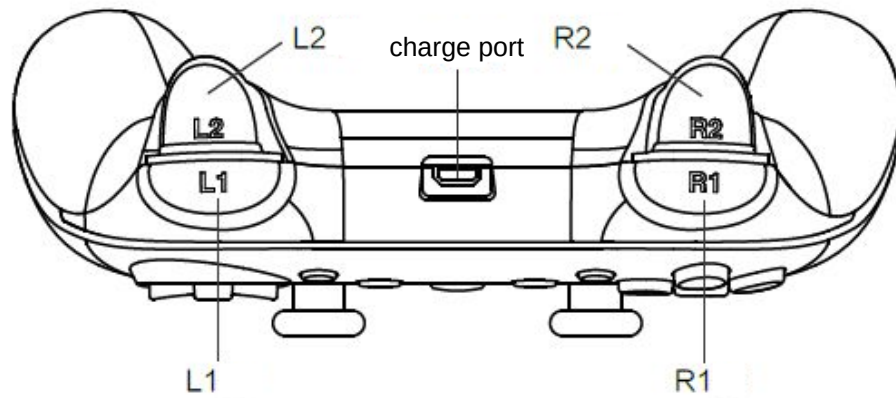

※Product Function

Power On / Off

1. Power On: Press HOME button for 2 seconds to start.
2. Power Off: Press HOME button for 5 seconds to power off.

Low Battery Indication

HOME and ABXY lights flash once/ second.

Charging Indication

1. Charge under connection state

When connect the charging cable, the HOME and ABXY lights flash once / 2 seconds, the lights keep on when it is fully charged.

2. Charge under sleeping state

When connect the charging cable, the Game controller wakes up and enters current mode, no signal received after 1 minute, mode lights turn off. HOME and ABXY Button lights start flashing, the lights keep on when it is fully charged.

Sleeping Function

1. The Game controller enters sleep state after 1-minute disconnection.
2. The Game controller enters sleep state after 5-minute no action.

Turn On/Off Button Light

Press L1 + R1 button for 5 seconds to turn on/ off the button light.

※Game controller Connection

Android Platform

1. Connection Method

- a. Open the Bluetooth on Android device.
- b. Press" A + HOME" button simultaneously for 2 seconds to turn on the Game controller.
- c. The  indicator light flashes.
- d. One signal will be found on your screen "GameSir-G3s"

- e. Choose and connect the right one “ GameSir-G3s “ on the Bluetooth management interface.
- f. When  indicator light keeps on and  indicator light flashes, the Game controller is connected successfully.

2. Enter or Exit Mouse Simulation Mode

Mouse Simulation Mode enables the Game controller to work as mouse. Left joystick simulates mouse move, A button simulates the left mouse click, B button simulates the right mouse click.

- a. Enter mouse mode: When Game controller is connected, press SELECT+ X button simultaneously to enter Mouse Simulation Mode,  indicator light keeps on.
- b. Exit mouse mode: Press SELECT + X button simultaneously to exit the Mouse Simulation Mode,  indicator light flashes.

3. Android mode only

Press B + HOME button simultaneously for 2 seconds to start the Game controller. The difference of this start is the mouse light does not flash after connection, no Mouse Simulation Mode.

Smart TV/ TV Box

Connection Method

- a. Plug USB 2.4G receiver into the USB port of your device.
- b. Press A + HOME button simultaneously for 2 seconds to start the Game controller.
- c. The  indicator light flashes
- d. When ( , ) indicator light keeps on,  indicator light flashes, the Game controller is connected successfully.

PC Platform (X-Input mode)

Connection Method

- a. Plug USB 2.4G receiver into the USB port of your device.
- b. Press X + HOME button simultaneously 2 seconds to start the Game controller.
- c. The  indicator light flashes.

- d. When  indicator light keeps on, the Game controller is connected successfully.

PlayStation3 Platform

Connection Method

- a. Press TURBO button and HOME button to enter PS3 pairing mode, and 4 indicator lights at the bottom begin to flash together.
- b. Plug in the USB wireless receiver or connect one end of USB cable to the USB port of PS3 device.
- c. Connect the other end of USB cable to Game controller or after plugging in USB wireless receiver, it will connect and match, then assigns IDs on PS3 device automatically. And the corresponding indicator light (based on the assigned ID number) will keep on.

✕Auto Reconnection

When device Bluetooth is on and Game controller is off

Press HOME button for 2 seconds to start Game controller, the Game controller will be reconnected to the device automatically.

When device Bluetooth is off and Game controller is on

Turn on the Bluetooth of device, the Game controller will be reconnected automatically.

When device Bluetooth is off and Game controller is off

Turn on the Bluetooth on device, Press HOME button for 2 seconds to start the Game controller, the Game controller will be reconnected to the device automatically.

When device is connected by 2.4G, and Game controller off

Press Home button for 2 seconds to start Game controller, the Game controller will reconnect to device automatically.

✕Package Content:

1. 1*GameSir game controller
2. 1*USB charging cable
3. 1*2.4Ghz Dongle
4. 1* User Manual.

※Wired Connection Method

Press HOME button for 2 seconds to start the Game controller, connect the Game controller with the device by USB cable. (Note: This wired connection requests OTG function of the Android device).

※TURBO Function Introduction

TURBO is semi-automatic, it creates one or more continuous button presses.

Setting Method

Press one or more buttons, (excluding D-pad, joysticks, SELECT, START button), and then press the " TURBO " button, to set TURBO function.

Clear TURBO

Press one or more buttons, and then click the " CLEAR " button to clear the TURBO.

Function

TURBO is used more in shooting games. Your fingers would easily get tired if you continuously press the same button (shooting button). With the TURBO, you can continuously shoot by holding the shooting button.

※Possible Problems

Why the Game controller can not be identified on computer?

1. Make sure your computer USB port is working.
2. USB voltage is not stable because of short of power supply of computer.
3. Try another USB port.
4. Need to install X360 Game controller software for systems below Windows XP (including XP)

Why the Game controller does not work in games?

1. The game does not support Game controller
2. Set the Game controller mode into the game before using

Why the Game controller does not vibrate?

1. The game does not support vibration.
2. Vibration function is not open in game setting.

Others

1. When the Game controller can not be turned on, it may be because of running out of battery, please use USB cable to charge the Game controller.
2. When the Game controller was crashed or disconnected, please keep the device at effective distance, or reconnect.
3. Factory settings reset: There is a small hole at the back of Game controller, press the hole by using a needle to reset the factory settings.

※Attention

1. Avoid strong vibration, do not disassemble, refit or repair on your own.
2. Do not keep in humid, high temperature or soot place.
3. Keep away from water or other liquid, as they may affect the performance of Game controller.
4. Keep away from fire, the built-in battery has the danger of explosion.
5. Charging voltage is USB 3.7-5.5V DC supply (normal Android smart phone charging power can be used)
6. Children should use this production under adult's supervision.
7. Please contact the distributor or our after-sale service staff if you have any quality problem or suggestion. Contact details can be found on the package.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

※Customer Support Center

If you come across any issue with this product, please do not hesitate to contact GameSir's customer service by email: cs@gamesir.hk, or visit our official Facebook Page: <https://www.facebook.com/myGamesir>.

We will try our best to solve your problem within 24 hours.



<https://www.facebook.com/mygamesir/>



If you want to get more information ,please visit our website:

<http://www.gamesir.hk>